

承认书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER):

客户料号 (CUSTOMER P/N):

品名 (DESCRIPTION):

DATE: 2021/3/28

规格 (SPECIFICATION): A11开L槽+背胶引线长23mm

REV.NO.: A0

鸿日昇威科技承认签核、盖章

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
品质	董晚红 2021-3-28	吕惠 2021-3-28	韦函满 2021-3-28	
工程	何伟华 2021-3-28	韦立红 2021-3-28	韦立红 2021-3-28	

备注:

承认签核、盖章

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
开发工程师				
采购				
品质				

备注:

深圳市鸿日昇威科技有限公司

HRSW ELECTRONICS CO.,LTD

ADD: 深圳市龙华新区观澜环观中路48号1栋2楼


TEL: +86-755-23461055

FAX: +86-0755-28015170

page: 1/3


SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

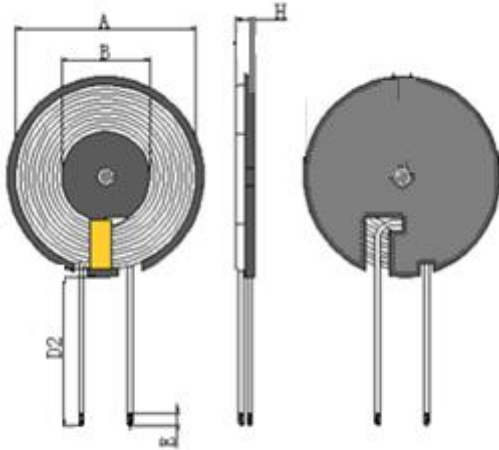

A	B	D2	E	H
50±1.0	20.5±0.5	23±3	3±1.5	2.8MAX

2. SCHEMATICS:



1. Coil attached magnetic disc, magnetic disc size $50\pm 1\text{mm}$,
Open L-cable slots.
2. Coil outlet position
Adhesive paper 1-2Ts;
3. Glue the bottom of the magnetic separator

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	丝包线 $\phi 0.08*105\text{mm}$ 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q值	HI-POT
TEST	Coil and diskette	S-F	Single Coil		
CON	100KHz, 0.25V	AT 25°C	100KHz, 0.25V		
SPEC	$6.5\mu\text{H}\pm 10\%$	70m Ω Max	$3.8\mu\text{H}\pm 15\%$		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	丝包线0.08*105股	丙酮丝包线0.08*105股	NANJINGJINNINGCO,LTD	
2	无铅锡条	无铅锡条	QIAODO	
3	磁片	50锰锌硬磁片开L槽	TAIYI CO.,LTD	
4	胶水	黄胶9999	LIANCHENG CO.,LTD	
5	高温胶纸	8mm宽高温胶纸	CUDAK CO.,LTD	
6	背胶	49*0.1	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	All L slot + adhesive lead length 23mm
DRAWN BY	CHECKED BY		APPROVED BY
何伟华	韦立红		韦立红

SPECIFICATION FOR APPROVAL

6. SAMPLE TEST DATA									
6. 1DIMENSION TEST (UNIT:mm)									
TEST ITEM	A	B	D2	E	H				
SPEC	50±1.0	20.5±0.5	20±3	3±1.5	2.8MAX				
1	49.8	20.65	21	3.50	2.55				
2	49.9	20.63	22.5	3.60	2.56				
3	49.5	20.65	22	3.70	2.49				
4	50	20.055	20	3.80	2.52				
5	49.86	20.45	25	4.00	2.50				
6									
7									
8									
9									
10									
MAX	50.00	20.65	25.00	4.00	2.56				
MIN	49.50	20.06	20.00	3.50	2.49				
AVERAGE	49.81	20.49	22.10	3.72	2.52				
6. 2ELECTRICAL TEST									
TEST ITEM	L		DCR	IDC		Q	HI-POT		
	S-F		S-F						
TEST COND	100KHz/0.25v		AT 25℃						
SPEC	6.5uH ±10%		70mΩ (Max)						
1	6.51		52.00						
2	6.52		53.00						
3	6.49		51.00						
4	6.53		49.00						
5	6.52		50.00						
6									
7									
8									
9									
10									
MAX	6.53		53.00						
MIN	6.49		49.00						
AVERAGE	6.51		51.00						
HRSW ELECTRONICS CO., LTD					PART NO		A11开L槽+背胶引线长23mm		
					TITLE				
DRAWN BY			CHECKED BY			APPROVED BY			
何伟华			韦立红			韦立红			