

Produkte
Products

Prüfbericht-Nr.: <i>Test Report No.:</i>	50181472 001	Auftrags-Nr.: <i>Order No.:</i>	144195194	Seite 1 von 17 <i>Page 1 of 17</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	07.09.2018	
Auftraggeber: <i>Client:</i>	Tsuga Engineering, LLC dba Joey Energy 3809 Morning Mist Way, Bellingham, WA 98229, United States			
Prüfgegenstand: <i>Test item:</i>	Bluetooth Phone Locator and Charger			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	Joey T3			
Auftrags-Inhalt: <i>Order content:</i>	FCC Certification			
Prüfgrundlage: <i>Test specification:</i>	FCC Part 15 Subpart C; ANSI C63.10-2013			
Wareneingangsdatum: <i>Date of receipt:</i>	10.09.2018 24.09.2018			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000805578 A000812499			
Prüfzeitraum: <i>Testing period:</i>	28.09.2018 – 13.10.2018			
Ort der Prüfung: <i>Place of testing:</i>	Hong Kong			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Hong Kong Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			

geprüft von / tested by:

 16.11.2018 Joey Leung
 Project Manager


kontrolliert von / reviewed by:

 16.11.2018 Sharon Li
 Unit Senior Manager


Sonstiges: **FCC ID: 2AR CZ-T3620018**
Others:
Zustand des Prüfgegenstandes bei Anlieferung: **Prüfmuster vollständig und unbeschädigt**
Condition of the test item at delivery: **Test item complete and undamaged**

* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft
 P(ass) = entspricht o.g. Prüfgrundlage(n) F(fail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet
 Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor
 P(ass) = passed a.m. test specification(s) F(fail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.

Table of Content

	Page
Cover Page	1
Table of Content.....	2
Product information.....	3
Manufacturers declarations	3
Product function and intended use.....	3
Submitted documents	3
Independent Operation Modes	3
Related Submittal(s) Grants.....	3
Remark	3
Test Set-up and Operation Mode.....	4
Principle of Configuration Selection.....	4
Test Operation and Test Software	4
Special Accessories and Auxiliary Equipment	4
Countermeasures to achieve EMC Compliance	4
Test Methodology	5
Radiated Emission	5
Field Strength Calculation	5
Test Setup Diagram	6
Test Facility	8
Test Laboratory Information	8
List of Test and Measurement Instruments.....	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C	11
FCC 15.203 – Antenna Requirement 1	Pass 11
FCC 15.204 – Antenna Requirement 2	Pass 11
FCC 15.207 – Conducted Emission on AC Mains	Pass 12
FCC 15.207 – Conducted Emission on AC Mains	Pass 13
FCC 15.247 (a)(2) – 6dB Bandwidth Measurement	Pass 14
FCC 15.247 (b)(3) – Maximum Peak Conducted Output Power.....	Pass 14
FCC 15.247 (e) – Power Spectral Density	Pass 15
FCC 15.247 (d) – Spurious Conducted Emissions.....	Pass 15
FCC 15.205 – Radiated Emissions in Restricted Frequency Bands	Pass 16
Appendix 1 – Test Protocols	19 pages
Appendix 2 – Test Setup	4 pages
Appendix 3 – EUT External Photos.....	4 pages
Appendix 4 – EUT Internal Photos	5 pages
Appendix 5 – RF Exposure Information	2 pages

Product information

Manufacturers declarations

BLE Transceiver	
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK
Number of channels	40
Channel separation	2 MHz
Type of antenna	Integral Antenna
Antenna gain (dBi)	1.60 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	Yes
Nominal voltage	V _{nor} : 5.0 VDC
Independent Operation Modes	Transmitting

Product function and intended use

The equipment under test (EUT) is a portable Bluetooth Low Energy device with smartphone charging. It consists of a user console attached to a battery compartment with a 30cm cable. The console has an OLED display, a USB-C port for charging the EUT and a USB-A port for charging smartphones. Both ports do not have data transfer features with computer peripherals.

FCC ID: 2ARCZ-T3620018

Models	Product description
Joey T3	Bluetooth Phone Locator and Charger

Submitted documents

Circuit Diagram
Block Diagram
Technical Description
User manual
Label

Independent Operation Modes

The basic operation mode is transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

During test, Channel & Power Controlling Software provided by the customer was used to control the operating channel. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

Special Accessories and Auxiliary Equipment

The following accessories provided by client were used in the testing:

- 1) AC/DC power adapter
Model: MCS-02WD
Input: 100 – 240VAC, 50 – 60Hz, 0.2A
Output: 5VDC, 0.85A
S/N: DA512585551
- 2) USB-A to USB-C cable
- 3) USB TTL serial cable with ferrite core
Manufacturer: GearMo
Model: SS-TTL3VT
S/N: 002689
- 4) USB-A to micro-USB cable
- 5) Smartphone with dedicated APP installed
Manufacturer: Samsung

Countermeasures to achieve EMC Compliance

Nil.

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360 °, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.


FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

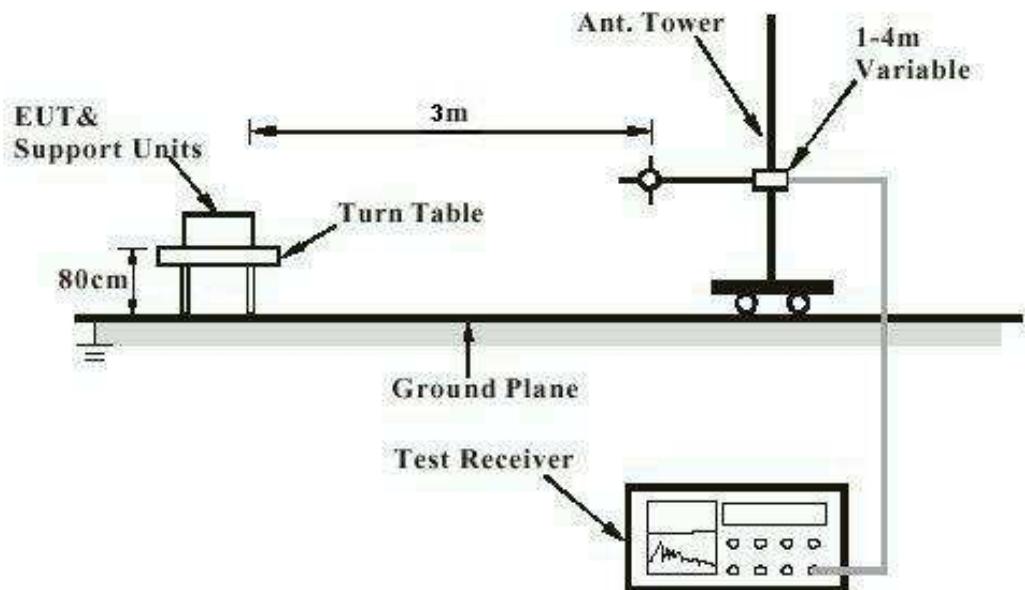

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

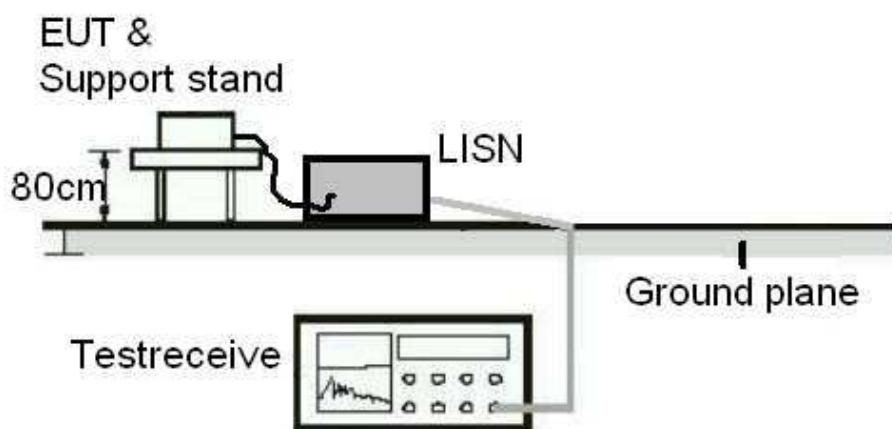
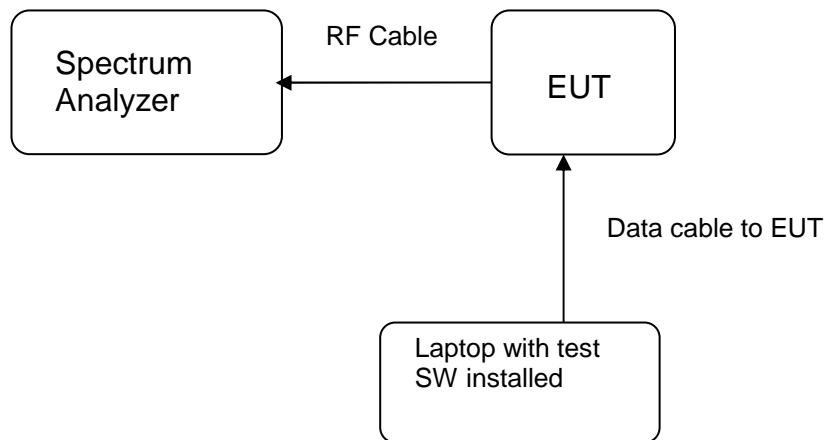


Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)

www.tuv.com

Test Facility

Test Laboratory Information

TÜV Rheinland Hong Kong Ltd.

Address: 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong

Tel.: +852 2192 1000

Fax: +852 2192 1001

Email service-gc@tuv.com

Web: www.tuv.com

The test facility is recognized or accredited by the following organizations:

Type	: Accredited Test Firm
Designation Number	: HK0013
Test Firm Registration Number	: 371735
Scope	: Intentional Radiators

List of Test and Measurement Instruments

Hong Kong Productivity Council (FCC Registration number: 90656)

Radiated Emission

Equipment	Manufacturer	Type	S/N	Cal. Date	Cal. Due Date
Semi-anechoic Chamber	Frankonia	Nil	Nil	23 Apr 2018	23 Apr 2019
Test Receiver	R & S	ESU40	100190	12 Jun 2018	12 Jun 2019
Bi-conical Antenna	R & S	HK116	100241	21 Mar 2018	21 Mar 2020
Log Periodic Antenna	R & S	HL223	841516/017	22 Mar 2018	22 Mar 2020
Cable with I-Joint Conector	Huber+Suhner	CNM-NMCMILX800-473	A2803 #0001	11 Dec 2017	11 Dec 2019
Active Loop Antenna	EMCO	6502	9107-2651	25 Oct 2018	24 Oct 2019
Semi-anechoic Chamber (SiteVSWR)	Frankonia	Nil	Nil	17 May 2018	17 May 2019
Double-Ridged Waveguide Horn	EMCO	3116	00109210	05 Oct 2018	04 Oct 2020
Double-Ridged Waveguide Horn	EMCO	3117	00094998	30 Aug 2018	29 Aug 2020
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	3950M00241	18 Jul 2018	17 Jul 2020
Preamplifier 18GHz to 40GHz with cable (EMC656)	A.H. Systems, Inc.	PAM-1840VH	168	29 Jan 2018	29 Jan 2019
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	9829213	30 Oct 2017	30 Oct 2019
High Frequency Cable	Pasternack	PE3VNA4001-3M	20160707C02493	29 Jan 2018	29 Jan 2019
Horn Antenna	EMCO	3115	9002-3347	28 Mar 2018	28 Mar 2020

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Cal. Date	Cal. Due Date
Spectrum Analyzer	R & S	FSP30	100610	03 May 2018	02 May 2019

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 2.42\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 4.81\text{dB}$ (9kHz to 30MHz) and $\pm 4.62\text{dB}$ (30MHz to 200MHz) and $\pm 5.67\text{dB}$ (200MHz to 1000MHz) and is $\pm 5.07\text{dB}$ (1GHz to 8.2GHz) and $\pm 4.58\text{dB}$ (8.2GHz to 12.4GHz) and $\pm 4.78\text{dB}$ (12.4GHz to 18GHz)

The estimated combined standard uncertainty for antenna conducted emission is $\pm 2.1\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:		
a) Antenna type: Integral PCB antenna		
b) Manufacturer and model no: N/A		
c) Peak Gain: 0dBi		
Verdict: Pass		
FCC 15.204 – Antenna Requirement 2		Pass
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results: Only one integral antenna can be used.		
Verdict: Pass		

FCC 15.207 – Conducted Emission on AC Mains						Pass
Test Specification	ANSI C63.10-2013					
Test date	28.09.2018					
Mode of operation	BLE TX mode + charging smartphone at USB-A port					
Port of testing	AC Mains input port of power supply					
Supply voltage	120Vac 60Hz					
Temperature	23°C					
Humidity	50%					
Requirement:	15.207(a)					
Results:	Pass					
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak (dB μ V)	Average (dB μ V)	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.170	56.0	---	66 - 56	56 - 46	Pass
	0.274	53.31	---	66 - 56	56 - 46	Pass
	0.358	48.45	---	66 - 56	56 - 46	Pass
	0.410	47.16	---	66 - 56	56 - 46	Pass
> 0.5 – 5	0.566	44.44	---	56	46	Pass
	0.814	42.21	---	56	46	Pass
	2.902	38.95	37.03	56	46	Pass
> 5 – 30	No peak found	---	---	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak (dB μ V)	Average (dB μ V)	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.170	57.55	37.91	66 - 56	56 - 46	Pass
	0.254	52.29	---	66 - 56	56 - 46	Pass
	0.338	47.55	---	66 - 56	56 - 46	Pass
	0.430	45.90	---	66 - 56	56 - 46	Pass
> 0.5 – 5	0.606	41.87	---	56	46	Pass
	0.826	41.27	---	56	46	Pass
> 5 – 30	No peak found	---	---	60	50	Pass
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.					
	The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1.					

FCC 15.207 – Conducted Emission on AC Mains						Pass
Test Specification : ANSI C63.10-2013						
Test date : 28.09.2018						
Mode of operation : BLE TX mode without charging smartphone at USB-A port						
Port of testing : AC Mains input port of power supply						
Supply voltage : 120Vac 60Hz						
Temperature : 23°C						
Humidity : 50%						
Requirement: 15.207(a)						
Results: Pass						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak (dB μ V)	Average (dB μ V)	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.174	57.98	---	66 - 56	56 - 46	Pass
	0.250	53.52	---	66 - 56	56 - 46	Pass
	0.334	48.45	---	66 - 56	56 - 46	Pass
	0.418	46.89	---	66 - 56	56 - 46	Pass
> 0.5 – 5	0.594	42.07	---	56	46	Pass
	2.906	36.93	33.69	56	46	Pass
> 5 – 30	No peak found	---	---	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak (dB μ V)	Average (dB μ V)	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0.15 – 0.5	0.170	57.55	---	66 - 56	56 - 46	Pass
	0.254	52.29	---	66 - 56	56 - 46	Pass
	0.338	47.55	---	66 - 56	56 - 46	Pass
	0.430	45.90	---	66 - 56	56 - 46	Pass
> 0.5 – 5	0.606	41.87	---	56	46	Pass
	0.826	41.27	---	56	46	Pass
> 5 – 30	No peak found	---	---	60	50	Pass
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.						
The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1.						

FCC 15.247 (a)(2) – 6dB Bandwidth Measurement		Pass	
FCC Requirement: Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.			
Test Specification : ANSI C63.10 – 2013 Test date : 12.10.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 120Vac Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1			
Channel frequency (MHz)	6 dB left (MHz)	6 dB right (MHz)	6dB bandwidth (kHz)
2402	2401.718	2402.456	0.738
2440	2439.718	2440.450	0.732
2480	2479.712	2480.438	0.726

FCC 15.247 (b)(3) – Maximum Peak Conducted Output Power		Pass	
FCC Requirement: For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)			
Test Specification : ANSI C63.10 – 2013 Test date : 12.10.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 120Vac Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1			
Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict
2402	-4.69	1 / 30.0	Pass
2440	-4.16	1 / 30.0	Pass
2480	-4.75	1 / 30.0	Pass

FCC 15.247 (e) – Power Spectral Density		Pass			
FCC Requirement: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.					
Test Specification : ANSI C63.10 – 2013 Test date : 12.10.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 120Vac Temperature : 23°C Humidity : 50%					
Results: For test protocols please refer to Appendix 1.					
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict		
2402	-5.61	8.0	Pass		
2440	-4.87	8.0	Pass		
2480	-5.36	8.0	Pass		
FCC 15.247 (d) – Spurious Conducted Emissions		Pass			
Test Specification : ANSI C63.10 – 2013 Test date : 12.10.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 120Vac Temperature : 23°C Humidity : 50%					
FCC Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Only the worst cases is shown below. For test protocols refer to Appendix 1					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	2400.000	-40.51	-5.19	-35.32	Pass
2440	4880.000	-42.09	-4.90	-37.19	Pass
2480	2483.500	-45.17	-5.48	-39.69	Pass
	4960.000	-42.14	-5.48	-36.66	Pass

FCC 15.205 – Radiated Emissions in Restricted Frequency Bands		Pass
Test Specification	: ANSI C63.10 – 2013	
Test Date	: 11.10.2018	
Mode of operation	: Tx mode	
Port of testing	: Enclosure	
Frequency range	: 9kHz – 25GHz	
Supply voltage	: 120Vac	
Temperature	: 23°C	
Humidity	: 50%	
FCC Requirement:	In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).	
Results:	<p>Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.</p> <p>Simultaneous transmission was investigated and no new emissions were found.</p> <p>All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.</p>	
Mode: 2402MHz TX	Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2390.000	52.4	74.0 / PK
2390.000	23.4	54.0 / AV
4804.721	53.9	74.0 / PK
4804.721	42.8	54.0 / AV
Mode: 2402 MHz TX	Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2390.000	56.2	74.0 / PK
2390.000	23.7	54.0 / AV
4803.732	53.7	74.0 / PK
4803.732	43.6	54.0 / AV
Mode: 2440 MHz TX	Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4879.716	51.0	74.0 / PK
4879.716	40.3	54.0 / AV
Mode: 2440 MHz TX	Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4879.708	61.7	74.0 / PK
4879.708	52.1	54.0 / AV
7319.500	56.3	74.0 / PK
7319.500	45.3	54.0 / AV

Mode: 2480MHz TX		
Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	62.9	74.0 / PK
2483.500	26.0	54.0 / AV
4959.698	49.0	74.0 / PK
4959.698	37.6	54.0 / AV
Mode: 2480 MHz TX		
Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	68.9	74.0 / PK
2483.500	28.1	54.0 / AV
4959.695	59.5	74.0 / PK
4959.695	49.8	54.0 / AV
7439.687	53.0	74.0 / PK
7439.687	42.5	54.0 / AV