



FCC TEST REPORT

FCC ID: 2ARE7-TX2

On Behalf of

ShenZhenShi NewStone Technology co., Ltd

2.4G Controller

Model No.: TX2, TX1, TX3, TX4, TX5, TX6 , TX7, TX8, TX9

Prepared for : ShenZhenShi NewStone Technology co., Ltd
Address : B2 blvd, YuHong Industrial Park, No.20, XingYe West Road, ShaJing
Town, ShenZhen, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : T1881576 06
Date of Receipt : October 09, 2018
Date of Test : October 09-25, 2018
Date of Report : October 25, 2018
Version Number : REV0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description.....	8
2.6. Test Conditions	8
2.7. Additional instructions.....	9
2.8. Test Facility	10
2.9. Measurement Uncertainty	10
2.10. Test Equipment List	11
3. Maximum Peak Output power	12
3.1. Limit	12
3.2. Test Procedure	12
3.3. Test Setup.....	12
3.4. Test Result	12
4. Bandwidth.....	13
4.1. Limit	13
4.2. Test Procedure	13
4.3. Test Result	13
5. Carrier Frequency Separation.....	15
5.1. Limit	15
5.2. Test Procedure	15
5.3. Test Result	15
6. Number Of Hopping Channel.....	17
6.1. Limit	17
6.2. Test Procedure	17
6.3. Test Result	17
7. Dwell Time.....	18
7.1. Test limit	18
7.2. Test Procedure	18
7.3. Test Result	18
8. Radiated emissions.....	20
8.1. Limit	20
8.2. Block Diagram of Test setup	21
8.3. Test Procedure	22
8.4. Test Result	22

9. Band Edge Compliance	26
9.1. Block Diagram of Test Setup	26
9.2. Limit	26
9.3. Test Procedure	26
9.4. Test Result	26
10. Power Line Conducted Emissions	33
10.1. Block Diagram of Test Setup	33
10.2. Limit	33
10.3. Test Procedure	33
10.4. Test Result	33
11. Antenna Requirements	34
11.1. Limit	34
11.2. Result	34
12. Test setup photo	35
12.1. Photos of Radiated emission	35
13. Photos of EUT	36

TEST REPORT DECLARATION

Applicant : ShenZhenShi NewStone Technology co., Ltd

Address : B2 blvd, YuHong Industrial Park, No.20, XingYe West Road, ShaJing Town,
ShenZhen, China

Manufacturer : ShenZhenShi NewStone Technology co., Ltd

Address : B2 blvd, YuHong Industrial Park, No.20, XingYe West Road, ShaJing Town,
ShenZhen, China

EUT Description : 2.4G Controller

(A) Model No. : TX2, TX1, TX3, TX4, TX5, TX6 , TX7, TX8, TX9

(B) Trademark : N/A



Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2017,
ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:	Reak Yang Project Engineer	
Approved by (name + signature).....:	Simple Guan Project Manager	
Date of issue.....	October 25, 2018	

Revision History

Revision	Issue Date	Revisions	Revised By
00	October 25, 2018	Initial released Issue	Simple Guan

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	N/A
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	: 2.4G Controller
Model Number	: TX2, TX1, TX3, TX4, TX5, TX6 , TX7, TX8, TX9
Diff	: All models are the same, except the appearance color, this report performs the model TX2.
Trademark	: N/A
Test Voltage	: 4*DC 1.5V AAA Battery
Operation frequency	: 2405-2478MHz
Channel No.	: 74 Channels(Channel Spacing 1MHz)
Modulation type	: FSK
Antenna Type	: Internal Antenna, Maximum Gain is 0dBi
Software version	: V1.0
Hardware version	: V1.0

Note: 1. The equipment can hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.
2. Each frequency is used equally on the average by transmitter.
3. The receiver has input bandwidth that matches the hopping channel bandwidth of the transmitter and shift frequencies in synchronization with the transmitted signals by a special identification code in the signals.
4. Transmitter and receiver can subject to match with each other, but other compatible devices instead of.

2.2.Accessories of Device (EUT)

Accessory 1 : N/A

2.3.Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1	N/A	N/A	N/A	N/A	N/A

2.4.Block Diagram of connection between EUT and simulators



2.5.Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
FSK	Low :CH1	2405
	Middle: CH37	2441
	High: CH74	2478
	Hopping	2405-2478

2.6.Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	27℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Additional instructions

The operation (Used for test) from client

Mode	Special operated method is used. The operation provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.		
Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
FSK	CH1	2405	TX level is set as defaults value.
	CH37	2441	
	CH74	2478	
	Hopping	2405-2478	

2.8. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 25, 2017 Certificated by IC

Registration Number: 12135A

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.77dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.16 dB(Polarize: V)
	2.62dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.76dB(Polarize: V)
	3.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.22dB(Polarize: H)
	4.18dB(Polarize: V)
Uncertainty for radio frequency	5.6×10^{-8}
Uncertainty for conducted RF Power	0.39dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.10. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last cal.	Cal. Due day
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2020.04.12
Filter	KANGMAI	ZLPF-LDC-1000- 1959	1209002075	2018.09.21	2019.09.20
Filter	WAINWRIGHT	WHKX2.80 /18G- 12SS	SN1	2018.09.21	2019.09.20
RF Cable	Resenberger	Cable 4	N/A	2018.09.21	2019.09.20
Signal Analyzer	Agilent	N9020A	MY499100060	2018.09.21	2019.09.20
Filter	WAINWRIGHT	WHKX1.0G/15G- 10SS	SN40	2018.09.21	2019.09.20
Test Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2018.09.21	2019.09.20
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	2018.04.13	2020.04.12
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2018.09.21	2019.09.20
RF Cable	Resenberger	Cable 1	N/A	2018.09.21	2019.09.20
RF Cable	Resenberger	Cable 2	N/A	2018.09.21	2019.09.20
RF Cable	Resenberger	Cable 3	N/A	2018.09.21	2019.09.20
Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2018.09.21	2019.09.20
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170294	2017.03.16	2019.03.15
Preamplifier	SCHWARZBECK	BBV9721	9721-031	2018.09.02	2019.09.01
Spectrum analyzer	ROHDE&SCHWARZ	FSQ40	200061	2017.12.28	2018.12.27
Power Meter	Anritsu	ML2487A	6K00001491	2018.09.21	2019.09.20
20dB Attenuator	ICPROBING	IATS1	82347	2018.09.21	2019.09.20

3. MAXIMUM PEAK OUTPUT POWER

3.1.Limit


Please refer section15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3.Test Setup



3.4.Test Result

Test site: RF site				
Mode	Freq (MHz)	PK Output Power (dBm)	PK Output Power (mW)	Limit (mW)
FSK	2405	8.03	6.35	125
	2441	7.56	5.70	125
	2478	6.81	4.80	125
Conclusion: PASS				

4. BANDWIDTH

4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2.Test Procedure




The transmitter output was directly connected to a spectrum analyzer with a 50Ω cable. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3.Test Result

Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
FSK	2405	0.7218	/	PASS
	2441	0.7257	/	PASS
	2478	0.7258	/	PASS

Original Test data For 20dB bandwidth

FSK:

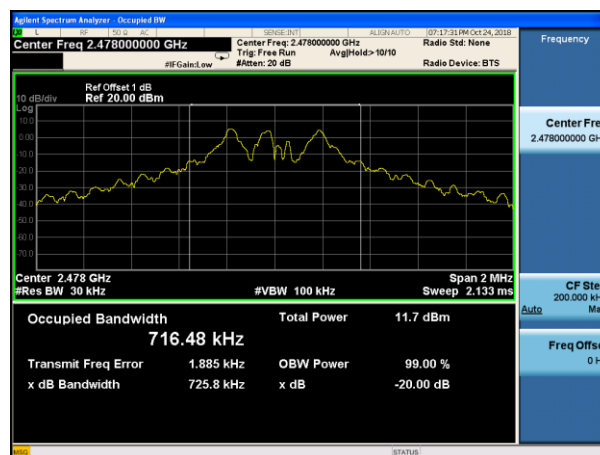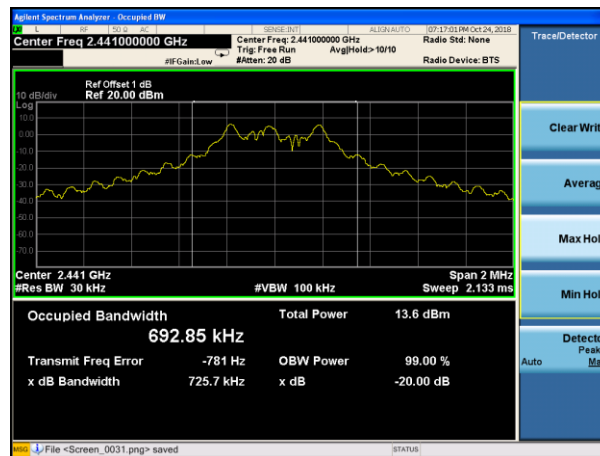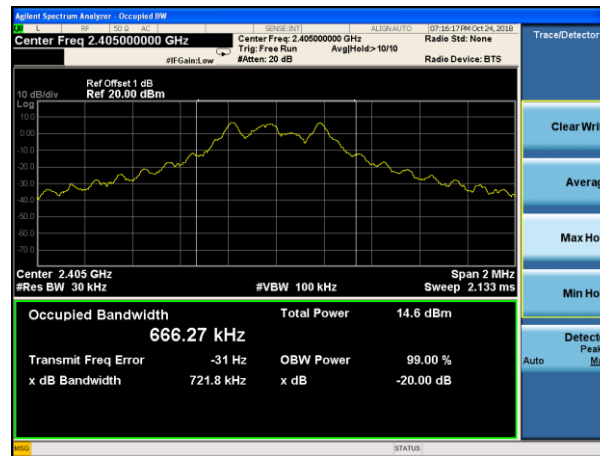

5. CARRIER FREQUENCY SEPARATION

5.1.Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2.Test Procedure

The transmitter output was directly connected to a spectrum analyzer with a 50Ω cable. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

5.3.Test Result

Mode/Channel	Channel separation (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Conclusion
FSK	0.999	725.8	483.9	PASS

Original test data for channel separation
FSK

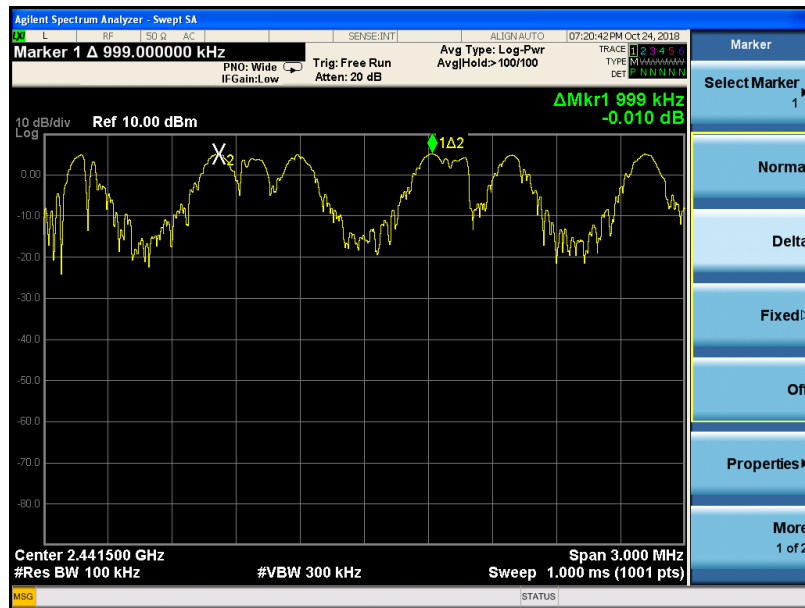

6. NUMBER OF HOPPING CHANNEL

6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2.Test Procedure


The transmitter output was directly connected to a spectrum analyzer with a 50Ω cable. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3.Test Result

Mode	Number of hopping channel	Limit	Conclusion
FSK	74	>15	PASS

Original test data for hopping channel number

FSK

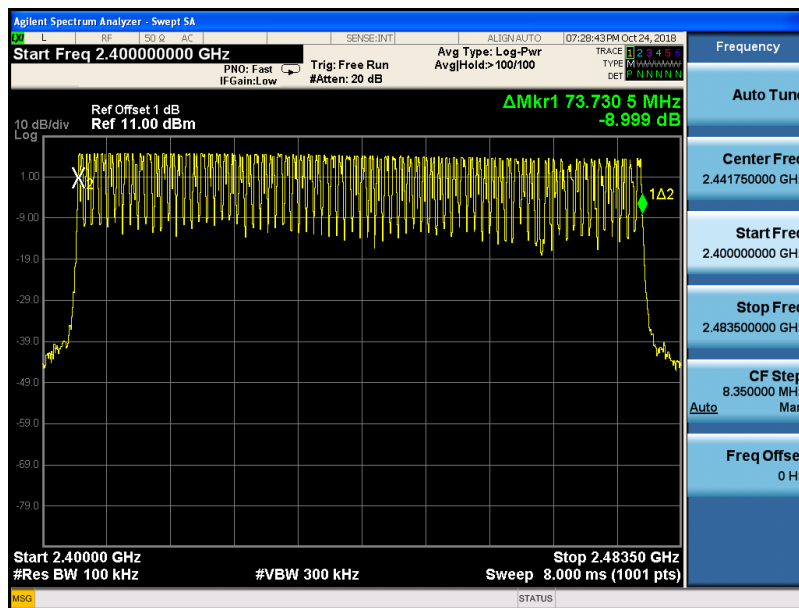

7. DWELL TIME

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.



7.3. Test Result

PASS.

Detailed information please see the following page.

Mode	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Conclusion
FSK	2405	1.434	0.072	<0.4	PASS
Note: Dwell Time= $T_{on}/T_{on+off}=1.434/(1.434+18.44)$					

FSK

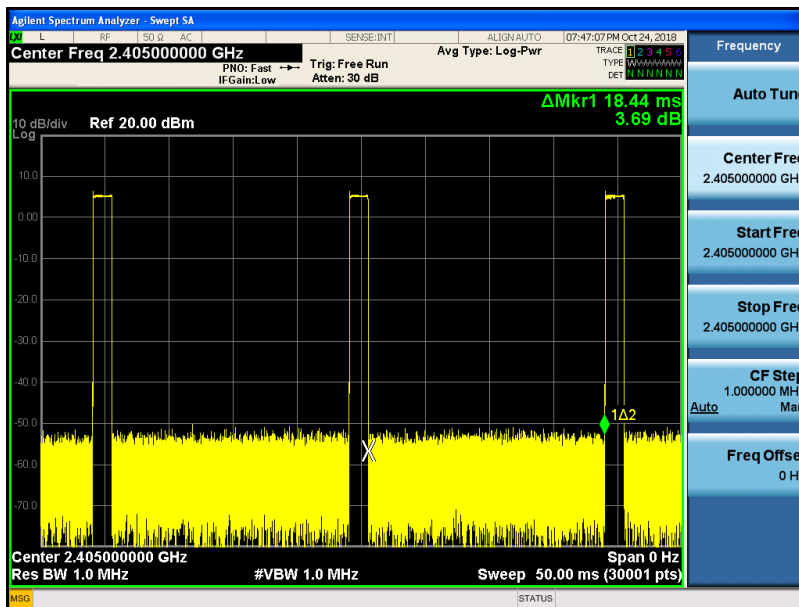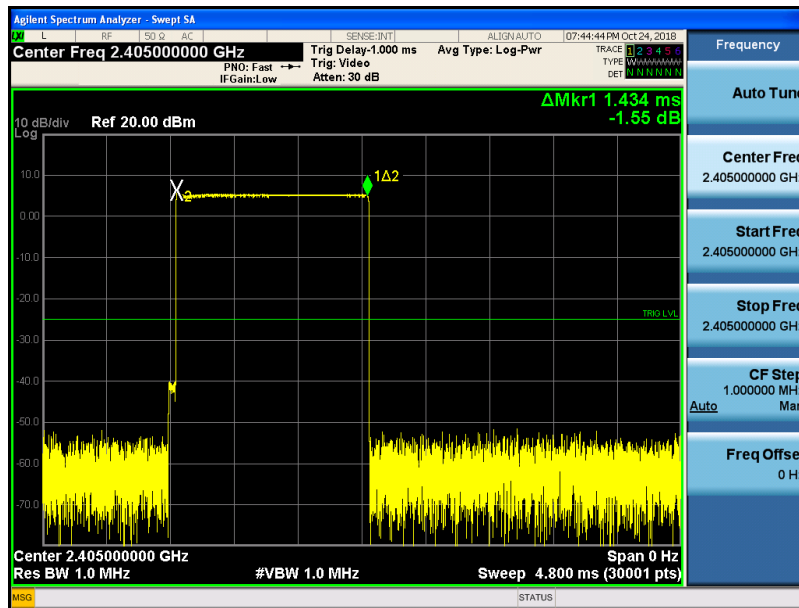

8. RADIATED EMISSIONS

8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for 9KHzHz to 30MHz

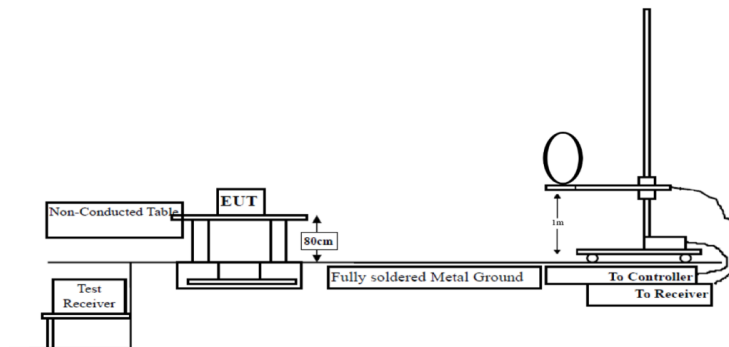

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for 30MHz to 1GHz

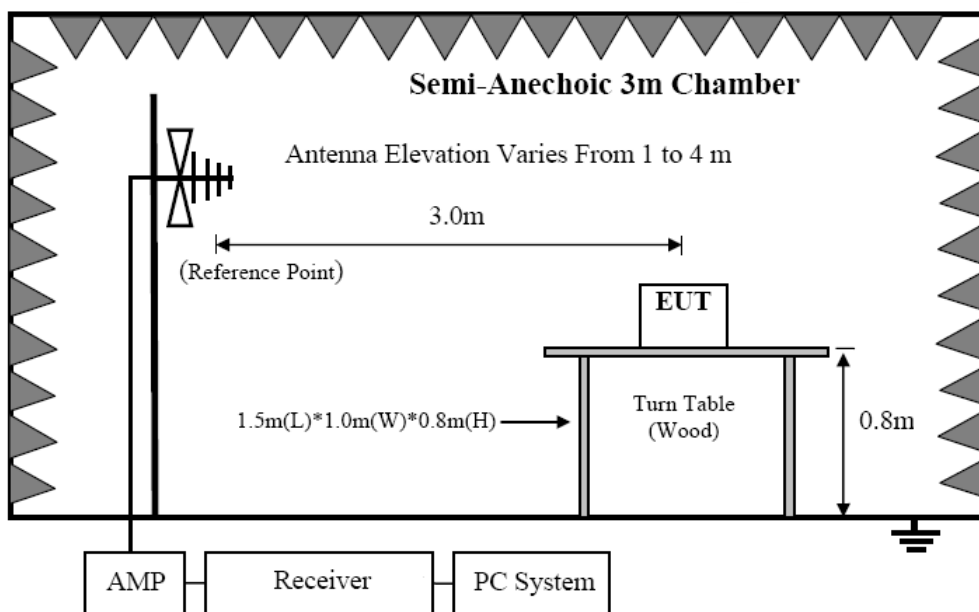

8.2.3 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

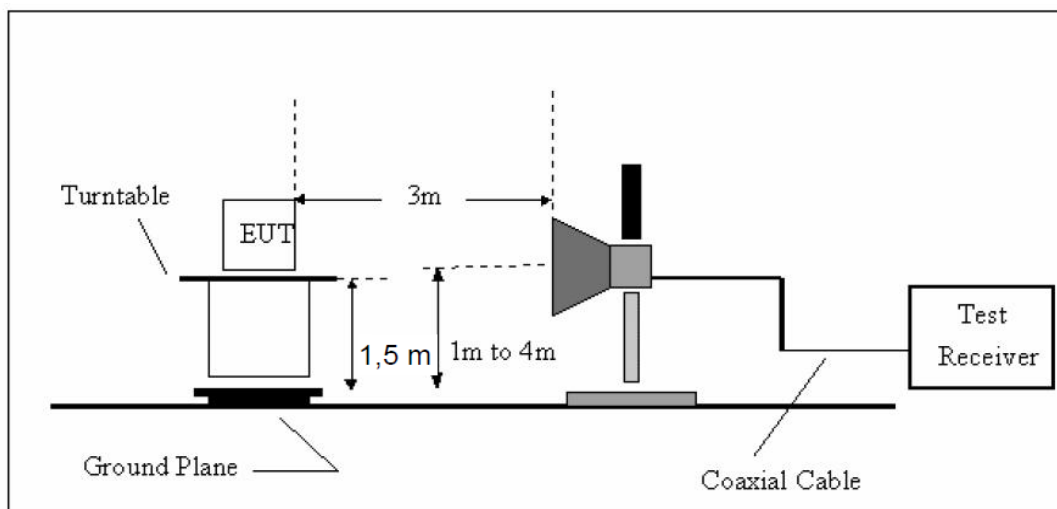

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1GHz test, 150 cm above the ground plane inside a semi-anechoic chamber for above 1GHz test
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency..
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS

Polarization: **Vertical**

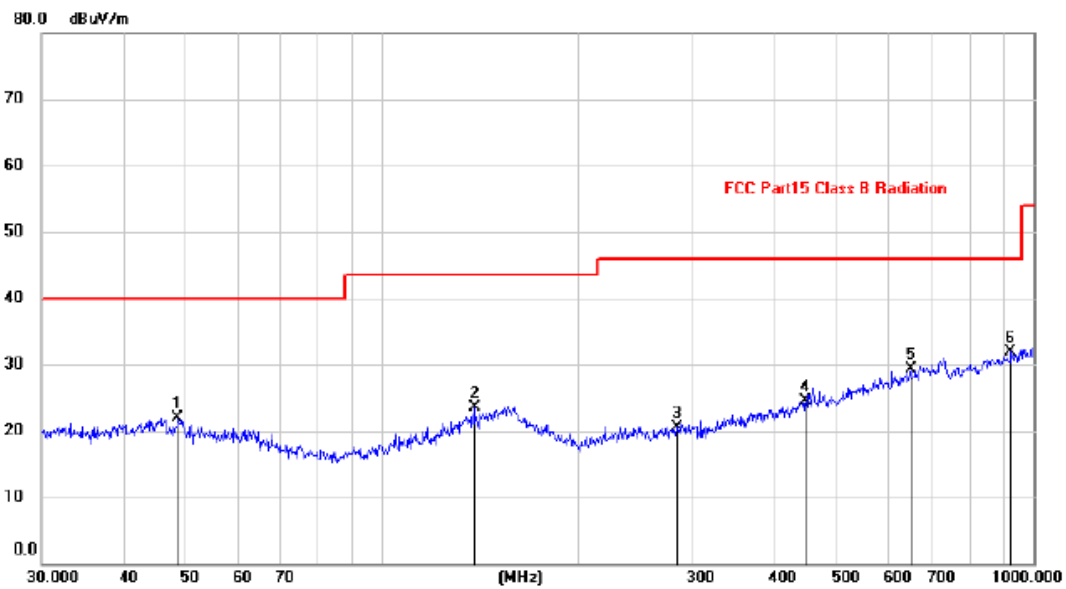

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		48.5016	8.23	13.66	21.89	40.00	-18.11	peak		
2		138.3873	9.68	13.73	23.41	43.50	-20.09	peak		
3		283.9791	7.57	13.03	20.60	46.00	-25.40	peak		
4		446.4141	7.64	16.86	24.50	46.00	-21.50	peak		
5		647.3854	8.95	20.27	29.22	46.00	-16.78	peak		
6	*	922.5157	8.37	23.53	31.90	46.00	-14.10	peak		

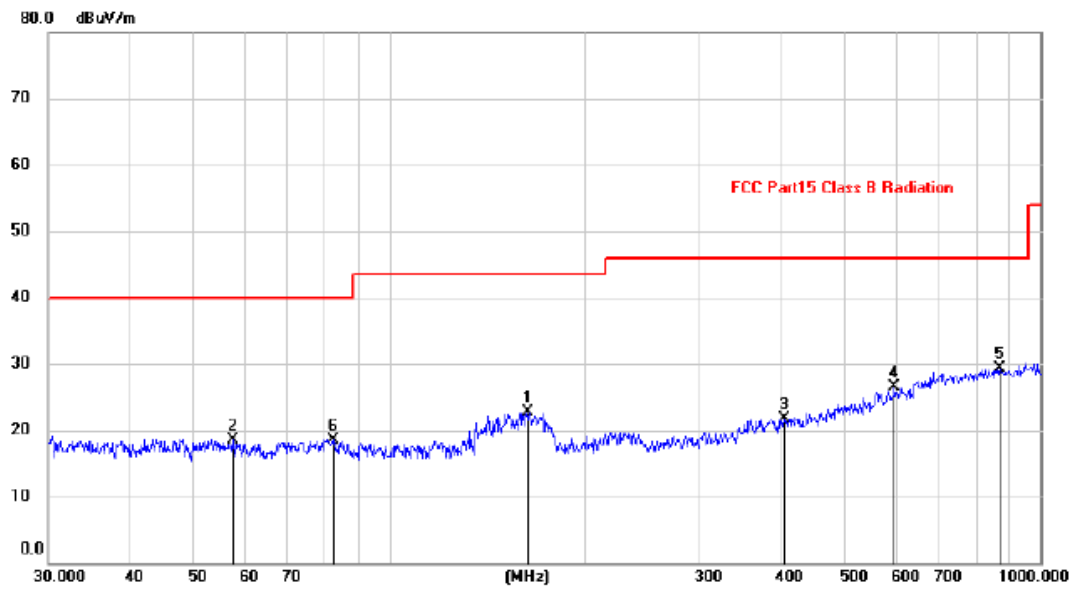Polarization: *Horizontal*

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		163.7547	8.38	14.28	22.66	43.50	-20.84	peak		
2		57.5938	5.46	13.10	18.56	40.00	-21.44	peak		
3		404.6664	6.00	15.66	21.66	46.00	-24.34	peak		
4		599.3211	7.26	19.32	26.58	46.00	-19.42	peak		
5	*	866.0878	6.77	22.61	29.38	46.00	-16.62	peak		
6		82.3588	9.03	9.54	18.57	40.00	-21.43	peak		

Remark: All modes have been tested, and only worst data of FSK Channel Low mode was listed in this report.

Test Mode: FSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4810	44.20	V	33.95	10.18	34.26	54.07	74	19.93	PK
4810	34.16	V	33.95	10.18	34.26	44.03	54	9.97	AV
7215	/		/						
9620	/		/						
4810	43.76	H	33.95	10.18	34.26	53.63	74	20.37	PK
4810	34.28	H	33.95	10.18	34.26	44.15	54	9.85	AV
7215									
9620									
Test Mode: FSK TX Mid									
4882	41.57	V	33.93	10.2	34.29	51.41	74	22.59	PK
4882	32.11	V	33.93	10.2	34.29	41.95	54	12.05	AV
7323	/								
9764	/								
4882	42.02	H	33.93	10.2	34.29	51.86	74	22.14	PK
4882	32.73	H	33.93	10.2	34.29	42.57	54	11.43	AV
7323									
9764									
Test Mode: FSK TX High									
4956	42.16	V	33.98	10.22	34.25	52.11	74	21.89	PK
4956	32.82	V	33.98	10.22	34.25	42.77	54	11.23	AV
7434	/								
9912	/								
4956	42.41	H	33.98	10.22	34.25	52.36	74	21.64	PK
4956	31.82	H	33.98	10.22	34.25	41.77	54	12.23	AV
7434	/								
9912	/								


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

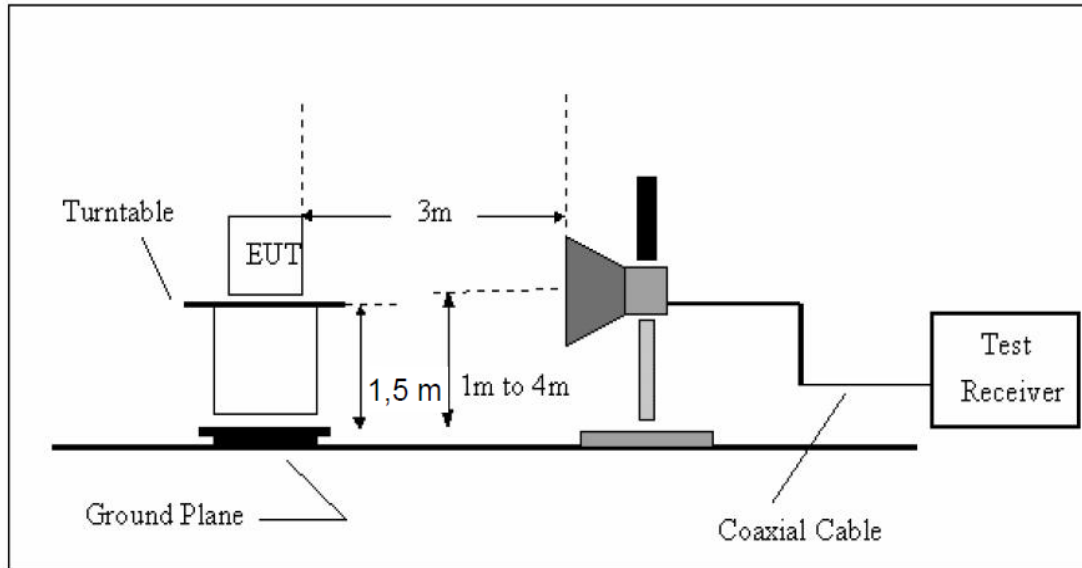

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure


All restriction band and non- restriction band have been tested , only worse case is reported.

9.4. Test Result

PASS. (See below detailed test data)


Radiated Method:

Test mode: FSK Tx Low (Vertical)

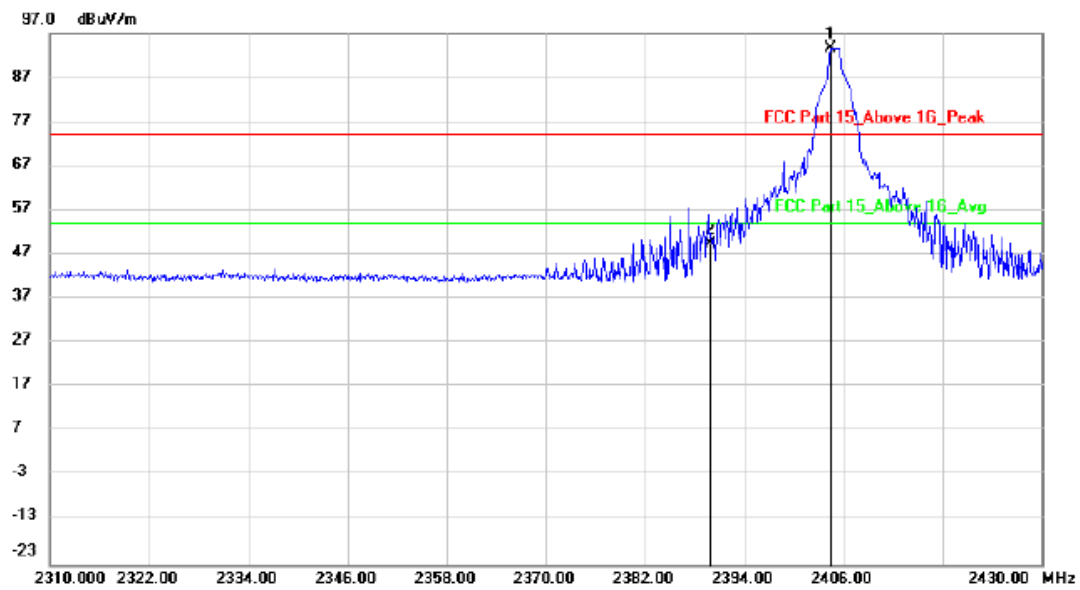


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2404.440	96.98	-3.41	93.57	74.00	19.57	peak		
2		2390.000	52.82	-3.40	49.42	74.00	-24.58	peak		

Test mode: FSK Tx Low (Horizontal)

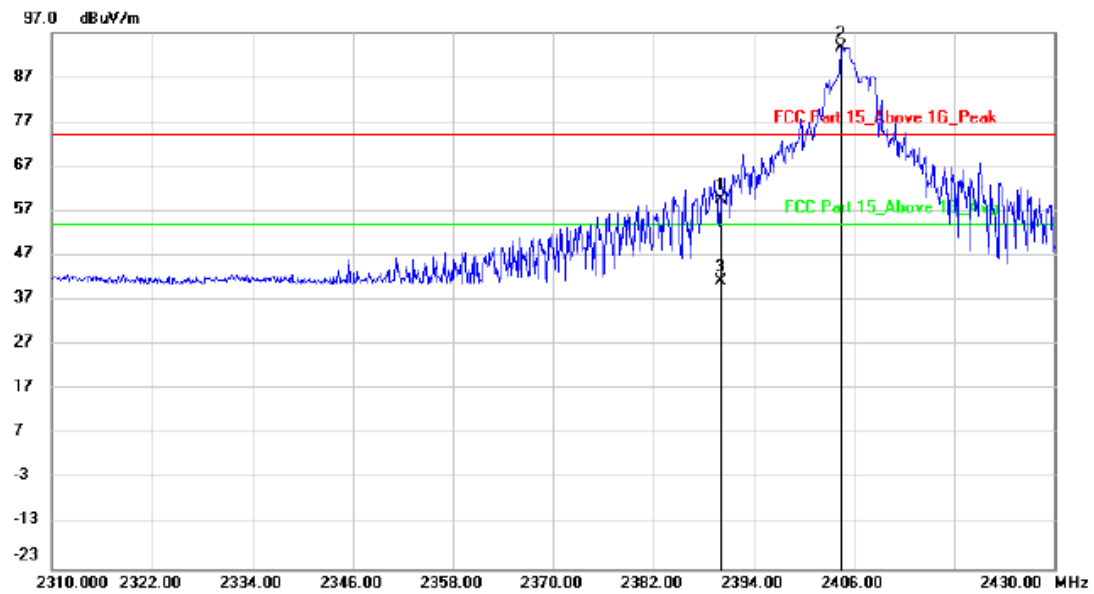


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	
1		2390.000	63.13	-3.40	59.73	74.00	-14.27	peak		
2	*	2404.440	96.98	-3.41	93.57	74.00	19.57	peak		
3		2390.000	44.63	-3.40	41.23	54.00	-12.77	AVG		

Test mode: FSK Tx High (Vertical)

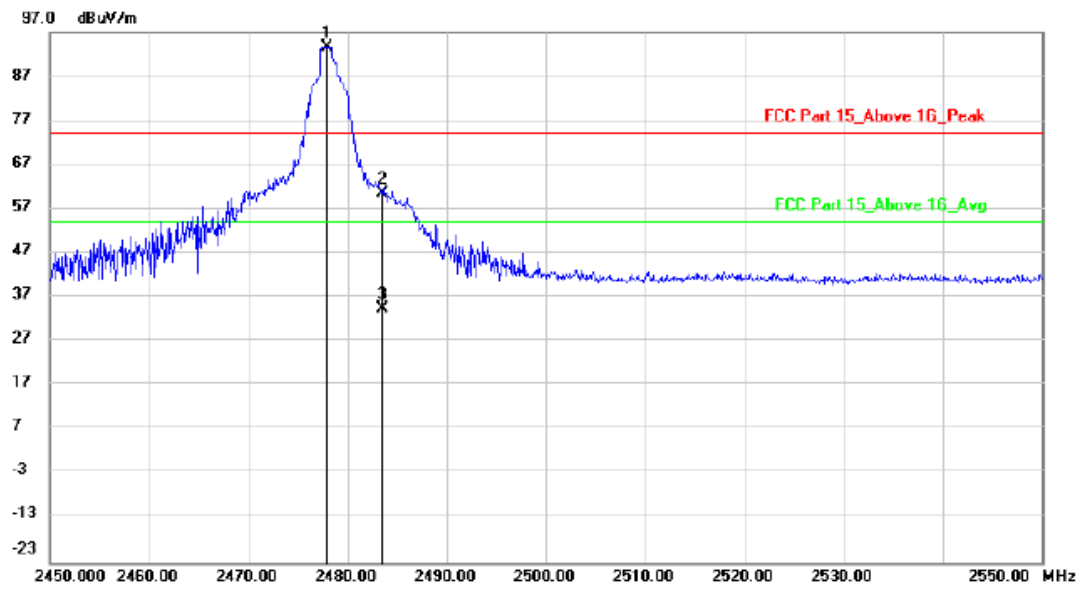

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	2477.900	96.97	-3.39	93.58	74.00	19.58	peak		
2		2483.500	64.02	-3.38	60.64	74.00	-13.36	peak		
3		2483.500	37.69	-3.38	34.31	54.00	-19.69	AVG		

Test mode: FSK Tx High (Horizontal)

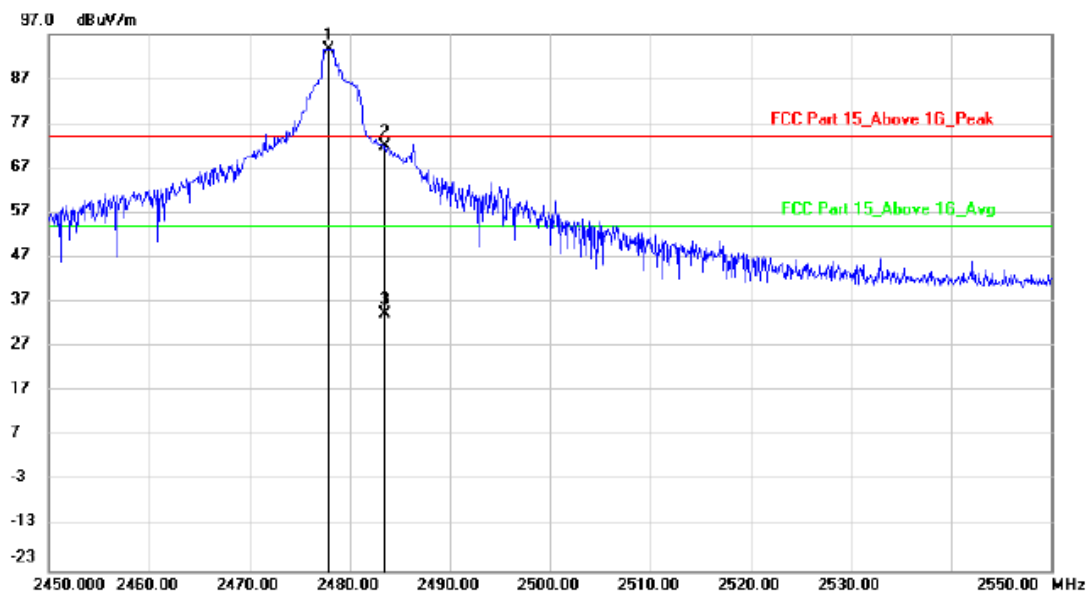

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2477.900	96.97	-3.39	93.58	74.00	19.58	peak		
2		2483.500	75.45	-3.38	72.07	74.00	-1.93	peak		
3		2483.500	37.93	-3.38	34.55	54.00	-19.45	AVG		

Note:


- 1, All the other emissions not reported were too low to read and deemed to comply with FCC limit.
2. If peak Result comply with AV limit, AV Result is deemed to comply with AV limit, no necessary to report.

Conducted Method


FSK

Hopping-off


CH Low:

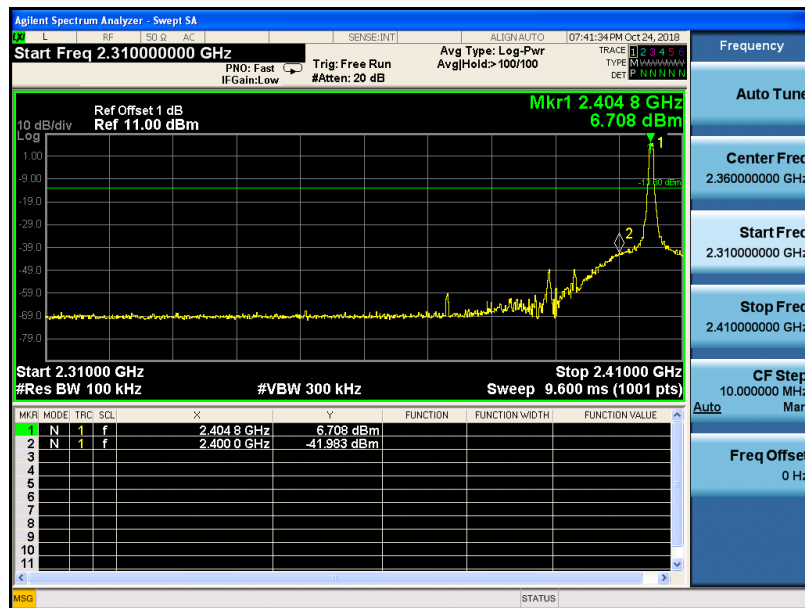


CH High:

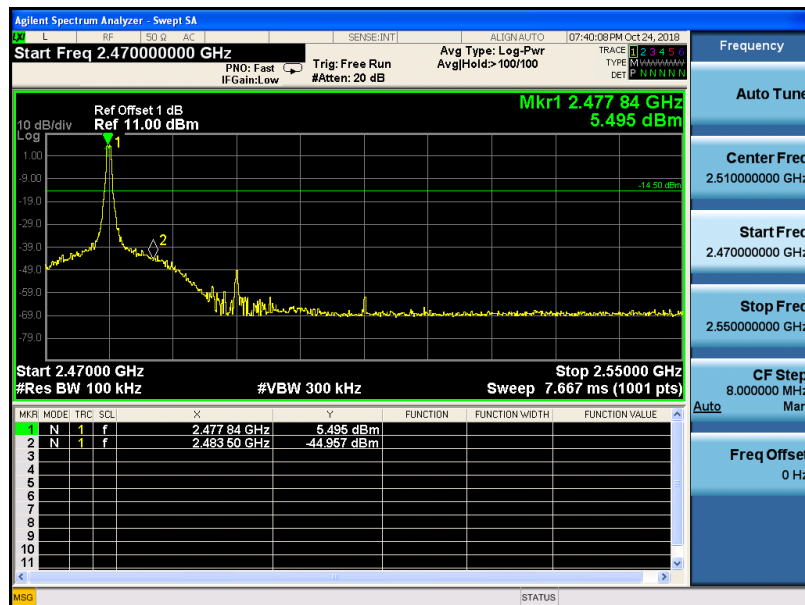

Hopping-on
Low

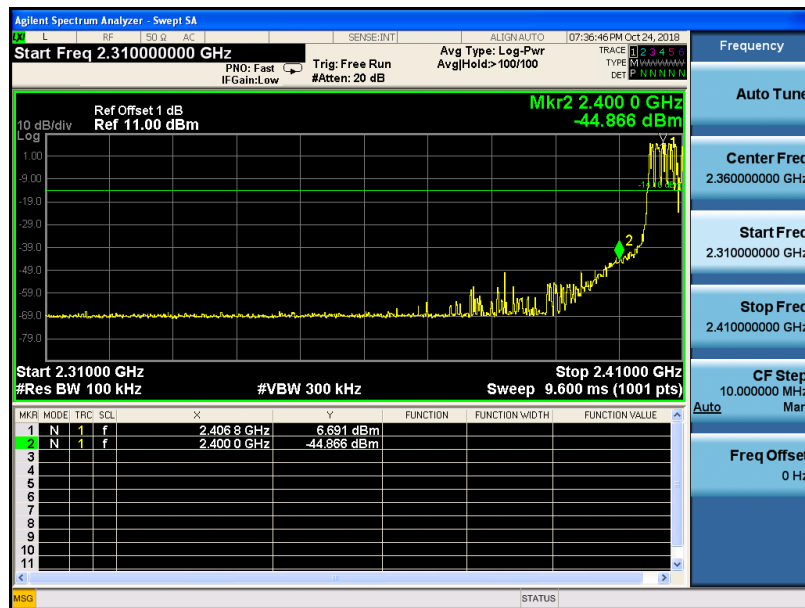


High

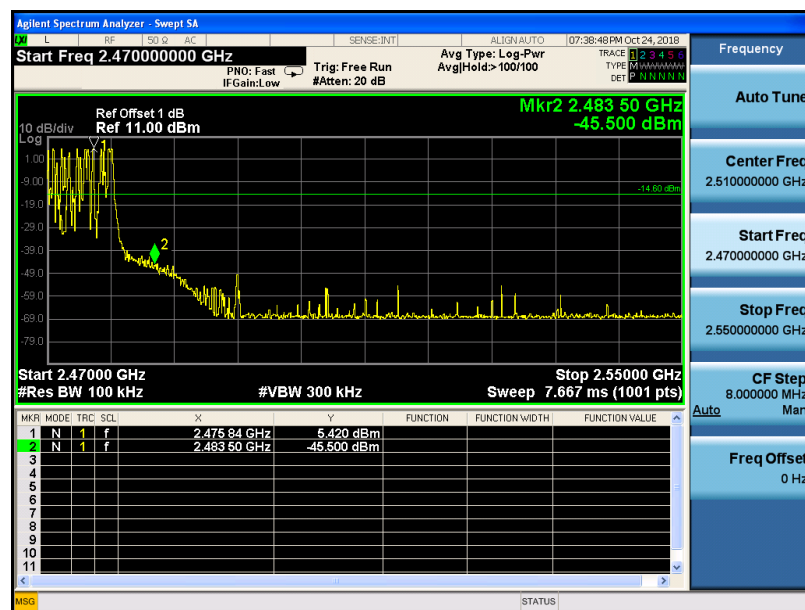

10. POWER LINE CONDUCTED EMISSIONS

10.1. Block Diagram of Test Setup

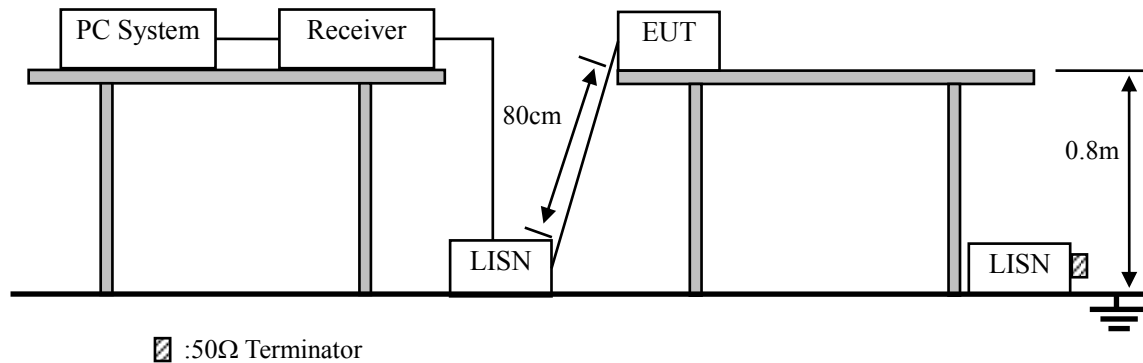

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

Not applicable.

The EUT is supplied by battery only, so this item does not applicable.

11.ANTENNA REQUIREMENTS

11.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Result

The EUT antenna is integrated Antenna. It complies with the standard requirement.

12. TEST SETUP PHOTO

12.1. Photos of Radiated emission

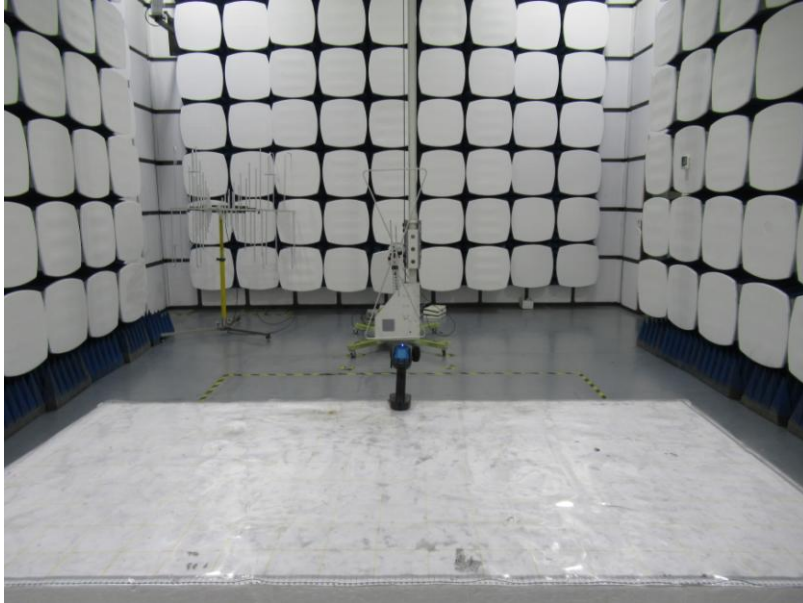




13. PHOTOS OF EUT














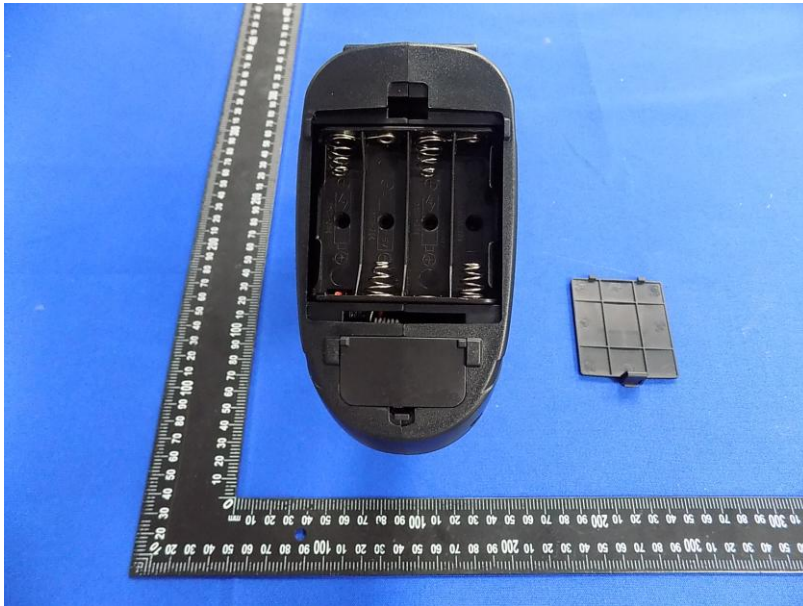


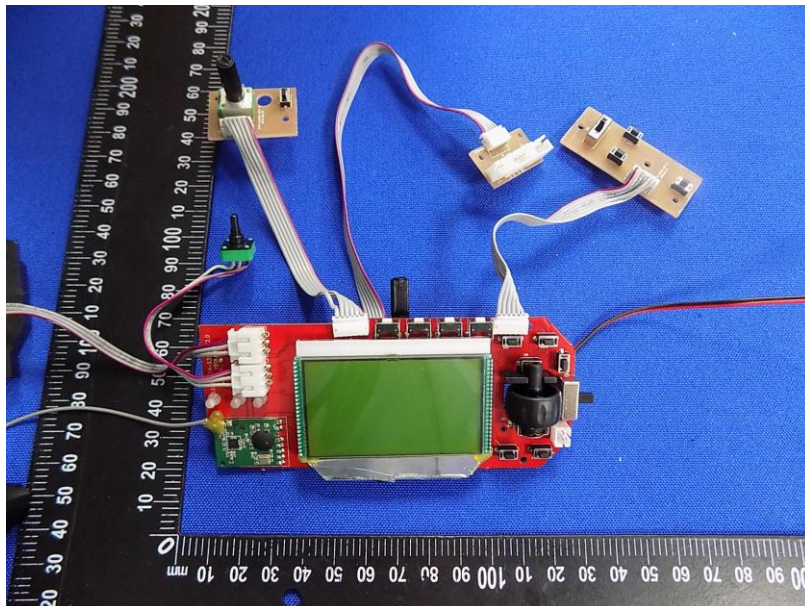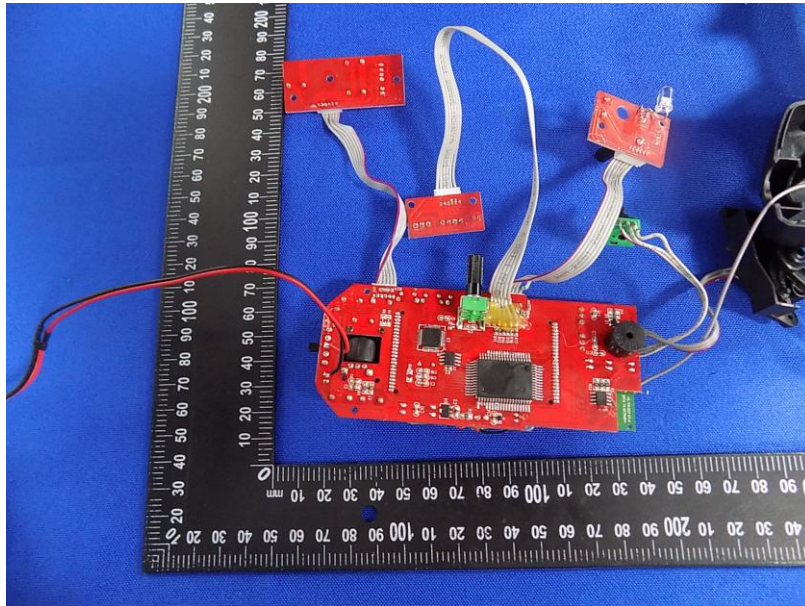


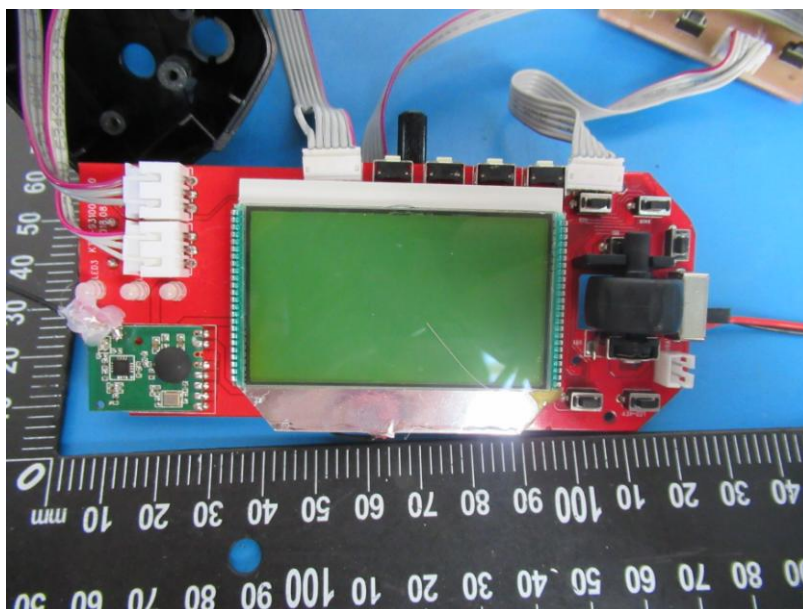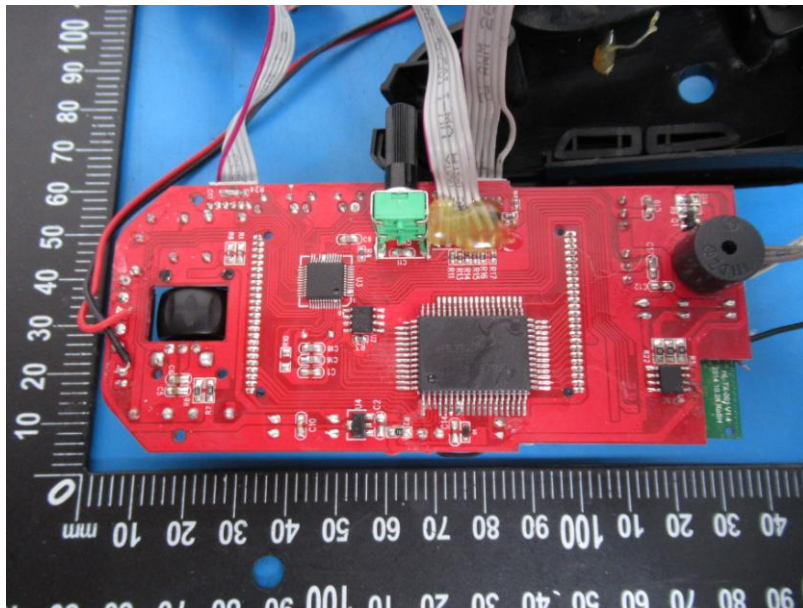

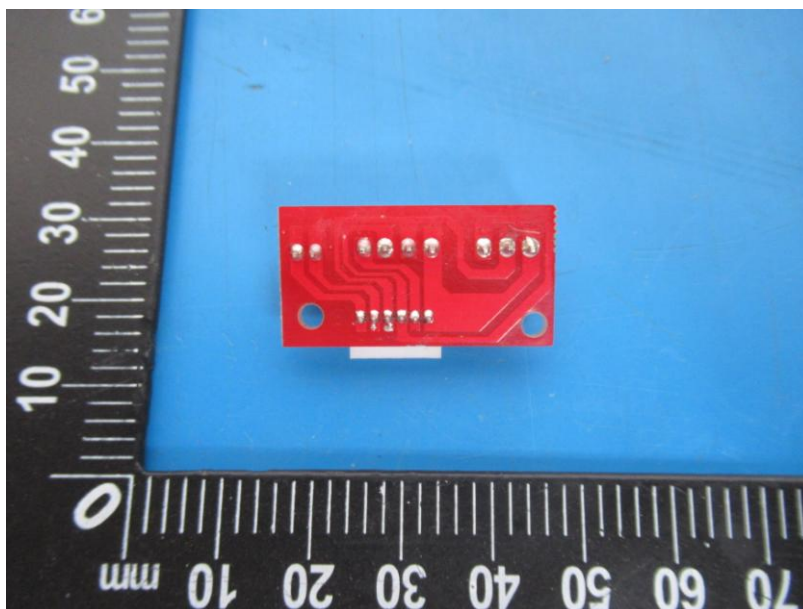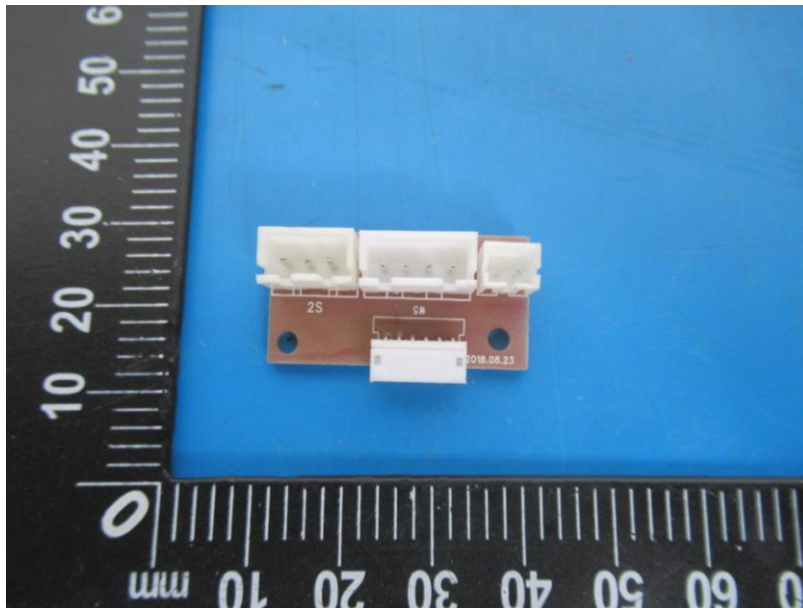

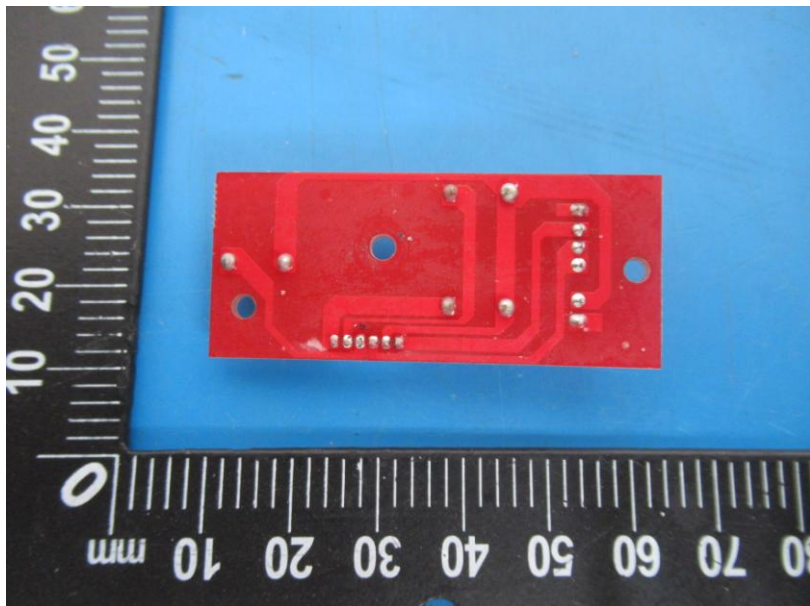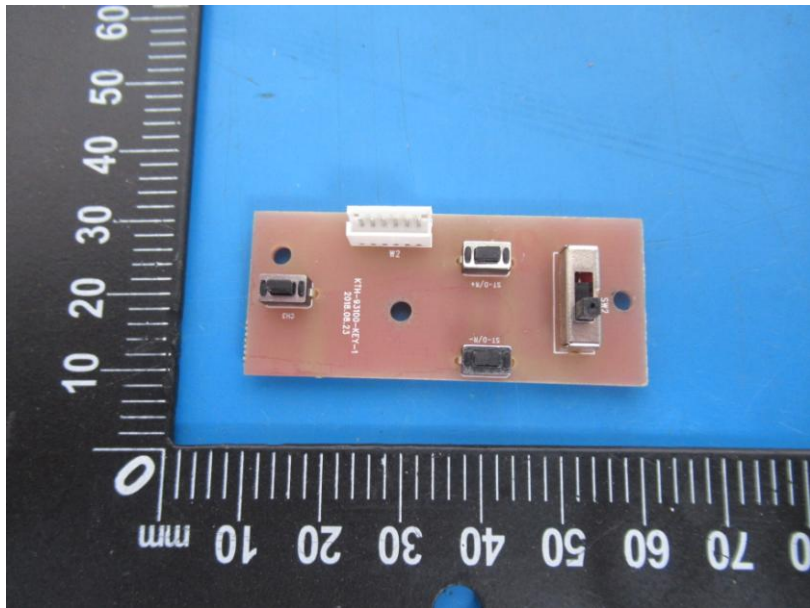

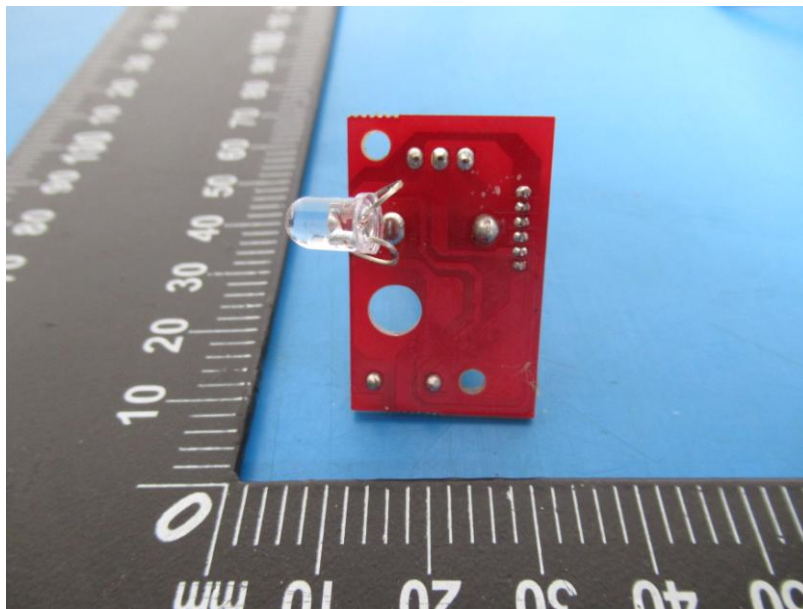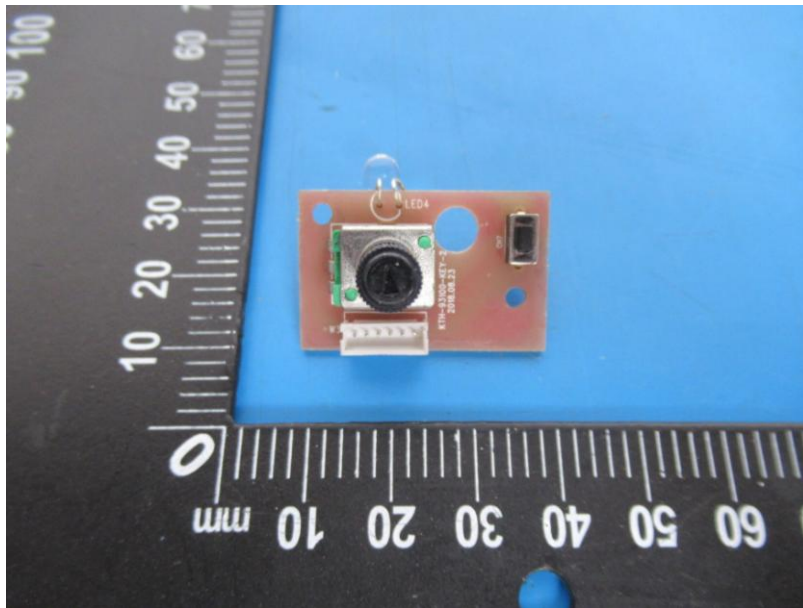

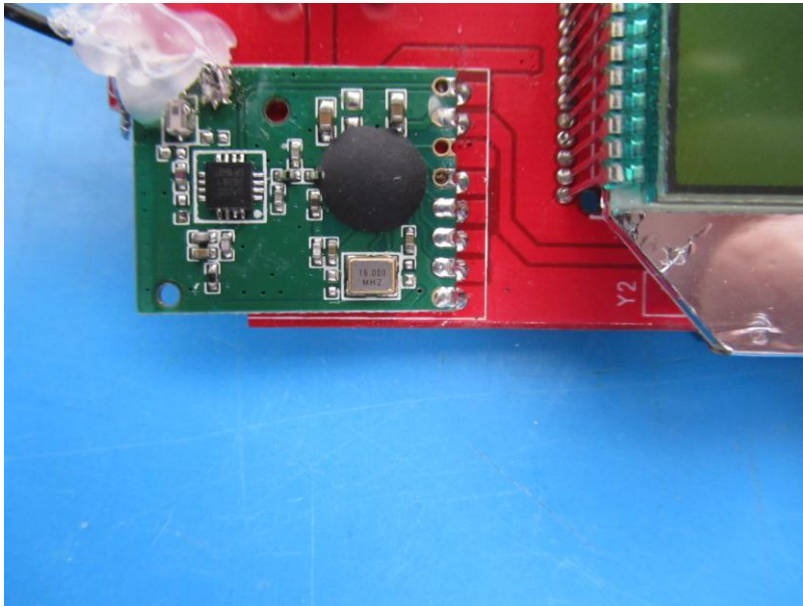

-----THE END OF REPORT-----