


## RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : Foshan Sun Cupid Electronics FTY., Ltd.  
Address : Blk 7, No. 127, Zhangcha 1st Road, Chancheng District, Foshan City, Guangdong, China  
Manufacturer/Factory : Foshan Sun Cupid Electronics FTY., Ltd.  
Address : Blk 7, No. 127, Zhangcha 1st Road, Chancheng District, Foshan City, Guangdong, China  
E.U.T. : Game Zoom  
Brand Name : NUU  
Model No. : GZ1  
FCC ID : 2AREF-GZ1  
Measurement Standard : FCC PART 15 Subpart C  
Date of Receiver : September 18, 2018  
Date of Test : September 18, 2018 to October 24, 2018  
Date of Report : October 25, 2018

This Test Report is Issued Under the Authority of :

Prepared by



Sundiy Jiang / Engineer

Approved & Authorized Signer



lori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST .....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S) .....	5
1.3 TEST METHODOLOGY .....	5
1.4 EQUIPMENT MODIFICATIONS .....	5
1.5 SUPPORT DEVICE .....	5
1.6 TEST FACILITY AND LOCATION .....	6
1.7 SUMMARY OF TEST RESULTS.....	6
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
2.1 EUT CONFIGURATION .....	7
2.2 PECIAL ACCESSORIES .....	7
2.3 DESCRIPTION OF TEST MODES .....	7
2.4 EUT EXERCISE .....	7
<b>3. CONDUCTED EMISSIONS TEST .....</b>	<b>8</b>
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	8
3.2 TEST CONDITION.....	8
3.3 MEASUREMENT RESULTS .....	8
<b>4. RADIATED EMISSION TEST.....</b>	<b>11</b>
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	11
4.2 MEASUREMENT PROCEDURE .....	12
4.3 LIMIT .....	13
4.4 MEASUREMENT RESULTS .....	13
<b>5. 20DB BANDWIDTH.....</b>	<b>18</b>
5.1 MEASUREMENT PROCEDURE .....	18
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	18
5.3 MEASUREMENT RESULTS .....	18
<b>6. ANTENNA APPLICATION .....</b>	<b>20</b>
6.1 ANTENNA REQUIREMENT.....	20
6.2 MEASUREMENT RESULTS .....	20
<b>7. TEST EQUIPMENT LIST.....</b>	<b>21</b>

## Revision History of This Test Report

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test

Product name	: Game Zoom
Main model	: GZ1
Additional model	: N/A
Brand name	: NUU
Rating	: AC100-240V ~50/60Hz USB Output: 5V 2.1A
Test voltage	: AC 120V/60Hz, 240V/60Hz (Only the worst case was recorded in this report)
Adapter	: Manufacturer: DYS M/N: DYS650-120300W-K Input: AC100-240V ~50/60Hz 1.3A MAX Output: DC12V 3A
Cable	: DC Line:1.60m unshielded USB Line 0.60m unshielded
Software version	: ACBB 5896
Hardware version	: V1.0
Note	: This report is only applies to wireless charging function.

#### Technical Specification:

Frequency Range	: 110.5-205KHz
Wireless charger Output	: 5W/7.5W/10W
Test Channel	: 127.8KHz
Type of Modulation	: ASK
Type of Antenna	: induction coil
Antenna Gain	: 0 dBi

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AREF-GZ1** filing to comply with FCC Part 15 (2017), Subpart C Rule.

## 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

## 1.4 Equipment Modifications

Not available for this EUT intended for grant.

## 1.5 Support Device

Inductive load : Provided by the laboratory

## 1.6 Test Facility and Location

### Site Description

EMC Lab : Listed by CNAS, August 13, 2018  
The certificate is valid until August 13, 2024  
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01  
The Certificate Registration Number is L5795.

Listed by A2LA, November 01, 2017  
The certificate is valid until December 31, 2019  
The Laboratory has been assessed and proved to be in compliance with ISO17025  
The Certificate Registration Number is 4429.01

Listed by FCC, November 06, 2017  
The Designation Number is CN1214  
Test Firm Registration Number: 907417

### Name of Firm

Listed by Industry Canada, June 08, 2017  
The Certificate Registration Number. Is 46405-9743  
: Dongguan Nore Testing Center Co., Ltd.  
(Dongguan NTC Co., Ltd.)

### Site Location

: Building D, Gaosheng Science & Technology Park,  
Zhouxi Longxi Road, Nancheng District, Dongguan  
City, Guangdong Province, China

## 1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.35	20dB Bandwidth	$\pm 1.42 \times 10^{-4}\%$	Compliant
§15.207 (a)	AC Power Conducted Emission	$\pm 1.06\text{dB}$	Compliant
§15.209	Radiated Emission	$\pm 3.70\text{dB}$	Compliant

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 Pecial Accessories

Not available for this EUT intended for grant.

### 2.3 Description of test modes


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing.

### 2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### 3. Conducted Emissions Test

#### 3.1 Test SET-UP (Block Diagram of Configuration)

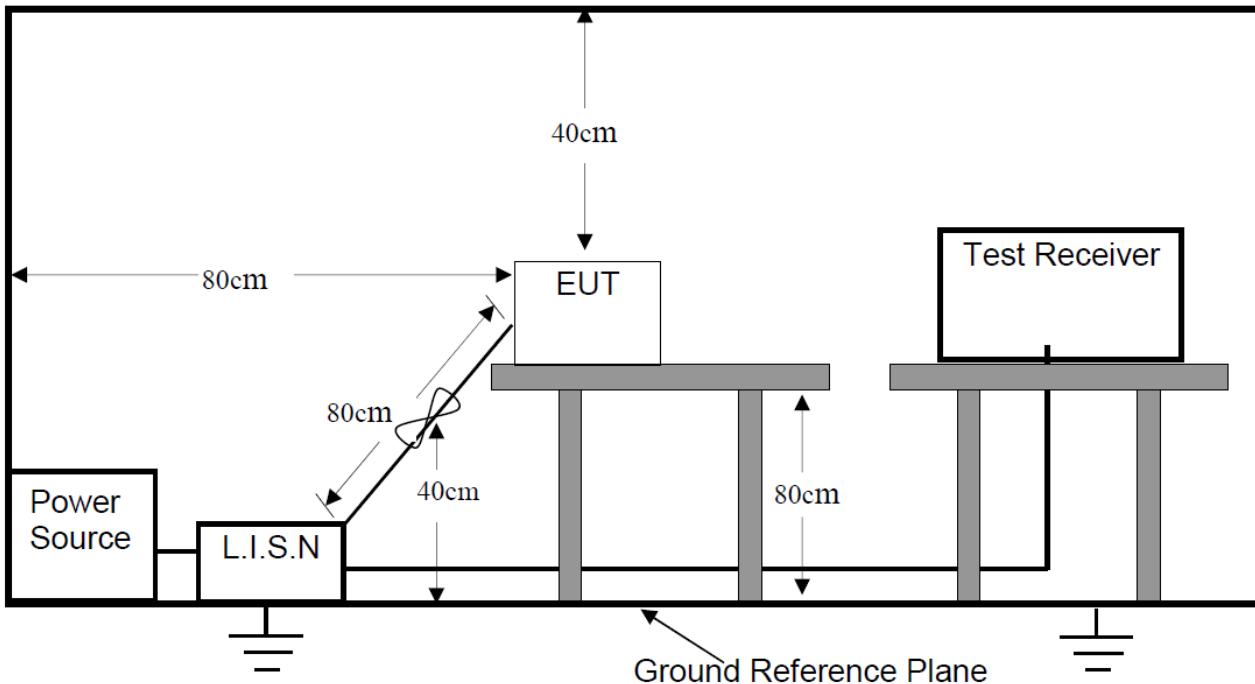

#### 3.2 Test Condition

**Test Requirement:** FCC Part 15.207

**Frequency Range:** 150KHz ~ 30MHz

**Detector:** RBW 9KHz, VBW 30KHz

**Operation Mode:** TX (Wireless Charging 5W, 7.5W, 10W), Standby

#### 3.3 Measurement Results

**Please refer to following plots of the worst case: TX (Wireless Charging 10W-Full load)**



Dongguan NTC Co., Ltd.  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


Conducted Emission Measurement

File :GZ1

Data :#20

Date: 2018-9-29

Time: 10:50:16

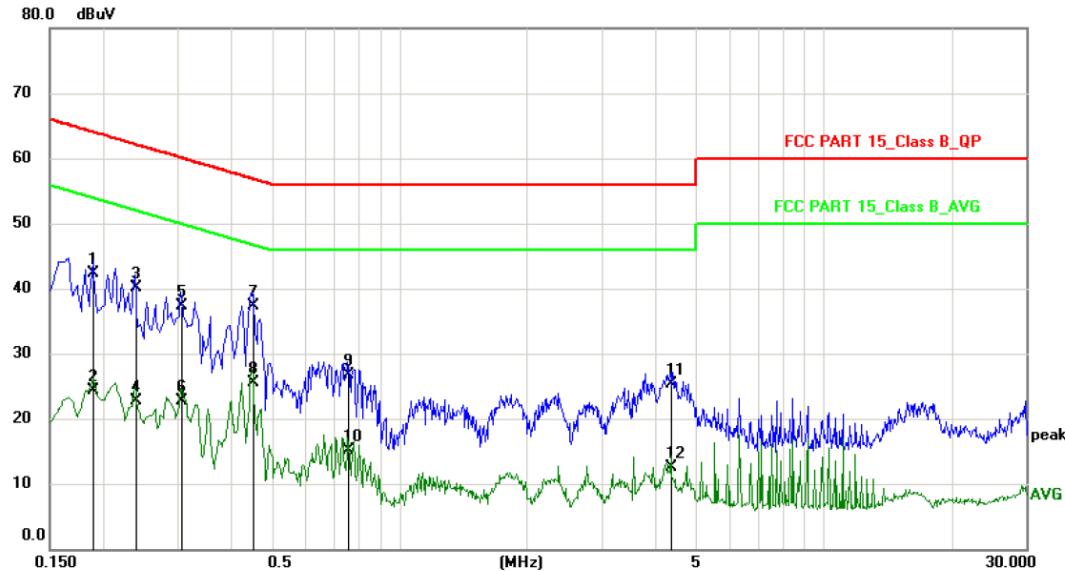

Site

Phase:

L1

Temperature: 26

Limit: FCC PART 15\_Class B\_QP

Power: AC120V/60Hz

Humidity: 50 %

EUT: Game Zoom

M/N: GZ1

Mode: TX(Wireless Charging)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1900	31.69	10.61	42.30	64.04	-21.74	QP	
2		0.1900	13.69	10.61	24.30	54.04	-29.74	AVG	
3		0.2379	29.49	10.61	40.10	62.17	-22.07	QP	
4		0.2379	12.19	10.61	22.80	52.17	-29.37	AVG	
5		0.3059	26.79	10.61	37.40	60.08	-22.68	QP	
6		0.3059	12.09	10.61	22.70	50.08	-27.38	AVG	
7	*	0.4500	26.78	10.62	37.40	56.88	-19.48	QP	
8		0.4500	14.88	10.62	25.50	46.88	-21.38	AVG	
9		0.7580	16.06	10.64	26.70	56.00	-29.30	QP	
10		0.7580	4.56	10.64	15.20	46.00	-30.80	AVG	
11		4.3619	14.64	10.66	25.30	56.00	-30.70	QP	
12		4.3619	1.94	10.66	12.60	46.00	-33.40	AVG	

\*:Maximum data x:Over limit !:over margin

(Reference Only)



Dongguan NTC Co., Ltd.  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


Conducted Emission Measurement

File :GZ1

Data :#19

Date: 2018-9-29

Time: 10:42:31

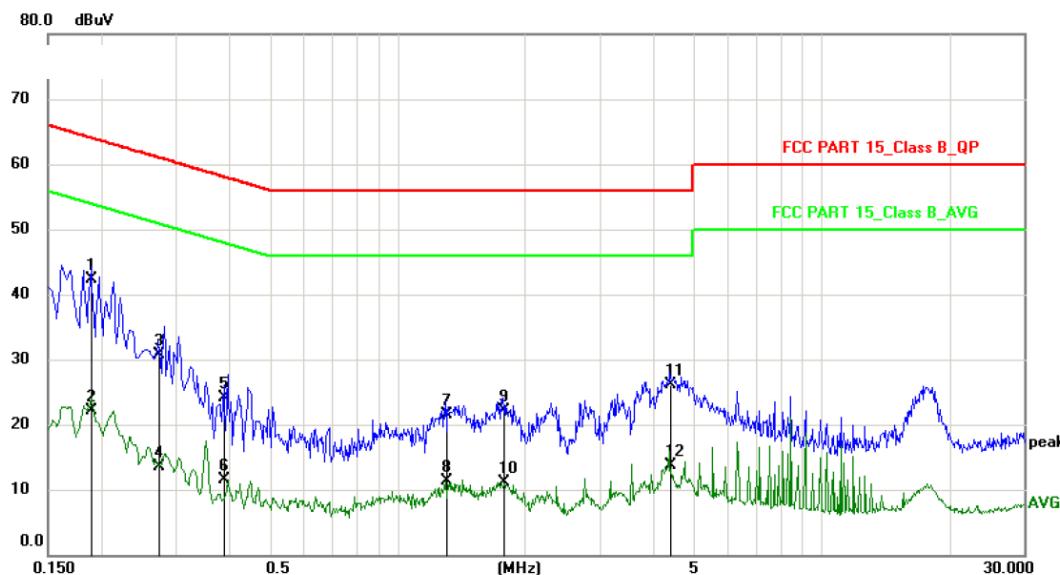

Site

Phase:

*N*

Temperature: 26

Limit: FCC PART 15\_Class B\_QP

Power: AC120V/60Hz

Humidity: 50 %

EUT: Game Zoom

M/N: GZ1

Mode: TX(Wireless Charging)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment	
								Detector	Comment
1	*	0.1900	31.79	10.61	42.40	64.04	-21.64	QP	
2		0.1900	11.49	10.61	22.10	54.04	-31.94	AVG	
3		0.2740	20.19	10.61	30.80	61.00	-30.20	QP	
4		0.2740	2.99	10.61	13.60	51.00	-37.40	AVG	
5		0.3899	13.49	10.61	24.10	58.07	-33.97	QP	
6		0.3899	0.89	10.61	11.50	48.07	-36.57	AVG	
7		1.2980	10.85	10.65	21.50	56.00	-34.50	QP	
8		1.2980	0.75	10.65	11.40	46.00	-34.60	AVG	
9		1.7780	11.55	10.65	22.20	56.00	-33.80	QP	
10		1.7780	0.45	10.65	11.10	46.00	-34.90	AVG	
11		4.3859	15.44	10.66	26.10	56.00	-29.90	QP	
12		4.3859	3.14	10.66	13.80	46.00	-32.20	AVG	


\*:Maximum data    x:Over limit    !:over margin

(Reference Only)


## 4. Radiated Emission Test

### 4.1 Test SET-UP (Block Diagram of Configuration)

#### 4.1.1 Radiated Emission Test Set-Up, Frequency below 30MHz

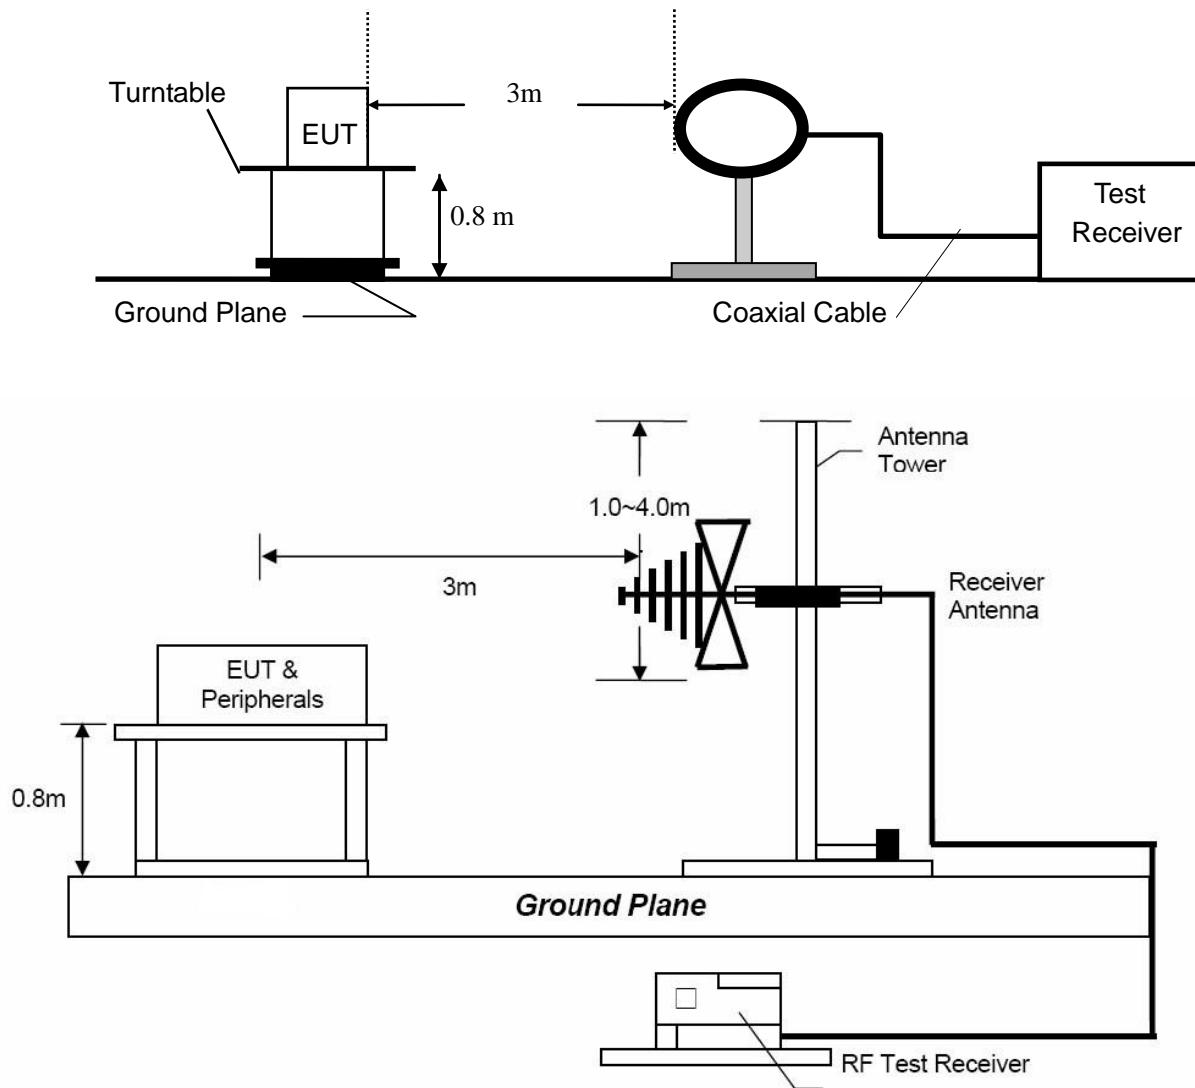

#### 4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

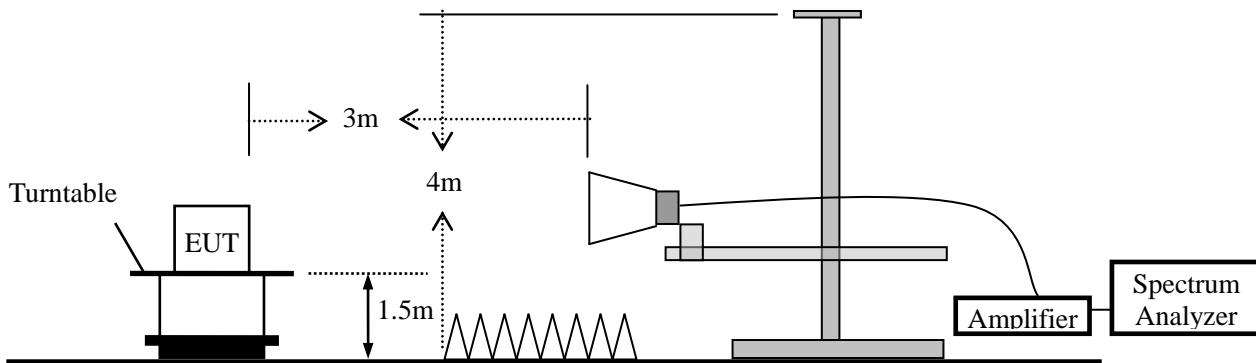

## 4.2 Measurement Procedure

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room.
- b. For the radiated emission test above 1GHz:  
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

#### 4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		μV/m
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark : (1) Emission level (dB) $\mu$ V = 20 log Emission level  $\mu$ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

#### 4.4 Measurement Results

Please refer to following plots of the worst case: TX (Wireless Charging 10W-Full load)



Dongguan NTC Co., Ltd.  
 Tel:+86-769-22022444 Fax:+86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

### Radiated Emission Measurement


File :GZ1

Data :#60

Date: 2018-9-28

Time: 18:51:21

133.0 dBuA

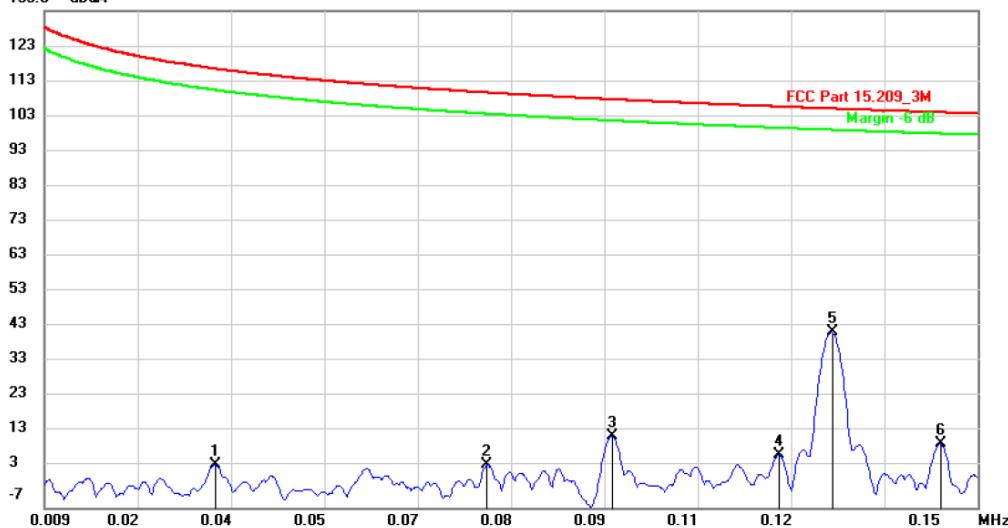

Site: 3m Chamber

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part 15.209\_3M

Power: AC120V/60Hz

Humidity: 60 %

EUT: Game Zoom

Distance:

M/N: GZ1

Mode: TX

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height		Table Degree						
								MHz	dBuV	dB/m	dBuA	dB	Detector	cm	degree	Comment
1		0.0347	-27.27	32.29	5.02	116.67	-111.65	peak								
2		0.0758	-27.22	32.30	5.08	109.92	-104.84	peak								
3		0.0947	-19.19	32.31	13.12	108.00	-94.88	peak								
4		0.1199	-24.44	32.30	7.86	105.96	-98.10	peak								
5	*	0.1279	10.11	32.30	42.41	105.40	-62.99	peak								
6		0.1444	-21.39	32.30	10.91	104.35	-93.44	peak								

\*:Maximum data    x:Over limit    !:over margin

Reference Only

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to Meet the requirements.



Dongguan NTC Co., Ltd.  
 Tel:+86-769-22022444 Fax:+86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement


File :GZ1

Data :#62

Date: 2018-9-28

Time: 19:07:56

133.0 dBuA

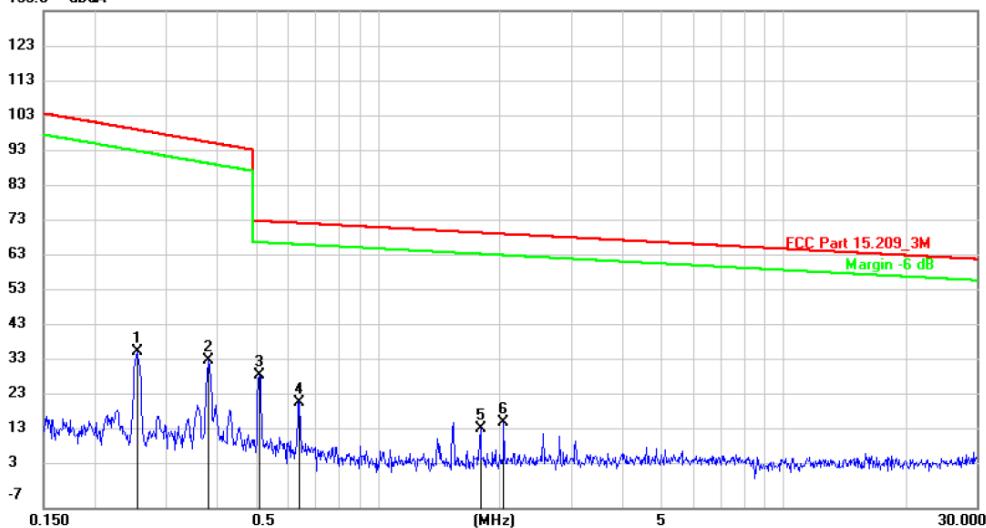

Site: 3m Chamber

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part 15.209\_3M

Power: AC120V/60Hz

Humidity: 60 %

EUT: Game Zoom

Distance:

M/N: GZ1

Mode: TX

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuA	dBuA	dB	Detector	cm	degree
1		0.2548	4.50	32.27	36.77	99.45	-62.68	peak		
2		0.3830	2.33	32.23	34.56	95.93	-61.37	peak		
3	*	0.5100	-1.99	32.22	30.23	73.69	-43.46	peak		
4		0.6403	-9.47	32.20	22.73	73.10	-50.37	peak		
5		1.7903	-16.79	32.17	15.38	70.39	-55.01	peak		
6		2.0440	-15.10	32.17	17.07	70.04	-52.97	peak		

\*:Maximum data x:Over limit !:over margin

⟨Reference Only

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to Meet the requirements.



Dongguan NTC Co., Ltd.  
 Tel:+86-769-22022444 Fax:+86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


#### Radiated Emission Measurement

File :GZ1

Data :#59

Date: 2018-9-28

Time: 18:43:53

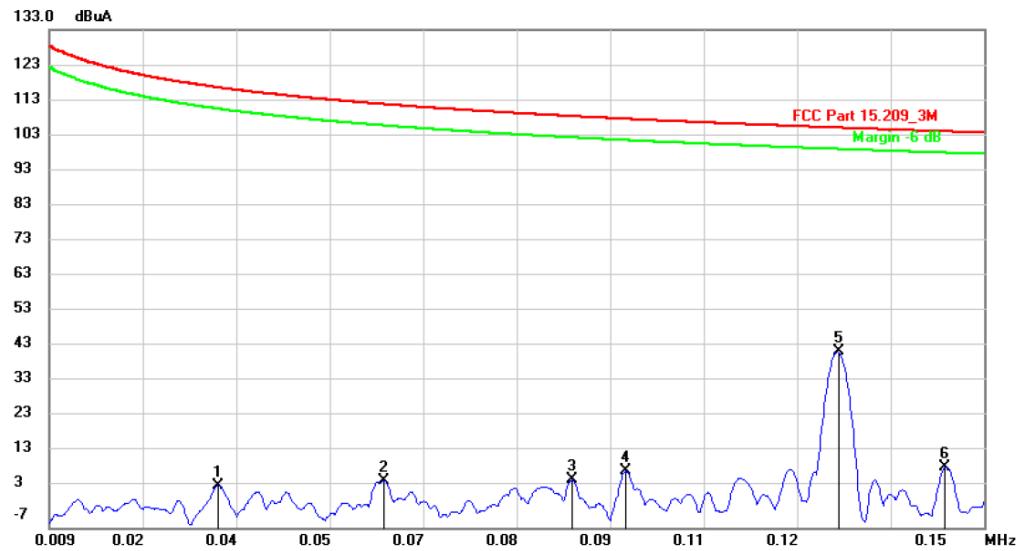

Site: 3m Chamber

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part 15.209\_3M

Power: AC120V/60Hz

Humidity: 60 %

EUT: Game Zoom

Distance:

M/N: GZ1

Mode: TX

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
			Level	Factor	ment				
		MHz	dBuV	dB/m	dBuA	dB	Detector	cm	Degree
1		0.0345	-27.44	32.29	4.85	116.72	-111.87	peak	
2		0.0594	-26.08	32.32	6.24	112.03	-105.79	peak	
3		0.0878	-25.90	32.31	6.41	108.65	-102.24	peak	
4		0.0960	-23.52	32.31	8.79	107.88	-99.09	peak	
5 *		0.1279	10.11	32.30	42.41	105.40	-62.99	peak	
6		0.1440	-22.18	32.30	10.12	104.38	-94.26	peak	

\*:Maximum data x:Over limit !:over margin

⟨Reference Only

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to Meet the requirements.



Dongguan NTC Co., Ltd.  
 Tel:+86-769-22022444 Fax:+86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

#### Radiated Emission Measurement


File :GZ1

Data #:61

Date: 2018-9-28

Time: 18:59:34

133.0 dBuA

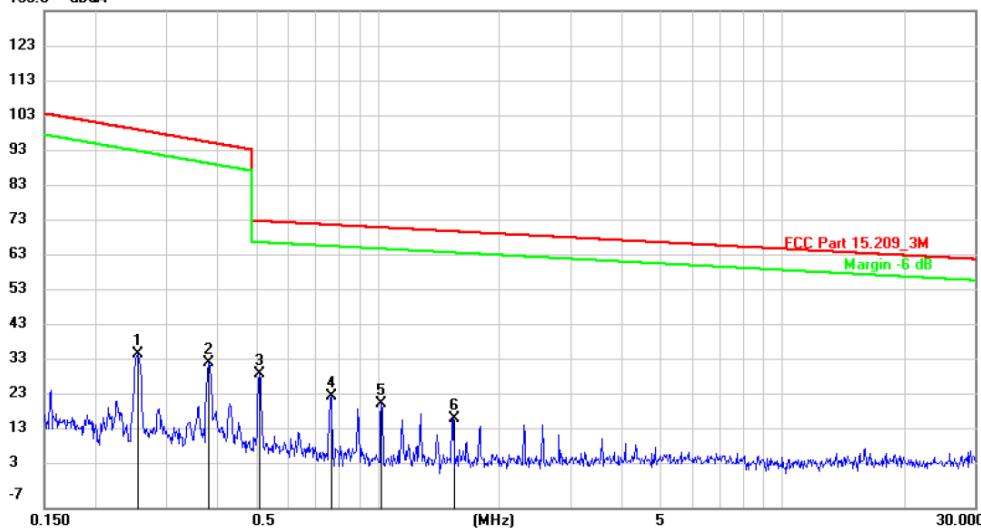

Site: 3m Chamber

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part 15.209\_3M

Power: AC120V/60Hz

Humidity: 60 %

EUT: Game Zoom

Distance:

M/N: GZ1

Mode: TX

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB/m	dBuA	dBuA	dB	Detector	cm	degree	Comment
1		0.2548	4.04	32.27	36.31	99.45	-63.14	peak			
2		0.3830	1.46	32.23	33.69	95.93	-62.24	peak			
3	*	0.5100	-1.69	32.22	30.53	73.69	-43.16	peak			
4		0.7669	-7.76	32.19	24.43	72.62	-48.19	peak			
5		1.0207	-9.98	32.17	22.19	71.87	-49.68	peak			
6		1.5355	-13.99	32.17	18.18	70.79	-52.61	peak			

\*:Maximum data    x:Over limit    !:over margin

Reference Only

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to Meet the requirements.

## 5. 20dB Bandwidth

### 5.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.35:

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

### 5.2 Test SET-UP (Block Diagram of Configuration)



### 5.3 Measurement Results


Refer to attached data chart.

RBW:	1KHz	VBW:	3KHz
Test By:	Sance	Spectrum Detector:	PK
Temperature :	24 °C	Test Date :	September 30, 2018
Test Result:	PASS	Humidity :	50 %

Channel frequency (KHz)	20dB Down BW(Hz)
127.80	3125

## Test Channel

REF

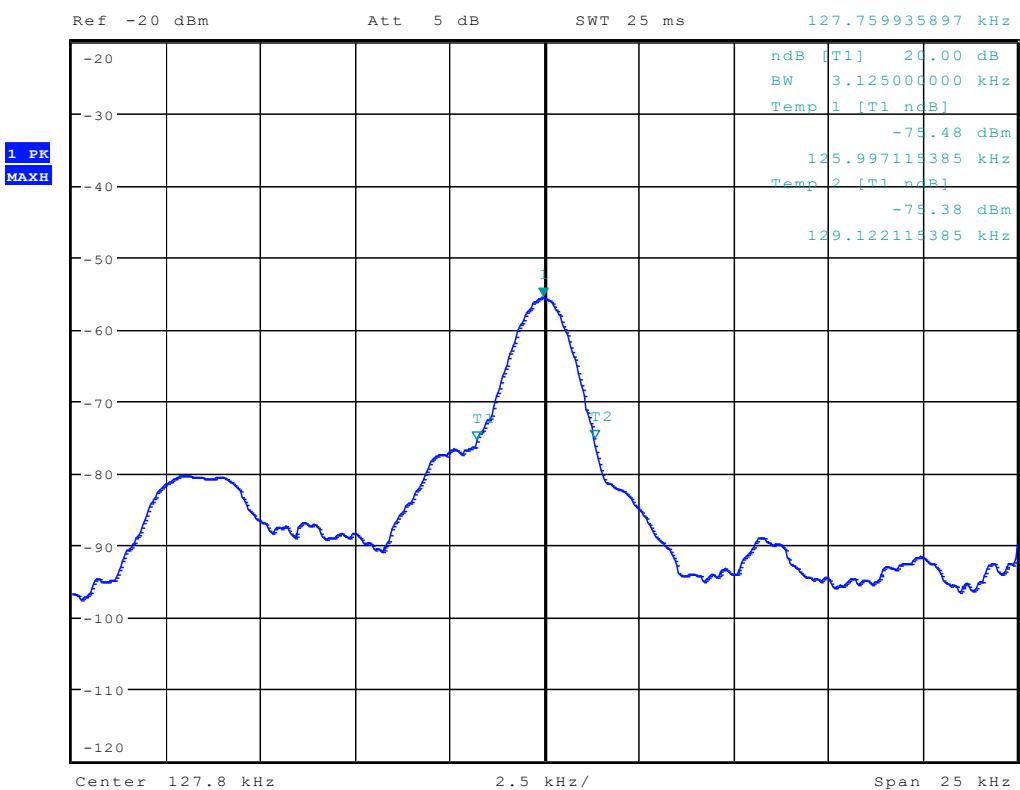

Date: 30.SEP.2018 11:04:35

## 6. Antenna Application

### 6.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 6.2 Measurement Results

The antenna is coil antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 0dBi, So, the antenna is consider meet the requirement.

## 7. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Mar. 14, 2018	Mar. 13, 2019
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Mar. 15, 2018	Mar. 14, 2019
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Mar. 14, 2018	Mar. 13, 2019
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Mar. 14, 2018	Mar. 13, 2019
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Apr. 25, 2018	Apr. 25, 2019
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Mar. 14, 2018	Mar. 13, 2019
Horn Antenna	Schwarzbeck	BBHA9170	9170-242	15GHz~40GHz	Mar. 14, 2018	Mar. 13, 2019
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Mar. 15, 2018	Mar. 14, 2019
RF Cable	Huber+Suhner	SF-104	N/A	9KHz~40GHz	Apr. 25, 2018	Apr. 24, 2019
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Apr. 25, 2018	Apr. 24, 2019
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Apr. 25, 2018	Apr. 24, 2019
Spectrum Analyzer	Rohde & Schwarz	FSV40	101003	10Hz~40GHz	Apr. 06, 2018	April. 05, 2019
Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Nov. 03, 2017	Nov. 02, 2018
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Apr. 25, 2018	Apr. 24, 2019
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Mar. 14, 2018	Mar. 13, 2019
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Nov. 03, 2017	Nov. 02, 2018
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Nov. 03, 2017	Nov. 02, 2018

---End---