



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) Mode (U-NII-3) Antenna 1		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
151	5755	36.27	36.002
159	5795	36.34	36.064

802.11n(HT40) Mode

Antenna 1---5755 MHz-6dB Bandwidth

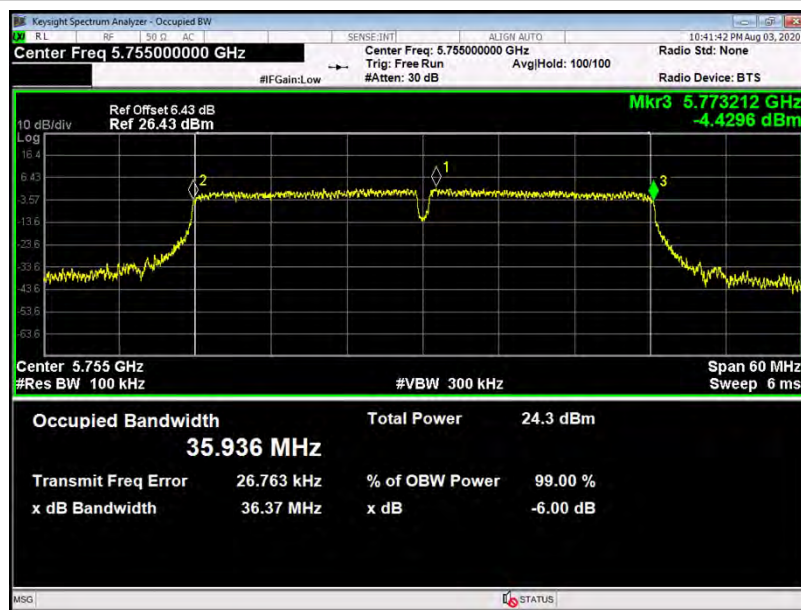


Antenna 1---5755 MHz-99%Bandwidth

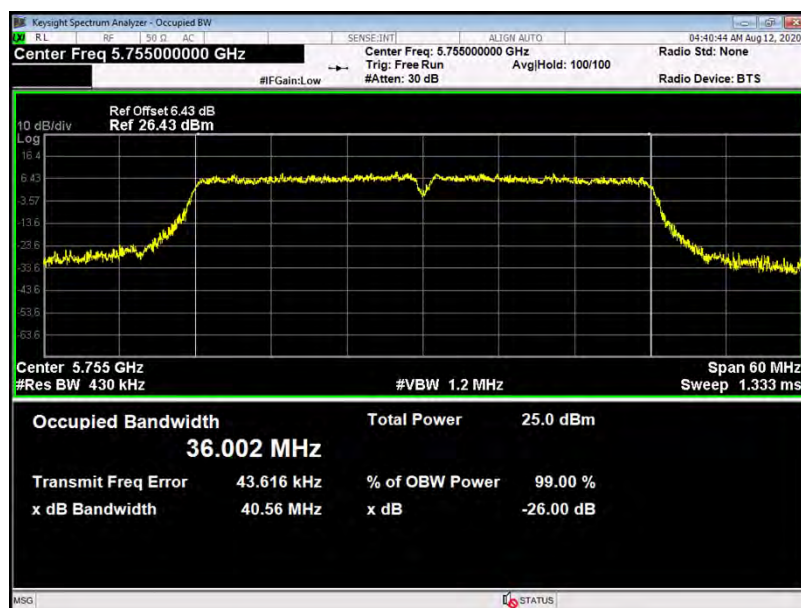



802.11n(HT40) Mode

Antenna 1---5795 MHz-6dB Bandwidth

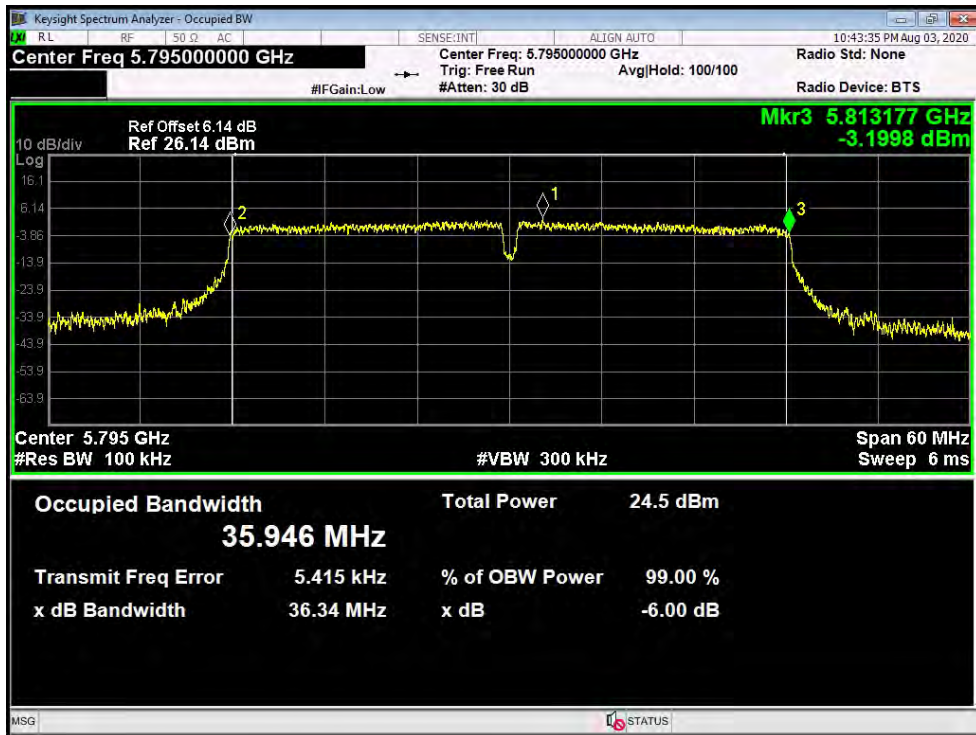


Antenna 1---5795 MHz-99%Bandwidth

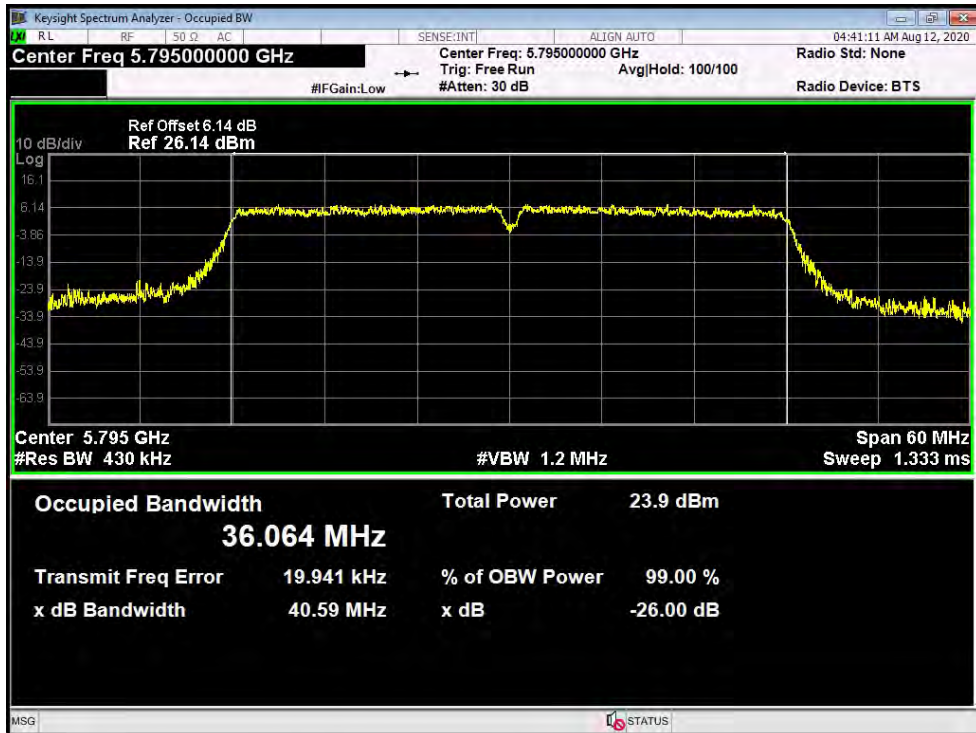

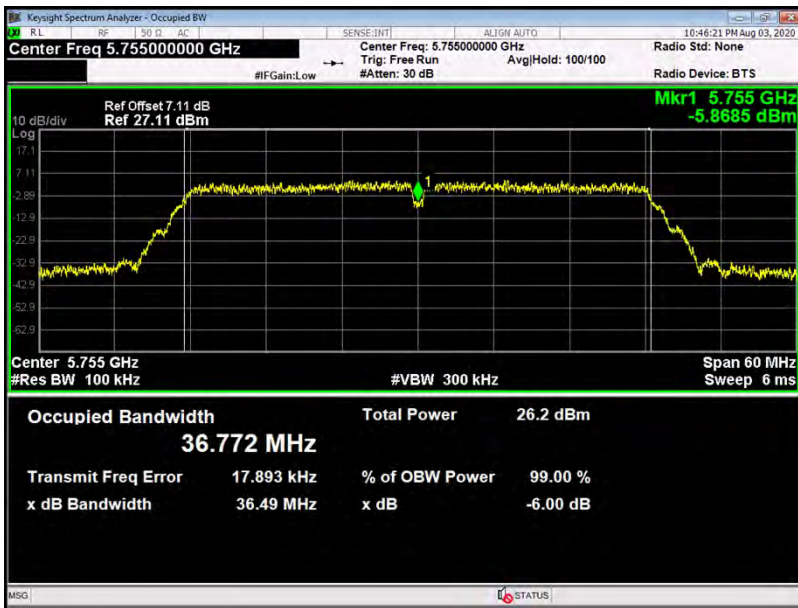
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-3) Antenna 0		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
151	5755	36.49	36.012
159	5795	36.34	36.060
802.11ac(VHT40) Mode			
Antenna 0---5755 MHz-6dB Bandwidth			
 Center Freq 5.755000000 GHz Center Freq: 5.755000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.11 dB Ref 27.11 dBm Mkr1 5.755 GHz -5.8685 dBm 10 dB/div Log Center 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 6 ms Occupied Bandwidth 36.772 MHz Total Power 26.2 dBm Transmit Freq Error 17.893 kHz % of OBW Power 99.00 % x dB Bandwidth 36.49 MHz x dB -6.00 dB			
Antenna 0---5755 MHz-99%Bandwidth			
 Center Freq 5.755000000 GHz Center Freq: 5.755000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.11 dB Ref 27.11 dBm 10 dB/div Log Center 5.755 GHz #Res BW 430 kHz #VBW 1.2 MHz Span 60 MHz Sweep 1.333 ms Occupied Bandwidth 36.012 MHz Total Power 20.2 dBm Transmit Freq Error 158.43 kHz % of OBW Power 99.00 % x dB Bandwidth 40.20 MHz x dB -26.00 dB			

802.11n(HT40) Mode

Antenna 0---5795 MHz-6dB Bandwidth

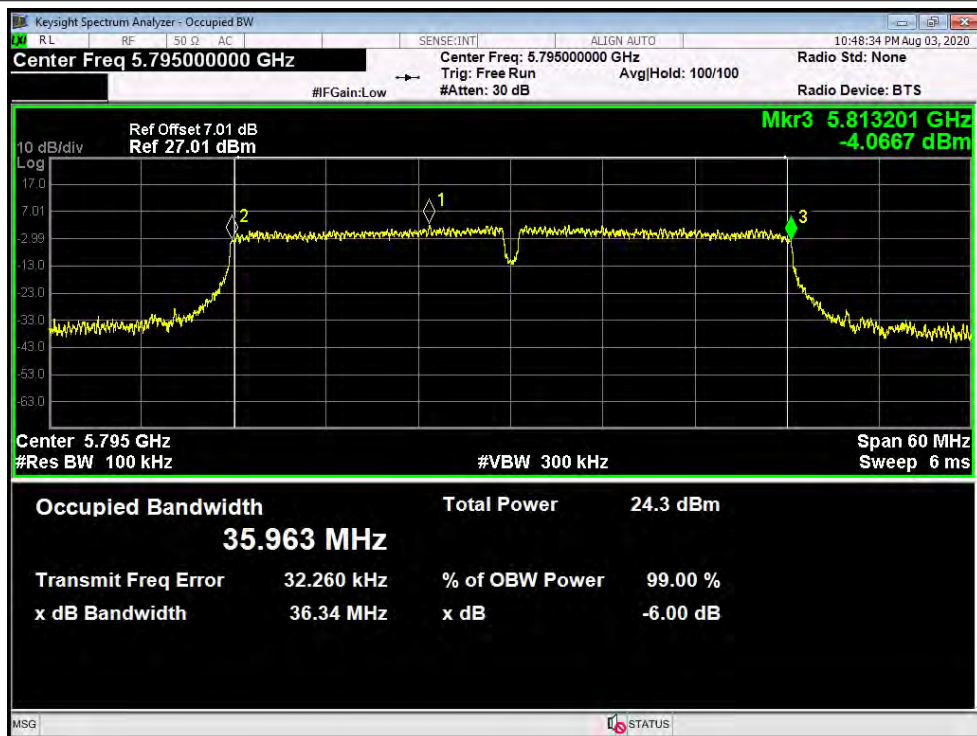


Antenna 0---5795 MHz-99%Bandwidth

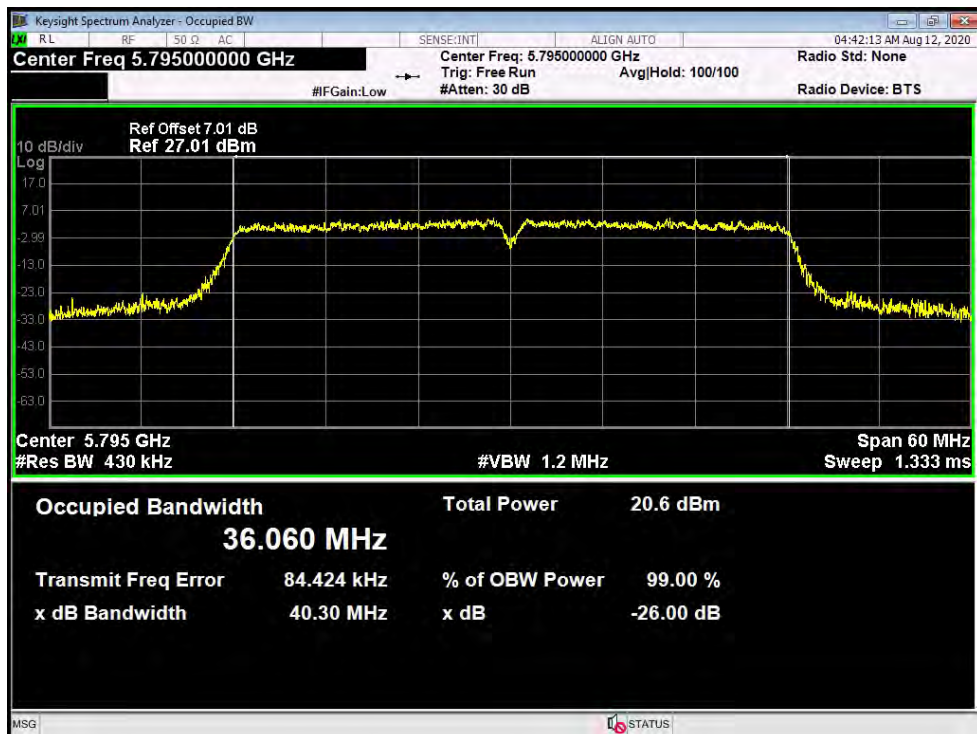


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-3) Antenna 1		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
151	5755	36.53	36.006
159	5795	36.38	36.065

802.11ac(VHT40) Mode

Antenna 1---5755 MHz-6dB Bandwidth

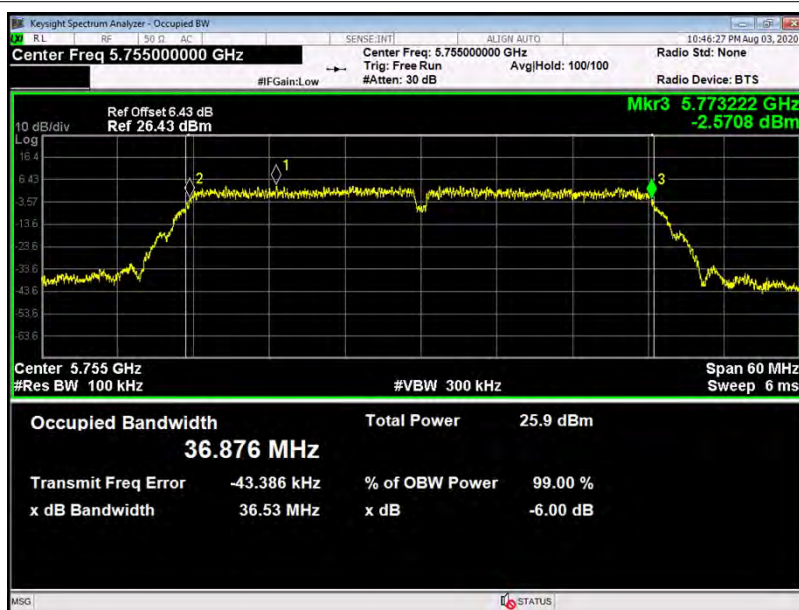


Antenna 1---5755 MHz-99%Bandwidth

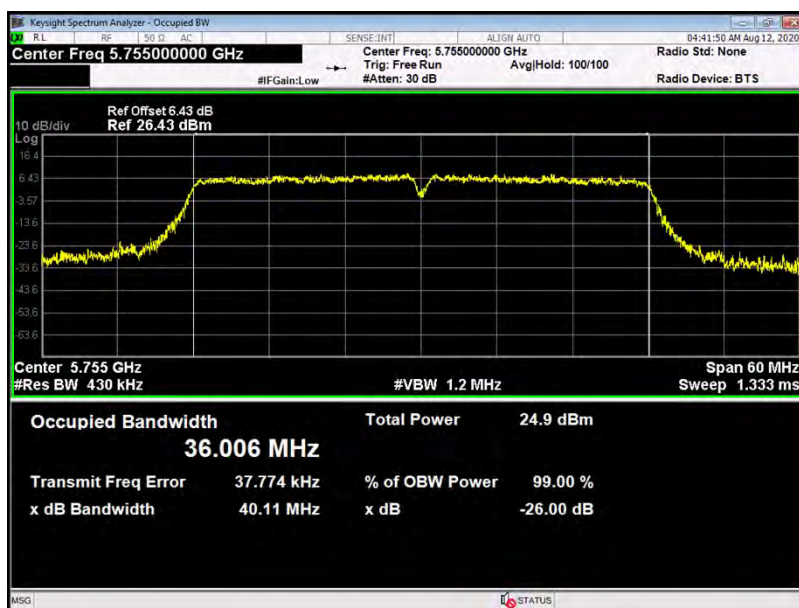


802.11ac(VHT40) Mode

Antenna 1---5795 MHz-6dB Bandwidth

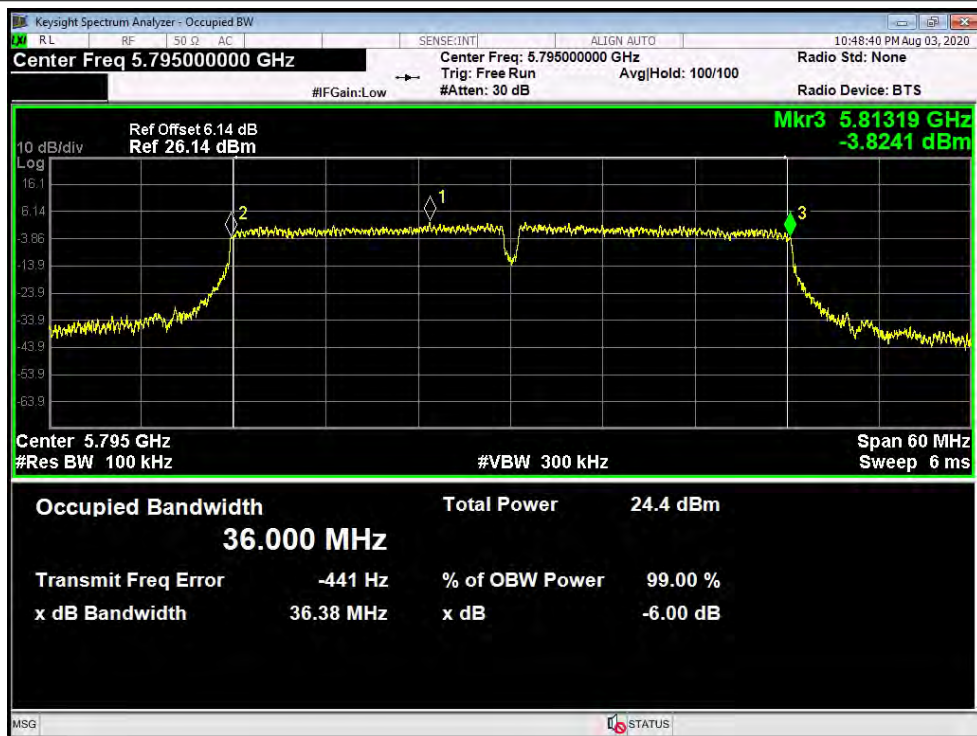


Antenna 1---5795 MHz-99%Bandwidth

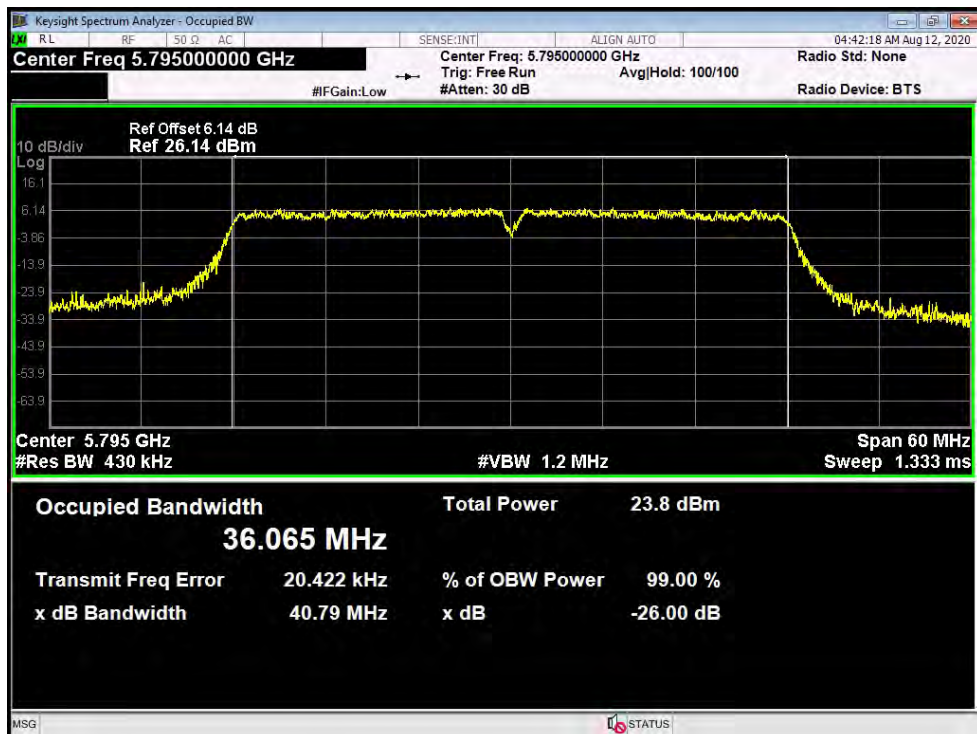


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(HT80) Mode (U-NII-3) Antenna 0		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
155	5775	75.74	74.836

802.11ac(VHT80) Mode

Antenna 0---5775 MHz-6dB Bandwidth

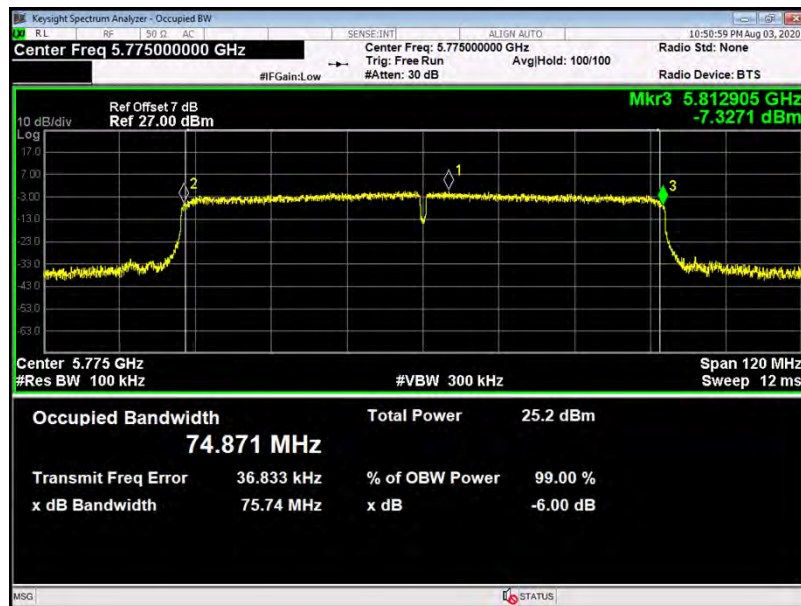


Antenna 0---5775 MHz-99%Bandwidth

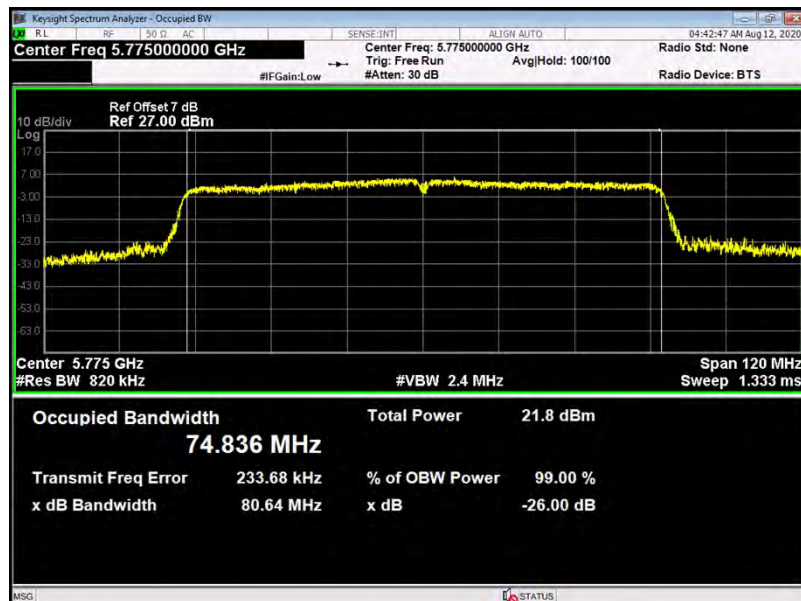


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(HT80) Mode (U-NII-3) Antenna 1		
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
155	5775	75.15	74.910

802.11ac(VHT80) Mode

Antenna 1---5775 MHz-6dB Bandwidth

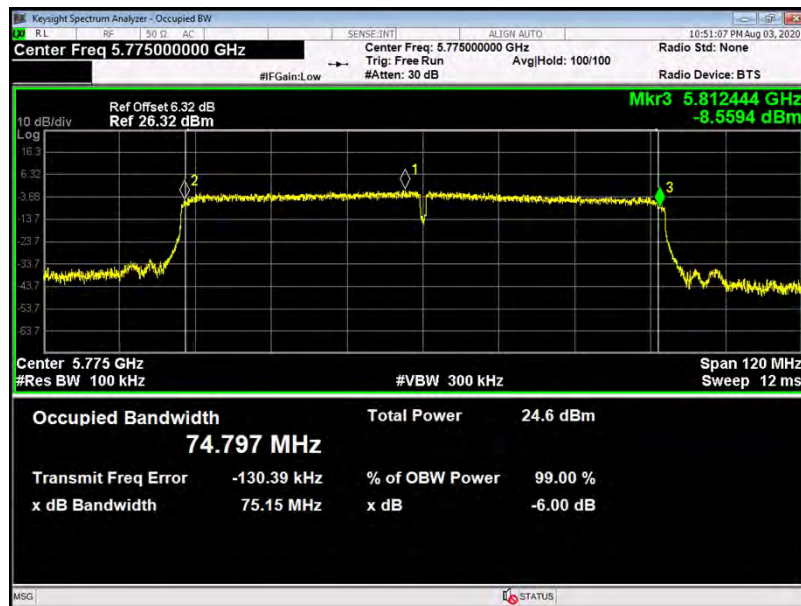

Antenna 1---5775 MHz-99%Bandwidth

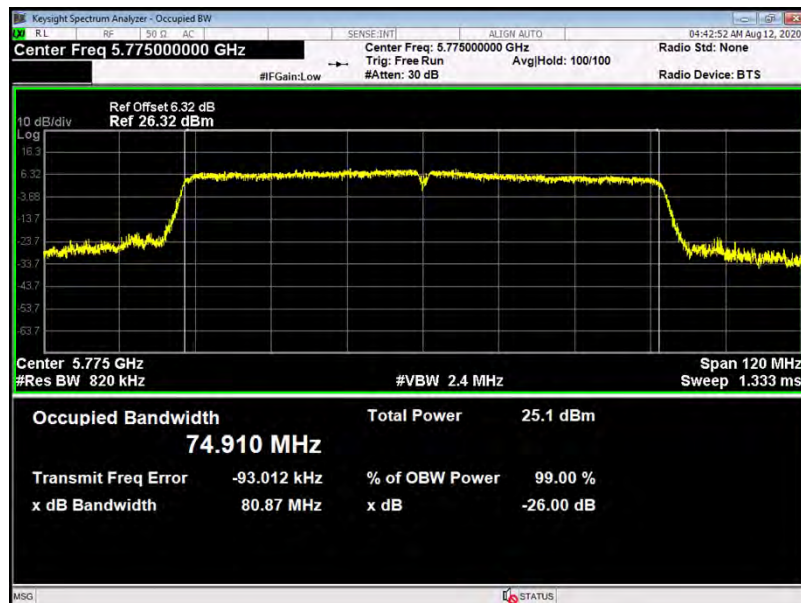


Attachment E--AVG Output Power and E.I.R.P Test Data

Temperature:		25 °C			Relative Humidity:		55%				
Test Voltage:		AC 120V/60Hz									
U-NII-1											
Test Mode	Frequency (MHz)	Conducted Power (dBm)		Duty Factor (dB)	Total Power (dBm)	Conducted Power Limit (dBm)	Directional Gain (dBi)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)		
		Ant. 0	Ant. 1								
802.11a	5180	18.74	17.48	0	21.17	29.99	6.01	27.18	36		
	5200	18.60	17.21	0	20.97		6.01	26.98			
	5240	18.86	17.55	0	21.27		6.01	27.28			
802.11n (HT20)	5180	18.98	17.83	0	21.46		6.01	27.47			
	5200	18.53	17.11	0	20.89		6.01	26.90			
	5240	18.96	17.70	0	21.39		6.01	27.40			
802.11ac (VHT20)	5180	18.69	17.40	0	21.10		6.01	27.11			
	5200	18.74	17.16	0	21.03		6.01	27.04			
	5240	19.55	18.25	0	21.96		6.01	27.97			
802.11n (HT40)	5190	19.20	17.65	0	21.50		6.01	27.51			
	5230	19.61	18.16	0	21.95		6.01	27.96			
802.11 ac(VHT40)	5190	18.46	17.15	0	20.87		6.01	26.88			
	5230	19.37	17.84	0	21.69		6.01	27.70			
802.11 ac(VHT80)	5210	19.07	17.69	0	21.44		6.01	27.45			
Result: PASS											
Remark: The EUT incorporates a MIMO function. Physically, the EUT provides two antennas for transmitting and receiving.											
When ANT. A and ANT. B transmitting simultaneously, so the											
Directional Gain= Gain _{ANT} +10log(N)dBi=6.01dBi>6dBi.											
So P _{out} = P _{limit} -(G _{TX} -6)]=(30-0.01)dBm=29.99dBm											


Temperature:		25 °C			Relative Humidity:		55%				
Test Voltage:		AC 120V/60Hz									
U-NII-3											
Test Mode	Frequency (MHz)	Conducted Power (dBm)		Duty Factor (dB)	Total Power (dBm)	Conducted Power Limit (dBm)	Directional Gain (dBi)	E.I.R.P (dBm)	E.I.R.P (dBm)		
		Ant. 0	Ant. 1								
802.11a	5745	19.09	18.87	0	21.99	29.99	6.01	28.00	36		
	5785	18.71	18.59	0	22.18		6.01	28.19			
	5825	18.12	18.26	0	21.20		6.01	27.21			
802.11n (HT20)	5745	19.08	18.51	0	22.31		6.01	28.32			
	5785	18.22	18.86	0	21.56		6.01	27.57			
	5825	18.11	17.90	0	21.02		6.01	27.03			
802.11ac (VHT20)	5745	18.93	19.44	0	22.20		6.01	28.21			
	5785	18.20	18.58	0	21.41		6.01	27.42			
	5825	17.84	17.94	0	20.90		6.01	26.91			
802.11n (HT40)	5755	19.34	17.10	0	22.23		6.01	28.24			
	5795	18.33	19.06	0	21.72		6.01	27.73			
802.11 ac(VHT40)	5755	19.32	17.14	0	22.24		6.01	28.25			
	5795	18.66	18.75	0	21.71		6.01	27.72			
802.11 ac(VHT80)	5775	19.69	19.14	0	22.44		6.01	28.45			
Result: PASS											
Remark: The EUT incorporates a MIMO function. Physically, the EUT provides two antennas for transmitting and receiving. When ANT. 0 and ANT. 1 transmitting simultaneously, so the Directional Gain= Gain _{ANT} +10log(N)dBi =6.01dBi>6dBi. So P _{out} = P _{limit} -(G _{TX} -6)]=(30-0.01)dBm=29.99dBm											

Test Mode		Duty cycle
U-NII-1	802.11 a	>98%
	802.11 n(HT20)	
	802.11 ac(VHT20)	
	802.11 n(HT40)	
	802.11 ac(VHT40)	
	802.11 ac(VHT80)	
U-NII-3	802.11 a	
	802.11 n(HT20)	
	802.11 ac(VHT20)	
	802.11 n(HT40)	
	802.11 ac(VHT40)	
	802.11 ac(VHT80)	
Please see the next plots.		


802.11 a 5200MHz U-NII-1

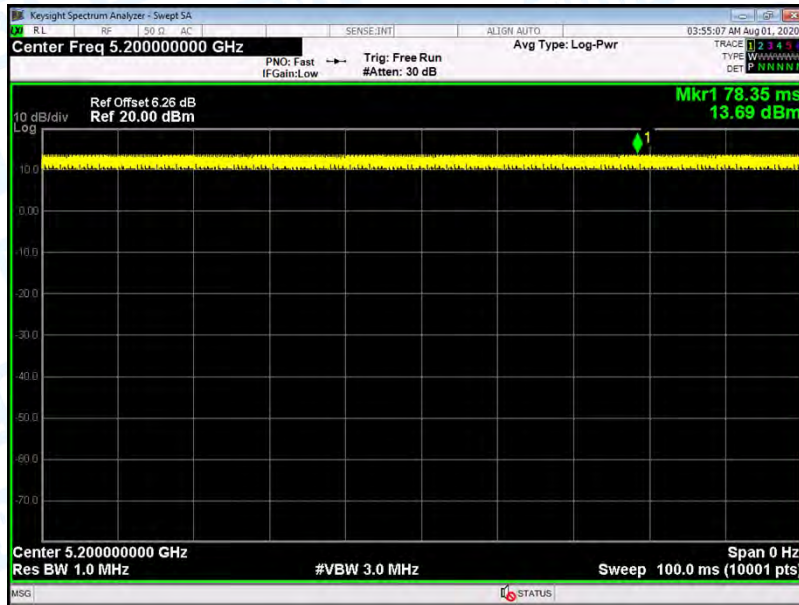


802.11 n(HT20) 5200MHz U-NII-1

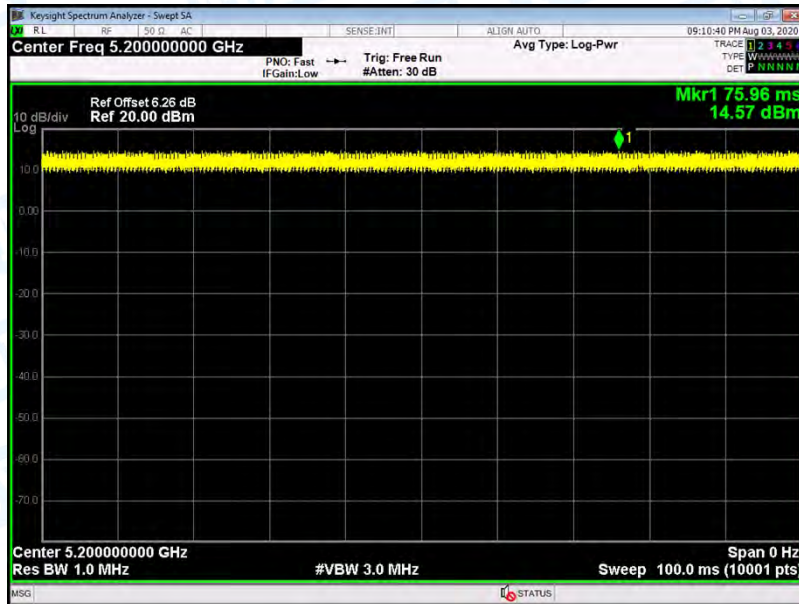


802.11 ac(VHT20) 5200MHz U-NII-1

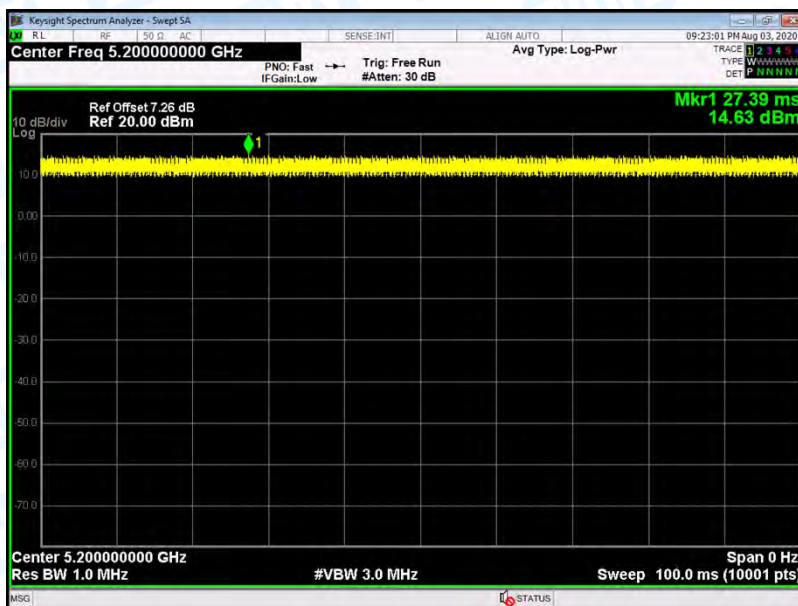


802.11 n(HT40) 5190MHz U-NII-1

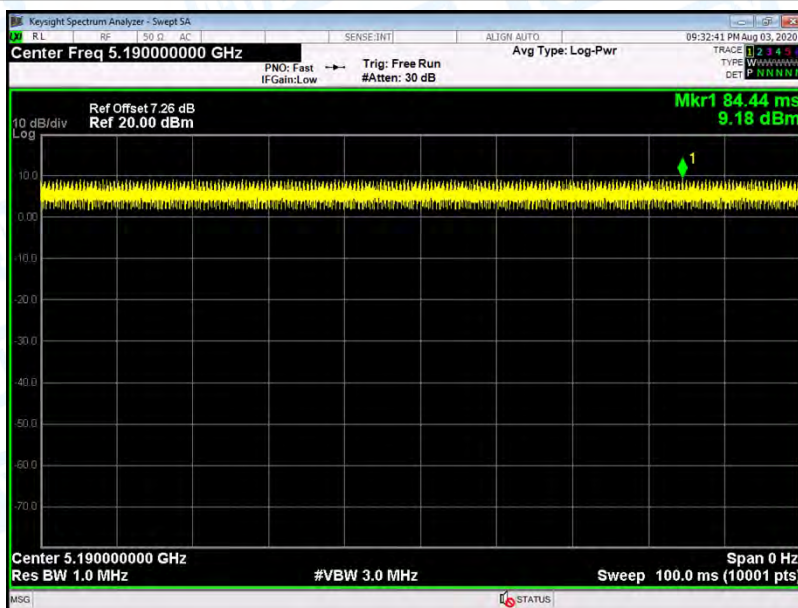


802.11 ac(VHT40) 5190MHz U-NII-1

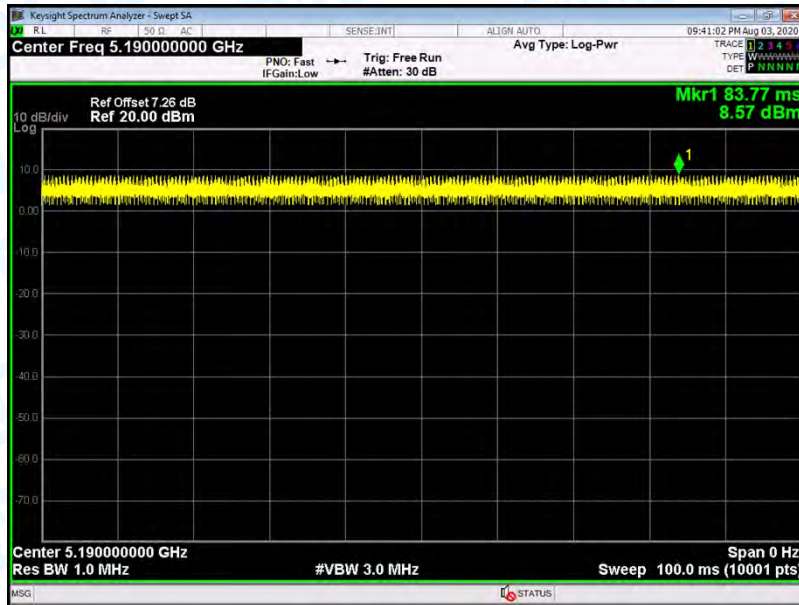


802.11 ac(HT80) 5210MHz U-NII-1

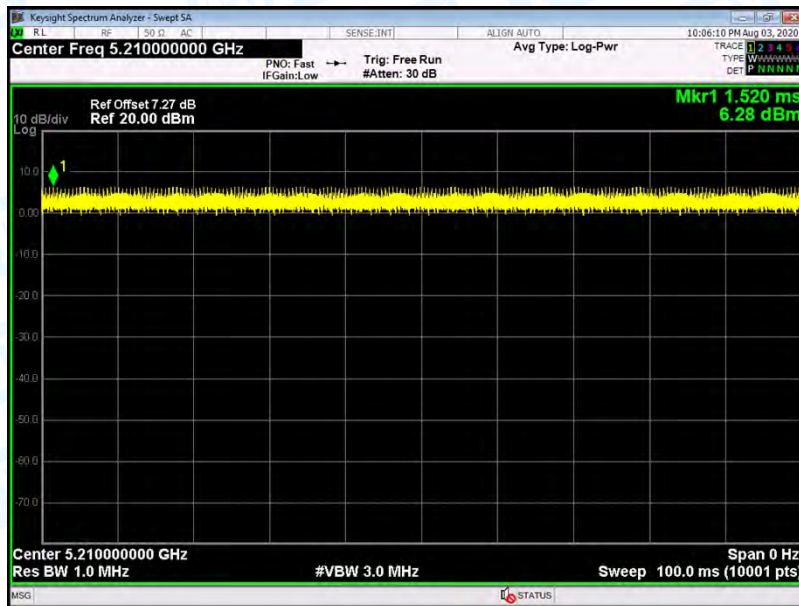


802.11 a 5785MHz U-NII-3

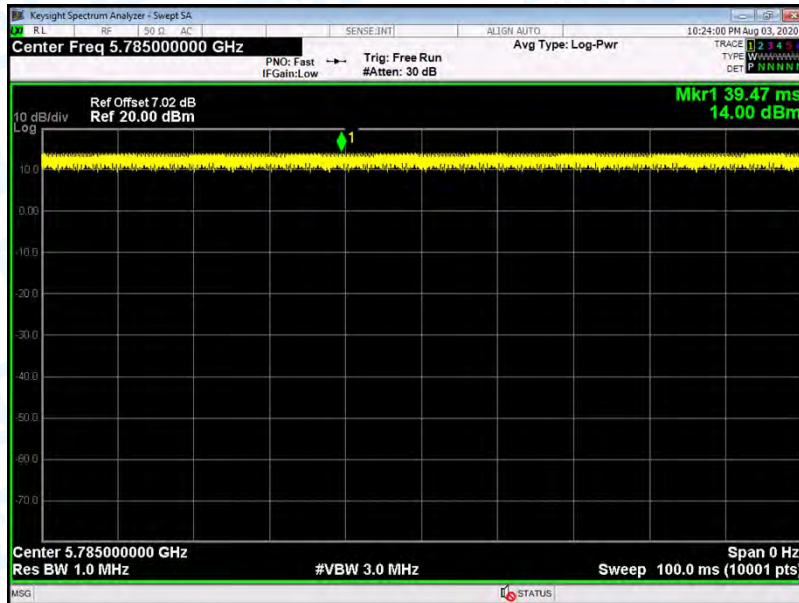


802.11 n(HT20) 5785MHz U-NII-3

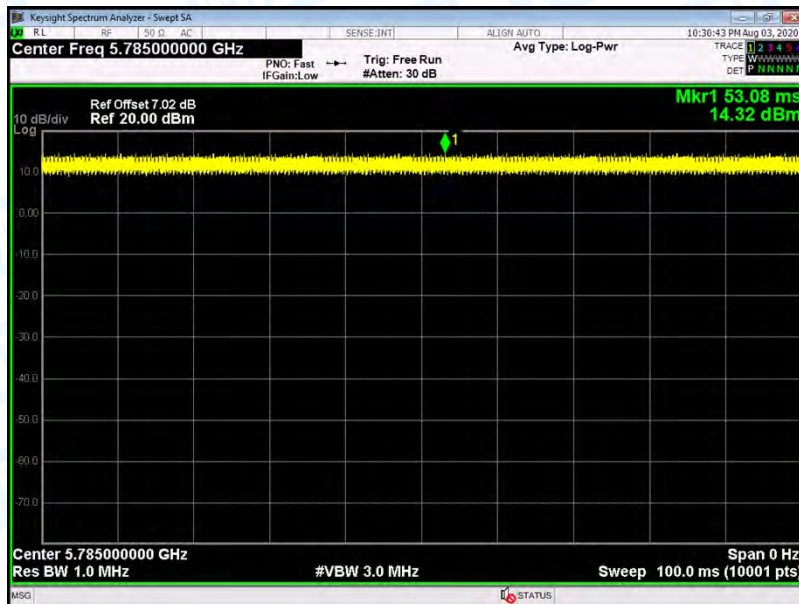


802.11 ac(VHT20) 5785MHz U-NII-3

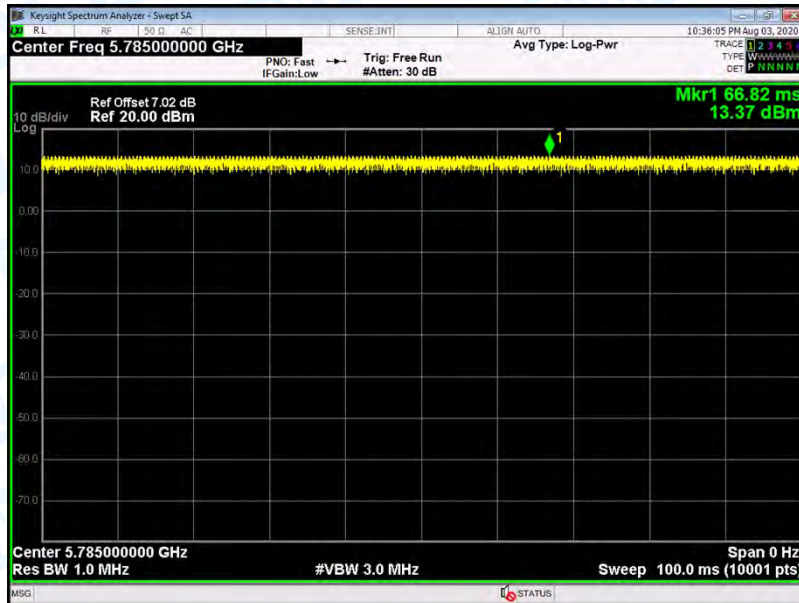


802.11 n(HT40) 5755MHz U-NII-3

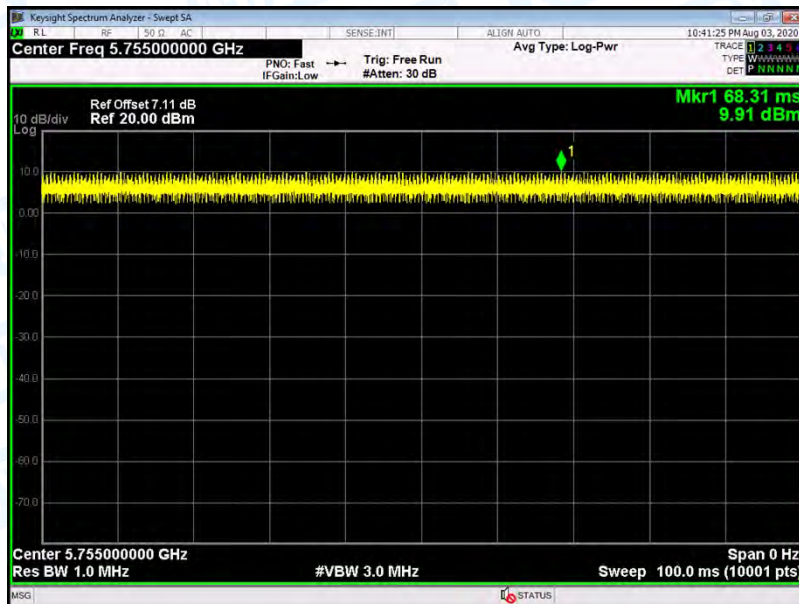

802.11 ac(VHT40) 5755MHz U-NII-3

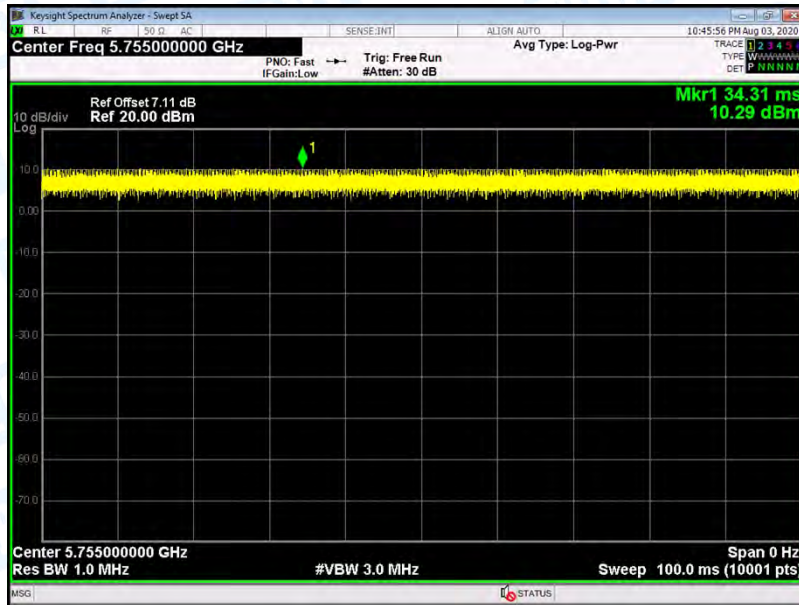


802.11 ac(VHT80) 5775MHz U-NII-3

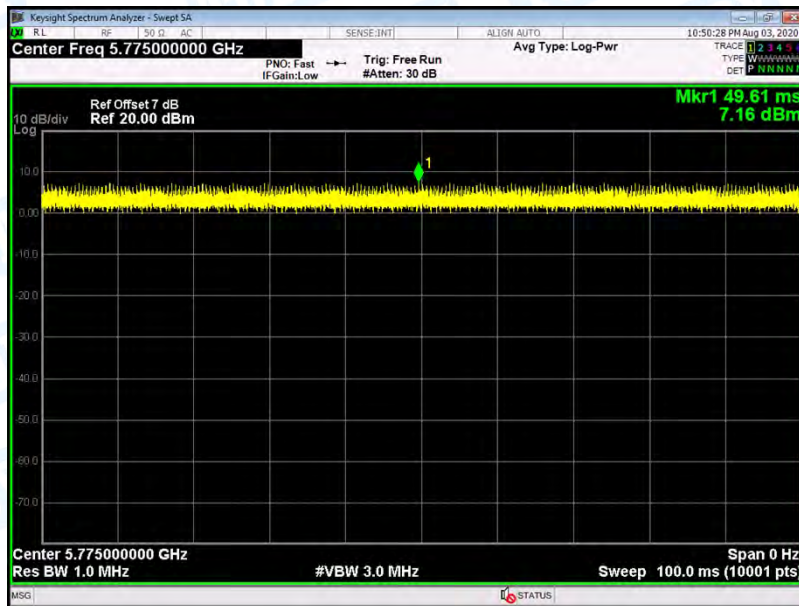

Attachment F-- Power Spectral Density Test Data

Temperature:	25 °C	Relative Humidity:		55%			
Test Voltage:	AC 120V/60Hz						
U-NII-1							
Test Mode	Frequency (MHz)	Power Density				Limit (dBm/MHz)	
		ANT. 0 (dBm/MHz)	ANT. 1 (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)		
802.11a	5180	8.438	7.326	0	10.928	16.99	
	5200	6.966	5.000	0	9.104		
	5240	8.956	7.482	0	11.292		
802.11n (HT20)	5180	8.419	7.295	0	10.904		
	5200	7.818	6.925	0	10.405		
	5240	8.714	7.362	0	11.101		
802.11ac (VHT20)	5180	8.453	6.428	0	10.568		
	5200	8.646	6.791	0	10.827		
	5240	9.163	7.950	0	11.609		
802.11n (HT40)	5190	5.371	4.651	0	8.036		
	5230	5.881	4.632	0	8.312		
802.11 ac(VHT40)	5190	5.145	3.390	0	7.959		
	5230	6.078	4.845	0	8.515		
802.11 ac(VHT80)	5210	2.593	1.366	0	5.033		
Result: PASS							
Remark: The EUT incorporates a MIMO function. Physically, the EUT provides two antennas for transmitting and receiving. When ANT. 0 and ANT. 1 transmitting simultaneously, so the Directional Gain= Gain _{ANT} +10log(N)dBi =6.01dBi>6dBi. So PSD _{out} = PSD _{limit} -(G _{TX} -6)]=(17-0.01)dBm/MHz=16.99dBm/MHz							


PSD NVNT a 5180MHz Ant.0

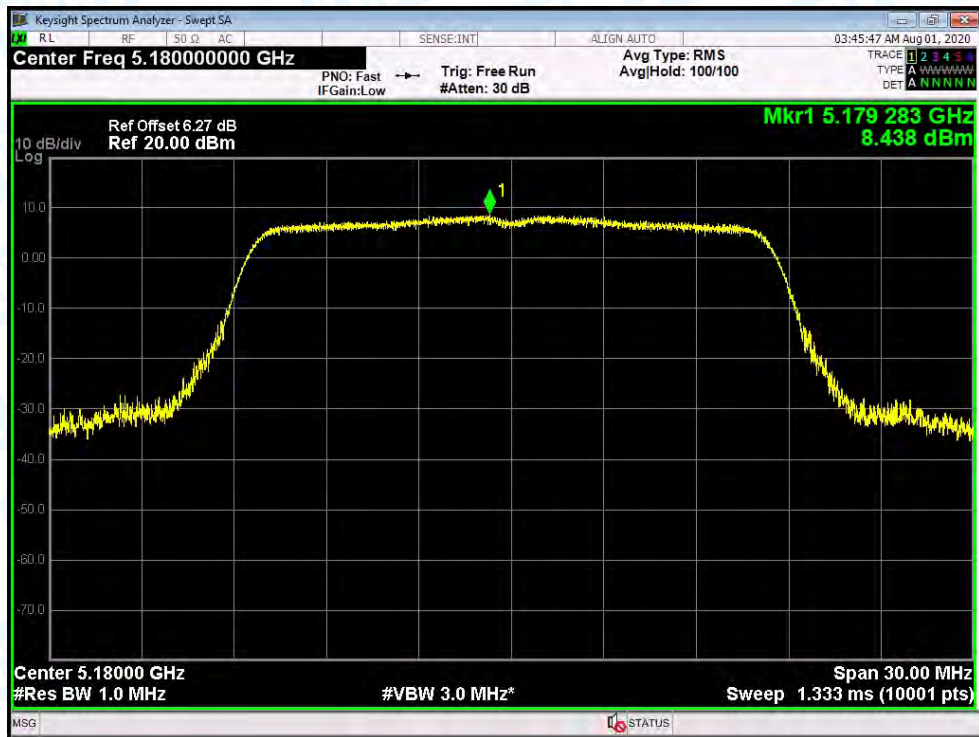


PSD NVNT a 5180MHz Ant.1




PSD NVNT a 5200MHz Ant.0

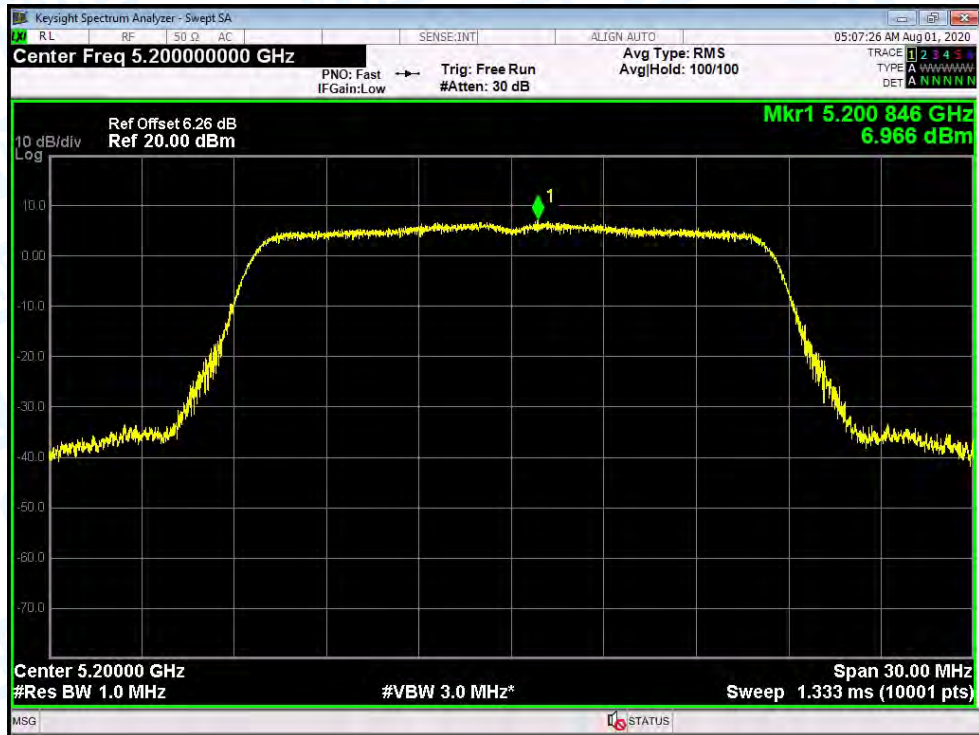


PSD NVNT a 5200MHz Ant.1

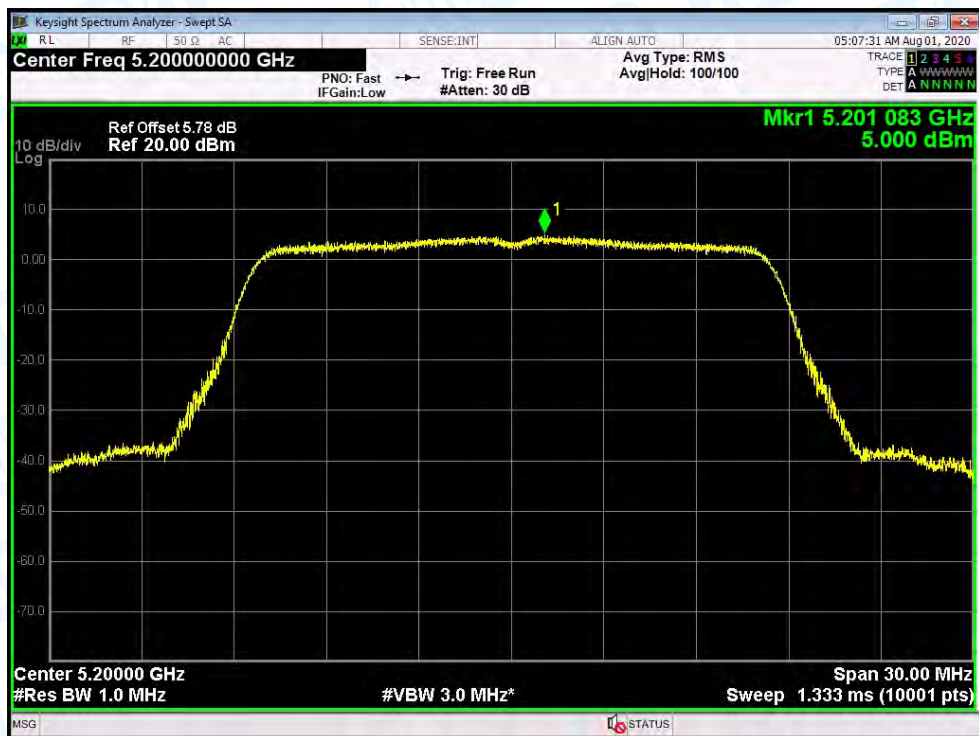


PSD NVNT a 5240MHz Ant.0

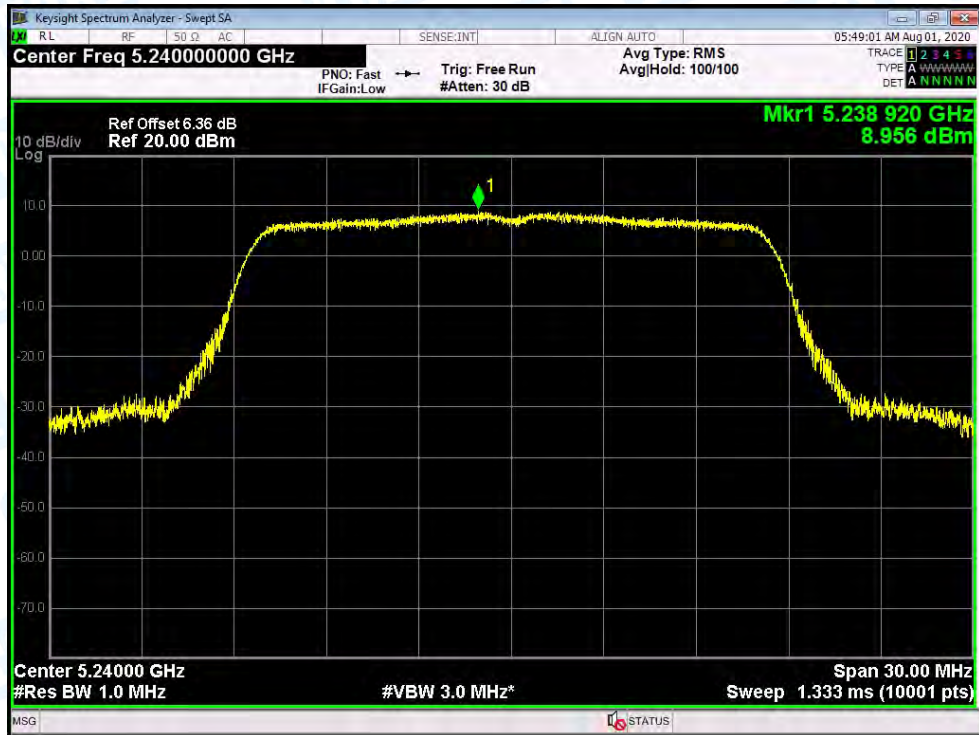


PSD NVNT a 5240MHz Ant.1

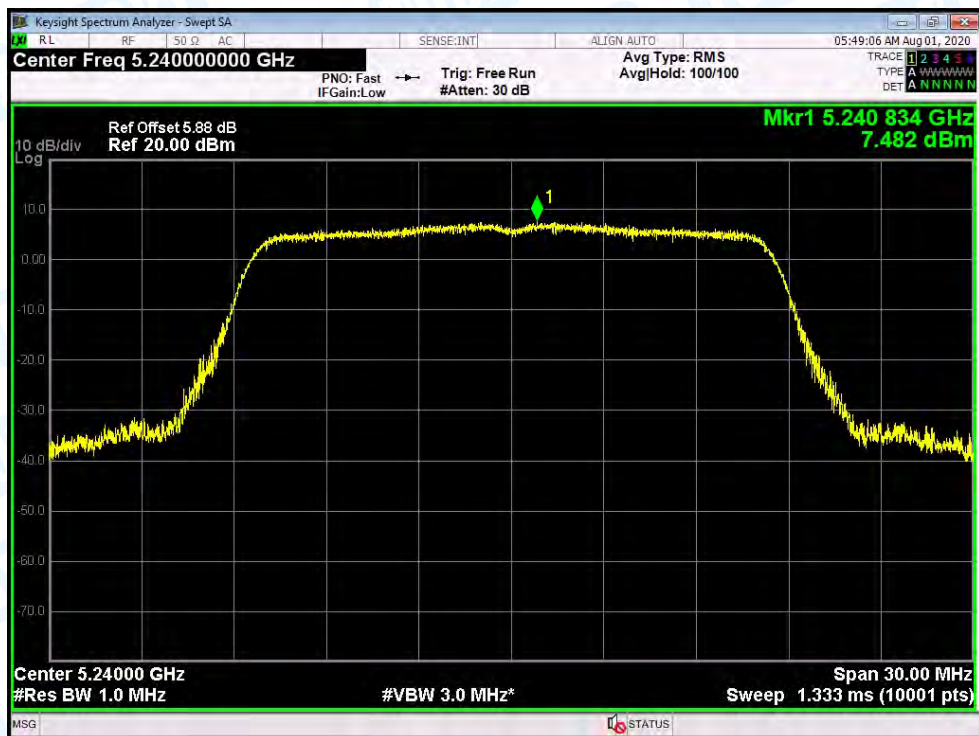


PSD NVNT n(HT20) 5180MHz Ant.0

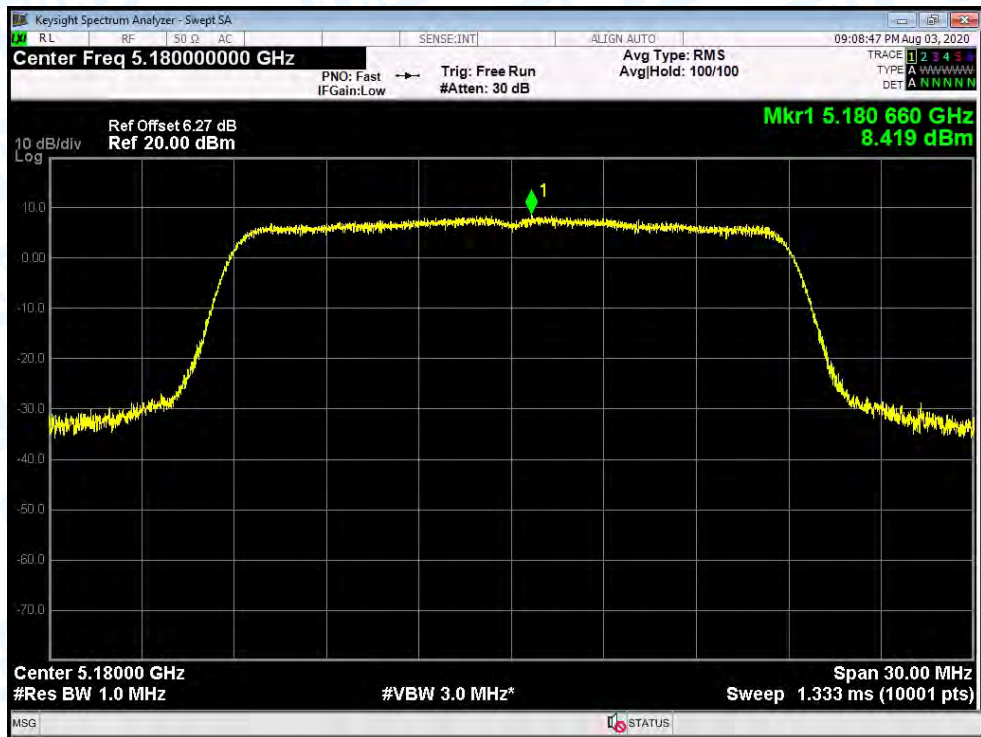

PSD NVNT n(HT20) 5180MHz Ant.1

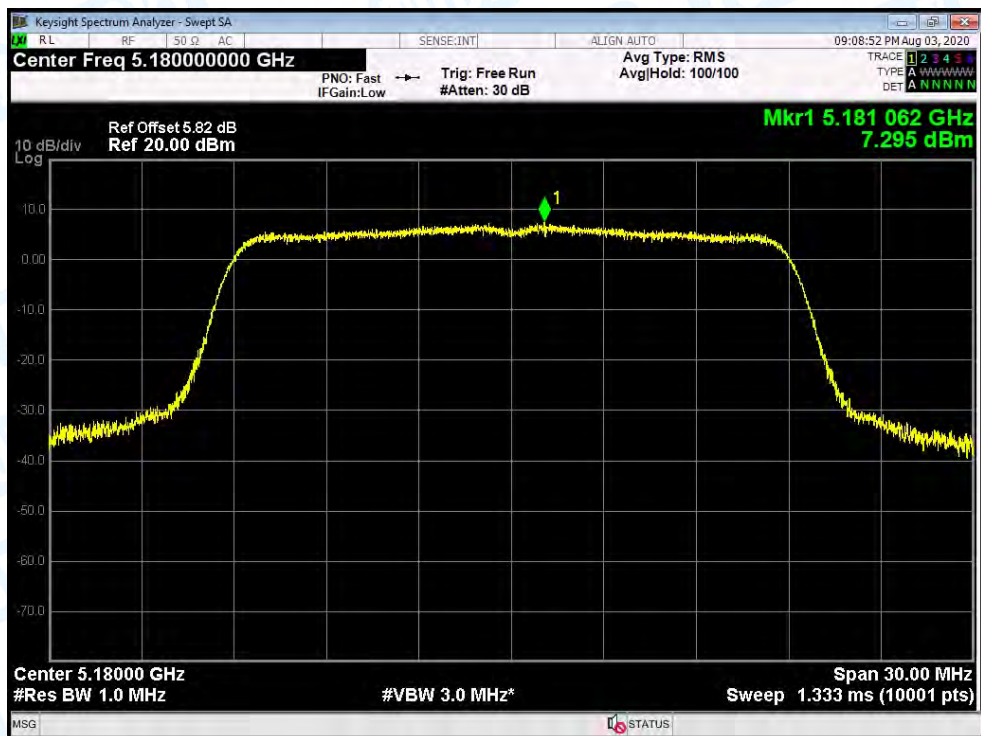


PSD NVNT n(HT20) 5200MHz Ant.0

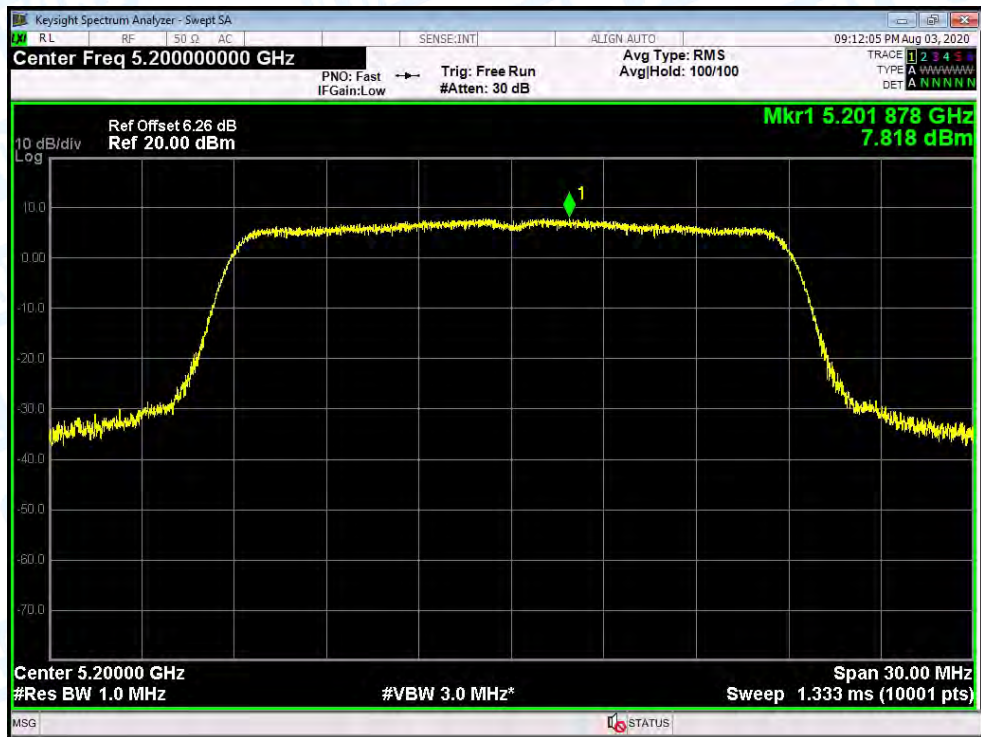


PSD NVNT n(HT20) 5200MHz Ant.1




PSD NVNT n(HT20) 5240MHz Ant.0

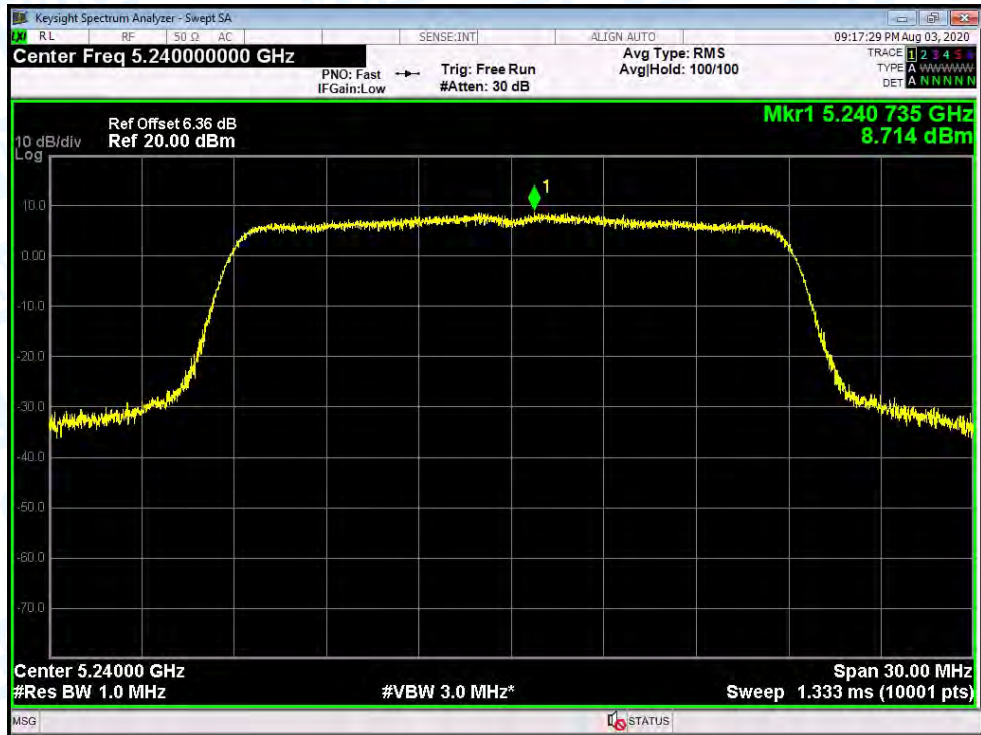

PSD NVNT n(HT20) 5240MHz Ant.1

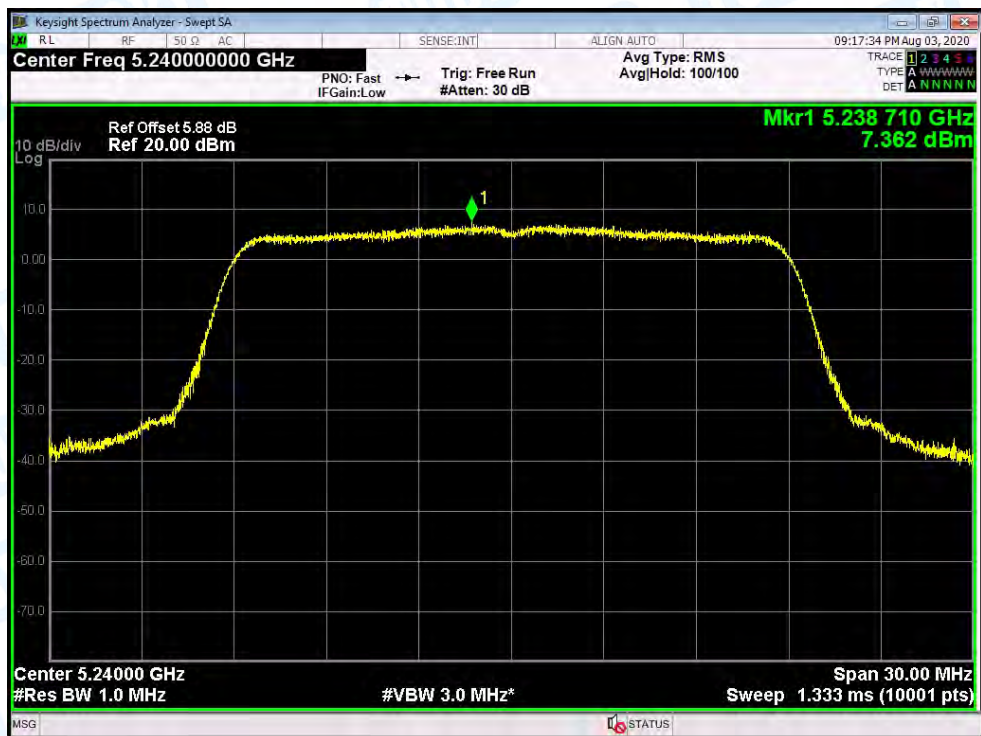


PSD NVNT ac(VHT20) 5180MHz Ant.0

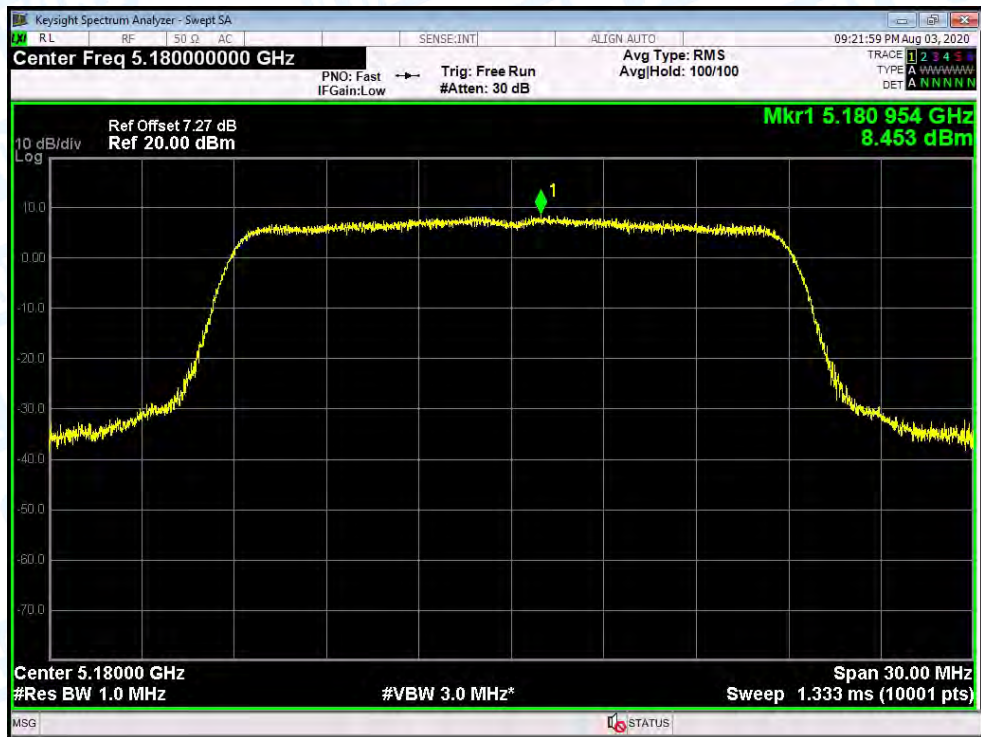


PSD NVNT ac(VHT20) 5180MHz Ant.1




PSD NVNT ac(VHT20) 5200MHz Ant.0

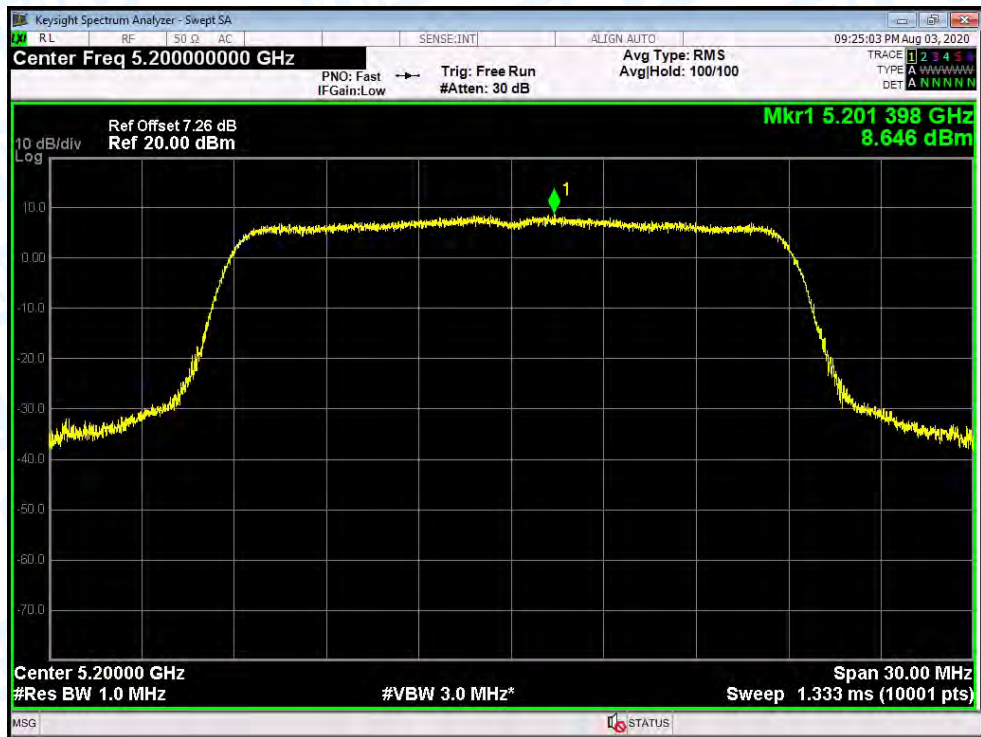


PSD NVNT ac(VHT20) 5200MHz Ant.1

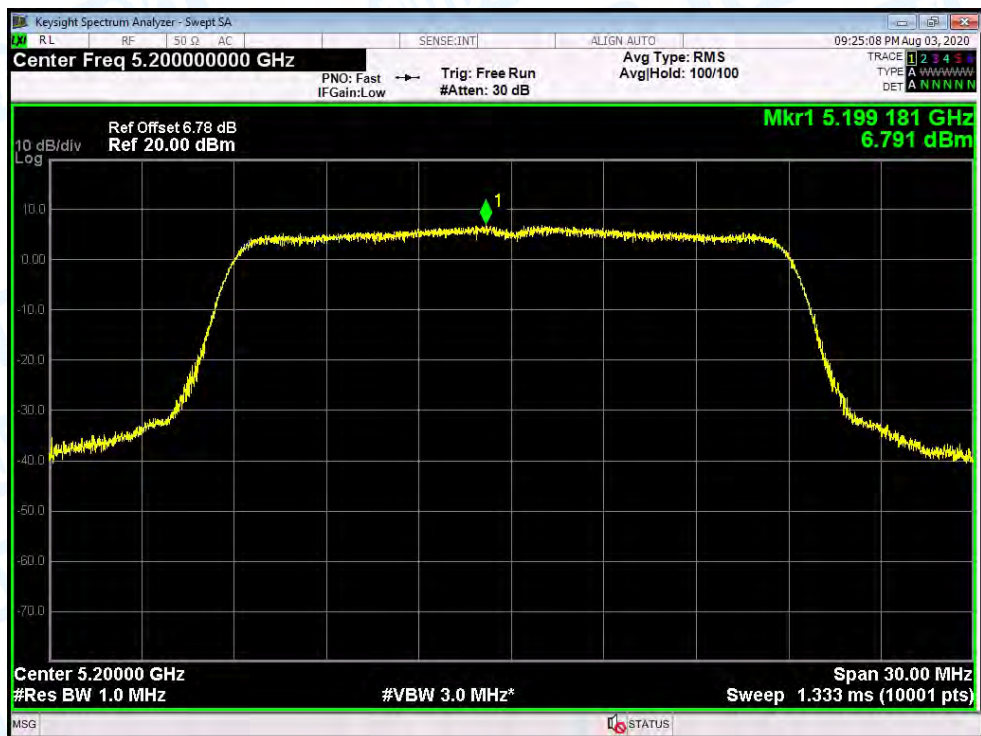


PSD NVNT ac(VHT20) 5240MHz Ant.0

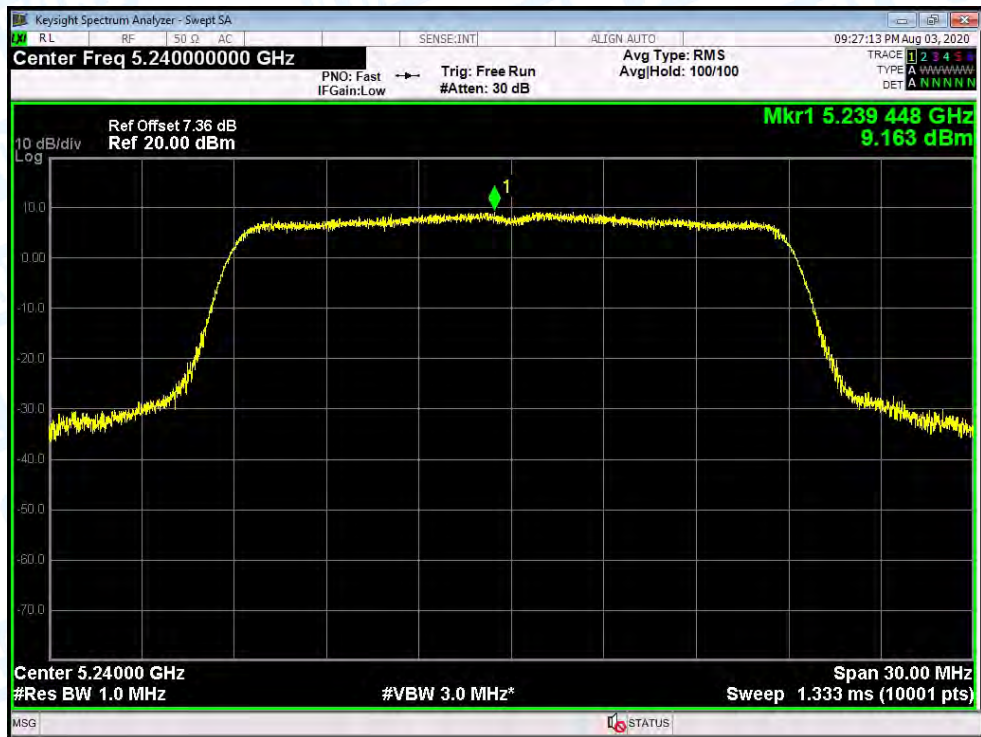

PSD NVNT ac(VHT20) 5240MHz Ant.1

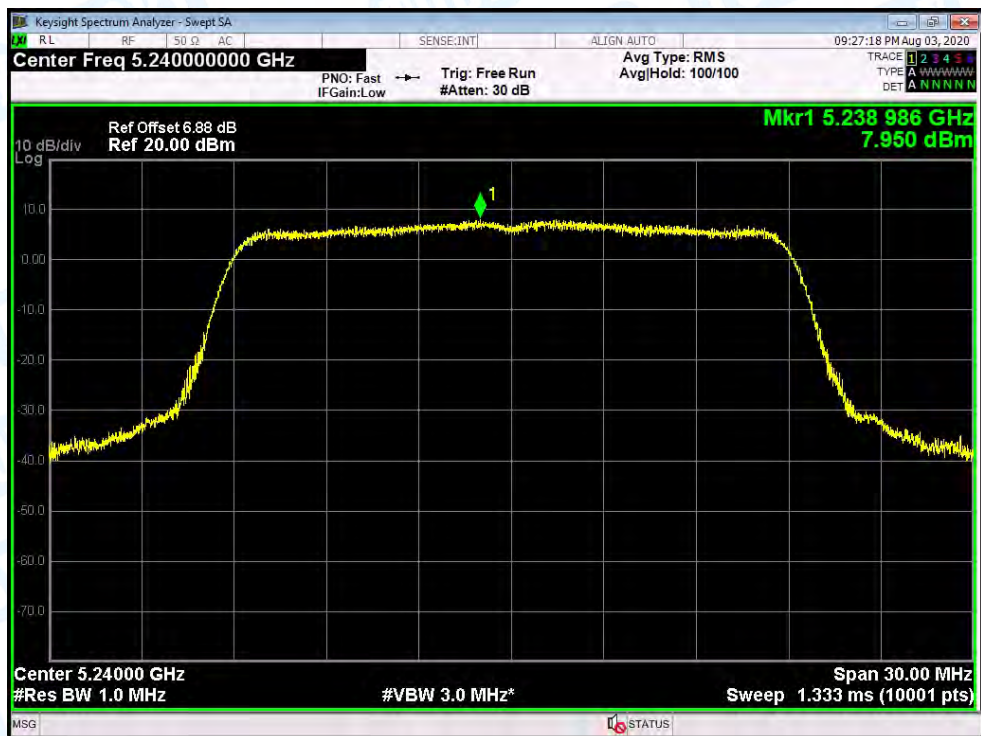


PSD NVNT n(HT40) 5190MHz Ant.0

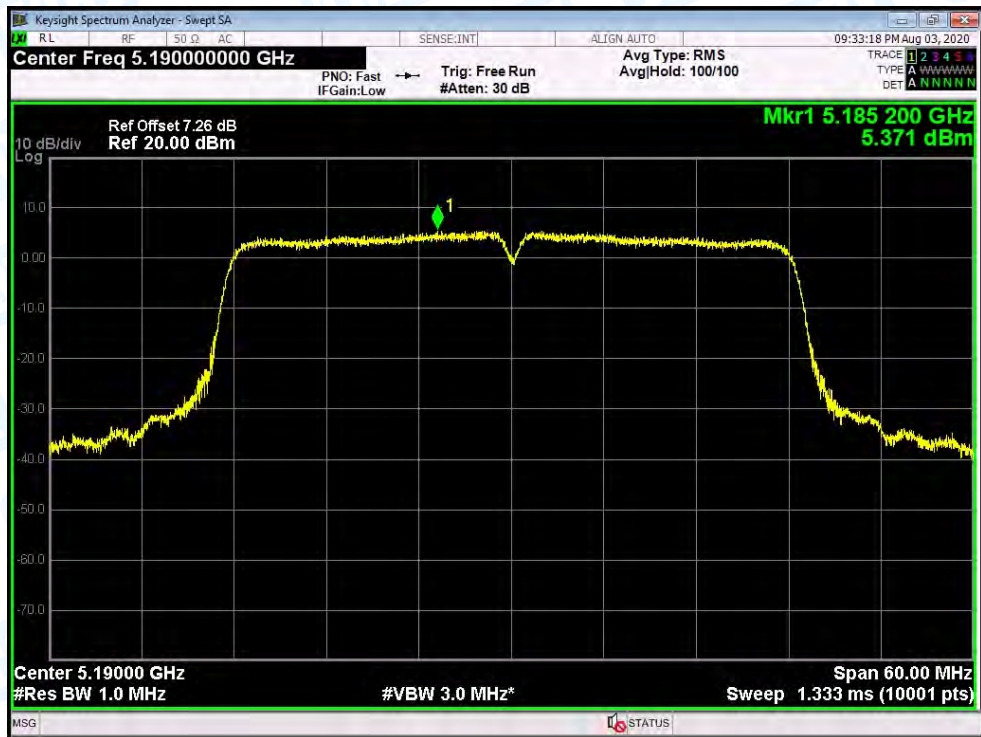


PSD NVNT n(HT40) 5190MHz Ant.1




PSD NVNT n(HT40) 5230MHz Ant.0

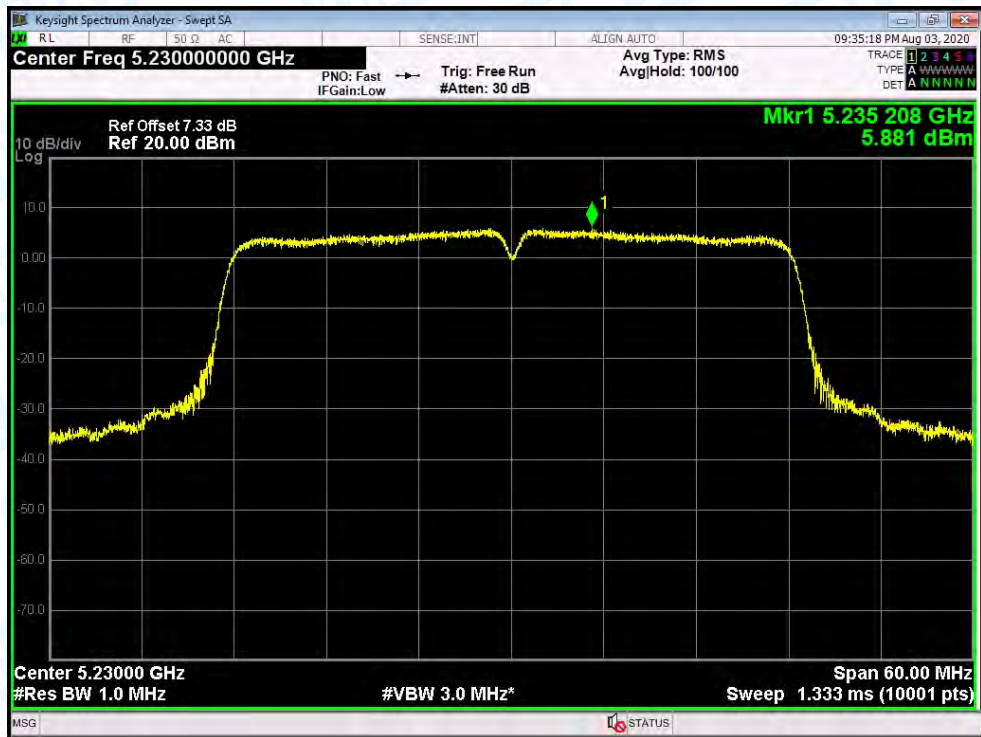


PSD NVNT n(HT40) 5230MHz Ant.1

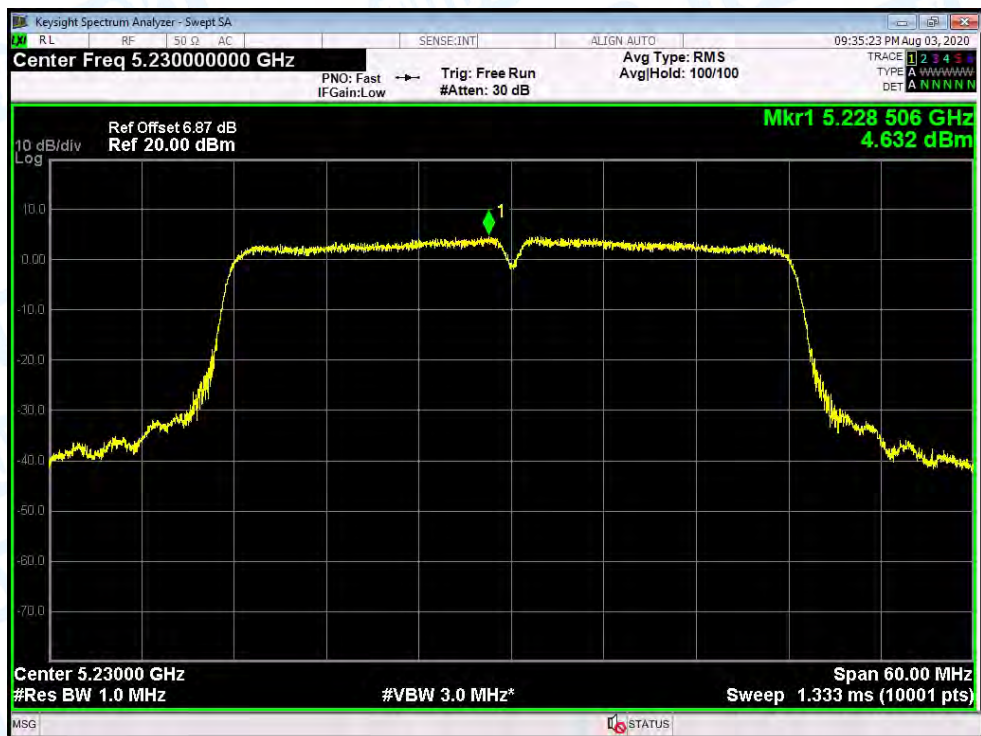


PSD NVNT ac(VHT40) 5190MHz Ant.0

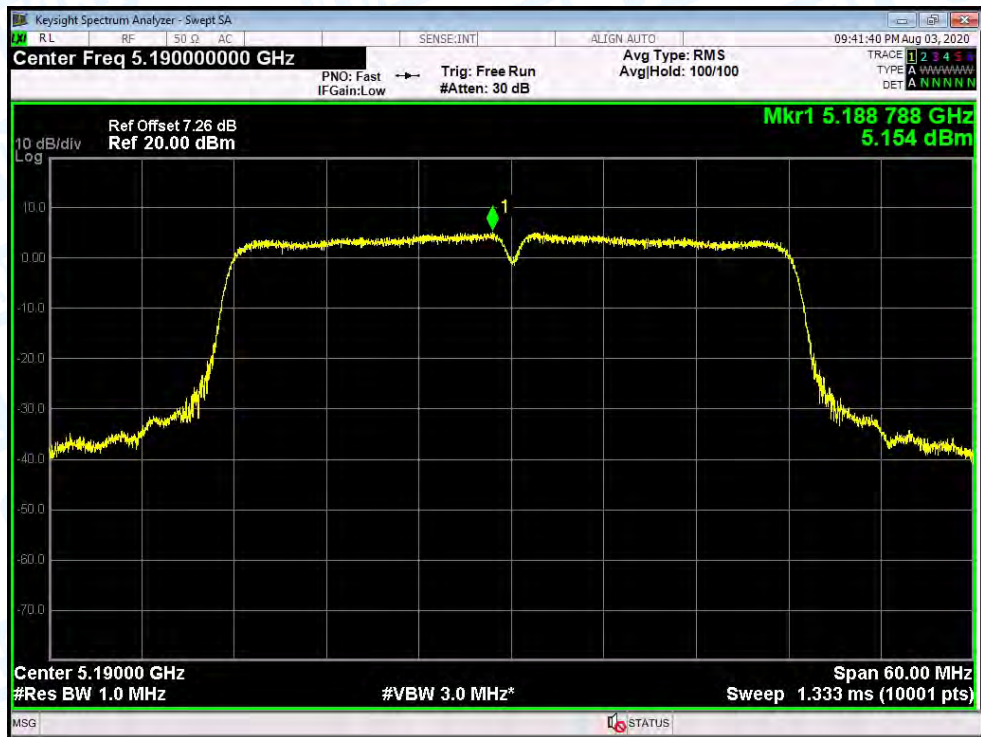


PSD NVNT ac(VHT40) 5190MHz Ant.1

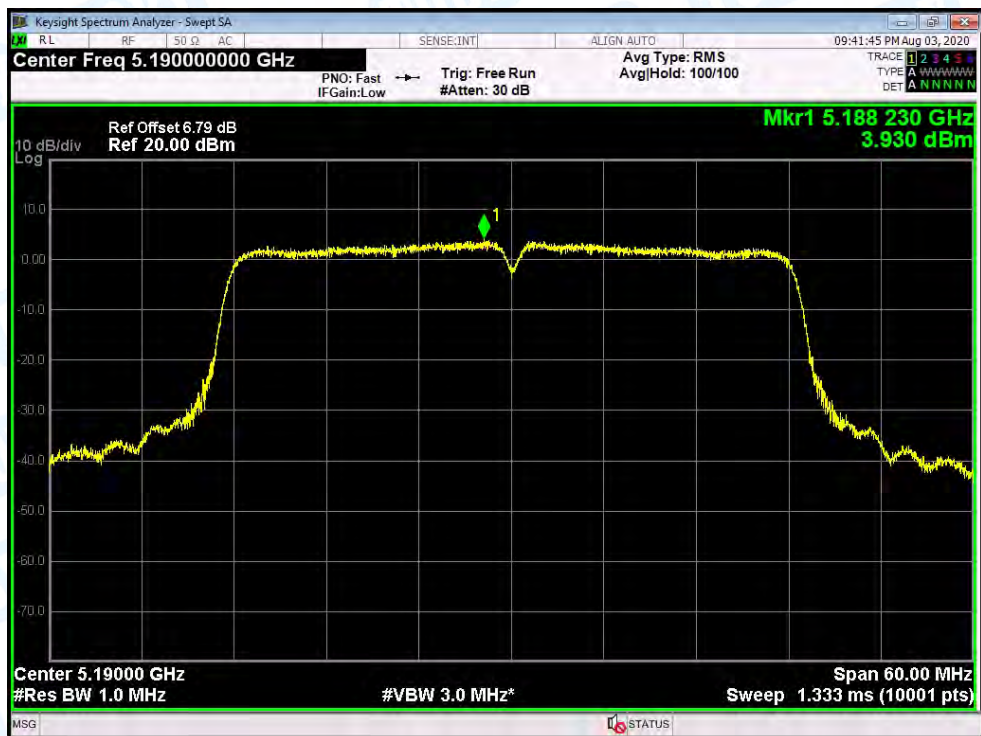


PSD NVNT ac(VHT40) 5230MHz Ant.0

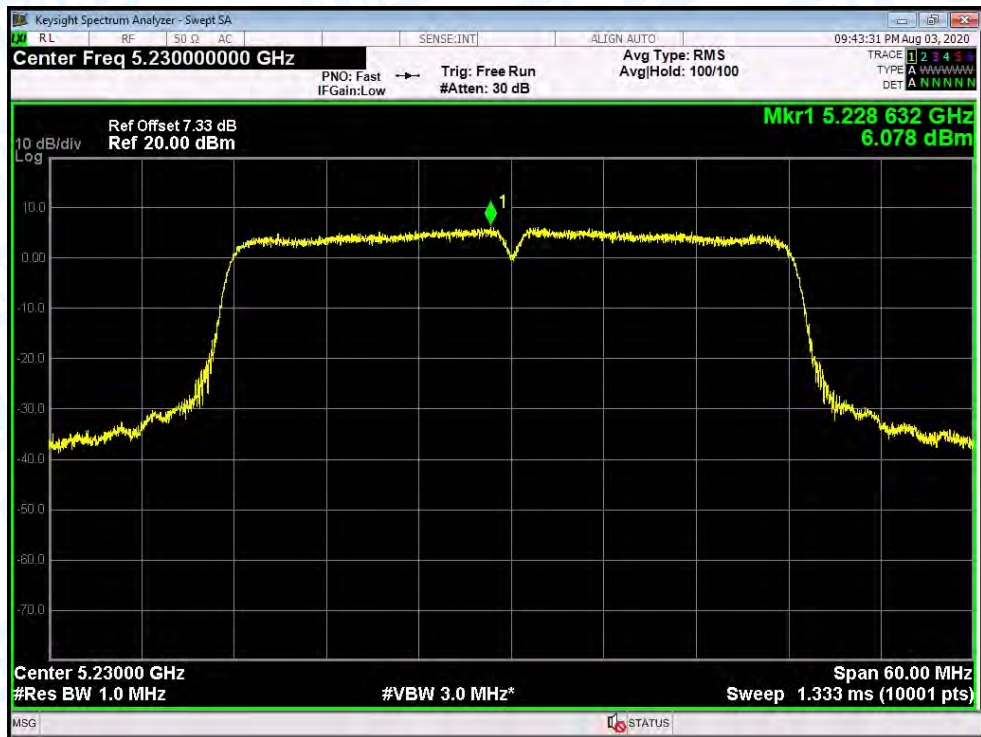


PSD NVNT ac(VHT40) 5230MHz Ant.1

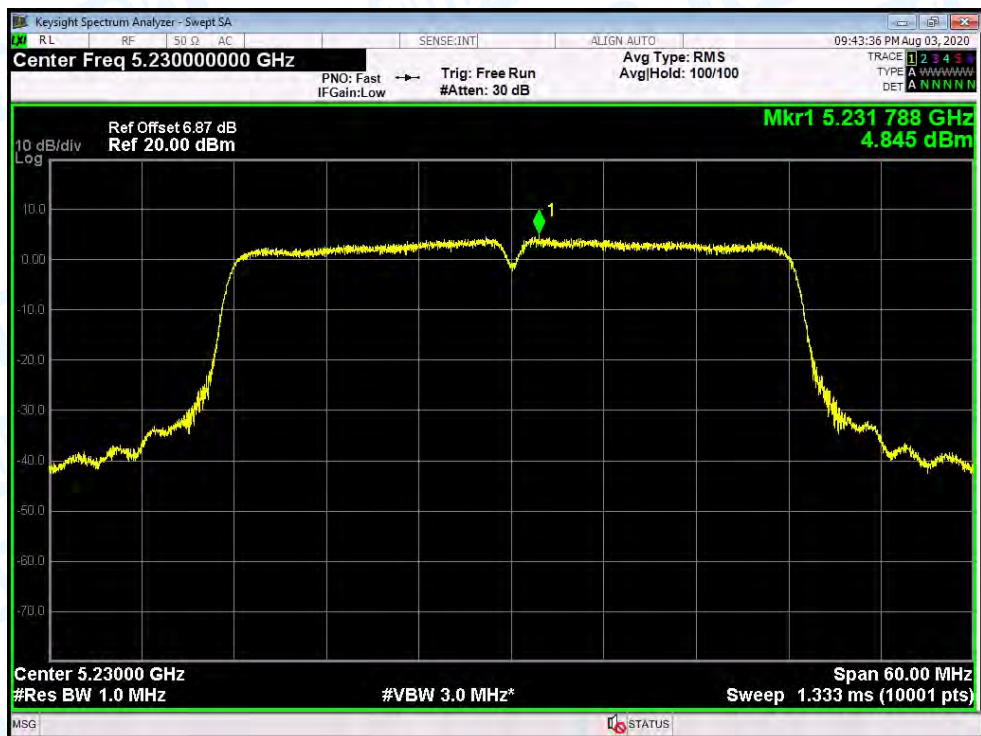

PSD NVNT ac(VHT80) 5210MHz Ant.0

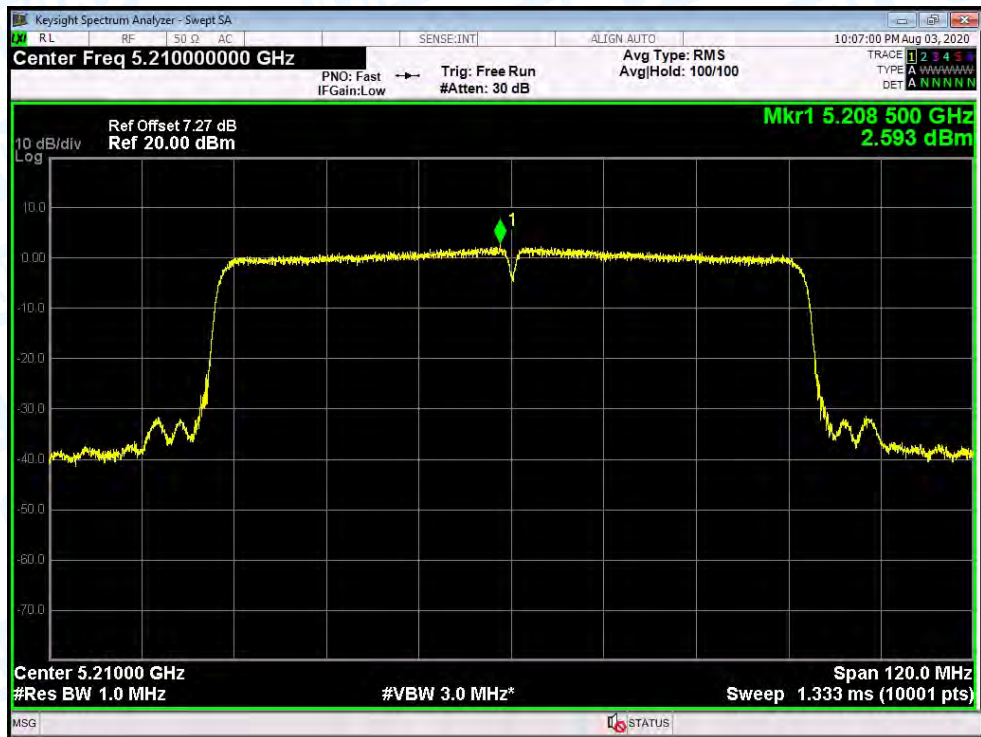


PSD NVNT ac(VHT80) 5210MHz Ant. 1

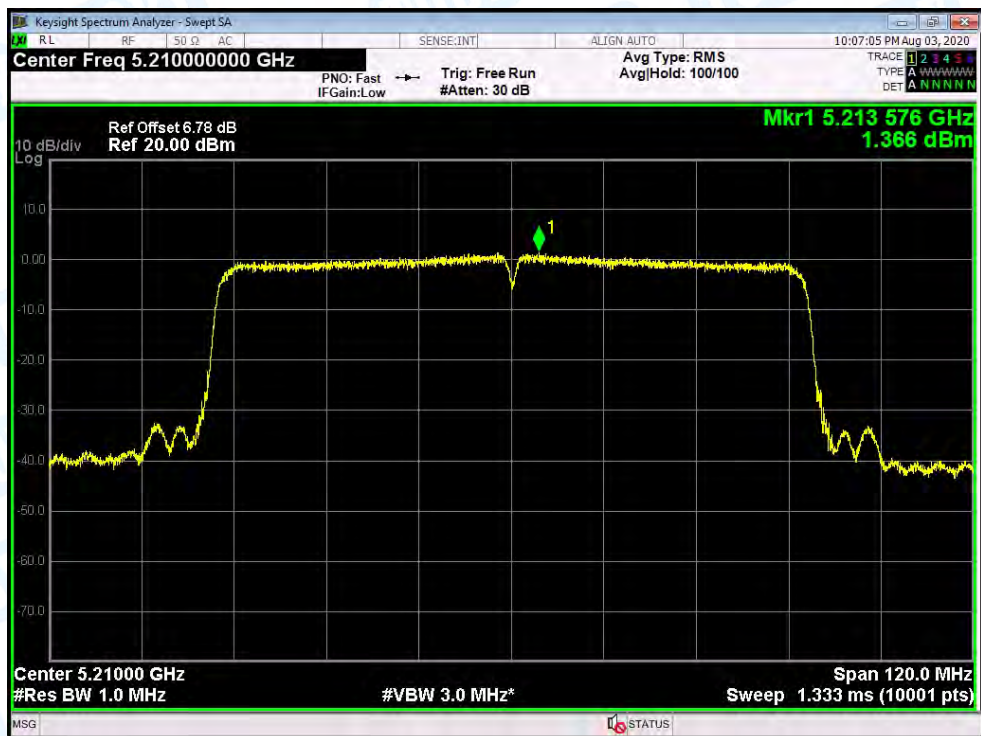

Temperature:	25 °C	Relative Humidity:		55%			
Test Voltage:	AC 120V/60Hz						
U-NII-3							
Test Mode	Frequency (MHz)	Power Density				Limit (dBm/500KHz)	
		ANT. 0 (dBm/500KHz)	ANT. 1 (dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)		
802.11a	5745	6.002	6.125	0	9.074	29.99	
	5785	5.325	6.327	0	8.865		
	5825	5.341	5.060	0	8.213		
802.11n (HT20)	5745	5.959	6.624	0	9.315		
	5785	5.247	6.170	0	8.743		
	5825	5.387	4.757	0	8.094		
802.11ac (VHT20)	5745	5.630	6.619	0	9.163		
	5785	4.863	5.146	0	8.017		
	5825	4.415	4.662	0	7.551		
802.11n (HT40)	5755	2.980	2.634	0	5.821		
	5795	2.074	2.357	0	5.228		
802.11ac(VHT40)	5755	2.552	2.614	0	5.593		
	5795	2.327	2.537	0	5.444		
802.11ac(VHT80)	5775	-0.284	0.034	0	2.888		
Result: PASS							
Remark: The EUT incorporates a MIMO function. Physically, the EUT provides two antennas for transmitting and receiving. When ANT. 0 and ANT. 1 transmitting simultaneously, so the Directional Gain= Gain _{ANT} +10log(N)dBi =6.01dBi>6dBi. So PSD _{out} = PSD _{limit} -(G _{TX} -6)]=(30-0.01)dBm/500KHz=29.99dBm/500KHz							


PSD NVNT a 5745MHz Ant.0

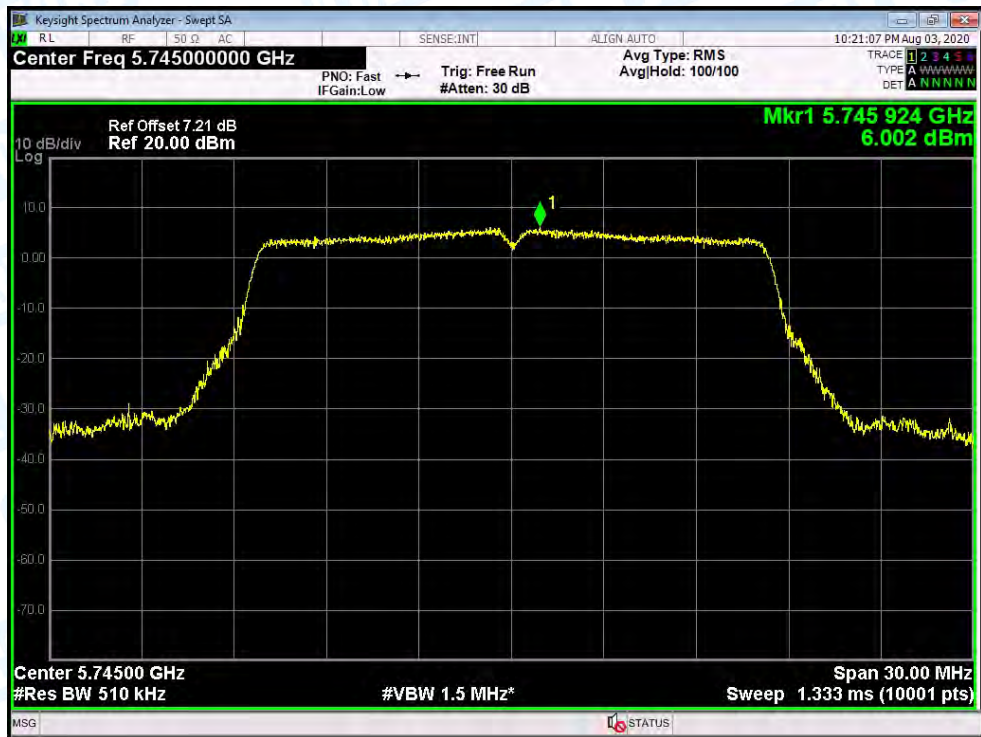

PSD NVNT a 5745MHz Ant.1



PSD NVNT a 5785MHz Ant.0

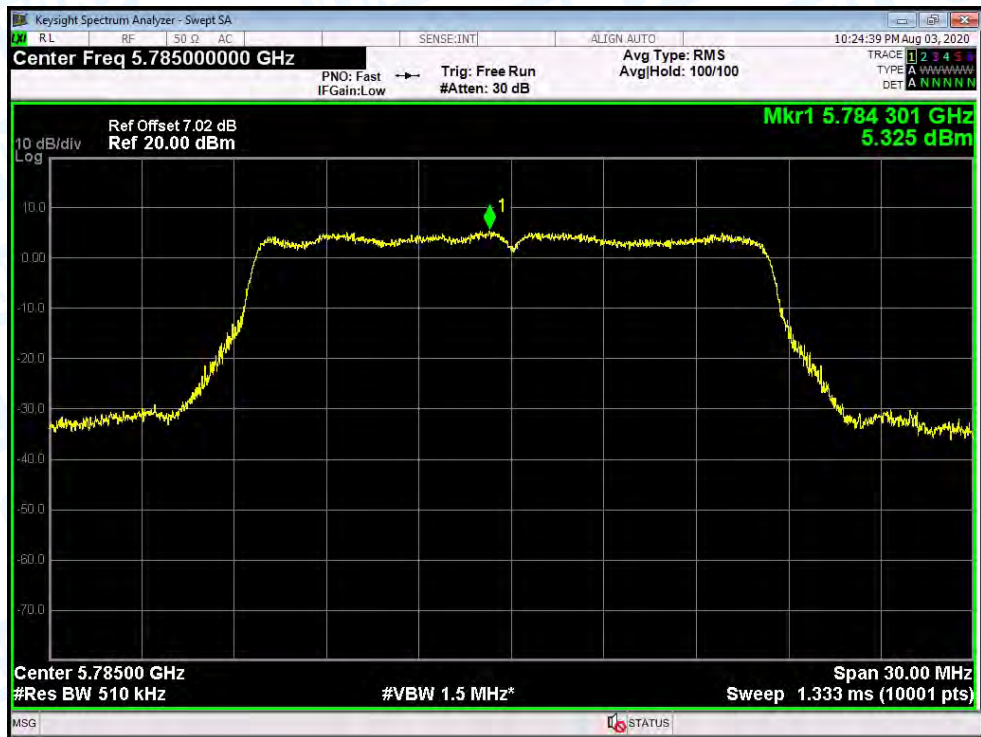

PSD NVNT a 5785MHz Ant.1



PSD NVNT a 5825MHz Ant.0



PSD NVNT a 5825MHz Ant.1




PSD NVNT n(HT20) 5745MHz Ant.0



PSD NVNT n(HT20) 5745MHz Ant.1



PSD NVNT n(HT20) 5785MHz Ant.0

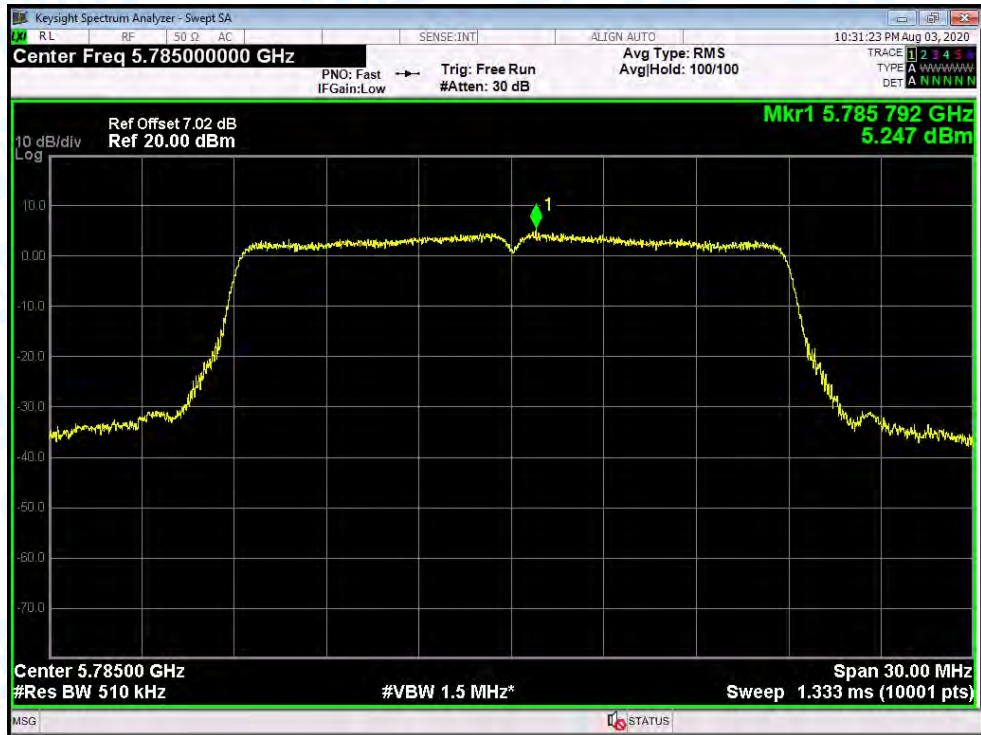


PSD NVNT n(HT20) 5785MHz Ant.1



PSD NVNT n(HT20) 5825MHz Ant.0




PSD NVNT n(HT20) 5825MHz Ant.1

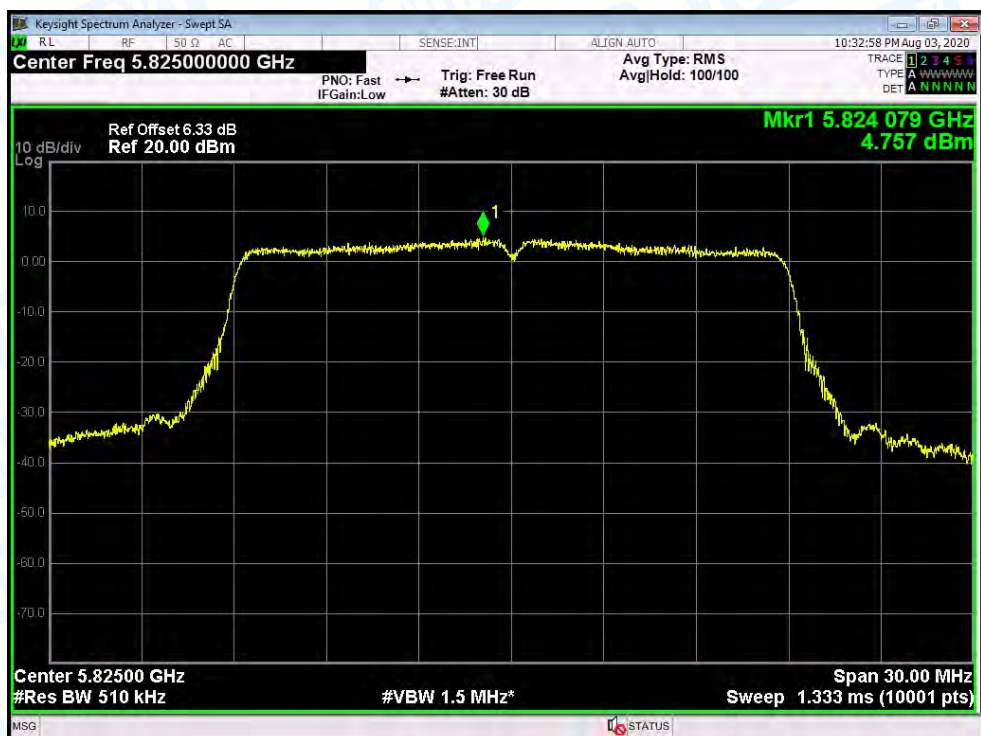


PSD NVNT ac(VHT20) 5745MHz Ant.0



PSD NVNT ac(VHT20) 5745MHz Ant.1

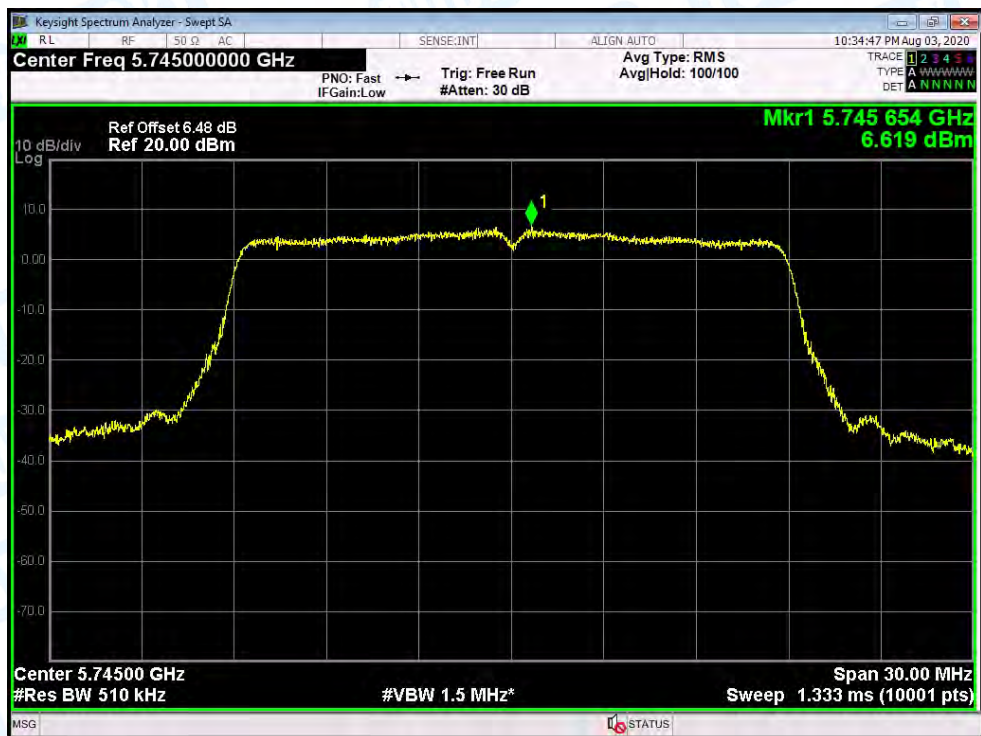

PSD NVNT ac(VHT20) 5785MHz Ant.0

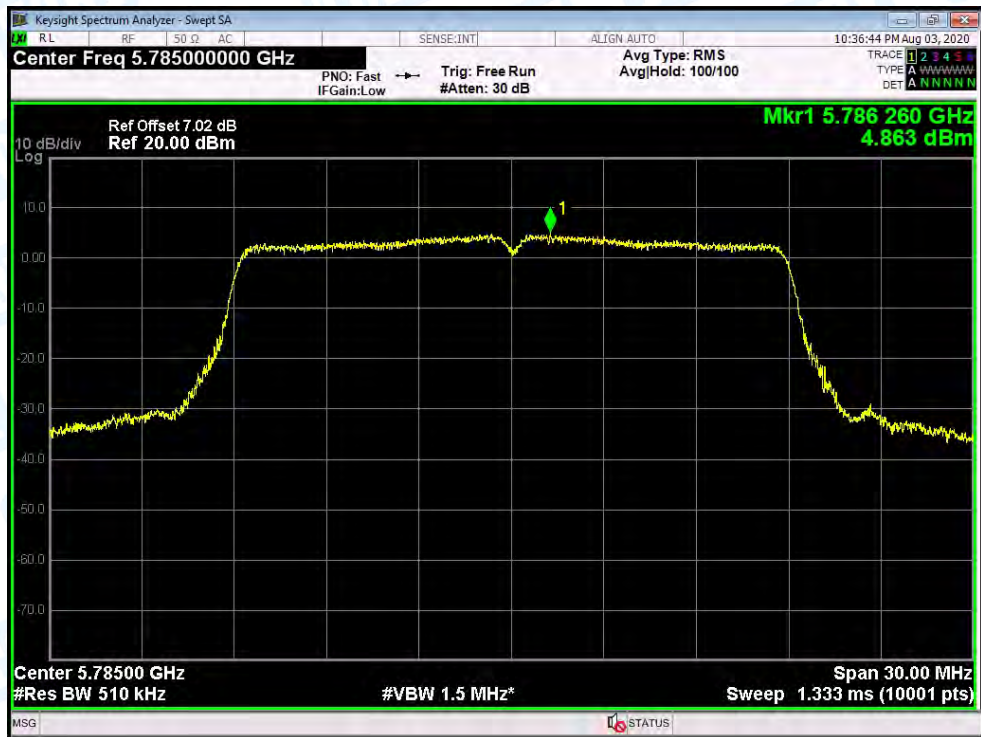


PSD NVNT ac(VHT20) 5785MHz Ant.1




PSD NVNT ac(VHT20) 5825MHz Ant.0



PSD NVNT ac(VHT20) 5825MHz Ant.1

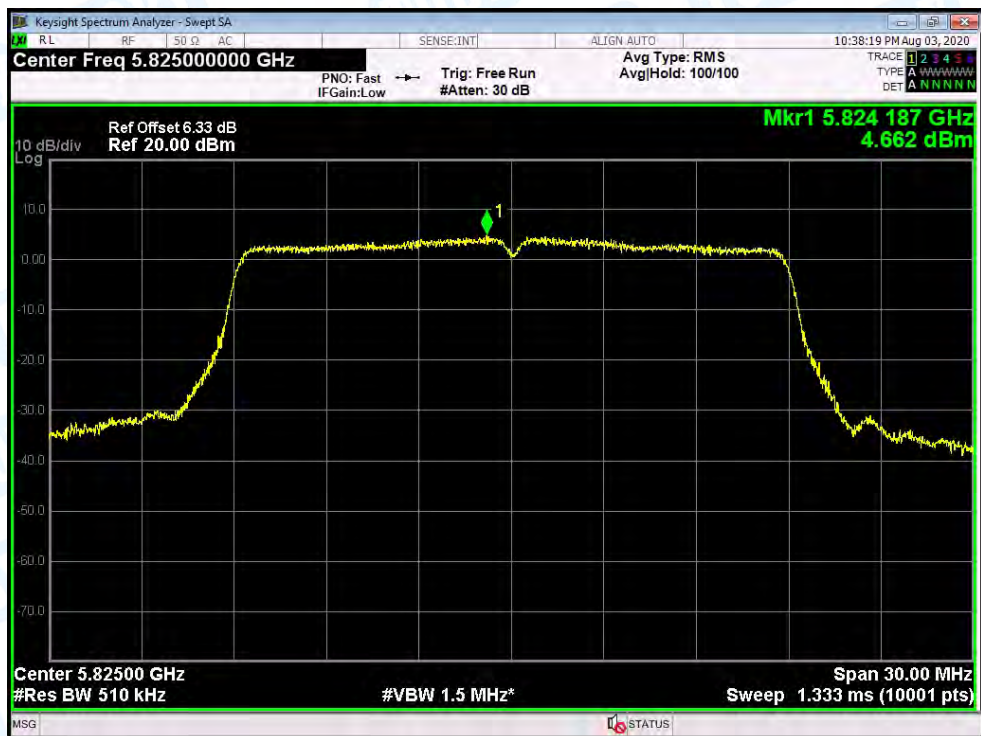


PSD NVNT n(HT40) 5755MHz Ant.0

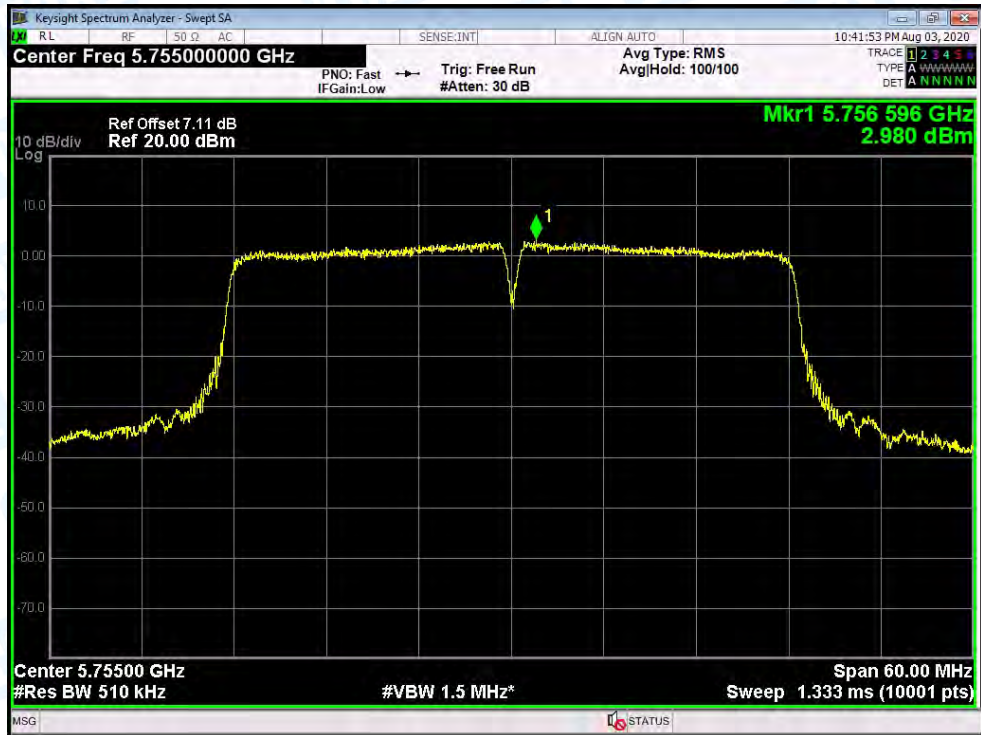


PSD NVNT n(HT40) 5755MHz Ant.1




PSD NVNT n(HT40) 5795MHz Ant.0

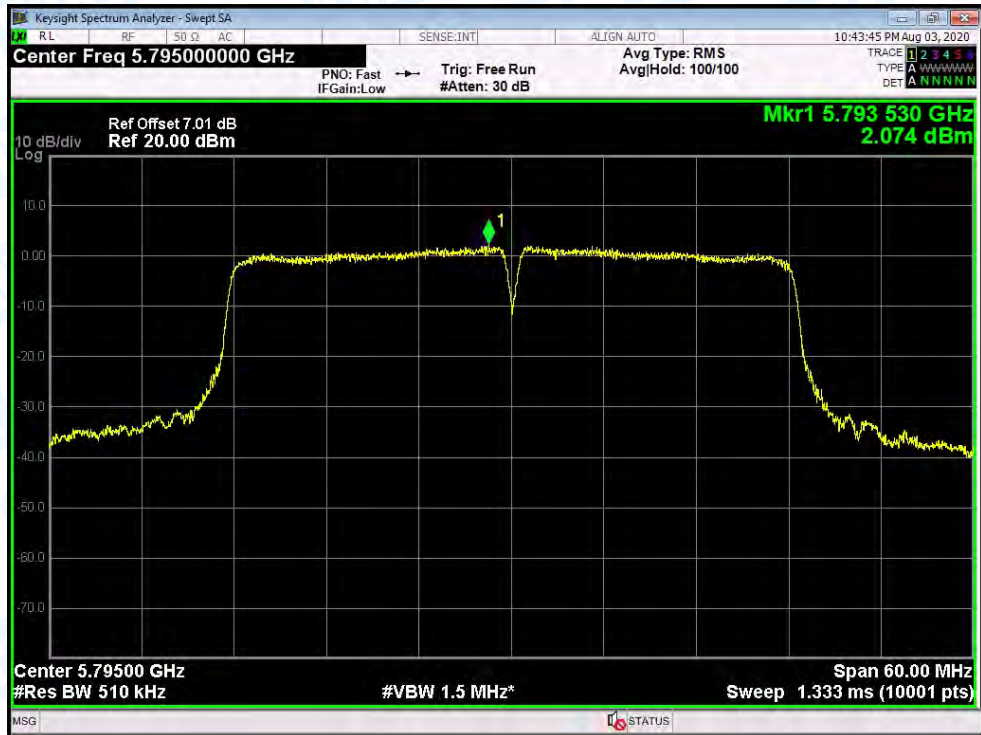


PSD NVNT n(HT40) 5795MHz Ant.1

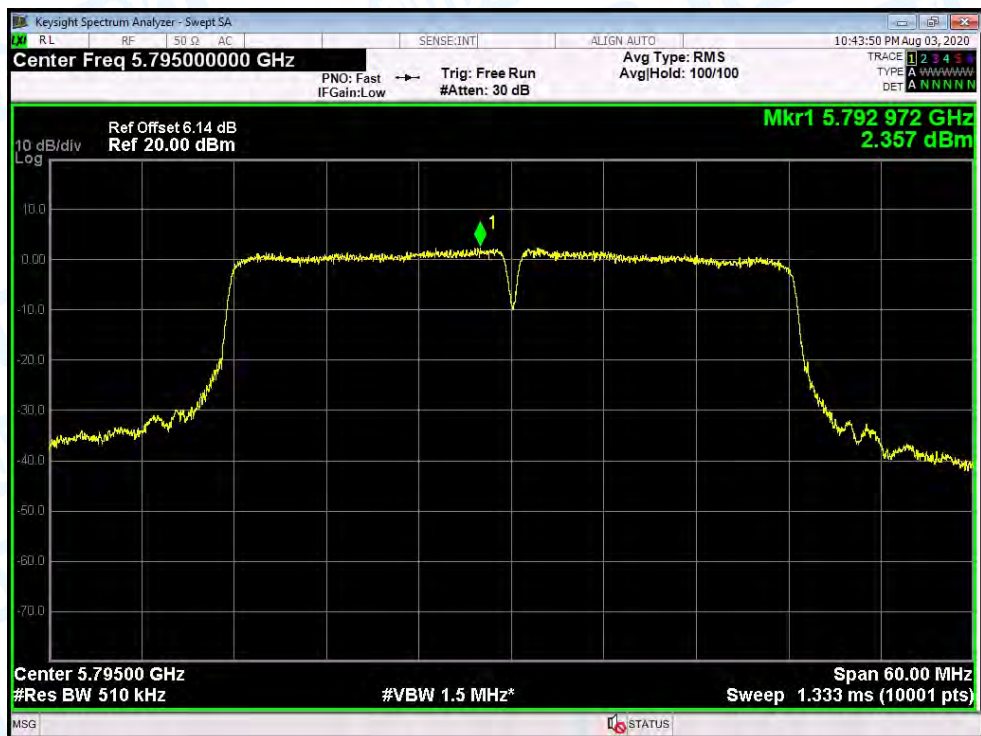


PSD NVNT ac(VHT40) 5755MHz Ant.0

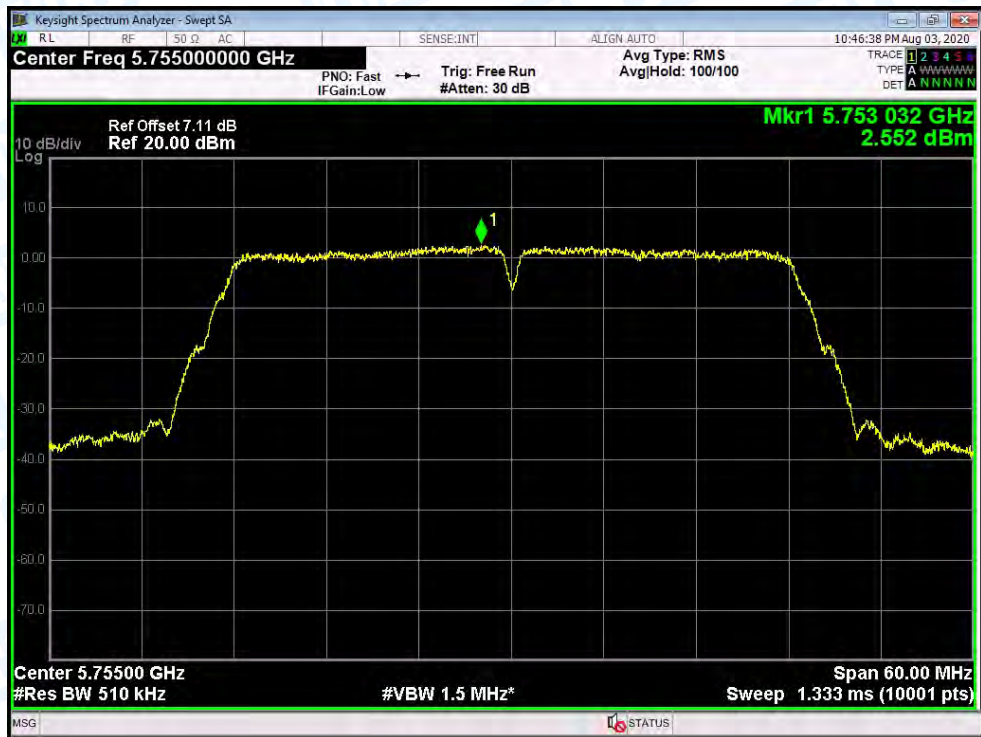

PSD NVNT ac(VHT40) 5755MHz Ant.1

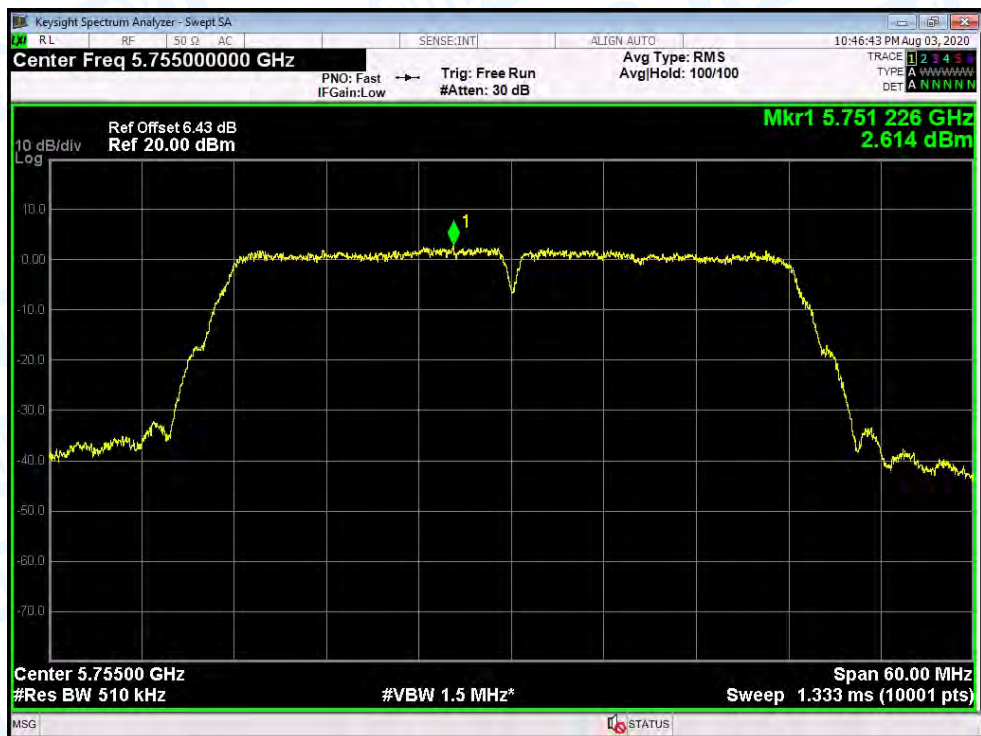


PSD NVNT ac(VHT40) 5795MHz Ant.0

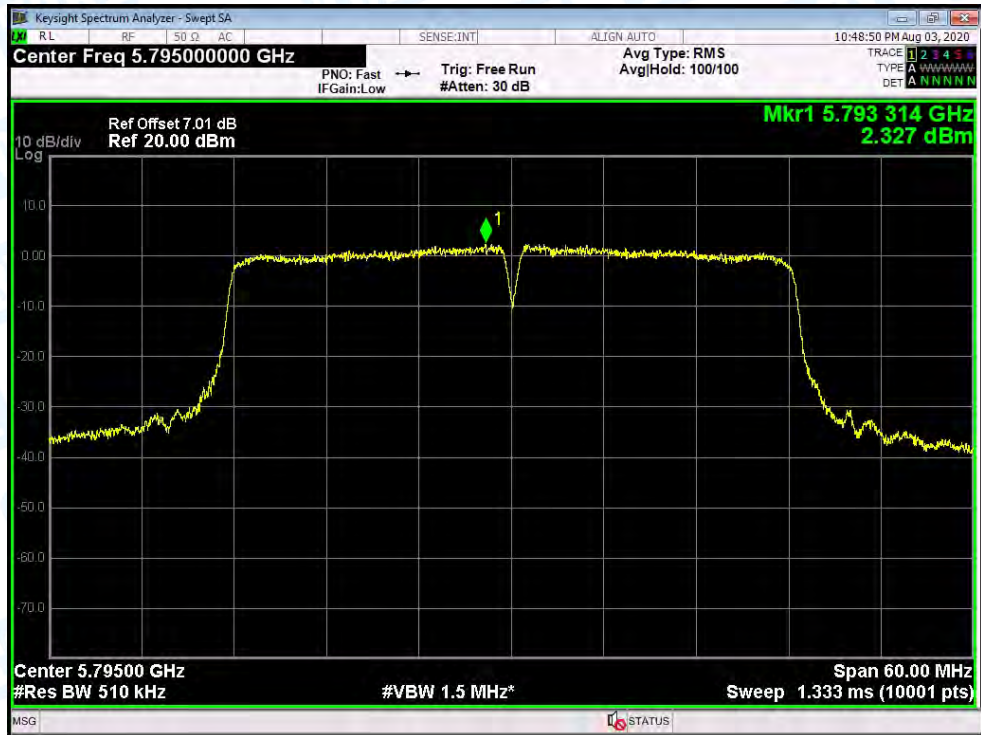

PSD NVNT ac(VHT40) 5795MHz Ant.1



PSD NVNT ac(VHT80) 5775MHz Ant.0

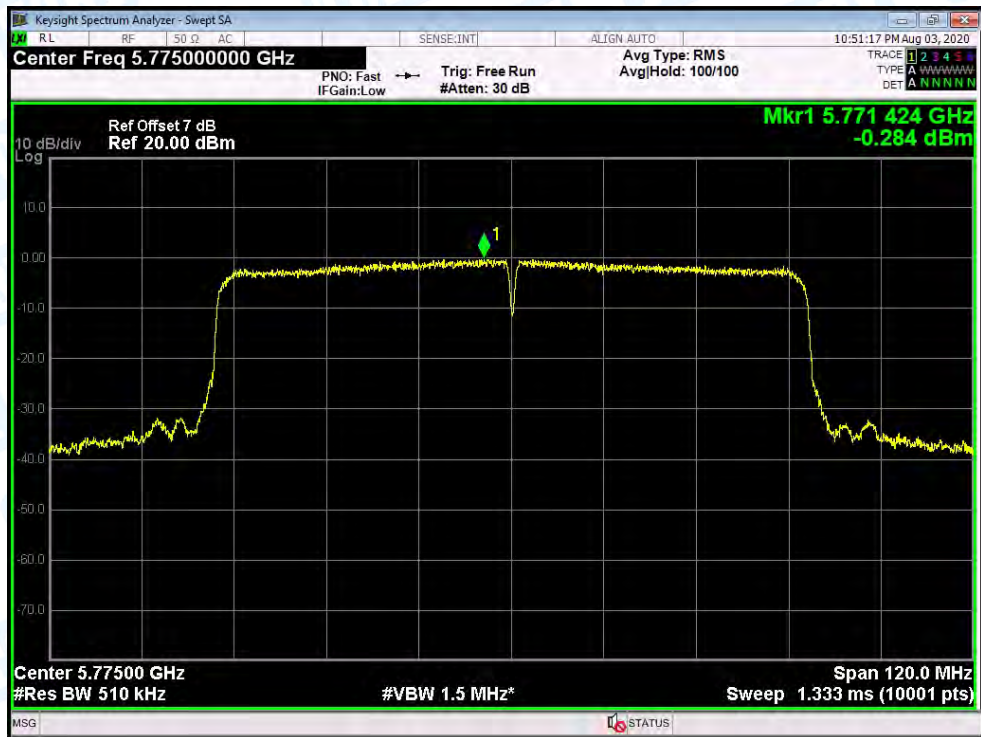

PSD NVNT ac(VHT80) 5775MHz Ant.1



Attachment G----Frequency Stability Measurement Data

Only show the worst case 802.11 a Mode 5180MHz.

801.11a U-NII-1: 5180 MHz	
Voltage vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)
132	5180.0600
120	5180.0800
118	5180.0400
Limit Range (MHz)	5150-5250
Result	PASS
Temperature vs. Frequency Stability	
Temperature (°C)	Measurement Frequency (MHz)
0	5180.0052
10	5180.2000
20	5180.0500
30	5180.0400
40	5180.0500
50	5180.0700
Limit Range (MHz)	5150-5250
Result	PASS

Only show the worst case 802.11 a Mode 5745MHz.

801.11a U-NII-3: 5745 MHz	
Voltage vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)
132	5745.0200
120	5745.0500
118	5744.0400
Limit Range (MHz)	5725-5850
Result	PASS
Temperature vs. Frequency Stability	
Temperature (°C)	Measurement Frequency (MHz)
0	5745.0200
10	5745.0300
20	5745.0400
30	5745.0800
40	5745.0700
50	5745.0600
Limit Range (MHz)	5725-5850
Result	PASS

-----END OF REPORT-----