

FCC Part 15C

Measurement and Test Report

For

LOWEX, LLC

FCC ID: 2AREV-F1818M24

FCC Rule(s):	<u>FCC Part 15.247</u>
Product Description:	<u>feature phone</u>
Tested Model:	<u>F18m</u>
Report No.:	<u>BSL008390302RF</u>
Tested Date:	<u>September 30-October 15, 2018</u>
Issued Date:	<u>October 15, 2018</u>
Tested By:	<u>Messi Wang / Engineer</u>
Reviewed By:	<u>Lisa. Li / EMC Manager</u>
Approved & Authorized By:	<u>Mike mo / PSQ Manager</u>
Prepared By:	
BSL Testing Co.,LTD.	
NO. 24, ZH Park, Nantou, Shenzhen, 518000 China	
Tel: 400-882-9628	Fax: 86- 755-26508703

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 EUT SETUP AND TEST MODE	5
1.3 TEST STANDARDS.....	5
1.4 TEST METHODOLOGY.....	5
1.5 TEST FACILITY	5
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. RF EXPOSURE	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION.....	9
5. CONDUCTED EMISSIONS	10
6. CONDUCTED PEAK OUTPUT POWER	13
7. 20DB EMISSION BANDWIDTH	14
8. CARRIER FREQUENCIES SEPARATION	18
9. HOPPING CHANNEL NUMBER	22
10. DWELL TIME	23
11. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	26
12. BAND EDGE	27
14. SPURIOUS EMISSION	33
15. TEST SETUP PHOTO	42
16. EUT CONSTRUCTIONAL DETAILS	43

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant:	LOWEX, LLC
Address of applicant:	739 NW 105th Pl, Miami, Florida 33172, USA
Manufacturer:	LuZhou XinYu Communication Technology Co., LTD
Address of manufacturer:	NO.19, Section 5, JiuGu Avenue, High Tech District, LuZhou City, SiChuan Provice, China
Product Name:	feature phone
Model No.:	F18m, F18, F24
Test Model No:	F18m

Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are color and model name for commercial purpose.

Quantity of tested samples	1
Serial No.:	N/A
Description test modes:	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM1 was worse case by pre-test, So SIM 1 is used to test.
Hardware Version:	DF600_PCB
Software Version:	DF600_DF600E_HC
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4 QPSK, 8DPSK
Antenna Type:	Internal antenna
Antenna gain:	1.2dBi
Power supply:	DC 3.7V by battery or DC 5V from adapter input AC 120V, 60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test.

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Earphone	1.0	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	JINFULIN	A01	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.2 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows: During the test, pre-scan F18m, F18, F24, and found the F18m model which it is worse case model.

Test Mode List			
Test Mode	Description	Channel	Frequency (MHz)
1	GFSK,	CH1	2402
		CH40	2441
		CH79	2480
2	Pi/4 QPSK	CH1	2402
		CH40	2441
		CH79	2480
3	8DPSK	CH1	2402
		CH40	2441
		CH79	2480

1.3 Test Standards

The following report accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.5 Test Facility

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Test Firm Registration Number: 866035

Designation Number: CN1217

Tel: 400-882-9628

Fax: 86-755-26508703

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	±2.88dB
Transmitter Spurious Emissions	Radiated	±5.1dB

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
Communication Tester	Rohde & Schwarz	CMW500	100358	2017-10-21	2018-10-20
Spectrum Analyzer	R&S	FSP40	100550	2017-10-21	2018-10-20
Test Receiver	R&S	ESCI7	US47140102	2017-10-21	2018-10-20
Signal Generator	HP	83630B	3844A01028	2017-10-22	2018-10-21
Test Receiver	R&S	ESPI-3	100180	2017-10-21	2018-10-20
Amplifier	Agilent	8449B	4035A00116	2017-10-22	2018-10-21
Amplifier	HP	8447E	2945A02770	2017-10-22	2018-10-21
Signal Generator	IFR	2023A	202307/242	2017-10-22	2018-10-21
Broadband Antenna	SCHAFFNER	2774	2774	2017-10-17	2018-10-16
Biconical and log periodic antennas	ELECTRO-METRIC	EM-6917B-1	171	2017-10-17	2018-10-16
Horn Antenna	R&S	HF906	100253	2017-10-17	2018-10-16
Horn Antenna	EM	EM-6961	6462	2017-10-17	2018-10-16
LISN	R&S	ESH3-Z5	100196	2017-10-17	2018-10-16
LISN	COM-POWER	LI-115	02027	2017-10-17	2018-10-16
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)*6 (H)	BSL086	2017-10-21	2018-10-20
Horn Antenna	A-INFOMW	LB-180400KF	BSL088	2017-10-21	2018-10-20
20dB Attenuator	ICPROBING	IATS1	BSL1003	2017-10-21	2018-10-20
POWER DIVIDER	Mini-circuits	PD-2SF-0010	N/A	2017-10-21	2018-10-20
POWER DIVIDER	Mini-circuits	PD-2SF-0010	N/A	2017-10-21	2018-10-20

2. SUMMARY OF TEST RESULTS

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Pass* (Please refer to SAR Report)
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10:2013

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information


This product has a internal permanent antenna(1.2dBi), fulfill the requirement of this section.

5. Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	<p>* Decreases with the logarithm of the frequency.</p>																
Test setup:	<p>Remark <i>E.U.T. Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i></p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 																
Test Instruments:	Refer to section 1.7 for details																
Test mode:	Refer to section 1.2 for details																
Test results:	Pass																

Measurement data:

Line:

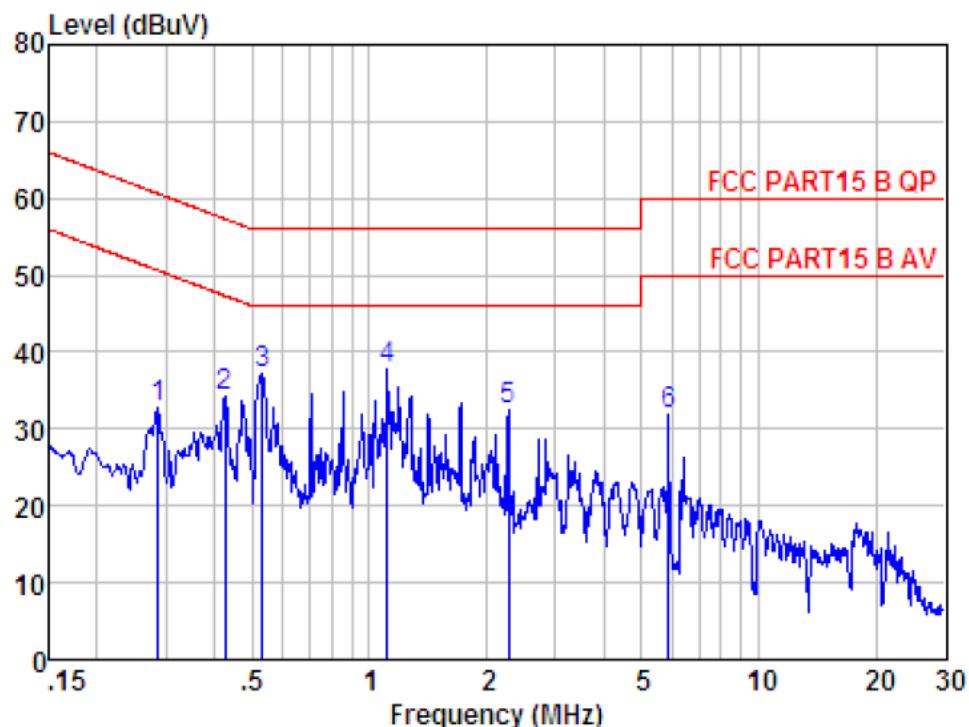

Freq	Pol/Phase	Read	LISN	Cable	Limit	Over	Remark
		Level	Factor	Loss			
MHz		dBuV	dB	dB	dBuV	dB	
1	0.29 LINE	32.40	0.40	0.10	32.90	60.63	-27.73 Peak
2	0.43 LINE	33.79	0.37	0.11	34.27	57.33	-23.06 Peak
3	0.53 LINE	36.76	0.36	0.13	37.25	56.00	-18.75 Peak
4 max	1.11 LINE	37.27	0.47	0.17	37.91	56.00	-18.09 Peak
5	2.27 LINE	31.78	0.47	0.26	32.51	56.00	-23.49 Peak
6	5.87 LINE	31.08	0.49	0.41	31.98	60.00	-28.02 Peak

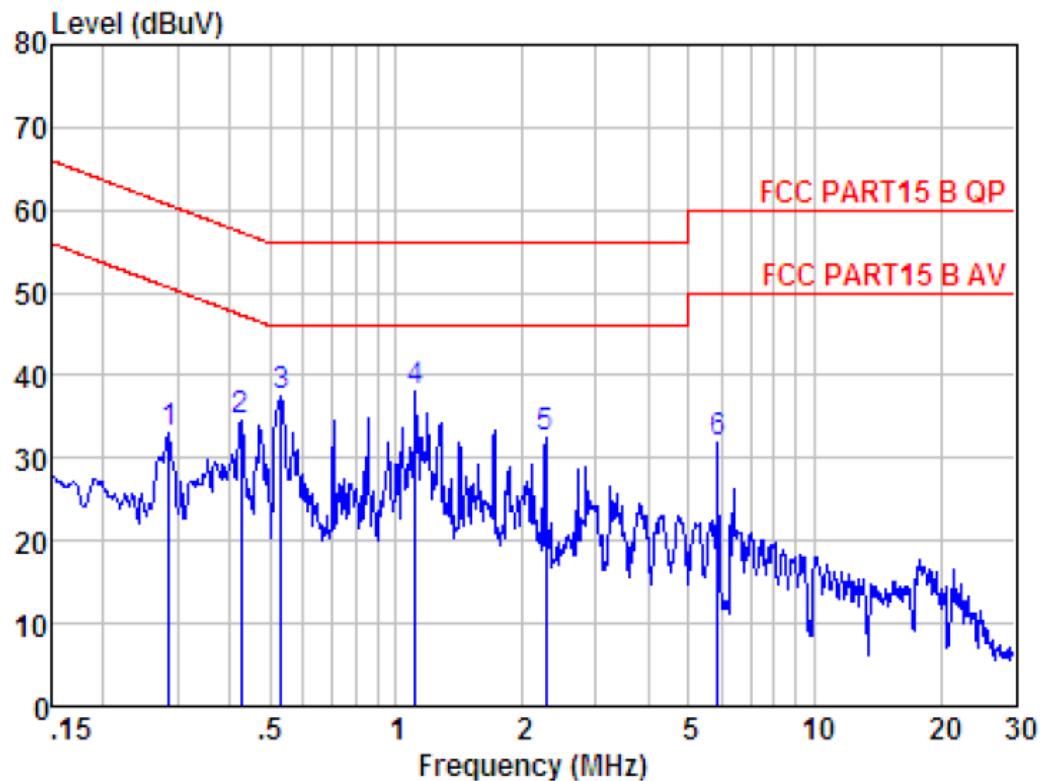
Neutral:

Freq	Pol/Phase	Read	LISN	Cable	Limit	Over	Remark
		Level	Factor	Loss	Level	Line	
MHz		dBuV	dB	dB	dBuV	dB	
1	0.29 NEUTRAL	32.41	0.52	0.10	33.03	60.63	-27.60 Peak
2	0.43 NEUTRAL	33.79	0.53	0.11	34.43	57.33	-22.90 Peak
3	0.53 NEUTRAL	36.76	0.52	0.13	37.41	56.00	-18.59 Peak
4 max	1.11 NEUTRAL	37.27	0.51	0.17	37.95	56.00	-18.05 Peak
5	2.27 NEUTRAL	31.77	0.52	0.26	32.55	56.00	-23.45 Peak
6	5.87 NEUTRAL	31.08	0.53	0.41	32.02	60.00	-27.98 Peak

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss


6. Conducted Peak Output Power

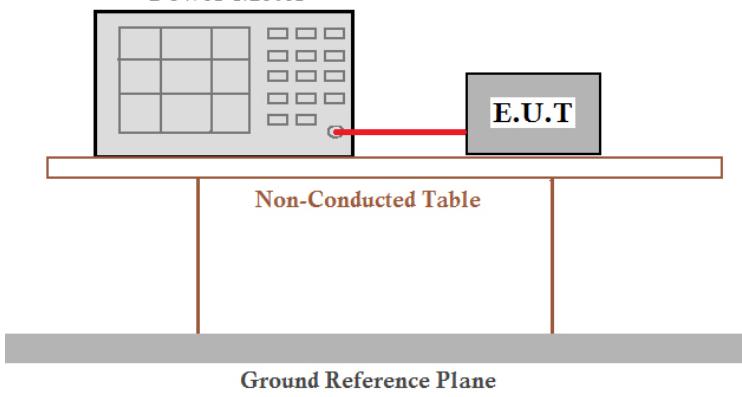Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	30dBm(for GFSK),20.97dBm(for EDR)
Test setup:	<p style="text-align: center;">Power Meter</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	0.025	30.00	Pass
	Middle	0.671		
	Highest	0.922		
Pi/4QPSK	Lowest	-0.102	20.97	Pass
	Middle	0.053		
	Highest	0.017		
8DPSK	Lowest	-0.314	20.97	Pass
	Middle	0.216		
	Highest	0.192		

7. 20dB Emission Bandwidth

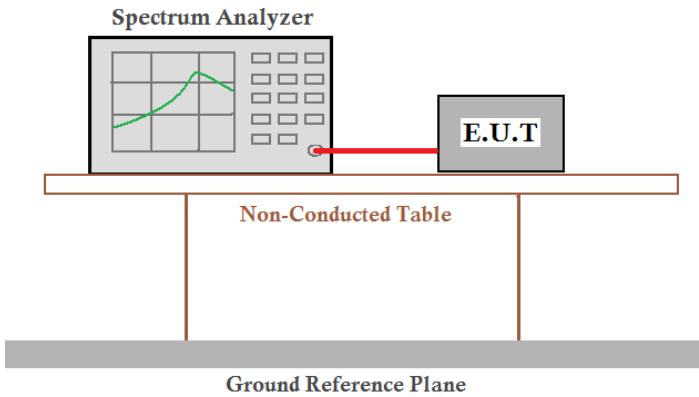Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.9319	Pass
	Middle	0.9337	
	Highest	0.9352	
Pi/4QPSK	Lowest	1.260	Pass
	Middle	1.259	
	Highest	1.262	
8DPSK	Lowest	1.225	Pass
	Middle	1.223	
	Highest	1.223	

Test plot as follows:

Test mode:	GFSK mode
------------	-----------



Lowest channel



Middle channel



Highest channel

Test mode:

Pi/4QPSK mode



Lowest channel



Middle channel



Highest channel

Test mode:

8DPSK mode



Lowest channel




Middle channel



Highest channel

8. Carrier Frequencies Separation

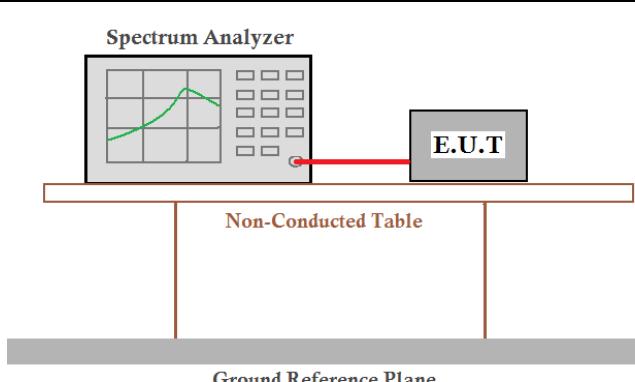Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=20KHz, VBW=62KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Lowest	1008	623	Pass
	Middle	1000	623	Pass
	Highest	1014	623	Pass
Pi/4QPSK	Lowest	1006	841	Pass
	Middle	1000	841	Pass
	Highest	1002	841	Pass
8DSK	Lowest	1000	817	Pass
	Middle	1018	817	Pass
	Highest	1012	817	Pass

Note: According to section 7.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	935.2	623
Pi/4QPSK	1262.00	841
8DSK	1225.00	817

Test plot as follows:

Modulation mode:

GFSK



Lowest channel



Middle channel



Highest channel

Test mode:

Pi/4QPSK mode



Lowest channel



Middle channel




Highest channel

Test mode:

8DPSK mode



Lowest channel

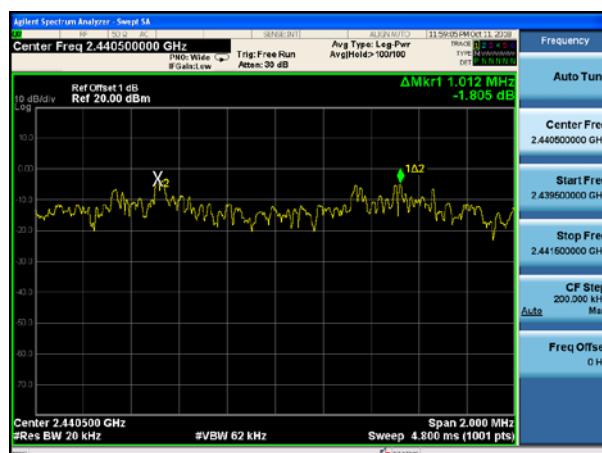


Middle channel




Highest channel

9. Hopping Channel Number

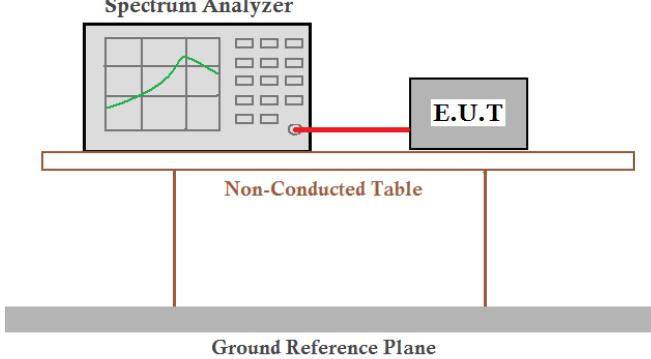
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	<p style="text-align: center;">  </p>
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
Pi/4QPSK	79	15	Pass
8DPSK	79	15	Pass

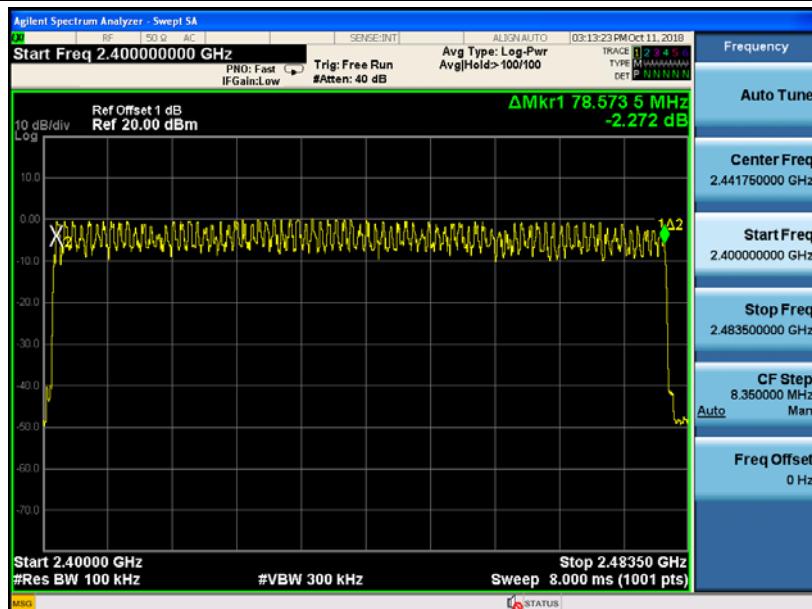

10. Dwell Time

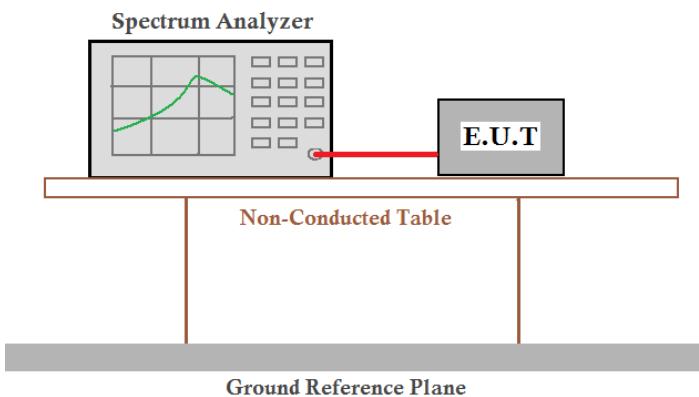Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

Measurement Data

Mode	Frequency (MHz)	Burst Type	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	2441	DH1	0.347	111.04	400	PASS
		DH3	1.617	258.72		
		DH5	2.862	305.28		
$\pi/4$ -DQPSK	2441	DH1	0.373	119.36	400	PASS
		DH3	1.643	262.88		
		DH5	2.879	307.09		
8DPSK	2441	DH1	0.381	121.92	400	PASS
		DH3	1.634	261.44		
		DH5	2.896	308.91		

The test period: $T = 0.4 \text{ Second}/\text{Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$


Test channel: 2402MHz/2441MHz/2480MHz as blow

DH1 time slot= Pulse time (ms)*(1600/ (2*79))*31.6

DH3 time slot= Pulse time (ms)*(1600/ (4*79))*31.6

DH5 time slot= Pulse time (ms)*(1600/ (6*79))*31.6

Test plot as follows:

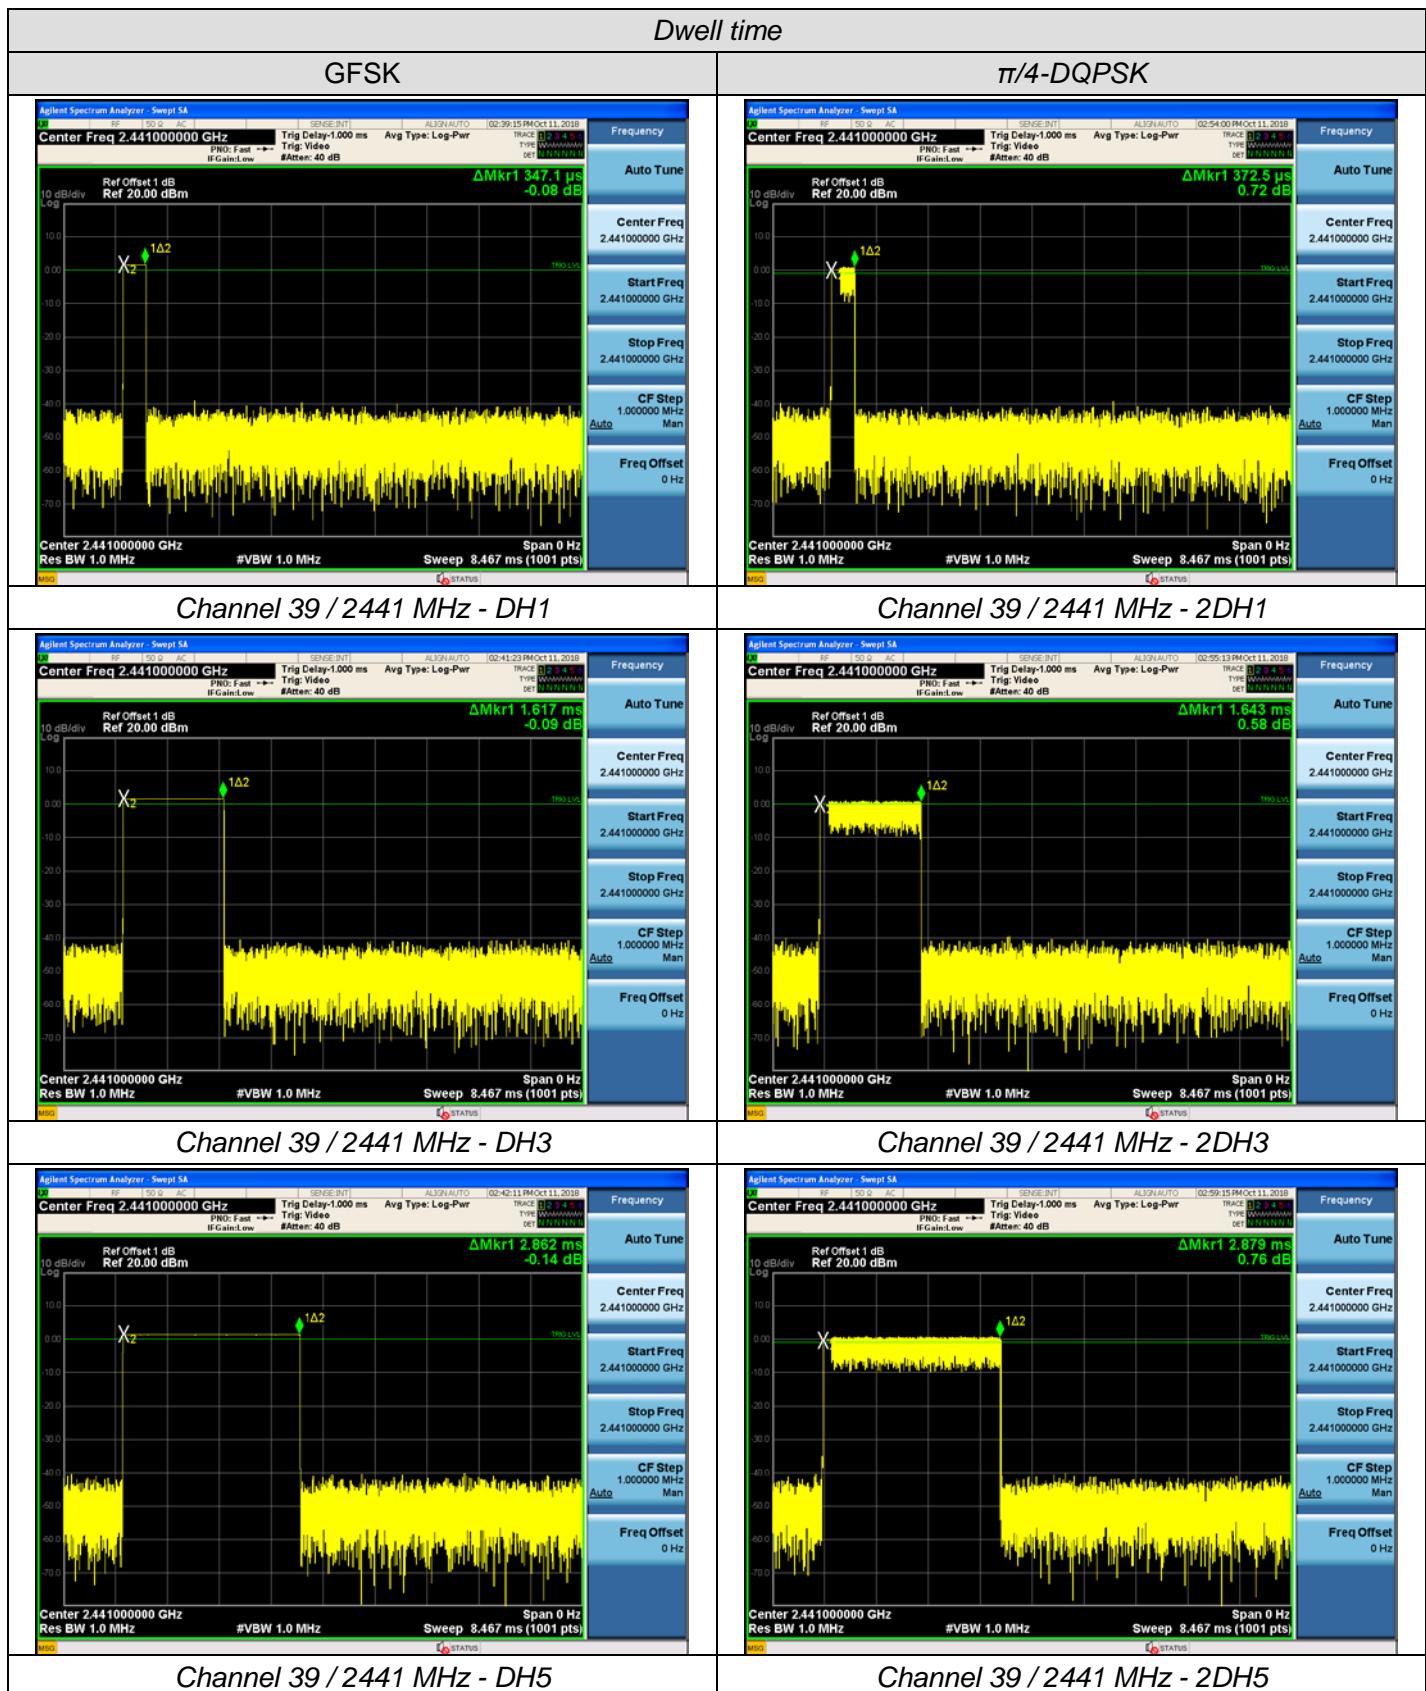

Dwell time

8DPSK

Agilent Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 1 dB

Ref 20.00 dBm

10 dB/div

Log

1Δ2

ΔMkr1 381.0 μs

0.32 dB

Trig Delay-1.000 ms

Avg Type: Log-Pwr

PRO: Fast →

IF Gain:Low

#Aften: 40 dB

SENSE INT

ALIGN AUTO

03:00:07 PM Oct 11, 2018

TRACE 1 2 3 4 5 6 7 8

TYPE L N N N N N N N

DET N N N N N N N N

Frequency

Auto Tune

Center Freq 2.441000000 GHz

Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Auto

Freq Offset 0 Hz

Center 2.441000000 GHz

Res BW 1.0 MHz

#VBW 1.0 MHz

Sweep 8.467 ms (1001 pts)

MSO

STATUS

Channel 39 / 2441 MHz - 3DH1

Agilent Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 1 dB

Ref 20.00 dBm

10 dB/div

Log

1Δ2

ΔMkr1 1.634 ms

0.86 dB

Trig Delay-1.000 ms

Avg Type: Log-Pwr

PRO: Fast →

IF Gain:Low

#Aften: 40 dB

SENSE INT

ALIGN AUTO

03:01:03 PM Oct 11, 2018

TRACE 1 2 3 4 5 6 7 8

TYPE L N N N N N N N

DET N N N N N N N N

Frequency

Auto Tune

Center Freq 2.441000000 GHz

Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Auto

Freq Offset 0 Hz

Center 2.441000000 GHz

Res BW 1.0 MHz

#VBW 1.0 MHz

Sweep 8.467 ms (1001 pts)

MSO

STATUS

2 Channel 39 / 2441 MHz - 3DH3

Agilent Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 1 dB

Ref 20.00 dBm

10 dB/div

Log

1Δ2

ΔMkr1 2.896 ms

-0.21 dB

Trig Delay-1.000 ms

Avg Type: Log-Pwr

PRO: Fast →

IF Gain:Low

#Aften: 40 dB

SENSE INT

ALIGN AUTO

03:01:52 PM Oct 11, 2018

TRACE 1 2 3 4 5 6 7 8

TYPE L N N N N N N N

DET N N N N N N N N

Frequency

Auto Tune

Center Freq 2.441000000 GHz

Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Auto

Freq Offset 0 Hz

Center 2.441000000 GHz

Res BW 1.0 MHz

#VBW 1.0 MHz

Sweep 8.467 ms (1001 pts)

MSO

STATUS


Channel 39 / 2441 MHz - 3DH5

11. Pseudorandom Frequency Hopping Sequence

Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:								
	<p><i>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</i></p> <p><i>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</i></p>								
EUT Pseudorandom Frequency Hopping Sequence									
<p><i>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</i></p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div style="text-align: center; margin-top: 10px;"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p><i>An example of Pseudorandom Frequency Hopping Sequence as follow:</i></p> <table style="width: 100%; text-align: center; margin-top: 10px;"> <tr> <td style="width: 25%;">0 2 4 6</td> <td style="width: 25%;">62 64</td> <td style="width: 25%;">78 1</td> <td style="width: 25%;">73 75 77</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table> <p><i>Each frequency used equally on the average by each transmitter.</i></p> <p><i>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</i></p>		0 2 4 6	62 64	78 1	73 75 77				
0 2 4 6	62 64	78 1	73 75 77						

12. Band Edge


Conducted Emission Method

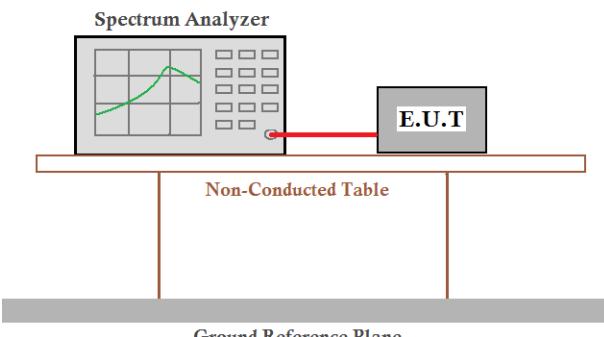Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

Test plot as follows:


GFSK Mode:

Test channel:

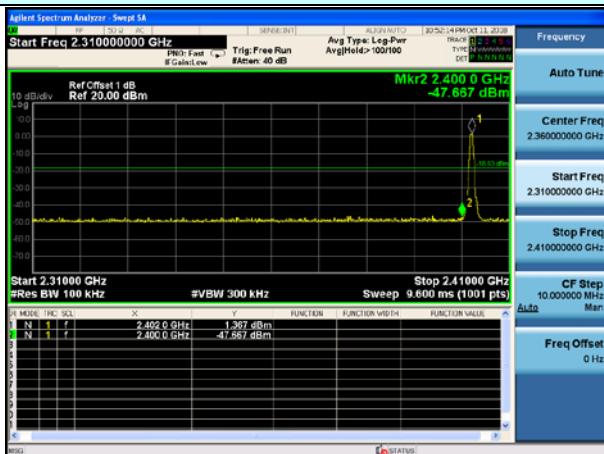


No-hopping mode

Lowest channel

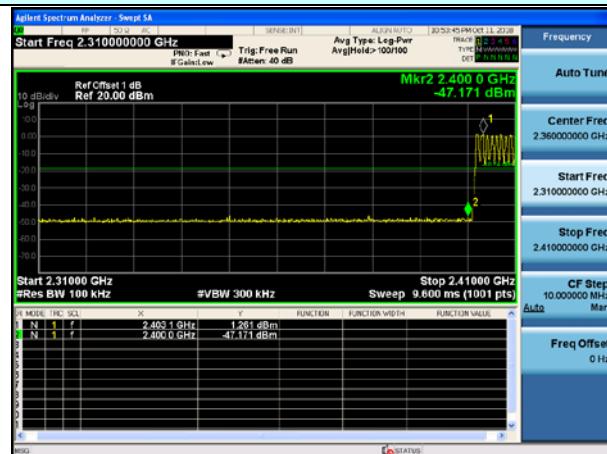


Hopping mode

Test channel:

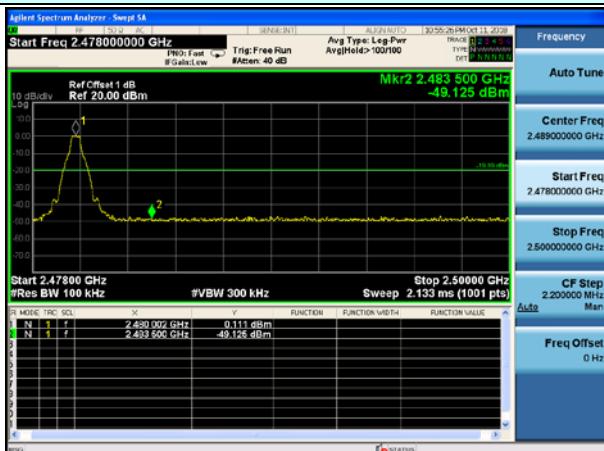

No-hopping mode


Highest channel

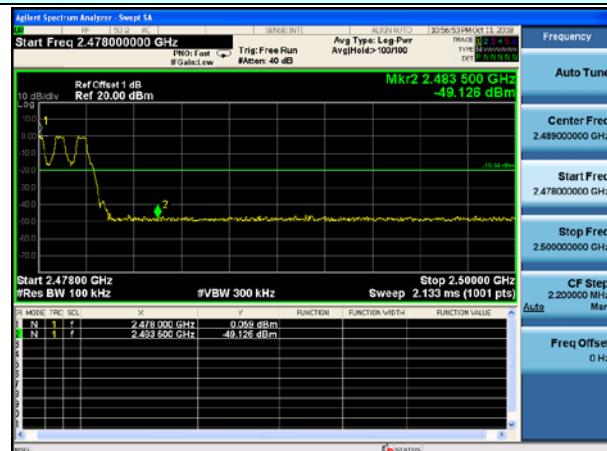

Hopping mode


Pi/4QPSK Mode:

Test channel:

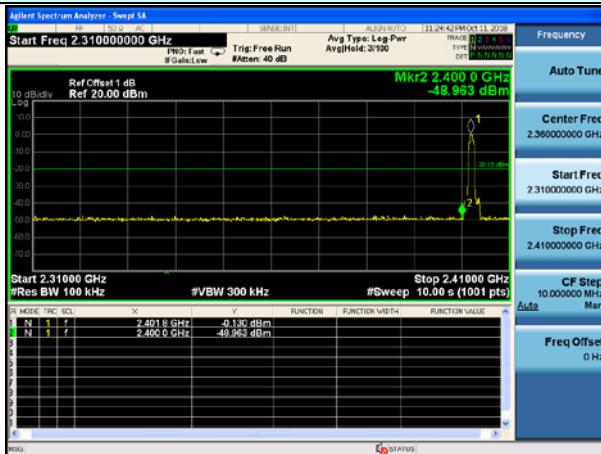


No-hopping mode

Lowest channel

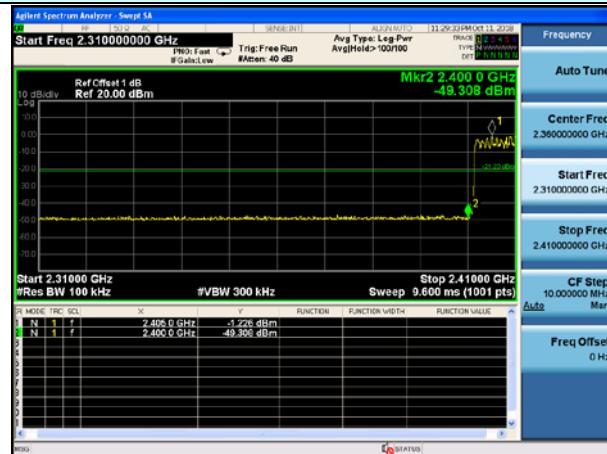

Hopping mode

Test channel:

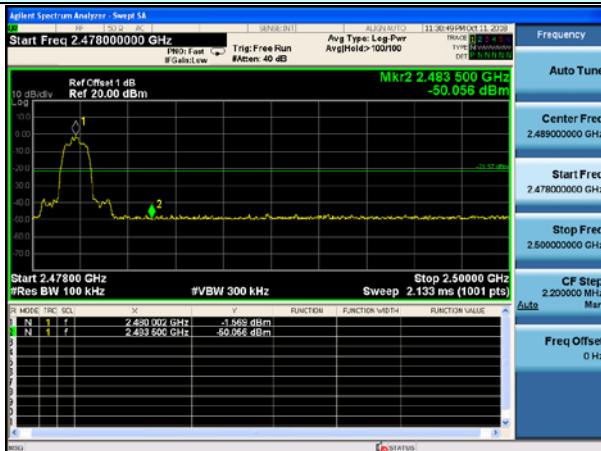

No-hopping mode


Highest channel



Hopping mode


8DPSK Mode:

Test channel:

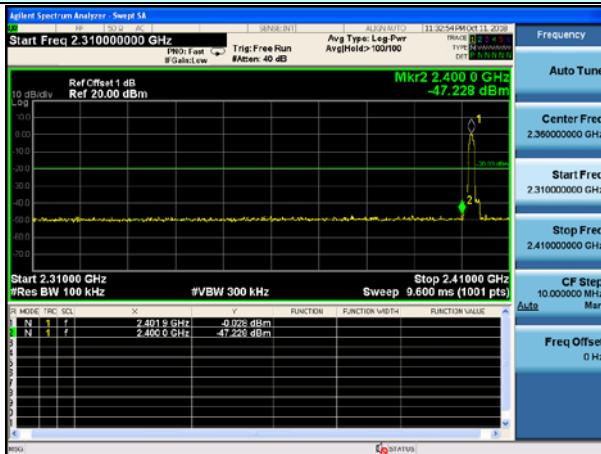


No-hopping mode

Lowest channel

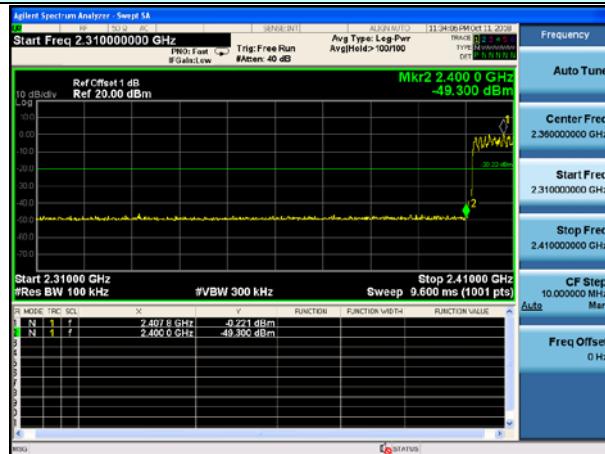


Hopping mode

Test channel:

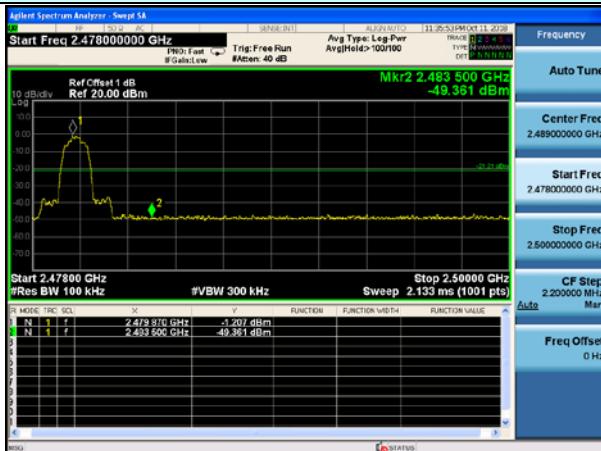


No-hopping mode

Highest channel

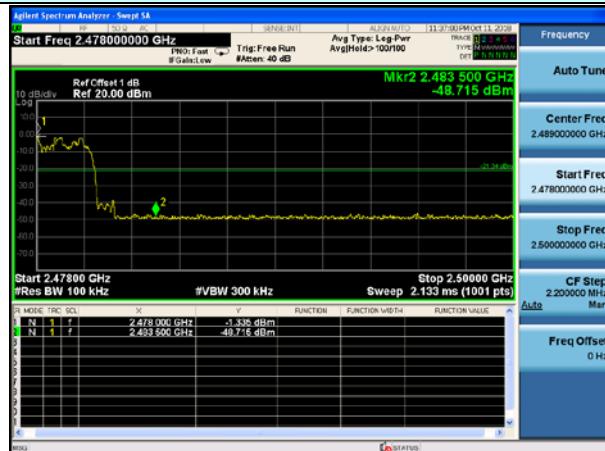

Hopping mode

Radiated Emission Method

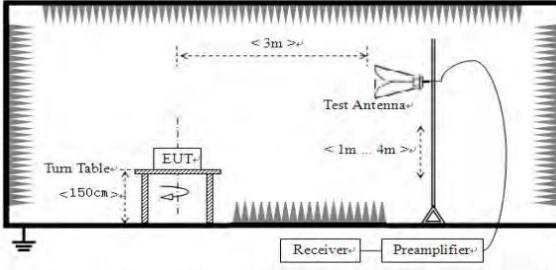Test Requirement:	FCC Part15 C Section 15.209 and 15.205						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	All restriction band have been tested, and 2.31GHz to 2.5GHz band is the worse case						
Test site:	Measurement Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Remark		
	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
		Peak	1MHz	10Hz	Average Value		
Limit:	Frequency		Limit (dBuV/m @3m)		Remark		
	Above 1GHz		54.00		Average Value		
			74.00		Peak Value		
Test setup:							
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 						
Test Instruments:	Refer to section 1.7 for details						
Test mode:	Refer to section 1.2 for details						
Test results:	Pass						

Remark: During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	47.75	27.59	5.38	30.18	50.54	74.00	-23.46	Horizontal
2400.00	53.05	27.58	5.39	30.18	55.84	74.00	-18.16	Horizontal
2390.00	48.65	27.59	5.38	30.18	51.44	74.00	-22.56	Vertical
2400.00	53.46	27.58	5.39	30.18	56.25	74.00	-17.75	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	38.96	27.59	5.38	30.18	41.75	54.00	-12.25	Horizontal
2400.00	39.23	27.58	5.39	30.18	42.02	54.00	-11.98	Horizontal
2390.00	38.85	27.59	5.38	30.18	41.64	54.00	-12.36	Vertical
2400.00	40.76	27.58	5.39	30.18	43.55	54.00	-10.45	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	50.32	27.53	5.47	29.93	53.39	74.00	-20.61	Horizontal
2500.00	49.83	27.55	5.49	29.93	52.94	74.00	-21.06	Horizontal
2483.50	52.55	27.53	5.47	29.93	55.62	74.00	-18.38	Vertical
2500.00	50.47	27.55	5.49	29.93	53.58	74.00	-20.42	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	40.64	27.53	5.47	29.93	43.71	54.00	-10.29	Horizontal
2500.00	38.93	27.55	5.49	29.93	42.04	54.00	-11.96	Horizontal
2483.50	42.50	27.53	5.47	29.93	45.57	54.00	-8.43	Vertical
2500.00	38.77	27.55	5.49	29.93	41.88	54.00	-12.12	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


14. Spurious Emission

Conducted Emission Method

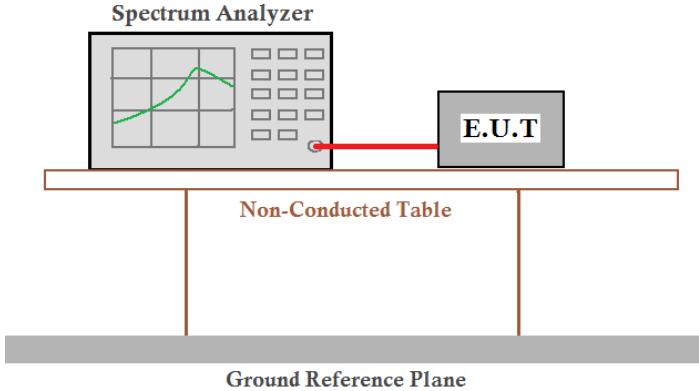
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

Remark:


During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

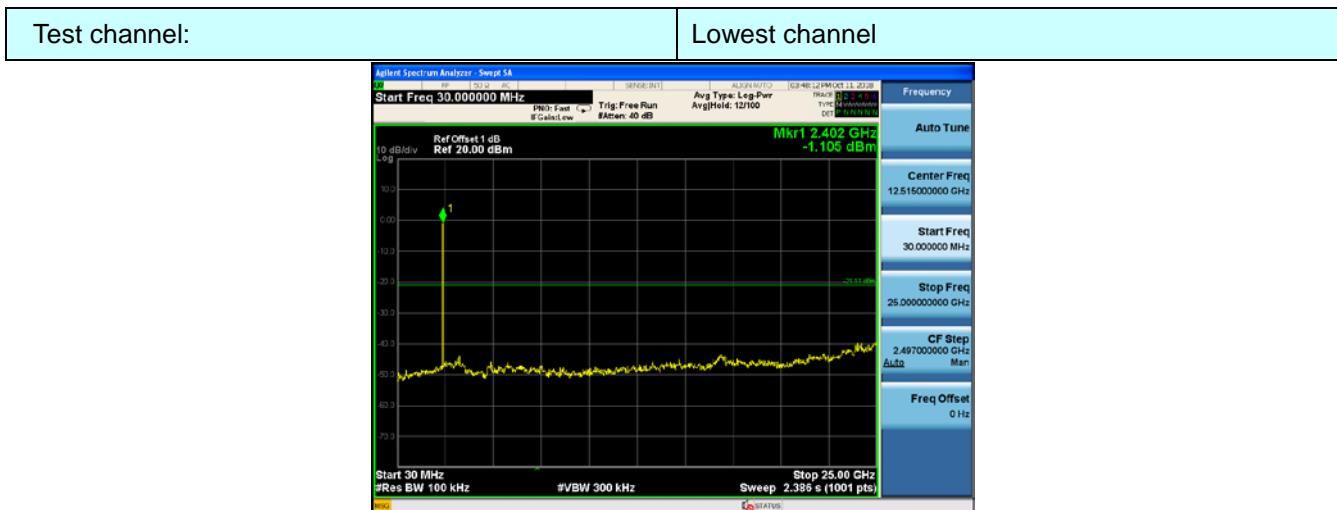

30MHz~25GHz

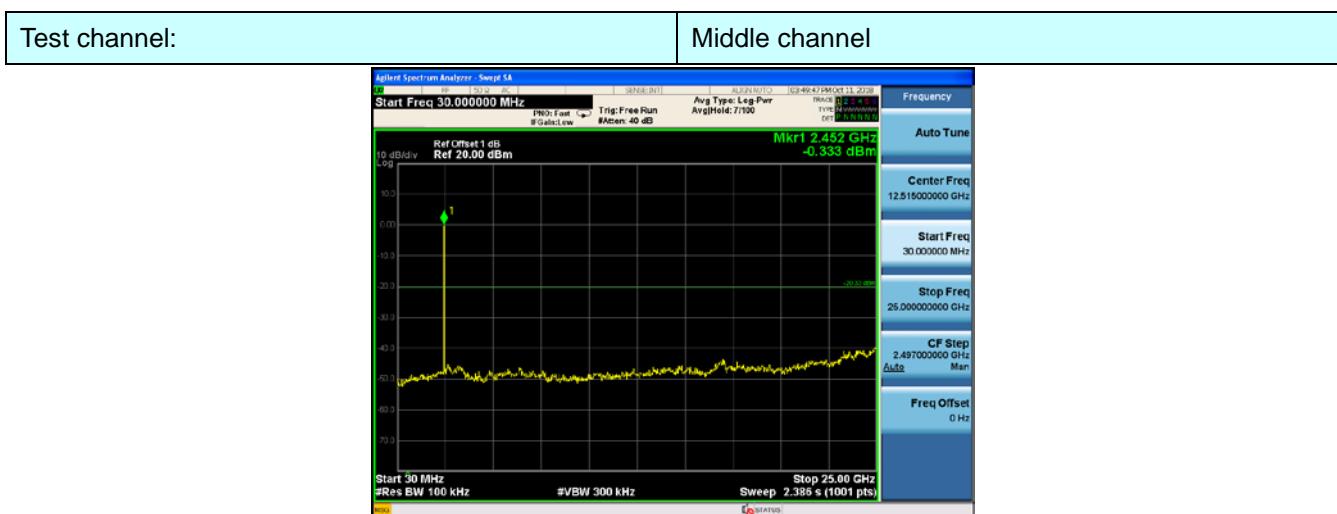



30MHz~25GHz

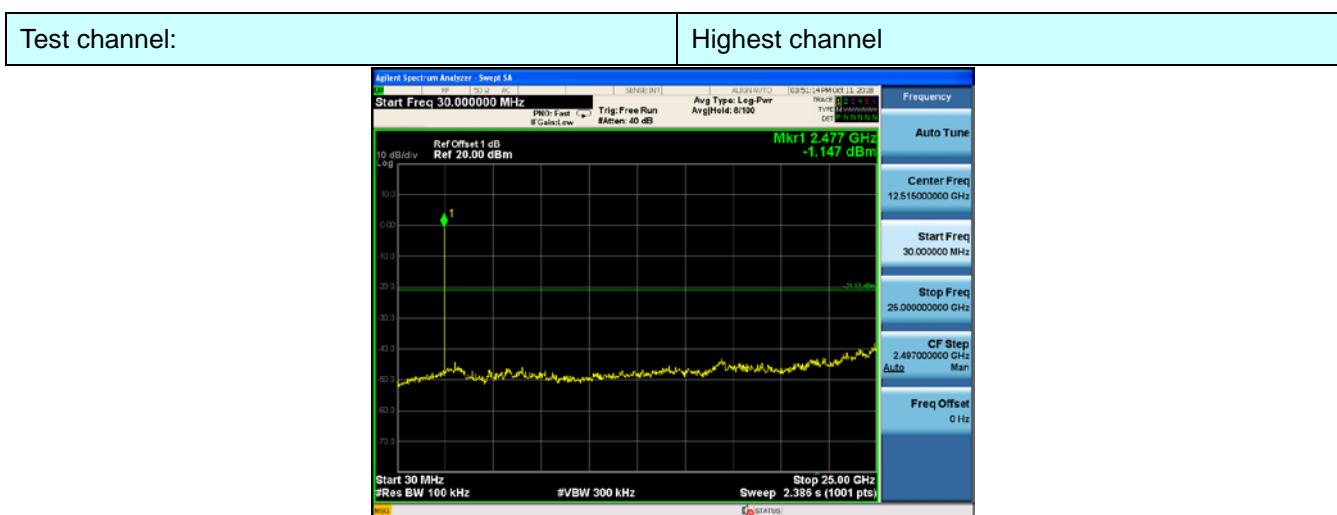

30MHz~25GHz


Radiated Emission Method

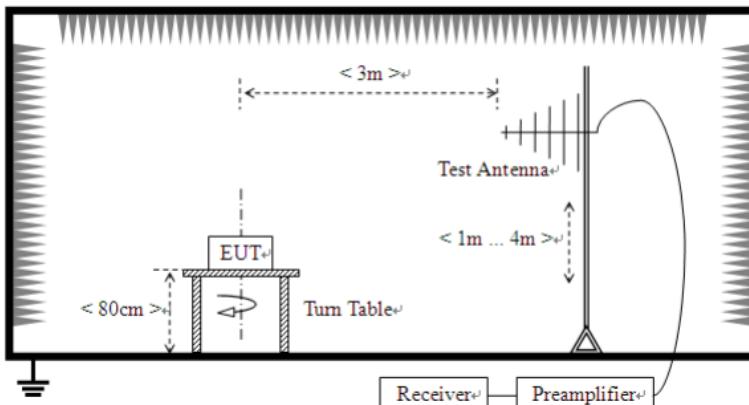Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>				

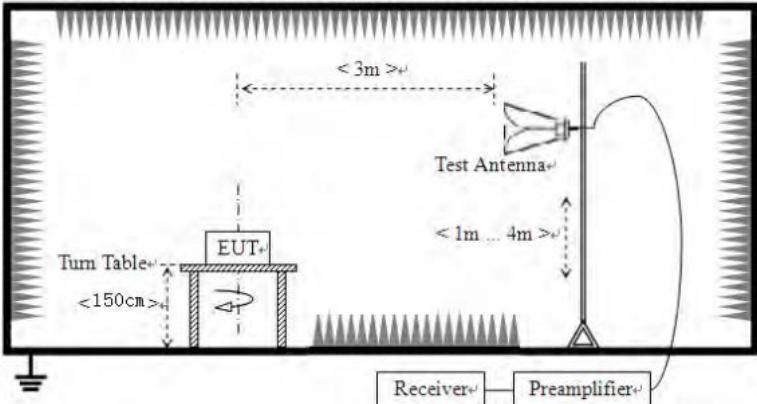
	
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 1.7 for details
Test mode:	Refer to section 1.2 for details
Test results:	Pass

Remark:

1. During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

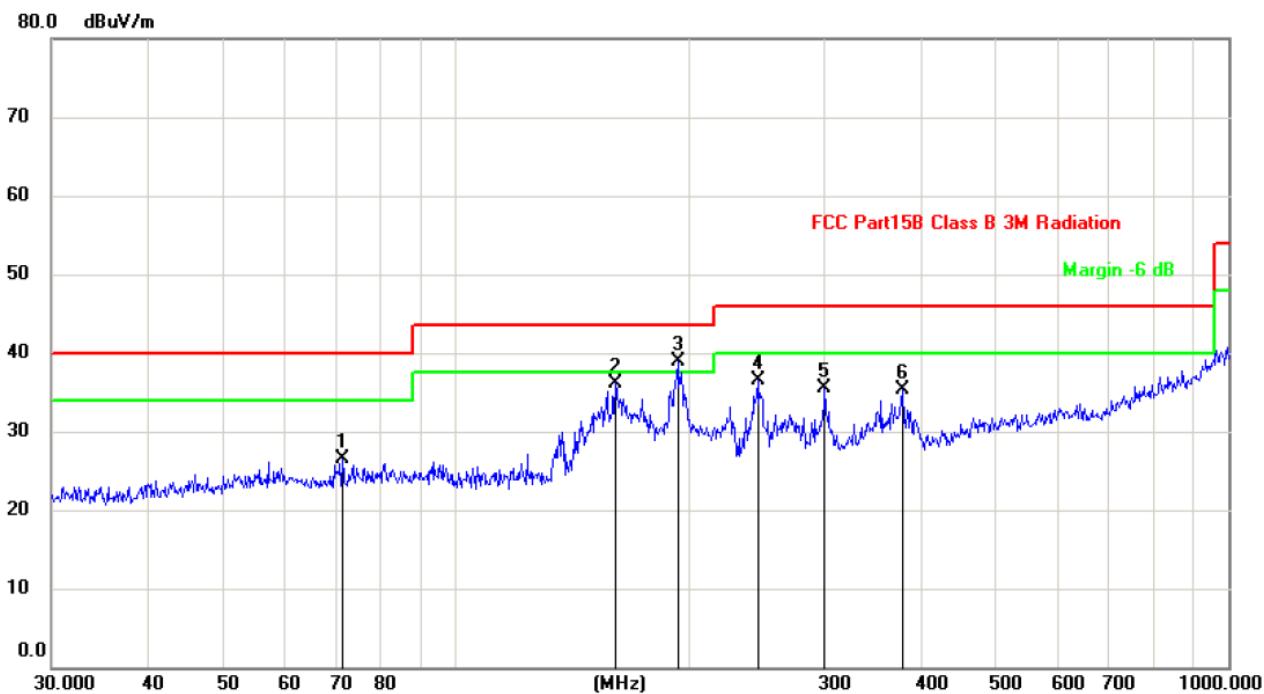Measurement data:**Vertical:**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dBuV/m	dBuV/m	dB	Detector
1		71.3298	15.58	10.96	26.54	40.00	-13.46 QP
2		160.9088	23.82	12.38	36.20	43.50	-7.30 QP
3	*	193.7726	25.86	13.01	38.87	43.50	-4.63 QP
4		245.9507	22.87	13.67	36.54	46.00	-9.46 QP
5		300.3672	20.30	15.26	35.56	46.00	-10.44 QP
6		378.5842	19.21	16.02	35.23	46.00	-10.77 QP

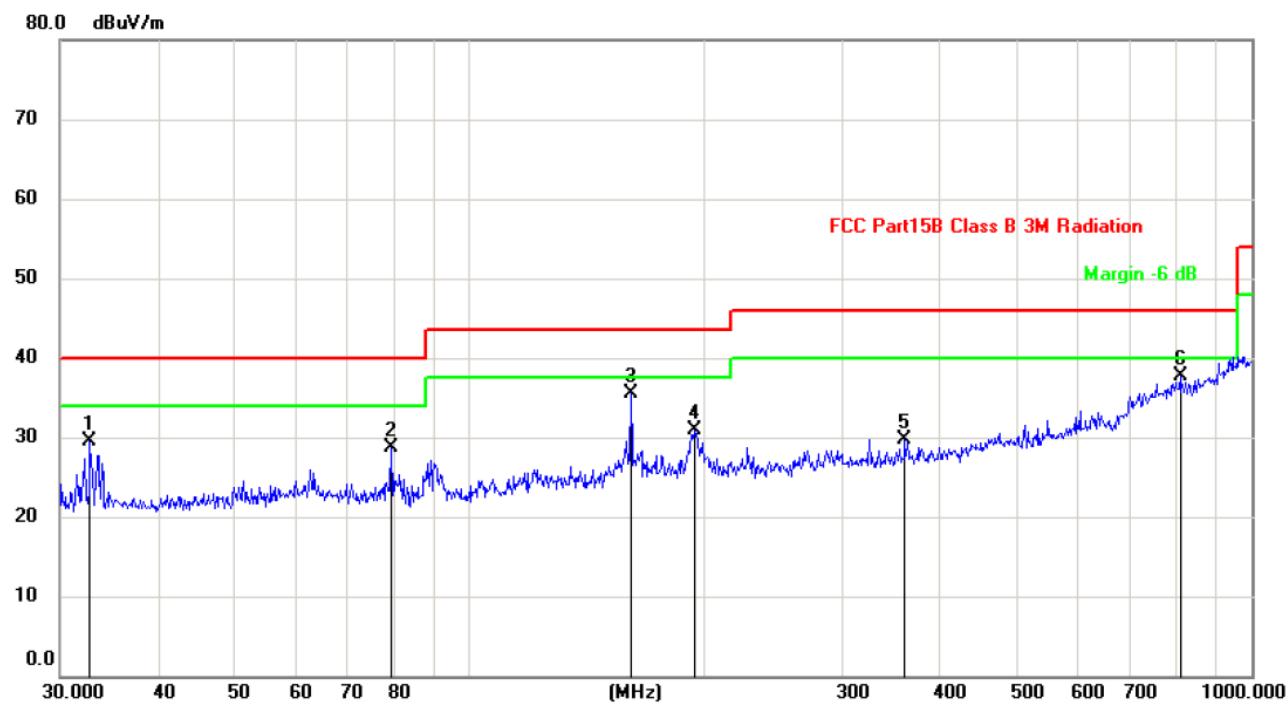Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		32.7486	20.47	9.02	29.49	40.00	-10.51	QP
2		79.5209	18.92	9.82	28.74	40.00	-11.26	QP
3	*	160.9089	23.79	11.66	35.45	43.50	-8.05	QP
4		193.7728	18.87	12.01	30.88	43.50	-12.62	QP
5		360.4476	15.01	14.73	29.74	46.00	-16.26	QP
6		810.2653	15.61	22.14	37.75	46.00	-8.25	QP

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	35.50	31.78	8.60	32.09	43.79	74.00	-30.21	Vertical
7206.00	29.67	36.15	11.65	32.00	45.47	74.00	-28.53	Vertical
9608.00	29.76	37.95	14.14	31.62	50.23	74.00	-23.77	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	39.76	31.78	8.60	32.09	48.05	74.00	-25.95	Horizontal
7206.00	31.63	36.15	11.65	32.00	47.43	74.00	-26.57	Horizontal
9608.00	28.28	37.95	14.14	31.62	48.75	74.00	-25.25	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	24.45	31.78	8.60	32.09	32.74	54.00	-21.26	Vertical
7206.00	18.37	36.15	11.65	32.00	34.17	54.00	-19.83	Vertical
9608.00	18.27	37.95	14.14	31.62	38.74	54.00	-15.26	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	28.02	31.78	8.60	32.09	36.31	54.00	-17.69	Horizontal
7206.00	20.87	36.15	11.65	32.00	36.67	54.00	-17.33	Horizontal
9608.00	17.03	37.95	14.14	31.62	37.50	54.00	-16.50	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “**”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	35.14	31.85	8.67	32.12	43.54	74.00	-30.46	Vertical
7323.00	30.24	36.37	11.72	31.89	46.44	74.00	-27.56	Vertical
9764.00	28.98	38.35	14.25	31.62	49.96	74.00	-24.04	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	40.51	31.85	8.67	32.12	48.91	74.00	-25.09	Horizontal
7323.00	31.74	36.37	11.72	31.89	47.94	74.00	-26.06	Horizontal
9764.00	29.00	38.35	14.25	31.62	49.98	74.00	-24.02	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	23.72	31.85	8.67	32.12	32.12	54.00	-21.88	Vertical
7323.00	17.54	36.37	11.72	31.89	33.74	54.00	-20.26	Vertical
9764.00	17.56	38.35	14.25	31.62	38.54	54.00	-15.46	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	28.96	31.85	8.67	32.12	37.36	54.00	-16.64	Horizontal
7323.00	19.65	36.37	11.72	31.89	35.85	54.00	-18.15	Horizontal
9764.00	17.91	38.35	14.25	31.62	38.89	54.00	-15.11	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “**”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	34.99	31.93	8.73	32.16	43.49	74.00	-30.51	Vertical
7440.00	29.59	36.59	11.79	31.78	46.19	74.00	-27.81	Vertical
9920.00	29.30	38.81	14.38	31.88	50.61	74.00	-23.39	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	40.03	31.93	8.73	32.16	48.53	74.00	-25.47	Horizontal
7440.00	31.44	36.59	11.79	31.78	48.04	74.00	-25.96	Horizontal
9920.00	29.17	38.81	14.38	31.88	50.48	74.00	-23.52	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	24.60	31.93	8.73	32.16	33.10	54.00	-20.90	Vertical
7440.00	18.55	36.59	11.79	31.78	35.15	54.00	-18.85	Vertical
9920.00	18.00	38.81	14.38	31.88	39.31	54.00	-14.69	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	28.64	31.93	8.73	32.16	37.14	54.00	-16.86	Horizontal
7440.00	21.28	36.59	11.79	31.78	37.88	54.00	-16.12	Horizontal
9920.00	17.21	38.81	14.38	31.88	38.52	54.00	-15.48	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:


1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “**”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

15. Test Setup Photo

Radiated Emission

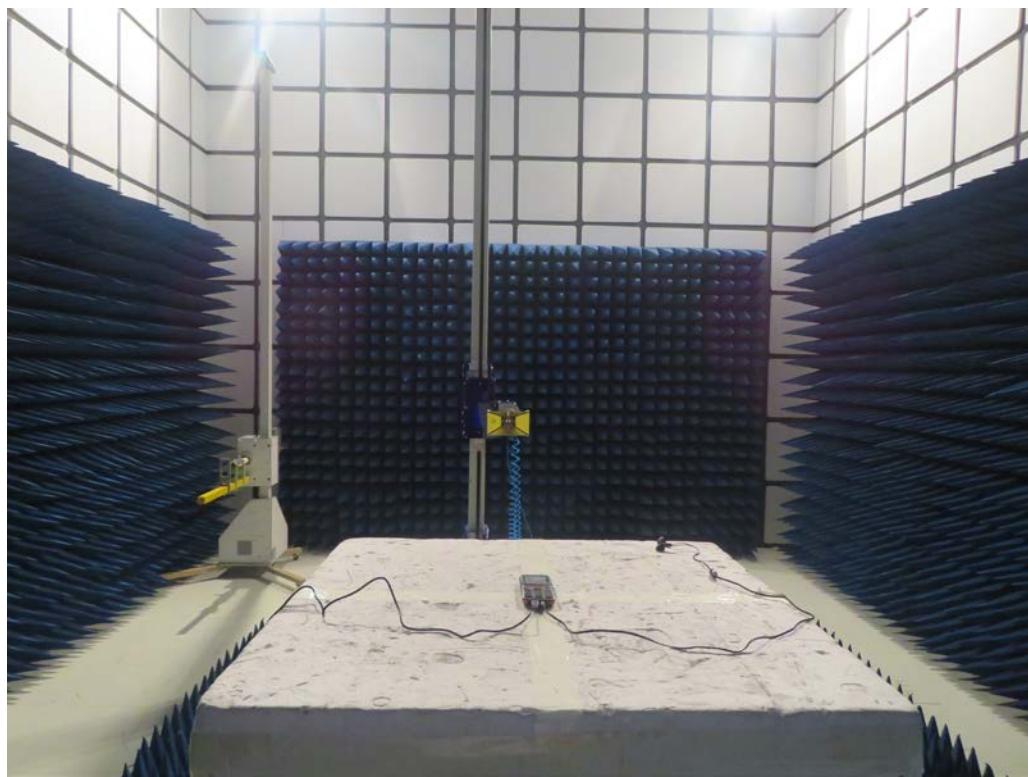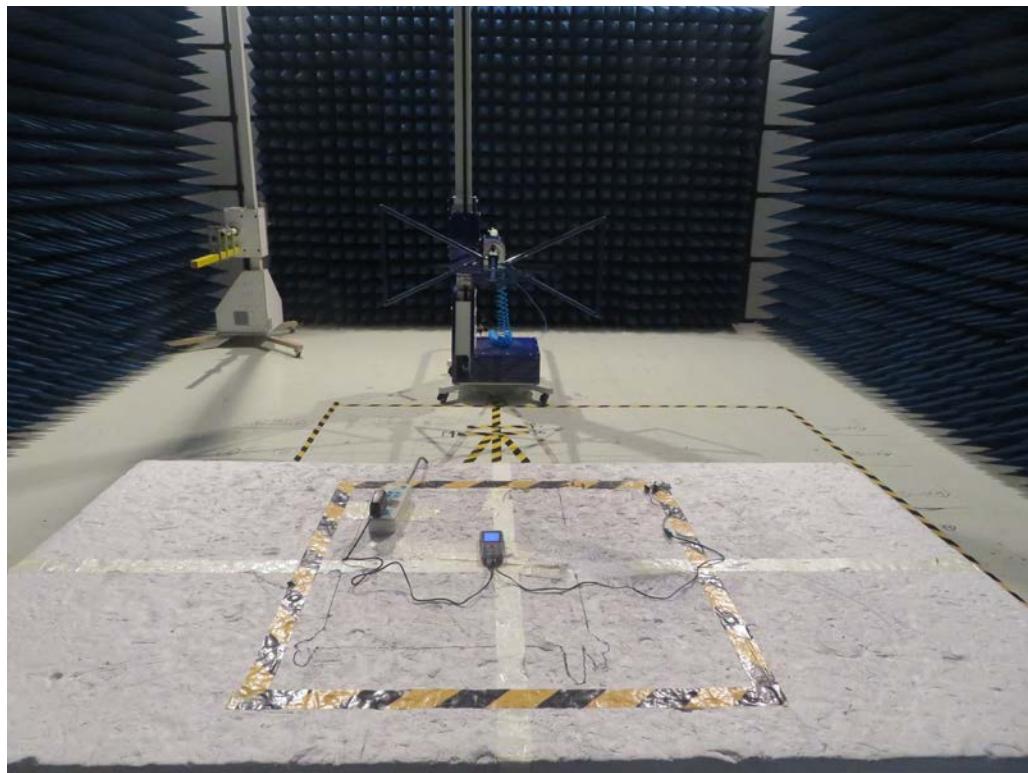

Conducted Emission

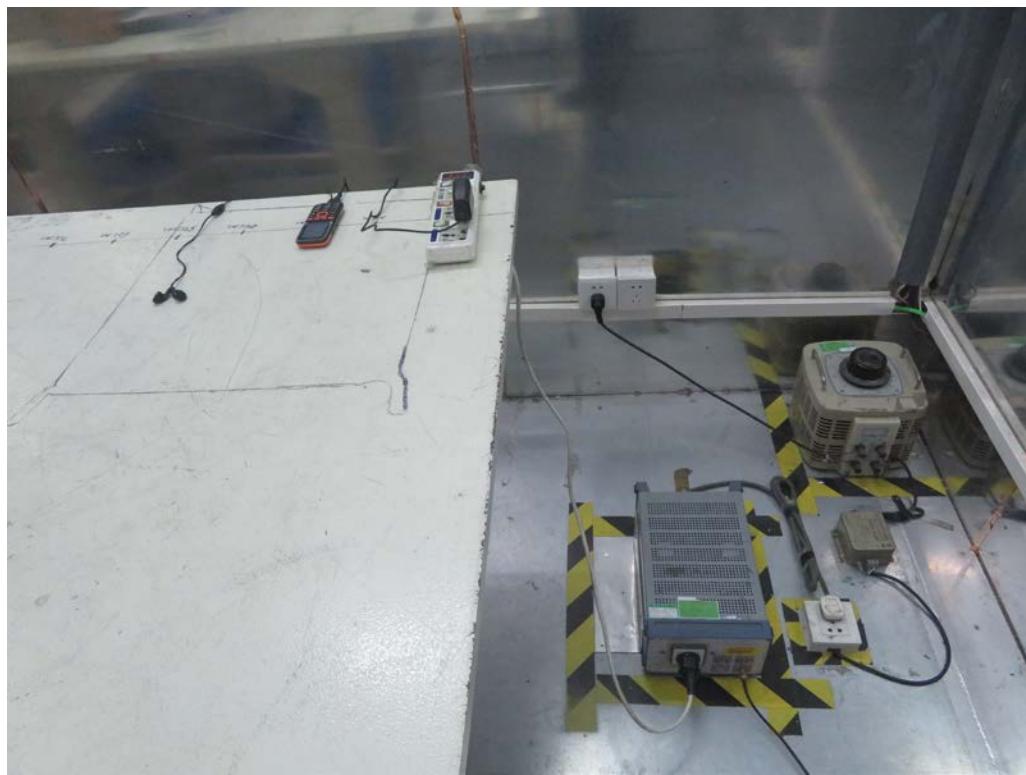

16. EUT Constructional Details

Please refer to report BSL008390301RF.

-----End-----