

# TEST REPORT



**DT&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1812-0277

2. Customer

• Name : KCTNS Co.,Ltd.

• Address : 552, Yeoksam-ro, Gangnam-gu, Seoul, 06187 South Korea

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : RFID/USN Wireless Device / DOTR-3000

FCC ID : 2ARHHDOTR3000

5. Test Method Used : ANSI C63.10-2013

Test Specification : FCC Part 15.247

6. Date of Test : 2018.11.05 ~ 2018.12.11

7. Testing Environment : See appended test report.

8. Test Result : Refer to the attached test result.

Affirmation

Tested by

Name : MyungHoon Lee

Reviewed by

Name : GeunKi Son

(Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2018 . 12 . 12 .

**DT&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## **Test Report Version**

<b>Test Report No.</b>	<b>Date</b>	<b>Description</b>
DRTFCC1812-0277	Dec. 12, 2018	Initial issue

## Table of Contents

1. General Information .....	5
1.1 Testing Laboratory .....	5
1.2 Details of Applicant .....	5
1.3 Description of EUT .....	6
1.4 Declaration by the manufacturer .....	6
1.5 Test conditions .....	6
1.6 Test Equipment List .....	7
1.7 Summary of Test Results .....	8
1.8 Conclusion of worst-case and operation mode.....	9
2. Maximum Peak Output Power Measurement .....	10
2.1 Test Setup .....	10
2.2 Limit.....	10
2.3 Test Procedure.....	10
2.4 Test Results .....	10
3. 20dBc BW.....	13
3.1 Test Setup .....	13
3.2 Limit.....	13
3.3 Test Procedure .....	13
3.4 Test Results .....	13
4. Carrier Frequency Separation.....	16
4.1 Test Setup .....	16
4.2 Limit.....	16
4.3 Procedure.....	16
4.4 Test Results .....	16
5. Number of Hopping Frequencies .....	17
5.1 Test Setup .....	17
5.2 Limit.....	17
5.3 Procedure.....	17
5.4 Test Results .....	17
6. Time of Occupancy (Dwell Time).....	18
6.1 Test Setup .....	18
6.2 Limit.....	18
6.3 Test Procedure.....	18
6.4 Test Results .....	18
7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission .....	19
7.1 Test Setup .....	19
7.2 Limit.....	19
7.3 Test Procedures.....	20
7.3.1 Test Procedures for Radiated Spurious Emissions.....	20
7.3.2 Test Procedures for Conducted Spurious Emissions .....	20
7.4 Test Results .....	21
7.4.1 Radiated Emission .....	21
7.4.2 Conducted Spurious Emissions .....	23
8. Transmitter AC Power Line Conducted Emission .....	29
8.1 Test Setup .....	29

---

<b>8.2 Limit.....</b>	<b>29</b>
<b>8.3 Test Procedures.....</b>	<b>29</b>
<b>8.4. Test Results .....</b>	<b>30</b>
<b>9. Antenna Requirement.....</b>	<b>32</b>
<b>9.1 Procedure.....</b>	<b>32</b>
<b>9.2 Conclusion.....</b>	<b>32</b>
<b>10. Occupied Bandwidth (99 %).....</b>	<b>33</b>
<b>10.1 Test Setup .....</b>	<b>33</b>
<b>10.2 Limit.....</b>	<b>33</b>
<b>10.3 Test Procedure.....</b>	<b>33</b>
<b>10.4 Test Results .....</b>	<b>33</b>
<b>APPENDIX I .....</b>	<b>34</b>
<b>APPENDIX II.....</b>	<b>35</b>

## 1.General Information

### 1.1 Testing Laboratory

**DT&C Co., Ltd.**

The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.

The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014.

- **FCC MRA Accredited Test Firm No. : KR0034**

[www.dtnc.net](http://www.dtnc.net)

Telephone	:	+ 82-31-321-2664
-----------	---	------------------

FAX	:	+ 82-31-321-1664
-----	---	------------------

### 1.2 Details of Applicant

Applicant : KCTNS Co.,Ltd.

Address : 552, Yeoksam-ro, Gangnam-gu, Seoul, 06187 South Korea

Contact person : HYUN TAE JIN

### 1.3 Description of EUT

<b>EUT</b>	RFID/USN Wireless Device
<b>Model Name</b>	DOTR-3000
<b>Add Model Name</b>	NA
<b>Serial Number</b>	Identical prototype
<b>Hardware version</b>	OR3
<b>Software version</b>	6.1.0.0
<b>Power Supply</b>	DC 3.6 V
<b>Frequency Range</b>	902.75 ~ 927.25 MHz
<b>Modulation Technique</b>	ASK
<b>Number of Channels</b>	50(Channel Spacing: 500kHz)
<b>Antenna Type</b>	Internal Antenna (Max. PK 3.1 dBi)

### 1.4 Declaration by the manufacturer

- N/A

### 1.5 Test conditions

Ambient Condition	
▪ Temperature	+22 °C ~ +25 °C
▪ Relative Humidity	43 % ~ 48 %

## 1.6 Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	18/07/09	19/07/09	MY46471251
Spectrum Analyzer	Agilent Technologies	N9020A	17/12/28	18/12/28	MY50410357
Multimeter	FLUKE	17B	17/12/26	18/12/26	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	17/12/27	18/12/27	255571
Signal Generator	ANRITSU	MG3695C	18/02/12	19/02/12	173501
Band Pass Filter	Wainwright Instruments	WRCT800/960.0-2/40-8SSK	18/07/05	19/07/05	32
Highpass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	18/07/05	19/07/05	7
Thermohygrometer	BODYCOM	BJ5478	1801/03	19/01/03	120612-1
Thermohygrometer	BODYCOM	BJ5478	1801/03	19/01/03	120612-2
HYGROMETER	TESTO	608-H1	18/02/10	19/02/10	34862883
Loop Antenna	Schwarzbeck	FMZB1513	18/01/30	20/01/30	1513-128
BILOG ANTENNA	Schwarzbeck	VULB 9160	18/07/13	20/07/13	3359
Horn Antenna	A.H.Systems Inc.	SAS-574	17/07/31	19/07/31	155
PreAmplifier	Agilent Technologies	8449B	18/07/05	19/07/05	3008A02108
PreAmplifier	H.P	8447D	17/12/26	18/12/26	2944A07774
Attenuator	SMAJK	SMAJK-50-10	18/07/04	19/07/04	15081903
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2495A MA2490A	18/07/04	19/07/04	1338003 1249304
EMI Test Receiver	Rohde Schwarz	ESR7	18/02/13	19/02/13	101061
EMI Test Receiver	Rohde Schwarz	ESCI7	18/02/12	19/02/12	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	18/09/27	19/09/27	101333
LISN	SCHWARZBECK	NNLK 8121	18/03/20	19/03/20	06183
Cable	Radiall	TESTPRO3	18/07/06	19/07/06	M-01
Cable	Junkosha	MWX315	18/11/19	19/11/19	M-05
Cable	Junkosha	MWX221	18/11/19	19/11/19	M-06
Cable	Junkosha	MWX221	18/11/19	19/11/19	M-07
Cable	DT&C	CABLE	18/07/05	19/07/05	RF-82
Cable	DT&C	CABLE	18/06/25	19/06/25	RF-20

Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

## 1.7 Summary of Test Results

FCC Part RSS Std.	Parameter	Limit (Using in 902-928 MHz)	Test Condition	Status Note 1
15.247(a) RSS-247(5.1)	Carrier Frequency Separation	>= 25 kHz or >= 20 dB BW, whichever is greater.	Conducted	C
	Number of Hopping Frequencies	>= 50 hops, if 20 dB BW < 250kHz >= 25 hops, if 20 dB BW >= 250kHz		C
	20 dB Bandwidth	< 500 kHz		C
	Dwell Time	=< 0.4 seconds		C
15.247(b) RSS-247(5.4)	Transmitter Output Power	<b>For FCC</b> =< 1 Watt , if CHs >= 50 =< 0.25 W, if CHs >= 25, < 50 <b>For IC</b> if CHs >= 50 =< 1 Watt For Conducted Power =< 4 Watt For e.i.r.p, if CHs >= 25, < 50 =< 0.25 W For Conducted Power. =< 1 Watt For e.i.r.p	Conducted	C
15.247(d) RSS-247(5.5)	Conducted Spurious Emissions	The radiated emission to any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density.		C
RSS Gen(6.6)	Occupied Bandwidth (99 %)	N/A		NA
15.247(d) 15.205 & 209 RSS-247(5.5) RSS-Gen (8.9 & 8.10)	Radiated Spurious Emissions	FCC 15.209 Limits	Radiated	C <sup>Note3</sup>
15.207 RSS-Gen(8.8)	AC Conducted Emissions	FCC 15.207 Limits	AC Line Conducted	C
15.203 RSS-Gen(8.3)	Antenna Requirements	FCC 15.203	-	C

Note 1: **C** = Comply   **NC** = Not Comply   **NT** = Not Tested   **NA** = Not Applicable

Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.

Note 3: This test item was performed in each axis and the worst case data was reported.

## 1.8 Conclusion of worst-case and operation mode

The field strength of spurious emission was measured in three orthogonal EUT positions(X-axis, Y-axis and Z-axis).

Tested frequency information,

- Hopping Function: Enable

	<b>TX Frequency (MHz)</b>	<b>RX Frequency (MHz)</b>
<b>Hopping Band</b>	902.75 ~ 927.25 MHz	902.75 ~ 927.25 MHz

- Hopping Function: Disable

<b>Channel</b>	<b>TX Frequency (MHz)</b>	<b>RX Frequency (MHz)</b>
<b>Lowest Channel</b>	902.75	902.75
<b>Middle Channel</b>	914.75	914.75
<b>Highest Channel</b>	927.25	927.25

## 2. Maximum Peak Output Power Measurement

### 2.1 Test Setup

Refer to the APPENDIX I.

### 2.2 Limit

#### FCC Requirements

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(b)(2), For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

#### IC Requirements

1. RSS-247(5.4)(a), For FHSS operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W, and the e.i.r.p. shall not exceed 4 W if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W and the e.i.r.p. shall not exceed 1 W if the hopset uses less than 50 hopping channels.

### 2.3 Test Procedure

1. The RF output power was measured with a spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.

2. The peak output power of the fundamental frequency was measured with the spectrum analyzer using:

Span = approximately 5 times of the 20 dB bandwidth, centered on a hopping channel

RBW  $\geq$  20 dB BW

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 2.4 Test Results

Tested Channel	Burst Average Output Power		Peak Output Power	
	dBm	mW	dBm	mW
Lowest	<b>26.58</b>	<b>454.99</b>	<b>27.100</b>	<b>512.861</b>
Middle	26.35	431.52	26.710	468.813
Highest	26.02	399.94	26.350	431.519

Note 1 : The burst average output power was tested using an average power meter for reference only.

Note 2 : See next pages for actual measured spectrum plots.

## Peak Output Power

## Lowest Channel



## Peak Output Power

## Middle Channel



**Peak Output Power****Highest Channel**

### 3. 20dBc BW

#### 3.1 Test Setup

Refer to the APPENDIX I.

#### 3.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

#### 3.3 Test Procedure

1. The 20 dB bandwidth were measured with a spectrum analyzer connected to RF antenna Connector (conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using below setting: RBW shall be in the range of 1% to 5% of the 20 dB bandwidth and  $VBW \geq 3 \times RBW$ , Span = between two times and five times the 20 dB bandwidth.

#### 3.4 Test Results

Frequency (MHz)	Tested Channel	20dBc BW (kHz)
902.75	Lowest	44.59
914.75	Middle	44.09
927.25	Highest	45.15

Note 1: See next pages for actual measured spectrum plots.

## 20dBc Bandwidth

## Lowest Channel



## 20dBc Bandwidth

## Middle Channel



## 20dBc Bandwidth

## Highest Channel



## 4. Carrier Frequency Separation

### 4.1 Test Setup

Refer to the APPENDIX I.

### 4.2 Limit

Limit :  $\geq 25$  kHz or  $\geq 20$  dB BW whichever is greater.

### 4.3 Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to :

Span = wide enough to capture the peaks of two adjacent channels

RBW = Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW  $\geq$  RBW      Sweep = auto

Detector function = peak      Trace = max hold

### 4.4 Test Results

Hopping Mode	Peak of center channel (MHz)	Peak of adjacent Channel (MHz)	Test Result (kHz)
Enable	914.750	915.250	500

### Carrier Frequency Separation      *Hopping mode : Enable*



## 5. Number of Hopping Frequencies

## 5.1 Test Setup

Refer to the APPENDIX I.

## 5.2 Limit

Limit:  $\geq 50$  hops

### 5.3 Procedure

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, two frequency ranges for FH mode within the 902 ~ 928 MHz were examined.

The spectrum analyzer is set to :

Span = 30 MHz Start Frequency = 899.75 MHz, Stop Frequency = 929.75 MHz

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

$$VBW \geq RBW$$

Sweep = auto

Detector function = peak


Trace = max hold

## 5.4 Test Results

Hopping mode	Test Result (Total Hops)
Enable	50

## Carrier Frequency Separation

### ***Hopping mode : Enable***

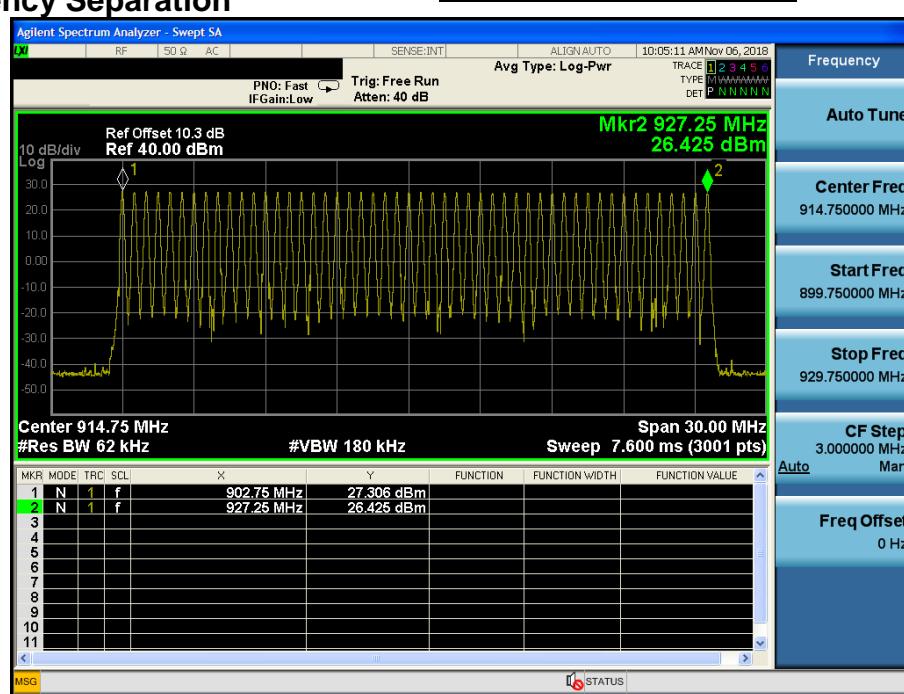

## 6. Time of Occupancy (Dwell Time)

### 6.1 Test Setup

Refer to the APPENDIX I.

### 6.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### 6.3 Test Procedure

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to :

Center frequency = 914.75 MHz

Span = zero

RBW = 100 kHz (RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel)


VBW  $\geq$  RBW

Detector function = peak

Trace = max hold

### 6.4 Test Results

Channel Frequency (MHz)	Length (ms)	Number	Dwell Time (ms)
914.75	40	2	80.00

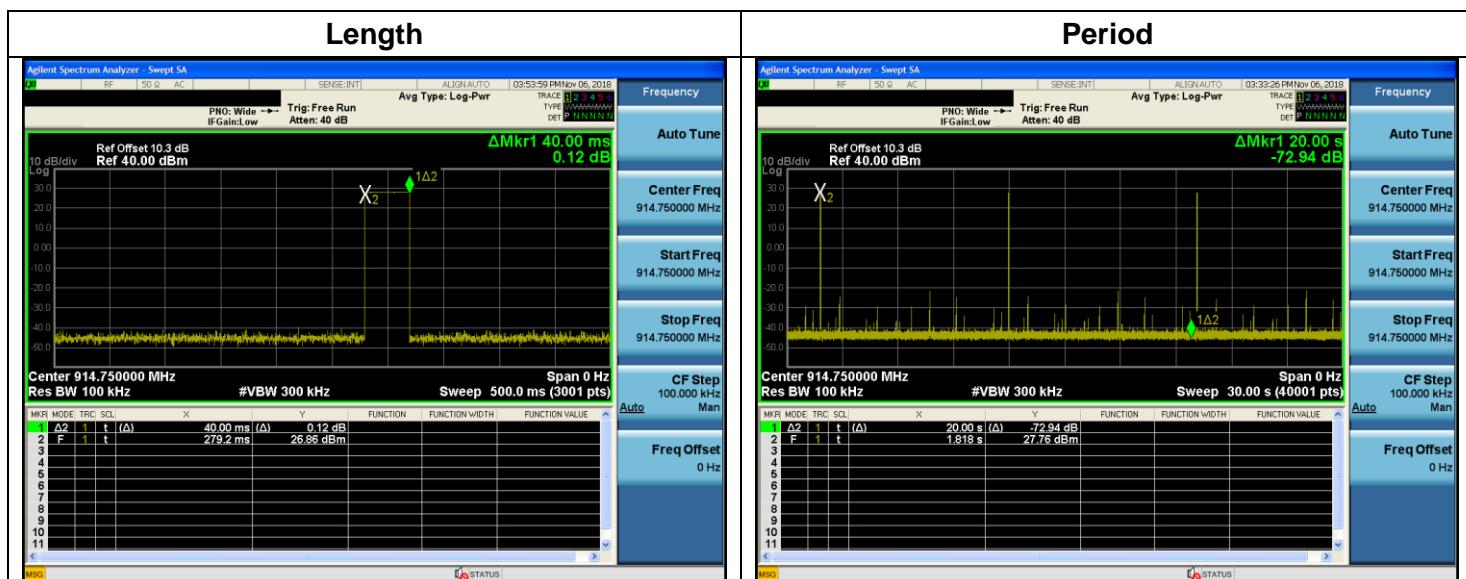

## 7. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission

### 7.1 Test Setup

Refer to the APPENDIX I.

### 7.2 Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1705	24000/F (kHz)	30
1705 ~ 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 - 72 MHz, 76 - 88 MHz, 174 - 216 MHz or 470 - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~ 156.52525	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.7 ~ 156.9	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	162.0125 ~ 167.17	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	167.72 ~ 173.2	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	240 ~ 285	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	322 ~ 335.4	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	960 ~ 1240	3345.8 ~ 3358		
			3600 ~ 4400		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

## 7.3 Test Procedures

### 7.3.1 Test Procedures for Radiated Spurious Emissions

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.  
The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.

NOTE 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

NOTE 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz for Average detection (AV) at frequency above 1 GHz.

### 7.3.2 Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The **reference level** of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
3. The conducted spurious emission was tested each ranges were set as below.

**Frequency range : 9 kHz ~ 30 MHz**

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

**Frequency range : 30 MHz ~ 10 GHz**

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

**LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)**

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

## 7.4 Test Results

### 7.4.1 Radiated Emission

Note 1: Attached plot of worst data, refer to the APPENDIX II.

#### 9kHz ~ 10GHz Data

- Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
212.03	H	Y	QP	45.30	-11.00	N/A	34.30	43.50	9.20
336.07	H	Y	QP	43.90	-5.90	N/A	38.00	46.00	8.00
792.87	H	Y	QP	34.70	4.20	N/A	38.90	46.00	7.10
816.87	H	Y	QP	35.40	4.50	N/A	39.90	46.00	6.10
2708.25	H	Z	PK	45.57	1.52	N/A	47.09	74.00	26.91
2708.33	H	Z	AV	36.50	1.52	N/A	38.02	54.00	15.98
3611.59	H	Z	PK	46.88	2.48	N/A	49.36	74.00	24.64
3610.94	H	Z	AV	39.68	2.48	N/A	42.16	54.00	11.84
4513.92	V	Y	PK	46.89	3.95	N/A	50.84	74.00	23.16
4513.70	V	Y	AV	40.47	3.95	N/A	44.42	54.00	9.58
5416.52	H	Y	PK	48.74	5.45	N/A	54.19	74.00	19.81
5416.56	H	Y	AV	43.56	5.45	N/A	49.01	54.00	4.99
7222.33	V	Z	PK	47.79	7.65	N/A	55.44	74.00	18.56
7222.00	V	Z	AV	42.03	7.65	N/A	49.68	54.00	4.32

- Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
339.43	H	Y	QP	42.80	-5.90	N/A	36.90	46.00	9.10
769.10	H	Y	QP	33.00	4.00	N/A	37.00	46.00	9.00
792.92	H	Y	QP	34.60	4.20	N/A	38.80	46.00	7.20
817.63	H	Y	QP	35.20	4.50	N/A	39.70	46.00	6.30
893.20	V	Y	QP	33.10	5.50	N/A	38.60	46.00	7.40
2744.06	H	Z	PK	45.28	1.51	N/A	46.79	74.00	27.21
2744.23	H	Z	AV	34.57	1.51	N/A	36.08	54.00	17.92
3658.78	H	Z	PK	46.90	2.41	N/A	49.31	74.00	24.69
3659.04	H	Z	AV	36.42	2.41	N/A	38.83	54.00	15.17
4573.45	V	Y	PK	45.33	4.27	N/A	49.60	74.00	24.40
4573.85	V	Y	AV	36.23	4.27	N/A	40.50	54.00	13.50
7317.93	V	Z	PK	43.94	7.67	N/A	51.61	74.00	22.39
7318.01	V	Z	AV	35.71	7.67	N/A	43.38	54.00	10.62

## ▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F. (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
212.010	H	Y	QP	45.40	-11.00	N/A	34.40	43.50	9.10
337.000	H	Y	QP	43.40	-5.90	N/A	37.50	46.00	8.50
792.950	H	Y	QP	34.20	4.20	N/A	38.40	46.00	7.60
816.890	H	Y	QP	35.30	4.50	N/A	39.80	46.00	6.20
898.000	V	Y	QP	30.70	5.60	N/A	36.30	46.00	9.70
2781.670	H	Z	PK	45.28	1.38	N/A	46.66	74.00	27.34
2781.740	H	Z	AV	36.76	1.38	N/A	38.14	54.00	15.86
3709.090	H	Z	PK	46.23	2.42	N/A	48.65	74.00	25.35
3708.930	H	Z	AV	37.66	2.42	N/A	40.08	54.00	13.92
4635.970	V	Y	PK	45.71	4.36	N/A	50.07	74.00	23.93
4636.160	V	Y	AV	35.75	4.36	N/A	40.11	54.00	13.89
7417.470	V	Z	PK	44.79	7.69	N/A	52.48	74.00	21.52
7418.000	V	Z	AV	35.44	7.69	N/A	43.13	54.00	10.87

**Note.**

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.


Margin = Limit – Result / Result = Reading + T.F+ DCF / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,  
DCF = Duty Cycle Correction Factor

## 7.4.2 Conducted Spurious Emissions


### Low Band-edge

### Lowest Channel

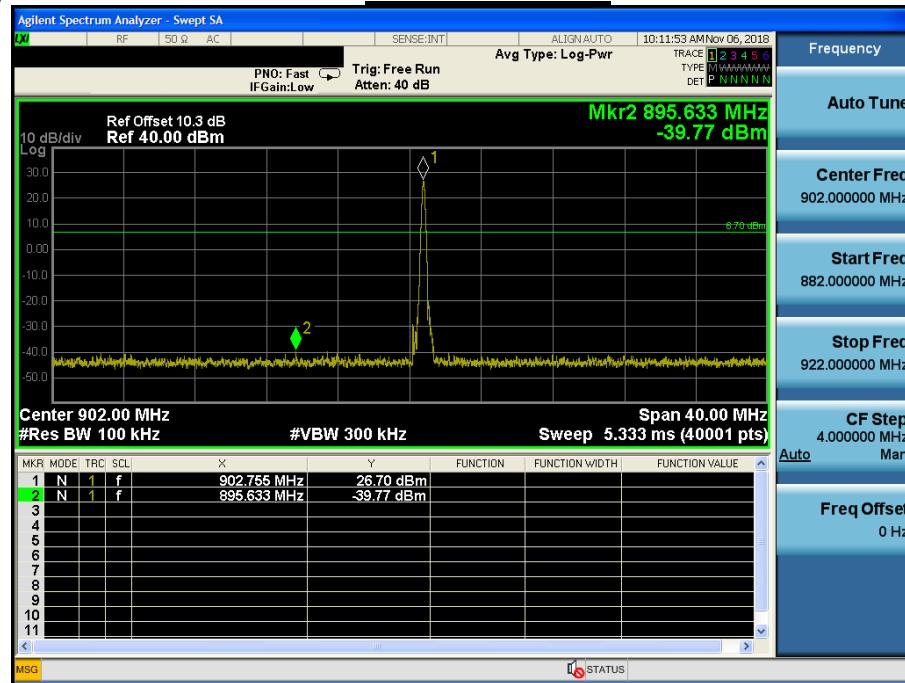



### Low Band-edge

### Hopping mode

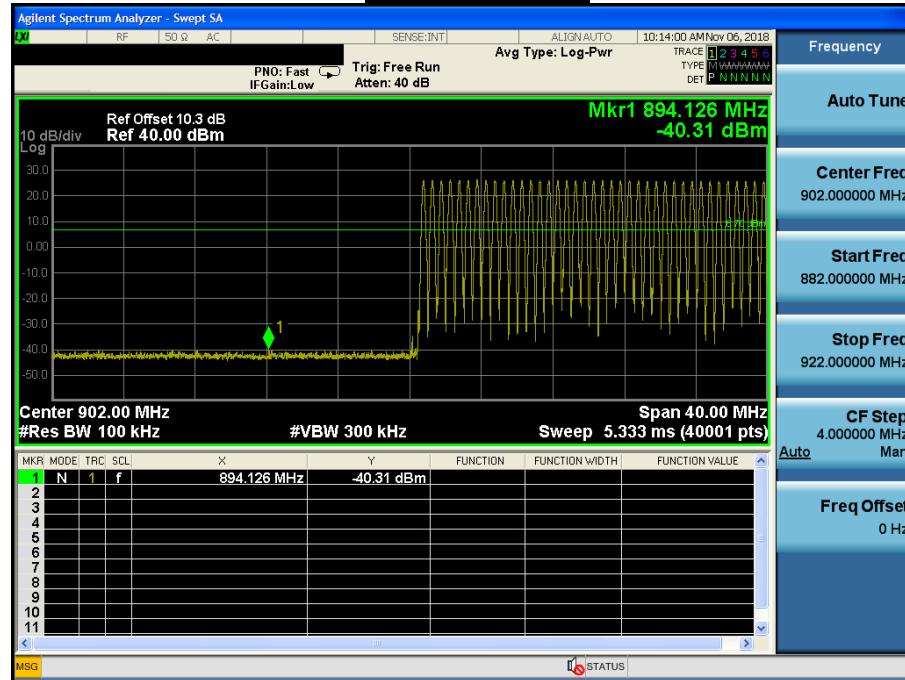


## Conducted Spurious Emissions

### Lowest Channel

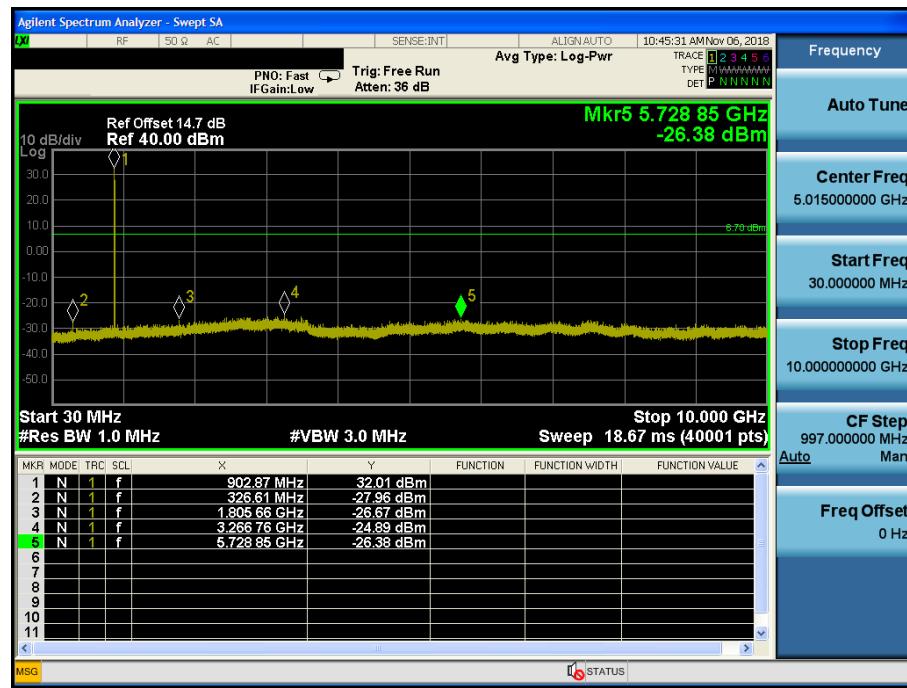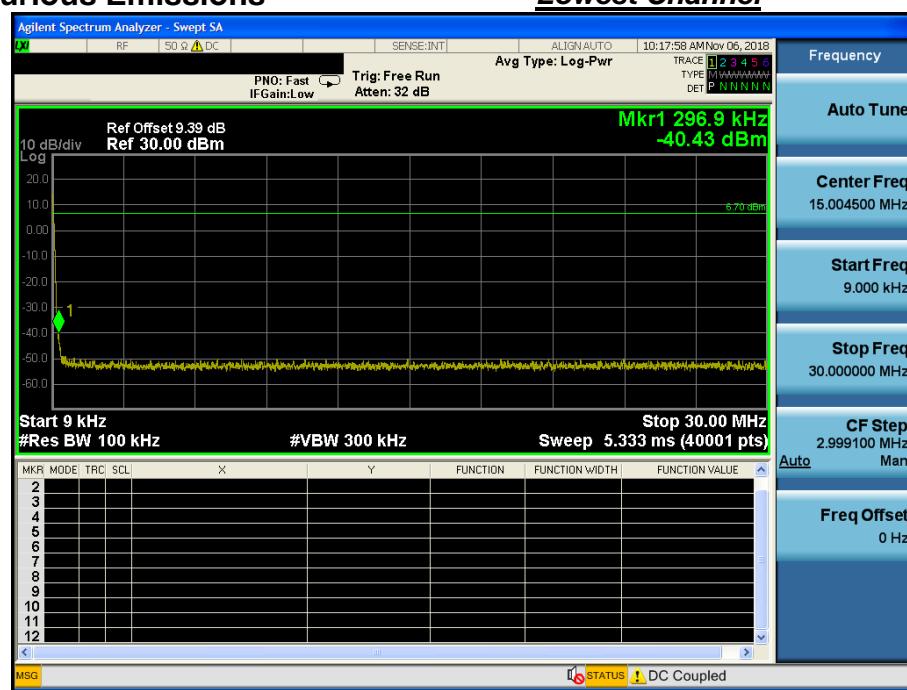



## Reference for limit



## Middle Channel

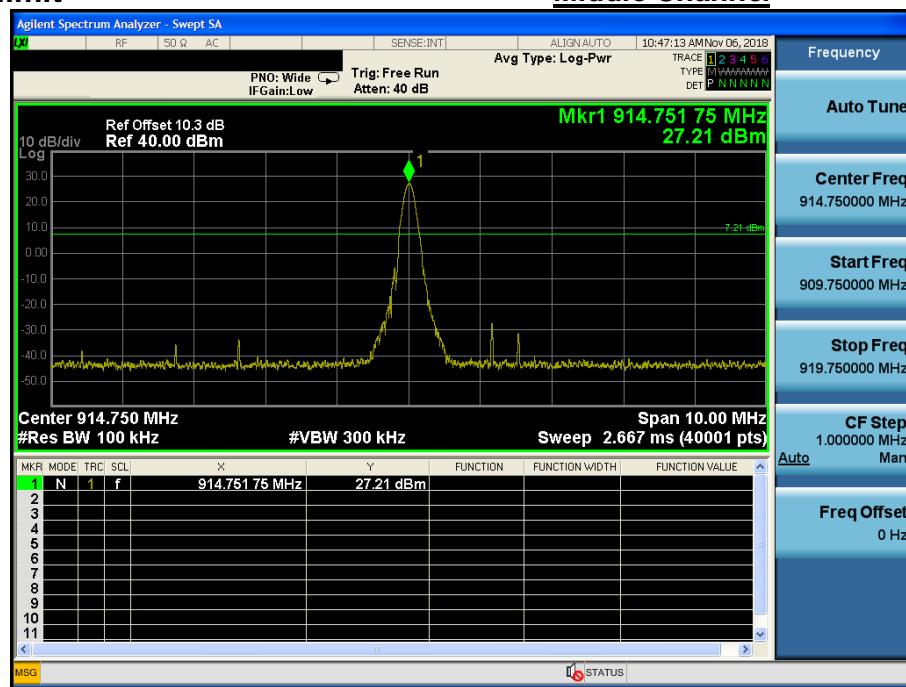

## Conducted Spurious Emissions



## Middle Channel

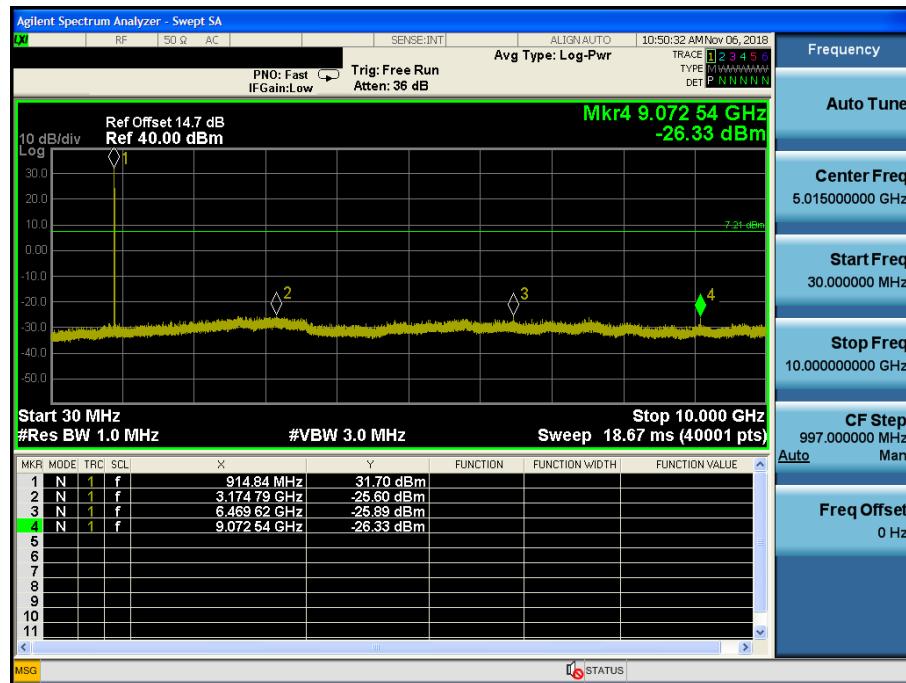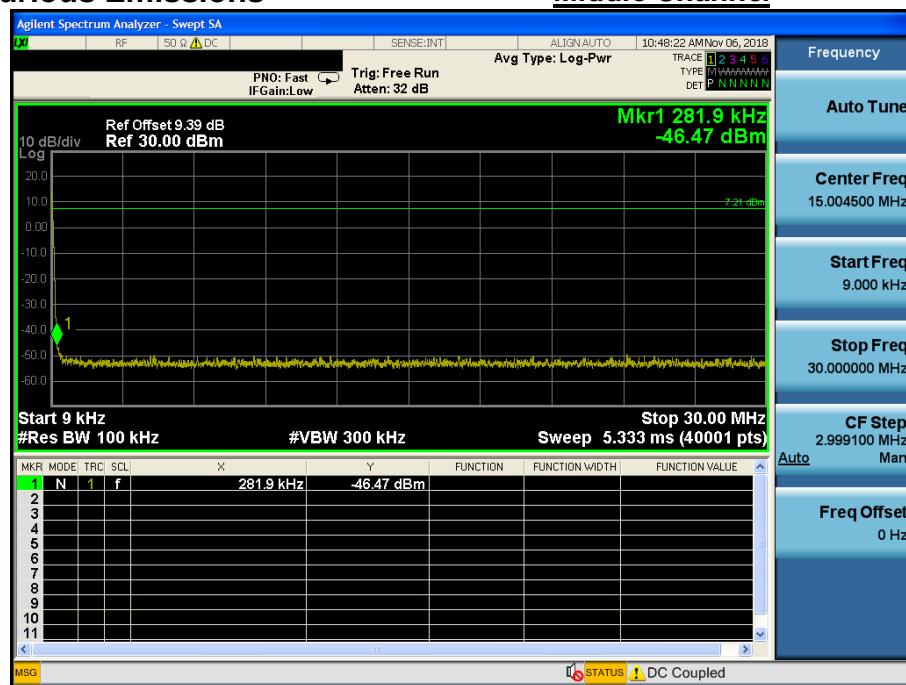

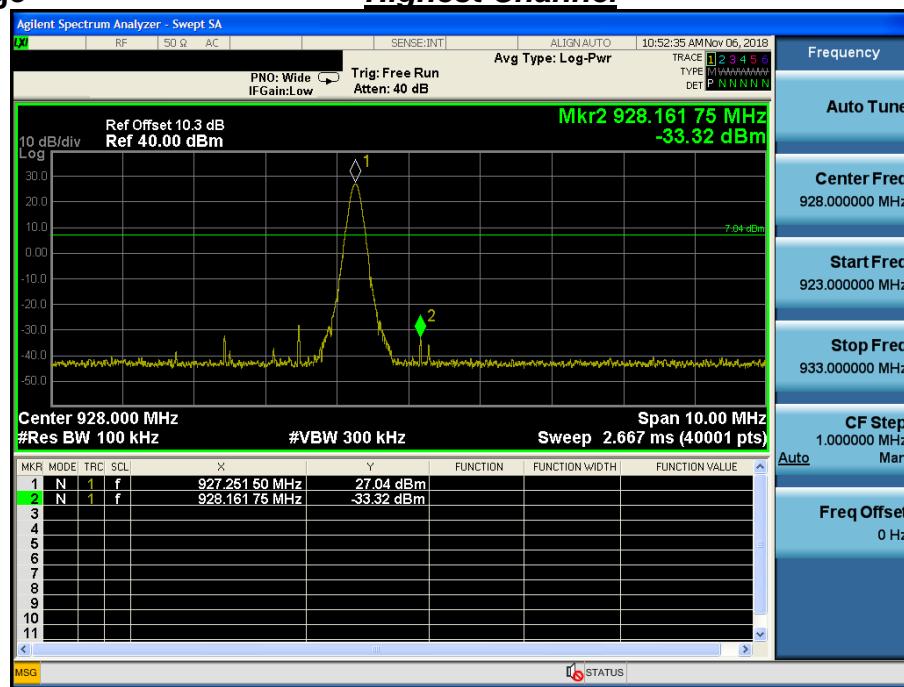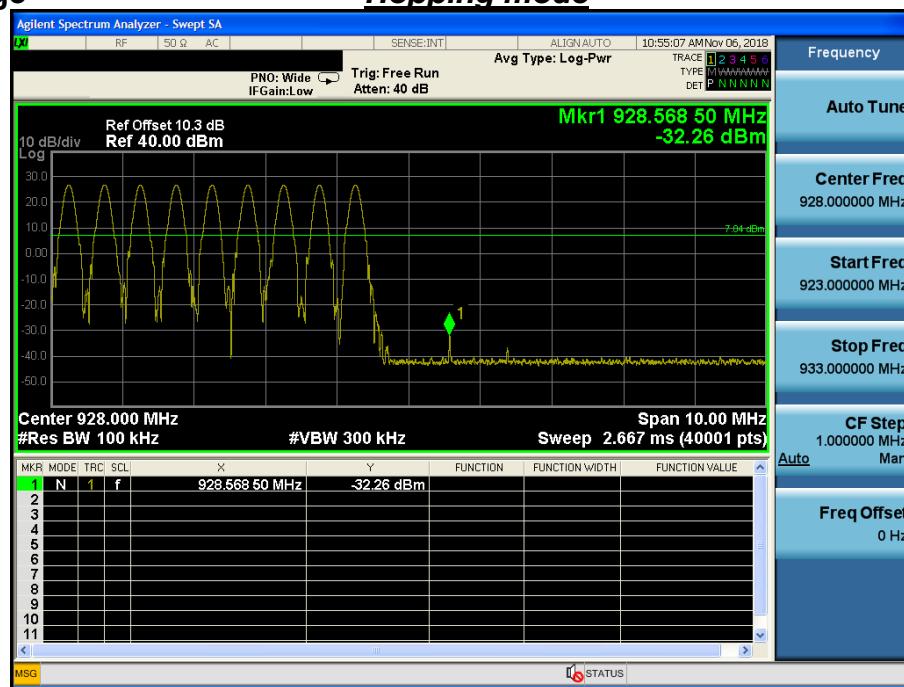**High Band-edge**
**Highest Channel**

**High Band-edge**
**Hopping mode**


## Conducted Spurious Emissions
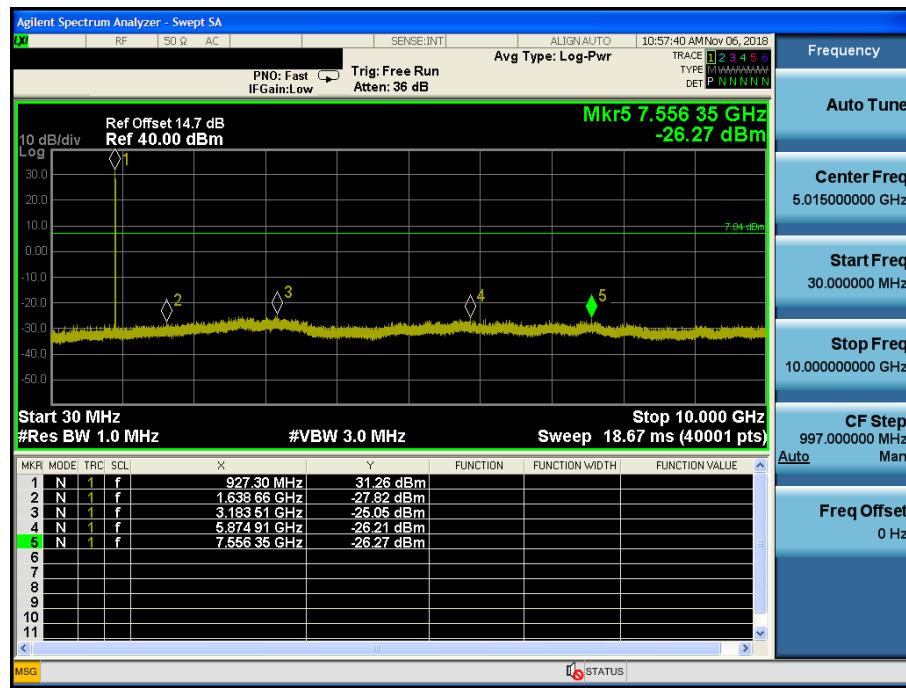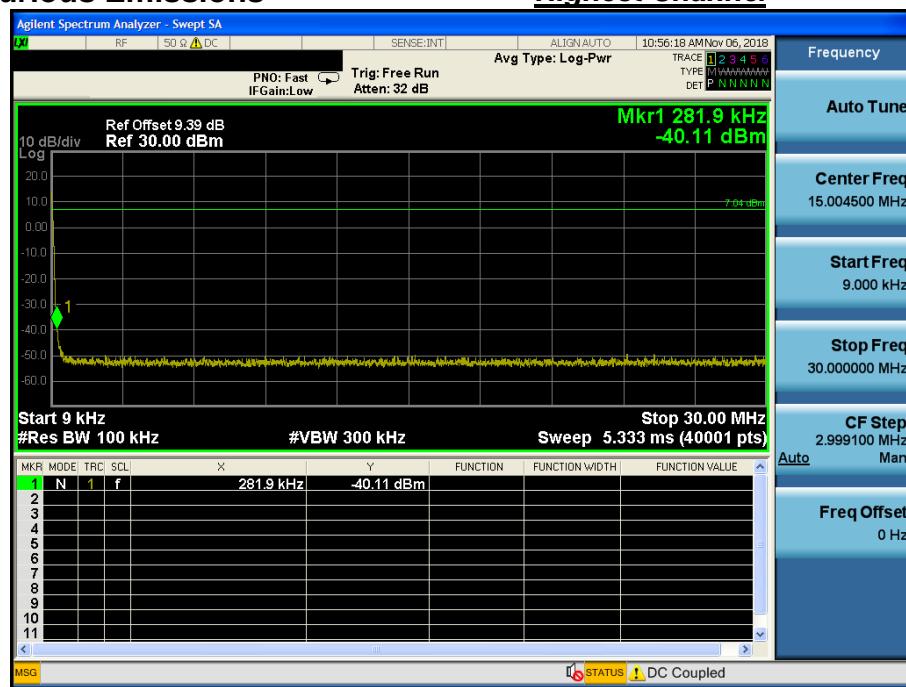
## Highest Channel



## 8. Transmitter AC Power Line Conducted Emission

### 8.1 Test Setup

See test photo graphs for the actual connections between EUT and support equipment.

### 8.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

### 8.3 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m x 3.5 m x 3.5 m (L x W x H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) x 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.


## 8.4. Test Results

### AC Line Conducted Emissions (Graph)

#### Results of Conducted Emission

DTNC Date 2018-11-15

Order No.	DOTR-3000	Referrence No.
Model No.		Power Supply
Serial No.		Temp/Humi.
Test Condition		Operator
Memo	900MHz RFID	
LIMIT : FCC P15.207 QP FCC P15.207 AV		

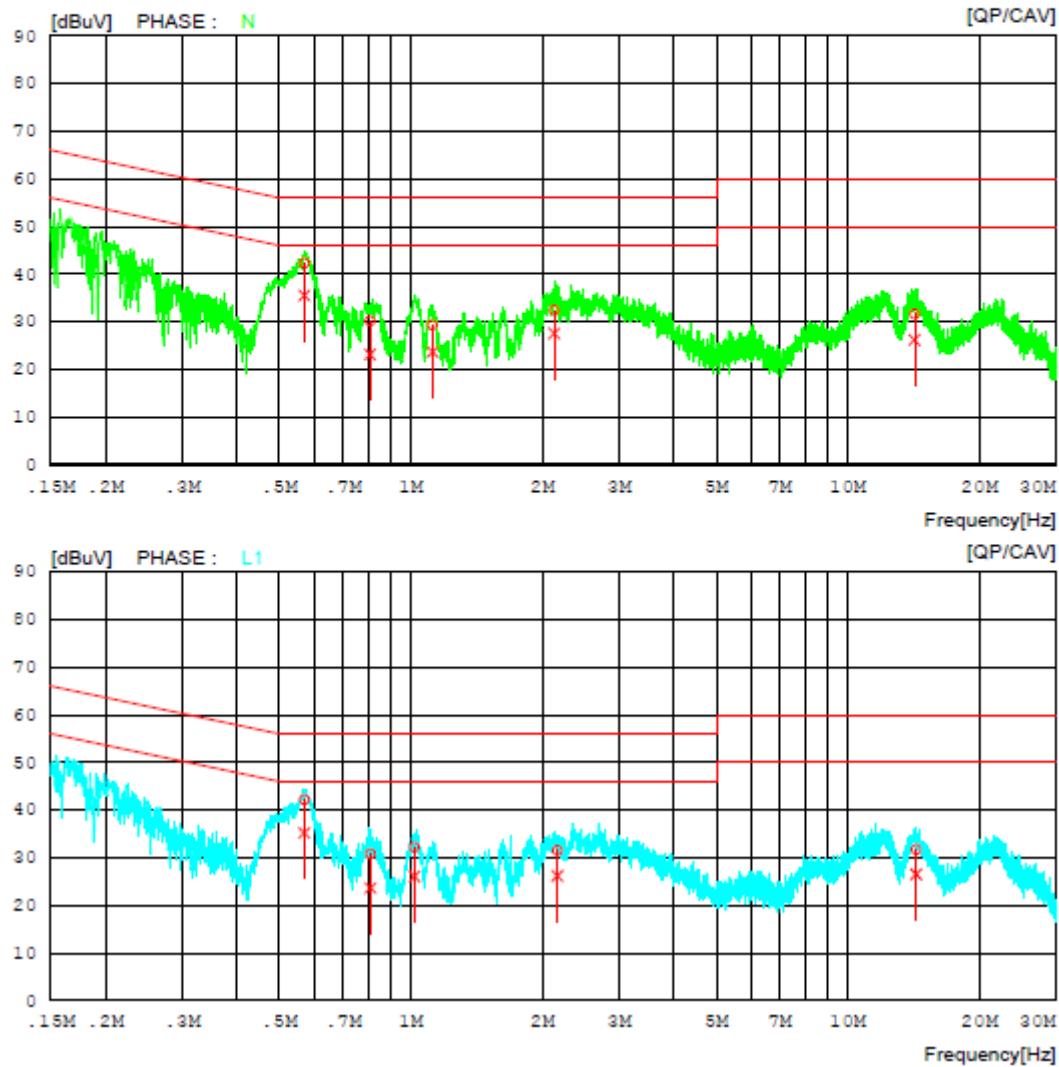

## AC Line Conducted Emissions (List)

Results of Conducted Emission

DTNC

Date 2018-11-15

Order No.	DOTR-3000	Reference No.
Model No.		Power Supply
Serial No.		Temp/Humi.

Test Condition

120V, 60Hz

25°C, 48%

Memo 900MHz RFID

LIMIT : FCC P15.207 QP  
FCC P15.207 AV

NO	FREQ	READING	C.FACTOR	RESULT		LIMIT		MARGIN		PHASE	
				QP	CAV	QP	CAV	QP	CAV		
		[MHz]		[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]		
1	0.57036	32.22	25.49	10.03	42.25	35.52	56.00	46.00	13.75	10.48	N
2	0.80665	20.09	13.07	10.04	30.13	23.11	56.00	46.00	25.87	22.89	N
3	1.12120	19.24	13.58	10.05	29.29	23.63	56.00	46.00	26.71	22.37	N
4	2.12800	22.26	17.46	10.11	32.37	27.57	56.00	46.00	23.63	18.43	N
5	14.22420	21.04	15.73	10.50	31.54	26.23	60.00	50.00	28.46	23.77	N
6	0.57013	32.13	25.20	10.01	42.14	35.21	56.00	46.00	13.86	10.79	L1
7	0.80834	20.74	13.58	10.00	30.74	23.58	56.00	46.00	25.26	22.42	L1
8	1.02000	22.10	16.02	10.02	32.12	26.04	56.00	46.00	23.88	19.96	L1
9	2.16600	21.38	16.10	10.08	31.46	26.18	56.00	46.00	24.54	19.82	L1
10	14.34980	21.24	15.99	10.46	31.70	26.45	60.00	50.00	28.80	23.55	L1

## 9. Antenna Requirement

### 9.1 Procedure

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

### 9.2 Conclusion

: **Comply**

**The antenna employs a unique antenna connector. (Refer to Internal Photo file.)**  
**Therefore this EUT complies with the requirement of §15.203.**

#### Minimum Standard:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

## 10. Occupied Bandwidth (99 %)

### 10.1 Test Setup

Refer to the APPENDIX I.

### 10.2 Limit

Limit : Not Applicable

### 10.3 Test Procedure

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately  $3 \times$  RBW.

Spectrum analyzer plots are included on the following pages.


### 10.4 Test Results

**Not Applicable**


## APPENDIX I

### Test set up diagrams

#### ▪ Radiated Measurement

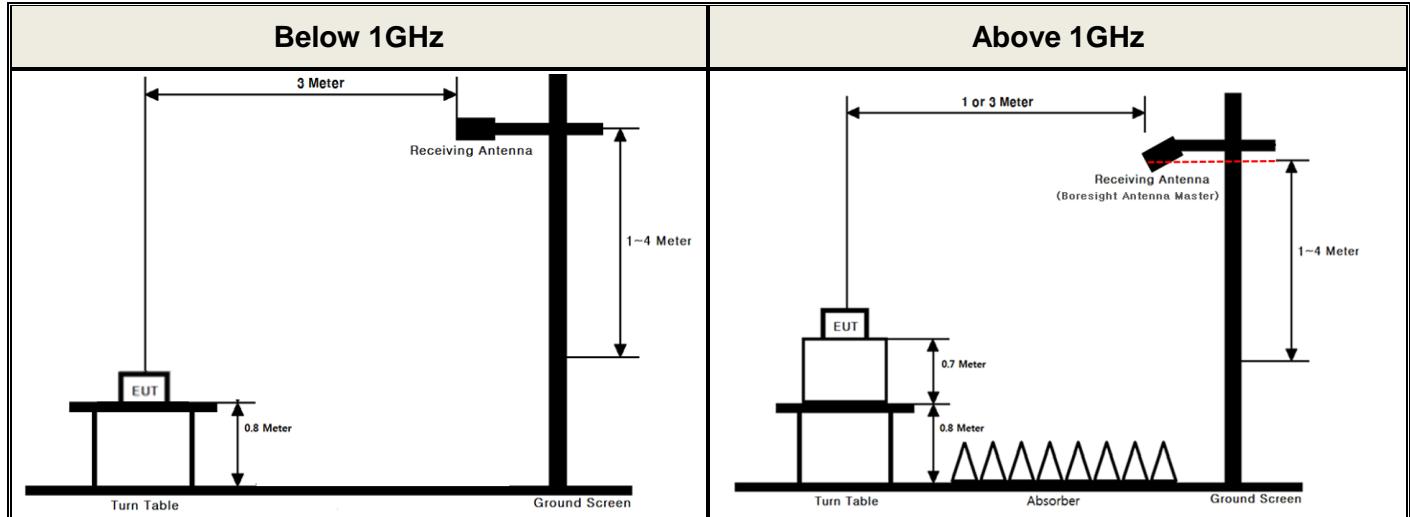

#### ▪ Conducted Measurement

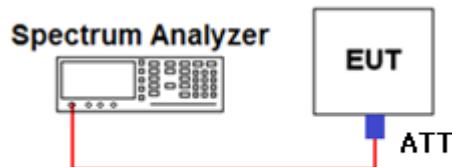

#### Path loss information

Frequency (MHz)	Path Loss (dB)	Frequency (MHz)	Path Loss (dB)
30	9.39	1000	10.38
500	9.93	5000	12.23
902.75 & 914.75 & 927.25	10.30	10000	14.70
-	-	-	-

Note 1 : The path loss from EUT to Spectrum analyzer were measured and used for test.

Path loss ( S/A's Correction factor) = Cable A + Attenuator

## APPENDIX II

## Unwanted Emissions (Radiated) Test Plot

## Lowest &amp; Z &amp; Ver

## Detector Mode : AV

