

# FCC TEST REPORT

For  
Ganeo  
Wireless Charger  
Model No.: TX01

Prepared For : Ganeo  
Address : 5 rue du chateau, 36600 Veuil, Paris, France 75012

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited  
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei  
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,  
China.518102  
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW180926004-01  
Date of Receipt : Sept. 26, 2018  
Date of Test : Sept. 26~Oct. 09, 2018  
Date of Report : Oct. 09, 2018

# Contents

|                                                   |    |
|---------------------------------------------------|----|
| 1. General Information.....                       | 4  |
| 1.1. Client Information.....                      | 4  |
| 1.2. Description of Device (EUT).....             | 4  |
| 1.3. Auxiliary Equipment Used During Test.....    | 4  |
| 1.4. Description of Test Modes.....               | 5  |
| 1.5. Description Of Test Setup.....               | 6  |
| 1.6. Test Equipment List.....                     | 7  |
| 1.7. Description of Test Facility.....            | 8  |
| 2. Summary of Test Results.....                   | 9  |
| 3. Conducted Emission Test.....                   | 10 |
| 3.1. Test Standard and Limit.....                 | 10 |
| 3.2. Test Setup.....                              | 10 |
| 3.3. Test Procedure.....                          | 10 |
| 3.4. Test Data.....                               | 10 |
| 4. Radiation Spurious Emission and Band Edge..... | 15 |
| 4.1. Test Standard and Limit.....                 | 15 |
| 4.2. Test Setup.....                              | 15 |
| 4.3. Test Procedure.....                          | 16 |
| 4.4. Test Data.....                               | 17 |
| 5. Antenna Requirement.....                       | 23 |
| 5.1. Test Standard and Requirement.....           | 23 |
| 5.2. Antenna Connected Construction.....          | 23 |
| APPENDIX I -- TEST SETUP PHOTOGRAPH.....          | 24 |
| APPENDIX II -- EXTERNAL PHOTOGRAPH.....           | 26 |
| APPENDIX III -- INTERNAL PHOTOGRAPH.....          | 30 |

# TEST REPORT

Applicant : Ganeo  
Manufacturer : Shenzhen Pilot Technology Co., Ltd  
Product Name : Wireless Charger  
Model No. : TX01  
Trade Mark : N.A.  
Input: AC 100~240V, 50-60HZ, 1.5A(MAX)  
USB-A Output1: DC 5V, 2.4A  
USB-A Output2: DC 5V, 2.4A  
Rating(s) : USB-A Output3: DC 5V, 2.4A  
USB-C Output(PD) 4: DC 5V, 3.0A/ DC 9V, 2.0A/ DC 12V, 1.5A  
Wireless Output 5: 5W & 7.5W & 10W(Max)  
Total Output: 40W(MAX)

**Test Standard(s) : FCC Part15 Subpart C 2017, Paragraph 15.209**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test

Sept. 26~Oct. 09, 2018

Prepared by



(Engineer / Oliay Yang)

Reviewer

(Supervisor / Snowy Meng)

Approved & Authorized Signer

(Manager / Sally Zhang)



## 1. General Information

### 1.1. Client Information

|              |   |                                                                                                                                 |
|--------------|---|---------------------------------------------------------------------------------------------------------------------------------|
| Applicant    | : | Ganeo                                                                                                                           |
| Address      | : | 5 rue du chateau, 36600 Veuil, Paris, France 75012                                                                              |
| Manufacturer | : | Shenzhen Pilot Technology Co., Ltd                                                                                              |
| Address      | : | A1 Building, No.7 Shankeng Road, Shankeng Industrial Park, Shanxia Community, Pinghu Street, Longgang District, Shenzhen, China |
| Factory      | : | Shenzhen Pilot Technology Co., Ltd                                                                                              |
| Address      | : | A1 Building, No.7 Shankeng Road, Shankeng Industrial Park, Shanxia Community, Pinghu Street, Longgang District, Shenzhen, China |

### 1.2. Description of Device (EUT)

|                                                                                                                              |   |                                                       |              |
|------------------------------------------------------------------------------------------------------------------------------|---|-------------------------------------------------------|--------------|
| Product Name                                                                                                                 | : | Wireless Charger                                      |              |
| Model No.                                                                                                                    | : | TX01                                                  |              |
| Trade Mark                                                                                                                   | : | N.A.                                                  |              |
| Test Power Supply                                                                                                            | : | AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter |              |
| Test Sample No.                                                                                                              | : | S1(Normal Sample), S2(Engineering Sample)             |              |
| Product Description                                                                                                          | : | Operation Frequency:                                  | 111-205KHz   |
|                                                                                                                              |   | Modulation Type:                                      | MSK          |
|                                                                                                                              |   | Antenna Type:                                         | Loop Antenna |
|                                                                                                                              |   | Antenna Gain(Peak):                                   | 0 dBi        |
| Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. |   |                                                       |              |

### 1.3. Auxiliary Equipment Used During Test

|     |  |
|-----|--|
| N/A |  |
|-----|--|

#### 1.4. Description of Test Modes



To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description |
|--------------|-------------|
| Mode 1       | TX mode     |

| For Conducted Emission |             |
|------------------------|-------------|
| Final Test Mode        | Description |
| Mode 1                 | TX mode     |

| For Radiated Emission |             |
|-----------------------|-------------|
| Final Test Mode       | Description |
| Mode 1                | TX mode     |

## 1.5. Description Of Test Setup

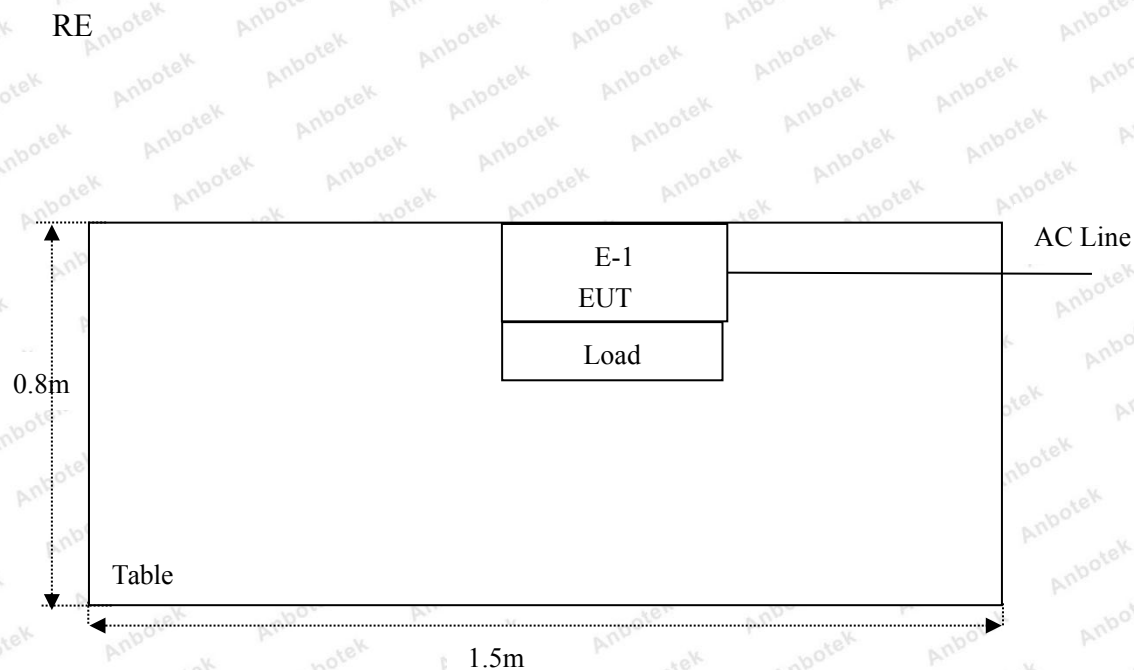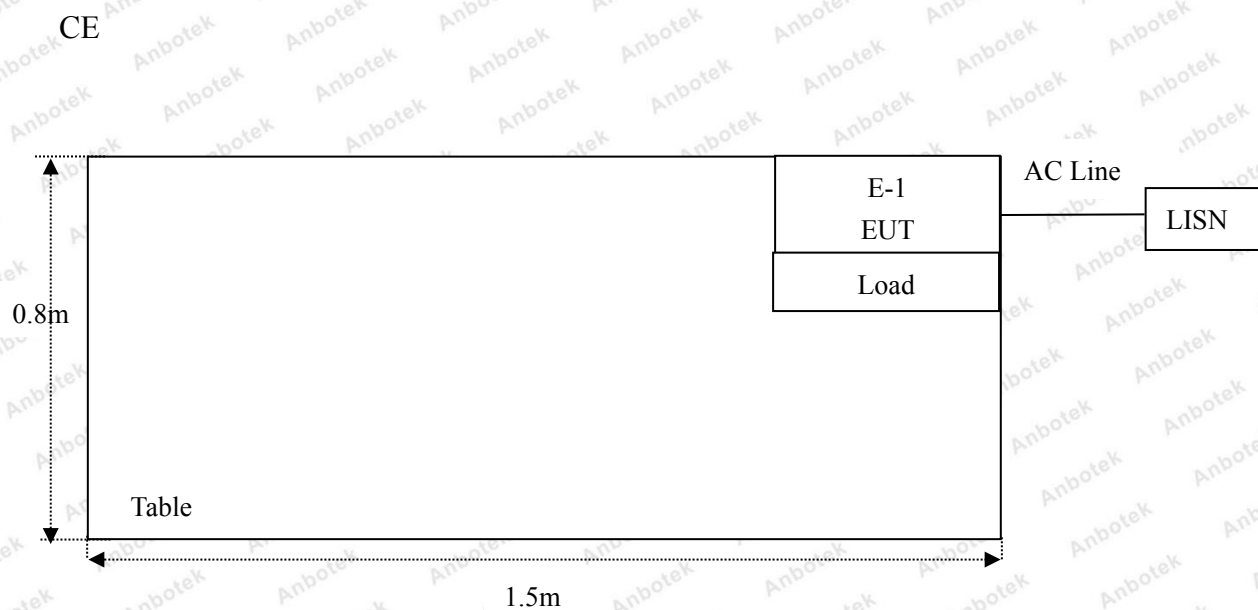



## 1.6. Test Equipment List

| Item | Equipment                                | Manufacturer               | Model No.  | Serial No.    | Last Cal.     | Cal. Interval |
|------|------------------------------------------|----------------------------|------------|---------------|---------------|---------------|
| 1.   | L.I.S.N.<br>Artificial Mains<br>Network  | Rohde & Schwarz            | ENV216     | 100055        | Nov. 17, 2017 | 1 Year        |
| 2.   | EMI Test Receiver                        | Rohde & Schwarz            | ESCI       | 100627        | Nov. 17, 2017 | 1 Year        |
| 3.   | RF Switching Unit                        | Compliance Direction       | RSU-M2     | 38303         | Nov. 17, 2017 | 1 Year        |
| 4.   | Spectrum Analysis                        | Agilent                    | E4407B     | US39390582    | Nov. 17, 2017 | 1 Year        |
| 5.   | MAX Spectrum<br>Analysis                 | Agilent                    | N9020A     | MY51170037    | Nov. 18, 2017 | 1 Year        |
| 6.   | Preamplifier                             | SKET Electronic            | BK1G18G30D | KD17503       | Nov. 17, 2017 | 1 Year        |
| 7.   | Double Ridged Horn<br>Antenna            | Instruments<br>corporation | GTH-0118   | 351600        | Nov. 20, 2017 | 1 Year        |
| 8.   | Bilog Broadband<br>Antenna               | Schwarzbeck                | VULB9163   | VULB 9163-289 | Nov. 20, 2017 | 1 Year        |
| 9.   | Loop Antenna                             | Schwarzbeck                | HFH2-Z2    | 100047        | Nov. 17, 2017 | 1 Year        |
| 10.  | Horn Antenna                             | Schwarzbeck                | BBHA9170   | 9170-375      | Nov. 17, 2017 | 1 Year        |
| 11.  | Pre-amplifier                            | SONOMA                     | 310N       | 186860        | Nov. 17, 2017 | 1 Year        |
| 12.  | EMI Test Software<br>EZ-EMC              | SHURPLE                    | N/A        | N/A           | N/A           | N/A           |
| 13.  | RF Test Control<br>System                | YIHENG                     | YH3000     | 2017430       | Nov. 18, 2017 | 1 Year        |
| 14.  | Power Sensor                             | DAER                       | RPR3006W   | 15I00041SN045 | Nov. 17, 2017 | 1 Year        |
| 15.  | Power Sensor                             | DAER                       | RPR3006W   | 15I00041SN046 | Nov. 17, 2017 | 1 Year        |
| 16.  | MXA Spectrum<br>Analysis                 | Agilent                    | N9020A     | MY51170037    | Nov. 18, 2017 | 1 Year        |
| 17.  | MXG RF Vector Signal<br>Generator        | Agilent                    | N5182A     | MY48180656    | Nov. 18, 2017 | 1 Year        |
| 18.  | Signal Generator                         | Agilent                    | E4421B     | MY41000743    | Nov. 18, 2017 | 1 Year        |
| 19.  | DC Power Supply                          | LW                         | TPR-6410D  | 349315        | Nov. 01, 2017 | 1 Year        |
| 20.  | Constant Temperature<br>Humidity Chamber | Sertep                     | ZJ-HWHS80B | ZJ-17042804   | Nov. 01, 2017 | 1 Year        |

## 1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.: 184111**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

### **ISED-Registration No.: 8058A-1**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

### **Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results


| Standard Section                    | Test Item               | Result |
|-------------------------------------|-------------------------|--------|
| FCC Part 15, Paragraph 15.207       | Conducted Emission Test | PASS   |
| FCC Part 15, Paragraph 15.209(a)(f) | Spurious Emission       | PASS   |
| Part 15.203                         | Antenna Requirement     | PASS   |

### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

| Test Standard                                                                                                                            | FCC Part15 Section 15.207 |                                |               |
|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------------------|---------------|
| Test Limit                                                                                                                               | Frequency                 | Maximum RF Line Voltage (dBuV) |               |
|                                                                                                                                          |                           | Quasi-peak Level               | Average Level |
|                                                                                                                                          | 150kHz~500kHz             | 66 ~ 56 *                      | 56 ~ 46 *     |
|                                                                                                                                          | 500kHz~5MHz               | 56                             | 46            |
|                                                                                                                                          | 5MHz~30MHz                | 60                             | 50            |
| <b>Remark:</b> (1) *Decreasing linearly with logarithm of the frequency.<br>(2) The lower limit shall apply at the transition frequency. |                           |                                |               |

#### 3.2. Test Setup

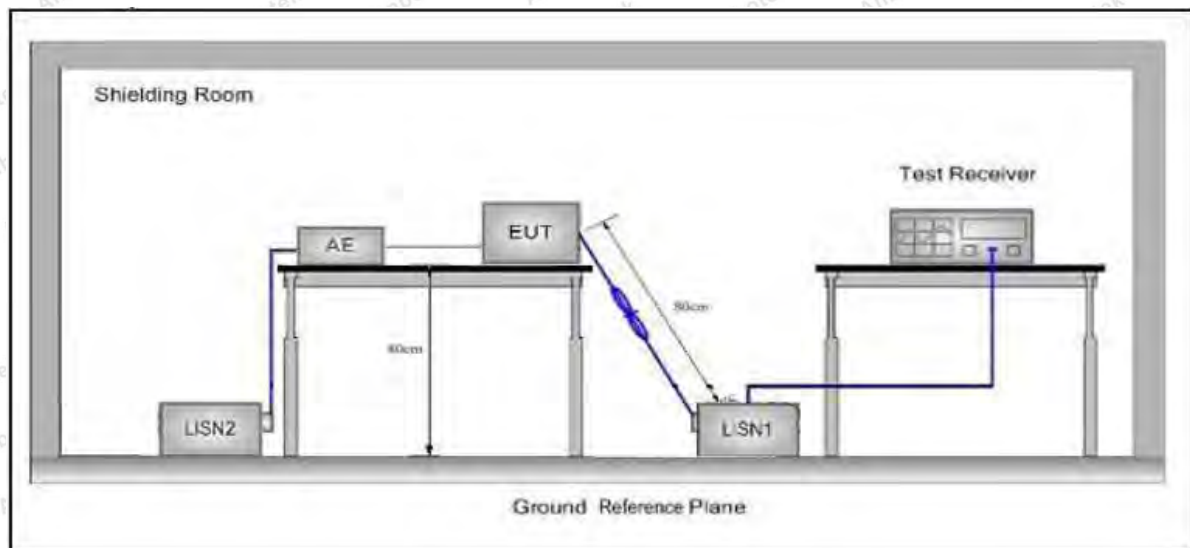

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

Please to see the following pages

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: TX mode  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Live Line  
Tem.: 22.5°C Hum.: 59%

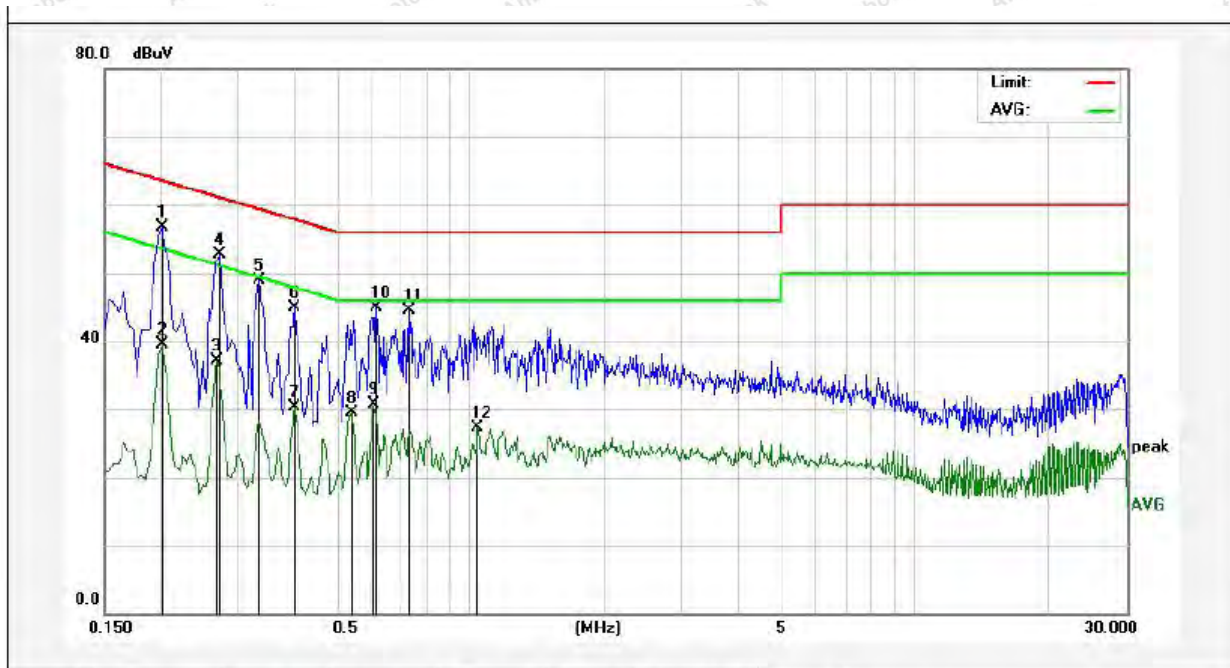


| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1   | 0.2020      | 36.89          | 19.90       | 56.79         | 63.52      | -6.73           | QP       |        |
| 2   | 0.2020      | 19.69          | 19.90       | 39.59         | 53.52      | -13.93          | AVG      |        |
| 3   | 0.2700      | 17.18          | 19.89       | 37.07         | 51.12      | -14.05          | AVG      |        |
| 4   | 0.2740      | 32.78          | 19.89       | 52.67         | 60.99      | -8.32           | QP       |        |
| 5   | 0.3339      | 29.02          | 19.91       | 48.93         | 59.35      | -10.42          | QP       |        |
| 6   | 0.4020      | 25.02          | 19.94       | 44.96         | 57.81      | -12.85          | QP       |        |
| 7   | 0.4020      | 10.32          | 19.94       | 30.26         | 47.81      | -17.55          | AVG      |        |
| 8   | 0.5420      | 9.60           | 19.99       | 29.59         | 46.00      | -16.41          | AVG      |        |
| 9   | 0.6020      | 10.64          | 20.01       | 30.65         | 46.00      | -15.35          | AVG      |        |
| 10  | 0.6140      | 24.82          | 20.01       | 44.83         | 56.00      | -11.17          | QP       |        |
| 11  | 0.7300      | 24.38          | 20.05       | 44.43         | 56.00      | -11.57          | QP       |        |
| 12  | 1.0420      | 7.12           | 20.12       | 27.24         | 46.00      | -18.76          | AVG      |        |



### Conducted Emission Test Data


Test Site: 1# Shielded Room  
Operating Condition: TX mode  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Neutral Line  
Tem.: 22.5°C Hum.: 59%

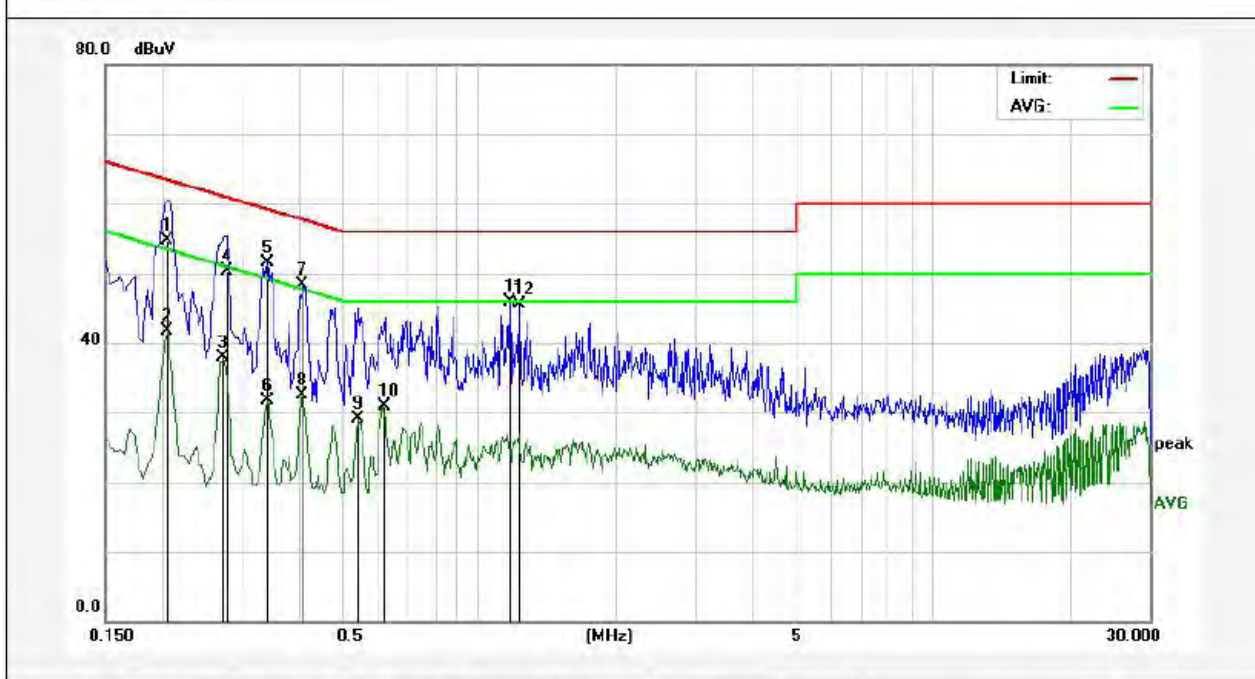

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1   | 0.2060      | 34.77          | 19.90       | 54.67         | 63.36      | -8.69           | QP       |        |
| 2   | 0.2060      | 21.82          | 19.90       | 41.72         | 53.36      | -11.64          | AVG      |        |
| 3   | 0.2740      | 18.01          | 19.89       | 37.90         | 50.99      | -13.09          | AVG      |        |
| 4   | 0.2779      | 30.33          | 19.89       | 50.22         | 60.88      | -10.66          | QP       |        |
| 5   | 0.3420      | 31.52          | 19.91       | 51.43         | 59.15      | -7.72           | QP       |        |
| 6   | 0.3420      | 11.70          | 19.91       | 31.61         | 49.15      | -17.54          | AVG      |        |
| 7   | 0.4100      | 28.38          | 19.94       | 48.32         | 57.65      | -9.33           | QP       |        |
| 8   | 0.4100      | 12.50          | 19.94       | 32.44         | 47.65      | -15.21          | AVG      |        |
| 9   | 0.5420      | 9.08           | 19.99       | 29.07         | 46.00      | -16.93          | AVG      |        |
| 10  | 0.6140      | 10.83          | 20.01       | 30.84         | 46.00      | -15.16          | AVG      |        |
| 11  | 1.1660      | 25.71          | 20.12       | 45.83         | 56.00      | -10.17          | QP       |        |
| 12  | 1.2260      | 25.46          | 20.12       | 45.58         | 56.00      | -10.42          | QP       |        |

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: TX mode  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Live Line  
Tem.: 22.5°C Hum.: 59%

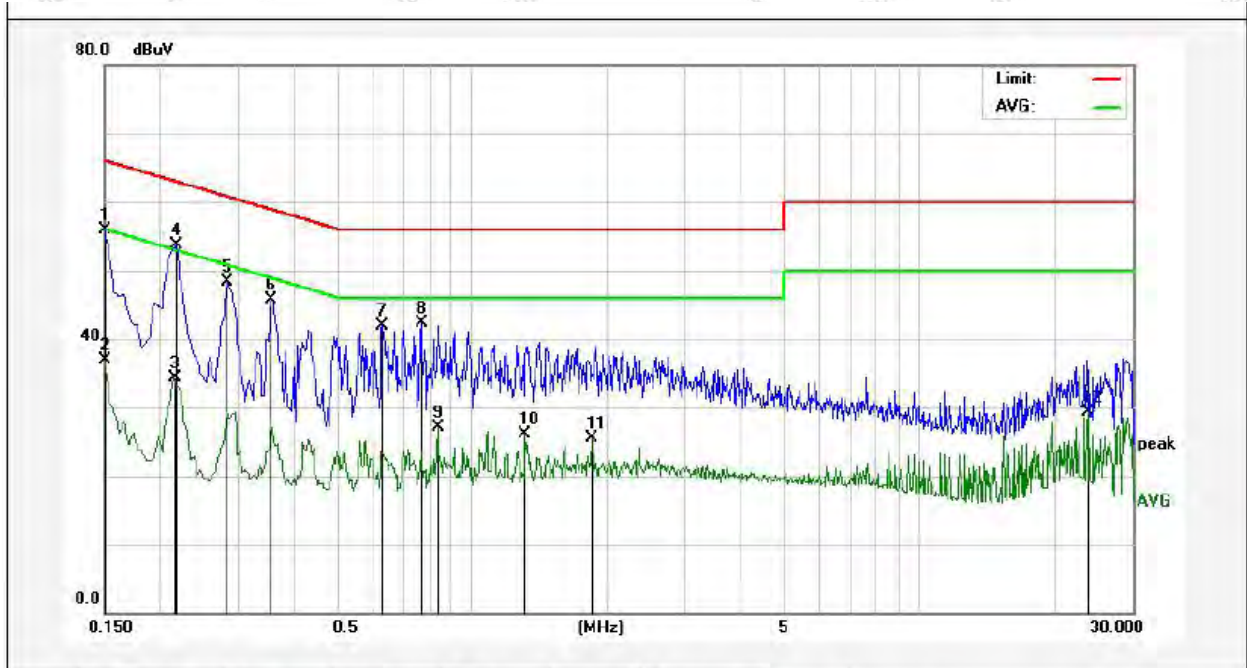


| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1   | 0.1500      | 35.96          | 19.90       | 55.86         | 65.99      | -10.13          | QP       |        |
| 2   | 0.1500      | 17.00          | 19.90       | 36.90         | 55.99      | -19.09          | AVG      |        |
| 3   | 0.2140      | 14.32          | 19.90       | 34.22         | 53.04      | -18.82          | AVG      |        |
| 4   | 0.2180      | 33.72          | 19.90       | 53.62         | 62.89      | -9.27           | QP       |        |
| 5   | 0.2819      | 28.43          | 19.89       | 48.32         | 60.76      | -12.44          | QP       |        |
| 6   | 0.3540      | 25.79          | 19.91       | 45.70         | 58.87      | -13.17          | QP       |        |
| 7   | 0.6300      | 21.89          | 20.02       | 41.91         | 56.00      | -14.09          | QP       |        |
| 8   | 0.7700      | 22.33          | 20.06       | 42.39         | 56.00      | -13.61          | QP       |        |
| 9   | 0.8380      | 7.00           | 20.08       | 27.08         | 46.00      | -18.92          | AVG      |        |
| 10  | 1.3140      | 6.00           | 20.13       | 26.13         | 46.00      | -19.87          | AVG      |        |
| 11  | 1.8500      | 5.37           | 20.14       | 25.51         | 46.00      | -20.49          | AVG      |        |
| 12  | 23.9580     | 8.92           | 20.29       | 29.21         | 50.00      | -20.79          | AVG      |        |



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: TX mode  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Neutral Line  
Tem.: 22.5°C Hum.: 59%

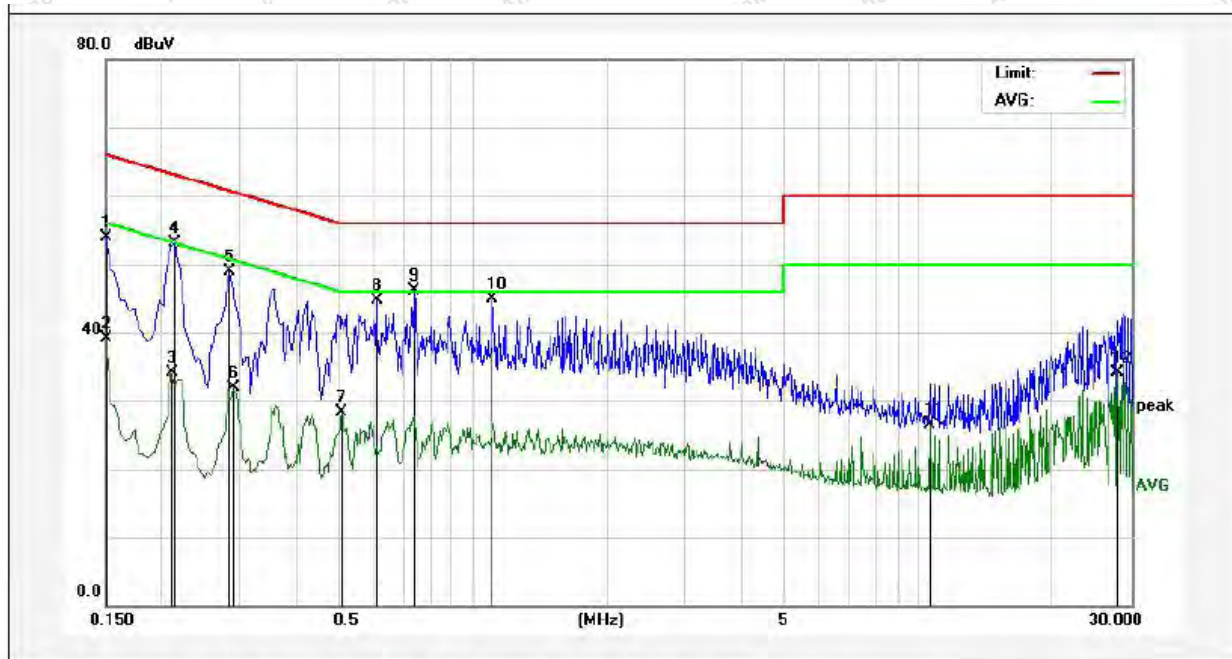

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Over Limit (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-----------------|----------|--------|
| 1   | 0.1500      | 34.00          | 19.90       | 53.90         | 65.99      | -12.09          | QP       |        |
| 2   | 0.1500      | 19.26          | 19.90       | 39.16         | 55.99      | -16.83          | AVG      |        |
| 3   | 0.2100      | 14.27          | 19.90       | 34.17         | 53.20      | -19.03          | AVG      |        |
| 4   | 0.2140      | 33.27          | 19.90       | 53.17         | 63.04      | -9.87           | QP       |        |
| 5   | 0.2860      | 28.95          | 19.89       | 48.84         | 60.64      | -11.80          | QP       |        |
| 6   | 0.2900      | 12.02          | 19.89       | 31.91         | 50.52      | -18.61          | AVG      |        |
| 7   | 0.5100      | 8.39           | 19.98       | 28.37         | 46.00      | -17.63          | AVG      |        |
| 8   | 0.6100      | 24.78          | 20.01       | 44.79         | 56.00      | -11.21          | QP       |        |
| 9   | 0.7420      | 26.01          | 20.05       | 46.06         | 56.00      | -9.94           | QP       |        |
| 10  | 1.1100      | 24.80          | 20.12       | 44.92         | 56.00      | -11.08          | QP       |        |
| 11  | 10.5860     | 6.22           | 20.33       | 26.55         | 50.00      | -23.45          | AVG      |        |
| 12  | 27.9980     | 13.78          | 20.27       | 34.05         | 50.00      | -15.95          | AVG      |        |



## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

| Test Standard | FCC Part15 C Section 15.209 and 15.205 |                                  |                |            |                          |
|---------------|----------------------------------------|----------------------------------|----------------|------------|--------------------------|
| Test Limit    | Frequency (MHz)                        | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark     | Measurement distance (m) |
|               | 0.009MHz~0.490MHz                      | 2400/F(kHz)                      | -              | -          | 300                      |
|               | 0.490MHz-1.705MHz                      | 24000/F(kHz)                     | -              | -          | 30                       |
|               | 1.705MHz-30MHz                         | 30                               | -              | -          | 30                       |
|               | 30MHz~88MHz                            | 100                              | 40.0           | Quasi-peak | 3                        |
|               | 88MHz~216MHz                           | 150                              | 43.5           | Quasi-peak | 3                        |
|               | 216MHz~960MHz                          | 200                              | 46.0           | Quasi-peak | 3                        |
|               | 960MHz~1000MHz                         | 500                              | 54.0           | Quasi-peak | 3                        |
|               | Above 1000MHz                          | 500                              | 54.0           | Average    | 3                        |
|               |                                        | -                                | 74.0           | Peak       | 3                        |

#### Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

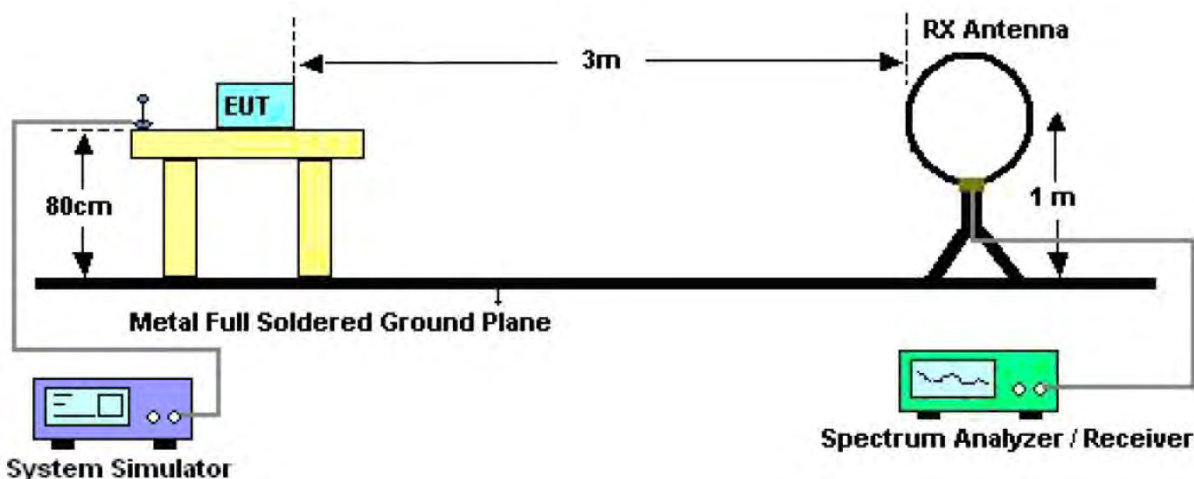


Figure 1. Below 30MHz

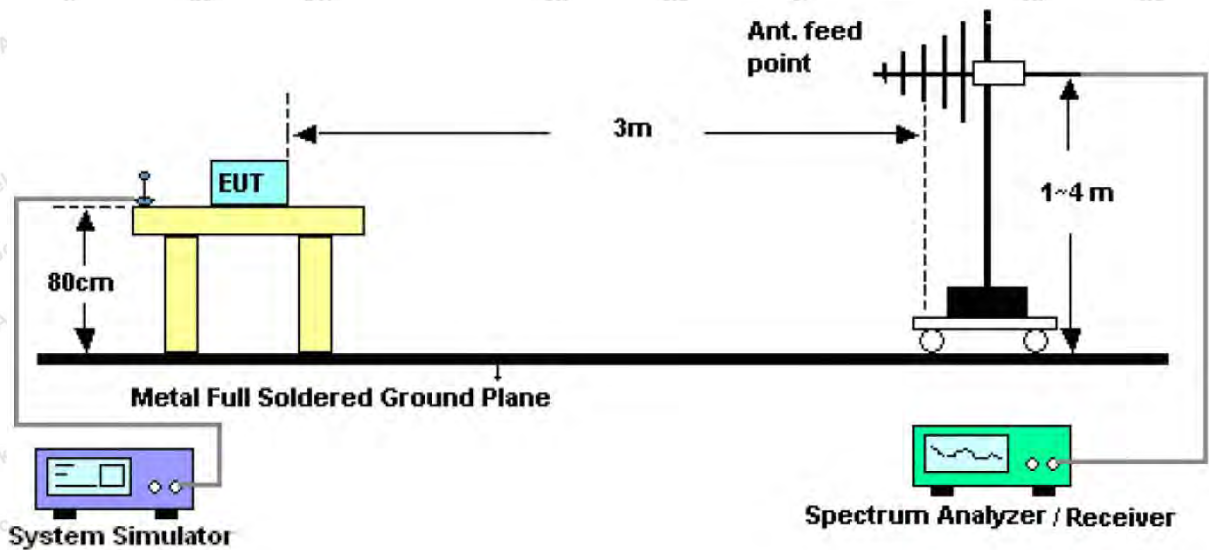


Figure 2. 30MHz to 1GHz

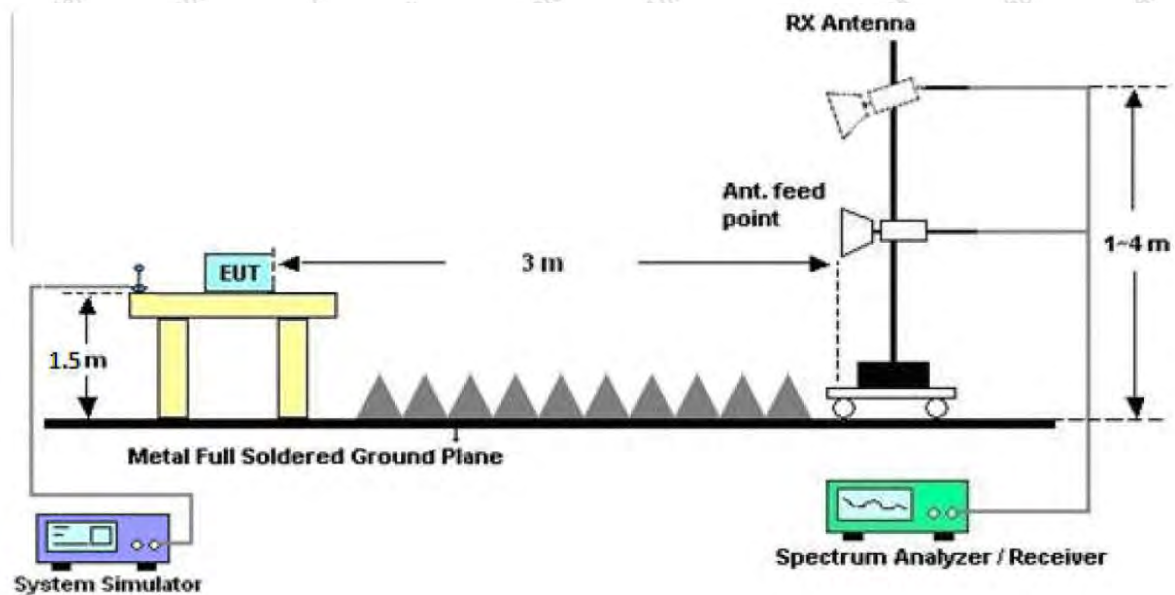


Figure 3. Above 1 GHz

#### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

#### 4.4. Test Data

PASS



## Test Results

(Between 9KHz – 30MHz)

Job No.: SZAWW180926004-01

Standard: FCC PART15 C\_3m


Power Source: AC 120V, 60Hz for adapter

Test item: Radiation Test

Temp.(C)/Hum.(%RH): 24.3(C)/55%RH

Test Mode: Mode 1

Distance: 3m

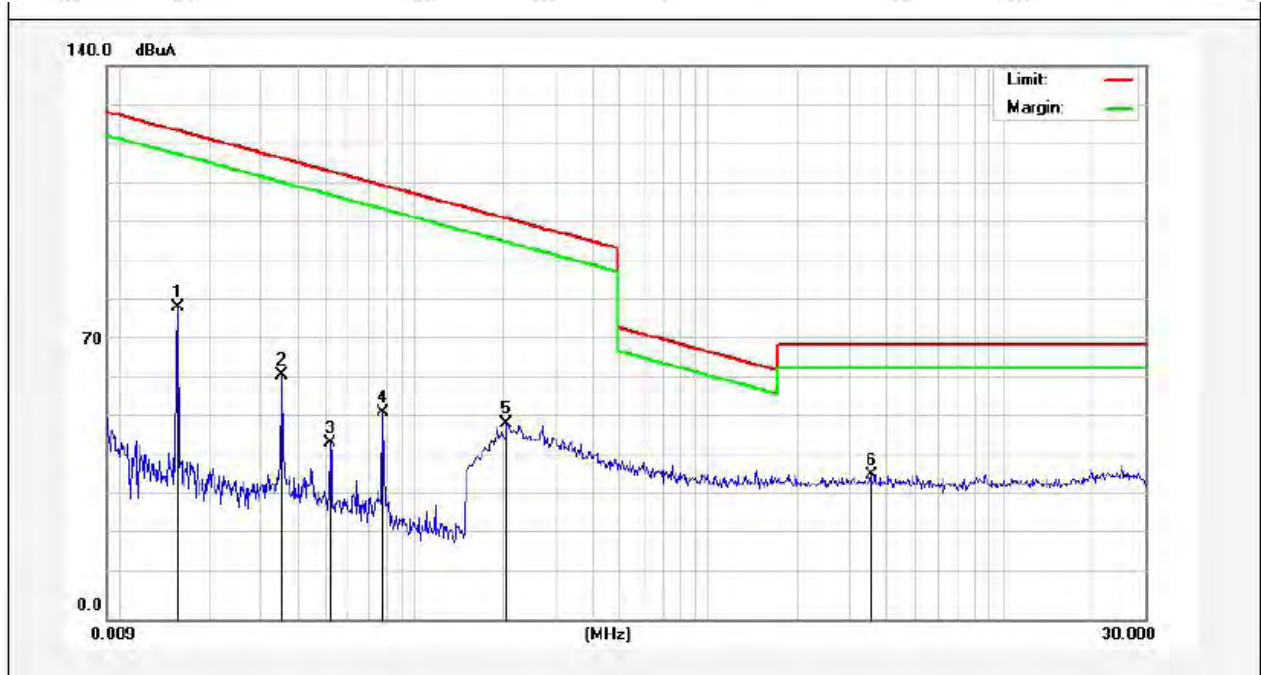


| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | degree (dgc) |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|----------------|-----------------|----------|--------------|
| 0.0157          | 67.42             | 19.27                 | 2.53            | 0                  | 89.22          | 143.52         | -54.30          | Peak     | 240          |
| 0.0157          | 57.29             | 19.27                 | 2.53            | 0                  | 79.09          | 123.52         | -44.43          | AV       | 240          |
| 0.0354          | 49.12             | 19.30                 | 2.53            | 0                  | 70.95          | 136.50         | -65.55          | Peak     | 124          |
| 0.0354          | 39.90             | 19.30                 | 2.53            | 0                  | 61.73          | 116.50         | -54.77          | AV       | 124          |
| 0.0518          | 43.34             | 19.35                 | 2.55            | 0                  | 65.24          | 133.21         | -67.97          | Peak     | 95           |
| 0.0518          | 22.88             | 19.35                 | 2.55            | 0                  | 44.78          | 113.21         | -68.43          | AV       | 95           |
| 0.0781          | 41.64             | 19.35                 | 2.55            | 0                  | 63.54          | 129.66         | -66.12          | Peak     | 250          |
| 0.0781          | 30.34             | 19.35                 | 2.55            | 0                  | 52.24          | 109.66         | -57.42          | AV       | 250          |
| 0.2060          | 36.33             | 20.73                 | 2.60            | 0                  | 59.66          | 121.28         | -61.62          | Peak     | 330          |
| 0.2060          | 26.25             | 20.73                 | 2.60            | 0                  | 49.58          | 101.28         | -51.70          | AV       | 330          |
| 3.5420          | 12.18             | 21.83                 | 2.72            | 0                  | 36.73          | 69.54          | -32.81          | QP       | 100          |

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

(Between 30MHz -1000 MHz)

|                   |                          |                            |                                  |
|-------------------|--------------------------|----------------------------|----------------------------------|
| <b>Job No.:</b>   | <b>SZAWW180926004-01</b> | <b>Polarization:</b>       | <b>Horizontal</b>                |
| <b>Standard:</b>  | <b>FCC PART15 C _3m</b>  | <b>Power Source:</b>       | <b>AC 120V, 60Hz for adapter</b> |
| <b>Test item:</b> | <b>Radiation Test</b>    | <b>Temp.(C)/Hum.(%RH):</b> | <b>23.2(C)/54%RH</b>             |
| <b>Test Mode:</b> | <b>Mode 1</b>            | <b>Distance:</b>           | <b>3m</b>                        |

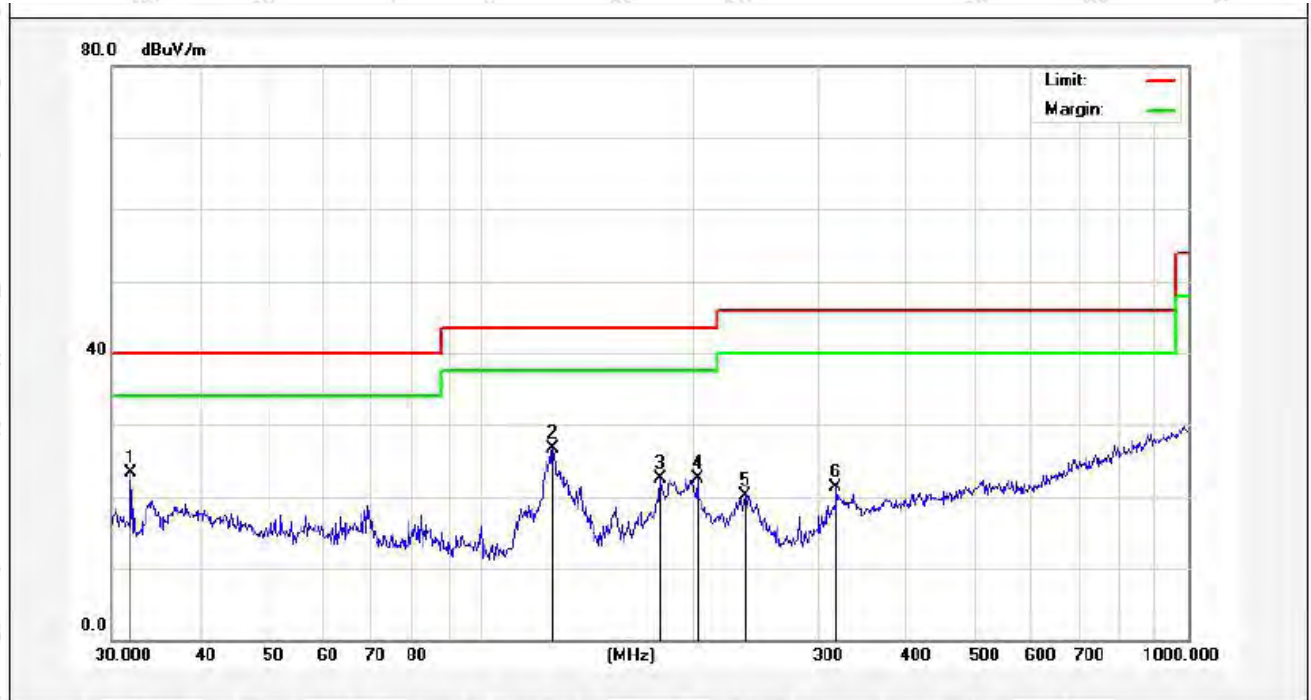

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/ | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|--------------|-----------------|----------|-------------|--------------|--------|
| 1   | 31.9546     | 41.38            | -17.98        | 23.40           | 40.00        | -16.60          | QP       | 300         | 32           |        |
| 2   | 126.3286    | 48.22            | -21.57        | 26.65           | 43.50        | -16.85          | QP       | 300         | 164          |        |
| 3   | 179.3863    | 42.28            | -19.83        | 22.45           | 43.50        | -21.05          | QP       | 300         | 197          |        |
| 4   | 202.1005    | 41.37            | -18.92        | 22.45           | 43.50        | -21.05          | QP       | 300         | 221          |        |
| 5   | 235.8164    | 37.96            | -17.87        | 20.09           | 46.00        | -25.91          | QP       | 300         | 263          |        |
| 6   | 317.7011    | 36.78            | -15.54        | 21.24           | 46.00        | -24.76          | QP       | 300         | 324          |        |




**Job No.:** SZAWW180926004-01  
**Standard:** FCC PART15 C\_3m  
**Test item:** Radiation Test  
**Test Mode:** Mode 1  
**Polarization:** Vertical  
**Power Source:** AC 120V, 60Hz for adapter  
**Temp.(C)/Hum.(%RH):** 23.2(C)/54%RH  
**Distance:** 3m



| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|--------------|-----------------|----------|-------------|--------------|--------|
| 1   | 30.8535     | 44.38            | -17.31        | 27.07           | 40.00        | -12.93          | QP       | 300         | 14           |        |
| 2   | 39.1616     | 41.98            | -13.82        | 28.16           | 40.00        | -11.84          | QP       | 300         | 67           |        |
| 3   | 68.3908     | 45.69            | -19.20        | 26.49           | 40.00        | -13.51          | QP       | 300         | 119          |        |
| 4   | 78.9652     | 47.13            | -19.95        | 27.18           | 40.00        | -12.82          | QP       | 300         | 246          |        |
| 5   | 125.8864    | 48.36            | -16.20        | 32.16           | 43.50        | -11.34          | QP       | 300         | 291          |        |
| 6   | 197.8928    | 44.07            | -14.88        | 29.19           | 43.50        | -14.31          | QP       | 300         | 347          |        |



|                   |                          |                            |                                  |
|-------------------|--------------------------|----------------------------|----------------------------------|
| <b>Job No.:</b>   | <b>SZAWW180926004-01</b> | <b>Polarization:</b>       | <b>Horizontal</b>                |
| <b>Standard:</b>  | <b>FCC PART15 C_3m</b>   | <b>Power Source:</b>       | <b>AC 240V, 60Hz for adapter</b> |
| <b>Test item:</b> | <b>Radiation Test</b>    | <b>Temp.(C)/Hum.(%RH):</b> | <b>23.2(C)/54%RH</b>             |
| <b>Test Mode:</b> | <b>Mode 1</b>            | <b>Distance:</b>           | <b>3m</b>                        |

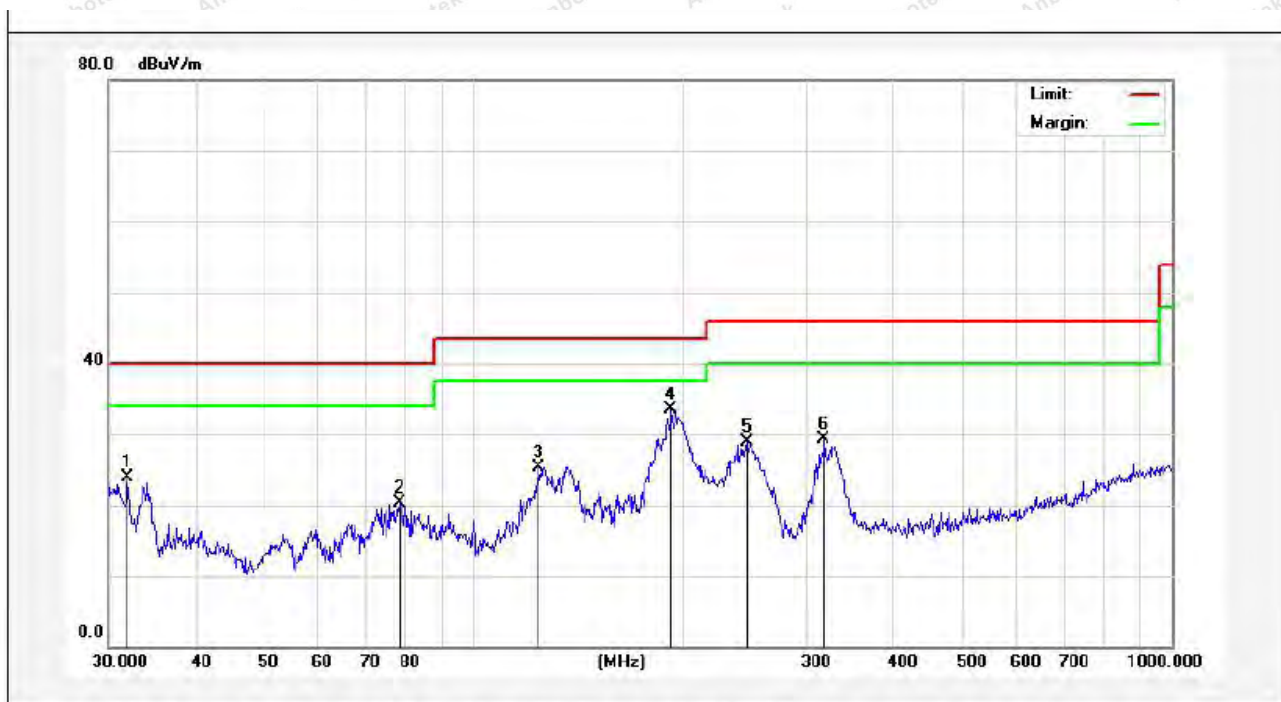

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/ | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|--------------|-----------------|----------|-------------|--------------|--------|
| 1   | 31.9546     | 41.86            | -17.98        | 23.88           | 40.00        | -16.12          | QP       | 300         | 23           |        |
| 2   | 78.4133     | 42.62            | -22.40        | 20.22           | 40.00        | -19.78          | QP       | 300         | 114          |        |
| 3   | 124.1330    | 46.79            | -21.50        | 25.29           | 43.50        | -18.21          | QP       | 300         | 162          |        |
| 4   | 191.7450    | 53.26            | -19.74        | 33.52           | 43.50        | -9.98           | QP       | 300         | 274          |        |
| 5   | 245.9509    | 46.68            | -17.82        | 28.86           | 46.00        | -17.14          | QP       | 300         | 295          |        |
| 6   | 317.7011    | 44.92            | -15.54        | 29.38           | 46.00        | -16.62          | QP       | 300         | 351          |        |

|                   |                          |                            |                                  |
|-------------------|--------------------------|----------------------------|----------------------------------|
| <b>Job No.:</b>   | <b>SZAWW180926004-01</b> | <b>Polarization:</b>       | <b>Vertical</b>                  |
| <b>Standard:</b>  | <b>FCC PART15 C_3m</b>   | <b>Power Source:</b>       | <b>AC 240V, 60Hz for adapter</b> |
| <b>Test item:</b> | <b>Radiation Test</b>    | <b>Temp.(C)/Hum.(%RH):</b> | <b>23.2(C)/54%RH</b>             |
| <b>Test Mode:</b> | <b>Mode 1</b>            | <b>Distance:</b>           | <b>3m</b>                        |



| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/ | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|--------------|-----------------|----------|-------------|--------------|--------|
| 1   | 67.2022     | 45.12            | -18.74        | 26.38           | 40.00        | -13.62          | QP       | 300         | 36           |        |
| 2   | 75.7114     | 49.90            | -20.47        | 29.43           | 40.00        | -10.57          | QP       | 300         | 94           |        |
| 3   | 123.2655    | 44.53            | -15.82        | 28.71           | 43.50        | -14.79          | QP       | 300         | 125          |        |
| 4   | 137.9028    | 46.42            | -17.35        | 29.07           | 43.50        | -14.43          | QP       | 300         | 173          |        |
| 5   | 195.1365    | 43.68            | -14.89        | 28.79           | 43.50        | -14.71          | QP       | 300         | 237          |        |
| 6   | 239.1473    | 36.58            | -13.52        | 23.06           | 46.00        | -22.94          | QP       | 300         | 351          |        |




## 5. Antenna Requirement

### 5.1. Test Standard and Requirement

|               |                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Standard | FCC Part15 Section 15.203                                                                                                                                                                                                                                                                                                                                                                      |
| Requirement   | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard |

### 5.2. Antenna Connected Construction

The antenna is a Loop Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

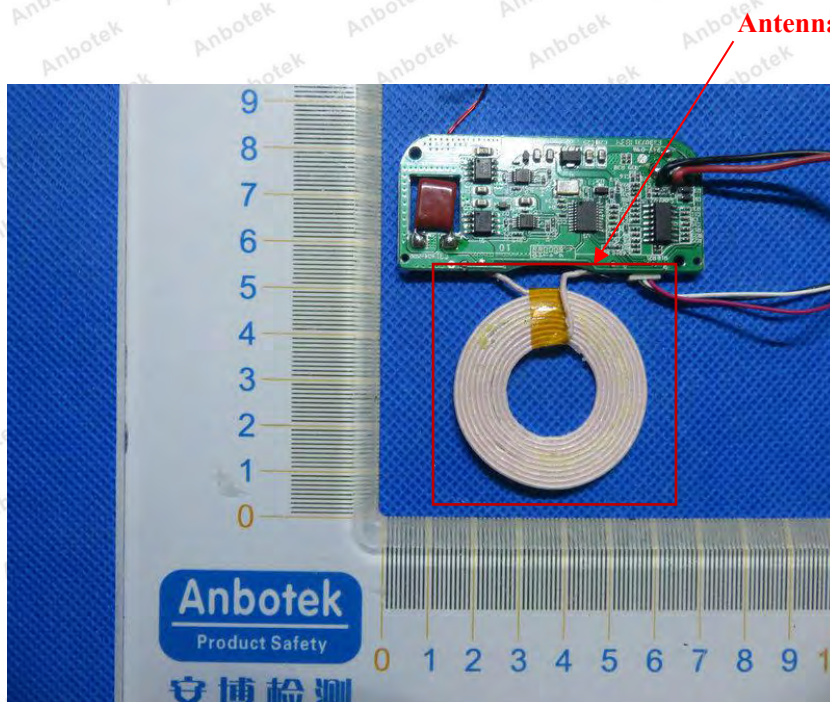




## APPENDIX I-- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test



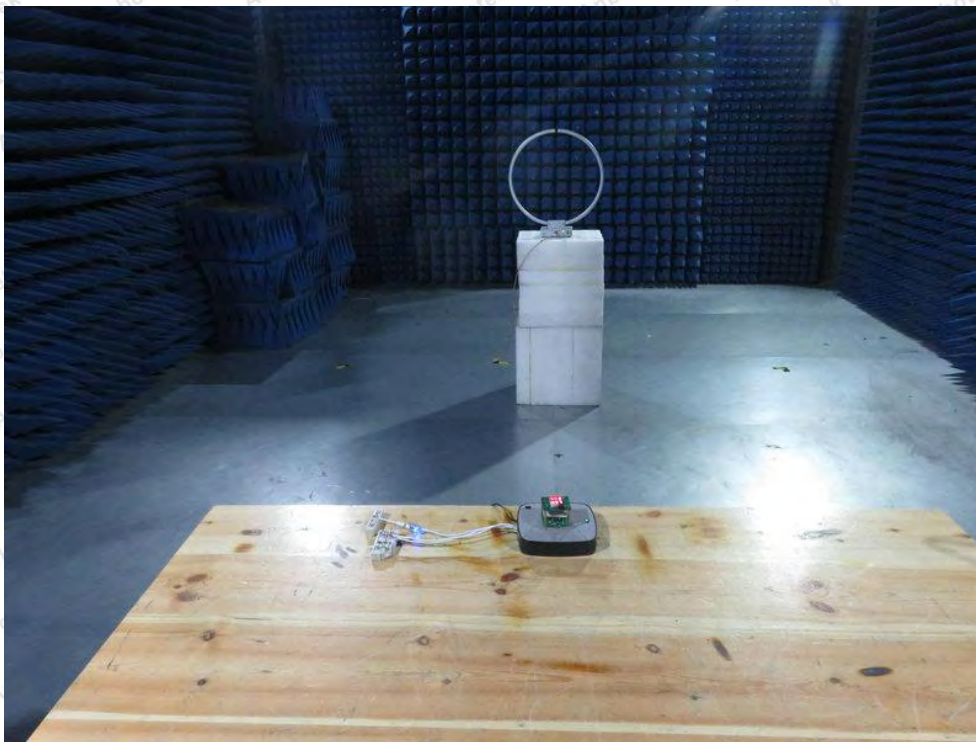



## APPENDIX II -- EXTERNAL PHOTOGRAPH


















## APPENDIX III -- INTERNAL PHOTOGRAPH







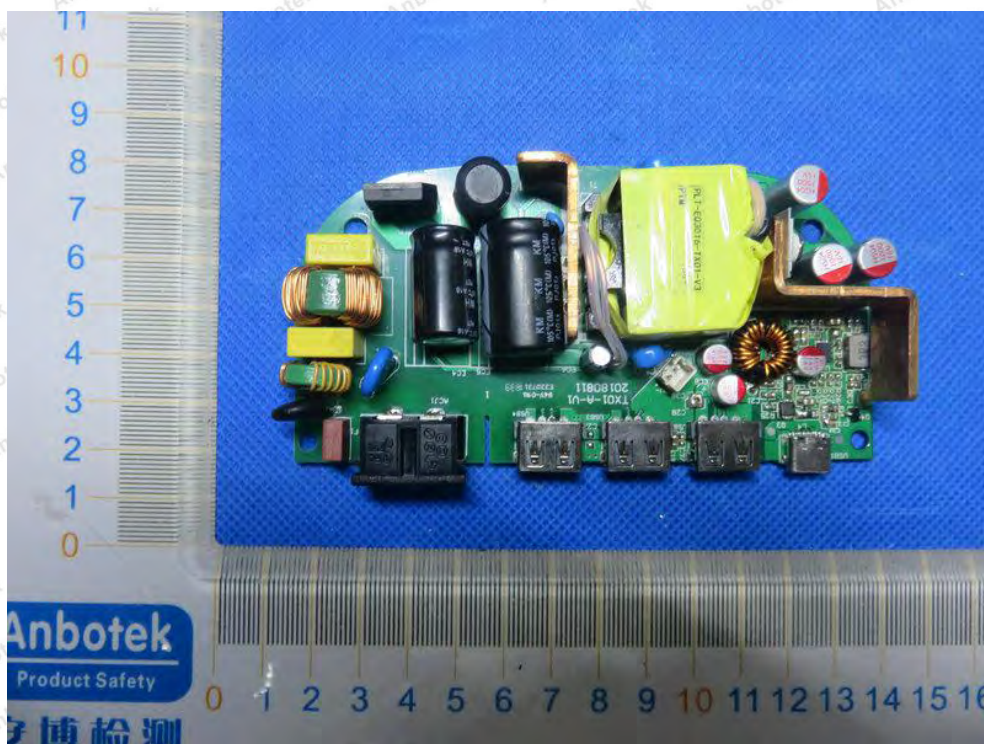








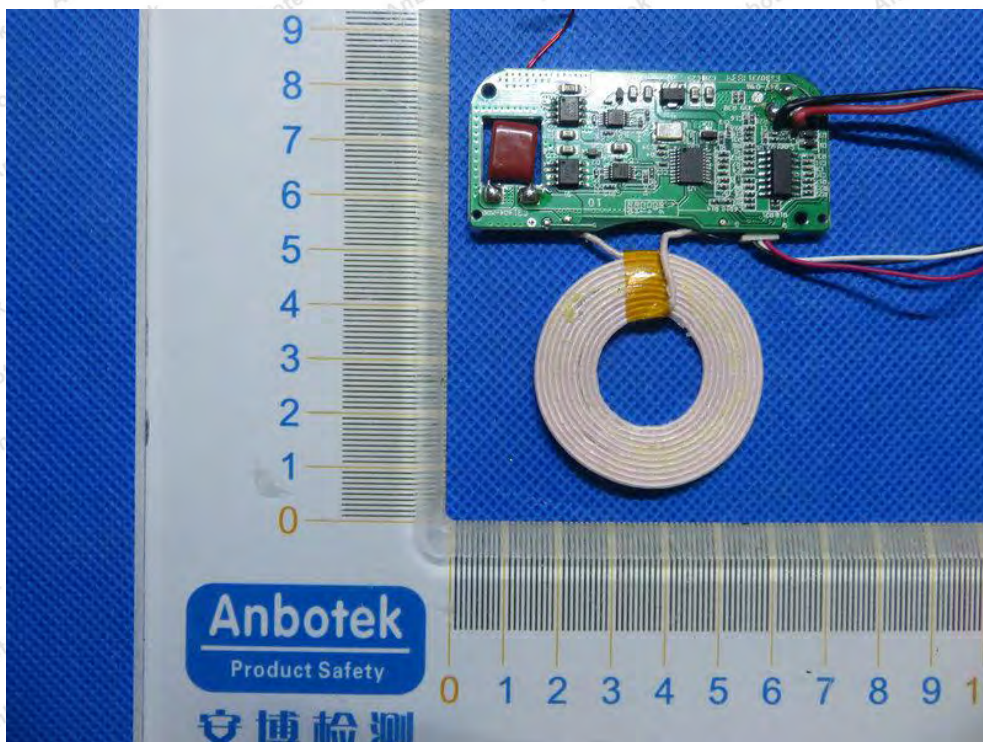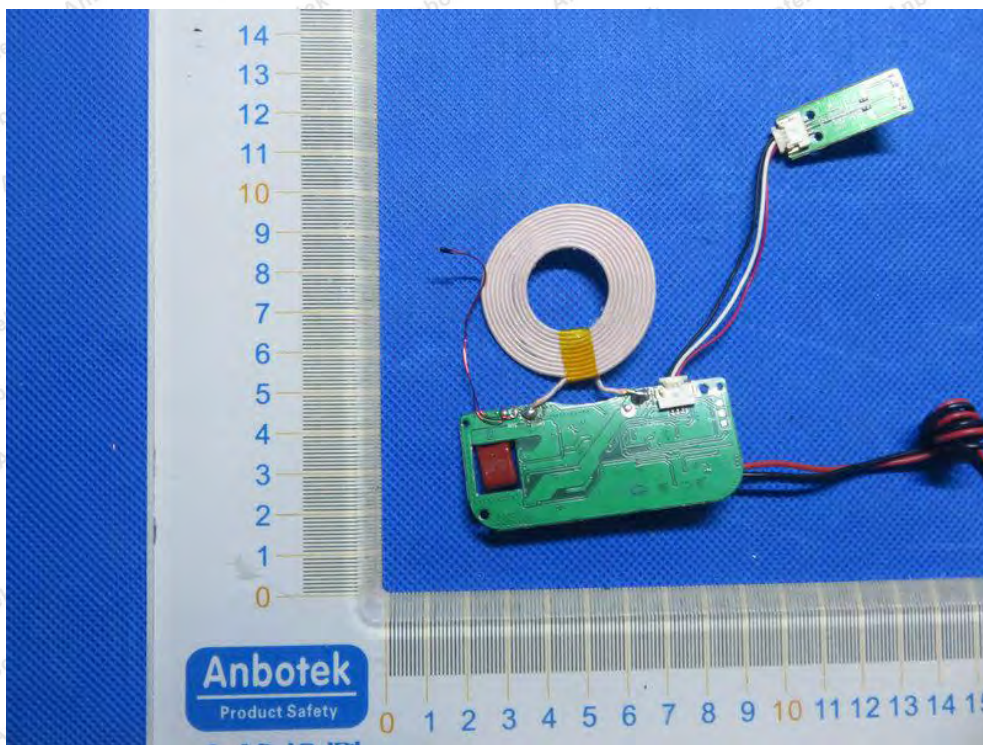



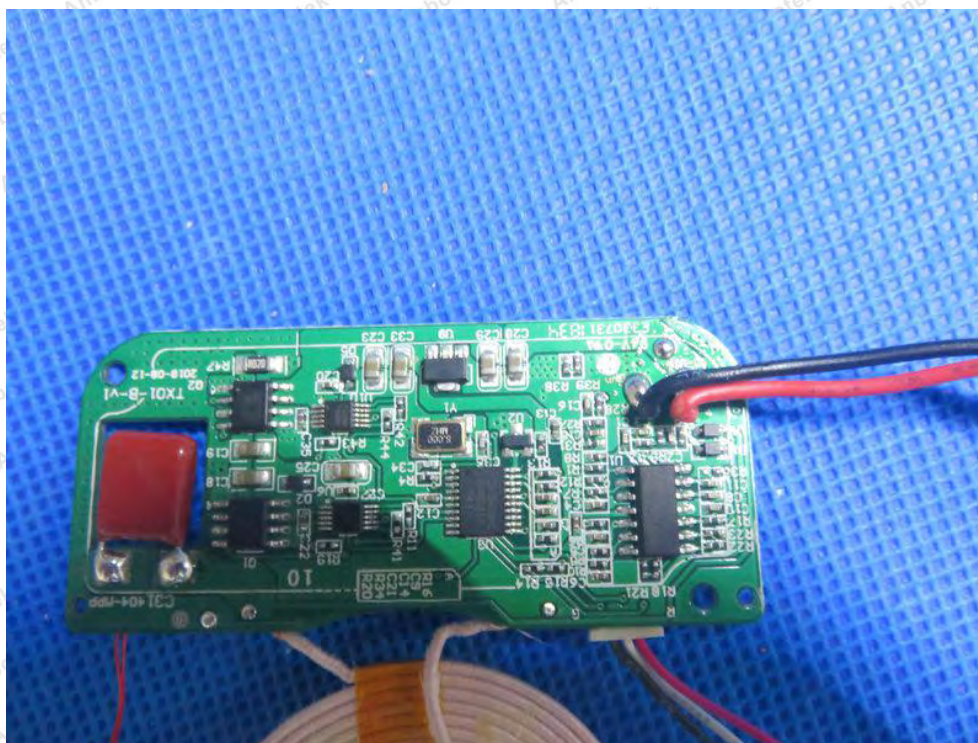

----- End of Report -----