



FCC RADIO TEST REPORT

FCC ID : 2ARIW-2778
Equipment : Digital Media Receiver
Model name : C78MP8
Applicant : L Laury LLC
3340 Peachtree Rd, Suite 1800
Atlanta, Georgia, 30326
Standard : FCC Part 15 Subpart E §15.407

The product was completed on Feb. 21, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	17
3.5 AC Conducted Emission Measurement.....	22
3.6 Automatically Discontinue Transmission	24
3.7 Antenna Requirements.....	26
4 List of Measuring Equipment.....	27
5 Uncertainty of Evaluation	28
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR8O2938-01E	01	Initial issue of report	Mar. 14, 2019



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass
3.1	2.1049	99% Occupied Bandwidth	Reporting only
3.2	15.407 (a)	Maximum Conducted Output Power	Pass
3.3	15.407 (a)	Power Spectral Density	Pass
3.4	15.407(b)	Unwanted Emissions	Pass
3.5	15.207	AC Conducted Emission	Pass
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Natasha Hsieh

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	C78MP8
FCC ID	2ARIW-2778
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	802.11a : 18.30 dBm / 0.0676 W 802.11n HT20 : 18.20 dBm / 0.0661 W 802.11n HT40 : 18.10 dBm / 0.0646 W 802.11ac VHT20 : 18.00 dBm / 0.0631 W 02.11ac VHT40 : 18.00 dBm / 0.0631 W 02.11ac VHT80 : 17.80 dBm / 0.0603 W
99% Occupied Bandwidth	802.11a : 16.75 MHz 802.11n HT20 : 17.85 MHz 802.11n HT40 : 36.70 MHz 802.11 ac VHT80: 77.28 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)
Antenna Type / Gain	Printed Inverted-F Antenna with gain 4.00 dBi

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH16-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No. TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + Play News + Speaker + Charging from Adapter

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

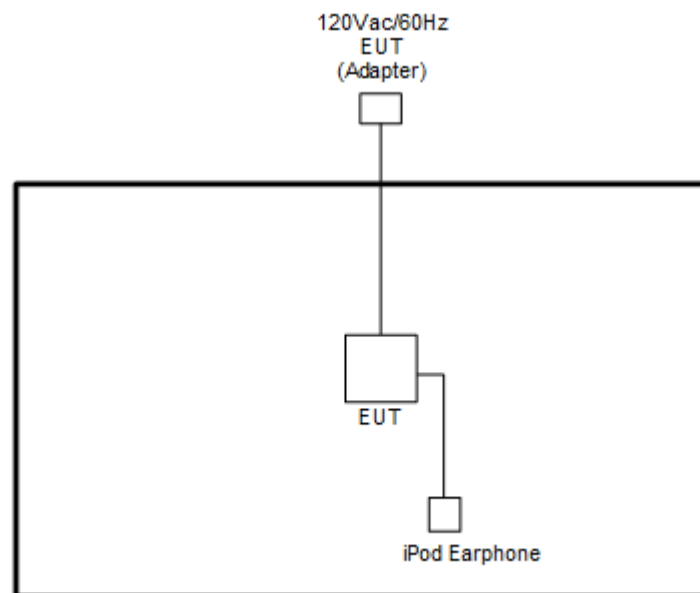
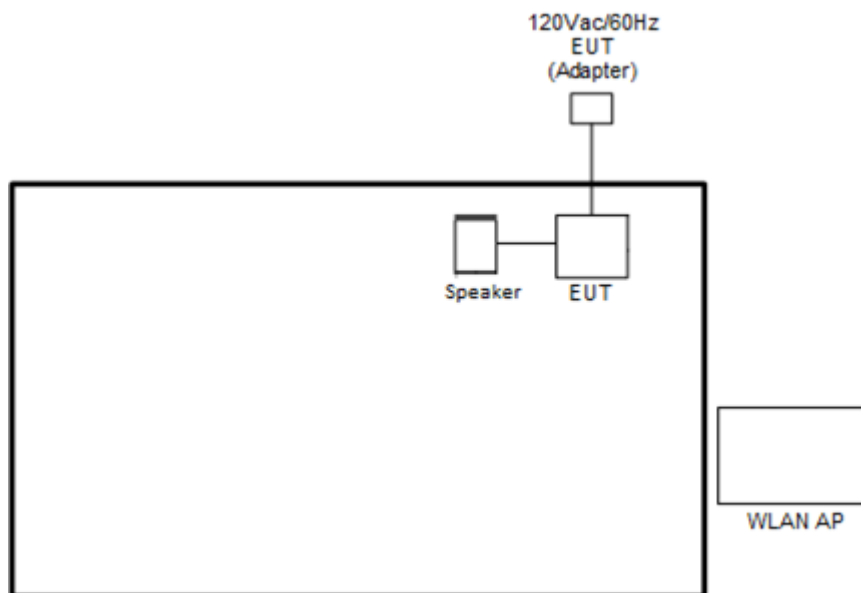
<AC Conducted Emission Mode>

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "Compliance" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

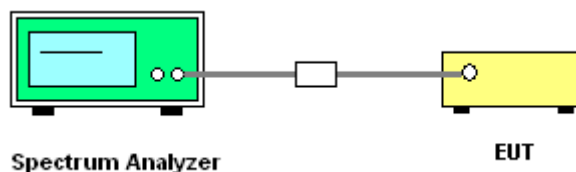

3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

Minimum 6dB Bandwidth

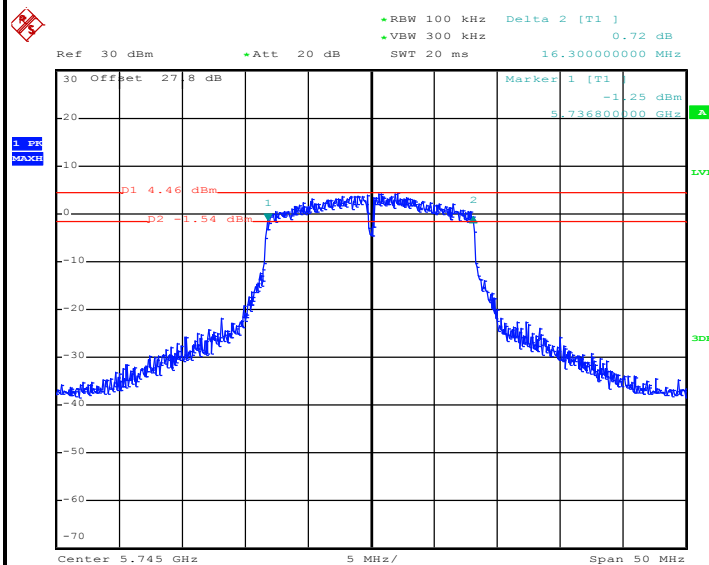


Date: 8.FEB.2019 03:43:07

Maximum 26dB Bandwidth

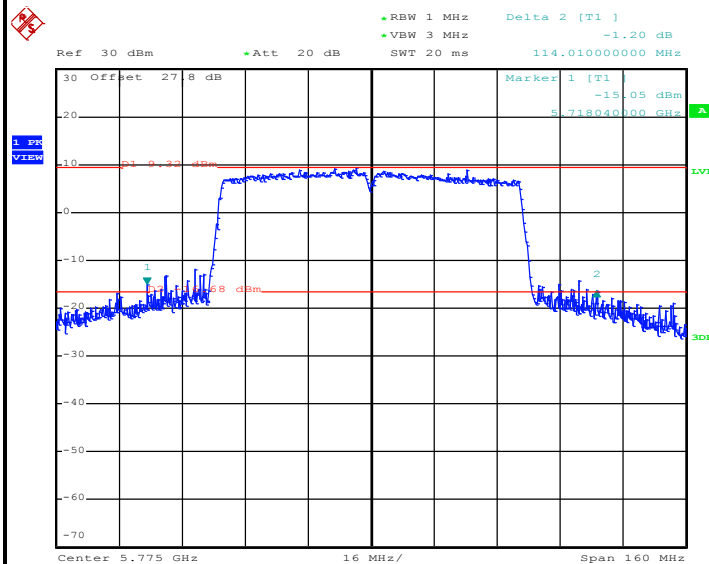

Date: 8.FEB.2019 04:27:14

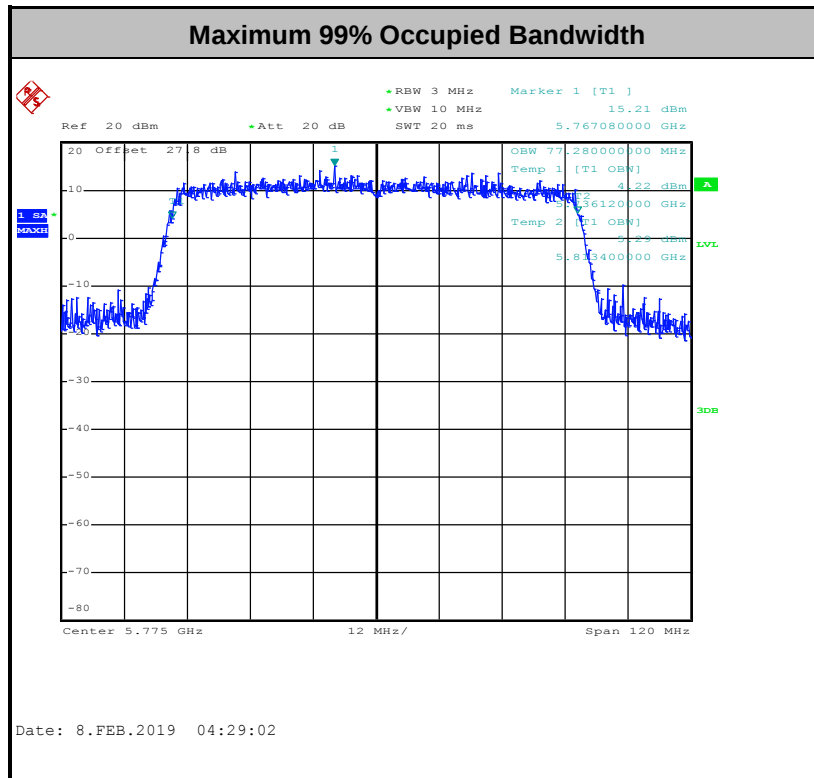

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup



3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
-
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

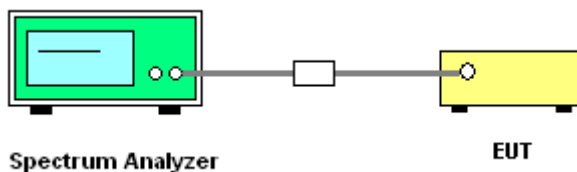

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

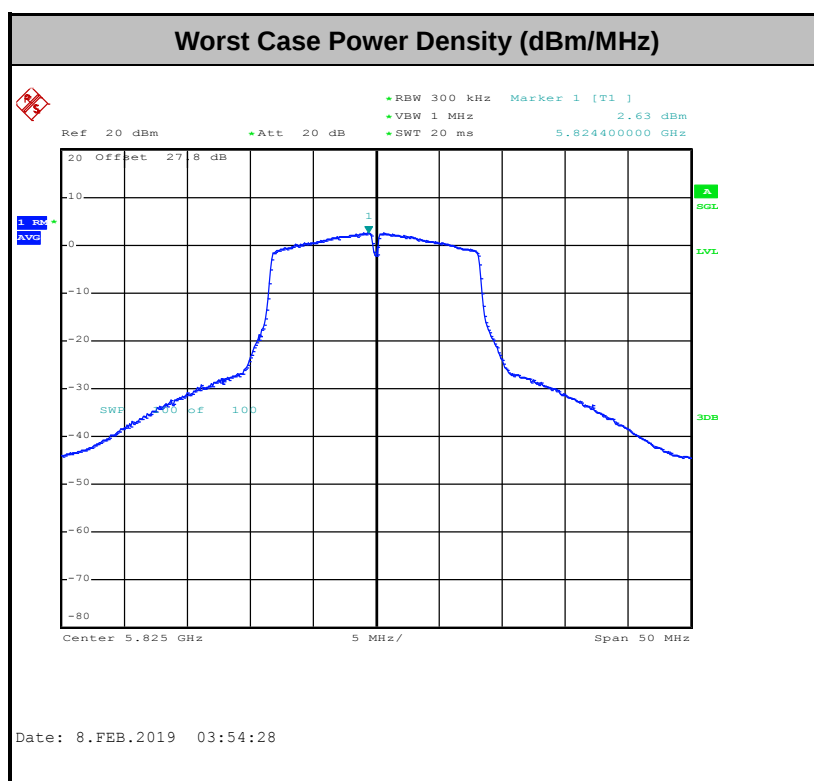

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW ≥ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold




(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
 3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
 4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
 5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
 6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
 7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

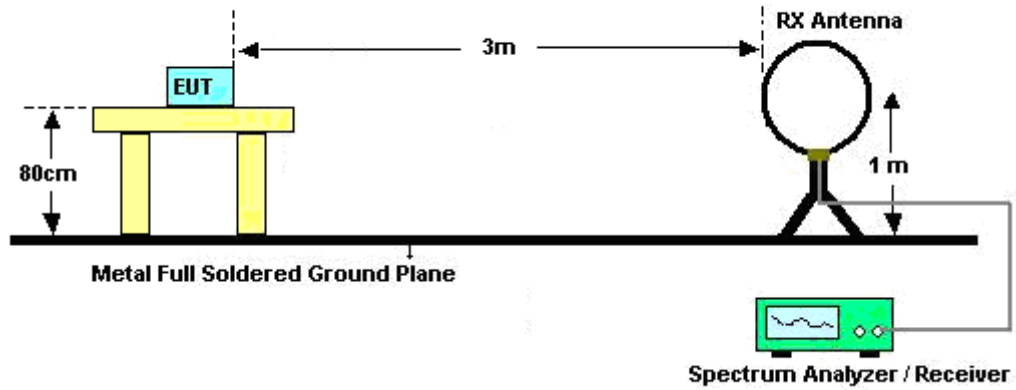

For radiated emissions from 30MHz to 1GHz

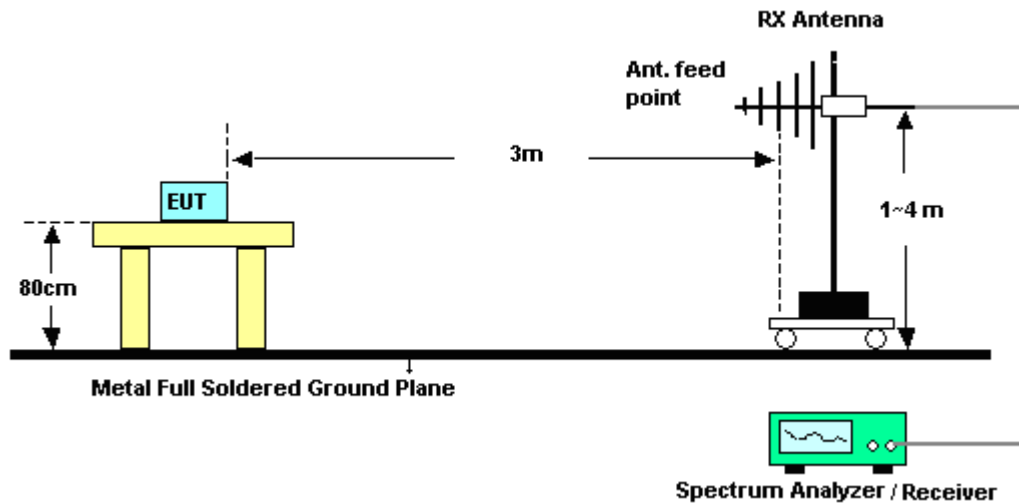

For radiated emissions above 1GHz

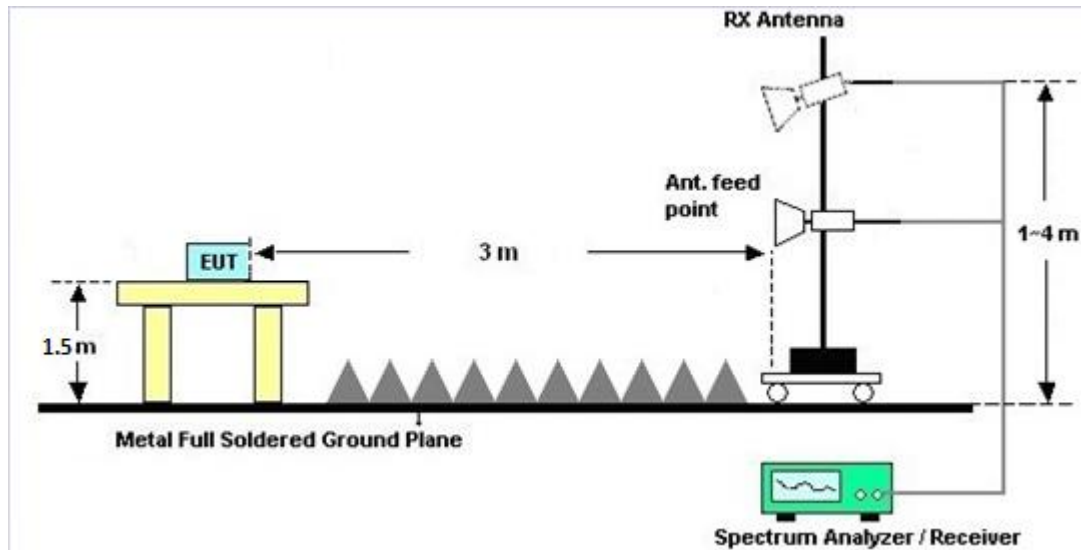

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

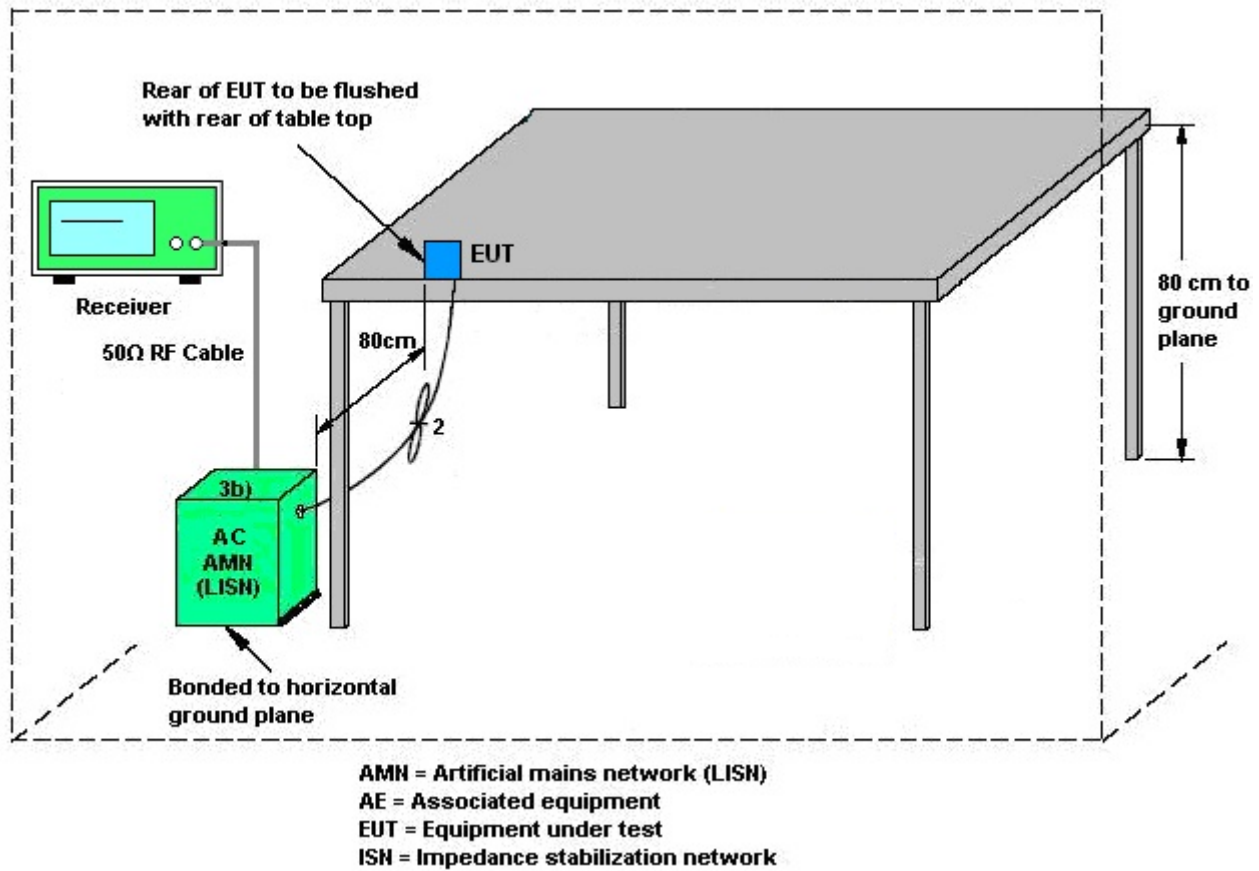

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

EUT is verified this characteristic during the function check of normal sample associated with an access point:

- A. Information start: make EUT supply information to the access point.
- B. Information stop: stop supplying information to the access point.


While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

- C. Information start: make EUT supply information to the access point again.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



5745MHz

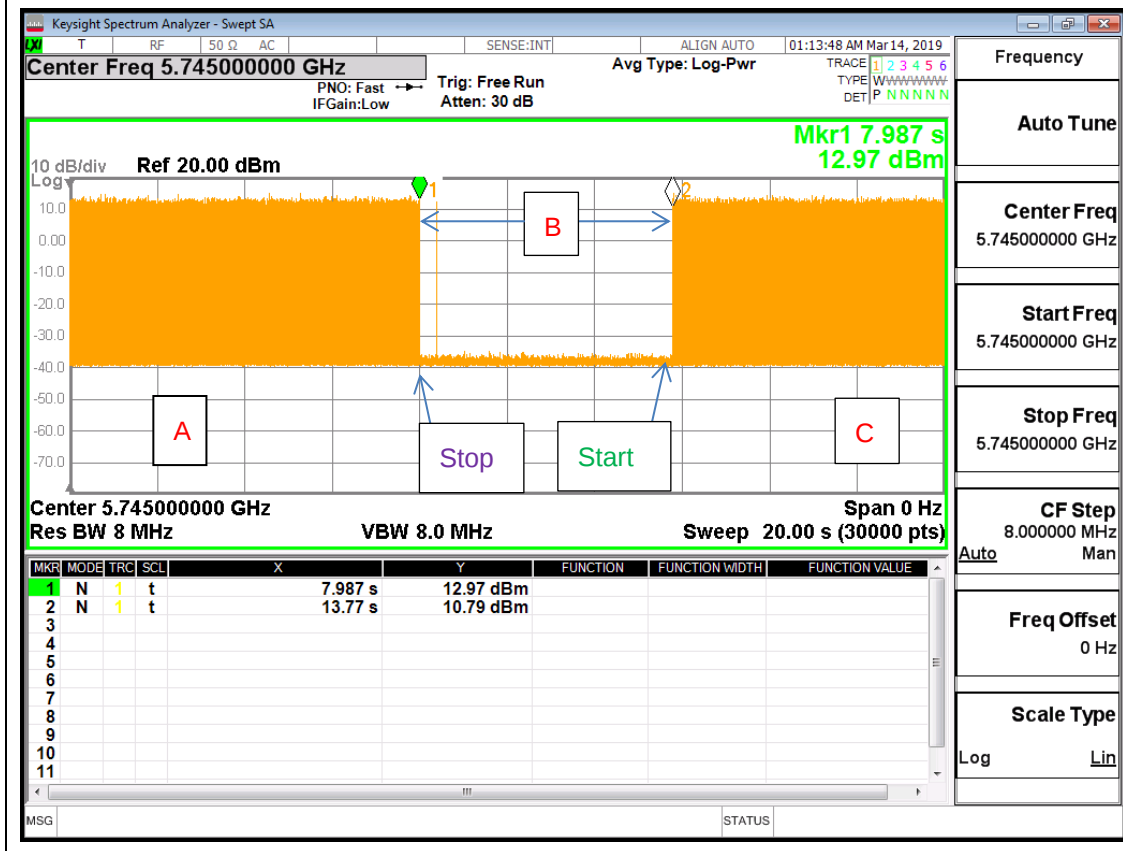

Note : The control / signalling information during the period B is precluded.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Sensor	DARE	RadiPower	15I00041S NO09	10MHz~6GHz	May 07, 2018	Jan. 29, 2019~ Feb. 08, 2019	May 06, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz~40GHz	Nov. 21, 2018	Jan. 29, 2019~ Feb. 08, 2019	Nov. 20, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Apr. 17, 2018	Jan. 29, 2019~ Feb. 08, 2019	Apr. 16, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000 W	N/A	N/A	N/A	Feb. 14, 2019	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9KHz~3.6GHz	Nov. 12, 2018	Feb. 14, 2019	Nov. 11, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 14, 2018	Feb. 14, 2019	Nov. 13, 2019	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 09, 2018	Feb. 14, 2019	Nov. 08, 2019	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 14, 2019	N/A	Conduction (CO05-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Sep. 14, 2018	Feb. 14, 2019	Sep. 13, 2019	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Nov. 08, 2018	Feb. 14, 2019	Nov. 07, 2019	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 23, 2017	Jan. 30, 2019 ~ Feb. 21, 2019	Nov. 22, 2019	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL6111D &00802N1 D01N-06	47020&06	30MHz to 1GHz	Oct. 13, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Oct. 12, 2019	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-152 2	1G~18GHz	Sep. 07, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Sep. 06, 2019	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 576	18GHz ~ 40GHz	May 08, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	May 07, 2019	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY572901 11	3Hz~26.5GHz	Nov. 29, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Nov. 28, 2019	Radiation (03CH16-HY)
Spectrum Analyzer	Agilent	N9010A	MY534701 18	10Hz~44GHz	Apr. 17, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Apr. 16, 2019	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1000MHz	Oct.02. 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Oct.01. 2019	Radiation (03CH16-HY)
Preamplifier	Jet-Power	JPA0118-5 5-303	17100018 00054001	1GHz~18GHz	Apr. 16, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Apr. 15, 2019	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY532702 64	1GHz~26.5GHz	Dec.12.2018	Jan. 30, 2019 ~ Feb. 21, 2019	Dec.11.2019	Radiation (03CH16-HY)
Amplifier	MITEQ	TTA1840-3 5-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Jul. 15, 2019	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLE X 126E	0058/126E	30M-18G	Mar. 14, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Mar. 13, 2019	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLE X 104	MY15539/ 4	30M-18G	Mar. 14, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Mar. 13, 2019	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLE X 104	MY36979/ 4	30M~18GHz	Mar. 14, 2018	Jan. 30, 2019 ~ Feb. 21, 2019	Mar. 13, 2019	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-2 4	RK-00113 6	N/A	N/A	Jan. 30, 2019 ~ Feb. 21, 2019	N/A	Radiation (03CH16-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2019/1/29 ~ 2019/02/08	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	1	149	5745	-	16.65	-	27.67	-	16.30	0.5	Pass
11a	6Mbps	1	157	5785	-	16.70	-	30.00	-	16.30	0.5	Pass
11a	6Mbps	1	165	5825	-	16.75	-	31.86	-	16.30	0.5	Pass
HT20	MCS0	1	149	5745	-	17.80	-	30.57	-	17.60	0.5	Pass
HT20	MCS0	1	157	5785	-	17.85	-	32.50	-	17.60	0.5	Pass
HT20	MCS0	1	165	5825	-	17.85	-	34.46	-	17.50	0.5	Pass
HT40	MCS0	1	151	5755	-	36.60	-	55.26	-	36.00	0.5	Pass
HT40	MCS0	1	159	5795	-	36.70	-	60.54	-	36.36	0.5	Pass
VHT80	MCS0	1	155	5775	-	77.28	-	114.01	-	76.25	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV											
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)		FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	149	5745	-	18.10	-	30.00	-	4.00	Pass
11a	6Mbps	1	157	5785	-	18.10	-	30.00	-	4.00	Pass
11a	6Mbps	1	165	5825	-	18.30	-	30.00	-	4.00	Pass
HT20	MCS0	1	149	5745	-	18.10	-	30.00	-	4.00	Pass
HT20	MCS0	1	157	5785	-	18.10	-	30.00	-	4.00	Pass
HT20	MCS0	1	165	5825	-	18.20	-	30.00	-	4.00	Pass
HT40	MCS0	1	151	5755	-	18.00	-	30.00	-	4.00	Pass
HT40	MCS0	1	159	5795	-	18.10	-	30.00	-	4.00	Pass
VHT20	MCS0	1	149	5745	-	18.00	-	30.00	-	4.00	Pass
VHT20	MCS0	1	157	5785	-	17.90	-	30.00	-	4.00	Pass
VHT20	MCS0	1	165	5825	-	17.80	-	30.00	-	4.00	Pass
VHT40	MCS0	1	151	5755	-	17.90	-	30.00	-	4.00	Pass
VHT40	MCS0	1	159	5795	-	18.00	-	30.00	-	4.00	Pass
VHT80	MCS0	1	155	5775	-	17.80	-	30.00	-	4.00	Pass

TEST RESULTS DATA
Power Spectral Density

Band IV															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)		Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	149	5745	-	0.00	-	2.22	-	4.81	-	30.00	-	4.00	Pass
11a	6Mbps	1	157	5785	-	0.00	-	2.22	-	4.77	-	30.00	-	4.00	Pass
11a	6Mbps	1	165	5825	-	0.00	-	2.22	-	4.85	-	30.00	-	4.00	Pass
HT20	MCS0	1	149	5745	-	0.00	-	2.22	-	3.74	-	30.00	-	4.00	Pass
HT20	MCS0	1	157	5785	-	0.00	-	2.22	-	4.56	-	30.00	-	4.00	Pass
HT20	MCS0	1	165	5825	-	0.00	-	2.22	-	4.75	-	30.00	-	4.00	Pass
HT40	MCS0	1	151	5755	-	0.00	-	2.22	-	1.40	-	30.00	-	4.00	Pass
HT40	MCS0	1	159	5795	-	0.00	-	2.22	-	1.11	-	30.00	-	4.00	Pass
VHT80	MCS0	1	155	5775	-	0.00	-	2.22	-	-2.91	-	30.00	-	4.00	Pass




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Jimmy Chang	Temperature :	24~26℃
		Relative Humidity :	50~53%

EUT Information

Report NO : 8O2938-01
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

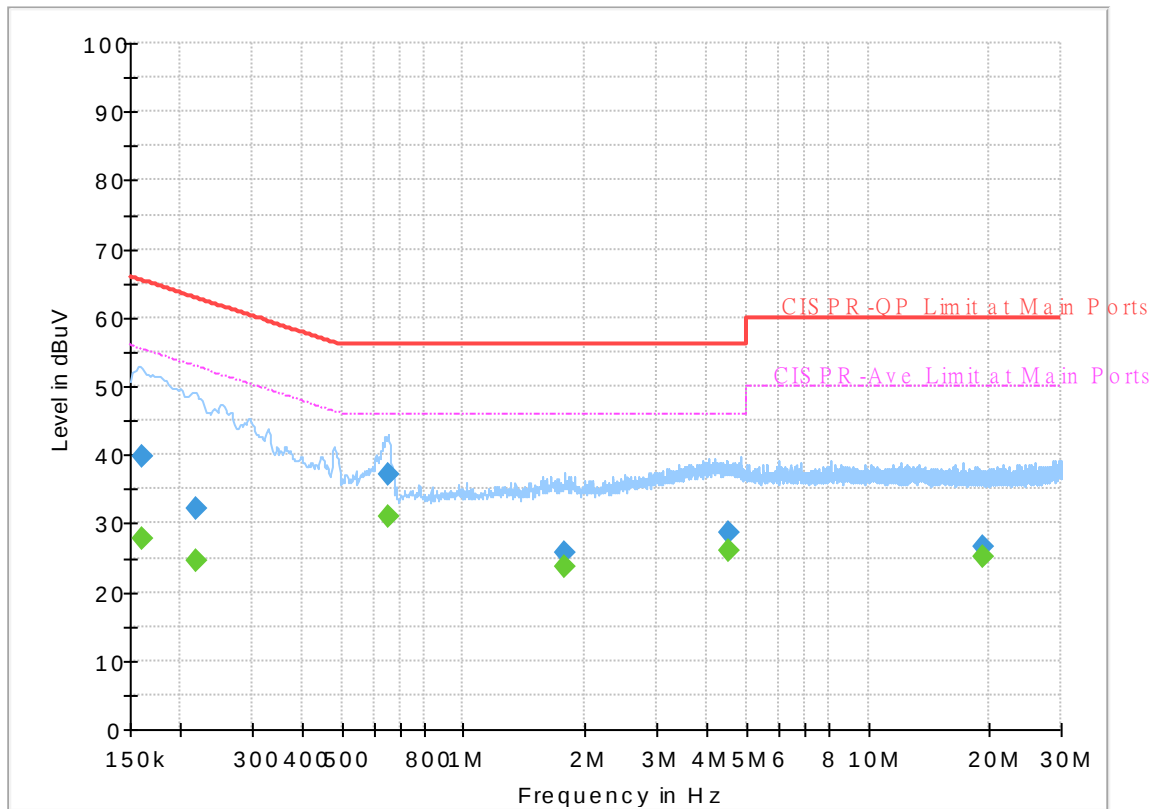


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	39.62	---	65.40	25.78	L1	OFF	19.5
0.161250	---	27.66	55.40	27.74	L1	OFF	19.5
0.217500	32.03	---	62.91	30.88	L1	OFF	19.5
0.217500	---	24.66	52.91	28.25	L1	OFF	19.5
0.651750	37.08	---	56.00	18.92	L1	OFF	19.6
0.651750	---	30.99	46.00	15.01	L1	OFF	19.6
1.779000	25.66	---	56.00	30.34	L1	OFF	19.6
1.779000	---	23.62	46.00	22.38	L1	OFF	19.6
4.535250	28.58	---	56.00	27.42	L1	OFF	19.7
4.535250	---	26.11	46.00	19.89	L1	OFF	19.7
19.322250	26.61	---	60.00	33.39	L1	OFF	20.2
19.322250	---	25.12	50.00	24.88	L1	OFF	20.2

EUT Information

Report NO : 8O2938-01
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

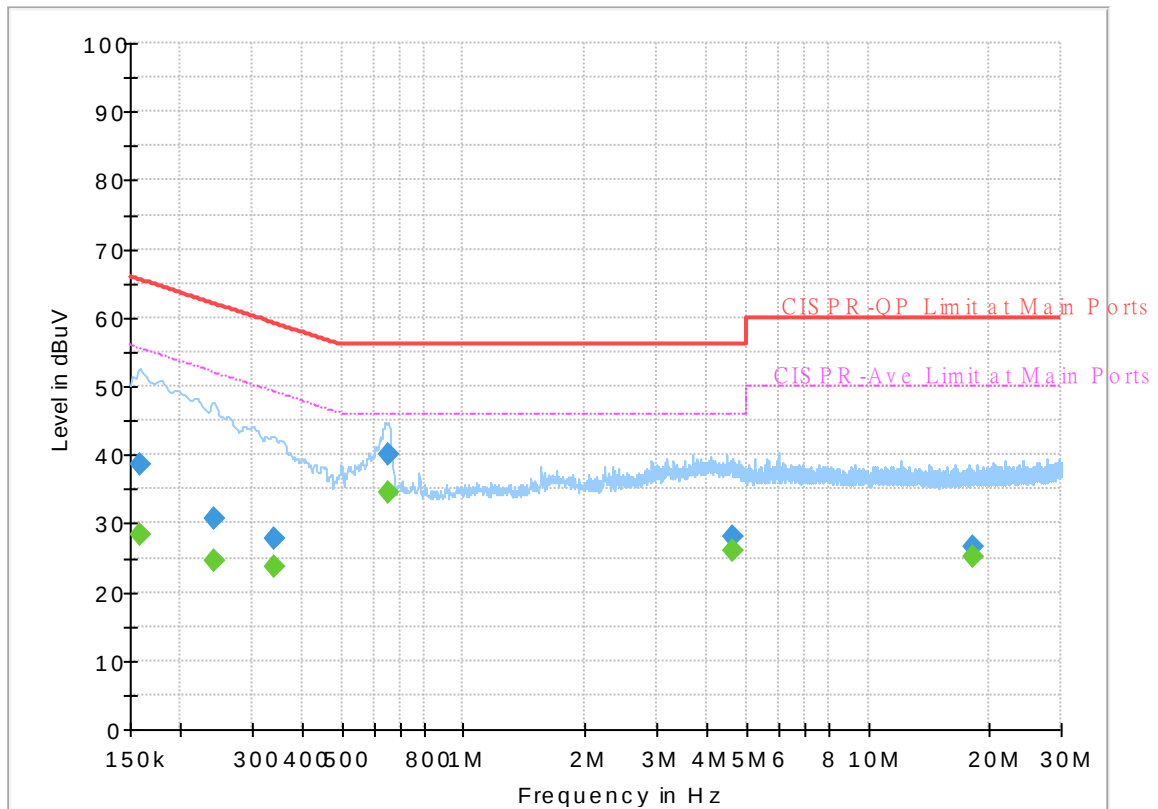

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	38.55	---	65.52	26.97	N	OFF	19.5
0.159000	---	28.45	55.52	27.07	N	OFF	19.5
0.242250	30.74	---	62.02	31.28	N	OFF	19.5
0.242250	---	24.45	52.02	27.57	N	OFF	19.5
0.339000	27.73	---	59.23	31.50	N	OFF	19.5
0.339000	---	23.74	49.23	25.49	N	OFF	19.5
0.649500	40.06	---	56.00	15.94	N	OFF	19.6
0.649500	---	34.39	46.00	11.61	N	OFF	19.6
4.620750	28.16	---	56.00	27.84	N	OFF	19.7
4.620750	---	26.03	46.00	19.97	N	OFF	19.7
18.132000	26.75	---	60.00	33.25	N	OFF	20.2
18.132000	---	25.20	50.00	24.80	N	OFF	20.2



Appendix C. Radiated Spurious Emission

Test Engineer :	Caster Liao, Jacky Hung, Andy Yang, and Lewis Ho	Temperature :	22~25°C
		Relative Humidity :	50~54%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5641	57.08	-11.12	68.2	40.89	31.93	13.77	29.51	251	290	P	H
		5692.6	57.76	-41.98	99.74	41.37	32.01	13.91	29.53	251	290	P	H
		5720	64.81	-45.99	110.8	48.32	32.05	13.98	29.54	251	290	P	H
		5724	74.57	-45.35	119.92	58.06	32.06	13.99	29.54	251	290	P	H
	*	5745	113.82	-	-	97.24	32.09	14.05	29.56	251	290	P	H
	*	5745	106.1	-	-	89.52	32.09	14.05	29.56	251	290	A	H
		5604.8	55.99	-12.21	68.2	39.94	31.87	13.67	29.49	365	58	P	V
		5676.2	57.43	-30.2	87.63	41.1	31.98	13.87	29.52	365	58	P	V
		5716	62.42	-47.26	109.68	45.94	32.05	13.97	29.54	365	58	P	V
		5724	73.8	-46.12	119.92	57.29	32.06	13.99	29.54	365	58	P	V
	*	5745	111.49	-	-	94.91	32.09	14.05	29.56	365	58	P	V
	*	5745	103.31	-	-	86.73	32.09	14.05	29.56	365	58	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5647.6	56.19	-12.01	68.2	39.97	31.94	13.79	29.51	266	290	P	H
		5696.8	57.52	-45.32	102.84	41.12	32.01	13.92	29.53	266	290	P	H
		5718	57.18	-53.06	110.24	40.69	32.05	13.98	29.54	266	290	P	H
		5721.4	56.72	-57.27	113.99	40.22	32.05	13.99	29.54	266	290	P	H
	*	5785	114.35	-	-	97.61	32.16	14.16	29.58	266	290	P	H
	*	5785	106.17	-	-	89.43	32.16	14.16	29.58	266	290	A	H
		5851.6	56.04	-62.51	118.55	39.35	32.26	14.03	29.6	266	290	P	H
		5862.4	56.59	-52.14	108.73	39.94	32.28	13.99	29.62	266	290	P	H
		5878	55.82	-47.15	102.97	39.2	32.3	13.94	29.62	266	290	P	H
		5944	55.01	-13.19	68.2	38.54	32.41	13.72	29.66	266	290	P	H
		5619.4	55.84	-12.36	68.2	39.73	31.89	13.71	29.49	306	59	P	V
		5698.2	56.94	-46.93	103.87	40.52	32.02	13.93	29.53	306	59	P	V
		5702	56.01	-49.75	105.76	39.58	32.02	13.94	29.53	306	59	P	V
		5722.4	54.81	-61.46	116.27	38.3	32.06	13.99	29.54	306	59	P	V
	*	5785	110.88	-	-	94.14	32.16	14.16	29.58	306	59	P	V
	*	5785	102.56	-	-	85.82	32.16	14.16	29.58	306	59	A	V
		5853.8	56.02	-57.52	113.54	39.33	32.27	14.02	29.6	306	59	P	V
		5871.4	55.62	-50.59	106.21	38.99	32.29	13.96	29.62	306	59	P	V
		5923.4	56.13	-13.25	69.38	39.6	32.38	13.79	29.64	306	59	P	V
		5935.2	54.69	-13.51	68.2	38.2	32.4	13.75	29.66	306	59	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	113.06	-	-	96.31	32.22	14.12	29.59	249	296	P	H
	*	5825	104.94	-	-	88.19	32.22	14.12	29.59	249	296	A	H
		5850.2	60.07	-61.67	121.74	43.38	32.26	14.03	29.6	249	296	P	H
		5855.2	56.94	-53.8	110.74	40.25	32.27	14.02	29.6	249	296	P	H
		5899.8	55.65	-31.16	86.81	39.07	32.34	13.87	29.63	249	296	P	H
		5939.6	56.45	-11.75	68.2	39.98	32.4	13.73	29.66	249	296	P	H
	*	5825	110.07	-	-	93.32	32.22	14.12	29.59	336	60	P	V
	*	5825	102.25	-	-	85.5	32.22	14.12	29.59	336	60	A	V
		5850	60.5	-61.7	122.2	43.81	32.26	14.03	29.6	336	60	P	V
		5861	55.81	-53.31	109.12	39.15	32.28	14	29.62	336	60	P	V
		5881.8	54.92	-45.23	100.15	38.3	32.31	13.93	29.62	336	60	P	V
		5928.8	54.76	-13.44	68.2	38.24	32.39	13.77	29.64	336	60	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	54.39	-19.61	74	57.51	39.91	18.37	61.4	267	105	P	H
		11490	43.4	-10.6	54	46.52	39.91	18.37	61.4	267	105	A	H
		17235	48.21	-19.99	68.2	41.14	41.59	23.27	57.79	100	0	P	H
		11490	61.16	-12.84	74	64.28	39.91	18.37	61.4	286	21	P	V
		11490	49.4	-4.6	54	52.52	39.91	18.37	61.4	286	21	A	V
		17235	48.74	-19.46	68.2	41.67	41.59	23.27	57.79	100	0	P	V
802.11a CH 157 5785MHz		11570	56.63	-17.37	74	59.96	39.76	18.44	61.53	283	104	P	H
		11570	44.28	-9.72	54	47.61	39.76	18.44	61.53	283	104	A	H
		17355	48.24	-19.96	68.2	40.24	42.05	23.43	57.48	100	0	P	H
		11565	62.41	-11.59	74	65.72	39.77	18.44	61.52	223	24	P	V
		11565	49.77	-4.23	54	53.08	39.77	18.44	61.52	223	24	A	V
		17355	49.34	-18.86	68.2	41.34	42.05	23.43	57.48	100	0	P	V
802.11a CH 165 5825MHz		11650	52.12	-21.88	74	55.69	39.6	18.5	61.67	282	210	P	H
		11650	40.53	-13.47	54	44.1	39.6	18.5	61.67	282	210	A	H
		17475	48.81	-19.39	68.2	39.88	42.5	23.59	57.16	100	0	P	H
		11650	61.76	-12.24	74	65.33	39.6	18.5	61.67	223	23	P	V
		11650	49.52	-4.48	54	53.09	39.6	18.5	61.67	223	23	A	V
		17475	50.1	-18.1	68.2	41.17	42.5	23.59	57.16	270	265	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5627.8	56.69	-11.51	68.2	40.54	31.9	13.74	29.49	268	290	P	H
		5699.4	58.27	-46.49	104.76	41.85	32.02	13.93	29.53	268	290	P	H
		5720	65	-45.8	110.8	48.51	32.05	13.98	29.54	268	290	P	H
		5725	76.59	-45.61	122.2	60.07	32.06	14	29.54	268	290	P	H
	*	5745	113.94	-	-	97.36	32.09	14.05	29.56	268	290	P	H
	*	5745	105.89	-	-	89.31	32.09	14.05	29.56	268	290	A	H
		5624.4	55.56	-12.64	68.2	39.42	31.9	13.73	29.49	312	57	P	V
		5653	56.23	-14.2	70.43	40	31.94	13.8	29.51	312	57	P	V
		5717.2	65.52	-44.5	110.02	49.03	32.05	13.98	29.54	312	57	P	V
		5725	72.24	-49.96	122.2	55.72	32.06	14	29.54	312	57	P	V
	*	5745	111.21	-	-	94.63	32.09	14.05	29.56	312	57	P	V
	*	5745	102.93	-	-	86.35	32.09	14.05	29.56	312	57	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5648.6	56.1	-12.1	68.2	39.88	31.94	13.79	29.51	267	290	P	H
		5696.2	57.38	-45.02	102.4	40.98	32.01	13.92	29.53	267	290	P	H
		5706.4	57.23	-49.76	106.99	40.79	32.03	13.95	29.54	267	290	P	H
		5720.4	56.19	-55.52	111.71	39.69	32.05	13.99	29.54	267	290	P	H
	*	5785	113.86	-	-	97.12	32.16	14.16	29.58	267	290	P	H
	*	5785	105.72	-	-	88.98	32.16	14.16	29.58	267	290	A	H
		5850	55.95	-66.25	122.2	39.26	32.26	14.03	29.6	267	290	P	H
		5863.8	56.42	-51.91	108.33	39.77	32.28	13.99	29.62	267	290	P	H
		5897.2	56.03	-32.7	88.73	39.45	32.34	13.87	29.63	267	290	P	H
		5932.4	55.3	-12.9	68.2	38.79	32.39	13.76	29.64	267	290	P	H
		5602.8	54.94	-13.26	68.2	38.9	31.86	13.67	29.49	306	59	P	V
		5694.4	55.56	-45.51	101.07	39.17	32.01	13.91	29.53	306	59	P	V
		5718.4	56.05	-54.3	110.35	39.56	32.05	13.98	29.54	306	59	P	V
		5721.8	55.36	-59.54	114.9	38.86	32.05	13.99	29.54	306	59	P	V
	*	5785	110.87	-	-	94.13	32.16	14.16	29.58	306	59	P	V
	*	5785	102.54	-	-	85.8	32.16	14.16	29.58	306	59	A	V
		5852.4	54.09	-62.64	116.73	37.41	32.26	14.02	29.6	306	59	P	V
		5871.8	55.27	-50.82	106.09	38.64	32.29	13.96	29.62	306	59	P	V
		5886.8	55.36	-41.08	96.44	38.76	32.32	13.91	29.63	306	59	P	V
		5935.4	54.56	-13.64	68.2	38.07	32.4	13.75	29.66	306	59	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	113.36	-	-	96.61	32.22	14.12	29.59	267	290	P	H
	*	5825	104.97	-	-	88.22	32.22	14.12	29.59	267	290	A	H
		5850	63.89	-58.31	122.2	47.2	32.26	14.03	29.6	267	290	P	H
		5855	59.91	-50.89	110.8	43.22	32.27	14.02	29.6	267	290	P	H
		5876.6	56.58	-47.43	104.01	39.96	32.3	13.94	29.62	267	290	P	H
		5938.4	55.22	-12.98	68.2	38.74	32.4	13.74	29.66	267	290	P	H
	*	5825	109.62	-	-	92.87	32.22	14.12	29.59	287	57	P	V
	*	5825	101.36	-	-	84.61	32.22	14.12	29.59	287	57	A	V
		5850.4	57.85	-63.44	121.29	41.16	32.26	14.03	29.6	287	57	P	V
		5859.4	55.71	-53.86	109.57	39.05	32.28	14	29.62	287	57	P	V
		5883.8	55.63	-43.04	98.67	39.03	32.31	13.92	29.63	287	57	P	V
		5936.6	54.62	-13.58	68.2	38.14	32.4	13.74	29.66	287	57	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	54.23	-19.77	74	57.35	39.91	18.37	61.4	234	125	P	H
		11490	42.07	-11.93	54	45.19	39.91	18.37	61.4	234	125	A	H
		17235	48.77	-19.43	68.2	41.7	41.59	23.27	57.79	100	0	P	H
		11490	60.16	-13.84	74	63.28	39.91	18.37	61.4	232	20	P	V
		11490	49.71	-4.29	54	52.83	39.91	18.37	61.4	232	20	A	V
		17235	49.3	-18.9	68.2	42.23	41.59	23.27	57.79	100	0	P	V
802.11n HT20 CH 157 5785MHz		11570	55.25	-18.75	74	58.58	39.76	18.44	61.53	232	125	P	H
		11570	42.98	-11.02	54	46.31	39.76	18.44	61.53	232	125	A	H
		17355	48.08	-20.12	68.2	40.08	42.05	23.43	57.48	100	0	P	H
		11570	60.33	-13.67	74	63.66	39.76	18.44	61.53	232	20	P	V
		11570	49.3	-4.7	54	52.63	39.76	18.44	61.53	232	20	A	V
		17355	48.85	-19.35	68.2	40.85	42.05	23.43	57.48	100	0	P	V
802.11n HT20 CH 165 5825MHz		11650	54.23	-19.77	74	57.8	39.6	18.5	61.67	232	125	P	H
		11650	43.12	-10.88	54	46.69	39.6	18.5	61.67	232	125	A	H
		17475	49.14	-19.06	68.2	40.21	42.5	23.59	57.16	100	0	P	H
		11650	60.88	-13.12	74	64.45	39.6	18.5	61.67	232	26	P	V
		11650	48.86	-5.14	54	52.43	39.6	18.5	61.67	232	26	A	V
		17475	48.83	-19.37	68.2	39.9	42.5	23.59	57.16	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5621	56.05	-12.15	68.2	39.93	31.89	13.72	29.49	264	287	P	H
		5695.6	60.95	-41.01	101.96	44.55	32.01	13.92	29.53	264	287	P	H
		5718	78.94	-31.3	110.24	62.45	32.05	13.98	29.54	264	287	P	H
		5725	81.35	-40.85	122.2	64.83	32.06	14	29.54	264	287	P	H
	*	5755	110.57	-	-	93.94	32.11	14.08	29.56	264	287	P	H
	*	5755	102.52	-	-	85.89	32.11	14.08	29.56	264	287	A	H
		5854.8	55.8	-55.46	111.26	39.11	32.27	14.02	29.6	264	287	P	H
		5872.4	55.77	-50.16	105.93	39.13	32.3	13.96	29.62	264	287	P	H
		5878.4	56.66	-46.01	102.67	40.03	32.31	13.94	29.62	264	287	P	H
		5932.8	56.06	-12.14	68.2	39.55	32.39	13.76	29.64	264	287	P	H
		5605	54.88	-13.32	68.2	38.83	31.87	13.67	29.49	291	55	P	V
		5696.2	59.77	-42.63	102.4	43.37	32.01	13.92	29.53	291	55	P	V
		5719	76.45	-34.07	110.52	59.96	32.05	13.98	29.54	291	55	P	V
		5724.2	76.71	-43.67	120.38	60.19	32.06	14	29.54	291	55	P	V
	*	5755	108.07	-	-	91.44	32.11	14.08	29.56	291	55	P	V
	*	5755	99.61	-	-	82.98	32.11	14.08	29.56	291	55	A	V
		5852	54.92	-62.72	117.64	38.23	32.26	14.03	29.6	291	55	P	V
		5867.8	54.42	-52.79	107.21	37.78	32.29	13.97	29.62	291	55	P	V
		5886	54.97	-42.06	97.03	38.37	32.32	13.91	29.63	291	55	P	V
		5948.4	53.98	-14.22	68.2	37.52	32.42	13.7	29.66	291	55	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5643	56.04	-12.16	68.2	39.84	31.93	13.78	29.51	269	288	P	H
		5688.6	57.57	-39.22	96.79	41.2	32	13.9	29.53	269	288	P	H
		5704.6	58.86	-47.63	106.49	42.42	32.03	13.94	29.53	269	288	P	H
		5721.6	59.31	-55.14	114.45	42.81	32.05	13.99	29.54	269	288	P	H
	*	5795	111.54	-	-	94.76	32.17	14.19	29.58	269	288	P	H
	*	5795	102.78	-	-	86	32.17	14.19	29.58	269	288	A	H
		5850.6	61.05	-59.78	120.83	44.36	32.26	14.03	29.6	269	288	P	H
		5867.8	58.64	-48.57	107.21	42	32.29	13.97	29.62	269	288	P	H
		5887.8	56.41	-39.29	95.7	39.81	32.32	13.91	29.63	269	288	P	H
		5948	55.64	-12.56	68.2	39.18	32.42	13.7	29.66	269	288	P	H
		5613.4	56.56	-11.64	68.2	40.47	31.88	13.7	29.49	290	56	P	V
		5686.6	55.35	-39.97	95.32	38.99	32	13.89	29.53	290	56	P	V
		5719.6	56.97	-53.72	110.69	40.48	32.05	13.98	29.54	290	56	P	V
		5721	56.41	-56.67	113.08	39.91	32.05	13.99	29.54	290	56	P	V
	*	5795	107.1	-	-	90.32	32.17	14.19	29.58	290	56	P	V
	*	5795	99.22	-	-	82.44	32.17	14.19	29.58	290	56	A	V
		5852.6	56.73	-59.54	116.27	40.05	32.26	14.02	29.6	290	56	P	V
		5858.2	57.75	-52.15	109.9	41.09	32.27	14.01	29.62	290	56	P	V
		5880.4	55.51	-45.68	101.19	38.89	32.31	13.93	29.62	290	56	P	V
		5943	54.41	-13.79	68.2	37.94	32.41	13.72	29.66	290	56	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	52.05	-21.95	74	55.2	39.88	18.39	61.42	232	126	P	H
		11510	40.79	-13.21	54	43.94	39.88	18.39	61.42	232	126	A	H
		17265	47.74	-20.46	68.2	40.44	41.71	23.3	57.71	100	0	P	H
		11510	59.81	-14.19	74	62.96	39.88	18.39	61.42	232	16	P	V
		11510	47.94	-6.06	54	51.09	39.88	18.39	61.42	232	16	A	V
		17265	48.8	-19.4	68.2	41.5	41.71	23.3	57.71	100	0	P	V
802.11n HT40 CH 159 5795MHz		11590	52.54	-21.46	74	55.92	39.72	18.46	61.56	259	105	P	H
		11590	41.46	-12.54	54	44.84	39.72	18.46	61.56	259	105	A	H
		17385	49	-19.2	68.2	40.77	42.16	23.47	57.4	100	0	P	H
		11590	59.49	-14.51	74	62.87	39.72	18.46	61.56	217	17	P	V
		11590	47.27	-6.73	54	50.65	39.72	18.46	61.56	217	17	A	V
		17385	49.31	-18.89	68.2	41.08	42.16	23.47	57.4	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5632	57.4	-10.8	68.2	41.25	31.91	13.75	29.51	267	286	P	H
		5697.6	76.82	-26.61	103.43	60.41	32.02	13.92	29.53	267	286	P	H
		5717.2	80.66	-29.36	110.02	64.17	32.05	13.98	29.54	267	286	P	H
		5721.6	79.94	-34.51	114.45	63.44	32.05	13.99	29.54	267	286	P	H
	*	5775	107.06	-	-	90.36	32.14	14.13	29.57	267	286	P	H
	*	5775	98.62	-	-	81.92	32.14	14.13	29.57	267	286	A	H
		5852	71.77	-45.87	117.64	55.08	32.26	14.03	29.6	267	286	P	H
		5856.8	70.8	-39.5	110.3	54.12	32.27	14.01	29.6	267	286	P	H
		5875	63.72	-41.48	105.2	47.09	32.3	13.95	29.62	267	286	P	H
		5940	54.78	-13.42	68.2	38.31	32.4	13.73	29.66	267	286	P	H
		5640.4	55.86	-12.34	68.2	39.68	31.92	13.77	29.51	326	53	P	V
		5690.8	71.62	-26.8	98.42	55.23	32.01	13.91	29.53	326	53	P	V
		5719.8	75.65	-35.09	110.74	59.16	32.05	13.98	29.54	326	53	P	V
		5724.6	75.83	-45.46	121.29	59.31	32.06	14	29.54	326	53	P	V
	*	5775	103.88	-	-	87.18	32.14	14.13	29.57	326	53	P	V
	*	5775	95.34	-	-	78.64	32.14	14.13	29.57	326	53	A	V
		5853	68.59	-46.77	115.36	51.91	32.26	14.02	29.6	326	53	P	V
		5864.2	69.58	-38.64	108.22	52.94	32.28	13.98	29.62	326	53	P	V
		5875.4	59.91	-44.99	104.9	43.28	32.3	13.95	29.62	326	53	P	V
		5926.8	55.15	-13.05	68.2	38.63	32.38	13.78	29.64	326	53	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	48.97	-25.03	74	52.24	39.8	18.42	61.49	100	0	P	H
		17325	48.25	-19.95	68.2	40.49	41.93	23.39	57.56	100	0	P	H
		11550	56.61	-17.39	74	59.88	39.8	18.42	61.49	252	18	P	V
		11550	44.02	-9.98	54	47.29	39.8	18.42	61.49	252	18	A	V
		17325	48.88	-19.32	68.2	41.12	41.93	23.39	57.56	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT80 LF		31.35	22.73	-17.27	40	29.27	25.62	0.29	32.45	-	-	P	H
		119.64	25.46	-18.04	43.5	38.98	17.66	1.19	32.37	-	-	P	H
		154.74	24.54	-18.96	43.5	37.93	17.45	1.52	32.36	-	-	P	H
		500.2	29.23	-16.77	46	34.12	24.4	3.29	32.58	-	-	P	H
		797	29.96	-16.04	46	29.9	28.08	4.35	32.37	-	-	P	H
		939.8	33.09	-12.91	46	30.03	29.88	4.62	31.44	100	0	P	H
		30.81	22.64	-17.36	40	29.17	25.62	0.3	32.45	-	-	P	V
		46.2	22.64	-17.36	40	37.66	16.7	0.71	32.43	-	-	P	V
		74.01	20.72	-19.28	40	39.1	13.07	0.95	32.4	-	-	P	V
		671	28.41	-17.59	46	30.58	26.31	4.09	32.57	-	-	P	V
		835.5	32.55	-13.45	46	31.63	28.52	4.56	32.16	-	-	P	V
		951.7	33.37	-12.63	46	29.97	30.09	4.64	31.33	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots



Test Engineer :	Caster Liao, Jacky Hung, Andy Yang, and Lewis Ho	Temperature :	22~25°C
		Relative Humidity :	50~54%

Note symbol



-L	Low channel location
-R	High channel location






Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

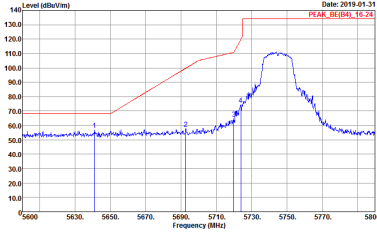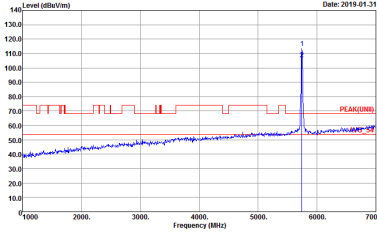WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_RE(B4)_16-24 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(FUND)_16-24 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18


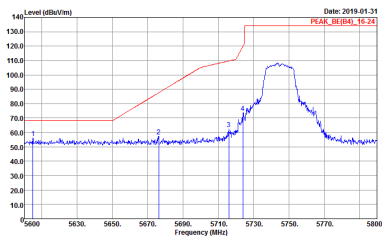
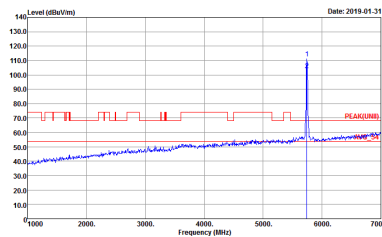


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-11Y Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18

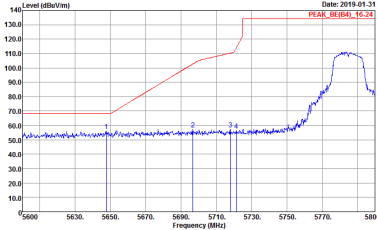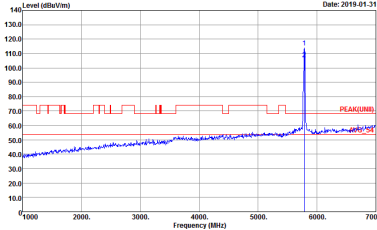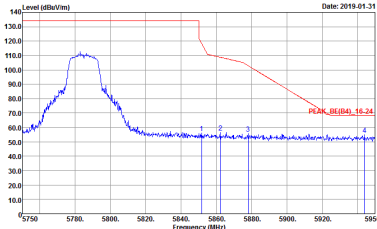

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01 Setting : 18
	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01 Setting : 18	Left blank

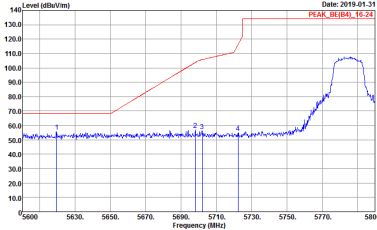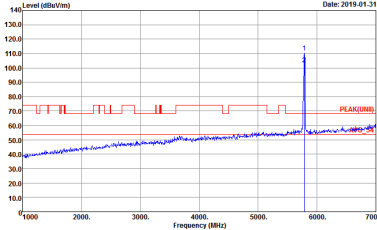
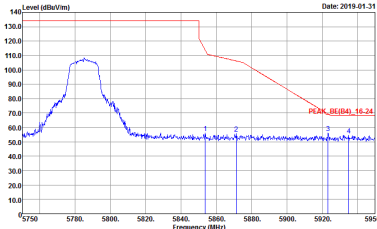


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 8Q2938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL Detector : Peak Project : 8Q2938-01 Setting : 18
	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 8Q2938-01 Setting : 18	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18	Site : 03CH16-11Y Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18

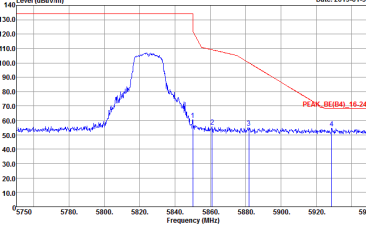
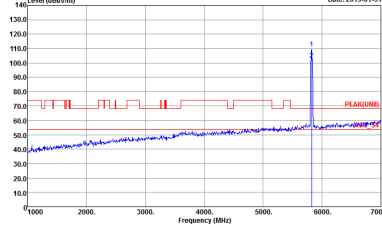


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH165-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH165-11Y Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18




Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

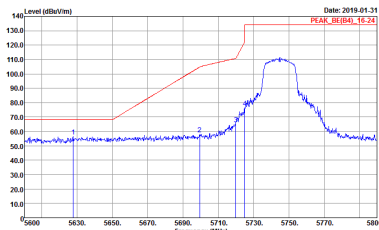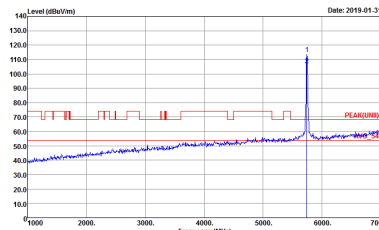WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 8Q2938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 8Q2938-01 Setting : 18


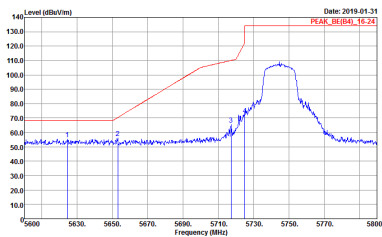
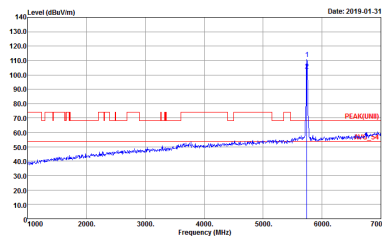


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-11Y Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18

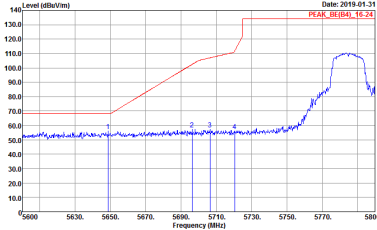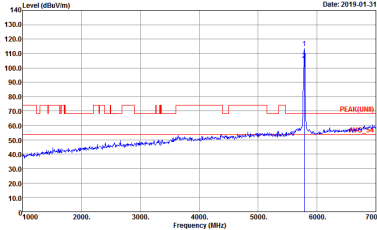
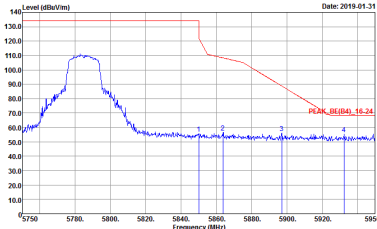


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01 Setting : 18
	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01 Setting : 18	Left blank

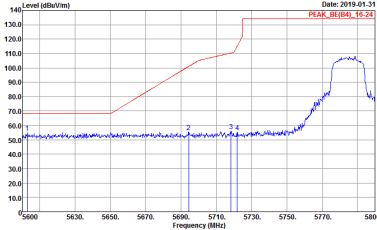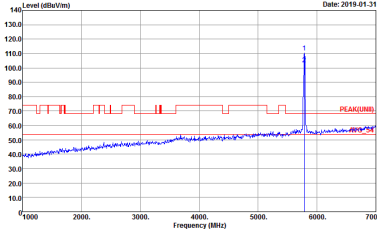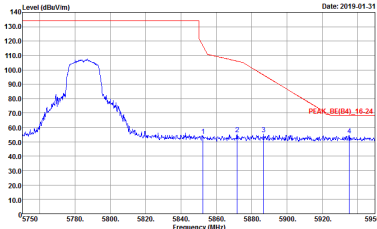

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 8Q2938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL Detector : Peak Project : 8Q2938-01 Setting : 18
	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 8Q2938-01 Setting : 18	Left blank

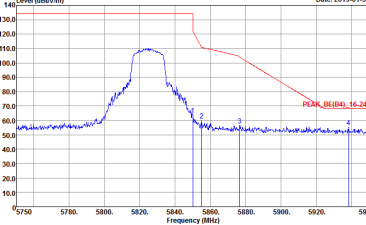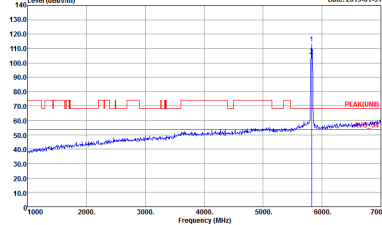




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-11Y Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	Site : 03CH16-11Y Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18	Site : 03CH16-11Y Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 802938-01 Setting : 18






Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

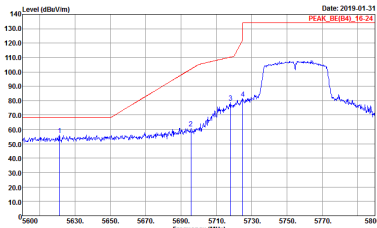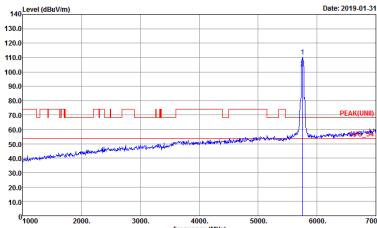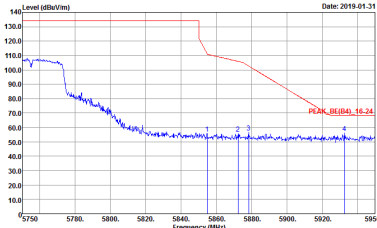WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(84)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 8O2938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 8O2938-01 Setting : 18
Peak	 Site : 03CH16-HY Condition : PEAK_BE(84)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 8O2938-01 Setting : 18	Left blank

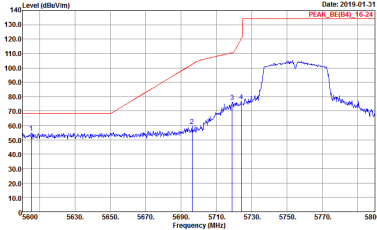
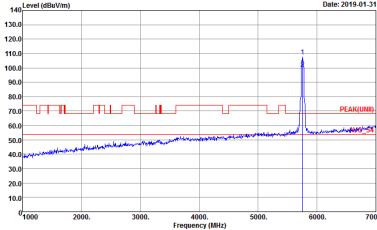
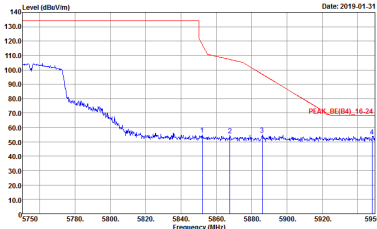


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01 Setting : 18
	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01 Setting : 18	Left blank

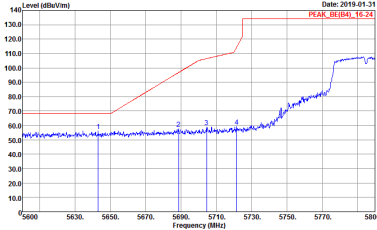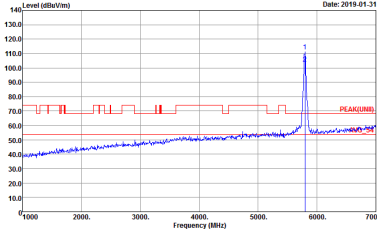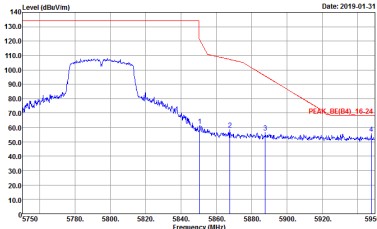




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01 Setting : 18
	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01 Setting : 18	Left blank

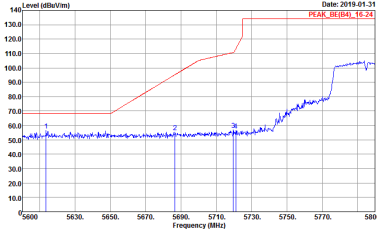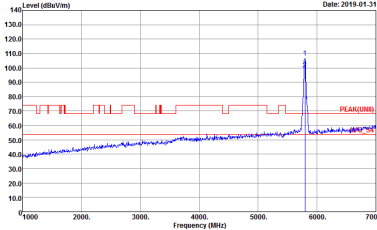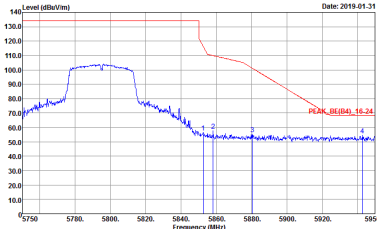




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(FUND) 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01 Setting : 18
	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01 Setting : 18	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

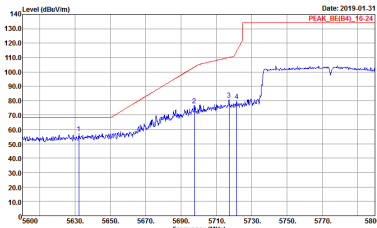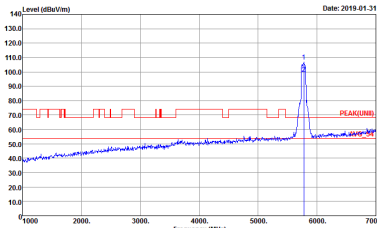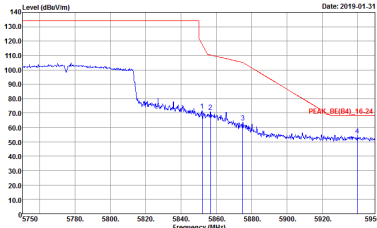WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 8O2938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 8O2938-01 Setting : 18
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 8O2938-01 Setting : 18	Left blank

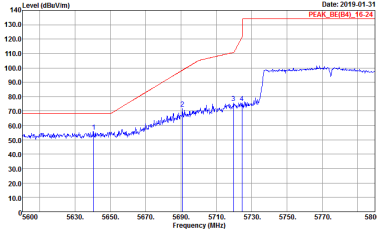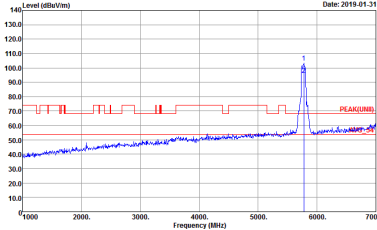
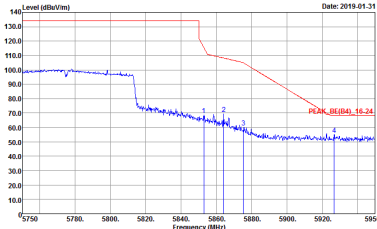


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01 Setting : 18	 Site : 03CH16-HY Condition : PEAK(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01 Setting : 18
	 Site : 03CH16-HY Condition : PEAK_BE(B4)_16-24 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01 Setting : 18	Left blank





Band 4 - 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

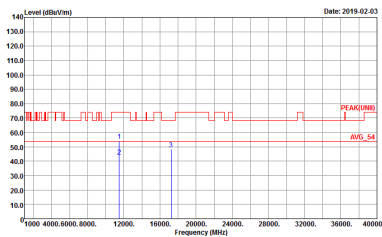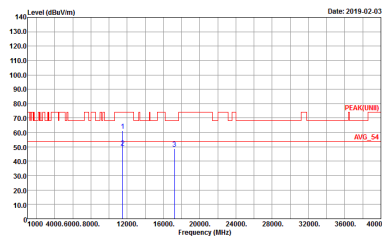WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 802938-01	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL Detector : Peak Project : 802938-01

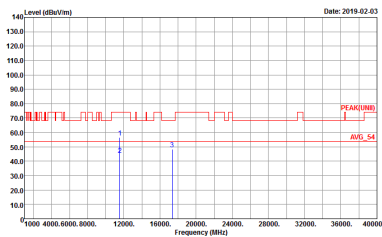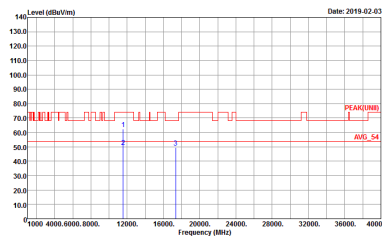



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 8O2938-01	 Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 VERTICAL Detector : Peak Project : 8O2938-01





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2019-02-03 Frequency (MHz) Site : 03CH165-11Y Condition : PEAK(UNII) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 8O2938-01	Level (dBuV/m) Date: 2019-02-21 Frequency (MHz) Site : 03CH165-11Y Condition : PEAK(UNII) 3m 91200_1522 VERTICAL Detector : Peak Project : 8O2938-01





Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

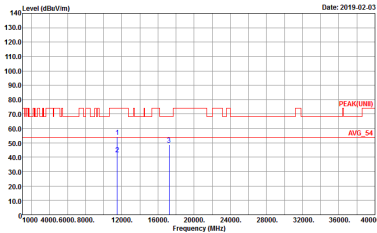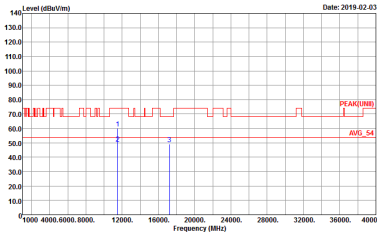WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 8O2938-01	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL Detector : Peak Project : 8O2938-01

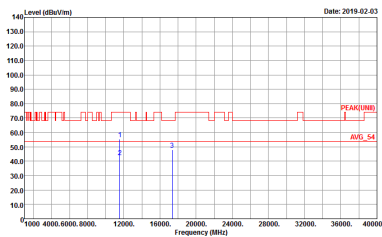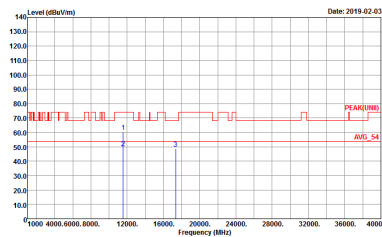



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 8O2938-01	 Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 VERTICAL Detector : Peak Project : 8O2938-01

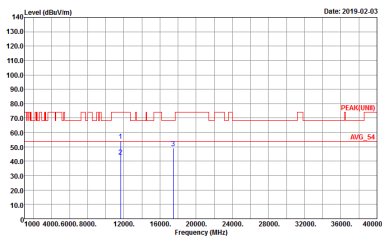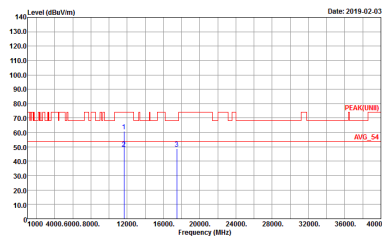



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 8O2938-01	 Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 VERTICAL Detector : Peak Project : 8O2938-01



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

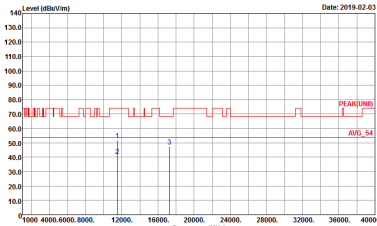
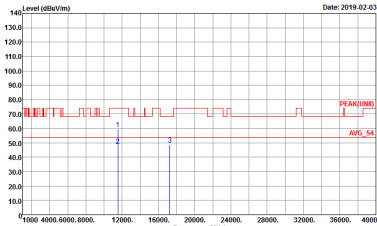
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 8O2938-01	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL Detector : Peak Project : 8O2938-01

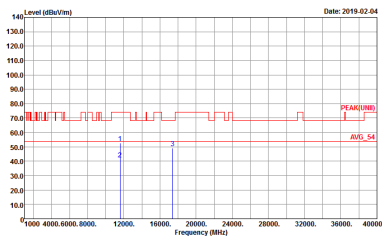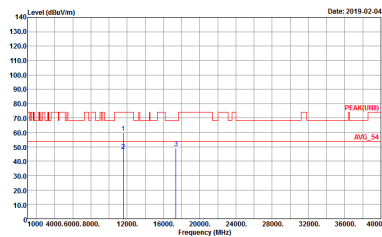



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 8O2938-01	 Site : 03CH16-11Y Condition : PEAK(UNII) 3m 91200_1522 VERTICAL Detector : Peak Project : 8O2938-01



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

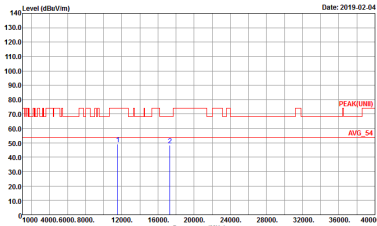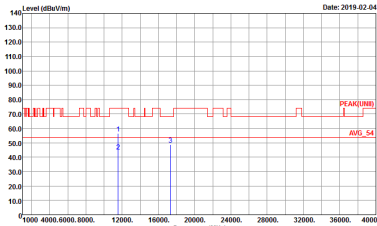WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 HORIZONTAL Detector : Peak Project : 8O2938-01	 Site : 03CH16-HY Condition : PEAK(UNIT) 3m 91200_1522 VERTICAL Detector : Peak Project : 8O2938-01

Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

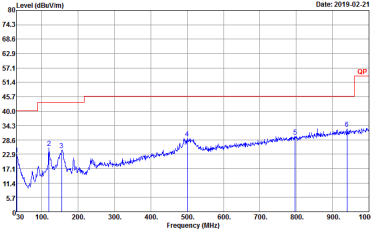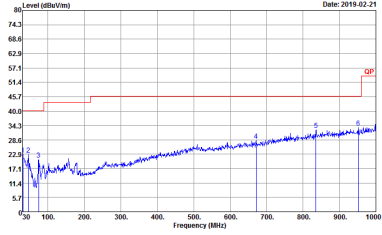WIFI	5GHz 5725~5850MHz	
ANT	802.11ac VHT80 LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH16-HY Condition : QP 3m BIL06_47020606 HORIZONTAL Detector : Peak Project : 802938-01	 Site : 03CH16-HY Condition : QP 3m BIL06_47020606 VERTICAL Detector : Peak Project : 802938-01




Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1	802.11a	100.00	-	-	10Hz	0.00
1	5GHz 802.11n HT20	100.00	-	-	10Hz	0.00
1	5GHz 802.11n HT40	100.00	-	-	10Hz	0.00
1	5GHz 802.11ac VHT20	100.00	-	-	10Hz	0.00
1	5GHz 802.11ac VHT40	100.00	-	-	10Hz	0.00
1	5GHz 802.11ac VHT80	100.00	-	-	10Hz	0.00




802.11a

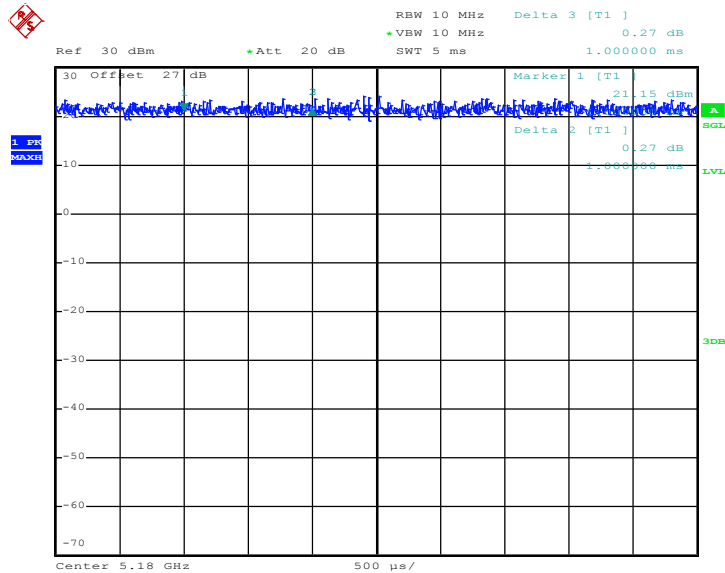

Date: 29.JAN.2019 17:02:47


802.11n HT20

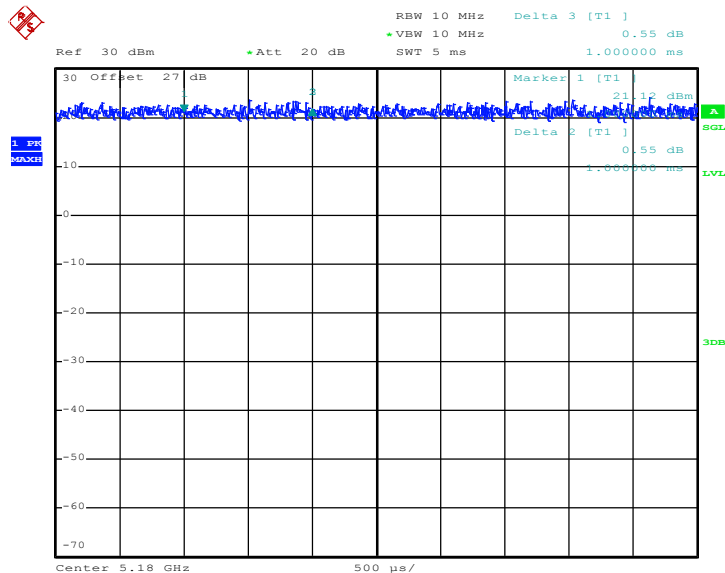

Date: 29.JAN.2019 17:18:00




802.11n HT40

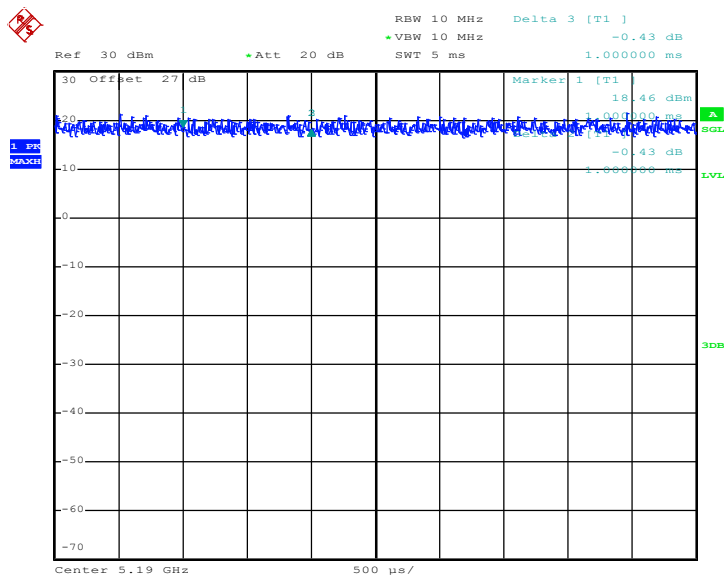

Date: 29.JAN.2019 17:27:32


802.11ac VHT20

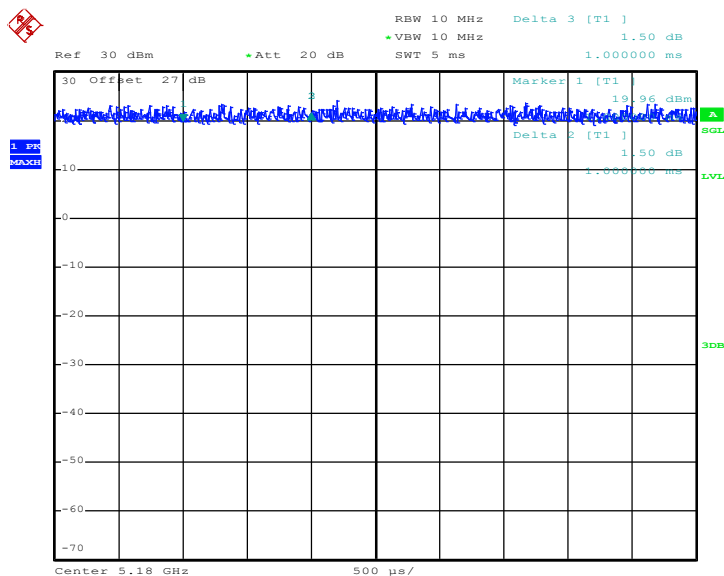

Date: 29.JAN.2019 17:32:56




802.11ac VHT40

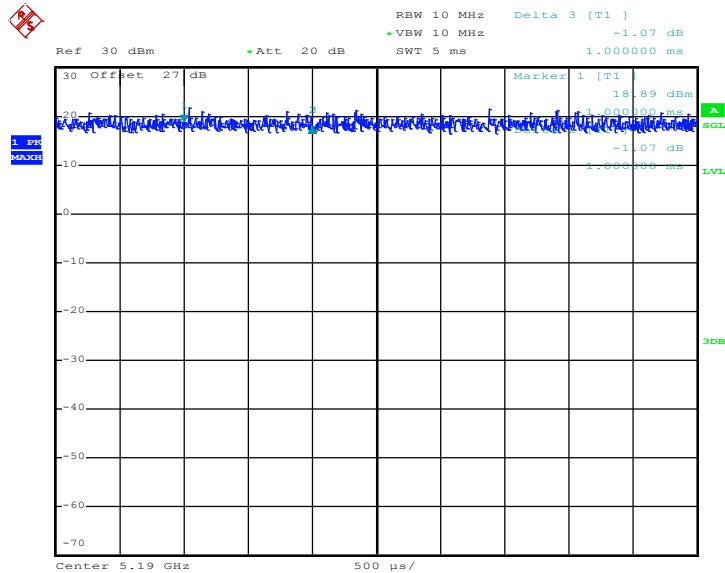

Date: 29.JAN.2019 17:40:03

802.11ac VHT80

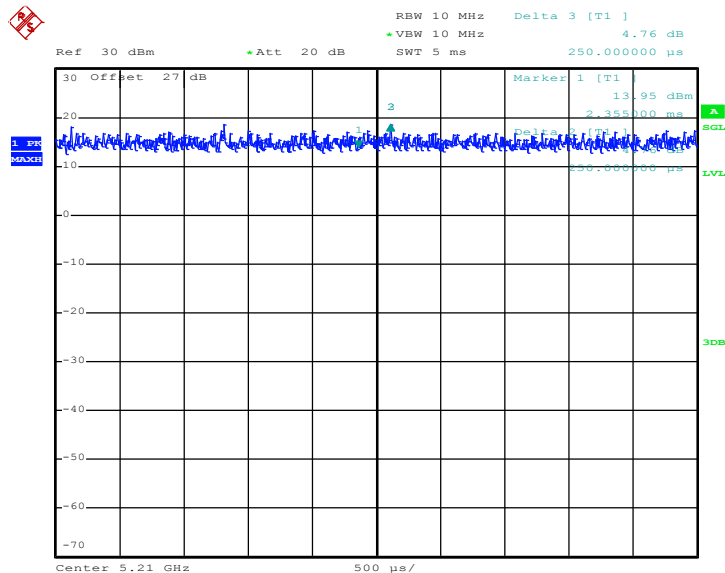

Date: 29.JAN.2019 19:55:36

————THE END————