



## Test Report

Prepared for: Core Kinect

Model: OBDLRA1 & GENLRA3

Description: Vehicle Tracking and Diagnostic System

Serial Number: N/A

FCC ID: 2ARKMOBDLRA1

IC: 24436-OBDLRA1

To

FCC Part 15.247 DTS  
ISED RSS-247 Issue 2

Date of Issue: March 21, 2019

On the behalf of the applicant:

Core Kinect  
2800S. Rural Road  
Suite 103  
Tempe, AZ 85282

Attention of:

Assar Badri, Engineer  
Ph: (602)684-5484  
E-mail: [assar@corekinect.com](mailto:assar@corekinect.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p1830020



Poona Saber  
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested.



## Test Report Revision History

| Revision | Date              | Revised By  | Reason for Revision  |
|----------|-------------------|-------------|--|
| 1.0      | February 11, 2019 | Poona Saber | Original Document  |
| 2.0      | March 21, 2019    | Amanda Reed | Updated FCC ID   |
| 3.0      | August 15, 2019   | Poona Saber | Added model numbers and HVIN<br>Added conducted output powers<br>Revised 20 dB, 6 dB and 99% OBW for 900 MHz<br>Revised frequency hopping occupancy measurement and result<br>Added number of hopping channels<br>Revised Annex A<br>Revised Annex B |
| 4.0      | August 27, 2019   | Poona Saber | Revised Test setup photos  |



## Table of Contents

| <u>Description</u>  | <u>Page</u> |
|---|-------------|
| Standard Test Conditions Engineering Practices .....              | 6           |
| Peak Output Power .....   | 8           |
| Radiated Spurious Emission in Non-Restricted Frequency Bands..... | 9           |
| Radiated Spurious Emissions in Restricted Frequency Bands.....    | 10          |
| DTS Bandwidth .....   | 11          |
| Transmitter Power Spectral Density (PSD).....                     | 15          |
| A/C Powerline Conducted Emission .....                            | 17          |
| Carrier Frequency Separation.....                                 | 19          |
| Dwell Time.....   | 20          |
| Number of Hopping Channels.....                                   | 22          |
| Measurement Uncertainty .....                                     | 23          |
| Test Equipment Utilized .....                                     | 24          |



**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**



**The applicant has been cautioned as to the following**

**15.21 - Information to User**

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**15.27(a) - Special Accessories**

Equipment marked to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



## Standard Test Conditions Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.10-2013 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

| Environmental Conditions |              |                 |
|--------------------------|--------------|-----------------|
| Temperature (°C)         | Humidity (%) | Pressure (mbar) |
| 23.3                     | 28.9         | 967             |

### EUT Description

**Model:** OBDLRA1 & GENLRA3

**Description:** Vehicle Tracking and Diagnostic System

**Firmware:** N/A

**Software:** N/A

**Serial Number:** N/A

### Additional Information:

Unit has two transmitters which operate in two bands of 902-928 MHz for Lora and 2402-2480 MHz for BLE. It is a FHSS system on 900 MHz band and DTS on 2.4 GHz band. It was tested on continuous operation mode on three channels of low, mid and high on both bands of operation.

Manufacturer has software control to make sure both transmitters would never transmit at the same time.

Antenna peak gain for 900 MHz LoRa is 2 dBi and 0 dBi for 2.4 GHz BLE.

A DC power supply has been provided by manufacturer which gets power from AC main and provide DC voltage to recharge the batteries of the unit. Manufacturer declares that this power supply is not sold with the unit hence the radiated testing has been done without the power supply attached to unit for restricted band testing.

---

**Accessories:** DC power supply  
AC to DC adaptor- model WT24-1202000-U

---

**Cables:** Can bus cable connecting DC power supply to Unit

---

**Modifications:** None

---

### 15.203: Antenna Requirement:

The antenna is permanently attached to the EUT

The antenna uses a unique coupling

The EUT must be professionally installed

The antenna requirement does not apply



## Test Results Summary

| Specification                | Test Name                          | Pass, Fail, N/A | Comments |
|------------------------------|------------------------------------|-----------------|----------|
| 15.247(b)                    | Peak Output Power                  | Pass            |          |
| 15.247(b)                    | Conducted Spurious Emissions       | Pass            |          |
| 15.247(d), 15.209(a), 15.205 | Radiated Spurious Emissions        | Pass            |          |
| 15.247(d), 15.209(a), 15.205 | Emissions At Band Edges            | Pass            |          |
| 15.247(a)(2)                 | Occupied Bandwidth                 | Pass            |          |
| 15.247(e)                    | Transmitter Power Spectral Density | Pass            |          |
| 15.207                       | A/C Powerline Conducted Emissions  | Pass            |          |
| 15.247(a)                    | Carrier separation Frequency       | Pass            |          |
| 15.247(a)                    | Dwell Time                         | Pass            |          |
| 15.247(a)                    | Number of Hopping Channels         | Pass            |          |



**Peak Output Power**


**Engineer:** Poona Saber

**Test Date:** 12/24/18

**Test Procedure**

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was maximized for highest emission per X,Y,Z axes and set to transmit on the lowest, middle and highest frequencies at the maximum power level. The peak readings were taken, and the result was then compared to the limit.

**Test Setup**



**Transmitter Peak Output Power**

**900 MHz**

| Tuned Frequency (MHz) | Measured Value EIRP (dBm) | Antenna Gain (dBi) | Conducted power (dBm) | Specification Limit | Result |
|-----------------------|---------------------------|--------------------|-----------------------|---------------------|--------|
| 902.3                 | 3.51                      | 2                  | 1.51                  | 1 W (30 dBm)        | Pass   |
| 915                   | 5.6                       | 2                  | 3.6                   | 1 W (30 dBm)        | Pass   |
| 927.7                 | 5.12                      | 2                  | 3.12                  | 1 W (30 dBm)        | Pass   |

**2.4 GHz**

| Tuned Frequency (MHz) | Measured Value (dBm) | Antenna Gain (dBi) | Conducted power (dBm) | Specification Limit | Result |
|-----------------------|----------------------|--------------------|-----------------------|---------------------|--------|
| 2402                  | -1.98                | 0                  | -1.98                 | 1 W (30 dBm)        | Pass   |
| 2440                  | -7.097               | 0                  | -7.097                | 1 W (30 dBm)        | Pass   |
| 2480                  | -2.224               | 0                  | -2.224                | 1 W (30 dBm)        | Pass   |



## Radiated Spurious Emission in Non-Restricted Frequency Bands

**Engineer:** Poona Saber

**Test Date:** 12/25/18

### Test Procedure

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was maximized for highest emission per X, Y, Z axes and set to transmit on the lowest, middle and highest frequencies at the maximum power level.

The EUT was verified for spurious emissions of part 15.247 (d) and the frequency range from 30 MHz to the 10<sup>th</sup> harmonic of the fundamental transmitter was observed.

If the maximum peak conducted output power procedure was used to determine compliance, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc) which is done by reference level measurements per 11.11.2 of C63.10-2013 and emission level measurement of 11.11.3.

### Test Setup



Note: For measurements in restricted bands per KDB 558074 a maximum ground reflection factor of 4.7 dB shall be added to EIRP level for frequencies between 30 MHz and 1000 MHz.

**See Annex A for test results**



## Radiated Spurious Emissions in Restricted Frequency Bands

Engineer: Poona Saber

Test Date: 1/23/18

### Test Procedure Radiated Spurious Emissions: 30 – 1000 MHz

The EUT was tested in a semi-anechoic test chamber set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for general Radiated Emissions limits of 15.209 if emissions fall in 15.205 restricted band. The EUT was tested by rotating it 360° with the antennas in both the vertical and horizontal orientation and was raised from 1 to 4 meters to ensure the TX signal levels were maximized.

All emissions from 30 MHz to 1 GHz were examined.

Measured Level includes antenna and receiver cable correction factors.


Correction factors were input into the spectrum analyzer before recording "Measured Level".

RBW = 100 KHz

VBW = 300 KHz

Detector – Quasi Peak


#### Test Setup



### Test Procedure for Radiated Spurious Emissions above 1 GHz

The EUT was tested in a semi anechoic chamber set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Spurious Emissions. The antenna, band reject filter, amplifier and cable correction factors were input into the spectrum analyzer before recording the Measured Level to ensure accurate readings. The spectrum for each tuned frequency was examined to the 10th harmonic.

#### Test Setup



| Detector Settings | RBW (MHz) | VBW (MHz) | Span         |
|-------------------|-----------|-----------|--------------|
| Peak              | 1         | 3         | As Necessary |
| Average           | 1         | 3         | As Necessary |

See Annex B for test results



## DTS Bandwidth


Engineer: Poona Saber

Test Date: 12/25/18

### Test Procedure

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. Procedures on ANSI C63.10 subclause 11.8 were followed. The analyzer was set to max hold and when the entire spectrum was captured the 6dB and 99% bandwidths were measured to verify the bandwidth met the specification.

### Test Setup



#### 6 dB Occupied Bandwidth for 2.4 GHz

| Frequency (MHz) | Measured Bandwidth (KHz) | Specification Limit (kHz) | Result |
|-----------------|--------------------------|---------------------------|--------|
| 2402            | 899.72                   | ≥ 500                     | Pass   |
| 2440            | 900.15                   | ≥ 500                     | Pass   |
| 2480            | 842.03                   | ≥ 500                     | Pass   |

#### 20 dB Occupied Bandwidth for 900 MHz Lora


| Frequency (MHz) | Measured Bandwidth (KHz) | Specification Limit (kHz) | Result |
|-----------------|--------------------------|---------------------------|--------|
| 902.3           | 146.107                  | ≤ 500                     | Pass   |
| 915             | 143.66                   | ≤ 500                     | Pass   |
| 927.7           | 145.18                   | ≤ 500                     | Pass   |

#### 99% Bandwidth Summary


| Frequency (MHz) | Measured Bandwidth (KHz) | Result |
|-----------------|--------------------------|--------|
| 902.3           | 127.03                   | Pass   |
| 915             | 127.02                   | Pass   |
| 927.7           | 127.17                   | Pass   |
| 2402            | 1814.1                   | Pass   |
| 2440            | 1786.5                   | Pass   |
| 2480            | 1842.4                   | Pass   |




### 902.3 MHz



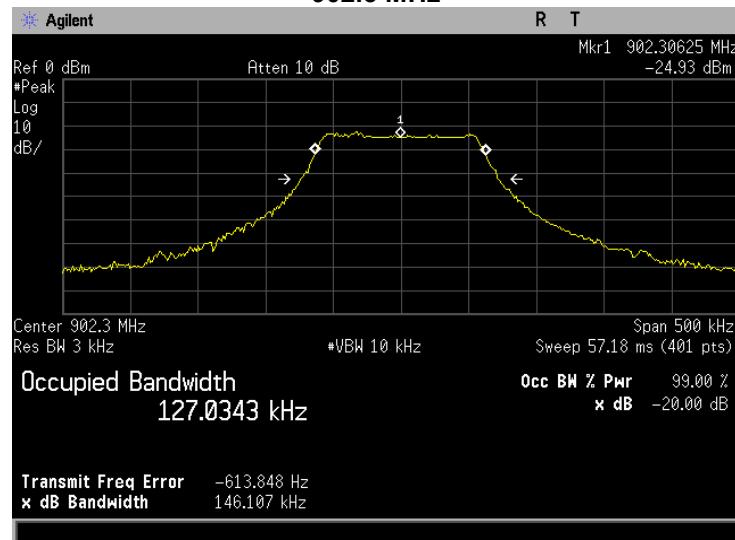





### 915 MHz

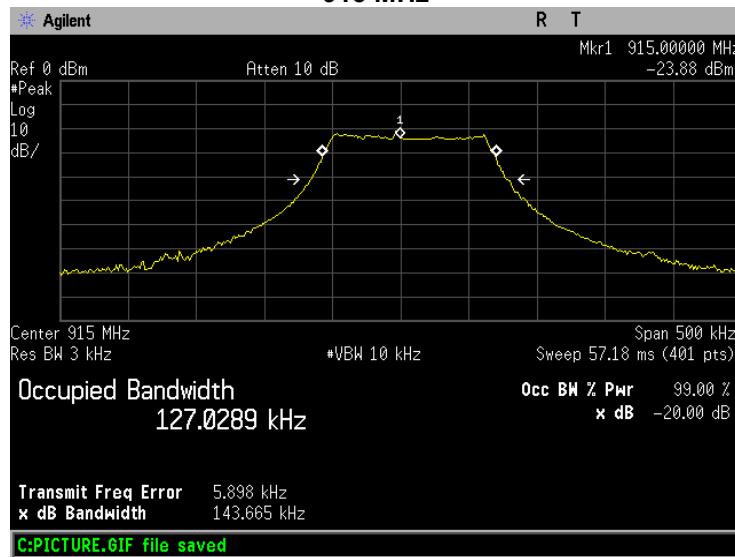

### 927.7 MHz

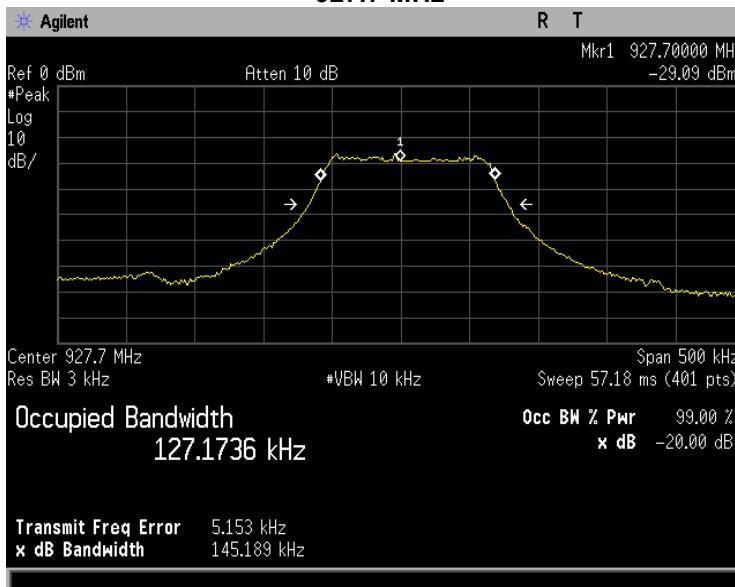

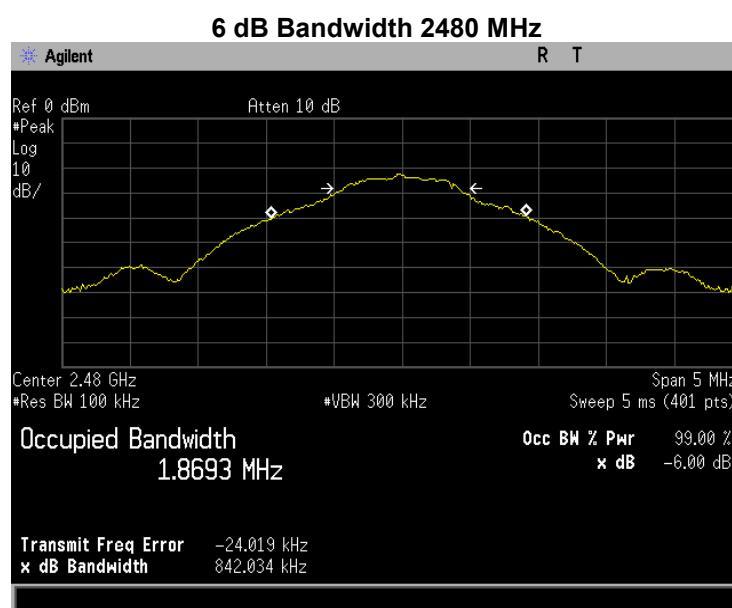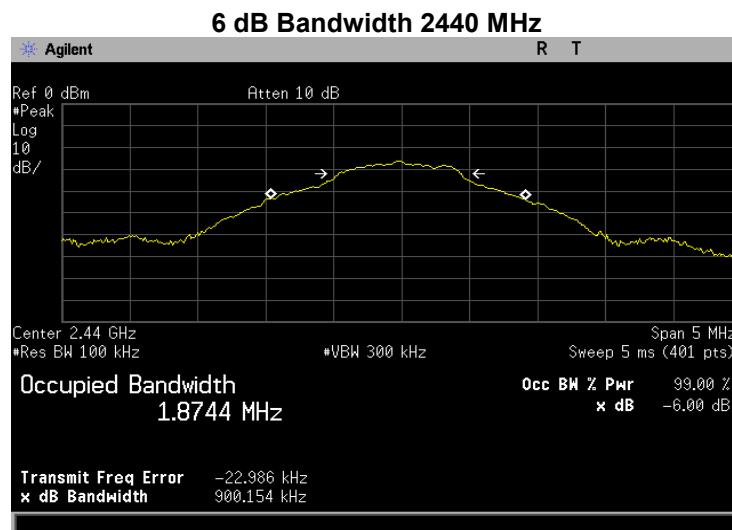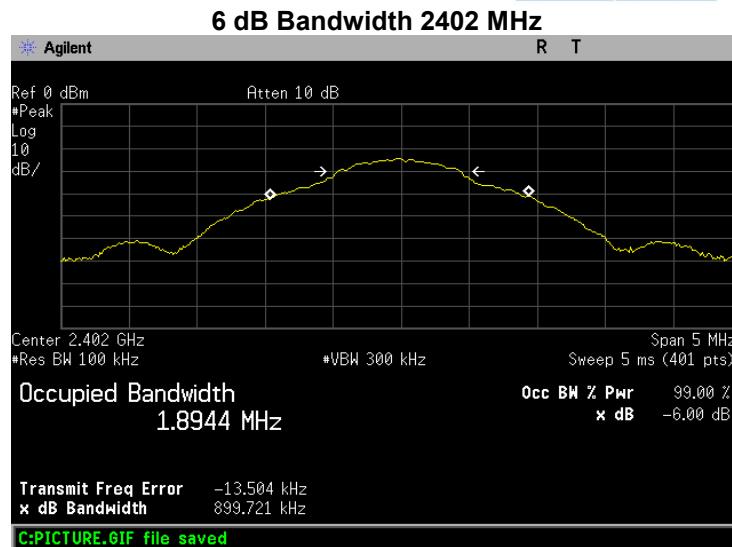

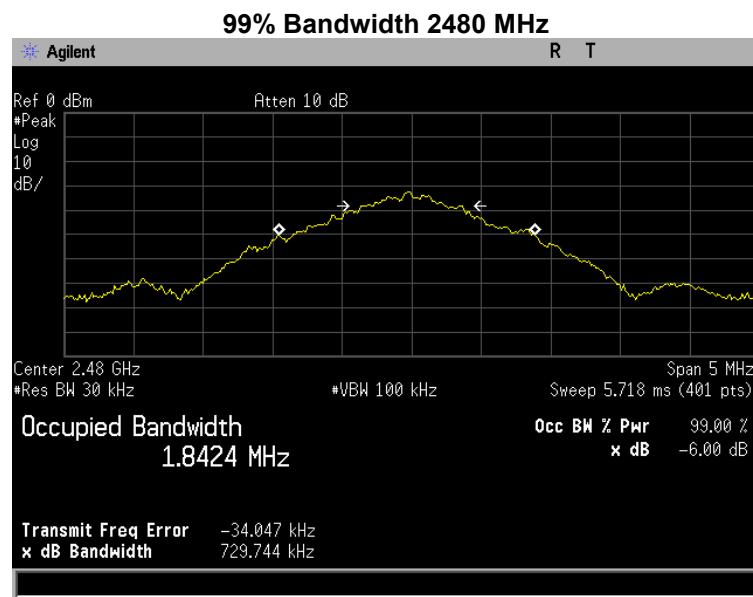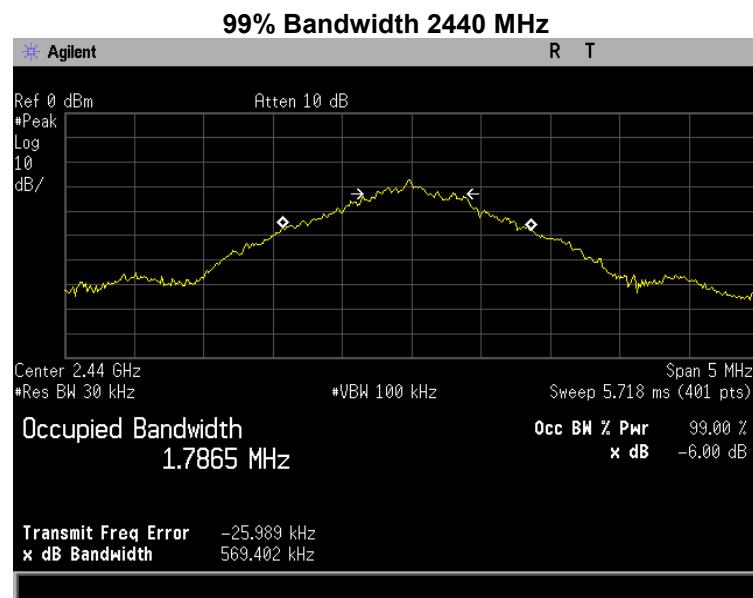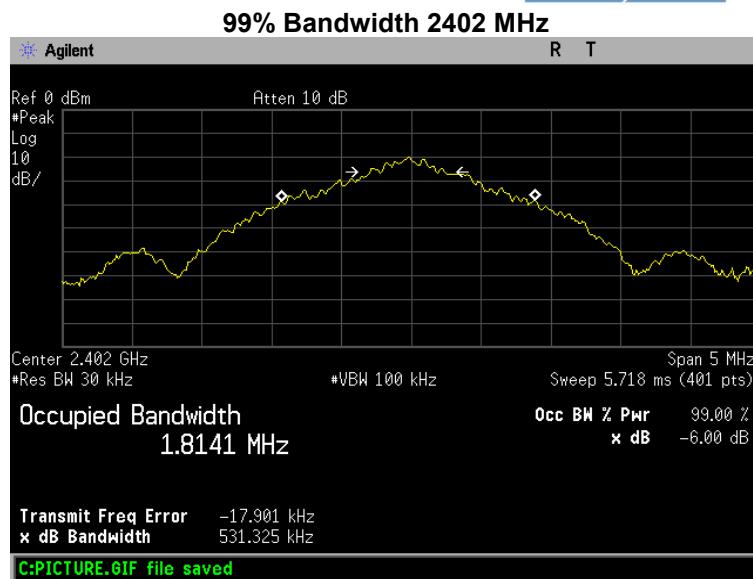



## Transmitter Power Spectral Density (PSD)


Engineer: Poona Saber

Test Date: 1/25/19

### Test Procedure


The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The test was performed per section 11.10 of C63.10:2013 "Procedure for determining PSD for DTS devices"

### Test Setup



### PSD Summary

| Frequency (MHz) | Measured Data (dBm) | Specification Limit (dBm) | Result |
|-----------------|---------------------|---------------------------|--------|
| 2402            | -2.184              | 8                         | Pass   |
| 2440            | -7.212              | 8                         | Pass   |
| 2480            | -2.276              | 8                         | Pass   |

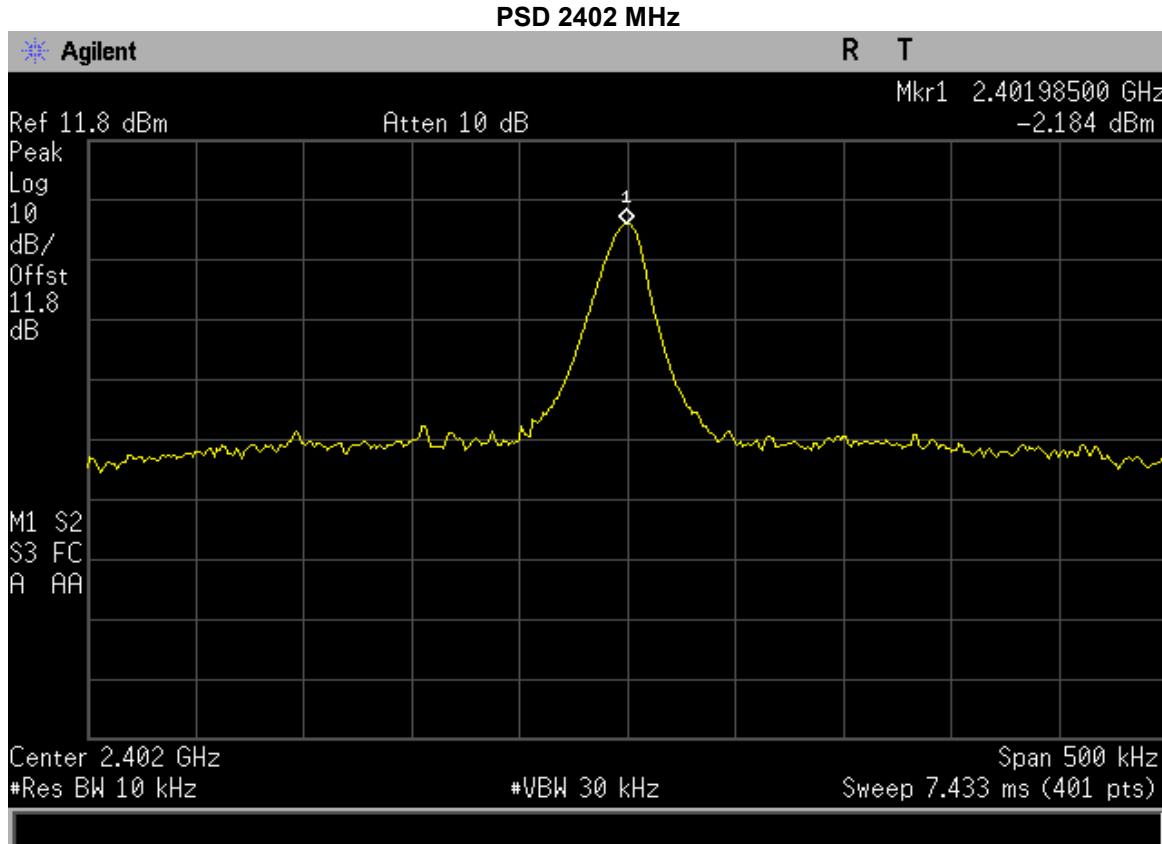





Compliance Testing, LLC

Testing since 1963

PSD 2440 MHz

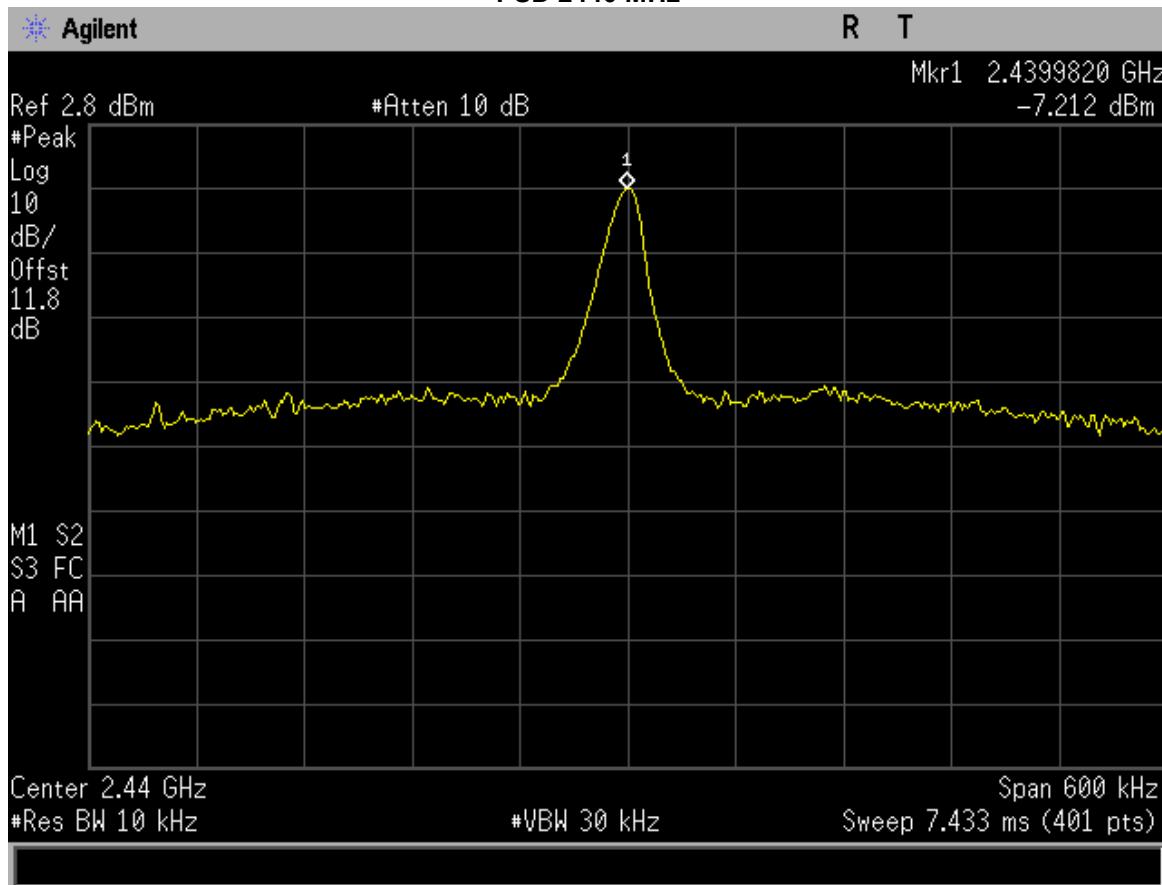

PSD 2480 MHz

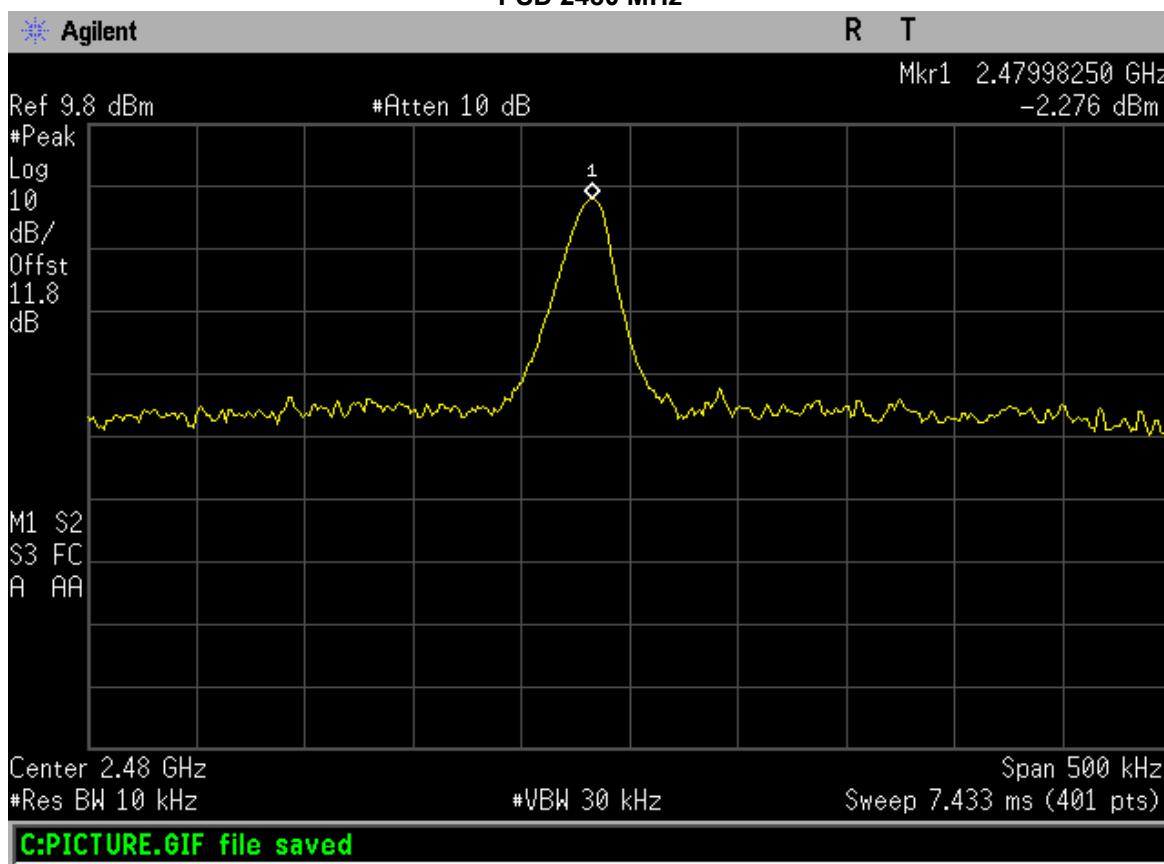



## A/C Powerline Conducted Emission


Engineer: Poona Saber

Test Date: 1/21/19

### Test Procedure


The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a transient limiter, which then connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were measured and compared to the specification limits.

### Test Setup




### Conducted Emission Test Results

#### Line 1 Peak Plot

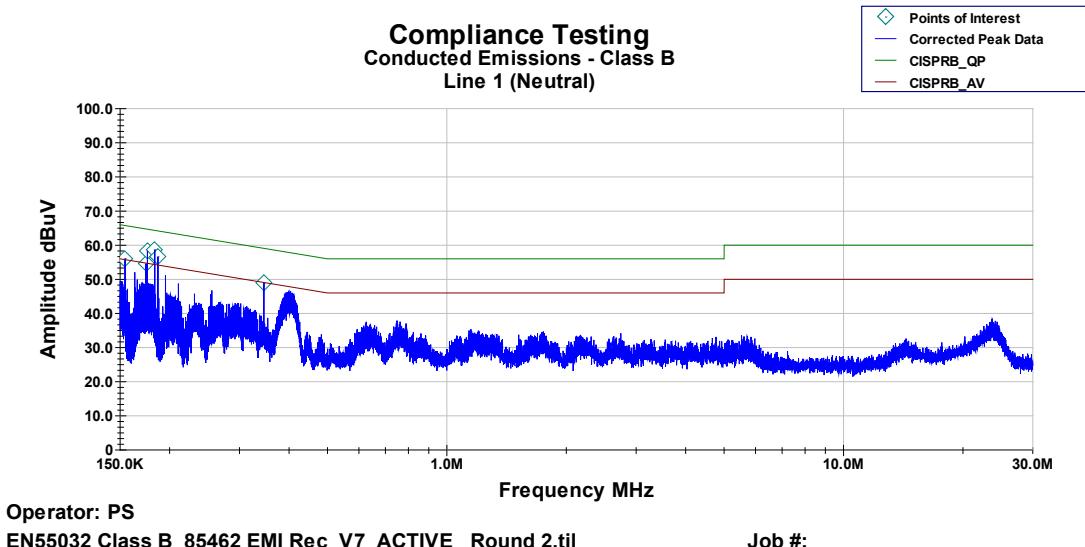

#### Line 2 Peak Plot

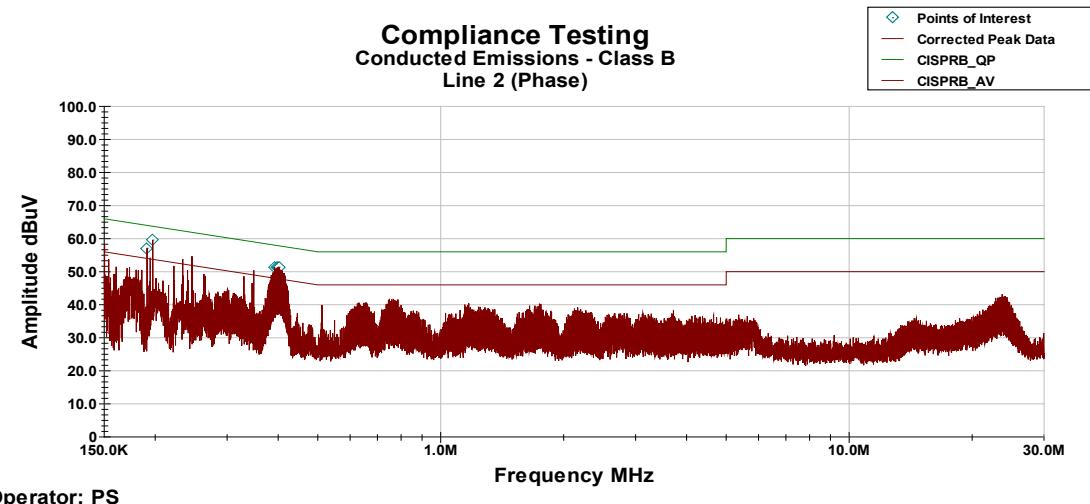



## Line 1 Neutral Avg Detector

| Frequency  | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | Avg Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|-----------------|
| 150.03 KHz | 13.1                  | 0.3                         | 0.02            | 10.2                   | 23.616            | 55.999       | -32.383         |
| 162.85 KHz | -13.44                | 0.2                         | 0.02            | 10.171                 | -3.049            | 55.633       | -58.681         |
| 171.79 KHz | 17.65                 | 0.2                         | 0.02            | 10.1                   | 27.97             | 55.377       | -27.407         |
| 176.37 KHz | 17.72                 | 0.2                         | 0.02            | 10.1                   | 28.037            | 55.247       | -27.21          |
| 192.61 KHz | 8.99                  | 0.2                         | 0.02            | 10.1                   | 19.307            | 54.783       | -35.476         |
| 337.88 KHz | 10.16                 | 0.13                        | 0.027           | 10.1                   | 20.421            | 50.632       | -30.211         |

## Line 2 Phase Avg Detector

| Frequency  | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | Avg Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|-----------------|
| 185.21 KHz | 14.97                 | 0.2                         | 0.02            | 10.1                   | 25.29             | 54.994       | -29.704         |
| 192.55 KHz | 9.36                  | 0.2                         | 0.02            | 10.1                   | 19.68             | 54.784       | -35.104         |
| 396.48 KHz | 22.69                 | 0.1                         | 0.03            | 10.1                   | 32.922            | 48.958       | -16.036         |
| 401.15 KHz | 23.42                 | 0.1                         | 0.03            | 10.1                   | 33.647            | 48.824       | -15.178         |
| 401.87 KHz | 23.46                 | 0.1                         | 0.03            | 10.1                   | 33.693            | 48.804       | -15.11          |
| 398.04 KHz | 23.07                 | 0.1                         | 0.03            | 10.1                   | 33.298            | 48.913       | -15.616         |

## Line 1 Neutral QP Detector

| Frequency  | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | QP Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|----------------|
| 150.03 KHz | 30.52                 | 0.3                         | 0.02            | 10.2                   | 41.04             | 65.999       | -24.959        |
| 162.85 KHz | 29.05                 | 0.2                         | 0.02            | 10.171                 | 39.441            | 65.633       | -26.191        |
| 171.79 KHz | 35.88                 | 0.2                         | 0.02            | 10.1                   | 46.2              | 65.377       | -19.177        |
| 176.37 KHz | 35.35                 | 0.2                         | 0.02            | 10.1                   | 45.67             | 65.247       | -19.577        |
| 192.61 KHz | 27.4                  | 0.2                         | 0.02            | 10.1                   | 37.72             | 64.783       | -27.063        |
| 337.88 KHz | 24.14                 | 0.131                       | 0.027           | 10.1                   | 34.398            | 60.632       | -26.234        |

## Line 2 Phase QP Detector

| Frequency  | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | QP Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|----------------|
| 185.21 KHz | 29.86                 | 0.2                         | 0.02            | 10.1                   | 40.18             | 64.994       | -24.814        |
| 192.55 KHz | 27.81                 | 0.2                         | 0.02            | 10.1                   | 38.13             | 64.784       | -26.654        |
| 396.48 KHz | 37.57                 | 0.1                         | 0.03            | 10.1                   | 47.802            | 58.958       | -11.156        |
| 401.15 KHz | 37.6                  | 0.1                         | 0.03            | 10.1                   | 47.83             | 58.824       | -10.994        |
| 401.87 KHz | 37.74                 | 0.1                         | 0.03            | 10.1                   | 47.97             | 58.804       | -10.834        |
| 398.04 KHz | 37.68                 | 0.1                         | 0.03            | 10.1                   | 47.911            | 58.913       | -11.002        |



## Carrier Frequency Separation


Engineer: Poona Saber

Test Date: 12/25/2018

### Test Procedure


Per 15.247 (a) requirements the frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### Test Setup



### Test Results

900 MHz Band

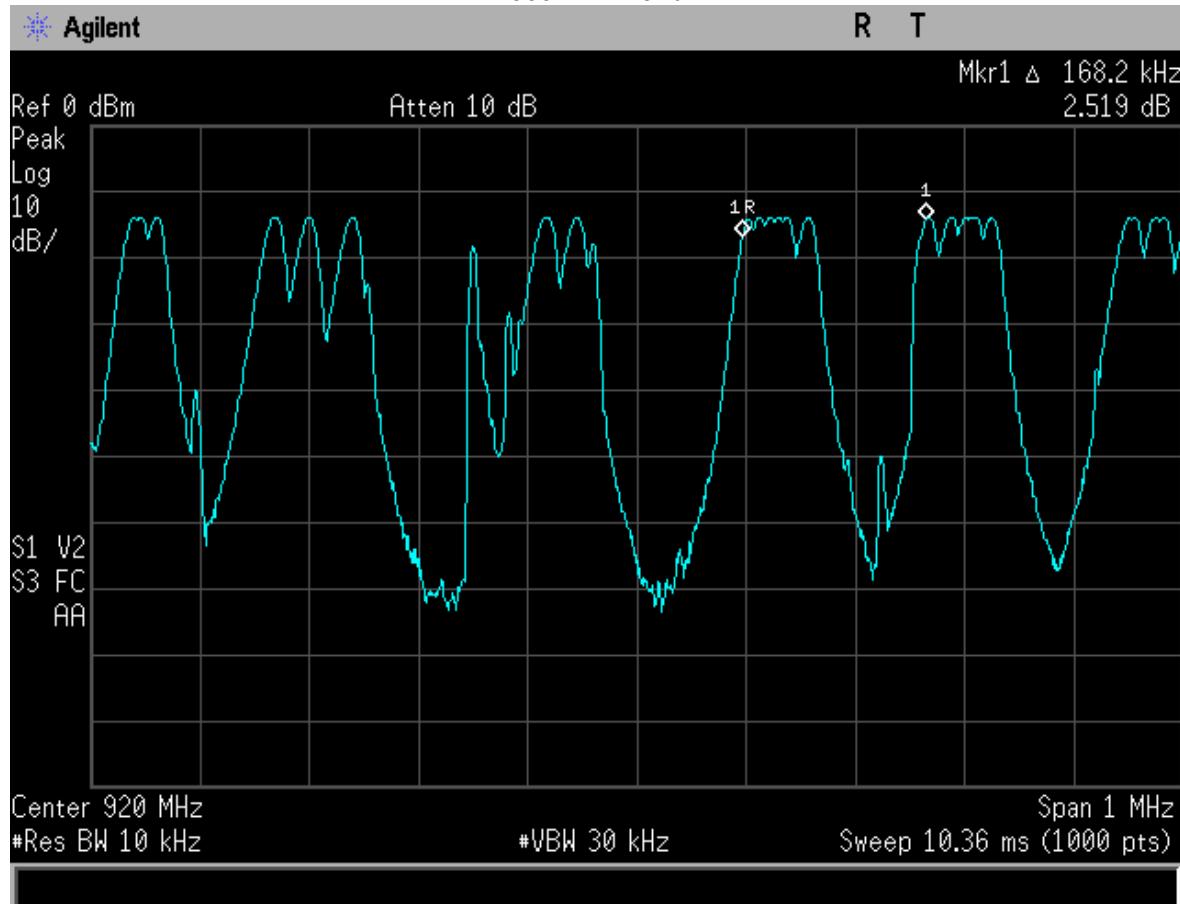



## Dwell Time

**Engineer:** Poona Saber

**Test Date:** 12/25/18

## Test Procedure

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna.

The EUT was set to hopping mode with the spectrum analyzer set to a 0 Hz span. A single transmission was captured and the dwell time was recorded.


For frequency hopping systems operating in the 902-928 MHz band:

if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period. if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period


For frequency hopping systems operating in the 2400-2483.5 MHz band:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

## Test Setup




## Dwell Time 1 900 MHz

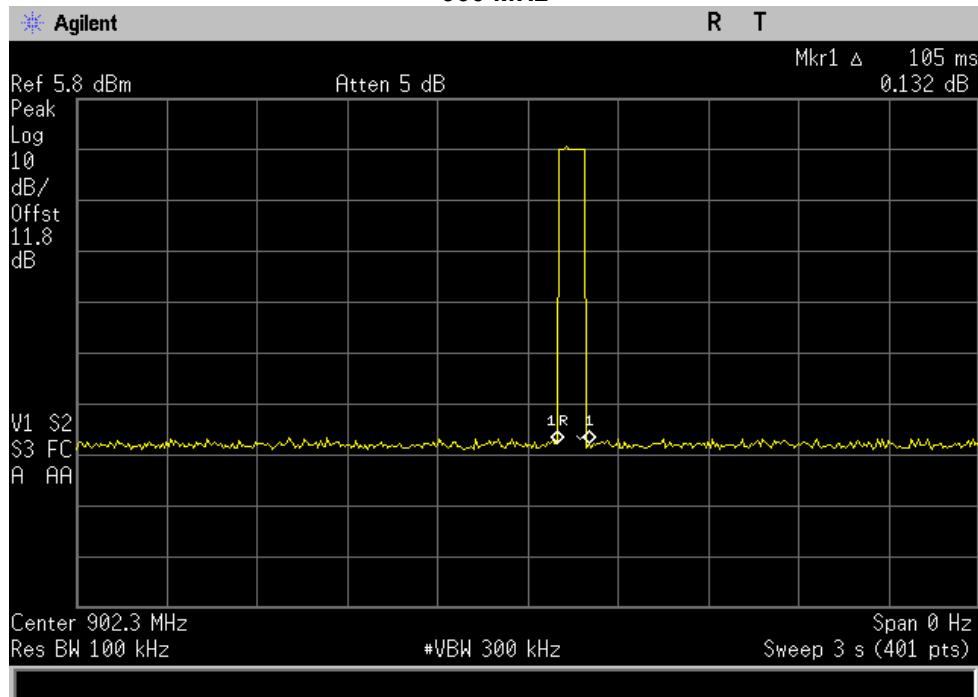



**Occupancy Over 20s**

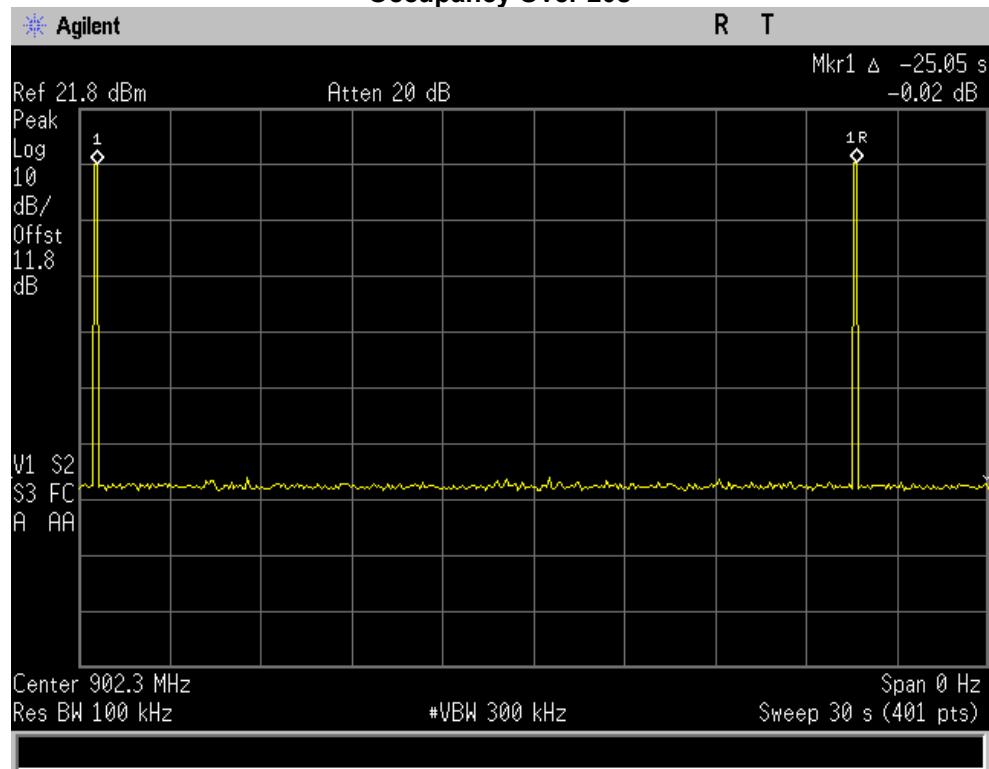

The average time of occupancy is not greater than 0.4 seconds within a 20 second period



## Number of Hopping Channels


Engineer: Poona Saber

Test Date: 12/25/18

### Test Procedure


The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The Span was set to the specified band end points. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies. The EUT was then set to operate in hopping mode. The MAX HOLD function of the spectrum analyzer was utilized to verify the number of hopping channels.

### Test Setup



### Number of Hopping Channels

There are 127 Hopping channels available

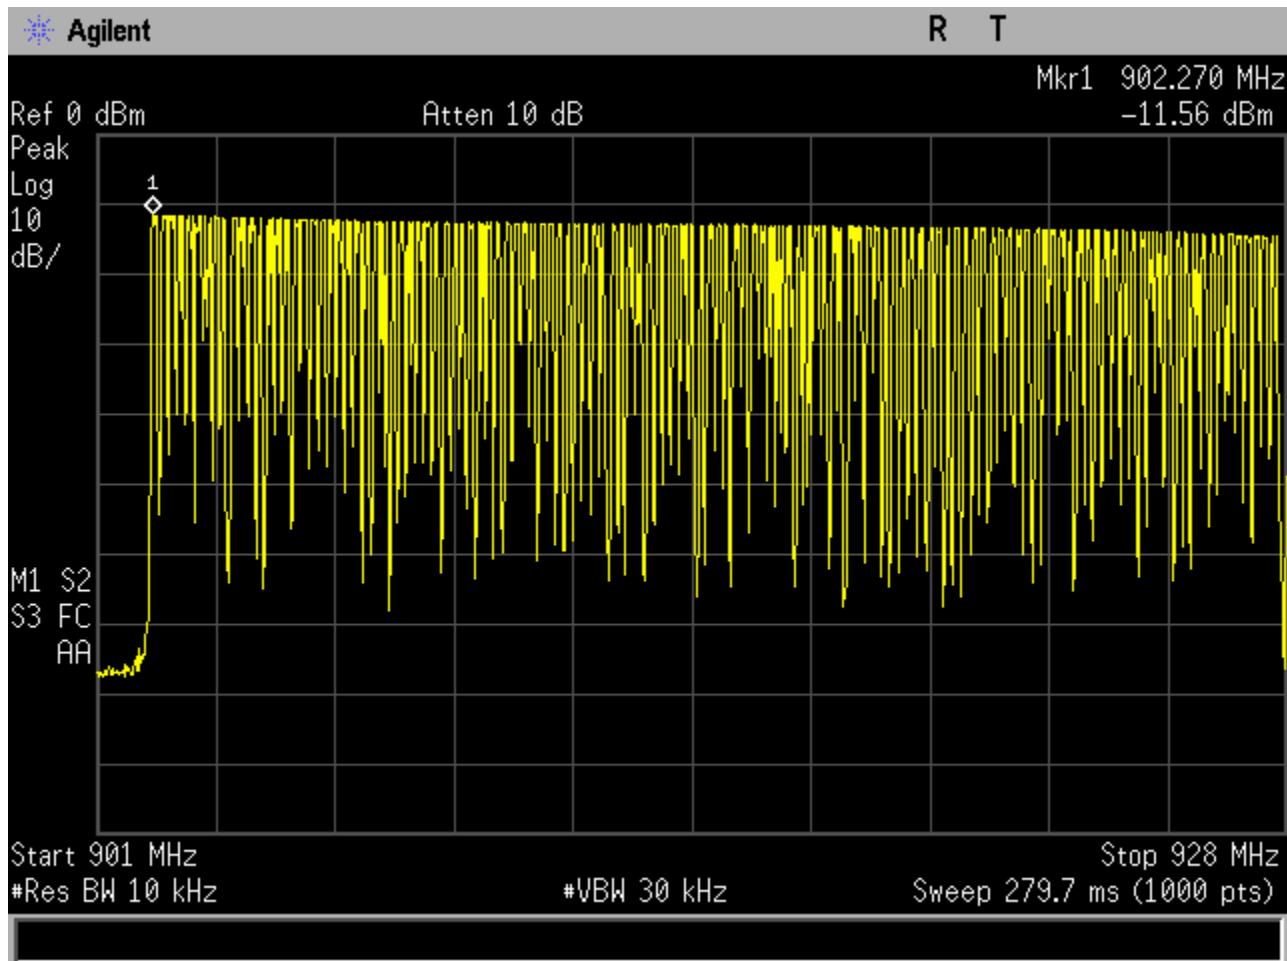



## Measurement Uncertainty

**RF 15.247**

| <b>Test Item</b>              | <b>Frequency Range</b> | <b>Description</b>  | <b>Uncertainty</b> |
|-------------------------------|------------------------|---|--------------------|
| Conducted Emissions (AC Line) | 150KHz – 30MHz         | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 | ±3.5dB             |
| Radiated Spurious Emissions   | 30MHz – 1GHz           |   | +5.6dB/-4.5dB      |
| Radiated Spurious Emissions   | 1GHz – 18Ghz           |   | +4.3dB/-4.1dB      |
| Radiated Spurious Emissions   | 18GHz – 40Ghz          |   | +5.3dB/-5.6dB      |
| RF Power, Conducted           | 800-6000MHz            |   | ±1.2dB             |
| Power Spectral Density        | 800-6000MHz            |   | ±2.3dB             |
| DTS Bandwidth                 | 800-6000MHz            |   | ±3%                |
| Emissions at Band Edge        | 800-6000MHz            |   | ±5%                |

**Test Equipment Utilized**

| Description                   | Manufacturer | Model #                       | CT Asset # | Last Cal Date        | Cal Due Date |
|-------------------------------|--------------|-------------------------------|------------|----------------------|--------------|
| Horn Antenna                  | ARA          | DRG-118/A                     | i00271     | 6/16/18              | 6/16/20      |
| Horn Antenna, Amplified       | ARA          | MWH-1826/B                    | i00273     | 5/22/18              | 5/22/21      |
| Humidity / Temp Meter         | Newport      | IBTHX-W-5                     | i00282     | 6/29/18              | 6/29/19      |
| Spectrum Analyzer             | Agilent      | E4407B                        | i00331     | 12/4/19              | 12/4/20      |
| Bi-Log antenna                | Chase        | CBL6111C                      | i00267     | 3/8/18               | 3/8/20       |
| EMI Analyzer                  | Agilent      | E7405A                        | i00379     | 2/13/18              | 2/13/19      |
| 3 Meter Semi-Anechoic Chamber | Panashield   | 3 Meter Semi-Anechoic Chamber | i00428     | 8/15/16              | 8/15/19      |
| Preamplifier                  | Miteq        | AFS44 00101 400 23-10P-44     | i00509     | N/A                  | N/A          |
| EMI Receiver                  | HP           | 8546A                         | i00033     | 3/26/18              | 3/26/19      |
| Transient Limiter             | Com-Power    | LIT-153                       | i00123     | Verified on: 1/21/19 |              |
| AC Power Source               | Behlman      | BL 6000                       | i00362     | Verified on: 1/21/19 |              |
| LISN                          | COM-Power    | LI-125A                       | i00447     | 9/11/17              | 9/11/19      |
| LISN                          | COM-Power    | LI-125A                       | i00449     | 9/11/17              | 9/11/19      |

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

**END OF TEST REPORT**




**Compliance Testing, LLC**  
Testing since 1963

**Test Setup Photos**  
**FCC ID: 2A9KMOBDLRA1**  
**IC: 24436-OBDLRA1**

**RF Radiated Below 1 GHz**



**RF Radiated Above 1 GHz**

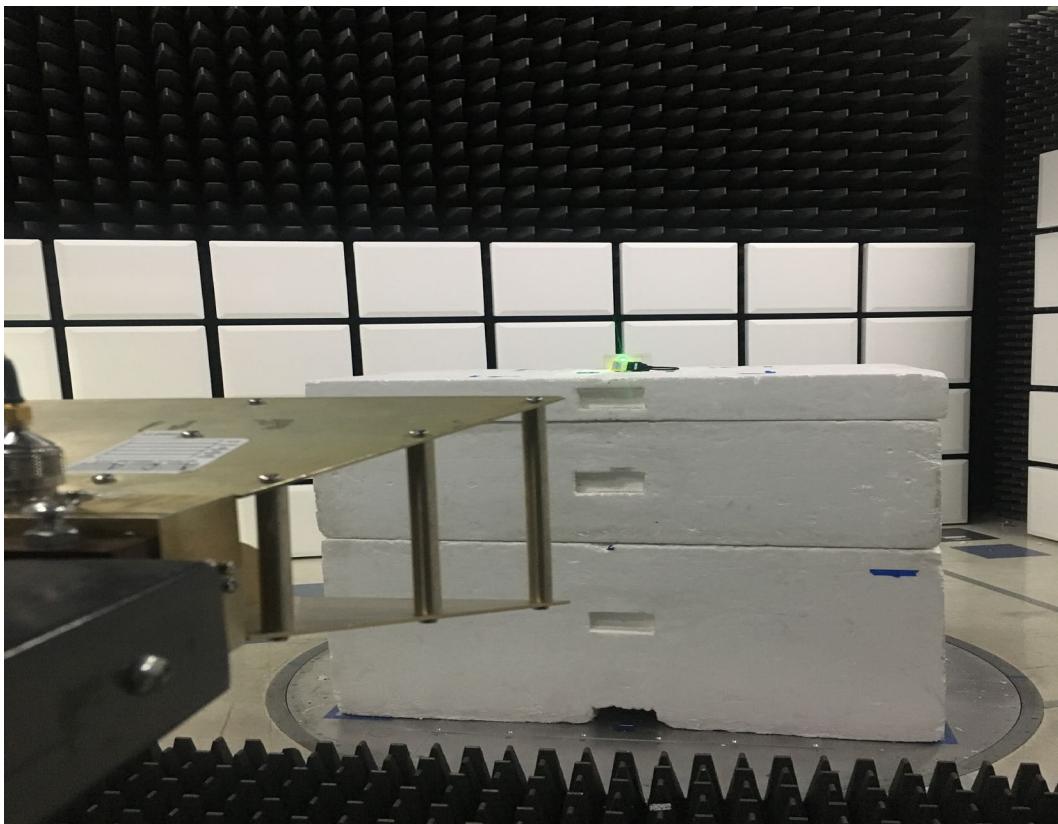



**Compliance Testing, LLC**  
Testing since 1963

**Conducted Emissions**

