

FCC PART 15.249

TEST REPORT

For

Pimax Technology(Shanghai)Co., Ltd.

605A the first building, 3000 Longdong Ave, Pudong, Shanghai, China

FCC ID: 2ARKN-P2

Report Type: Original Report	Product Type: Pimax VR
Test Engineer: <u>Stone Zhang</u> <i>Stone Zhang</i>	
Report Number: <u>RSHA180928001-00A</u>	
Report Date: <u>2018-10-22</u>	
Reviewed By: <u>Oscar Ye</u> <i>Oscar Ye</i> RF Leader	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FCC§15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
TEST EQUIPMENT SETUP	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Pimax Technology(Shanghai)Co., Ltd.
Tested Model	P2
Product Type	Pimax VR
Dimension	280.01mm(L)×108.2mm(W)×135.9 mm(H)
Power Supply	DC 12V from adapter

Adapter Information:

Model: AMS115-1202000FU

Input: AC100-240 V 50/60Hz 0.8A Max

Output: 12V, 2.0A

*All measurement and test data in this report was gathered from production sample serial number: 20180928001.
(Assigned by BACL, Kunshan). The EUT was received on 2018-09-28.*

Objective

This type approval report is prepared on behalf of Pimax Technology(Shanghai)Co., Ltd. in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

FCC Part15.249 DXX grants with FCC ID: NM82PR7100.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 558074 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	41	2442
2	2403	...	...
...	...	78	2479
39	2440	79	2480
40	2441	/	/

EUT was tested with Channel 1, 39 and 79.

EUT Exercise Software

RF_TOOL

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter-2	LA65NS0-00	DF263
BOLD	Earphone	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
USB Cable	2.0	EUT	Notebook
DP Cable	2.0	EUT	Notebook
Power Cable-1	2.0	EUT	Adapter
Power Cable-2	1.2	Notebook	Adapter-2
Power Cable-3	1.0	Adapter-2	Socket/LISN-2


Block Diagram of Test Setup

For Conducted Emissions:

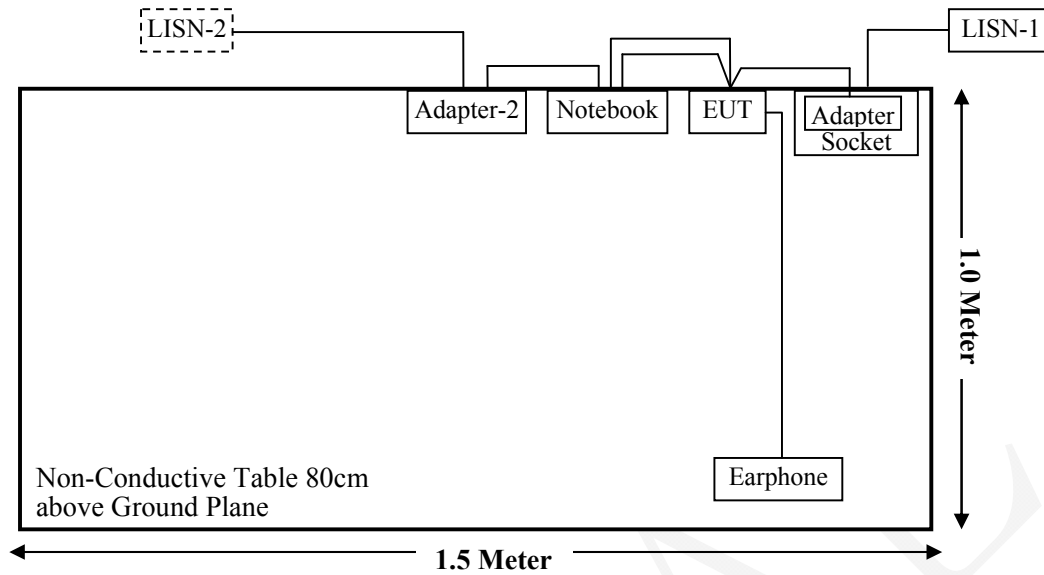


Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz):

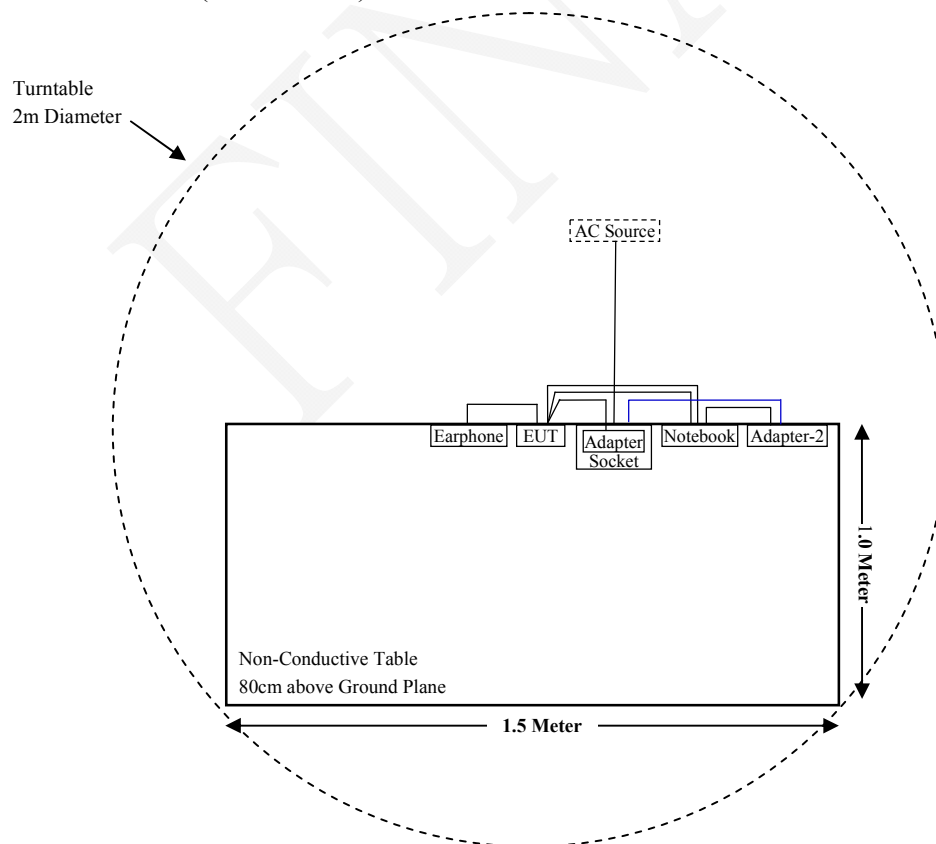

For Radiated Emissions(Above 1GHz):

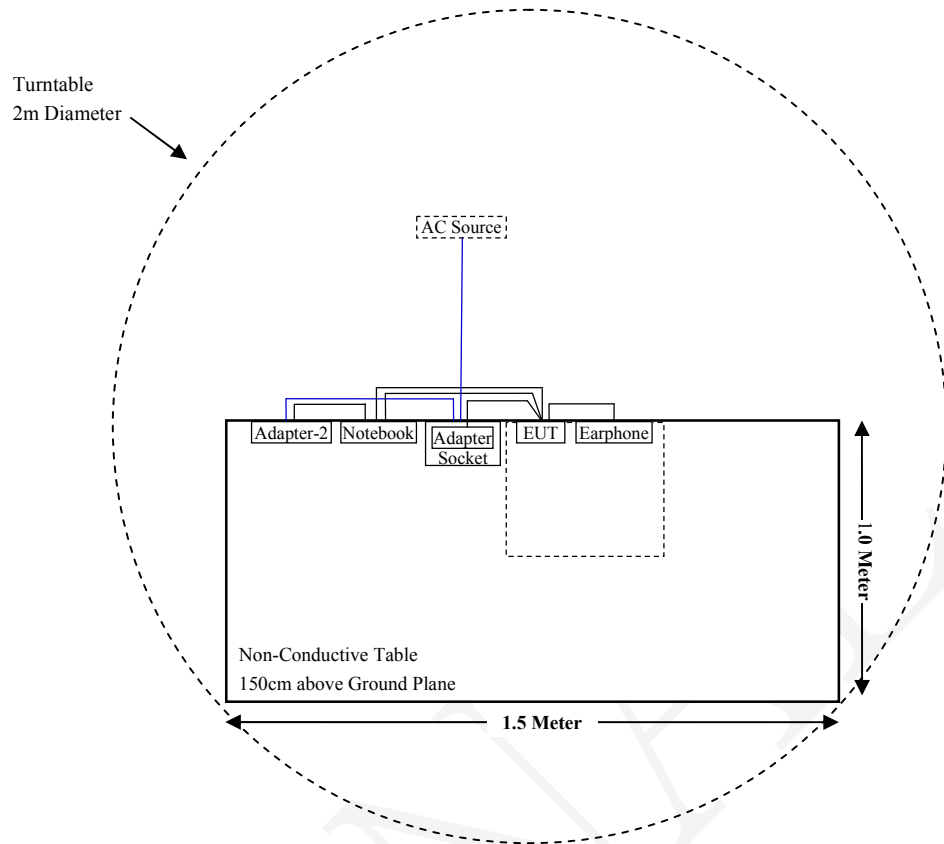

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Compliant
15.205, §15.209, §15.249	Radiated Emissions& Out of Band Emission	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
MICRO-TRONICS	Notch Filter	BRM50702	G024	2018-08-05	2019-08-04
A.H.Systems, inc	Amplifier	2641-1	466	2018-09-11	2019-09-10
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
Narda	Attenuator/10dB	10dB	010	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2018-07-23	2019-07-22
Narda	Attenuator/10dB	10dB	010	2018-08-15	2019-08-14
Pimax	RF Cable	PimaxC01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-12	2018-11-11
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has two PCB antennas ,the antenna gains are 0dBi for both ANT1 and ANT2, which were permanently attached, fulfill the requirement of this section, please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

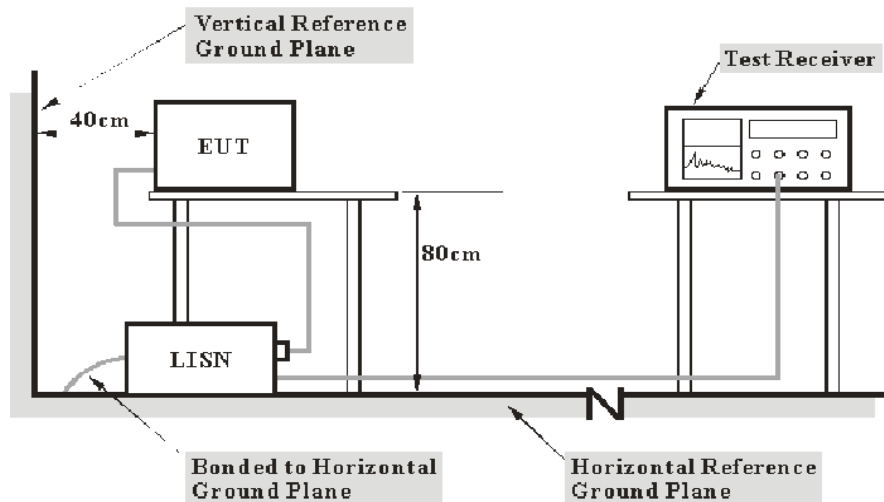

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary


According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	24.2°C~24.5°C
Relative Humidity:	51%~53%
ATM Pressure:	101.2 kPa~101.4 kPa

The testing was performed by Stone Zhang on 2018-09-30 & 2018-10-20.

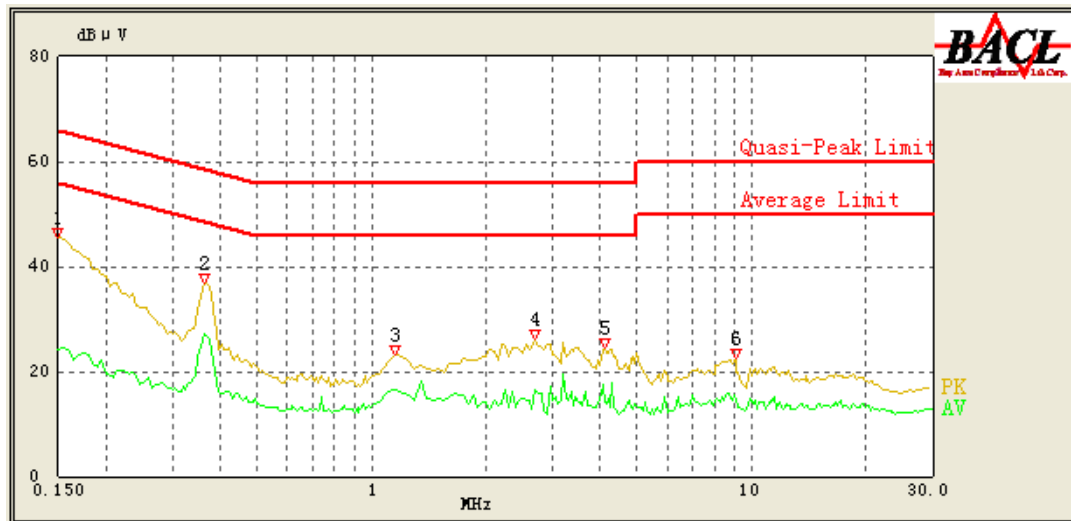Data for Antenna-1:*EUT operation mode: Transmitting in low channel (worst case)***AC 120V/60 Hz, Line**


Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	45.38	QP	9.000	L1	16.06	66.00	20.62	Compliant
0.150	24.03	AV	9.000	L1	16.06	56.00	31.97	Compliant
0.365	36.84	QP	9.000	L1	16.05	58.61	21.77	Compliant
0.365	27.02	AV	9.000	L1	16.05	48.61	21.59	Compliant
1.150	23.17	QP	9.000	L1	15.88	56.00	32.83	Compliant
1.150	16.49	AV	9.000	L1	15.88	46.00	29.51	Compliant
2.700	26.03	QP	9.000	L1	15.85	56.00	29.97	Compliant
2.700	16.62	AV	9.000	L1	15.85	46.00	29.38	Compliant
4.100	24.58	QP	9.000	L1	15.85	56.00	31.42	Compliant
4.100	14.19	AV	9.000	L1	15.85	46.00	31.81	Compliant
9.100	22.60	QP	9.000	L1	16.04	60.00	37.40	Compliant
9.000	15.54	AV	9.000	L1	16.03	50.00	34.46	Compliant

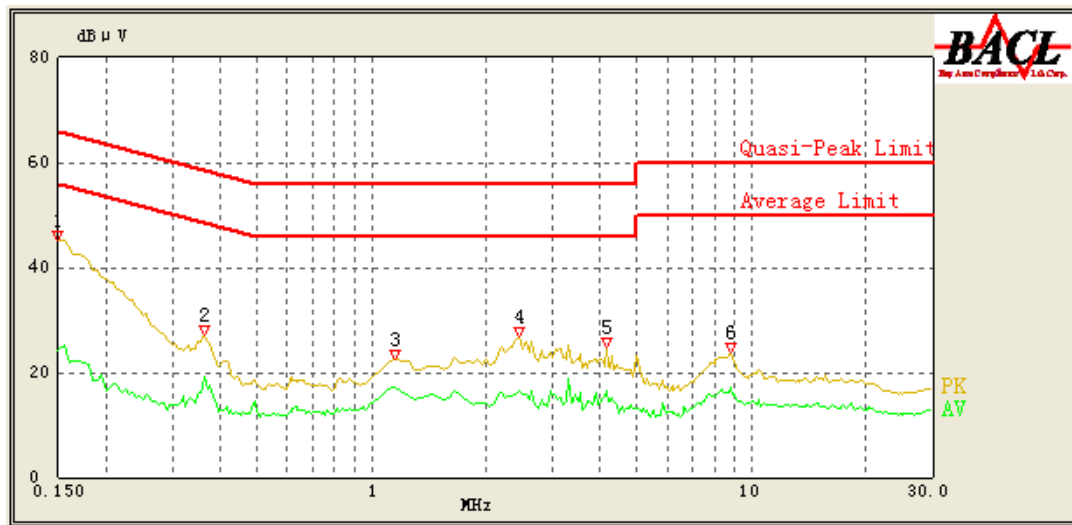AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	45.21	QP	9.000	N	16.06	66.00	20.79	Compliant
0.150	24.04	AV	9.000	N	16.06	56.00	31.96	Compliant
0.365	27.32	QP	9.000	N	16.08	58.61	31.29	Compliant
0.365	19.14	AV	9.000	N	16.08	48.61	29.47	Compliant
1.150	22.47	QP	9.000	N	15.94	56.00	33.53	Compliant
1.150	17.19	AV	9.000	N	15.94	46.00	28.81	Compliant
2.450	26.69	QP	9.000	N	15.90	56.00	29.31	Compliant
2.450	16.43	AV	9.000	N	15.90	46.00	29.57	Compliant
4.150	24.67	QP	9.000	N	15.88	56.00	31.33	Compliant
4.150	16.41	AV	9.000	N	15.88	46.00	29.59	Compliant
8.800	23.74	QP	9.000	N	15.96	60.00	36.26	Compliant
8.800	17.30	AV	9.000	N	15.96	50.00	32.70	Compliant


Note:

1. Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
 Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)

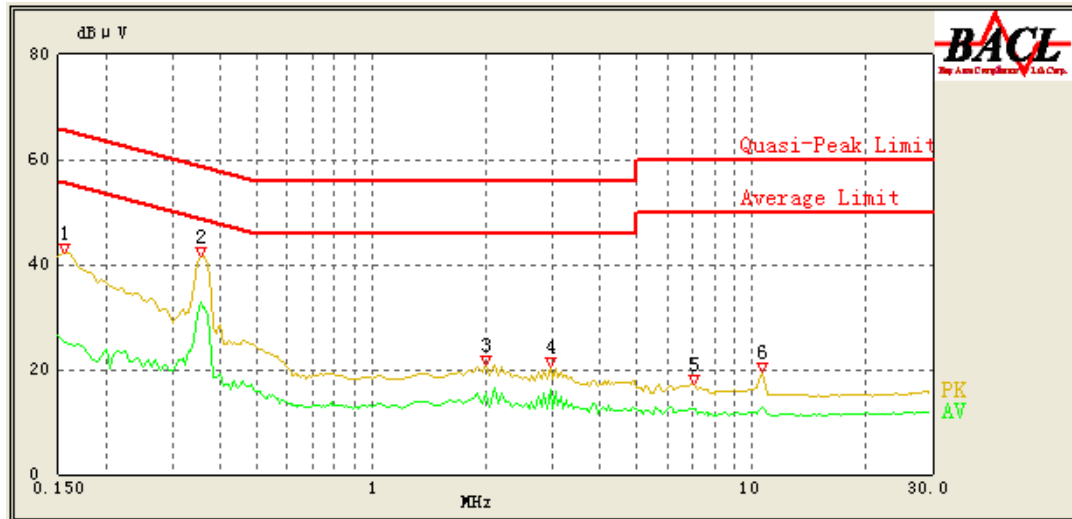Data for Antenna-2:*EUT operation mode: Transmitting in low channel (worst case)***AC 120V/60 Hz, Line**

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.155	42.22	QP	9.000	L1	16.06	65.73	23.51	Compliant
0.155	25.28	AV	9.000	L1	16.06	55.73	30.45	Compliant
0.355	41.46	QP	9.000	L1	16.05	58.84	17.38	Compliant
0.355	32.79	AV	9.000	L1	16.05	48.84	16.05	Compliant
2.000	20.91	QP	9.000	L1	15.85	56.00	35.09	Compliant
2.000	15.56	AV	9.000	L1	15.85	46.00	30.44	Compliant
2.950	20.61	QP	9.000	L1	15.85	56.00	35.39	Compliant
2.950	16.03	AV	9.000	L1	15.85	46.00	29.97	Compliant
7.050	17.04	QP	9.000	L1	15.98	60.00	42.96	Compliant
7.000	12.37	AV	9.000	L1	15.98	50.00	37.63	Compliant
10.700	19.39	QP	9.000	L1	16.08	60.00	40.61	Compliant
10.700	12.79	AV	9.000	L1	16.08	50.00	37.21	Compliant

AC 120V/60 Hz, Neutral

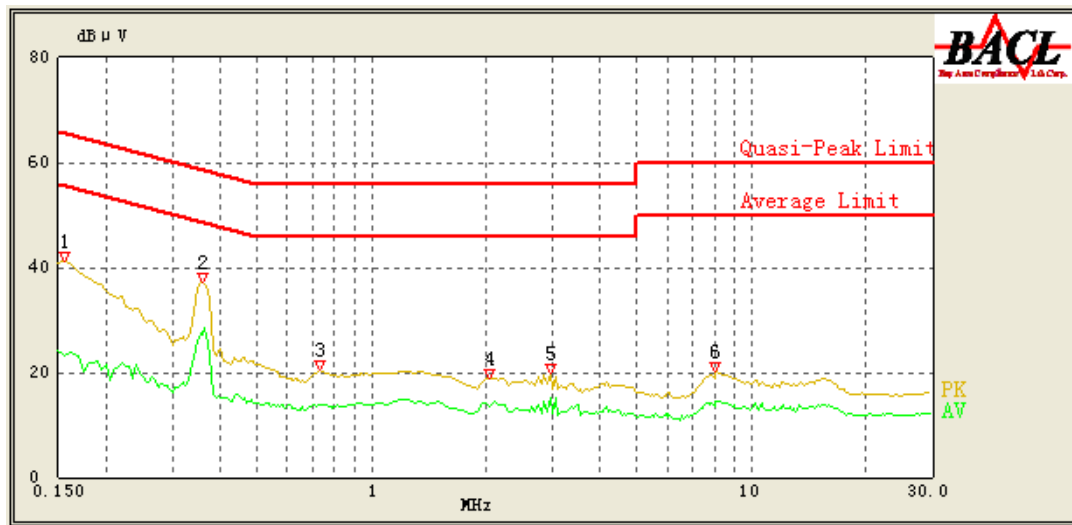

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.155	41.01	QP	9.000	N	16.06	65.73	24.72	Compliant
0.155	23.18	AV	9.000	N	16.06	55.73	32.55	Compliant
0.360	37.08	QP	9.000	N	16.08	58.73	21.65	Compliant
0.360	27.31	AV	9.000	N	16.08	48.73	21.42	Compliant
0.735	20.38	QP	9.000	N	15.98	56.00	35.62	Compliant
0.735	13.91	AV	9.000	N	15.98	46.00	32.09	Compliant
2.050	18.86	QP	9.000	N	15.91	56.00	37.14	Compliant
2.050	13.43	AV	9.000	N	15.91	46.00	32.57	Compliant
2.950	19.98	QP	9.000	N	15.90	56.00	36.02	Compliant
2.950	15.21	AV	9.000	N	15.90	46.00	30.79	Compliant
8.050	20.14	QP	9.000	N	15.94	60.00	39.86	Compliant
8.050	14.47	AV	9.000	N	15.94	50.00	35.53	Compliant

Note:

1. Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
 Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

EUT Setup

Below 1 GHz:

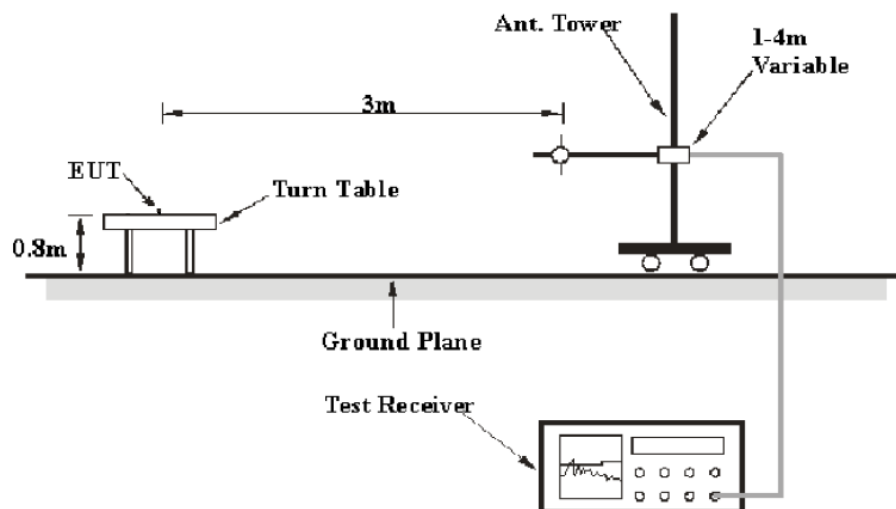

Above 1 GHz:

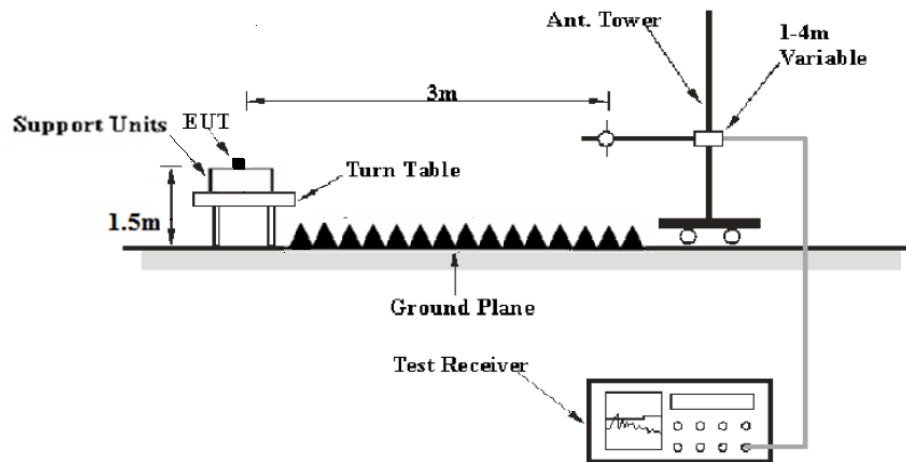

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 &15.205 & 15.249.

Test Data

Environmental Conditions


Temperature:	21.2~24.2°C
Relative Humidity:	48~50%
ATM Pressure:	101.1~101.2kPa

The testing was performed by Stone Zhang from 2018-10-12 to 2018-10-20.

Test Mode: Transmitting

Data for Antenna-1:**Spurious Emission Test:****30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

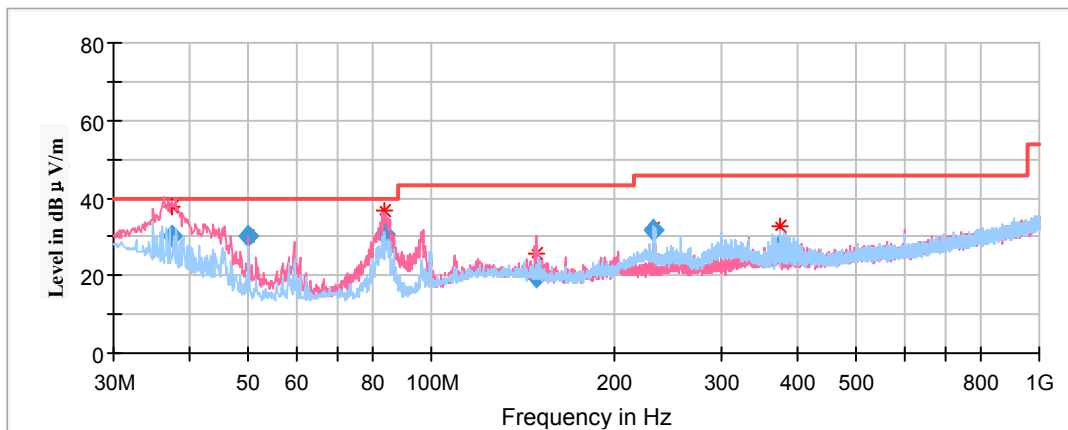

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
37.413800	30.41	101.0	V	171.0	-9.0	40.00	9.59
50.034750	30.11	101.0	V	85.0	-17.5	40.00	9.89
83.809450	30.58	101.0	V	283.0	-17.7	40.00	9.42
148.493950	19.49	101.0	V	324.0	-12.3	43.50	24.01
232.282250	31.46	101.0	H	277.0	-12.2	46.00	14.54
374.877900	27.67	101.0	H	236.0	-8.7	46.00	18.33

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2402MHz


Full Spectrum

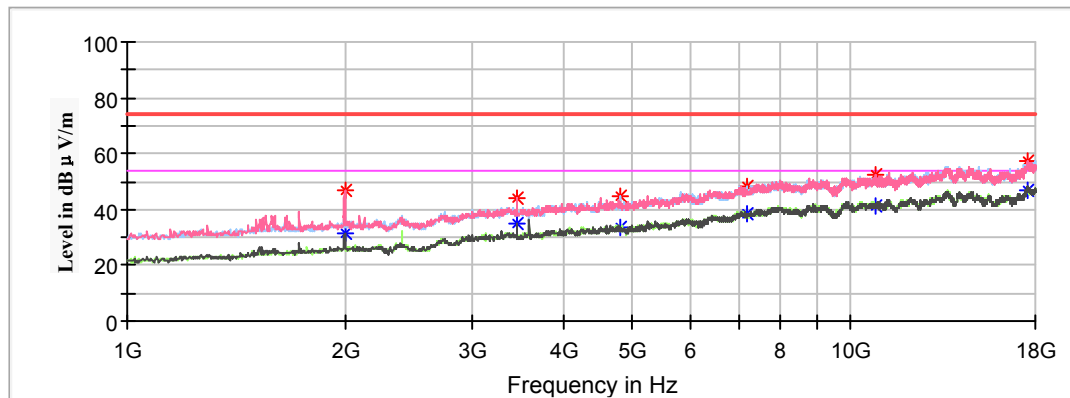

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1999.600000	---	31.75	100.0	V	224.0	-5.8	54.00	22.25
1999.600000	46.77	---	100.0	V	224.0	-5.8	74.00	27.23
3454.800000	---	34.70	100.0	V	166.0	-0.9	54.00	19.30
3454.800000	43.89	---	100.0	V	166.0	-0.9	74.00	30.11
4804.000000	---	33.89	250.0	H	97.0	1.8	54.00	20.11
4804.000000	44.49	---	250.0	H	97.0	1.8	74.00	29.51
7206.000000	---	38.18	100.0	H	122.0	8.9	54.00	15.82
7206.000000	48.32	---	100.0	H	122.0	8.9	74.00	25.68
10805.600000	---	41.00	200.0	V	181.0	13.2	54.00	13.00
10805.600000	52.46	---	200.0	V	181.0	13.2	74.00	21.54
17530.800000	---	47.02	100.0	V	340.0	17.2	54.00	6.98
17530.800000	57.04	---	100.0	V	340.0	17.2	74.00	16.96

Middle Channel: 2440MHz


Full Spectrum

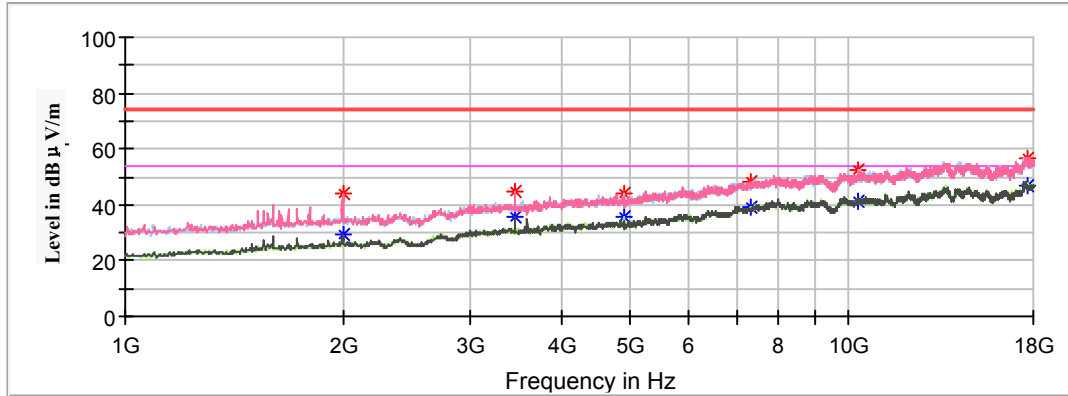

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1999.600000	---	29.41	250.0	V	25.0	-5.8	54.00	24.59
1999.600000	44.21	---	250.0	V	25.0	-5.8	74.00	29.79
3454.800000	---	35.44	100.0	V	14.0	-0.9	54.00	18.56
3454.800000	44.52	---	100.0	V	14.0	-0.9	74.00	29.48
4880.000000	---	35.39	100.0	H	253.0	1.9	54.00	18.61
4880.000000	43.98	---	100.0	H	253.0	1.9	74.00	30.02
7320.000000	---	39.17	200.0	H	163.0	9.2	54.00	14.83
7320.000000	48.22	---	200.0	H	163.0	9.2	74.00	25.78
10302.400000	---	41.54	100.0	V	145.0	12.7	54.00	12.46
10302.400000	52.27	---	100.0	V	145.0	12.7	74.00	21.73
17626.000000	---	47.00	200.0	V	359.0	17.3	54.00	7.00
17626.000000	56.63	---	200.0	V	359.0	17.3	74.00	17.37

High Channel: 2480MHz


Full Spectrum

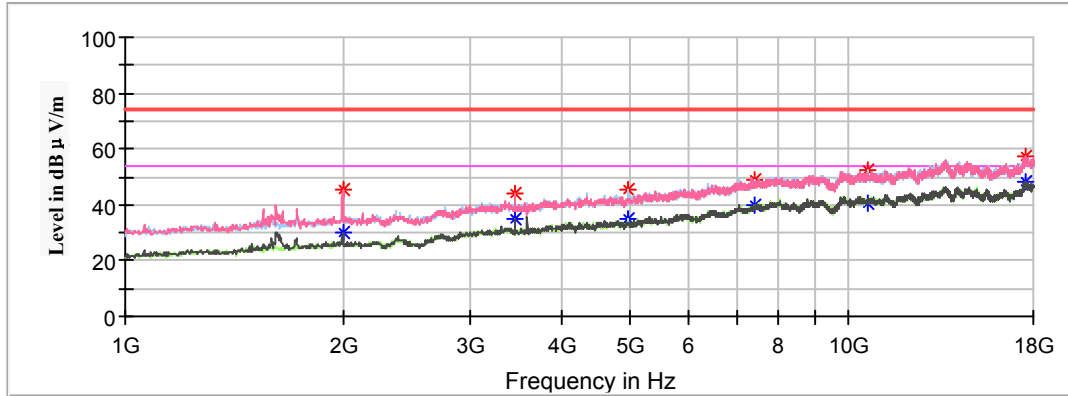


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1999.600000	---	30.00	250.0	V	98.0	-5.8	54.00	24.00
1999.600000	45.18	---	250.0	V	98.0	-5.8	74.00	28.82
3454.800000	---	34.67	100.0	V	322.0	-0.9	54.00	19.33
3454.800000	43.73	---	100.0	V	322.0	-0.9	74.00	30.27
4960.000000	---	35.20	250.0	H	131.0	2.0	54.00	18.80
4960.000000	45.45	---	250.0	H	131.0	2.0	74.00	28.55
7440.000000	---	39.86	200.0	H	230.0	9.6	54.00	14.14
7440.000000	49.00	---	200.0	H	230.0	9.6	74.00	25.00
10652.600000	---	40.90	150.0	H	66.0	13.0	54.00	13.10
10652.600000	52.27	---	150.0	H	66.0	13.0	74.00	21.73
17534.200000	---	48.05	250.0	V	359.0	17.2	54.00	5.95
17534.200000	57.08	---	250.0	V	359.0	17.2	74.00	16.92

18GHz-25GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

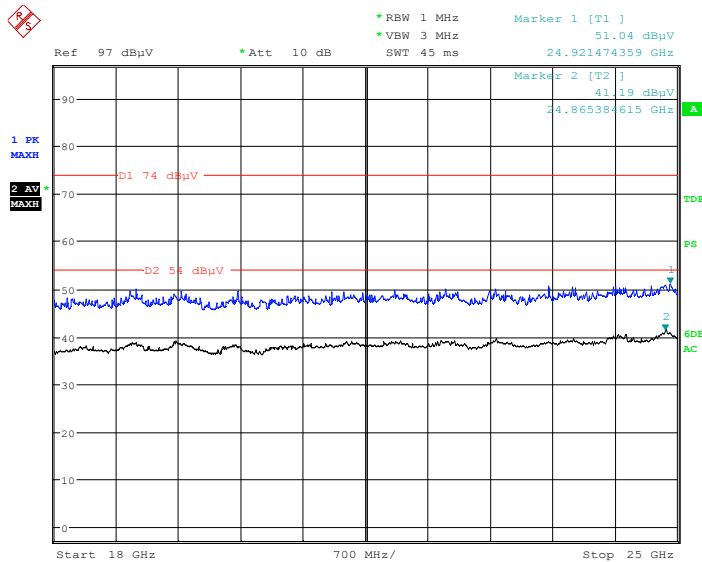Horizontal

Date: 12.OCT.2018 17:44:45

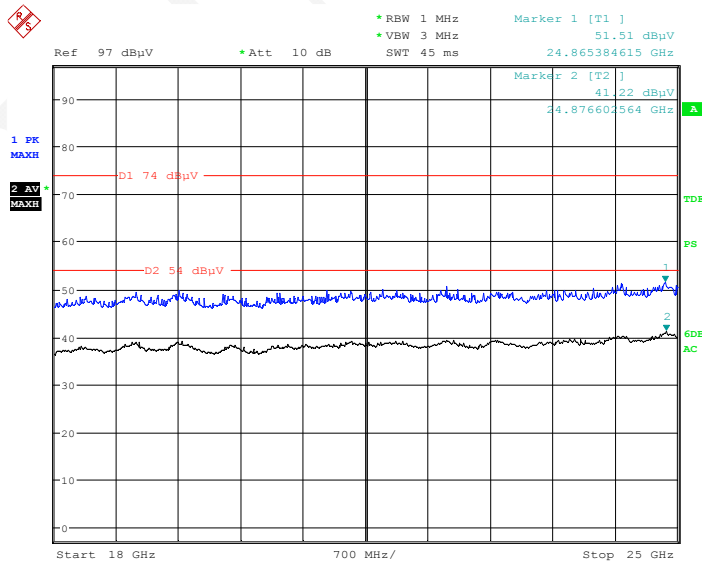Vertical

Date: 12.OCT.2018 18:03:37

Fundamental Test & Restricted Bands Emissions Test:*(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)*


Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	93.63	---	100.0	H	97.0	6.0	114	20.37
2402.000000	---	93.23	100.0	H	97.0	6.0	94	0.77
2402.000000	91.55	---	200.0	V	88.0	6.0	114	22.45
2402.000000	---	91.04	200.0	V	88.0	6.0	94	2.96
2400.000000	61.13	---	150.0	H	0.0	6.0	74.00	12.87
2400.000000	---	41.81	150.0	H	0.0	6.0	54.00	12.19
Middle Channel: 2440MHz								
2440.000000	92.26	---	250.0	H	108.0	6.2	114	21.74
2440.000000	---	91.64	250.0	H	108.0	6.2	94	2.36
2440.000000	90.01	---	150.0	V	74.0	6.2	114	23.99
2440.000000	---	89.48	150.0	V	74.0	6.2	94	4.52
High Channel: 2480MHz								
2480.000000	90.64	---	100.0	H	52.0	6.3	114	23.36
2480.000000	---	90.16	100.0	H	52.0	6.3	94	3.84
2480.000000	88.18	---	150.0	V	241.0	6.3	114	25.82
2480.000000	---	87.99	150.0	V	241.0	6.3	94	6.01
2483.500000	65.42	---	150.0	H	19.0	6.3	74.00	8.58
2483.500000	---	42.33	150.0	H	19.0	6.3	54.00	11.67

Data for Antenna-2:**Spurious Emission Test:****30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

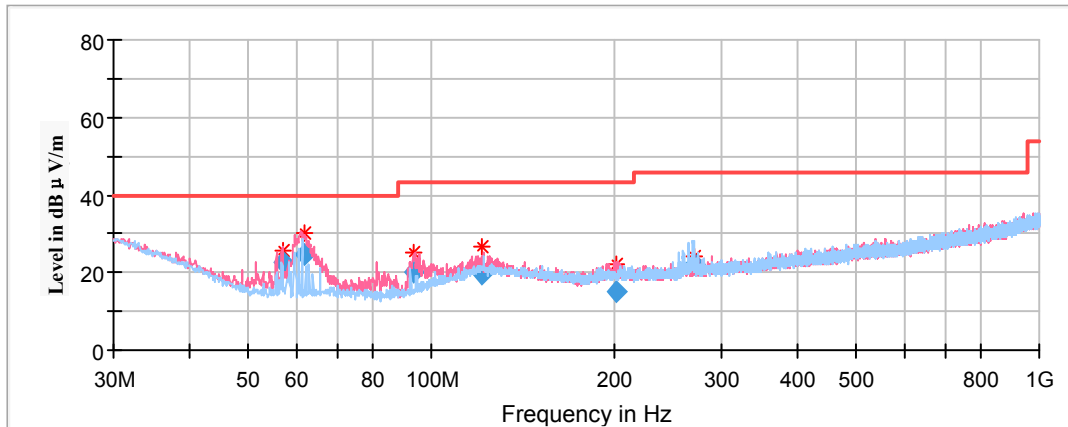

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
56.966700	22.88	101.0	V	61.0	-17.8	40.00	17.12
61.727050	24.88	101.0	V	56.0	-17.8	40.00	15.12
93.484450	20.37	101.0	V	199.0	-16.6	43.50	23.13
120.895200	19.83	101.0	V	30.0	-11.2	43.50	23.67
201.031650	14.86	101.0	V	241.0	-12.3	43.50	28.64
270.011900	22.04	101.0	H	0.0	-11.4	46.00	23.96

1GHz-18GHz


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2402MHz


Full Spectrum

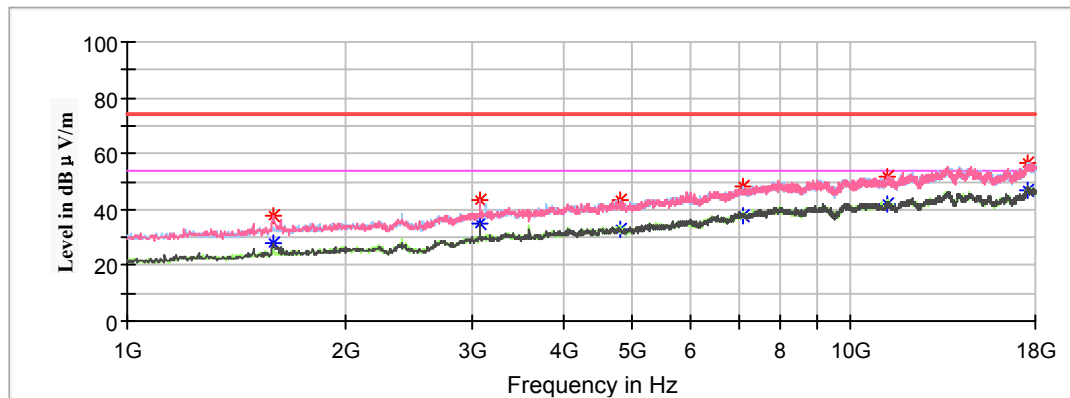

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	---	28.09	150.0	V	50.0	-7.2	54.00	25.91
1591.600000	38.00	---	150.0	V	50.0	-7.2	74.00	36.00
3070.600000	---	35.04	100.0	V	359.0	-1.5	54.00	18.96
3070.600000	43.23	---	100.0	V	359.0	-1.5	74.00	30.77
4804.000000	---	32.84	200.0	H	173.0	1.8	54.00	21.16
4804.000000	43.20	---	200.0	H	173.0	1.8	74.00	30.80
7079.200000	---	37.94	100.0	H	273.0	8.5	54.00	16.06
7079.200000	48.19	---	100.0	H	273.0	8.5	74.00	25.81
11217.000000	---	41.87	250.0	V	151.0	13.2	54.00	12.13
11217.000000	52.09	---	250.0	V	151.0	13.2	74.00	21.91
17530.800000	---	46.76	100.0	H	337.0	17.2	54.00	7.24
17530.800000	56.58	---	100.0	H	337.0	17.2	74.00	17.42

Middle Channel: 2440MHz


Full Spectrum

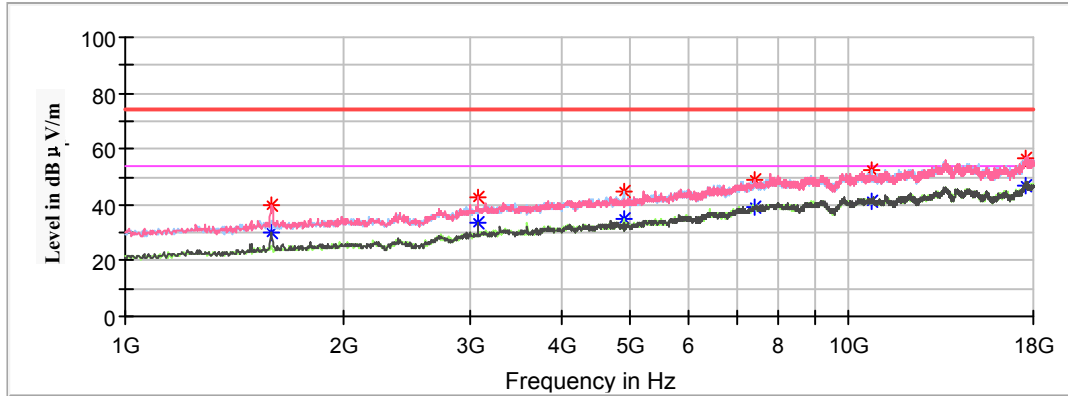

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	---	30.39	250.0	V	341.0	-7.2	54.00	23.61
1595.000000	40.12	---	250.0	V	341.0	-7.2	74.00	33.88
3070.600000	---	33.22	100.0	V	229.0	-1.5	54.00	20.78
3070.600000	42.43	---	100.0	V	229.0	-1.5	74.00	31.57
4880.000000	---	34.99	100.0	H	214.0	1.9	54.00	19.01
4880.000000	44.98	---	100.0	H	214.0	1.9	74.00	29.02
7432.800000	---	39.47	250.0	V	14.0	9.6	54.00	14.53
7432.800000	48.94	---	250.0	V	14.0	9.6	74.00	25.06
10730.800000	---	41.51	100.0	H	81.0	13.1	54.00	12.49
10730.800000	52.41	---	100.0	H	81.0	13.1	74.00	21.59
17571.600000	---	46.95	250.0	V	204.0	17.3	54.00	7.05
17571.600000	56.86	---	250.0	V	204.0	17.3	74.00	17.14

High Channel: 2480MHz

Full Spectrum

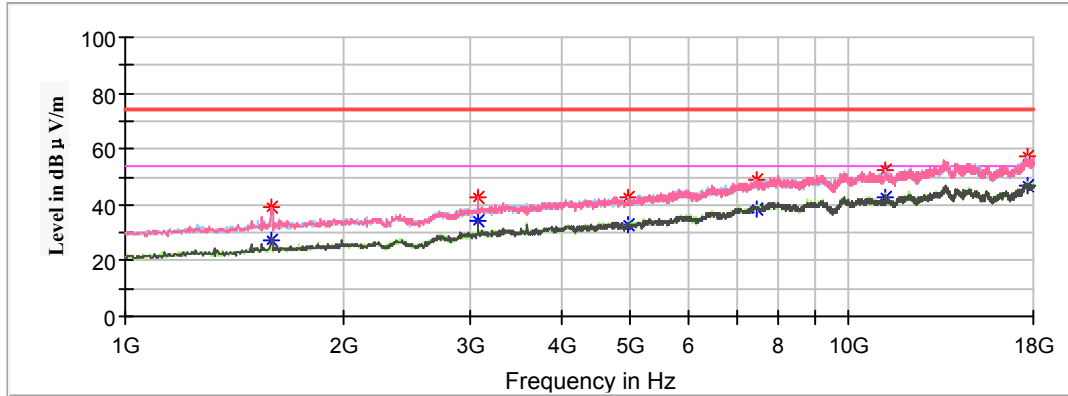


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1595.000000	---	27.09	200.0	V	266.0	-7.2	54.00	26.91
1595.000000	39.17	---	200.0	V	266.0	-7.2	74.00	34.83
3070.600000	---	34.15	200.0	V	292.0	-1.5	54.00	19.85
3070.600000	42.76	---	200.0	V	292.0	-1.5	74.00	31.24
4960.000000	---	32.94	200.0	H	291.0	2.0	54.00	21.06
4960.000000	42.77	---	200.0	H	291.0	2.0	74.00	31.23
7440.000000	---	38.38	200.0	H	20.0	9.6	54.00	15.62
7440.000000	48.79	---	200.0	H	20.0	9.6	74.00	25.21
11254.400000	---	42.44	150.0	H	170.0	13.2	54.00	11.56
11254.400000	52.57	---	150.0	H	170.0	13.2	74.00	21.43
17677.000000	---	46.76	100.0	H	169.0	17.4	54.00	7.24
17677.000000	57.23	---	100.0	H	169.0	17.4	74.00	16.77

18GHz-25GHz


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

Horizontal

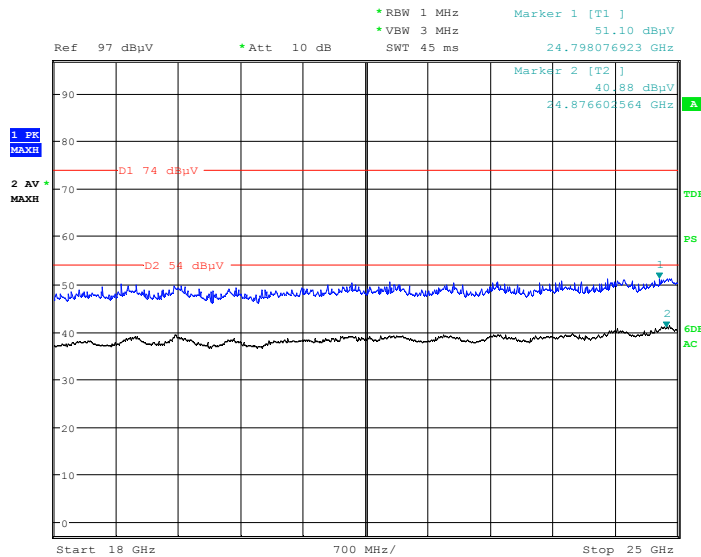

Date: 20.OCT.2018 09:51:12

Vertical

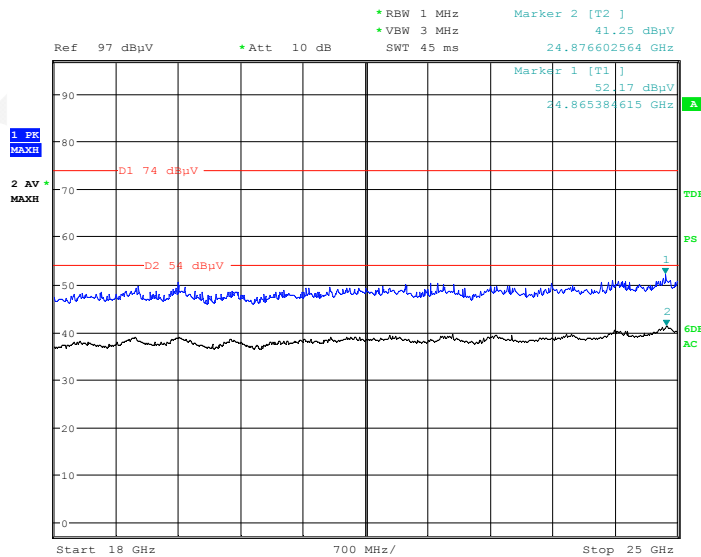

Date: 20.OCT.2018 10:21:02

Fundamental Test & Restricted Bands Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)


Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	94.05	---	150.0	H	81.0	6.0	114	19.95
2402.000000	---	93.66	150.0	H	81.0	6.0	94	0.34
2402.000000	91.60	---	100.0	V	333.0	6.0	114	22.4
2402.000000	---	91.27	100.0	V	333.0	6.0	94	2.73
2390.000000	60.69	---	150.0	H	0.0	6.0	74.00	13.31
2390.000000	---	42.03	150.0	H	0.0	6.0	54.00	11.97
Middle Channel: 2440MHz								
2440.000000	92.51	---	250.0	H	49.0	6.2	114	21.49
2440.000000	---	92.21	250.0	H	49.0	6.2	94	1.79
2440.000000	90.49	---	200.0	V	261.0	6.2	114	23.51
2440.000000	---	89.86	200.0	V	261.0	6.2	94	4.14
High Channel: 2480MHz								
2480.000000	90.71	---	200.0	H	109.0	6.3	114	23.29
2480.000000	---	90.38	200.0	H	109.0	6.3	94	3.62
2480.000000	88.54	---	150.0	V	131.0	6.3	114	25.46
2480.000000	---	88.28	150.0	V	131.0	6.3	94	5.72
2483.500000	63.28	---	150.0	H	19.0	6.3	74.00	10.72
2483.500000	---	43.56	150.0	H	19.0	6.3	54.00	10.44

Data for Antenna-1&Antenna-2 simultaneous transmitting:**Spurious Emission Test:****30MHz-1GHz**

(Pre-scan in the X,Y and Z axes of orientation, the worst case **low channel of operation for Antenna-1 & low channel of operation for Antenna-2 in X-axis of orientation** was recorded.)

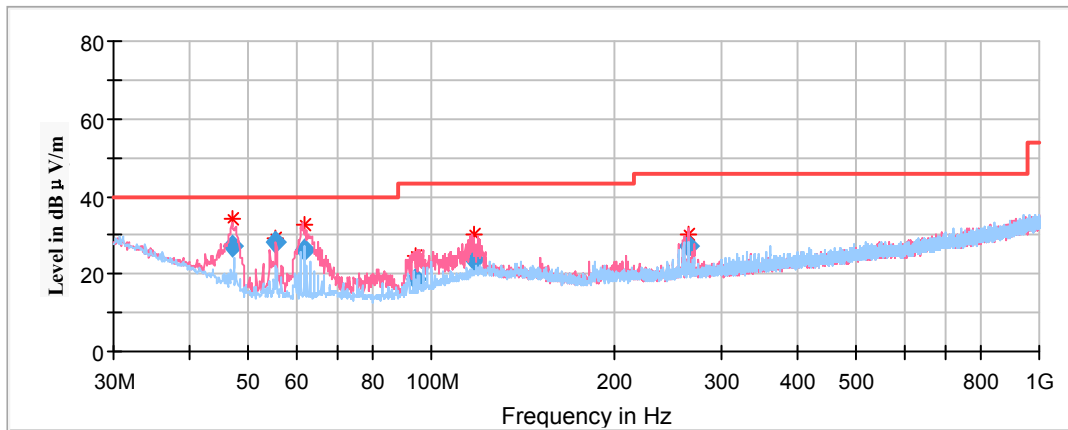

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
47.121400	27.21	101.0	V	21.0	-15.6	40.00	12.79
55.489200	28.01	199.0	V	287.0	-17.7	40.00	11.99
61.915300	26.40	101.0	V	71.0	-17.8	40.00	13.60
93.859650	18.53	101.0	V	138.0	-16.5	43.50	24.97
117.830000	23.67	101.0	V	41.0	-11.6	43.50	19.83
265.087500	27.15	101.0	V	347.0	-11.6	46.00	18.85


1GHz-18GHz

(Pre-scan in the X,Y and Z axes of orientation, the worst case **low channel of operation for Antenna-1 & low channel of operation for Antenna-2 in X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)


Full Spectrum

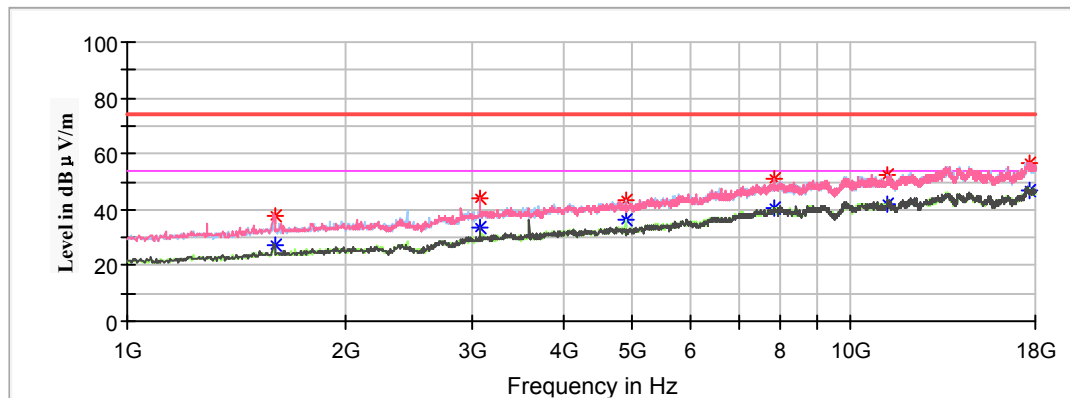


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1598.400000	---	27.06	100.0	V	218.0	-7.2	54.00	26.94
1598.400000	38.05	---	100.0	V	218.0	-7.2	74.00	35.95
3070.600000	---	33.70	100.0	V	353.0	-1.5	54.00	20.30
3070.600000	44.24	---	100.0	V	353.0	-1.5	74.00	29.76
4879.400000	---	36.27	250.0	H	20.0	1.9	54.00	17.73
4879.400000	43.03	---	250.0	H	20.0	1.9	74.00	30.97
7854.400000	---	40.51	150.0	V	191.0	10.4	54.00	13.49
7854.400000	51.34	---	150.0	V	191.0	10.4	74.00	22.66
11217.000000	---	42.12	200.0	H	93.0	13.2	54.00	11.88
11217.000000	52.32	---	200.0	H	93.0	13.2	74.00	21.68
17632.800000	---	46.72	100.0	V	262.0	17.3	54.00	7.28
17632.800000	56.75	---	100.0	V	262.0	17.3	74.00	17.25

18GHz-25GHz

(Pre-scan in the X,Y and Z axes of orientation, the worst case low channel of operation for Antenna-1 & low channel of operation for Antenna-2 in X-axis of orientation was recorded.)

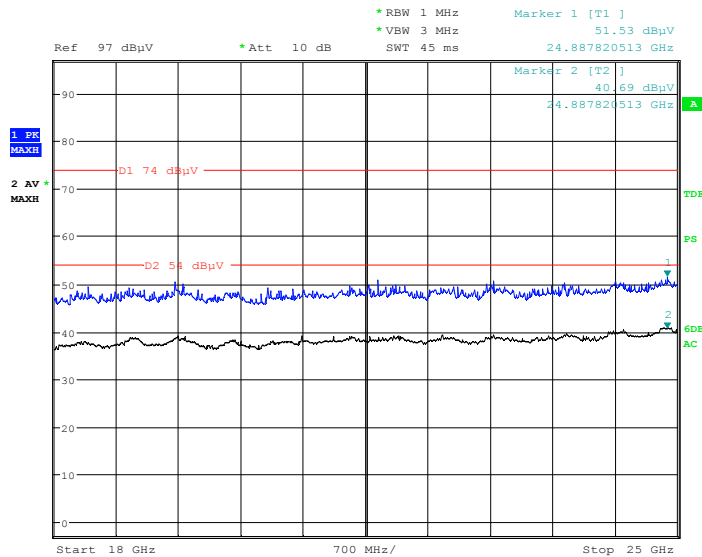Horizontal

Date: 20.OCT.2018 10:46:03

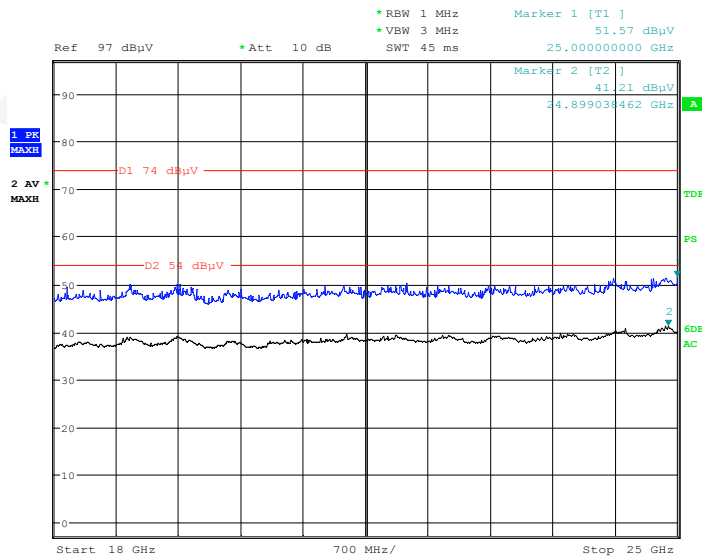Vertical

Date: 20.OCT.2018 11:17:00

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	24.2-24.4°C
Relative Humidity:	49-50%
ATM Pressure:	101.2-101.3kPa


The testing was performed by Stone Zhang on 2018-10-09 & 2018-10-19.

Test Result: Compliant.

Test Mode: Transmitting


Data for Antenna-1:

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	0.933
Middle	2440	0.942
High	2480	0.986

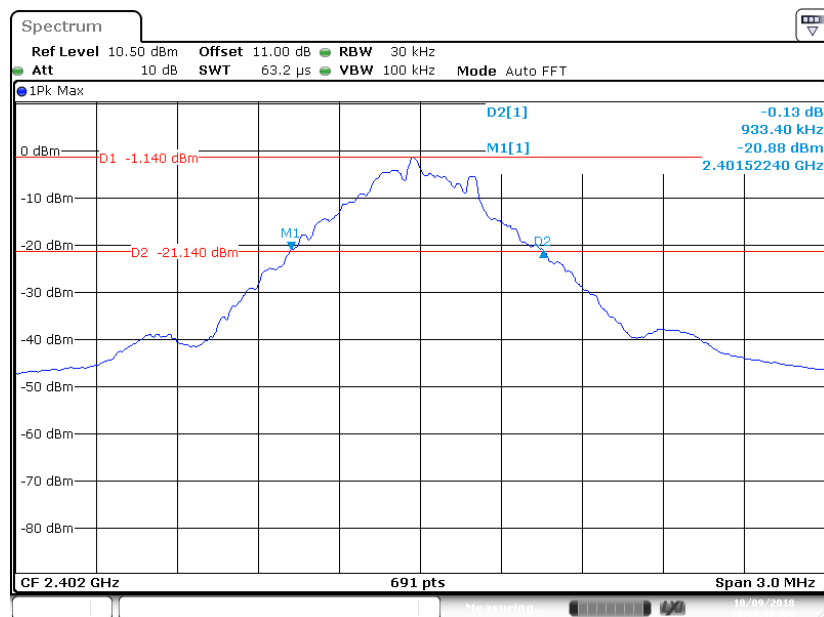Low Channel


Date: 9 OCT 2018 10:15:31

Middle Channel

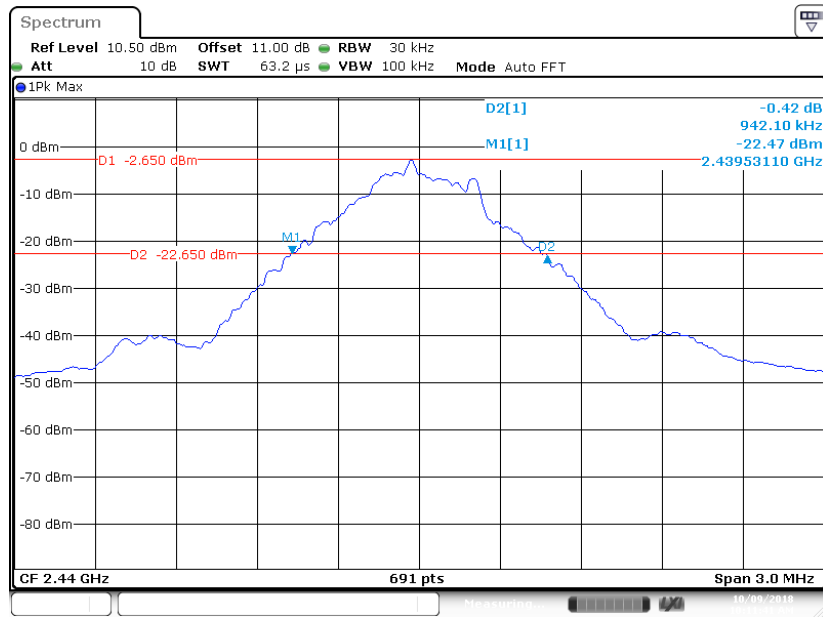

Date: 9 OCT 2018 10:11:41


High Channel

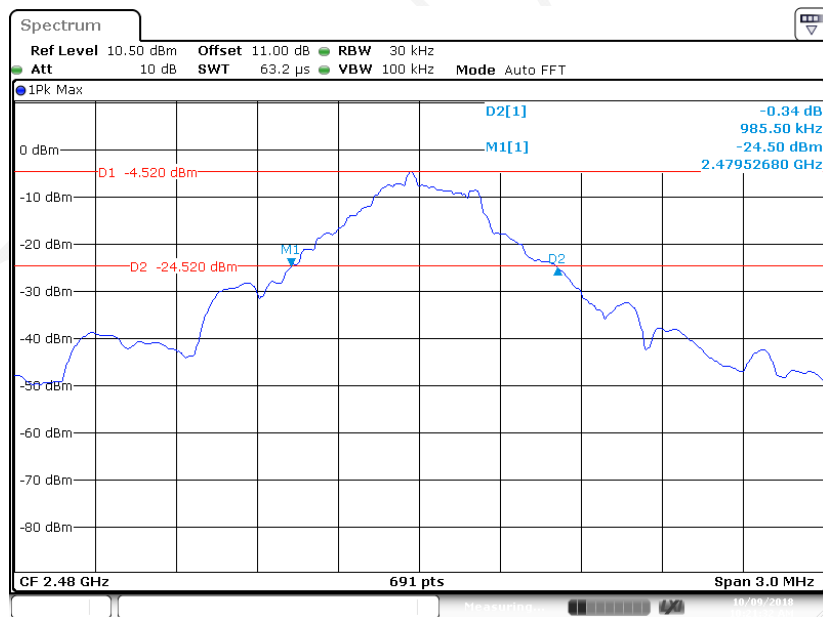


Date: 9 OCT 2018 10:21:32

Data for Antenna-2:


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	0.942
Middle	2440	0.933
High	2480	0.977

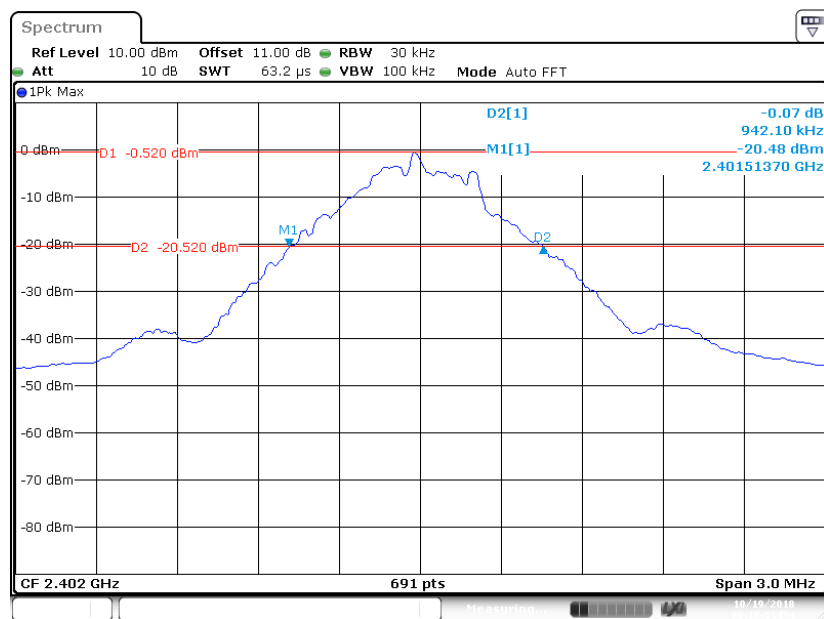Low Channel

Middle Channel

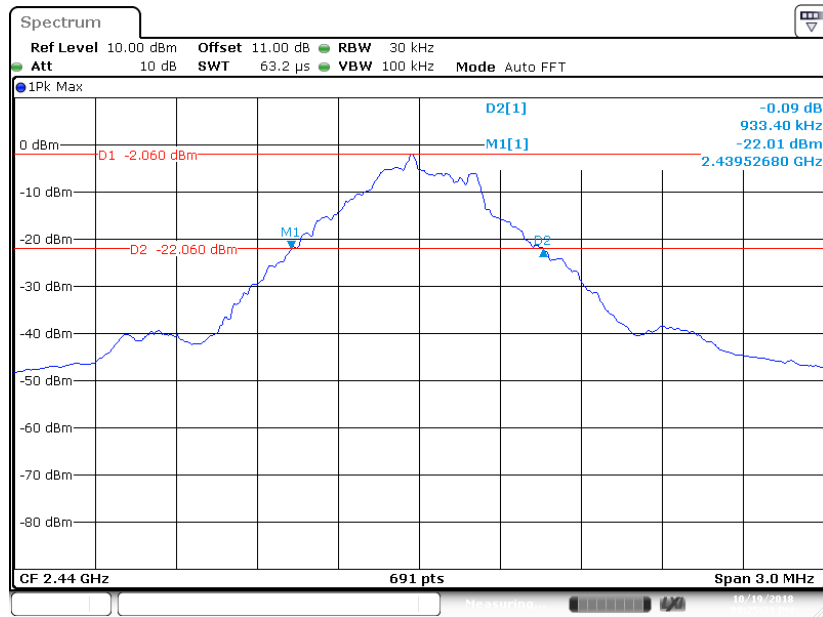

High Channel

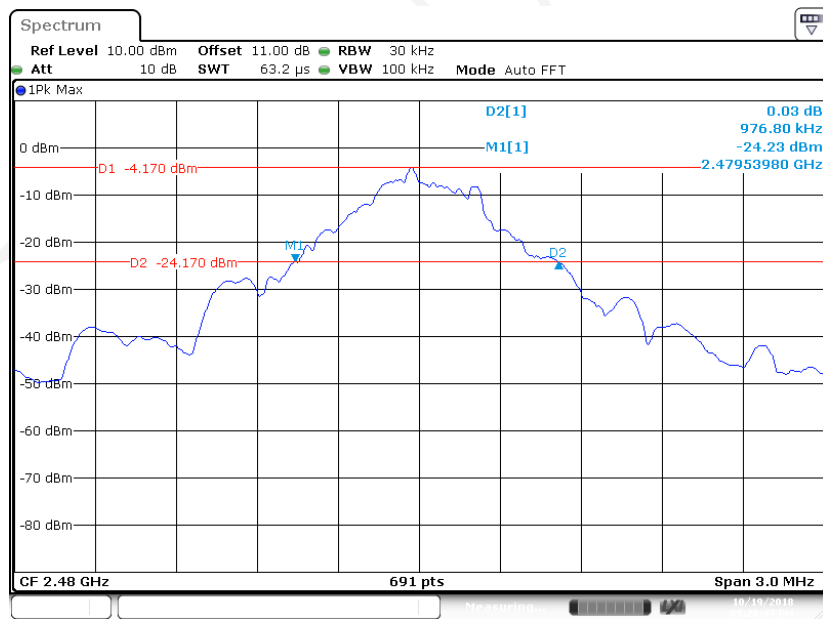

***** END OF REPORT *****