

Test Report

Report No. : CQASZ20210100004EX-01

Applicant: SHENZHEN AOME CO.,LTD

Address of Applicant: Room301 workshop, Xinfeng Building, Yangguang Community, Xili subdustreet, Nanshan District, Shenzhen, China

Manufacturer: SHENZHEN AOME CO.,LTD

Address of Manufacturer: Room301 workshop, Xinfeng Building, Yangguang Community, Xili subdustreet, Nanshan District, Shenzhen, China

Equipment Under Test (EUT):

Product: Projector

All Model: S350, S280, RODPJS450, RODPJS400

Test Model No.: S350

Brand Name: N/A

FCC ID: 2ARL5-S350RN

Standards: 47 CFR Part 15, Subpart C

Date of Test: 2021-1-12 to 2021-1-29

Date of Issue: 2021-3-1

Test Result : PASS*

Tested By:

Jun Li

(Jun Li)

Reviewed By:

Ares Liu

(Ares Liu)

Approved By:

Sheek Luo

(Sheek Luo)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of COA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210100004EX-01	Rev.01	Initial report	2021-1-29

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

N/A: Not Applicable

3 Contents

	Page
COVER PAGE.....	1
1 VERSION.....	2
2 TEST SUMMARY.....	3
3 CONTENTS.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 TEST ENVIRONMENT.....	7
4.4 DESCRIPTION OF SUPPORT UNITS.....	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	8
4.6 TEST FACILITY.....	9
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
4.8 EQUIPMENT LIST.....	10
5 TEST RESULTS AND MEASUREMENT DATA.....	11
5.1 ANTENNA REQUIREMENT.....	11
5.2 CONDUCTED EMISSIONS.....	12
5.3 CONDUCTED PEAK OUTPUT POWER.....	15
5.4 20dB OCCUPY BANDWIDTH.....	20
5.5 FREQUENCIES SEPARATION.....	24
5.6 HOPPING CHANNEL NUMBER.....	29
5.7 DWELL TIME.....	31
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	42
5.9 SPURIOUS RF CONDUCTED EMISSIONS.....	47
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM.....	58
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....	60
5.11.1 Radiated Emission below 1GHz.....	63
5.11.2 Transmitter Emission above 1GHz.....	65
6 PHOTOGRAPHS - EUT TEST SETUP.....	68
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....	70

4 General Information

4.1 Client Information

Applicant:	SHENZHEN AOME CO.,LTD
Address of Applicant:	Room301 workshop, Xinfeng Building, Yangguang Community, Xili subdustreet, Nanshan District, Shenzhen, China
Manufacturer:	SHENZHEN AOME CO.,LTD
Address of Manufacturer:	Room301 workshop, Xinfeng Building, Yangguang Community, Xili subdustreet, Nanshan District, Shenzhen, China

4.2 General Description of EUT

Product Name:	Projector
Model No.:	S350, S280, RODPJS450, RODPJS400
Test Model No.:	S350
Trade Mark:	N/A
Hardware Version:	1V1
Software Version:	V2.5.8
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V5.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	☐ Mobile ☐ Portable ☒ Fix Location
Antenna Type:	PCB antenna
Antenna Gain:	0dBi
EUT Power Supply:	DC 11.1V from battery

Note:

All model: S350, S280, RODPJS450, RODPJS400

Only the model S350 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being model name.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	995mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	Certification
AC-DC adapter	SHENZHEN FUJIA APPLIANCE CO.,LTD	MODEL: FJ-SW1501500N INPUT:100-240 50/60Hz 0.6A Max OUTPUT:15V 1500mA	Provide by applicant	SDOC

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Test Facility

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

The test facility is recognized, certified, or accredited by the following organizations:

- **IC Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.7 Abnormalities from Standard Conditions

None.

4.8 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/09/22	2021/09/21
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/24	2021/10/23
Spectrum analyzer	keysight	N9020A	CQA-105	2020/10/24	2021/10/23
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2020/09/22	2021/09/21
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2020/10/29	2021/10/28
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2020/10/24	2021/10/23
Bilog Antenna	R&S	HL562	CQA-011	2020/09/22	2021/09/21
Horn Antenna	R&S	HF906	CQA-012	2020/09/22	2021/09/21
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2020/09/22	2021/09/21
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2020/09/22	2021/09/21
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2020/09/22	2021/09/21
Antenna Connector	CQA	RFC-01	CQA-080	2020/09/22	2021/09/21
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/09/22	2021/09/21
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/09/22	2021/09/21
EMI Test Receiver	R&S	ESPI3	CQA-013	2020/09/22	2021/09/21
LISN	R&S	ENV216	CQA-003	2020/11/01	2021/10/30
Coaxial cable	CQA	N/A	CQA-C009	2020/09/22	2021/09/21

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	PCB ANTENNA 
The antenna is PCB antenna. The best case gain of the antenna 0dBi	


5.2 Conducted Emissions

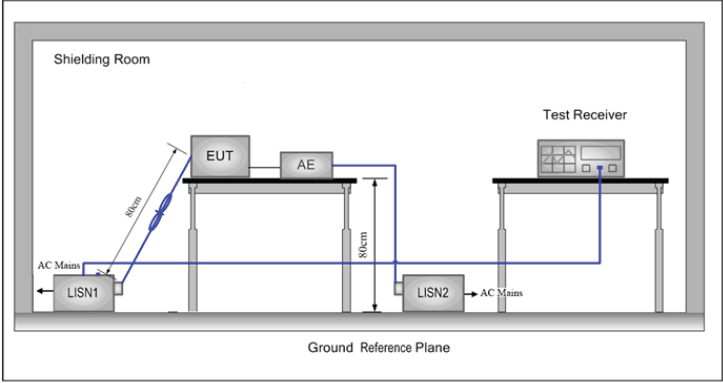Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.		
Final Test Mode:	Through Pre-scan, charging mode is worst, only recorded this test data		

Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement data

L line

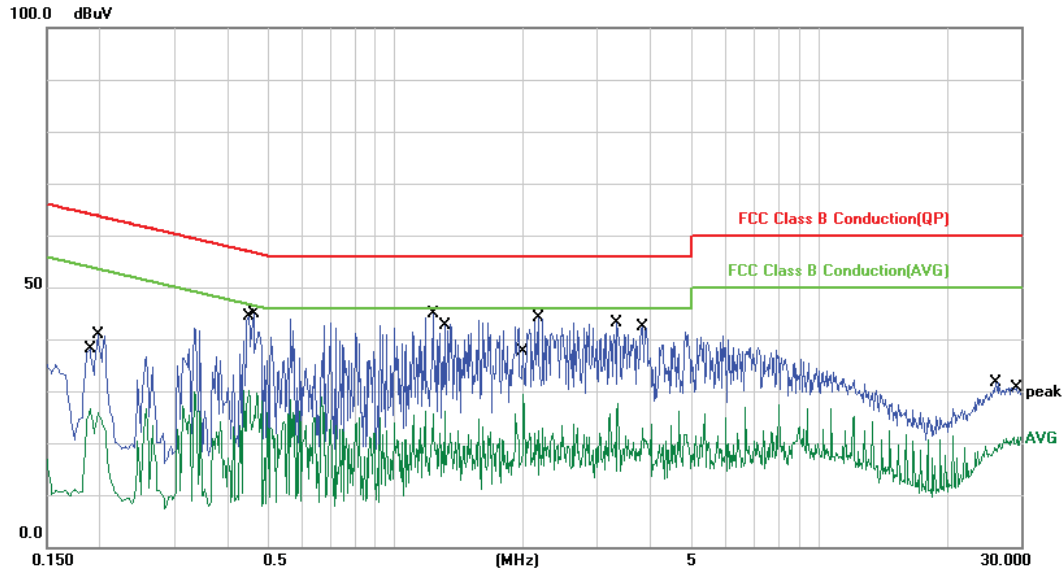


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1900	26.86	-0.13	26.73	54.03	-27.30	AVG	
2		0.1980	41.07	-0.13	40.94	63.69	-22.75	QP	
3		0.4500	30.22	-0.02	30.20	46.87	-16.67	AVG	
4		0.4620	44.78	-0.02	44.76	56.66	-11.90	QP	
5	*	1.2260	44.96	-0.15	44.81	56.00	-11.19	QP	
6		1.3060	26.38	-0.16	26.22	46.00	-19.78	AVG	
7		2.0100	29.57	-0.23	29.34	46.00	-16.66	AVG	
8		2.1740	44.48	-0.24	44.24	56.00	-11.76	QP	
9		3.3460	27.86	-0.19	27.67	46.00	-18.33	AVG	
10		3.8300	42.51	-0.20	42.31	56.00	-13.69	QP	
11		26.2540	32.13	-0.44	31.69	60.00	-28.31	QP	
12		29.5180	21.49	-0.40	21.09	50.00	-28.91	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

N line

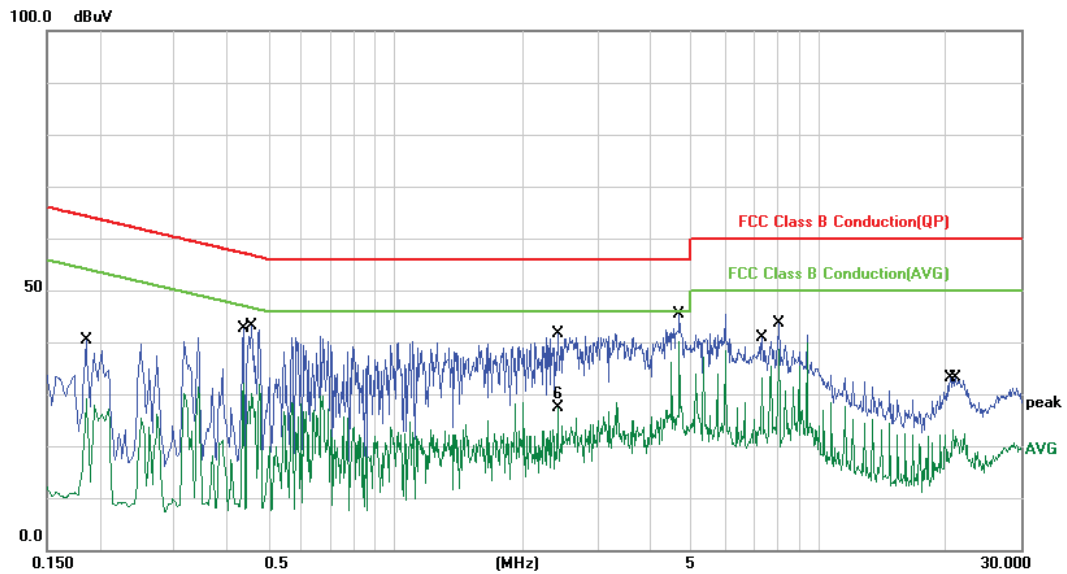


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1860	40.24	0.19	40.43	64.21	-23.78	QP	
2		0.1860	29.01	0.19	29.20	54.21	-25.01	AVG	
3		0.4380	31.74	0.32	32.06	47.10	-15.04	AVG	
4		0.4580	42.88	0.32	43.20	56.73	-13.53	QP	
5		2.4100	41.49	0.15	41.64	56.00	-14.36	QP	
6		2.4100	27.19	0.15	27.34	56.00	-28.66	peak	
7		4.6859	45.38	0.04	45.42	56.00	-10.58	QP	
8	*	4.6859	40.06	0.04	40.10	46.00	-5.90	AVG	
9		7.3579	40.82	-0.03	40.79	60.00	-19.21	QP	
10		8.0299	38.63	0.05	38.68	50.00	-11.32	AVG	
11		20.4460	33.32	-0.12	33.20	60.00	-26.80	QP	
12		20.7300	23.19	-0.12	23.07	50.00	-26.93	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Conducted Peak Output Power

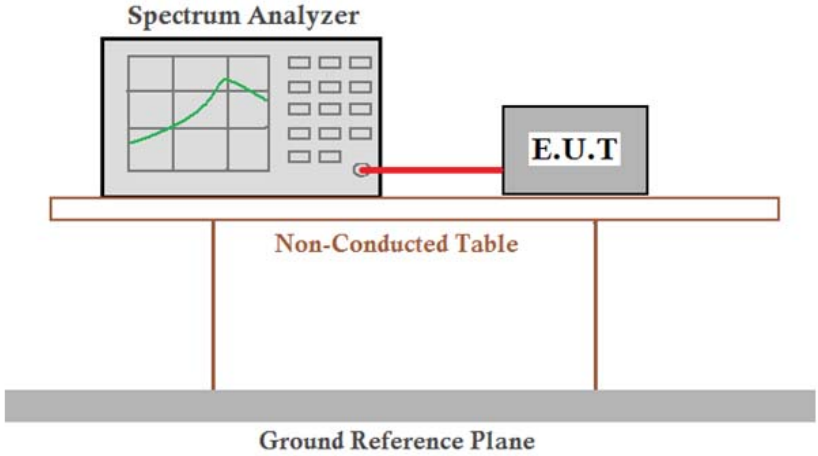
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	21dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.195	30.00	Pass
Middle	2.532	30.00	Pass
Highest	2.597	30.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.947	30.00	Pass
Middle	3.277	30.00	Pass
Highest	3.289	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.912	30.00	Pass
Middle	3.263	30.00	Pass
Highest	3.311	30.00	Pass


Test plot as follows:

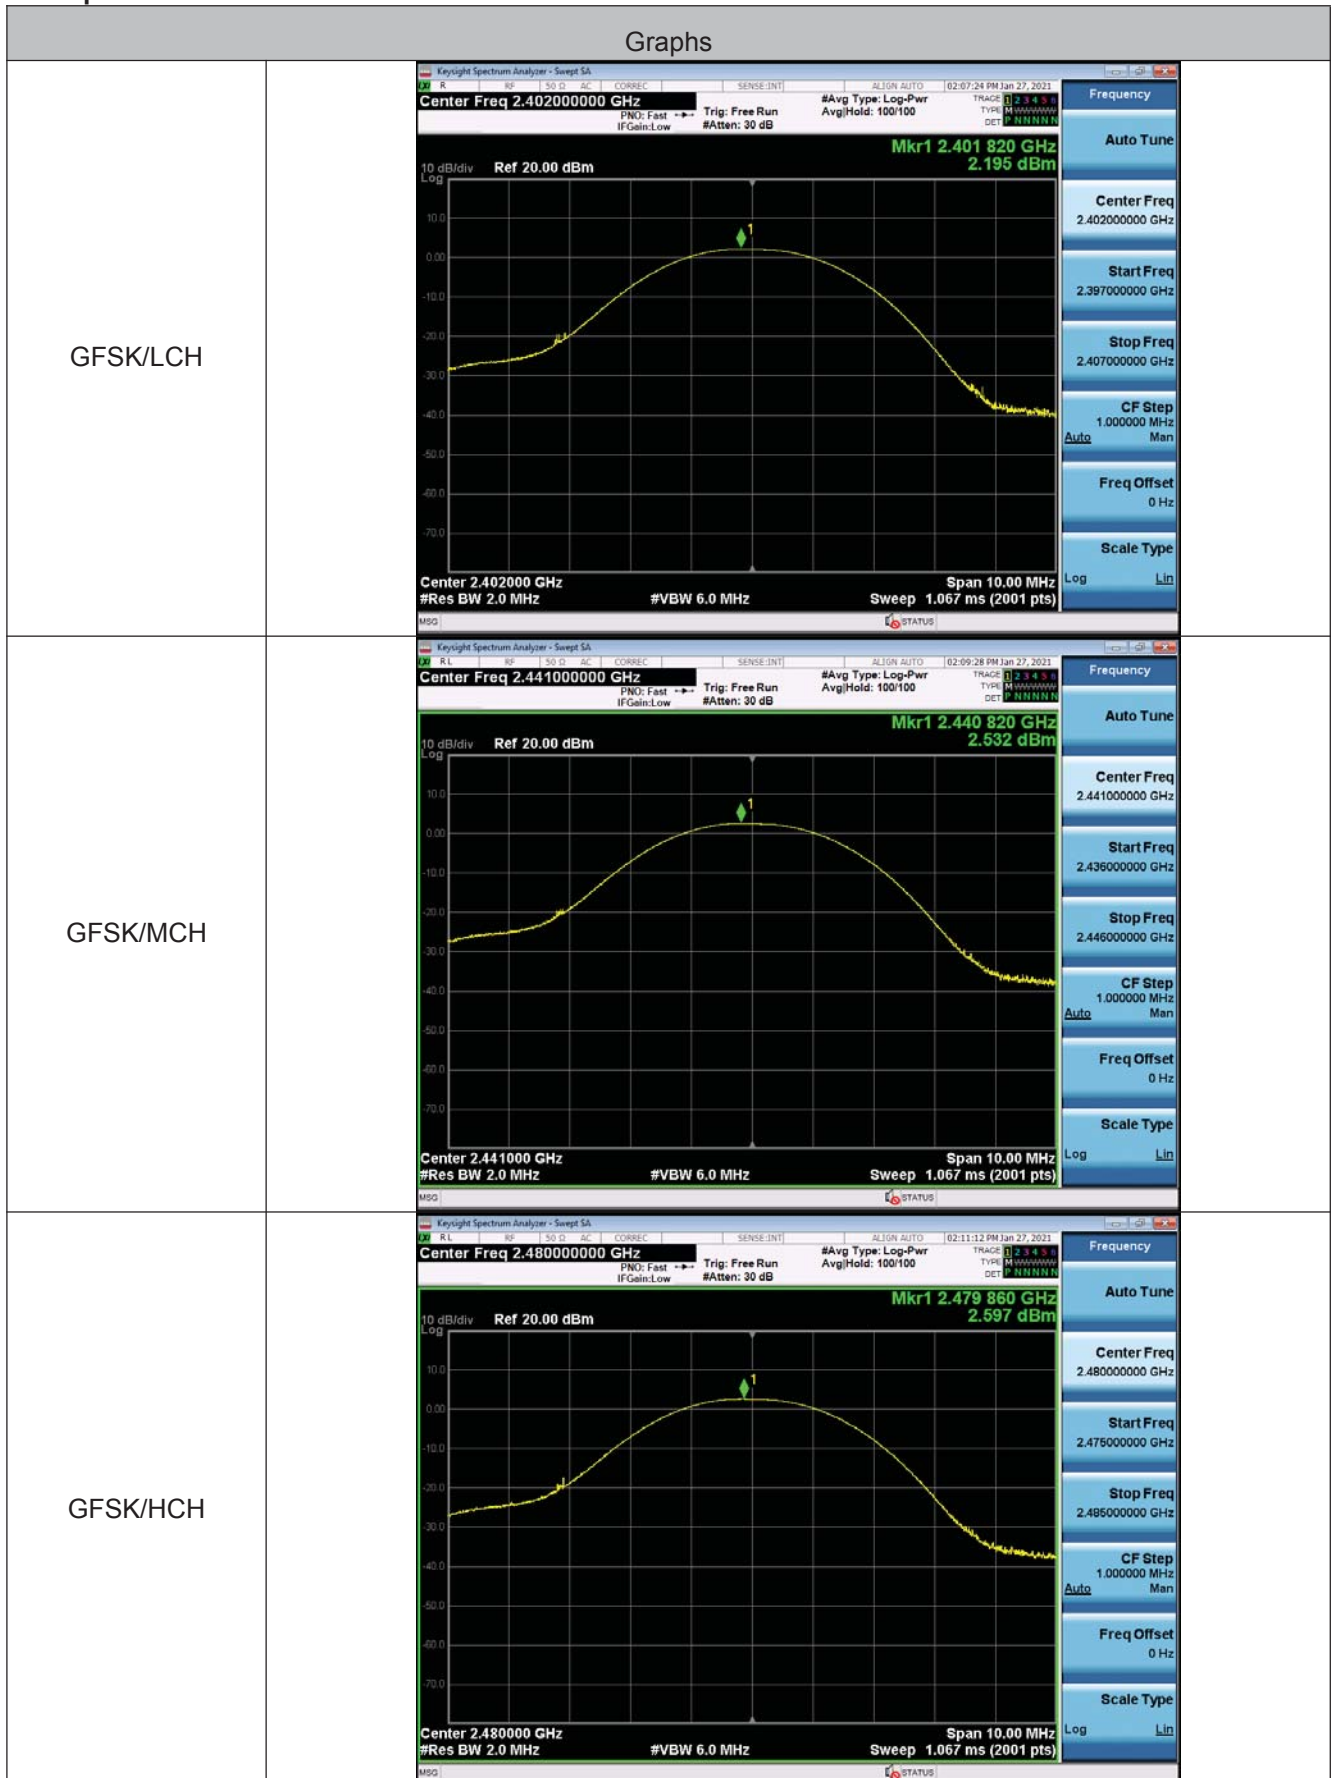

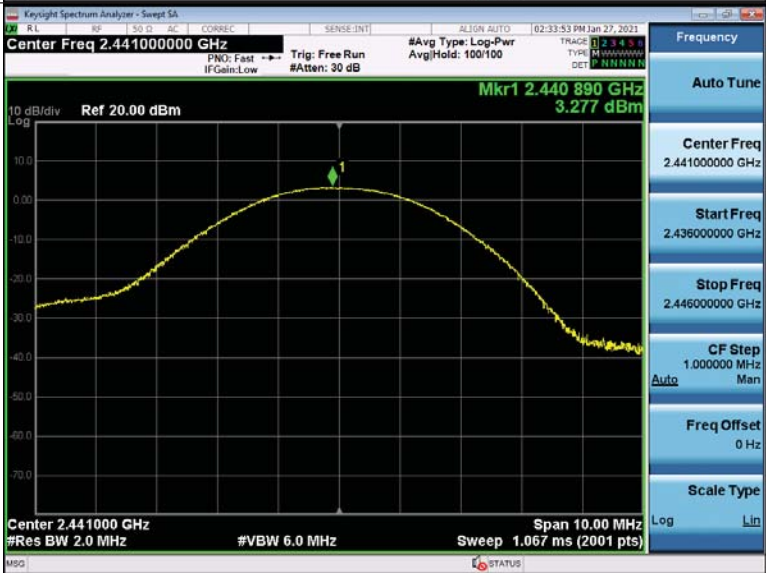$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

8DPSK/LCH	 Keylight Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Mkr1 2.401980 GHz 2.912 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.067 ms (2001 pts)
8DPSK/MCH	 Keylight Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Mkr1 2.440780 GHz 3.263 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.067 ms (2001 pts)
8DPSK/HCH	 Keylight Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Mkr1 2.479915 GHz 3.311 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.067 ms (2001 pts)

5.4 20dB Occupy Bandwidth

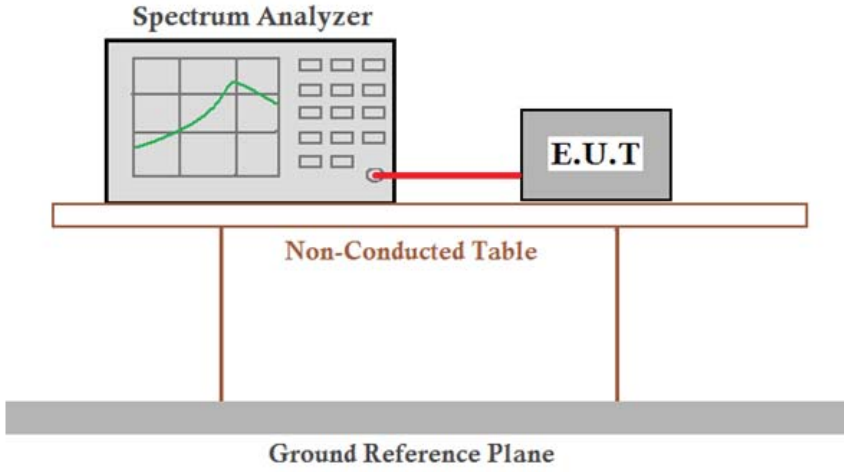Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass



Measurement Data

Test channel	20dB Occupy Bandwidth (MHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	0.8876	1.289	1.282
Middle	0.8824	1.314	1.317
Highest	0.8895	1.279	1.293


Test plot as follows:

Graphs		
GFSK/LCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IFGain: Low #Atten: 30 dB 10 dB/div Ref 10.00 dBm Center 2.402 GHz #Res BW 20 kHz #VBW 62 kHz Span 2 MHz Sweep 4.8 ms Occupied Bandwidth 840.12 kHz Total Power 8.73 dBm Transmit Freq Error -9.281 kHz % of OBW Power 99.00 % x dB Bandwidth 887.6 kHz x dB -20.00 dB Frequency Center Freq 2.40200000 GHz CF Step 200.000 kHz Man Freq Offset 0 Hz Auto STATUS	
GFSK/MCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IFGain: Low #Atten: 30 dB 10 dB/div Ref 5.00 dBm Center 2.441 GHz #Res BW 20 kHz #VBW 62 kHz Span 2 MHz Sweep 4.8 ms Occupied Bandwidth 842.20 kHz Total Power 9.04 dBm Transmit Freq Error -8.015 kHz % of OBW Power 99.00 % x dB Bandwidth 882.4 kHz x dB -20.00 dB Frequency Center Freq 2.44100000 GHz CF Step 200.000 kHz Man Freq Offset 0 Hz Auto STATUS	
GFSK/HCH	 Keylight Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS #IFGain: Low #Atten: 30 dB 15 dB/div Ref 5.00 dBm Center 2.48 GHz #Res BW 20 kHz #VBW 62 kHz Span 2 MHz Sweep 4.8 ms Occupied Bandwidth 847.48 kHz Total Power 8.99 dBm Transmit Freq Error -9.843 kHz % of OBW Power 99.00 % x dB Bandwidth 889.5 kHz x dB -20.00 dB Frequency Center Freq 2.48000000 GHz CF Step 200.000 kHz Man Freq Offset 0 Hz Auto STATUS	

$\pi/4$DQPSK/LCH	KeySight Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref 10.00 dBm Center 2.402 GHz #Res BW 20 kHz #VBW 62 kHz Span 2 MHz Sweep 4.8 ms Occupied Bandwidth 1.1914 MHz Total Power 7.99 dBm Transmit Freq Error -5.001 kHz % of OBW Power 99.00 % x dB Bandwidth 1.289 MHz x dB -20.00 dB Frequency Center Freq 2.402000000 GHz CF Step 200.000 kHz Freq Offset 0 Hz
$\pi/4$DQPSK/MCH	KeySight Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref 10.00 dBm Center 2.441 GHz #Res BW 20 kHz #VBW 62 kHz Span 2 MHz Sweep 4.8 ms Occupied Bandwidth 1.1872 MHz Total Power 8.62 dBm Transmit Freq Error -5.457 kHz % of OBW Power 99.00 % x dB Bandwidth 1.314 MHz x dB -20.00 dB Frequency Center Freq 2.441000000 GHz CF Step 200.000 kHz Freq Offset 0 Hz
$\pi/4$DQPSK/HCH	KeySight Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref 5.00 dBm Center 2.48 GHz #Res BW 20 kHz #VBW 62 kHz Span 2 MHz Sweep 4.8 ms Occupied Bandwidth 1.1855 MHz Total Power 8.65 dBm Transmit Freq Error -7.670 kHz % of OBW Power 99.00 % x dB Bandwidth 1.279 MHz x dB -20.00 dB Frequency Center Freq 2.480000000 GHz CF Step 200.000 kHz Freq Offset 0 Hz

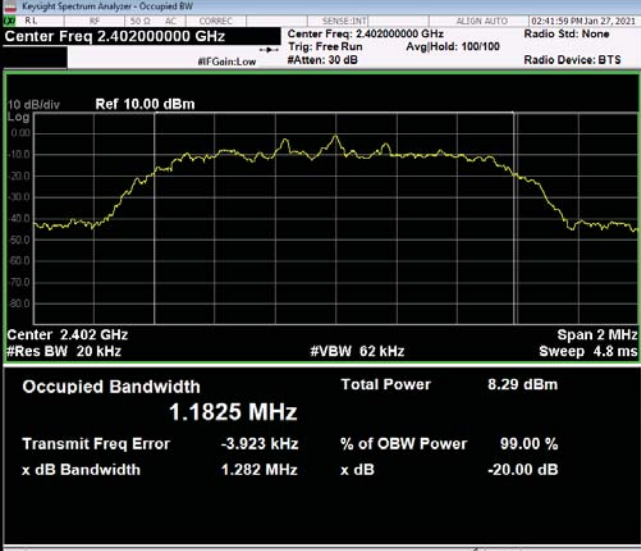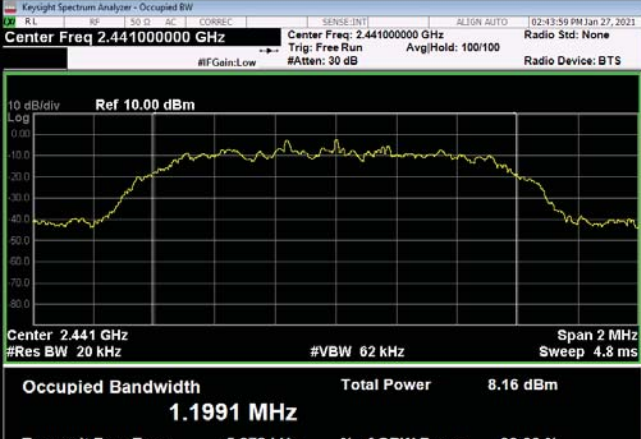8DPSK/LCH	 Center Freq 2.40200000 GHz Center Freq 2.40200000 GHz CF Step 200.000 kHz Freq Offset 0 Hz Occupied Bandwidth 1.1825 MHz Total Power 8.29 dBm Transmit Freq Error -3.923 kHz % of OBW Power 99.00 % x dB Bandwidth 1.282 MHz x dB -20.00 dB	
8DPSK/MCH	 Center Freq 2.44100000 GHz Center Freq 2.44100000 GHz CF Step 200.000 kHz Freq Offset 0 Hz Occupied Bandwidth 1.1991 MHz Total Power 8.16 dBm Transmit Freq Error -5.872 kHz % of OBW Power 99.00 % x dB Bandwidth 1.317 MHz x dB -20.00 dB	
8DPSK/HCH	 Center Freq 2.48000000 GHz Center Freq 2.48000000 GHz CF Step 200.000 kHz Freq Offset 0 Hz Occupied Bandwidth 1.2009 MHz Total Power 8.37 dBm Transmit Freq Error -4.515 kHz % of OBW Power 99.00 % x dB Bandwidth 1.293 MHz x dB -20.00 dB	


5.5 Frequencies Separation



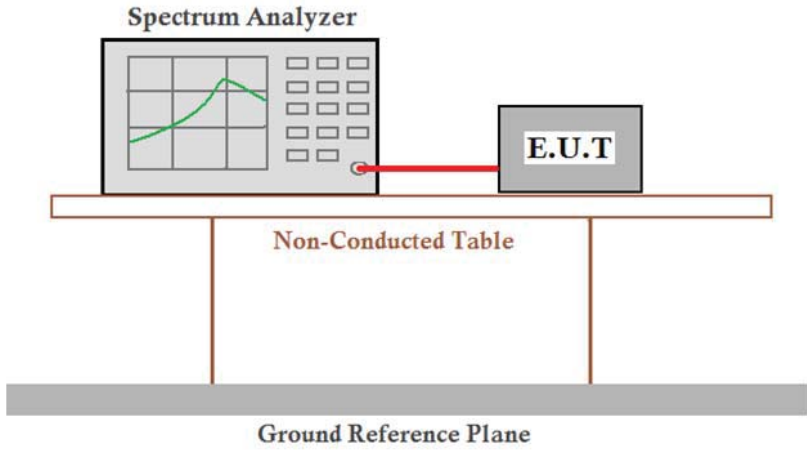
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH00	1.001	25KHz or 2/3*20dB bandwidth	Pass
	CH01			
	CH39	1.004		
	CH40			
	CH77	0.999		
	CH78			
pi/4DQPSK	CH00	1.000	25KHz or 2/3*20dB bandwidth	Pass
	CH01			
	CH39	0.993		
	CH40			
	CH77	1.000		
	CH78			

8DPSK	CH00	0.991	25KHz or 2/3*20dB bandwidth	Pass
	CH01			
	CH39	0.999		
	CH40			
	CH77	1.003		
	CH78			


Test plot as follows:

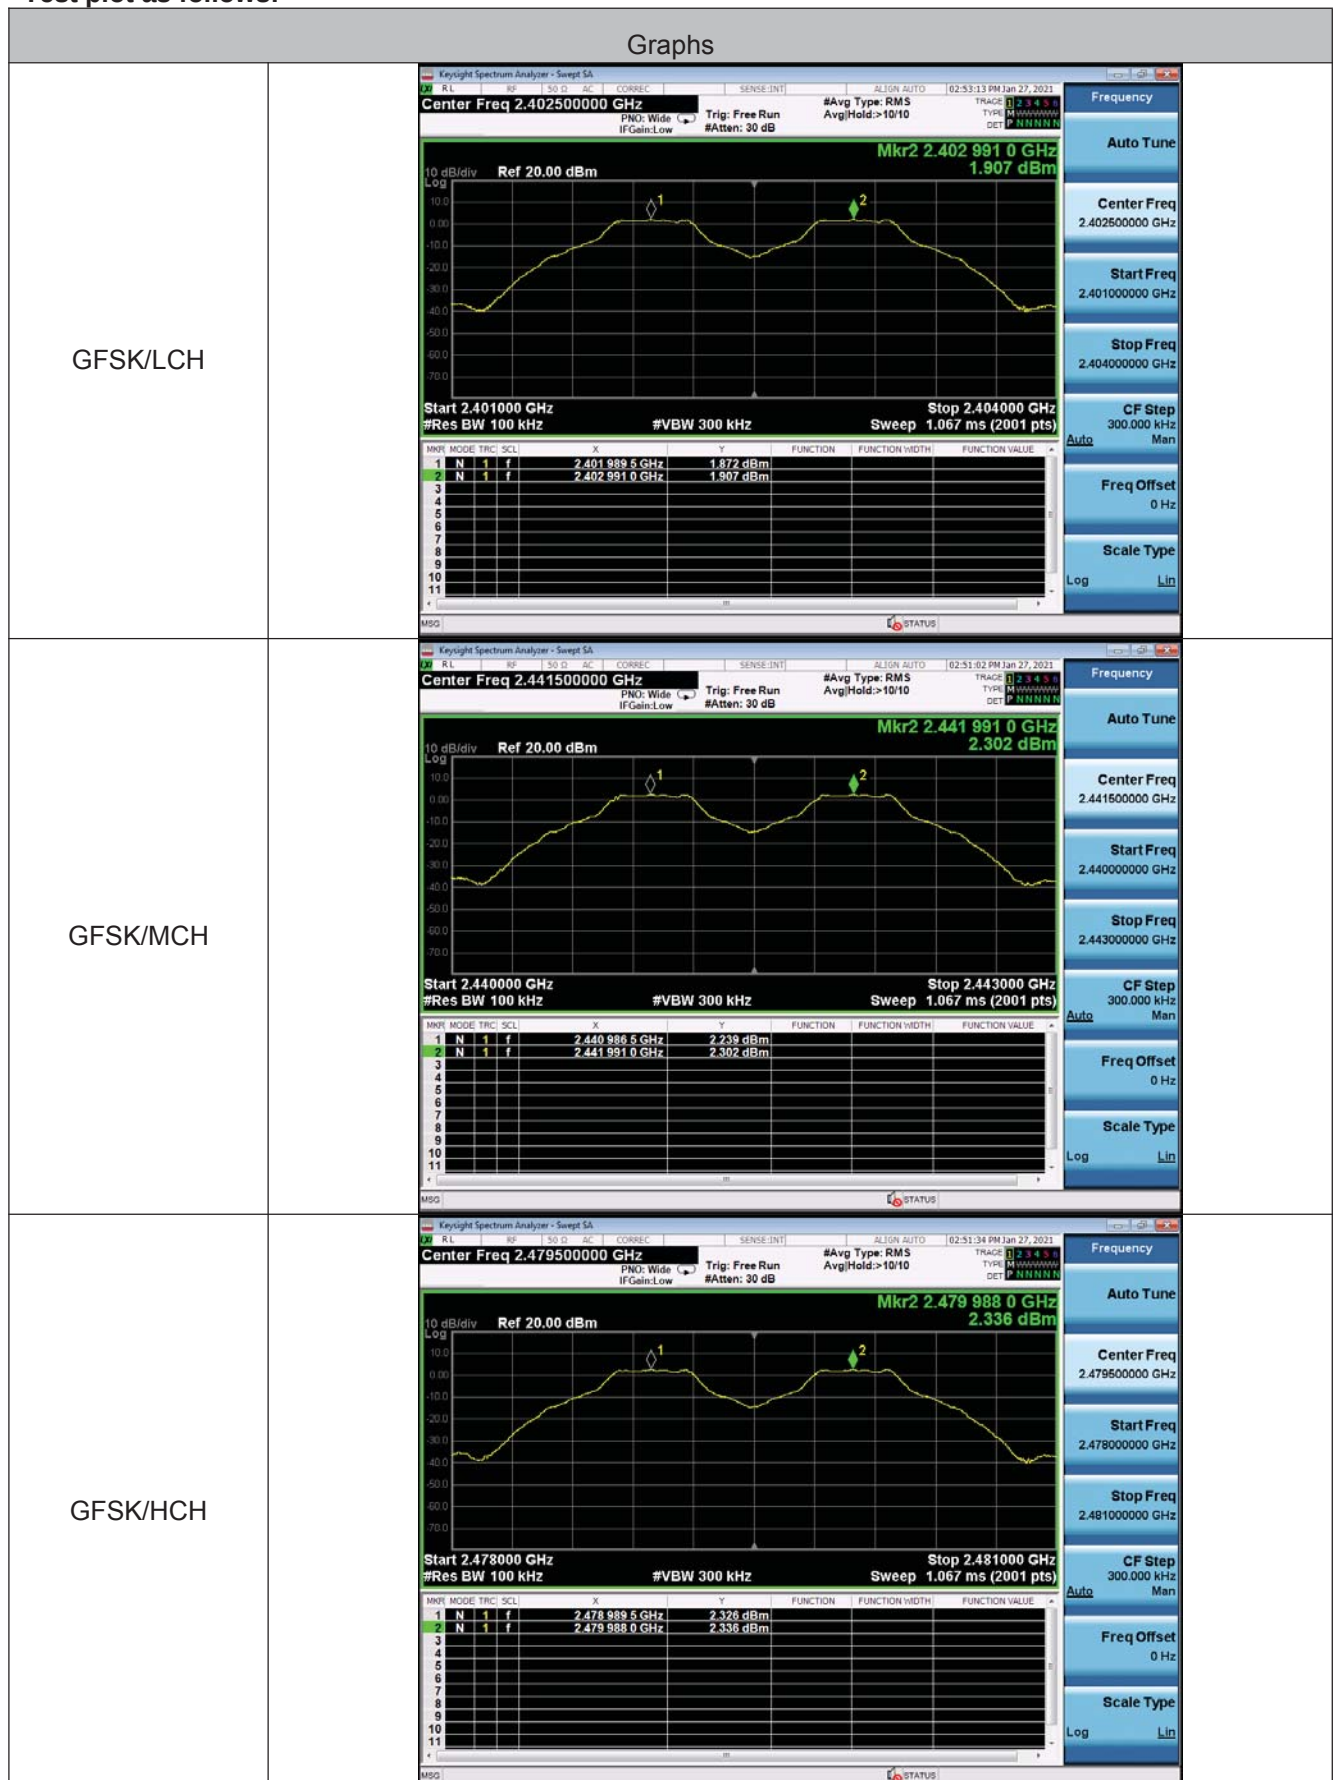

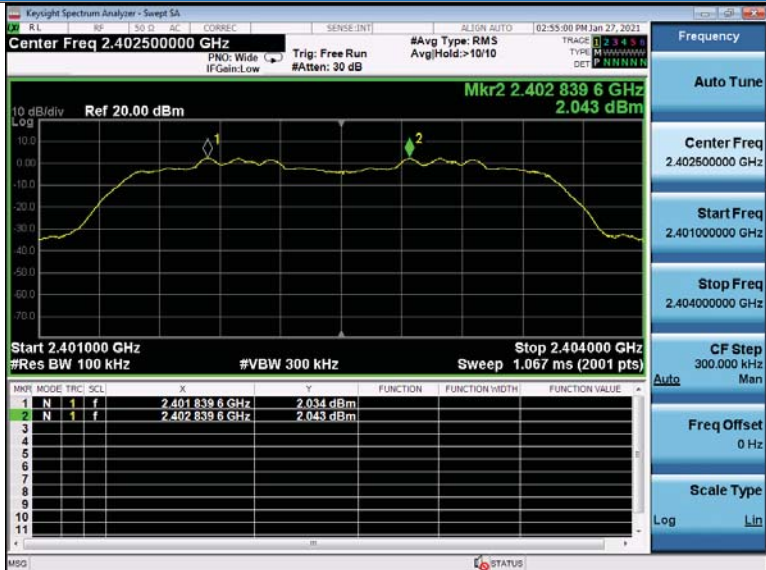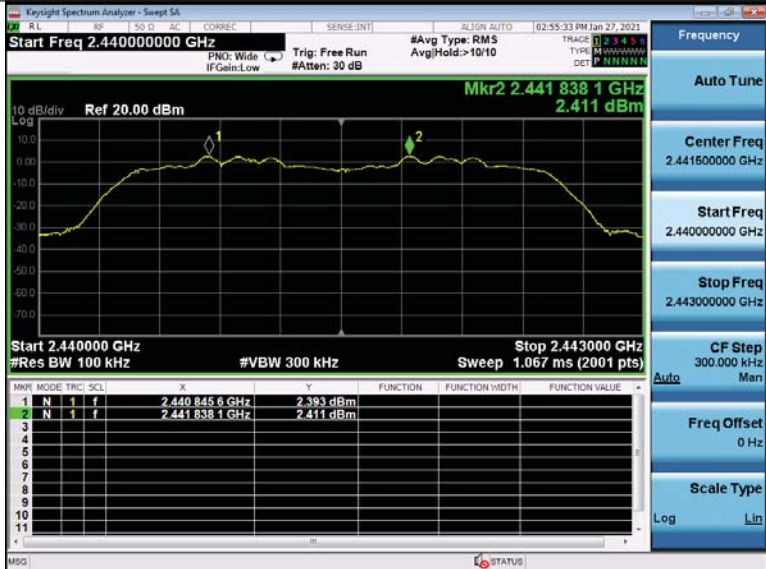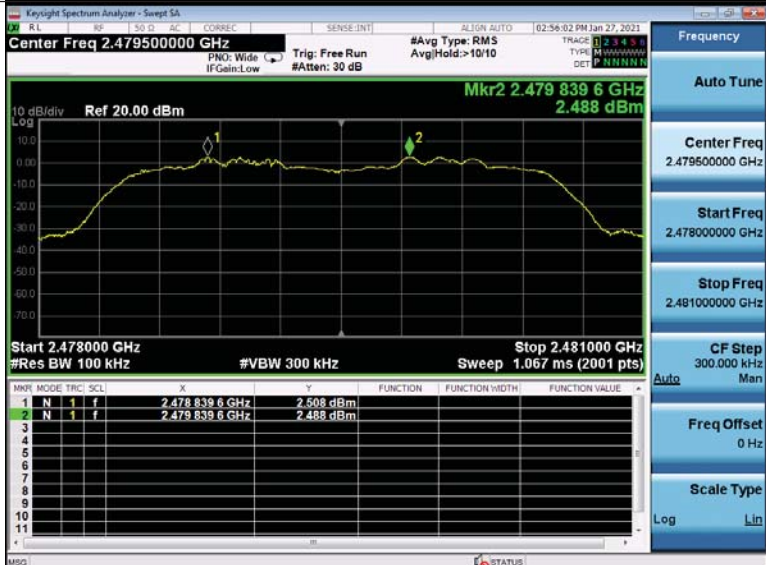$\pi/4$ DQPSK/LCH	 Keylight Spectrum Analyzer - Sweep SA Center Freq 2.402500000 GHz Start Freq 2.4010000 GHz Stop Freq 2.4040000 GHz CF Step 300.000 kHz Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (2001 pts) <table><tr><th>MNPR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4018396 GHz</td><td>2.034 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4028396 GHz</td><td>2.043 dBm</td><td></td><td></td><td></td></tr></table>	MNPR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018396 GHz	2.034 dBm				2	N	1	f	2.4028396 GHz	2.043 dBm			
MNPR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4018396 GHz	2.034 dBm																							
2	N	1	f	2.4028396 GHz	2.043 dBm																							
$\pi/4$ DQPSK/MCH	 Keylight Spectrum Analyzer - Sweep SA Start Freq 2.440000000 GHz Stop Freq 2.4430000 GHz CF Step 300.000 kHz Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (2001 pts) <table><tr><th>MNPR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4408456 GHz</td><td>2.393 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4418381 GHz</td><td>2.411 dBm</td><td></td><td></td><td></td></tr></table>	MNPR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4408456 GHz	2.393 dBm				2	N	1	f	2.4418381 GHz	2.411 dBm			
MNPR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4408456 GHz	2.393 dBm																							
2	N	1	f	2.4418381 GHz	2.411 dBm																							
$\pi/4$ DQPSK/HCH	 Keylight Spectrum Analyzer - Sweep SA Center Freq 2.479500000 GHz Start Freq 2.4780000 GHz Stop Freq 2.4810000 GHz CF Step 300.000 kHz Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (2001 pts) <table><tr><th>MNPR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4788396 GHz</td><td>2.508 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4798396 GHz</td><td>2.488 dBm</td><td></td><td></td><td></td></tr></table>	MNPR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4788396 GHz	2.508 dBm				2	N	1	f	2.4798396 GHz	2.488 dBm			
MNPR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4788396 GHz	2.508 dBm																							
2	N	1	f	2.4798396 GHz	2.488 dBm																							

8DPSK/LCH	Keylight Spectrum Analyzer - Sweep SA RL RF 50 D AC CORREC SENSE:INT ALIGN: AUTO 02:58:53 PM Jan 27, 2023 Start Freq 2.401000000 GHz Trig: Free Run #Avg Type: RMS AvgHold: >10/10 TYPE: M DET: P PN0: Wide IFGain: Low #Atten: 30 dB 10 dB/div Ref 20.00 dBm Log 1 2 Mkr2 2.4028411 GHz 2.061 dBm Start 2.401000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.404000 GHz Sweep 1.067 ms (2001 pts) MNPR MODE TRIG SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 N 1 f 2.4018501 GHz 1.951 dBm 2 N 1 f 2.4028411 GHz 2.061 dBm 3
-----------	---

5.6 Hopping Channel Number

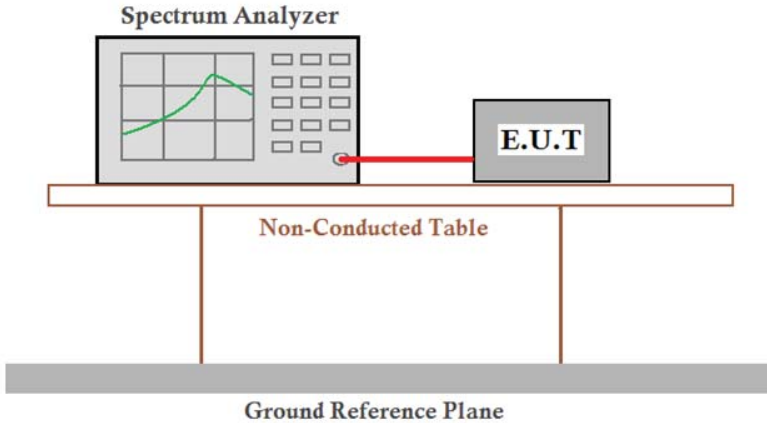Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	At least 15 channels
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.. Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥ 15
$\pi/4$ DQPSK	79	≥ 15
8DPSK	79	≥ 15

Test plot as follows:

Graphs	
GFSK/Hop	Keylight Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Start 2.40000 GHz Stop 2.48350 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (2001 pts) Ref 20.00 dBm 10 dB/div Log Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Freq Offset 0 Hz Scale Type Log
$\pi/4$ DQPSK/Hop	Keylight Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Start 2.40000 GHz Stop 2.48350 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (2001 pts) Ref 20.00 dBm 10 dB/div Log Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Freq Offset 0 Hz Scale Type Log
8DPSK/Hop	Keylight Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Start 2.40000 GHz Stop 2.48350 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 8.000 ms (2001 pts) Ref 20.00 dBm 10 dB/div Log Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Freq Offset 0 Hz Scale Type Log

5.7 Dwell Time

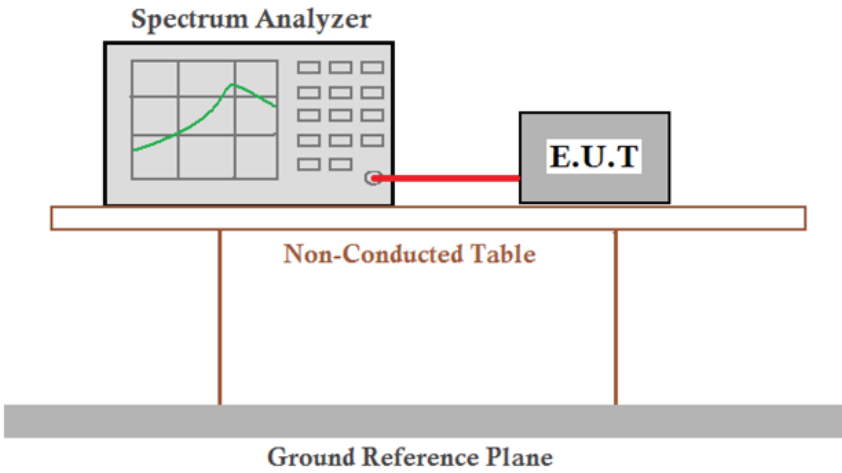Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

Measurement Data

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time[ms]	Limit (ms)
GFSK	DH1	LCH	0.383	122.56	≤400
GFSK	DH1	MCH	0.379	121.28	≤400
GFSK	DH1	HCH	0.383	122.56	≤400
GFSK	DH3	LCH	1.637	261.92	≤400
GFSK	DH3	MCH	1.638	262.08	≤400
GFSK	DH3	HCH	1.638	262.08	≤400
GFSK	DH5	LCH	2.884	307.627	≤400
GFSK	DH5	MCH	2.883	307.52	≤400
GFSK	DH5	HCH	2.884	307.627	≤400
π/4DQPSK	2DH1	LCH	0.389	124.48	≤400
π/4DQPSK	2DH1	MCH	0.390	124.8	≤400
π/4DQPSK	2DH1	HCH	0.393	125.76	≤400
π/4DQPSK	2DH3	LCH	1.644	263.04	≤400
π/4DQPSK	2DH3	MCH	1.642	262.72	≤400
π/4DQPSK	2DH3	HCH	1.643	262.88	≤400
π/4DQPSK	2DH5	LCH	2.890	308.267	≤400
π/4DQPSK	2DH5	MCH	2.888	308.053	≤400

$\pi/4$ DQPSK	2DH5	HCH	2.893	308.587	≤ 400
8DPSK	3DH1	LCH	0.393	125.76	≤ 400
8DPSK	3DH1	MCH	0.389	124.48	≤ 400
8DPSK	3DH1	HCH	0.388	124.16	≤ 400
8DPSK	3DH3	LCH	1.643	262.88	≤ 400
8DPSK	3DH3	MCH	1.644	263.04	≤ 400
8DPSK	3DH3	HCH	1.641	262.56	≤ 400
8DPSK	3DH5	LCH	2.893	308.587	≤ 400
8DPSK	3DH5	MCH	2.889	308.160	≤ 400
8DPSK	3DH5	HCH	2.891	308.373	≤ 400

Remark:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

DH1/2DH1/3DH1 Dwell time = Burst Width(ms)*(1600/(2*79))*31.6


DH3/2DH3/3DH3 Dwell time = Burst Width (ms)*(1600/(4*79))*31.6

DH5/2DH5/3DH5 Dwell time = Burst Width (ms)*(1600/(6*79))*31.6


Test plot as follows:

Graphs	
DH1-LCH	
DH1-MCH	
DH1-HCH	


DH3-LCH

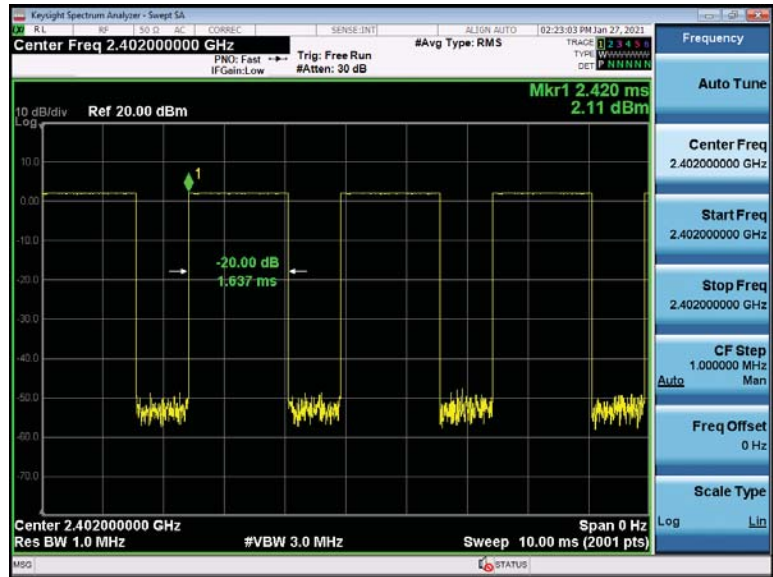


DH3-MCH

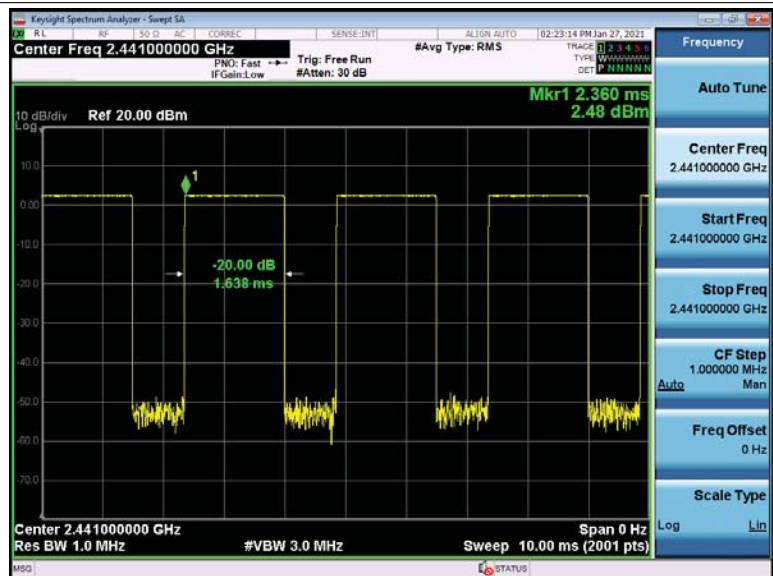


DH3-HCH

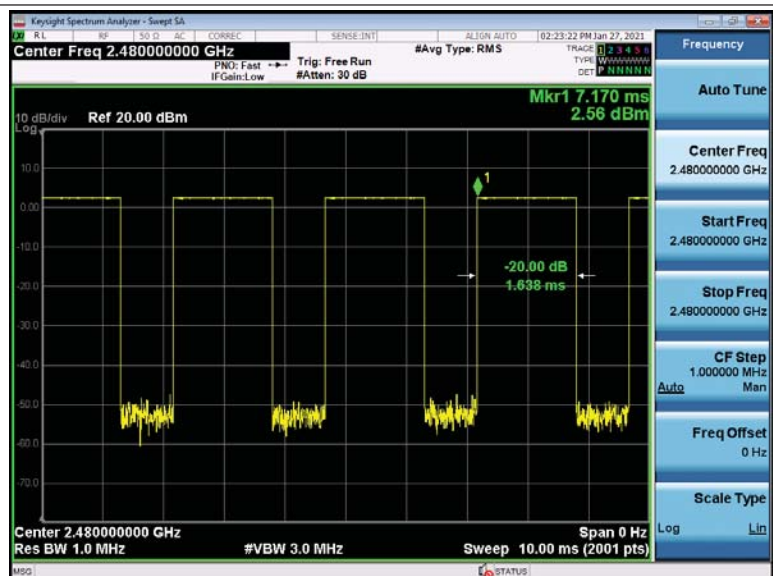


DH5-LCH

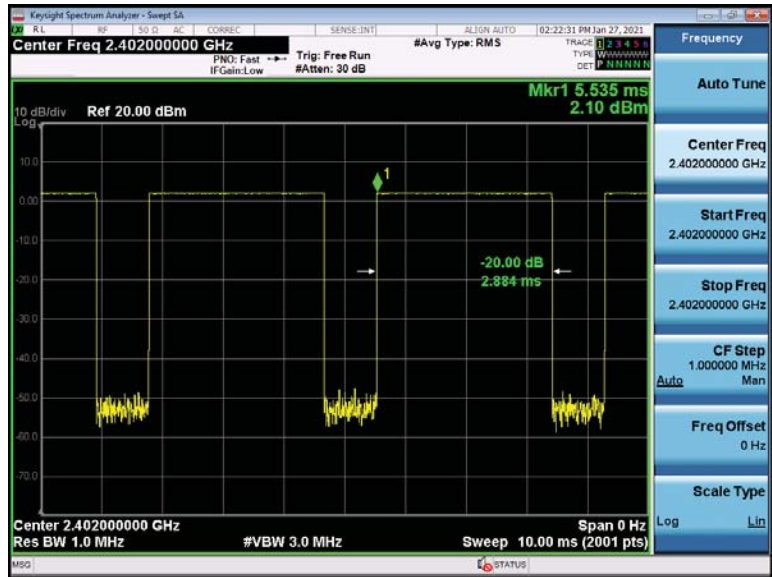


DH5-MCH

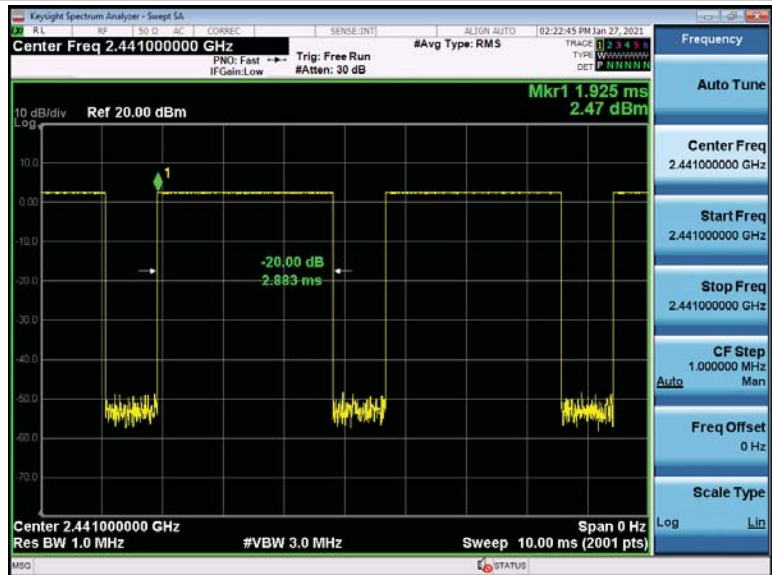


DH5-HCH

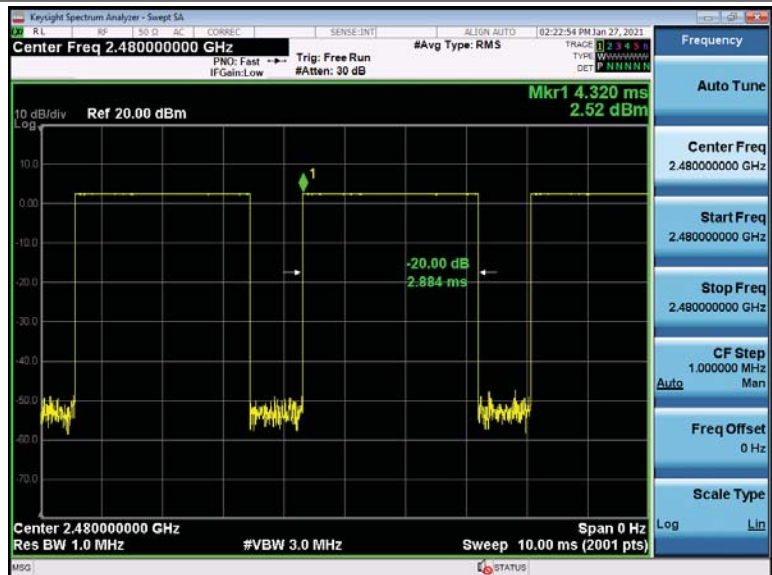


2DH1-LCH

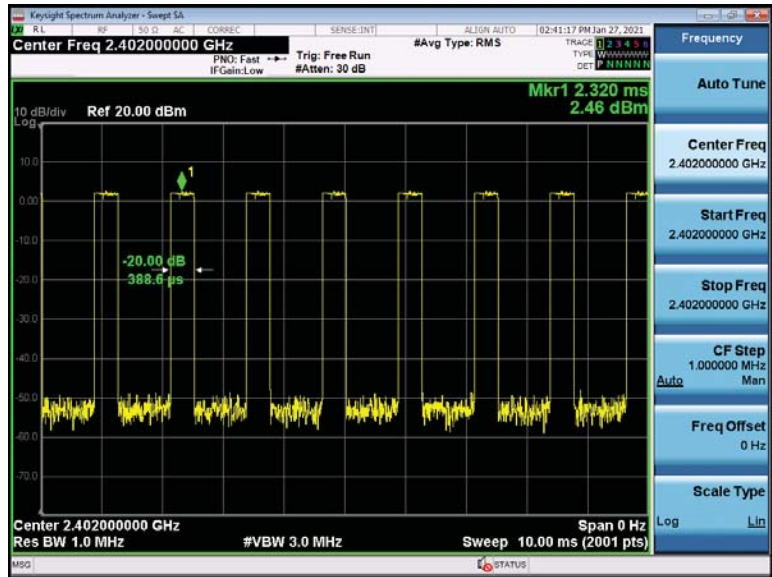


2DH1-MCH

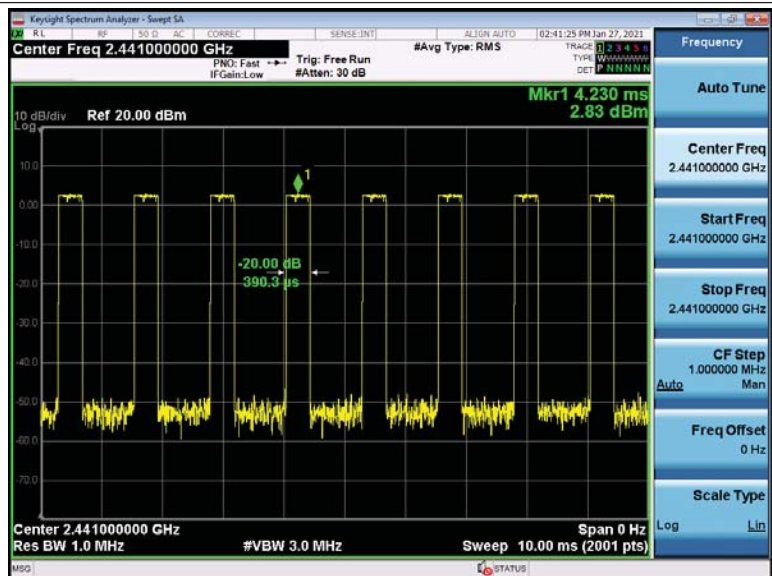


2DH1-HCH

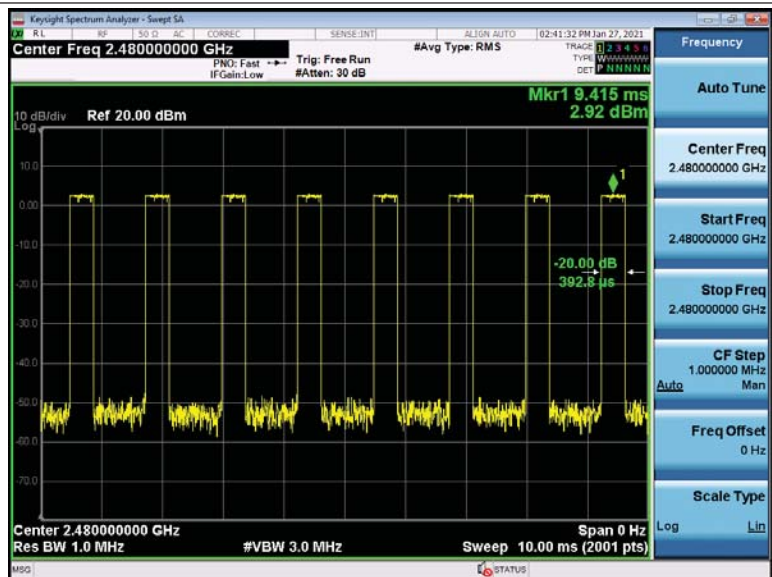


2DH3-LCH

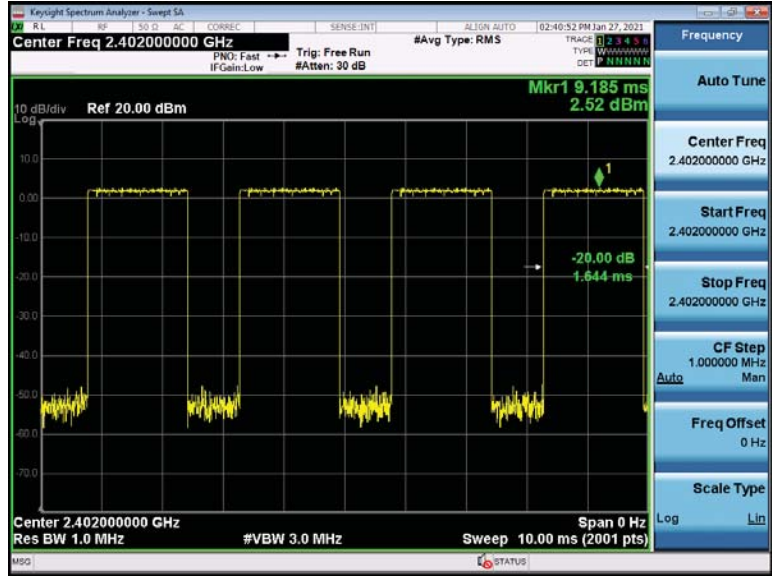


2DH3-MCH

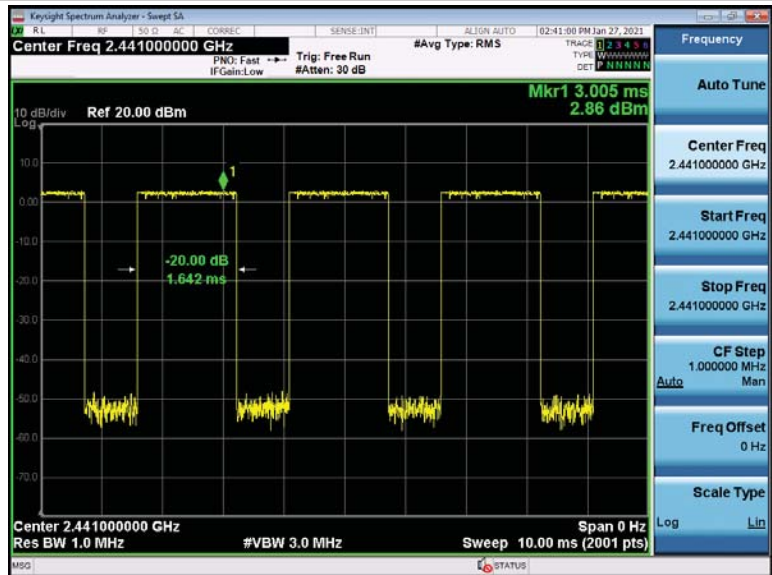


2DH3-HCH

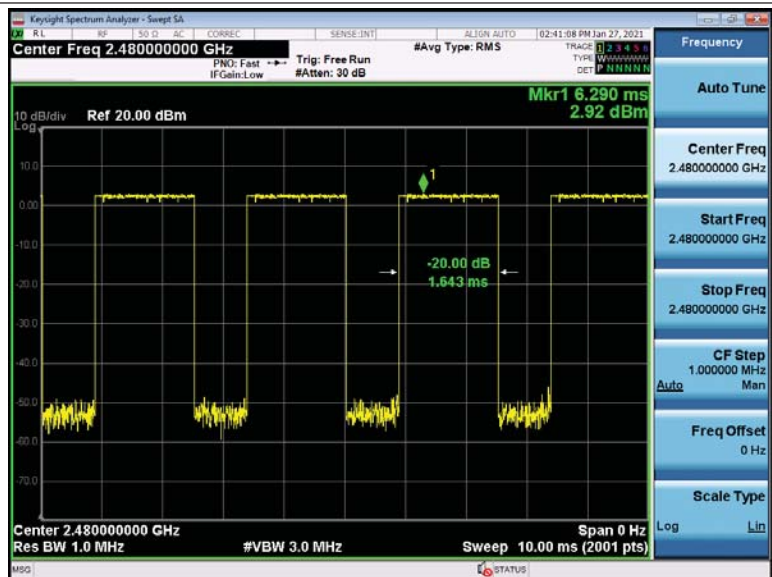


2DH5-LCH

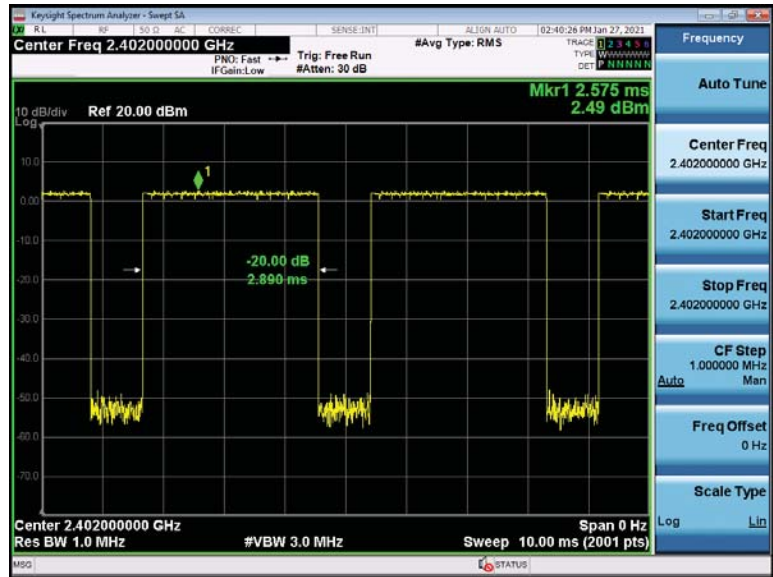


2DH5-MCH

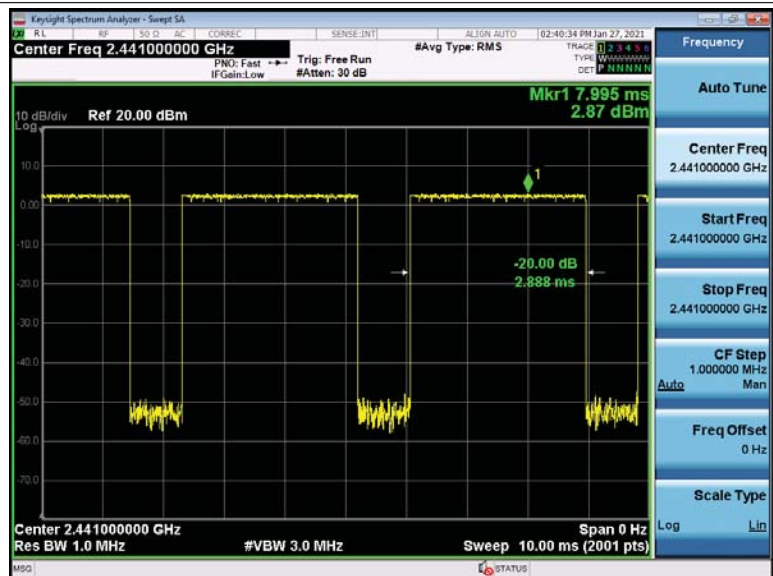


2DH5-HCH

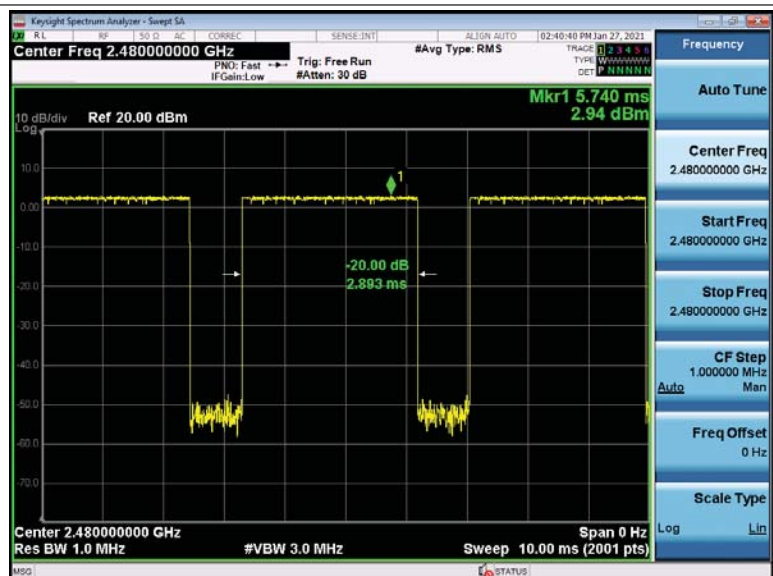


3DH1-LCH

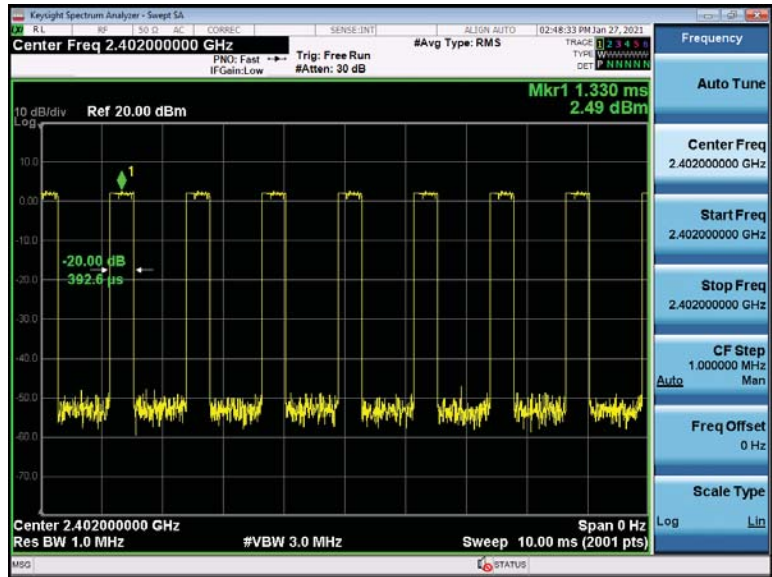


3DH1-MCH

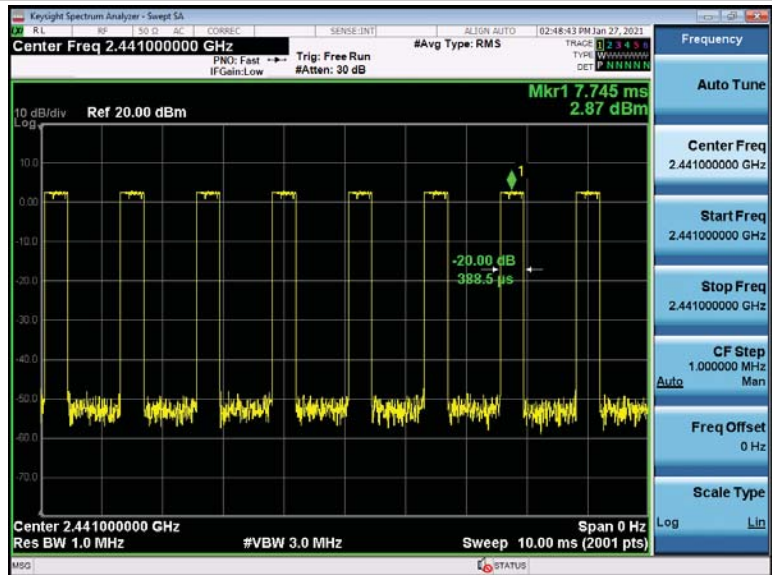


3DH1-HCH

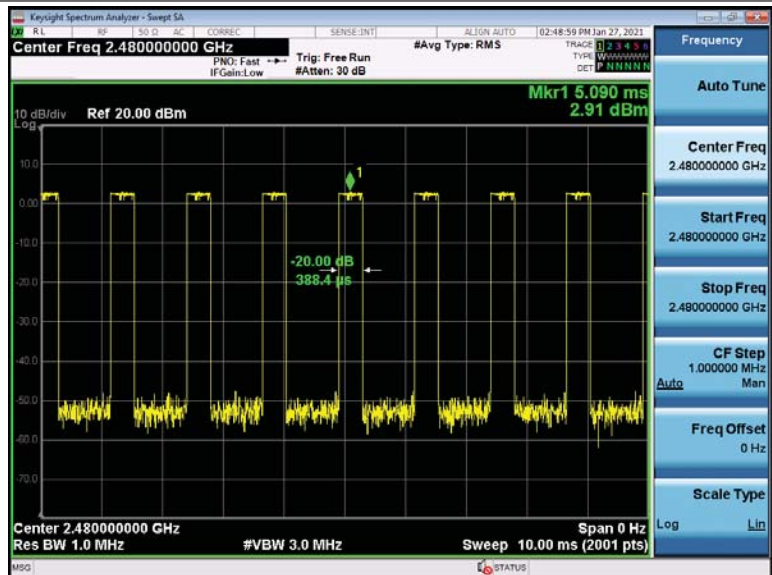


3DH3-LCH

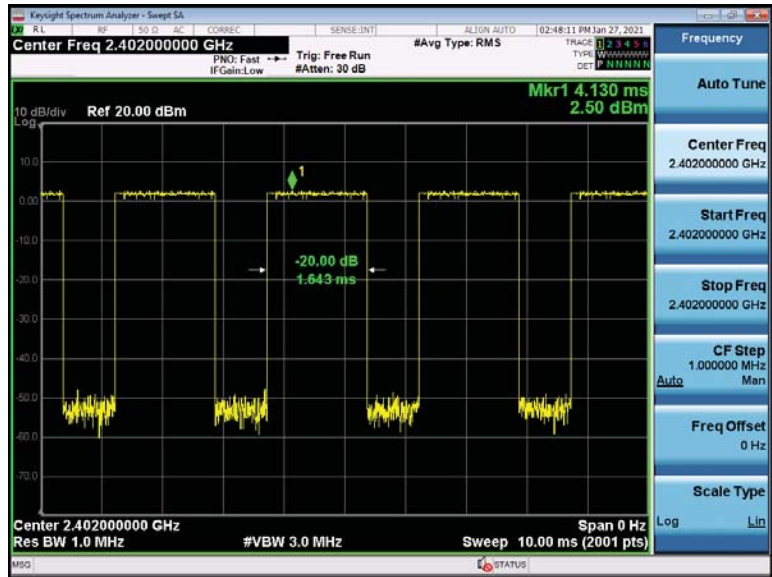


3DH3-MCH

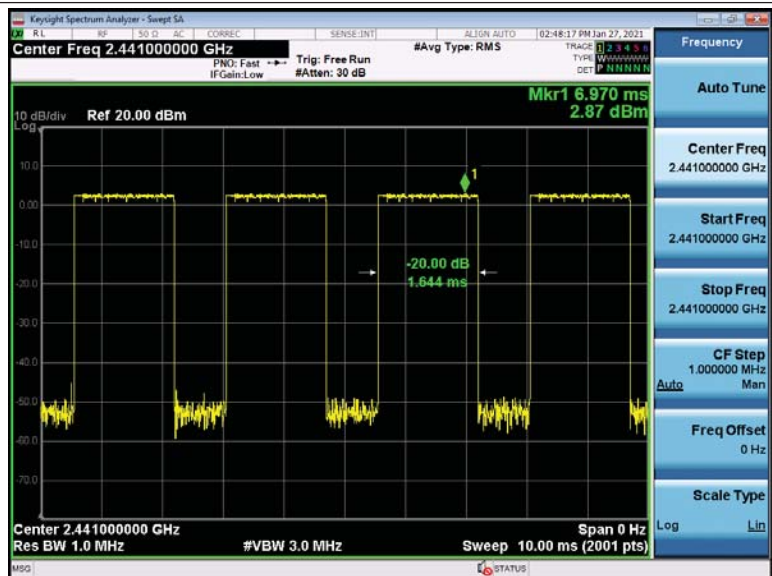


3DH3-HCH

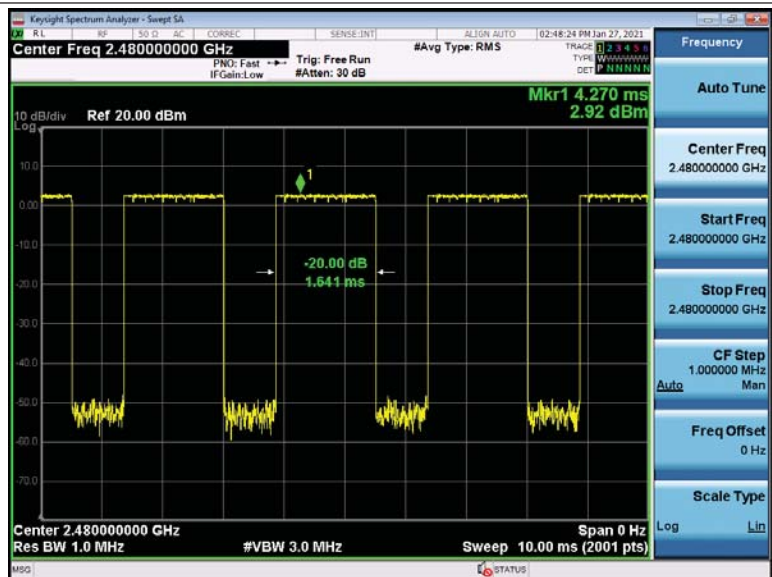


3DH5-LCH

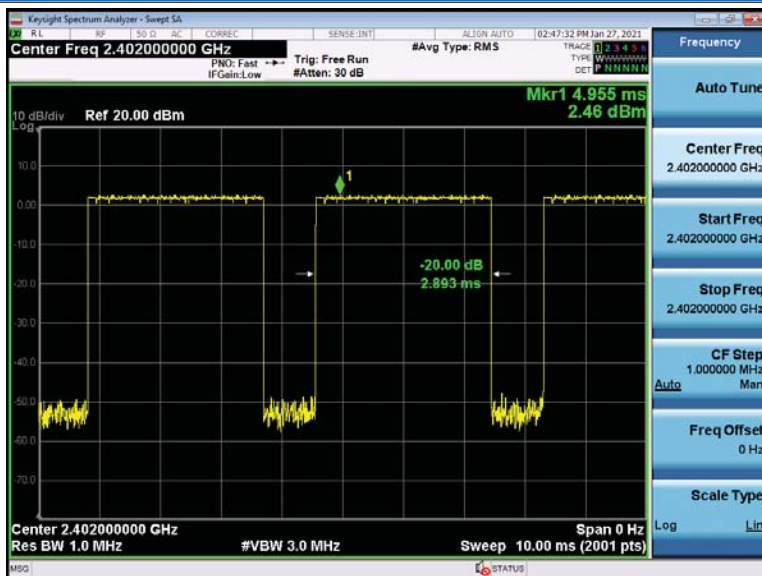


3DH5-MCH

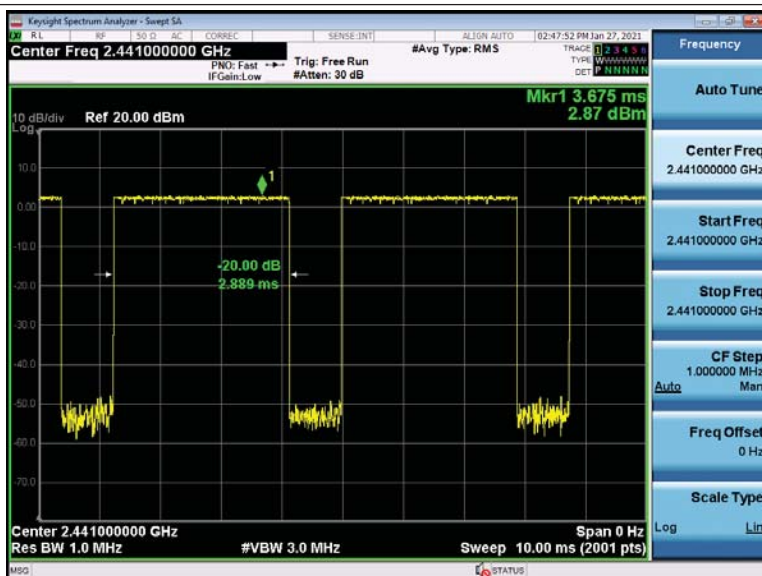


3DH5-HCH



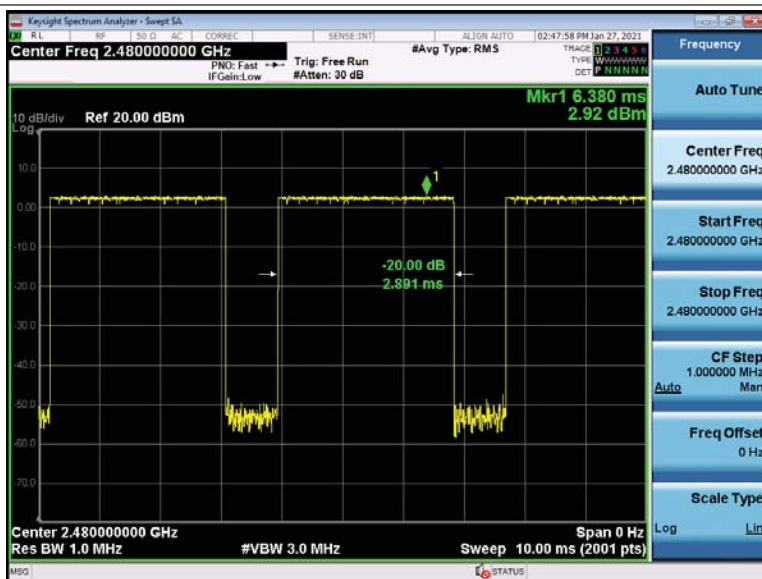





5.8 Band-edge for RF Conducted Emissions

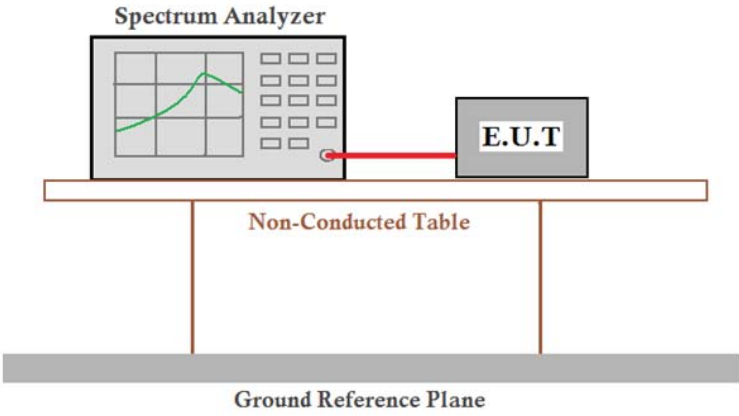Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.. Only the worst case is recorded in the report.
Test Results:	Pass

Test plot as follows:

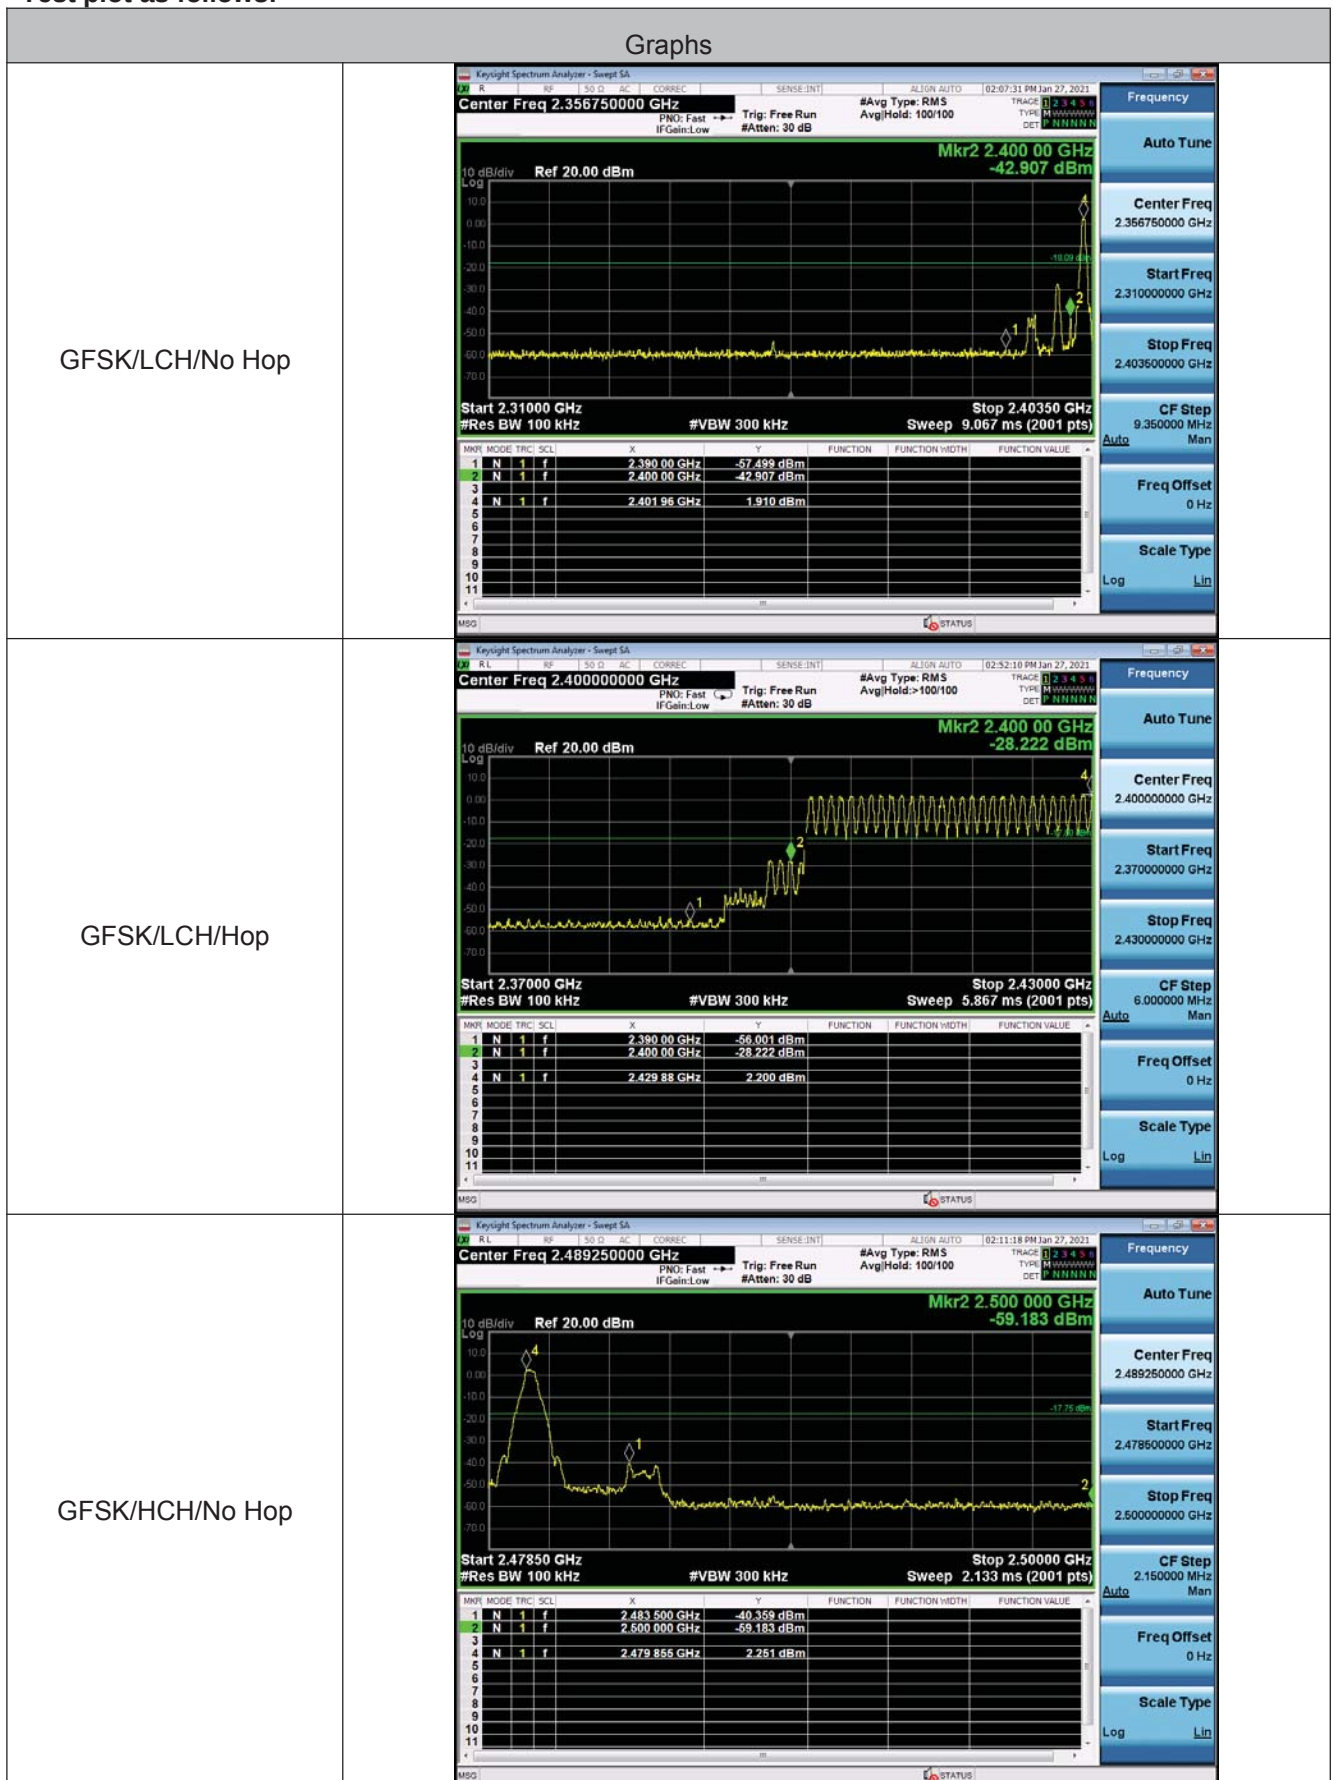

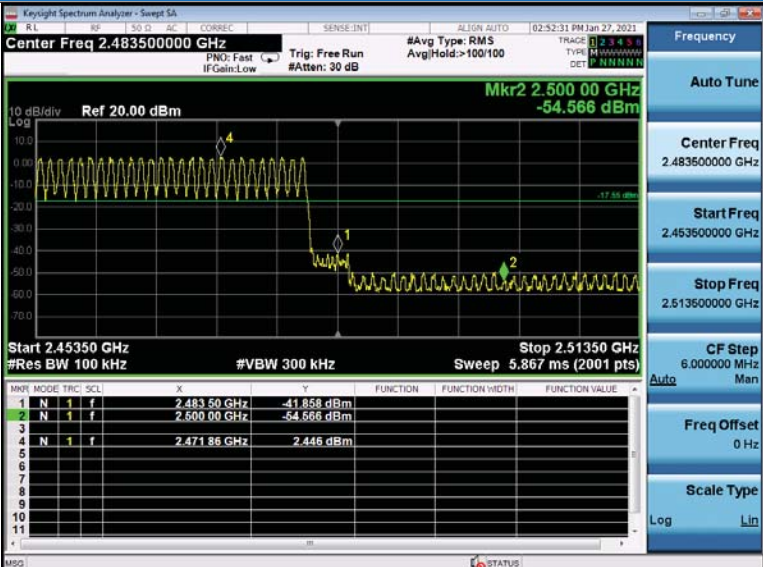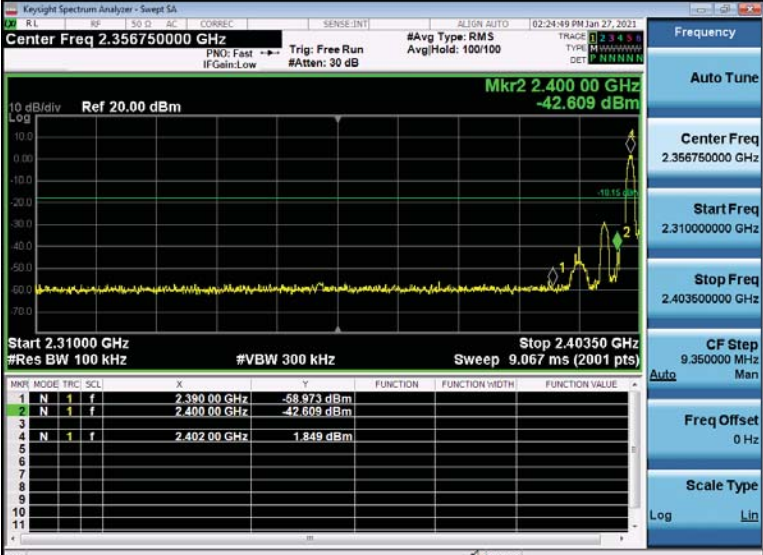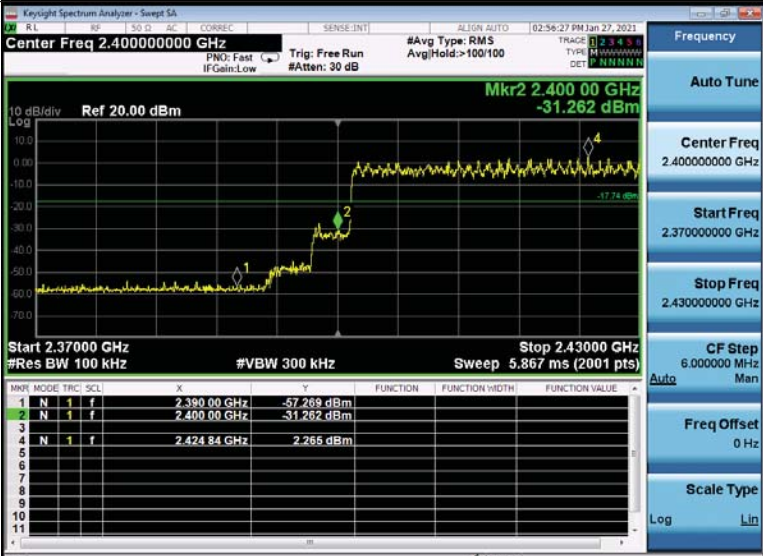GFSK/HCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td>-41.858 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-54.566 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.47186 GHz</td><td>2.446 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.48350 GHz	-41.858 dBm				2	N	1	f	2.50000 GHz	-54.566 dBm				4	N	1	f	2.47186 GHz	2.446 dBm			
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.48350 GHz	-41.858 dBm																																
2	N	1	f	2.50000 GHz	-54.566 dBm																																
4	N	1	f	2.47186 GHz	2.446 dBm																																
$\pi/4$ DQPSK/LCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.39000 GHz</td><td>-58.973 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.40000 GHz</td><td>-42.609 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.40200 GHz</td><td>1.849 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.39000 GHz	-58.973 dBm				2	N	1	f	2.40000 GHz	-42.609 dBm				4	N	1	f	2.40200 GHz	1.849 dBm			
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.39000 GHz	-58.973 dBm																																
2	N	1	f	2.40000 GHz	-42.609 dBm																																
4	N	1	f	2.40200 GHz	1.849 dBm																																
$\pi/4$ DQPSK/LCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.39000 GHz</td><td>-57.269 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.40000 GHz</td><td>-31.262 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.42484 GHz</td><td>2.265 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.39000 GHz	-57.269 dBm				2	N	1	f	2.40000 GHz	-31.262 dBm				4	N	1	f	2.42484 GHz	2.265 dBm			
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.39000 GHz	-57.269 dBm																																
2	N	1	f	2.40000 GHz	-31.262 dBm																																
4	N	1	f	2.42484 GHz	2.265 dBm																																

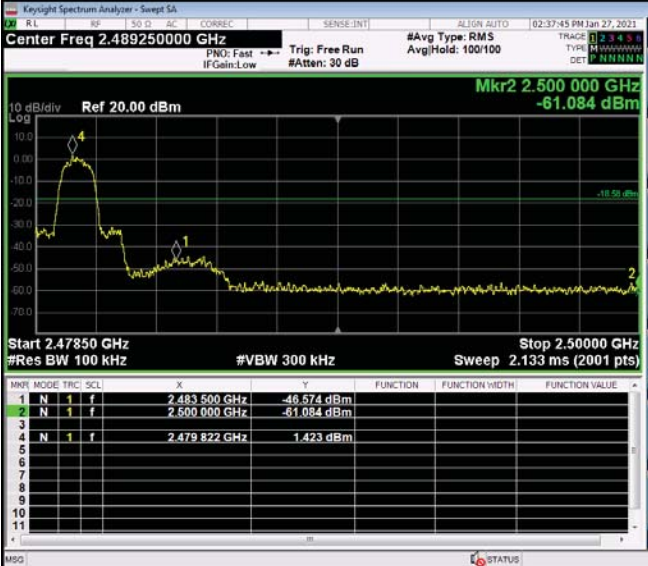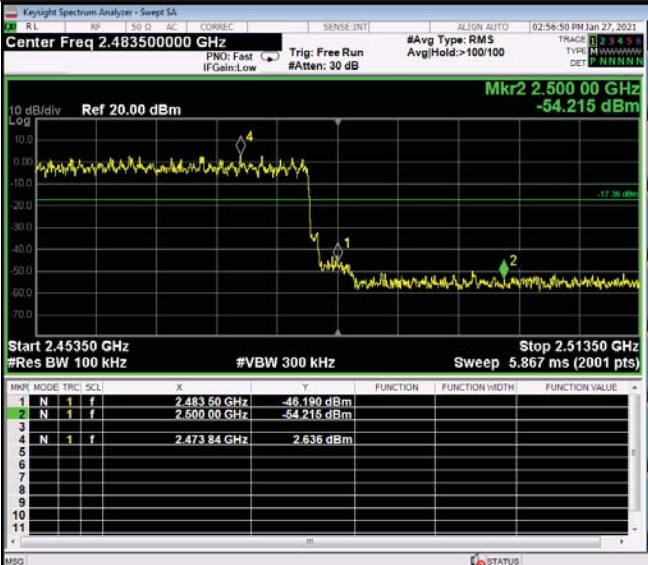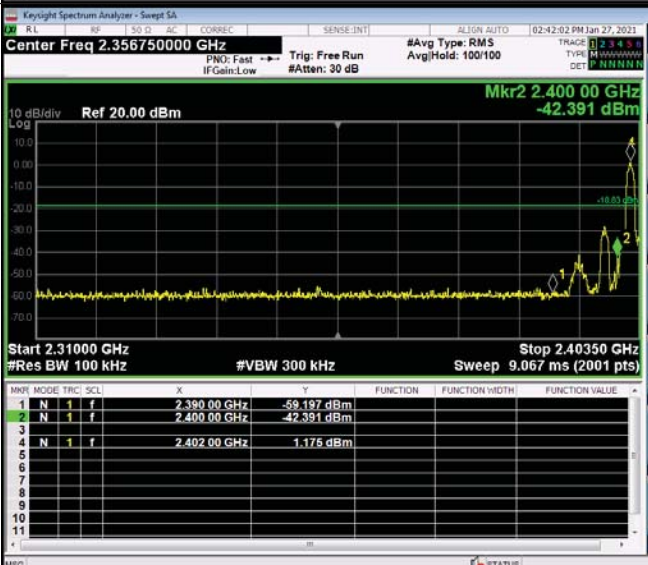$\pi/4$ DQPSK/HCH/No Hop	 <table><thead><tr><th>Mkr</th><th>Mode</th><th>Trig</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-46.574 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-61.084 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.479 822 GHz</td><td>1.423 dBm</td><td></td><td></td><td></td></tr></tbody></table>	Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.483 500 GHz	-46.574 dBm				2	N	1	f	2.500 000 GHz	-61.084 dBm				4	N	1	f	2.479 822 GHz	1.423 dBm				<table><tr><td>Frequency</td><td>2.489250000 GHz</td></tr><tr><td>Auto Tune</td><td></td></tr><tr><td>Center Freq</td><td>2.489250000 GHz</td></tr><tr><td>Start Freq</td><td>2.478500000 GHz</td></tr><tr><td>Stop Freq</td><td>2.500000000 GHz</td></tr><tr><td>CF Step</td><td>2.150000 MHz</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr><tr><td>Scale Type</td><td>Log</td></tr></table>	Frequency	2.489250000 GHz	Auto Tune		Center Freq	2.489250000 GHz	Start Freq	2.478500000 GHz	Stop Freq	2.500000000 GHz	CF Step	2.150000 MHz	Freq Offset	0 Hz	Scale Type	Log
Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value																																														
1	N	1	f	2.483 500 GHz	-46.574 dBm																																																	
2	N	1	f	2.500 000 GHz	-61.084 dBm																																																	
4	N	1	f	2.479 822 GHz	1.423 dBm																																																	
Frequency	2.489250000 GHz																																																					
Auto Tune																																																						
Center Freq	2.489250000 GHz																																																					
Start Freq	2.478500000 GHz																																																					
Stop Freq	2.500000000 GHz																																																					
CF Step	2.150000 MHz																																																					
Freq Offset	0 Hz																																																					
Scale Type	Log																																																					
$\pi/4$ DQPSK/HCH/Hop	 <table><thead><tr><th>Mkr</th><th>Mode</th><th>Trig</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-46.190 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-54.215 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.473 84 GHz</td><td>2.636 dBm</td><td></td><td></td><td></td></tr></tbody></table>	Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.483 50 GHz	-46.190 dBm				2	N	1	f	2.500 00 GHz	-54.215 dBm				4	N	1	f	2.473 84 GHz	2.636 dBm				<table><tr><td>Frequency</td><td>2.483500000 GHz</td></tr><tr><td>Auto Tune</td><td></td></tr><tr><td>Center Freq</td><td>2.483500000 GHz</td></tr><tr><td>Start Freq</td><td>2.453500000 GHz</td></tr><tr><td>Stop Freq</td><td>2.513500000 GHz</td></tr><tr><td>CF Step</td><td>6.000000 MHz</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr><tr><td>Scale Type</td><td>Log</td></tr></table>	Frequency	2.483500000 GHz	Auto Tune		Center Freq	2.483500000 GHz	Start Freq	2.453500000 GHz	Stop Freq	2.513500000 GHz	CF Step	6.000000 MHz	Freq Offset	0 Hz	Scale Type	Log
Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value																																														
1	N	1	f	2.483 50 GHz	-46.190 dBm																																																	
2	N	1	f	2.500 00 GHz	-54.215 dBm																																																	
4	N	1	f	2.473 84 GHz	2.636 dBm																																																	
Frequency	2.483500000 GHz																																																					
Auto Tune																																																						
Center Freq	2.483500000 GHz																																																					
Start Freq	2.453500000 GHz																																																					
Stop Freq	2.513500000 GHz																																																					
CF Step	6.000000 MHz																																																					
Freq Offset	0 Hz																																																					
Scale Type	Log																																																					
8DPSK/LCH/No Hop	 <table><thead><tr><th>Mkr</th><th>Mode</th><th>Trig</th><th>SCL</th><th>X</th><th>Y</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-59.197 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-42.391 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.402 00 GHz</td><td>1.175 dBm</td><td></td><td></td><td></td></tr></tbody></table>	Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.390 00 GHz	-59.197 dBm				2	N	1	f	2.400 00 GHz	-42.391 dBm				4	N	1	f	2.402 00 GHz	1.175 dBm				<table><tr><td>Frequency</td><td>2.356750000 GHz</td></tr><tr><td>Auto Tune</td><td></td></tr><tr><td>Center Freq</td><td>2.356750000 GHz</td></tr><tr><td>Start Freq</td><td>2.310000000 GHz</td></tr><tr><td>Stop Freq</td><td>2.403500000 GHz</td></tr><tr><td>CF Step</td><td>9.350000 MHz</td></tr><tr><td>Freq Offset</td><td>0 Hz</td></tr><tr><td>Scale Type</td><td>Log</td></tr></table>	Frequency	2.356750000 GHz	Auto Tune		Center Freq	2.356750000 GHz	Start Freq	2.310000000 GHz	Stop Freq	2.403500000 GHz	CF Step	9.350000 MHz	Freq Offset	0 Hz	Scale Type	Log
Mkr	Mode	Trig	SCL	X	Y	Function	Function Width	Function Value																																														
1	N	1	f	2.390 00 GHz	-59.197 dBm																																																	
2	N	1	f	2.400 00 GHz	-42.391 dBm																																																	
4	N	1	f	2.402 00 GHz	1.175 dBm																																																	
Frequency	2.356750000 GHz																																																					
Auto Tune																																																						
Center Freq	2.356750000 GHz																																																					
Start Freq	2.310000000 GHz																																																					
Stop Freq	2.403500000 GHz																																																					
CF Step	9.350000 MHz																																																					
Freq Offset	0 Hz																																																					
Scale Type	Log																																																					

8DPSK/LCH/Hop	KeySight Spectrum Analyzer - Swept SA Center Freq 2.40000000 GHz Start 2.37000 GHz Stop 2.43000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.867 ms (2001 pts) 10 dB/div Ref 20.00 dBm Log 1 2 3 4 5 6 7 8 9 10 11 Mkr2 2.400 00 GHz -31.316 dBm -17.96 dBm <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-56.653 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-31.316 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.421 99 GHz</td><td>2.051 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.40000000 GHz Start Freq 2.370000000 GHz Stop Freq 2.430000000 GHz CF Step 6.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.390 00 GHz	-56.653 dBm				2	N	1	f	2.400 00 GHz	-31.316 dBm				3	N	1	f	2.421 99 GHz	2.051 dBm			
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.390 00 GHz	-56.653 dBm																																
2	N	1	f	2.400 00 GHz	-31.316 dBm																																
3	N	1	f	2.421 99 GHz	2.051 dBm																																
8DPSK/HCH/No Hop	KeySight Spectrum Analyzer - Swept SA Center Freq 2.489250000 GHz Start 2.47850 GHz Stop 2.50000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (2001 pts) 10 dB/div Ref 20.00 dBm Log 1 2 3 4 5 6 7 8 9 10 11 Mkr2 2.500 000 GHz -60.446 dBm -18.06 dBm <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-41.824 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-60.446 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.480 016 GHz</td><td>1.137 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.489250000 GHz Start Freq 2.478500000 GHz Stop Freq 2.500000000 GHz CF Step 2.150000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483 500 GHz	-41.824 dBm				2	N	1	f	2.500 000 GHz	-60.446 dBm				3	N	1	f	2.480 016 GHz	1.137 dBm			
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.483 500 GHz	-41.824 dBm																																
2	N	1	f	2.500 000 GHz	-60.446 dBm																																
3	N	1	f	2.480 016 GHz	1.137 dBm																																
8DPSK/HCH/Hop	KeySight Spectrum Analyzer - Swept SA Center Freq 2.483500000 GHz Start 2.45350 GHz Stop 2.51350 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.867 ms (2001 pts) 10 dB/div Ref 20.00 dBm Log 1 2 3 4 5 6 7 8 9 10 11 Mkr2 2.500 00 GHz -54.312 dBm -17.36 dBm <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-45.482 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-54.312 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.461 84 GHz</td><td>2.646 dBm</td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.483500000 GHz Start Freq 2.453500000 GHz Stop Freq 2.513500000 GHz CF Step 6.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483 50 GHz	-45.482 dBm				2	N	1	f	2.500 00 GHz	-54.312 dBm				3	N	1	f	2.461 84 GHz	2.646 dBm			
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.483 50 GHz	-45.482 dBm																																
2	N	1	f	2.500 00 GHz	-54.312 dBm																																
3	N	1	f	2.461 84 GHz	2.646 dBm																																