



**FCC PART 15 SUBPART C
CERTIFICATION TEST REPORT**

For

Portable Floor Luminaire For Indoor And Outdoor Use

MODEL NUMBER: EDISON THE GIANT

FCC ID: 2ARLZEDISONTHEGIANT

REPORT NUMBER: 4788563096-F01-00

ISSUE DATE: Nov. 13, 2018

Prepared for

**Fatboy the Original b.v.
HET ZUIDERKRUIS 3, 5215MV'S-HERTOGENBOSCH, THE NETHERLANDS**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 10, Innovation Technology Park, Song Shan Lake Hi tech
Development Zone, Dongguan, 523808, China
Tel: +86 769 33817100
Fax: +86 769 33244054
Website: www.ul.com**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/13/2018	Initial Issue	--



Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	6 dB DTS Bandwidth	FCC 15.247 (a) (2)	Pass
2	Peak Conducted Power	FCC 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC 15.247 (3)	Pass
4	Conducted Band edge And Spurious emission	FCC 15.247 (d)	Pass
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC 15.207	Pass
7	Antenna Requirement	FCC 15.203	Pass



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY.....	8
5. EQUIPMENT UNDER TEST.....	9
5.1. DESCRIPTION OF EUT.....	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. CHANNEL LIST.....	9
5.4. TEST CHANNEL CONFIGURATION.....	10
5.5. THE WORSE CASE POWER SETTING PARAMETER.....	10
5.6. DESCRIPTION OF AVAILABLE ANTENNAS.....	10
5.7. WORST-CASE CONFIGURATIONS	10
5.8. DESCRIPTION OF TEST SETUP	11
6. MEASURING INSTRUMENT AND SOFTWARE USED	12
7. MEASUREMENT METHODS	14
8. ANTENNA PORT TEST RESULTS.....	15
8.1. ON TIME AND DUTY CYCLE.....	15
8.2. 6 dB BANDWIDTH & 99% BANDWIDTH.....	17
8.3. PEAK CONDUCTED OUTPUT POWER	20
8.4. POWER SPECTRAL DENSITY.....	21
8.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	24
9. RADIATED TEST RESULTS.....	29
9.1. LIMITS AND PROCEDURE.....	29
9.2. RESTRICTED BANDEDGE.....	35
9.3. SPURIOUS EMISSIONS 30MHz-1GHz.....	39
9.4. SPURIOUS EMISSIONS 1 GHz-25GHz.....	41
9.5. SPURIOUS EMISSIONS UP TO 30M.....	47



10.	AC POWER LINE CONDUCTED EMISSIONS	51
11.	ANTENNA REQUIREMENTS	54



1. ATTESTATION OF TEST RESULTS


Applicant Information

Company Name: Fatboy the Original b.v.
Address: HET ZUIDERKRUIS 3, 5215MV'S-HERTOGENBOSCH,
THE NETHERLANDS

Manufacturer Information

Company Name: Dilead Technologies (Guangzhou) Co., Ltd.
Address: 4th Floor, No.5 Building, Chuang Xing Industrial Park, Sha Pu,
Xin Tang Town, Zeng Cheng District,
511340 GuangZhou City, China

EUT Description

EUT Name: Portable Floor Luminaire For Indoor And Outdoor Use
Model: EDISON THE GIANT
Brand Name: 

Sample Status: Normal
Sample ID: 03059
Sample Received Date: Sep. 05, 2018
Date of Tested: Sep. 29 2018~ Oct. 05 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15 Subpart C	PASS

Prepared By:



Chris chen
Engineer Project Associate

Checked By:



Shawn Wen
Laboratory Leader

Approved By:



Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with 558074 D01 DTS Meas Guidance v04, 414788 D01 Radiated Test Site v01, FCC CFR 47 Part 2, FCC CFR 47 Part 15 ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4338.01) Shenzhen STS Test Services Co., Ltd. has been assessed and proved to be in compliance with A2LA. CNAS (Registration No.: L7649) Shenzhen STS Test Services Co., Ltd. has been assessed and proved to be in compliance with CNAS. FCC (FCC Designation No.: 625569) Shenzhen STS Test Services Co., Ltd. has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules IC(Company No.: 12108A) Shenzhen STS Test Services Co., Ltd. has been registered and fully described in a report filed with Industry Canada. The Company Number is 12108A.
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

Note 2: The test anechoic chamber in Shenzhen STS Test Services Co., Ltd. had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	±2.88dB
2	Conducted Emission (150KHz-30MHz)	±2.67dB
3	RF power,conducted	±0.71dB
4	Spurious emissions,conducted	±0.63dB
5	All emissions,radiated (9KHz-30MHz)	±3.02dB
6	All emissions,radiated (30MHz-200MHz)	±3.80dB
7	All emissions,radiated (200MHz-1000MHz)	±3.97dB
8	All emissions,radiated(>1G)	±3.03dB



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Portable Floor Luminaire For Indoor And Outdoor Use	
EUT Description	The EUT is a Portable Floor Luminaire For Indoor And Outdoor Use	
Model	EDISON THE GIANT	
Product Description (Bluetooth)	Operation Frequency	2402 MHz ~ 2480 MHz
	Modulation Type	Data Rate
	GFSK	1Mbps
Rated Input	AC100-240V~, 50/60 Hz,12W	
Bluetooth Version	BLE 4.0	
Hardware Version	UA287S-BLE-V1.1	
Software Version	4.0	

5.2. MAXIMUM OUTPUT POWER

Frequency Range (MHz)	Number of Transmit Chains (NTX)	Bluetooth Mode	Frequency (MHz)	Channel Number	Max PK Conducted Power (dBm)
2400-2483.5	1	BLE	2402-2480	0-39[40]	1.46

5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	11	2424	22	2446	33	2468
01	2404	12	2426	23	2448	34	2470
02	2406	13	2428	24	2450	35	2472
03	2408	14	2430	25	2452	36	2474
04	2410	15	2432	26	2454	37	2476
05	2412	16	2434	27	2456	38	2478
06	2414	17	2436	28	2458	39	2480
07	2416	18	2438	29	2460		
08	2418	19	2440	30	2462		
09	2420	20	2442	31	2464		
10	2422	21	2444	32	2466		



5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 00, CH 19, CH 39	2402MHz, 2440MHz, 2480MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Modulation Type	Transmit Antenna Number	Test Channel		
		CH 00	CH 19	CH 39
GFSK	1	Default	Default	Default

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2402-2480	Integral Antenna	2

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.7. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BLE	DTS	GFSK	1Mbit/s



5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	PC	DELL	VOSTRO.3800	N/A


I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(cm)	Remarks
1	USB Cable	NO	N/A	100cm	N/A

TEST SETUP

The EUT can work in an engineer mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

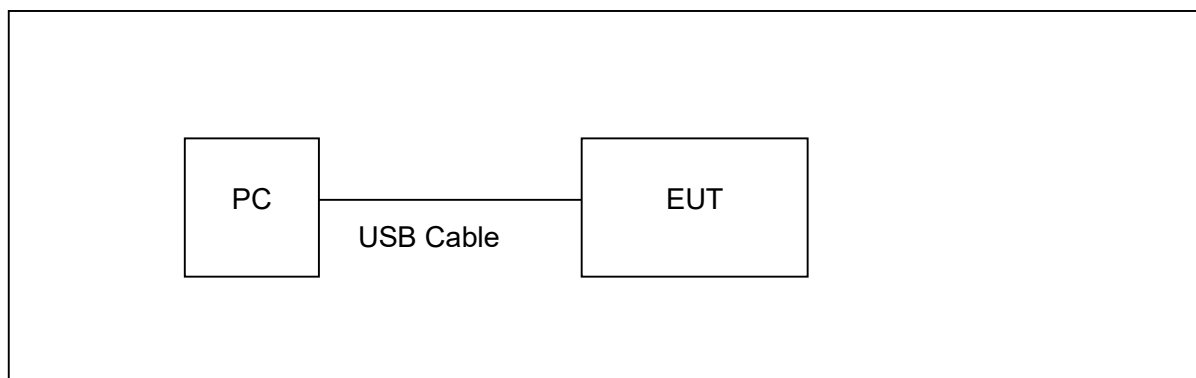



6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
R	Test Receiver	R&S	ESCI	101427	2017.10.15	2019.10.14
R	LISN	R&S	ENV216	101242	2017.10.15	2019.10.14
R	Conduction Cable	EM	C01	N/A	2017.10.18	2019.10.14
R	Temperature & Humidity	Mieo	HH660	N/A	2017.10.15	2019.10.14
Radiated Emissions						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
R	EMI Test Receiver	R&S	ESCI	102086	2017.10.15	2019.10.14
R	Bilog Antenna	TESEQ	CBL6111D	34678	2017.10.30	2018.10.29
R	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2017.10.27	2018.10.26
R	SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	N/A	2017.03.11	2019.03.10
R	Temperature & Humidity	HH660	Mieo	N/A	2017.10.15	2019.10.14
R	Temperature & Humidity	HH660	Mieo	N/A	2017.10.15	2019.10.14
R	Pre-Amplifier (0.1M-3GHz)	EM	EM330	60538	2017.10.28	2018.10.27
R	Pre Amplifier (1G-26.5GHz)	Agilent	8449B	60538	2017.10.15	2019.10.14
R	Operational Manual Passive Loop (9K--30MHz)	ETS	6512	00165355	2017.10.18	2019.10.17
R	Low frequency cable	EM	R01	N/A	2017.10.18	2019.10.17
R	Low frequency cable	EM	R06	N/A	2017.10.18	2019.10.17
R	High frequency cable	SCHWARZBECK	R04	N/A	2017.10.18	2019.10.17
R	High frequency cable	SCHWARZBECK	R02	N/A	2017.10.18	2019.10.17
R	Semi-anechoic chamber	Changling	966	N/A	2017.10.15	2019.10.14
R	turn table	EM	SC100_1	60531	N/A	N/A
R	Antenna mast	EM	SC100	N/A	N/A	N/A
R	Max-full Antenna Corp	MF	MFA-440H	N/A	N/A	N/A



R	Low Noise PreAMP_18-40GHz	A-INFO	LNPA_1840G- 50	N/A	2017.03.11	2019.03.10
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
R	USB RF power sensor	DARE	RPR3006 W	15I00041SNO03	2017.10.15	2019.10.14
R	Power Meter	R&S	NRP	100510	2017.10.15	2019.10.14
R	Spectrum Analyzer	Agilent	E4407B	MY50140340	2018.03.08	2019.03.07
R	Signal Analyzer	Agilent	N9020A	MY49100060	2018.03.08	2019.03.07



7. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6dB Bandwidth	KDB 558074 D01 15.247 Meas Guidance v05	8.0
2	Peak Output Power	KDB 558074 D01 15.247 Meas Guidance v05	9.1.3
3	Power Spectral Density	KDB 558074 D01 15.247 Meas Guidance v05	10.2
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 15.247 Meas Guidance v05	11.0
5	Out-of-band emissions in restricted bands	KDB 558074 D01 15.247 Meas Guidance v05	12.1
6	Band-edge	KDB 558074 D01 15.247 Meas Guidance v05	13.3.2
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2



8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP

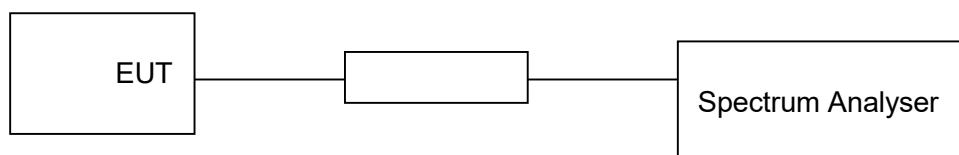

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz


RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/B Minimum VBW (KHz)
GFSK	0.304	1.068	0.2846	28.46	5.46	3.29

Note: Duty Cycle Correction Factor=10log(1/x).

Where: x is Duty Cycle(Linear)

Where: B is On Time

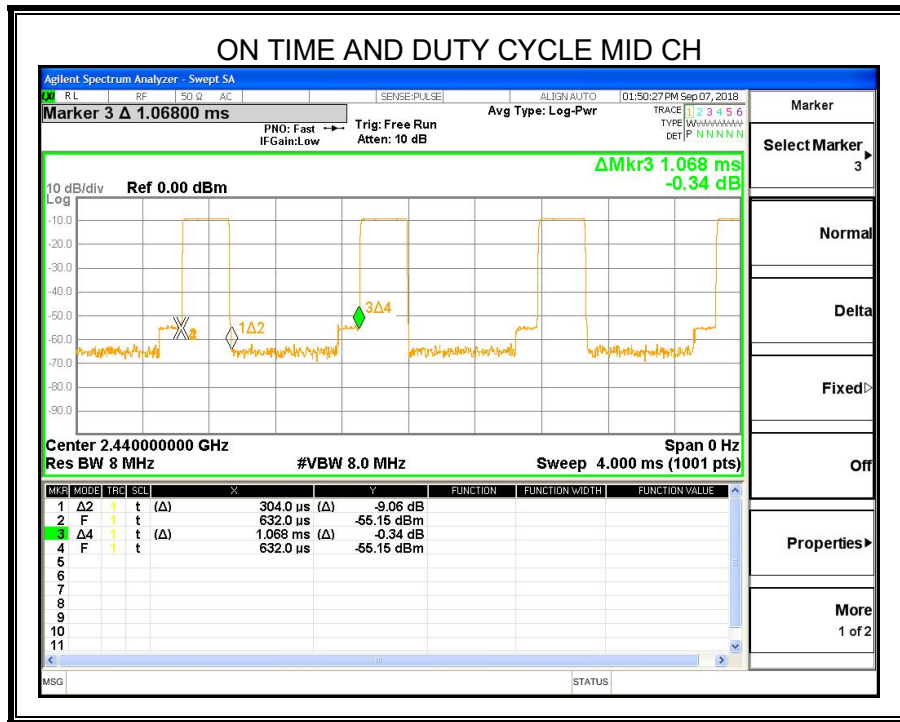



8.2. 6 dB BANDWIDTH & 99% BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(a)(2)	6dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth :100K
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

TEST SETUP






**TEST ENVIRONMENT**

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2402	0.694	500	Pass
Middle	2440	0.699	500	Pass
High	2480	0.694	500	Pass

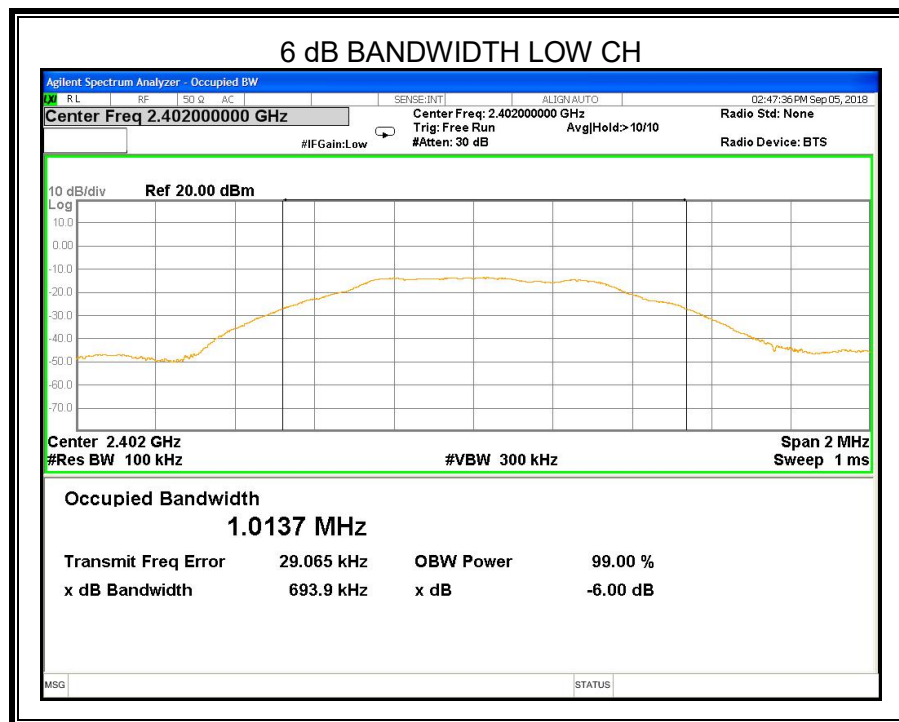

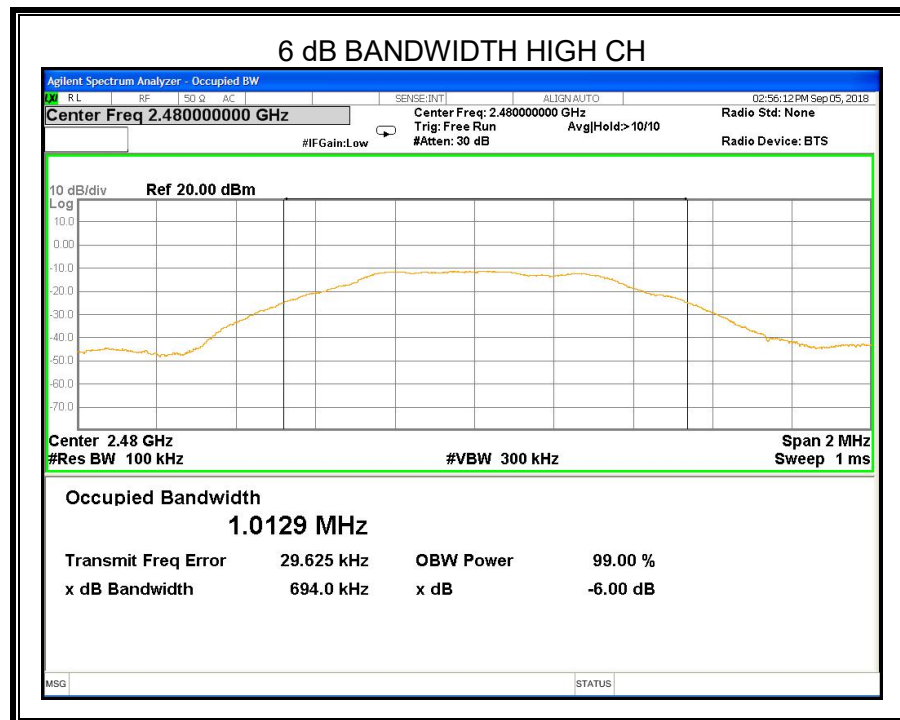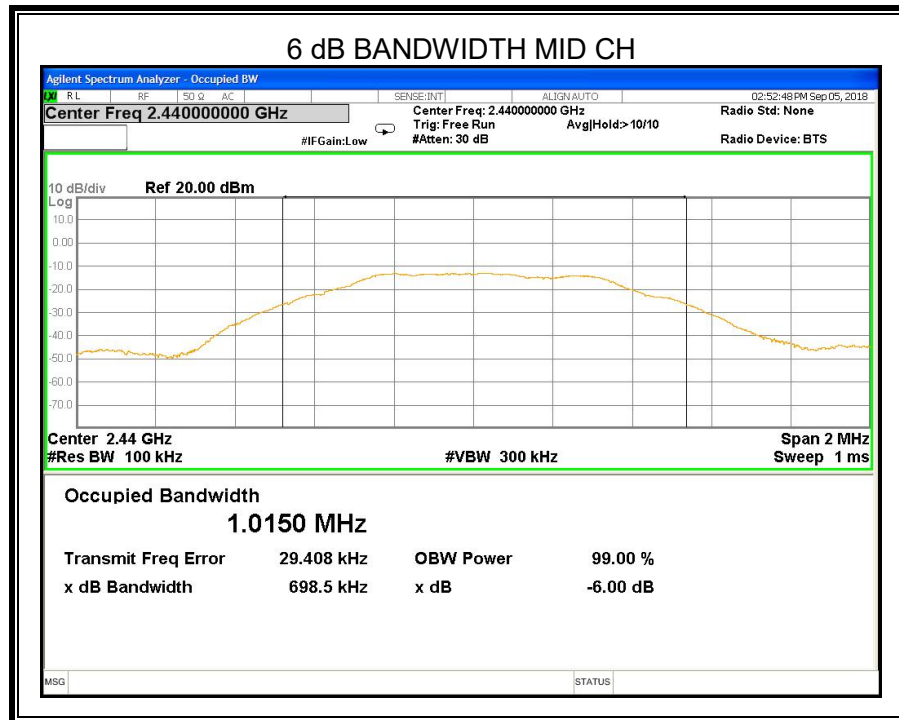



8.3. PEAK CONDUCTED OUTPUT POWER


LIMITS

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5

TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
Measure peak power each channel.

TEST SETUP

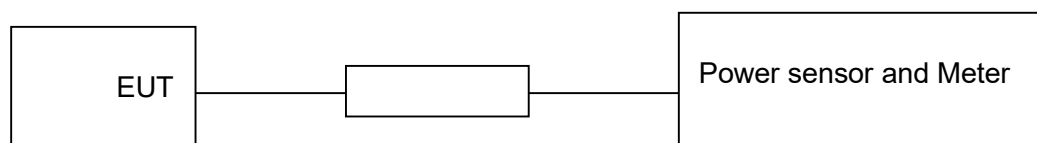

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
Low	2402	1.46	30
Middle	2440	0.68	30
High	2480	0.33	30



8.4. POWER SPECTRAL DENSITY

LIMITS

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3\text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP






**TEST ENVIRONMENT**

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

RESULTS

Test Channel	Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	2402MHz	-16.625	8	PASS
Middle	2440MHz	-16.854	8	PASS
High	2480MHz	-17.203	8	PASS

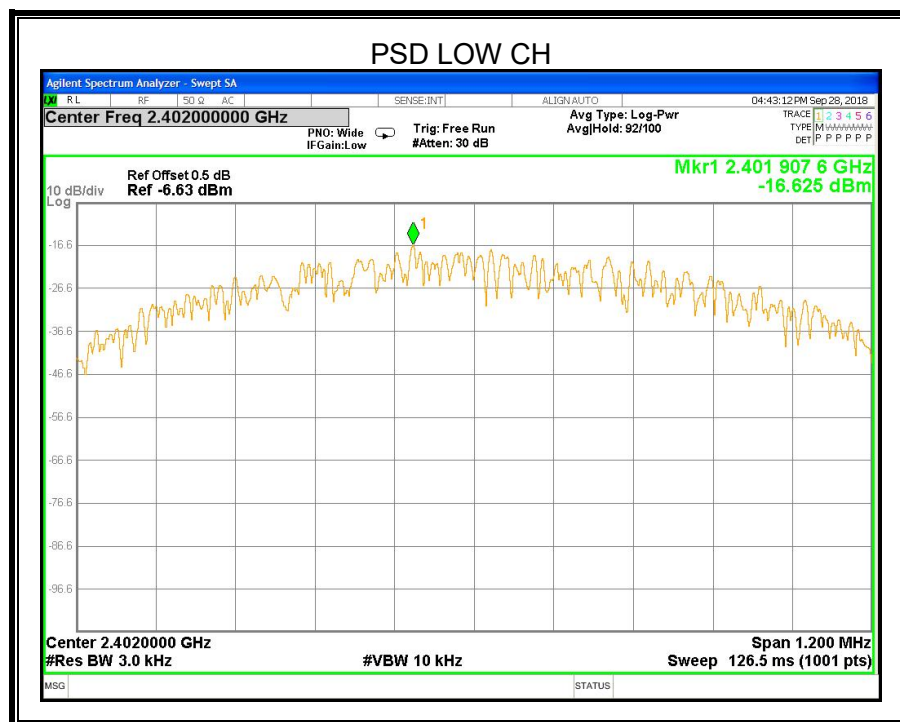

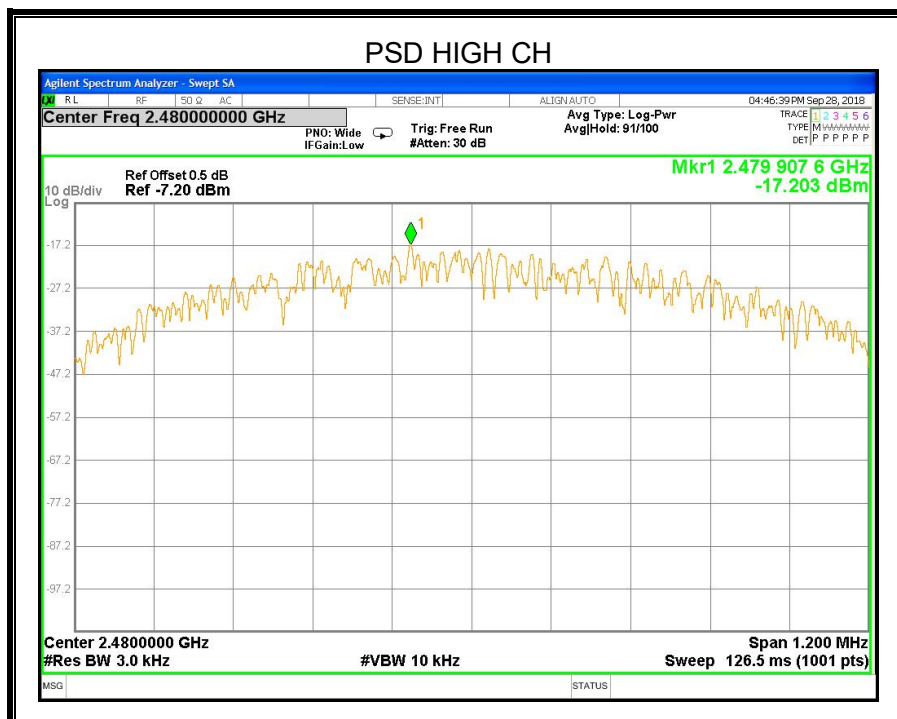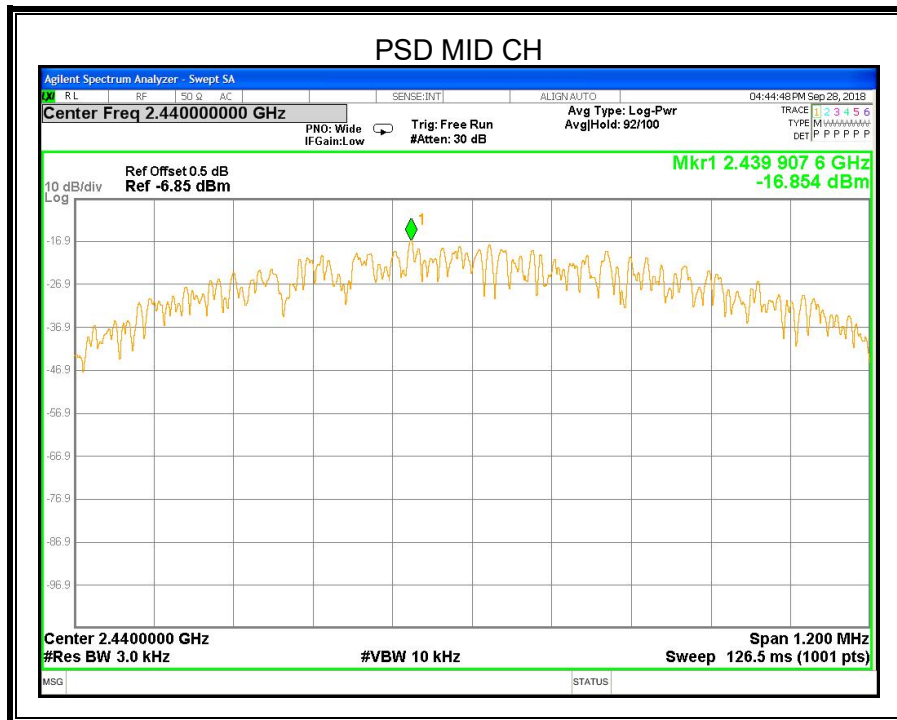



8.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.


Use the peak marker function to determine the maximum amplitude level.


TEST SETUP


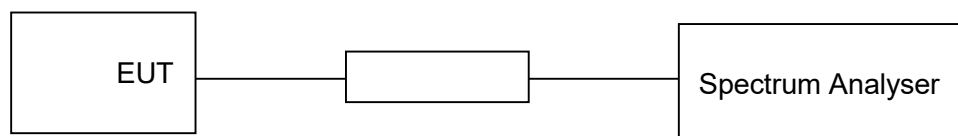



**TEST ENVIRONMENT**

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz

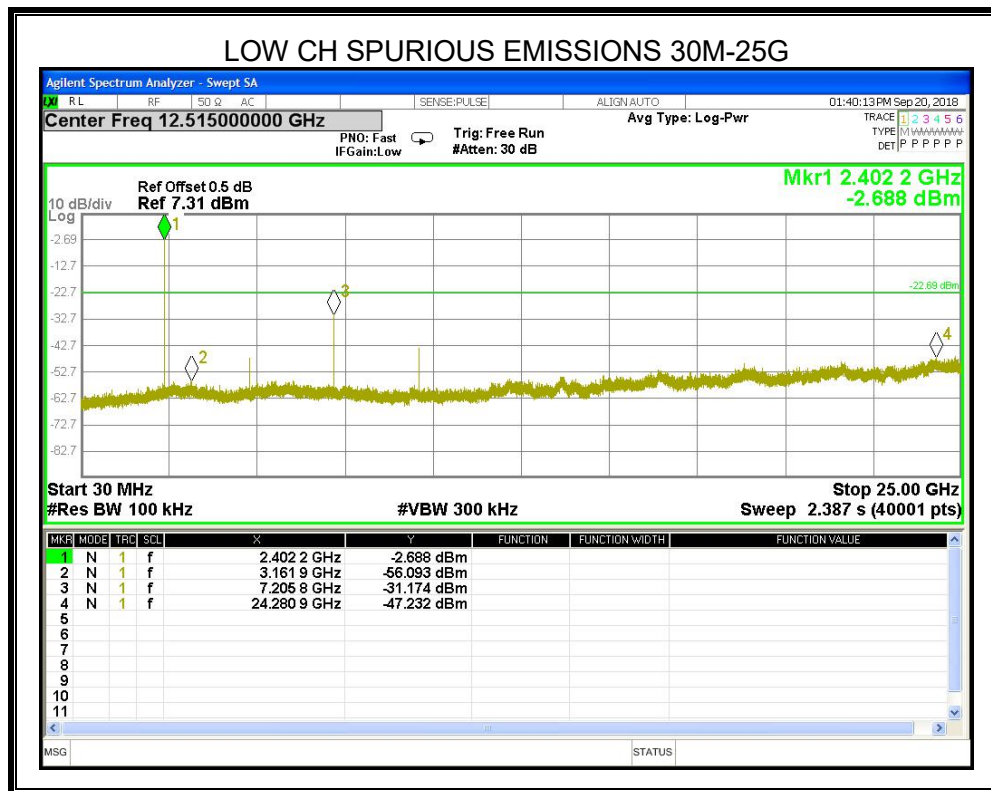RESULTS

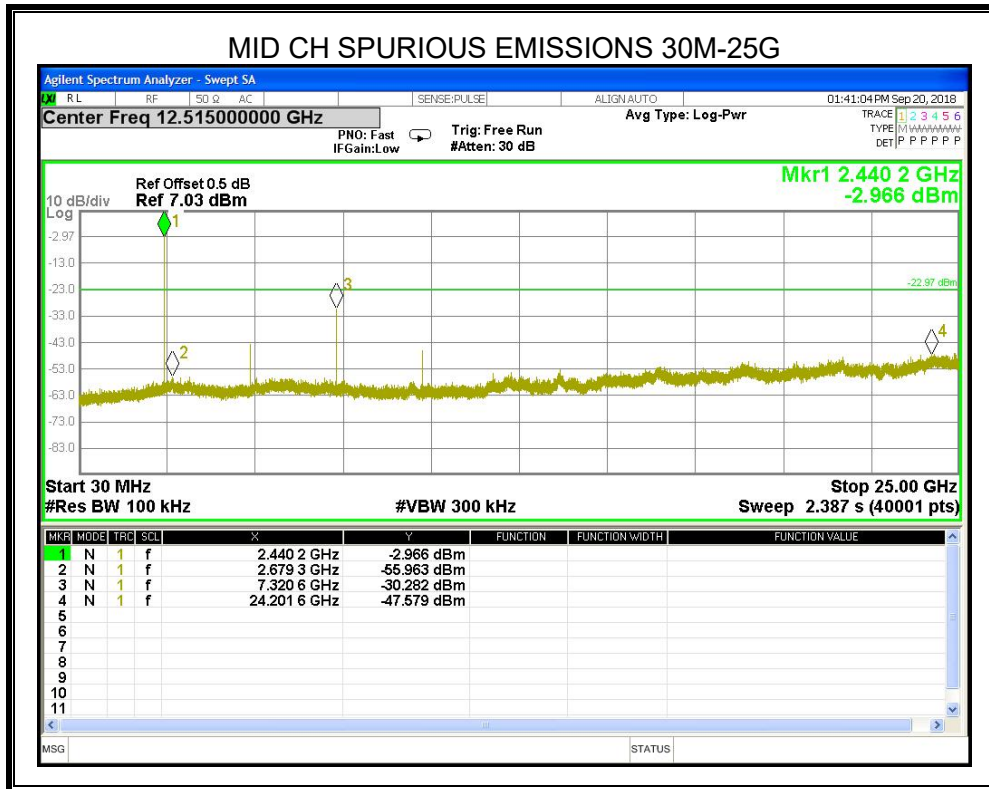

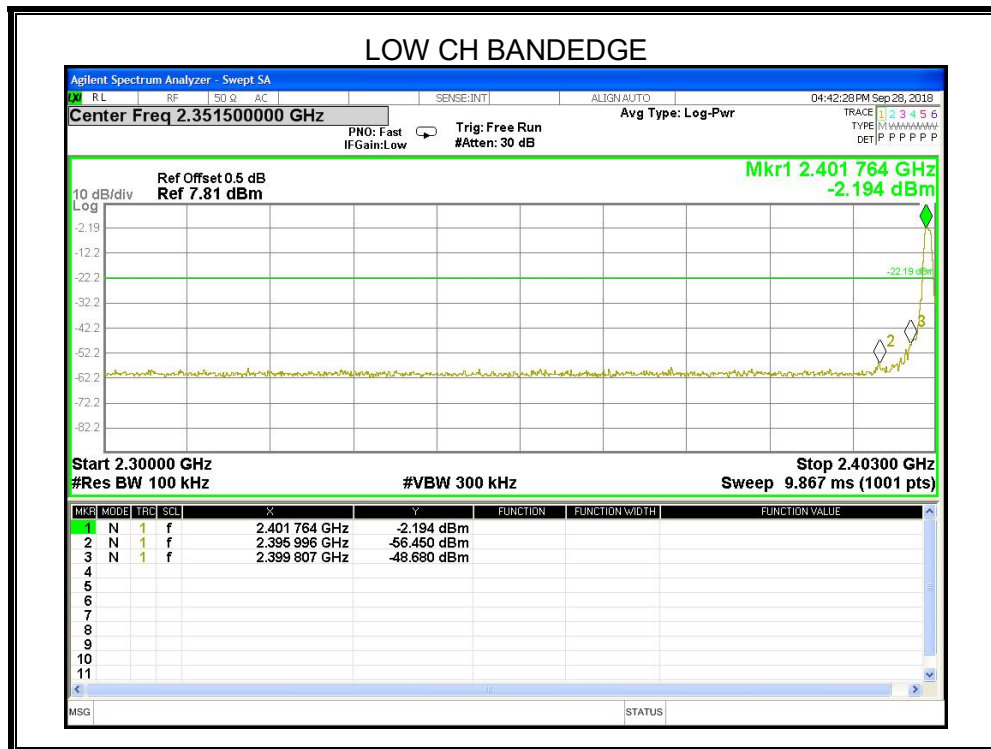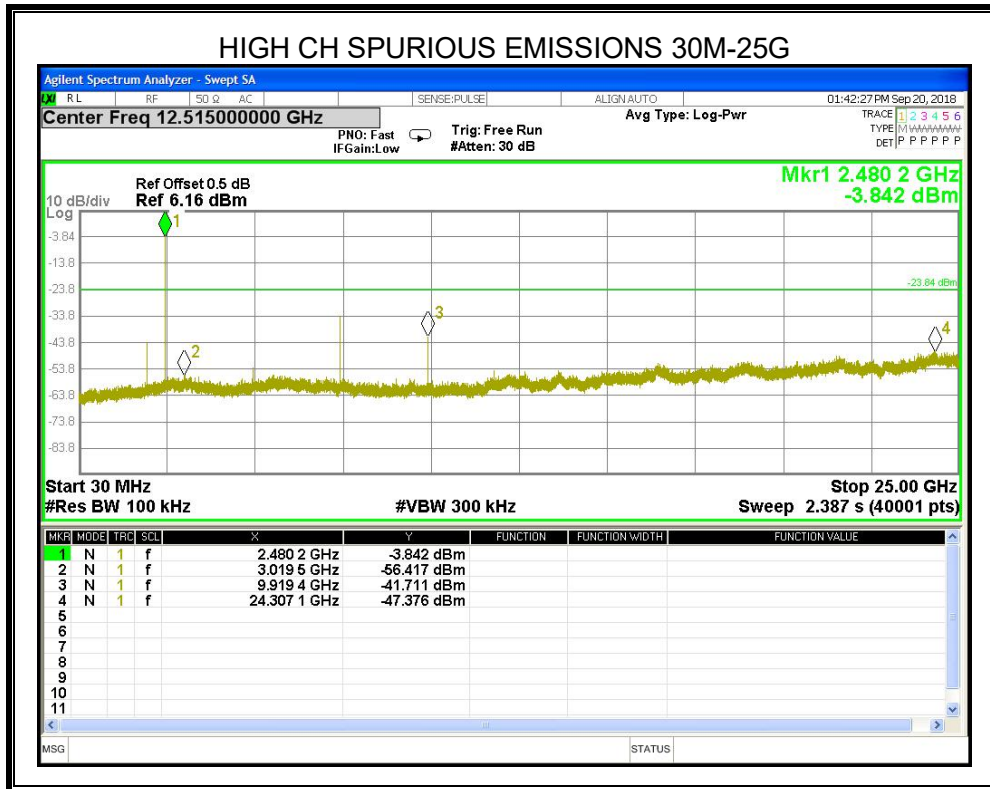

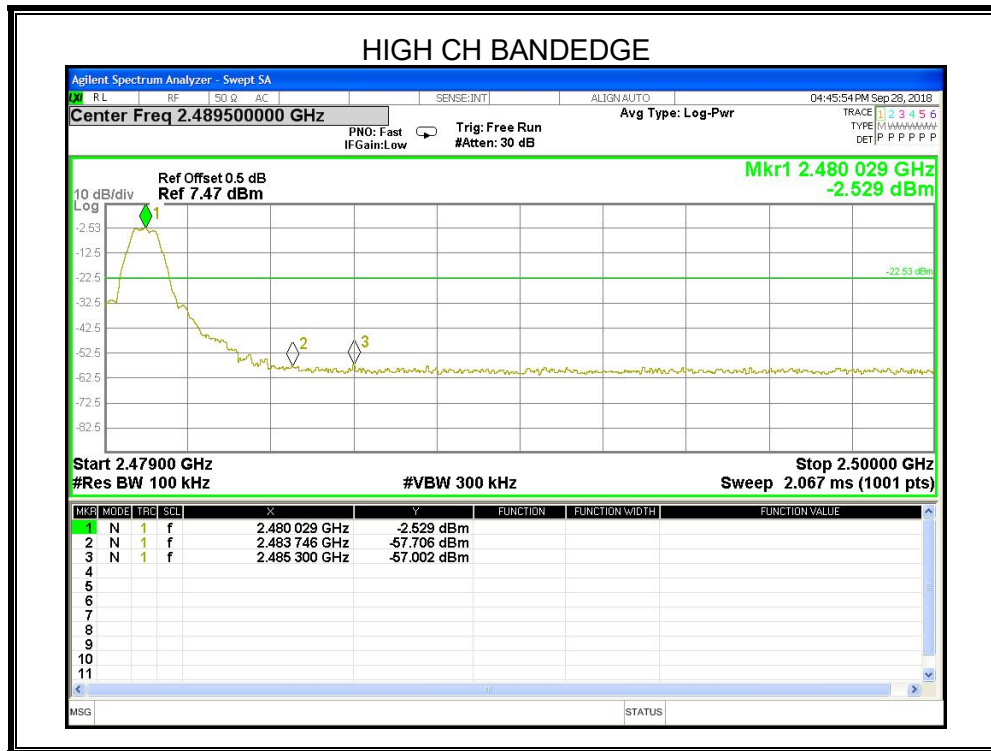



9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

Please refer to FCC §15.205 and §15.209

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note:

(1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Up to 30MHz

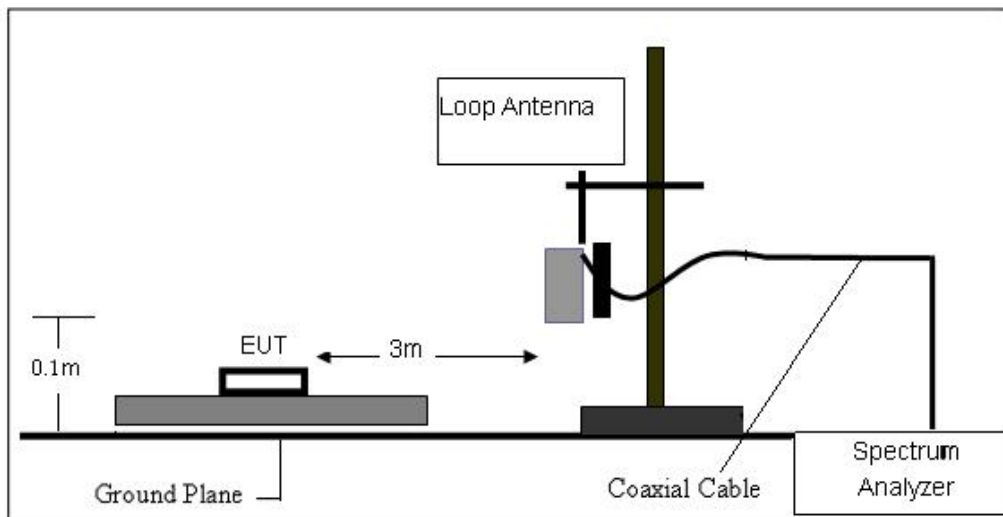


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz	(From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz	(From 0.15MHz to 30MHz)
Sweep	Auto	
Detector	Peak/QP/ Average	
Trace	Max hold	

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.1 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Note: Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.


Up to 1G

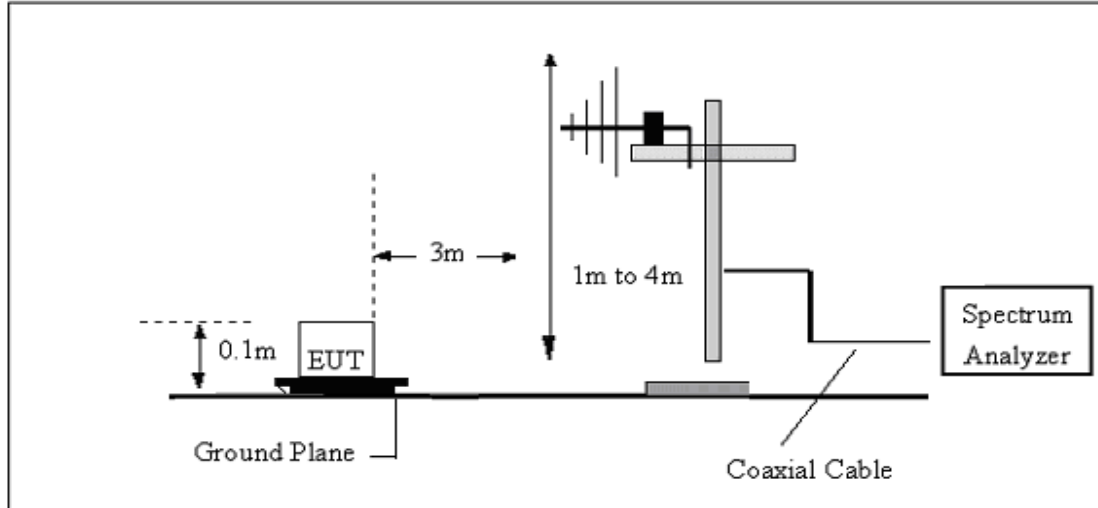

The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.1 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

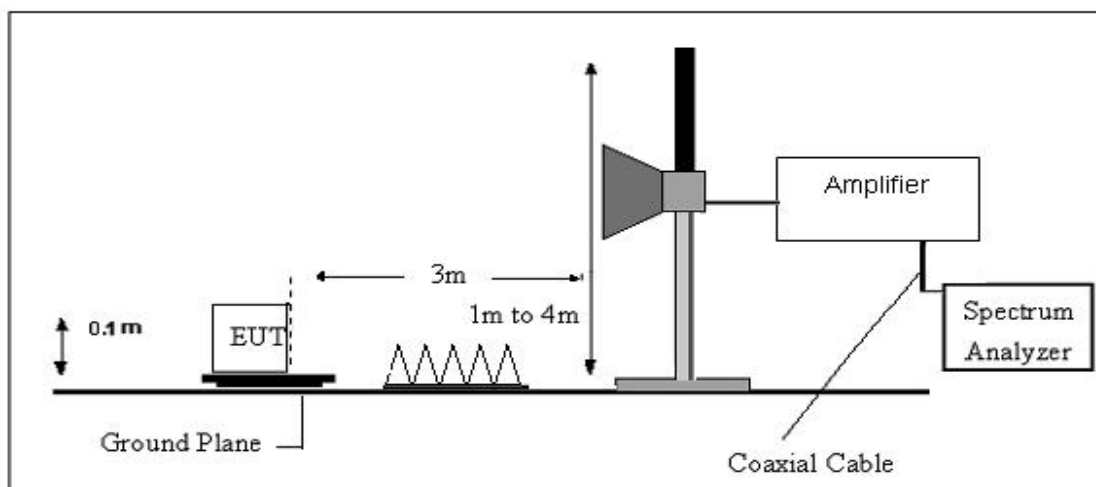


The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.1m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)



X axis, Y axis, Z axis positions:

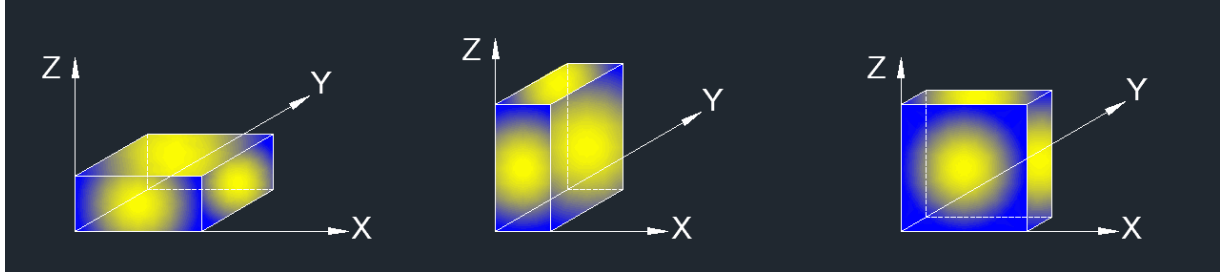

8.The EUT as shown in setup Photo is the worst mode, the report only shown the worst mode data.

TEST ENVIRONMENT


Temperature	25C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz



9.2. RESTRICTED BANDEGE

GFSK

RESTRICTED BANDEGE (LOW CHANNEL, HORIZONTAL)

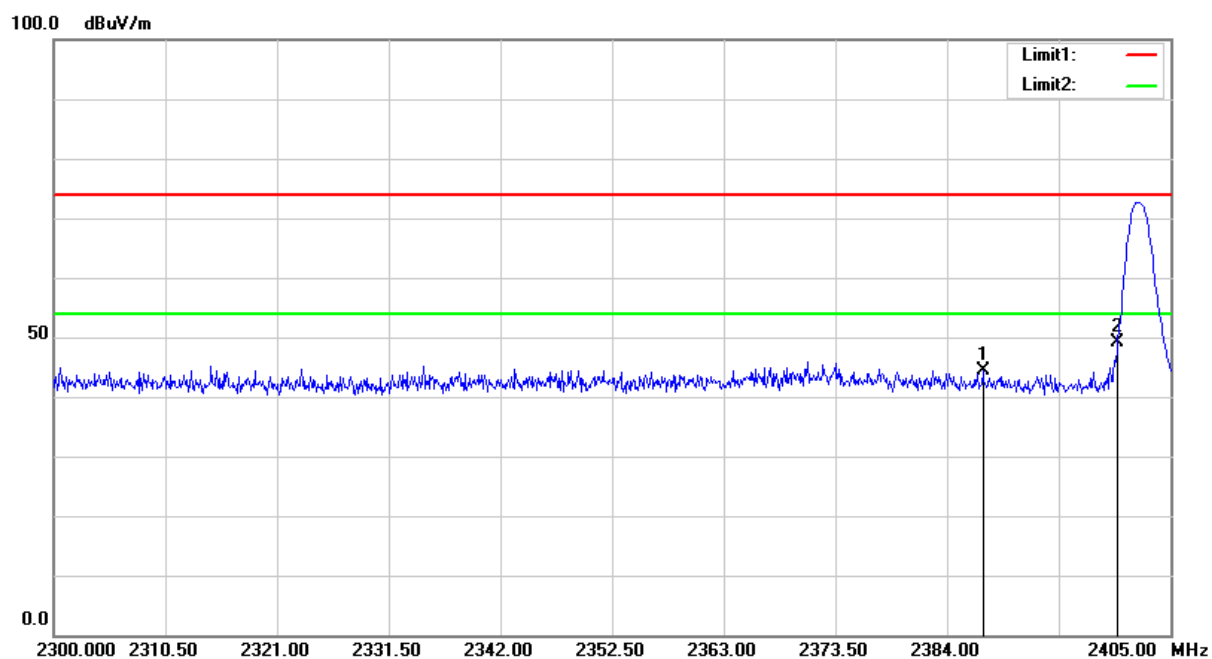


No.	Frequency	Reading level	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2387.360	46.26	-1.77	44.49	74.00	-29.51	peak
2	2400.000	50.92	-1.69	49.23	74.00	-24.77	peak

Note:

a. Measurement = Reading Level + Correction Factor.

b. Peak level is less than the average limit, according to ANSI C63.10-2013 clause 4.1.4.1, the average level does meet the limit requirement.

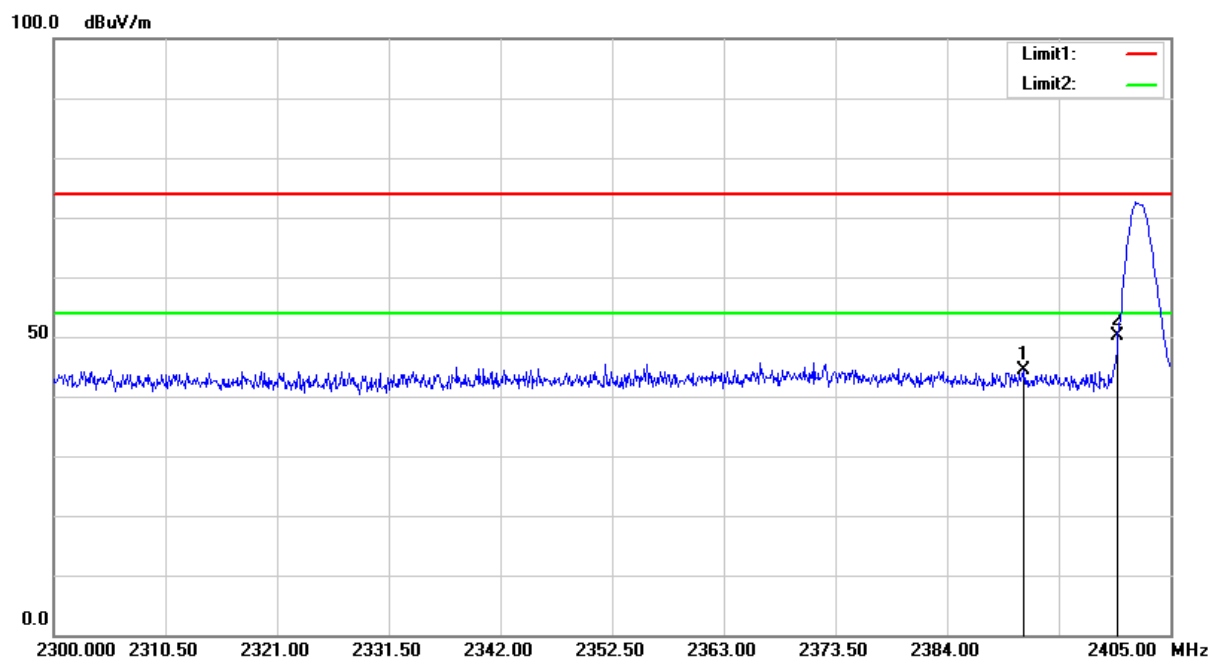
**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading level (dBuV/m)	Correcti on dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2391.245	46.01	-1.74	44.27	74.00	-29.73	peak
2	2400.000	51.82	-1.69	50.13	74.00	-23.87	peak

Note:

a. Measurement = Reading Level + Correction Factor.


b. Peak level is less than the average limit, according to ANSI C63.10-2013 clause 4.1.4.1, the average level does meet the limit requirement.

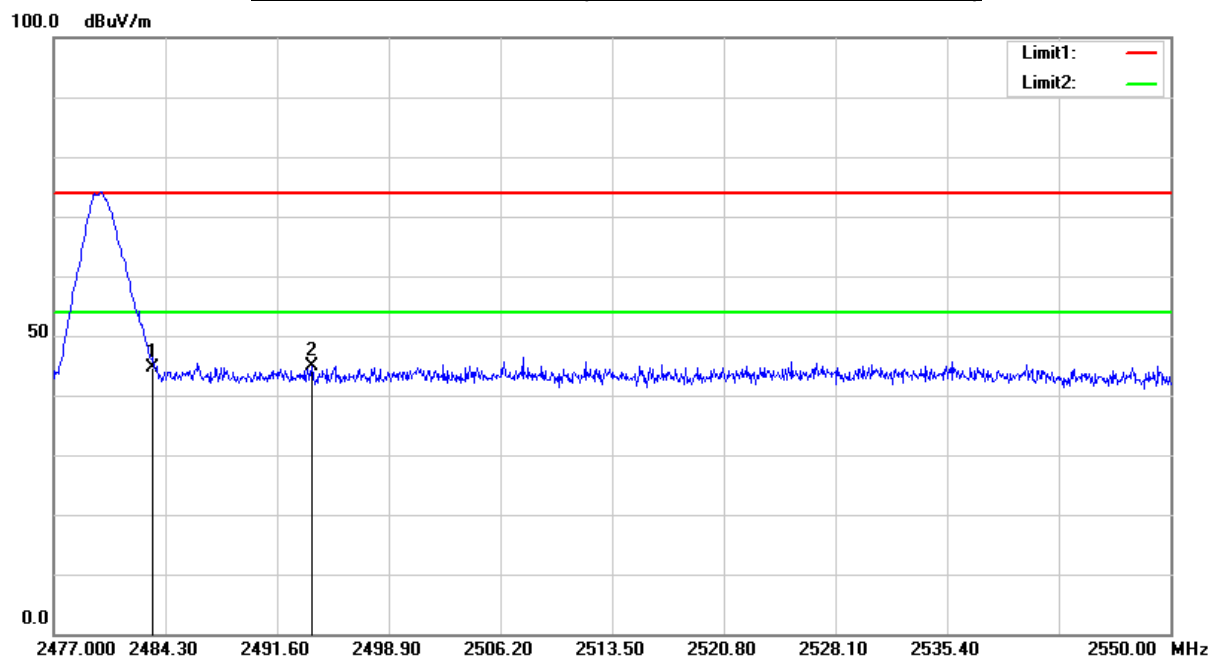**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency	Reading level	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	45.88	-1.20	44.68	74.00	-29.32	peak
2	2493.863	45.98	-1.14	44.84	74.00	-29.16	peak

Note:

- Measurement = Reading Level + Correction Factor.
- Peak level is less than the average limit, according to ANSI C63.10-2013 clause 4.1.4.1, the average level does meet the limit requirement.

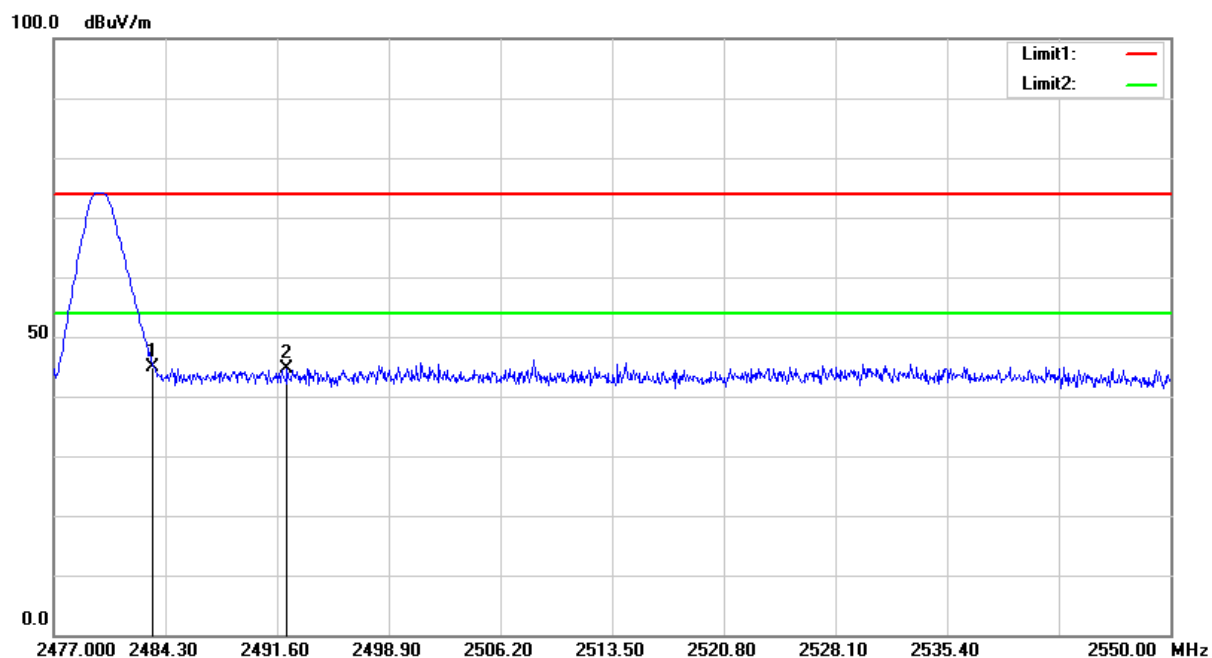**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

No.	Frequency	Reading level	Correcti on	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	46.08	-1.20	44.88	74.00	-29.12	peak
2	2492.257	45.75	-1.16	44.59	74.00	-29.41	peak

Note:

a. Measurement = Reading Level + Correction Factor.


b. Peak level is less than the average limit, according to ANSI C63.10-2013 clause 4.1.4.1, the average level does meet the limit requirement.



9.3. SPURIOUS EMISSIONS 30MHz-1GHz


Note: All the channels had been tested, but only the worst data (channel 00) recorded in the report.

HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL)

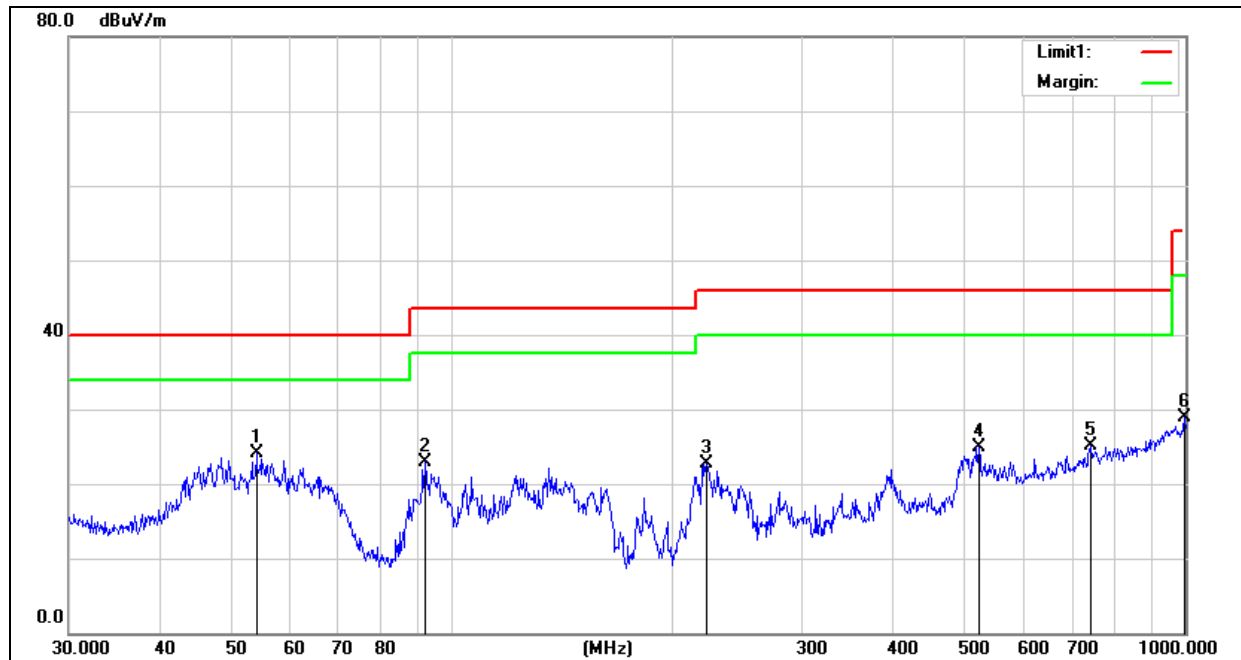

No.	Frequency (MHz)	Reading level (dBuV/m)	Correcti on dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	54.0711	46.67	-22.64	24.03	40.00	-15.97	QP
2	91.8161	42.84	-20.02	22.82	43.50	-20.68	QP
3	222.1698	41.76	-18.98	22.78	46.00	-23.22	QP
4	522.7180	33.54	-8.60	24.94	46.00	-21.06	QP
5	742.2586	28.68	-3.53	25.15	46.00	-20.85	QP
6	996.4995	29.02	-0.09	28.93	54.00	-25.07	QP

Note: Measurement = Reading Level + Correction Factor.

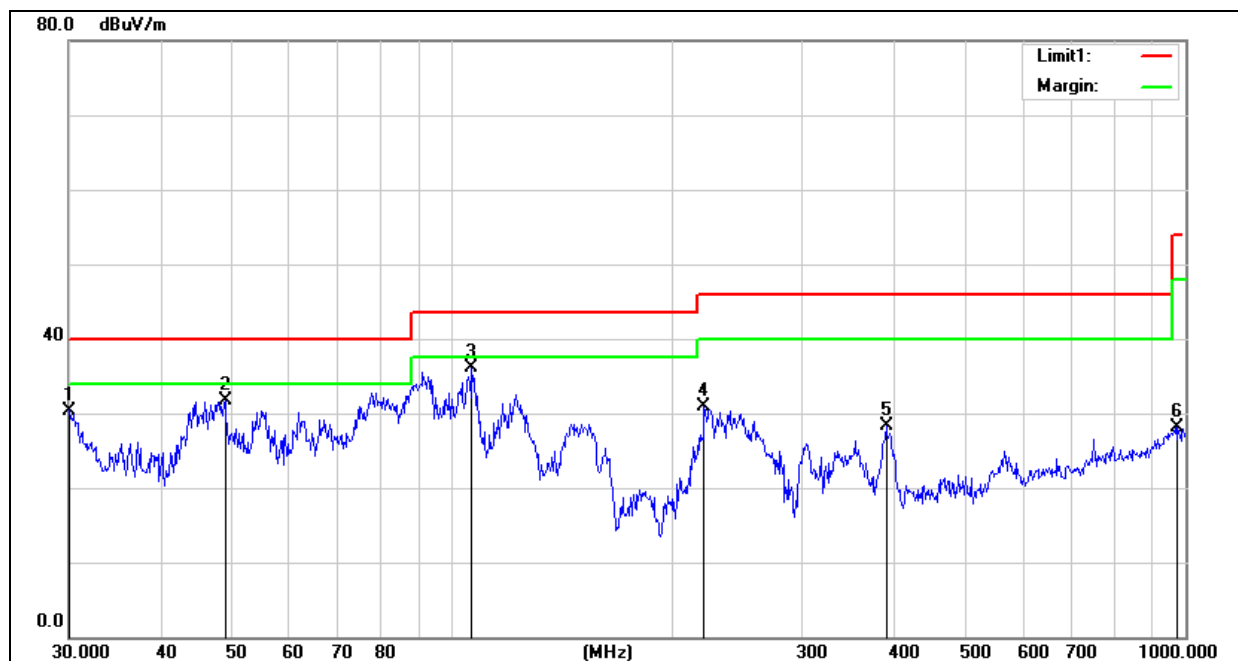**HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)**


No.	Frequency	Reading level	Correcti on	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	30.0000	41.59	-11.19	30.40	40.00	-9.60	QP
2	49.0144	52.77	-20.97	31.80	40.00	-8.20	QP
3	106.3850	54.67	-18.64	36.03	43.50	-7.47	QP
4	220.6170	49.89	-19.08	30.81	46.00	-15.19	QP
5	390.7225	40.09	-11.87	28.22	46.00	-17.78	QP
6	975.7527	28.21	-0.14	28.07	54.00	-25.93	QP

Note: Measurement = Reading Level + Correction Factor.




9.4. SPURIOUS EMISSIONS 1 GHz-25GHz

LOW CHANNEL SPURIOUS EMISSIONS (HORIZONTAL)

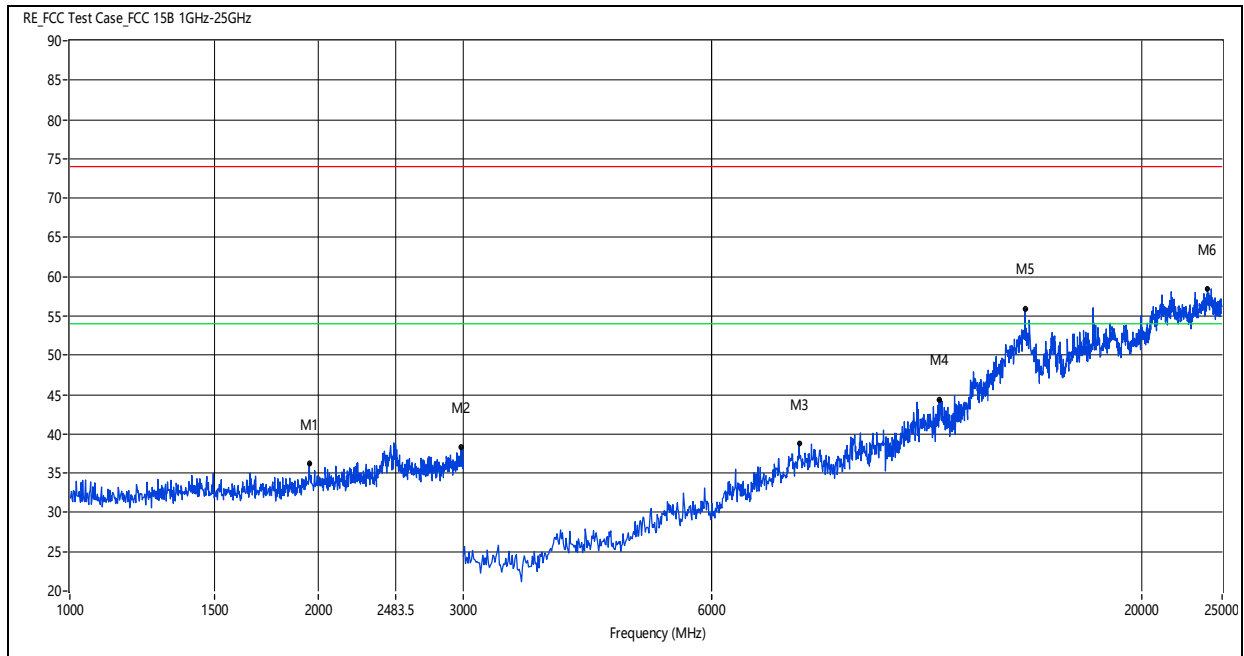


Note: Measurement = Reading Level + Correction Factor.

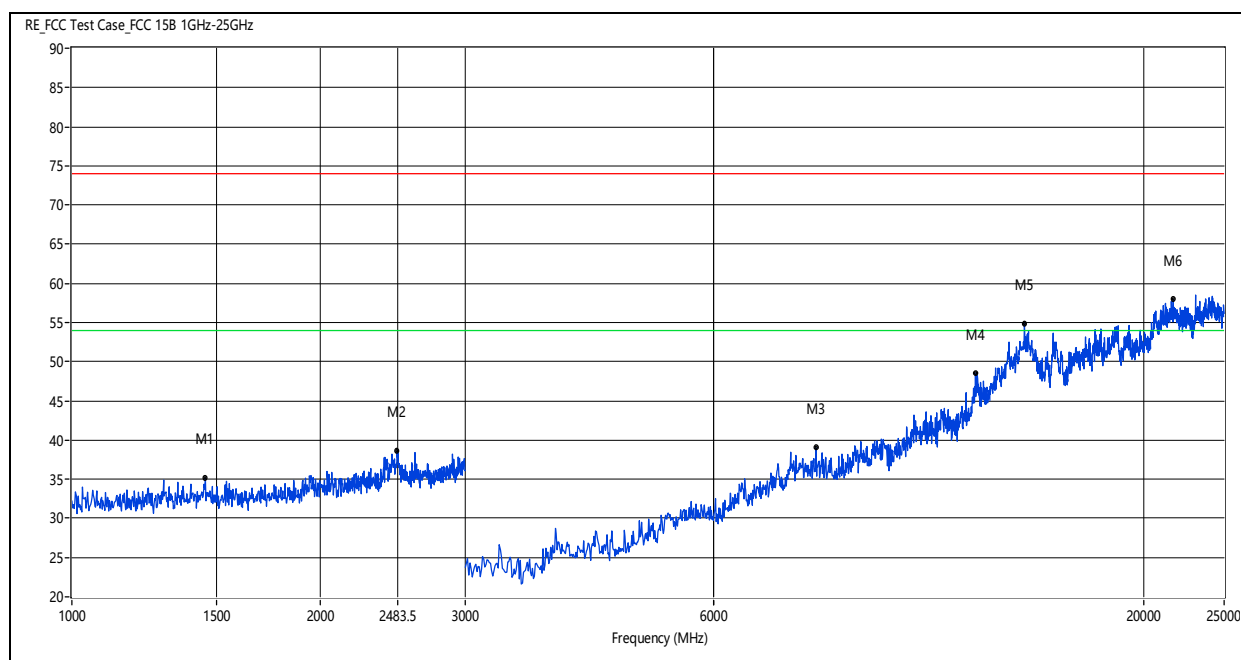**LOW CHANNEL SPURIOUS EMISSIONS (VERTICAL)**


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detect or	Table (o)	Height (cm)	ANT	Verdict
1	1452.000	35.18	-4.11	74.0	-38.82	Peak	15.00	100	V	Pass
2	2480.000	38.64	1.37	74.0	-35.36	Peak	14.00	100	V	Pass
3	8000.000	39.01	10.93	74.0	-34.99	Peak	6.00	100	V	Pass
4	12480.000	48.53	19.51	74.0	-25.47	Peak	15.00	100	V	Pass
5**	14308.000	44.26	24.03	54.0	-9.74	Av	1.00	100	V	Pass
5	14308.000	54.87	24.03	74.0	-19.13	Peak	1.00	100	V	Pass
6**	21688.001	46.85	23.96	54.0	-7.15	Av	12.00	100	V	Pass
6	21688.001	57.96	23.96	74.0	-16.04	Peak	12.00	100	V	Pass

Note: Measurement = Reading Level + Correction Factor.

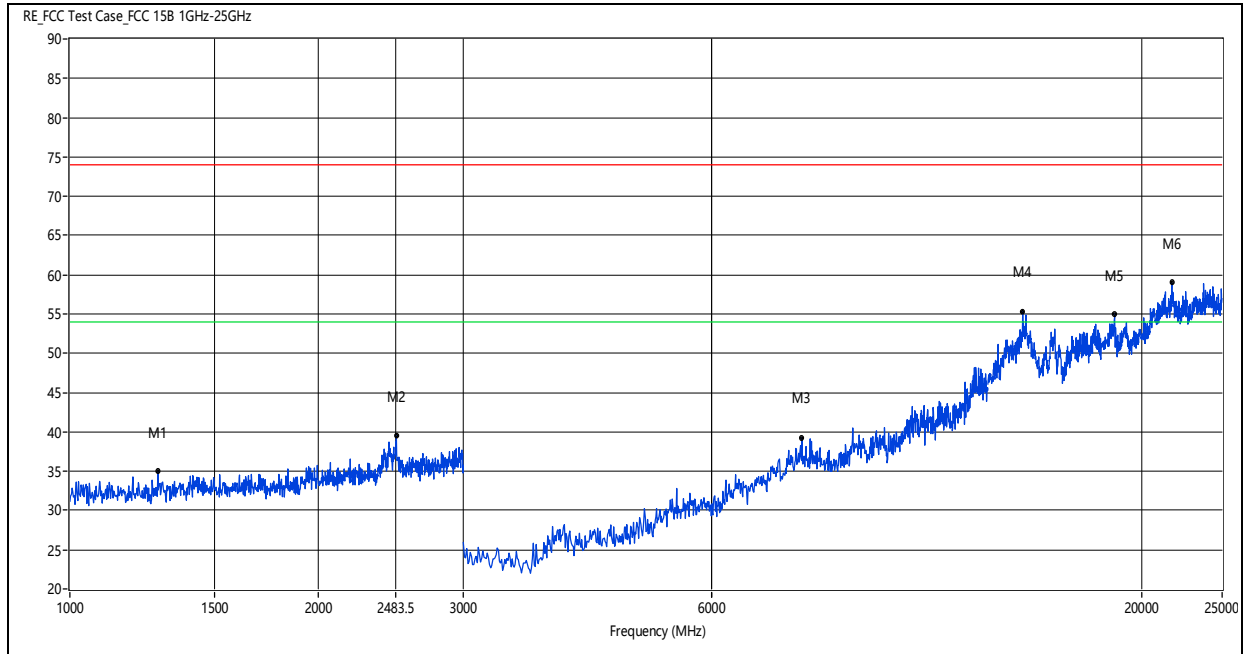**MID CHANNEL SPURIOUS EMISSIONS (HORIZONTAL)**


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1278.000	35.04	-4.46	74.0	-38.96	Peak	14.00	100	H	Pass
2	2490.000	39.52	1.59	74.0	-34.48	Peak	8.00	100	H	Pass
3	7730.000	39.29	10.03	74.0	-34.71	Peak	4.00	100	H	Pass
4**	14320.000	44.28	24.92	54.0	-9.72	Av	10.00	100	H	Pass
4	14320.000	55.36	24.92	74.0	-18.64	Peak	10.00	100	H	Pass
5**	18520.001	43.10	22.52	54.0	-10.90	Av	4.00	100	H	Pass
5	18520.001	55.00	22.52	74.0	-19.00	Peak	4.00	100	H	Pass
6**	21724.000	47.07	23.95	54.0	-6.93	Av	11.00	100	H	Pass
6	21724.000	59.02	23.95	74.0	-14.98	Peak	11.00	100	H	Pass

Note: Measurement = Reading Level + Correction Factor.

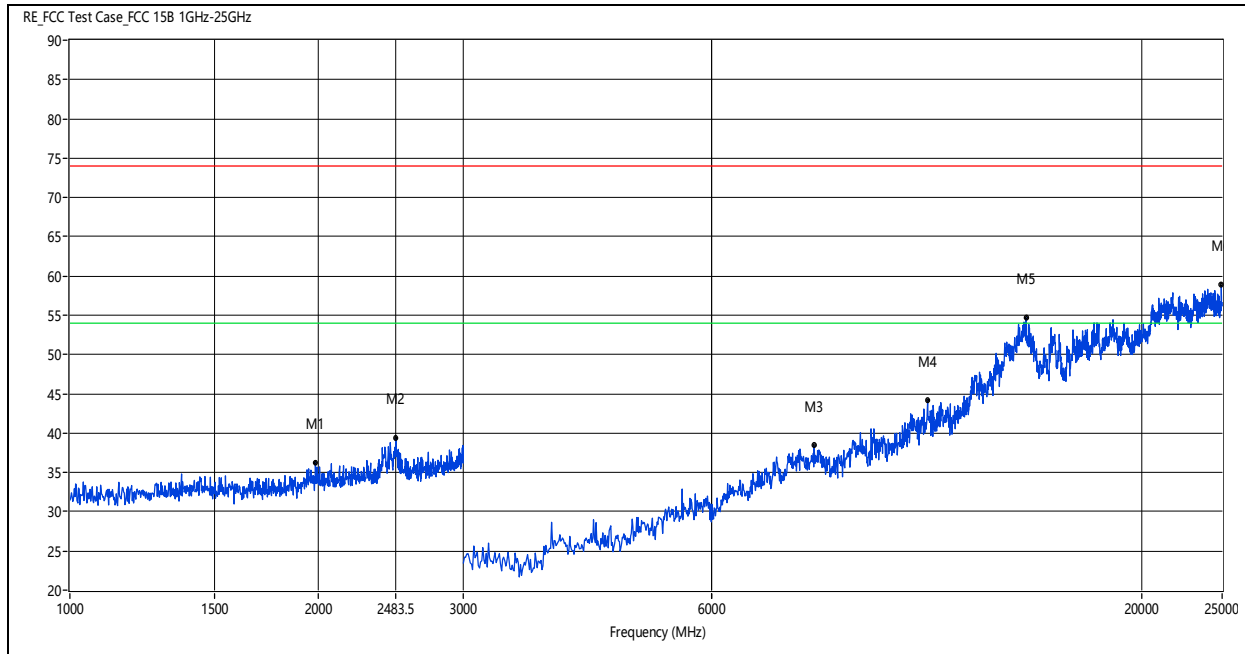**MID CHANNEL SPURIOUS EMISSIONS (VERTICAL)**


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detect or	Table (o)	Height (cm)	ANT	Verdict
1	1986.000	36.21	-2.33	74.0	-37.79	Peak	6.00	100	V	Pass
2	2486.000	39.31	1.50	74.0	-34.69	Peak	12.00	100	V	Pass
3	8000.000	38.40	10.93	74.0	-35.60	Peak	10.00	100	V	Pass
4	10980.000	44.15	15.71	74.0	-29.85	Peak	8.00	100	V	Pass
5**	14464.000	43.28	24.63	54.0	-10.72	Av	13.00	100	V	Pass
5	14464.000	54.70	24.63	74.0	-19.30	Peak	13.00	100	V	Pass
6**	24952.001	47.61	23.01	54.0	-6.39	Av	13.00	100	V	Pass
6	24952.001	58.86	23.01	74.0	-15.14	Peak	13.00	100	V	Pass

Note: Measurement = Reading Level + Correction Factor.

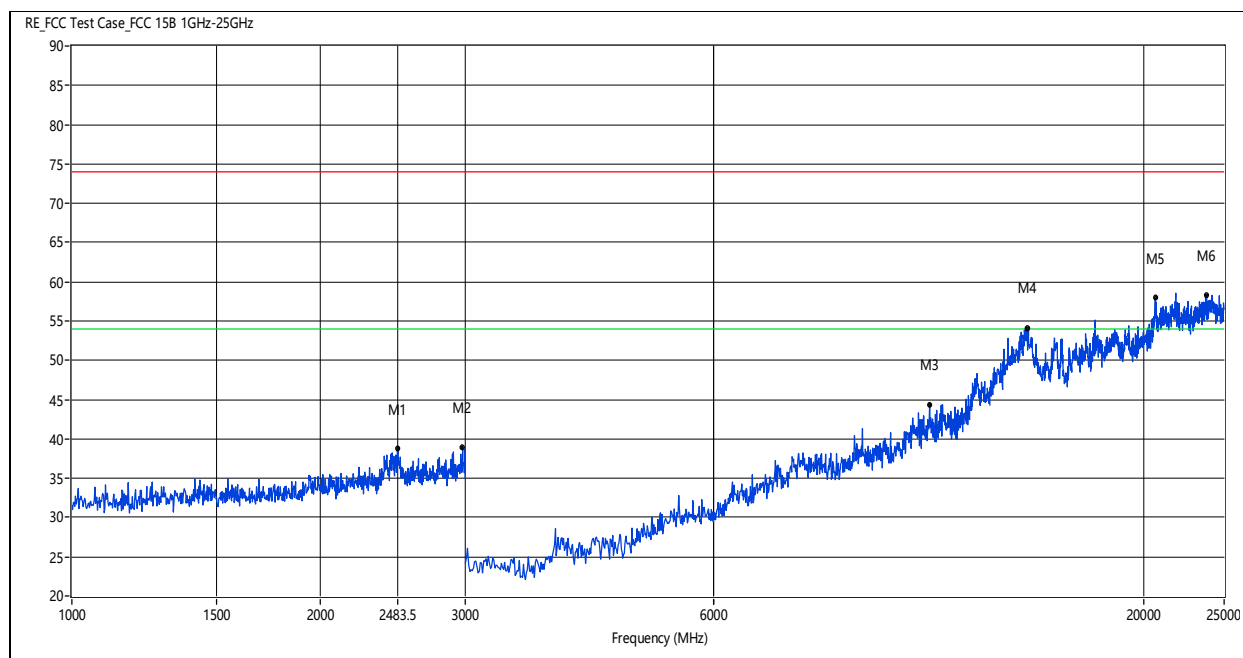**HIGH CHANNEL SPURIOUS EMISSIONS (HORIZONTAL)**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2486.000	38.75	1.50	74.0	-35.25	Peak	15.00	100	H	Pass
2	2978.000	39.00	2.17	74.0	-35.00	Peak	13.00	100	H	Pass
3	10980.000	44.41	15.71	74.0	-29.59	Peak	7.00	100	H	Pass
4**	14416.000	42.84	25.52	54.0	-11.16	Av	3.00	100	H	Pass
4	14416.000	54.05	25.52	74.0	-19.95	Peak	3.00	100	H	Pass
5**	20632.001	46.33	23.82	54.0	-7.67	Av	9.00	100	H	Pass
5	20632.001	57.96	23.82	74.0	-16.04	Peak	9.00	100	H	Pass
6**	23812.000	47.95	23.37	54.0	-6.05	Av	6.00	100	H	Pass
6	23812.000	58.37	23.37	74.0	-15.63	Peak	6.00	100	H	Pass

Note: Measurement = Reading Level + Correction Factor.

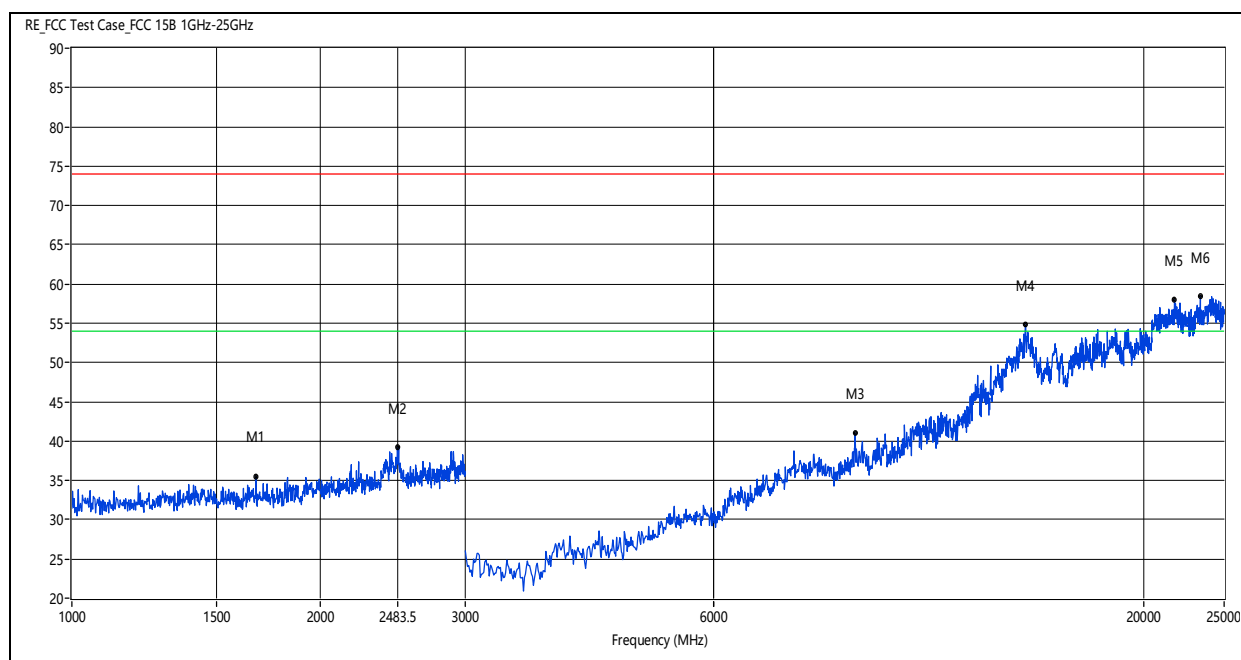**HIGH CHANNEL SPURIOUS EMISSIONS (VERTICAL)**

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detect or	Table (o)	Height (cm)	ANT	Verdict
1	1672.000	35.52	-3.90	74.0	-38.48	Peak	14.00	100	V	Pass
2	2482.000	39.18	1.41	74.0	-34.82	Peak	3.00	100	V	Pass
3	8920.001	41.01	12.66	74.0	-32.99	Peak	11.00	100	V	Pass
4**	14368.000	43.51	24.92	54.0	-10.49	Av	10.00	100	V	Pass
4	14368.000	54.79	24.92	74.0	-19.21	Peak	10.00	100	V	Pass
5**	21771.999	47.66	23.94	54.0	-6.34	Av	12.00	100	V	Pass
5	21771.999	58.00	23.94	74.0	-16.00	Peak	12.00	100	V	Pass
6**	23403.999	47.59	23.50	54.0	-6.41	Av	3.00	100	V	Pass
6	23403.999	58.43	23.50	74.0	-15.57	Peak	3.00	100	V	Pass


Note: Measurement = Reading Level + Correction Factor.



9.5. SPURIOUS EMISSIONS UP TO 30M


Note: All the channels had been tested, but only the worst data (channel 00) recorded in the report.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

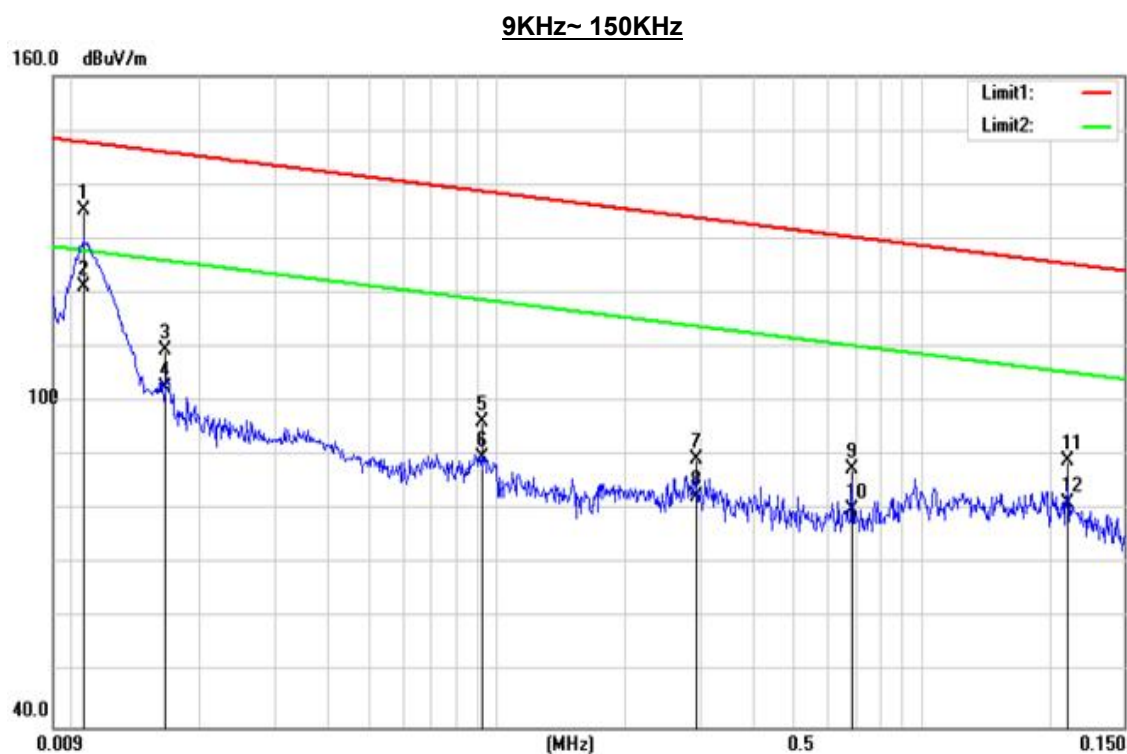


No.	Frequency (MHz)	Reading level (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0106	103.17	31.97	135.14	147.83	-12.69	QP
2	0.0106	89.21	31.97	121.18	127.83	-6.65	AVG
3	0.0165	79.51	29.97	109.48	145.97	-36.49	QP
4	0.0165	72.64	29.97	102.61	125.97	-23.36	AVG
5	0.0922	74.32	21.91	96.23	138.73	-42.50	QP
6	0.0922	67.84	21.91	89.75	118.73	-28.98	AVG
7	0.2937	66.57	22.89	89.46	133.86	-44.40	QP
8	0.2937	59.48	22.89	82.37	113.86	-31.49	AVG
9	0.6860	65.67	21.78	87.45	130.29	-42.84	QP
10	0.6860	58.14	21.78	79.92	110.29	-30.37	AVG
11	2.2050	67.88	21.10	88.98	125.38	-36.40	QP
12	2.2050	60.26	21.10	81.36	105.38	-24.02	AVG

Note: Measurement = Reading Level + Correction Factor.

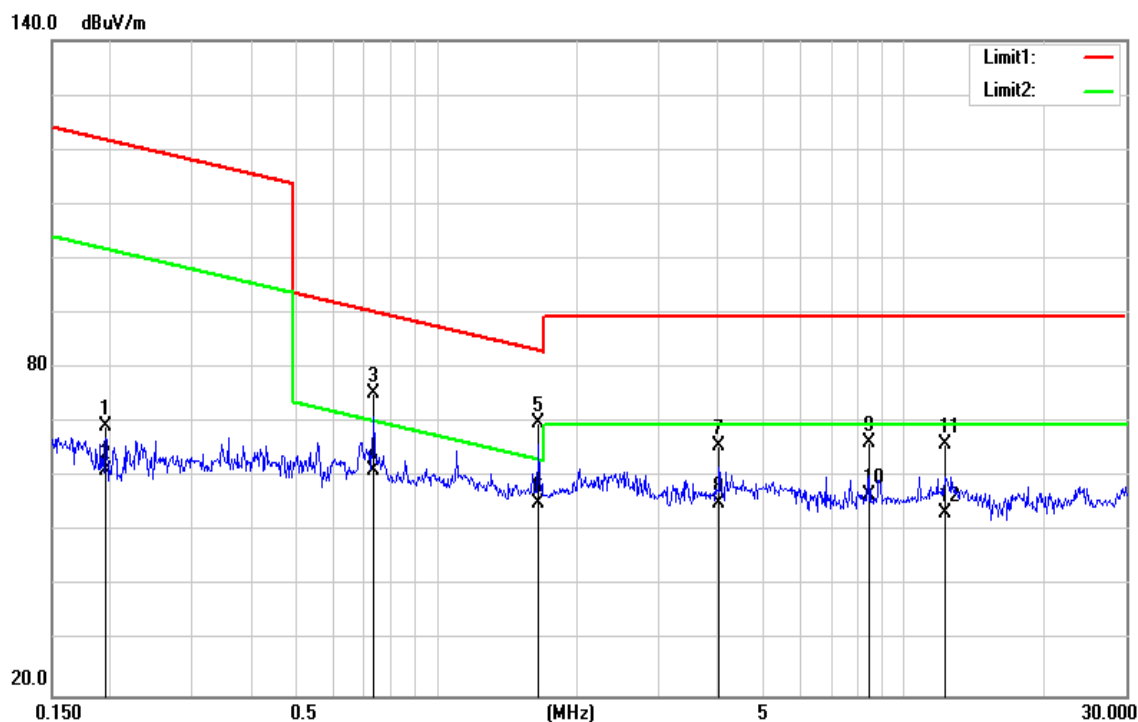150KHz ~ 30MHz


No.	Frequency (MHz)	Reading level (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1955	46.99	22.30	69.29	121.78	-52.49	QP
2	0.1955	39.05	22.30	61.35	101.78	-40.43	AVG
3	0.7310	53.51	21.76	75.27	90.33	-15.06	QP
4	0.7310	39.42	21.76	61.18	70.33	-9.15	AVG
5	1.6532	48.44	21.50	69.94	83.24	-13.30	QP
6	1.6532	33.87	21.50	55.37	63.24	-7.87	AVG
7	4.0274	45.31	20.55	65.86	89.54	-23.68	QP
8	4.0274	34.60	20.55	55.15	69.54	-14.39	AVG
9	8.4561	49.30	17.17	66.47	89.54	-23.07	QP
10	8.4561	39.58	17.17	56.75	69.54	-12.79	AVG
11	12.2530	48.76	17.23	65.99	89.54	-23.55	QP
12	12.2530	36.34	17.23	53.57	69.54	-15.97	AVG

Note: Measurement = Reading Level + Correction Factor.

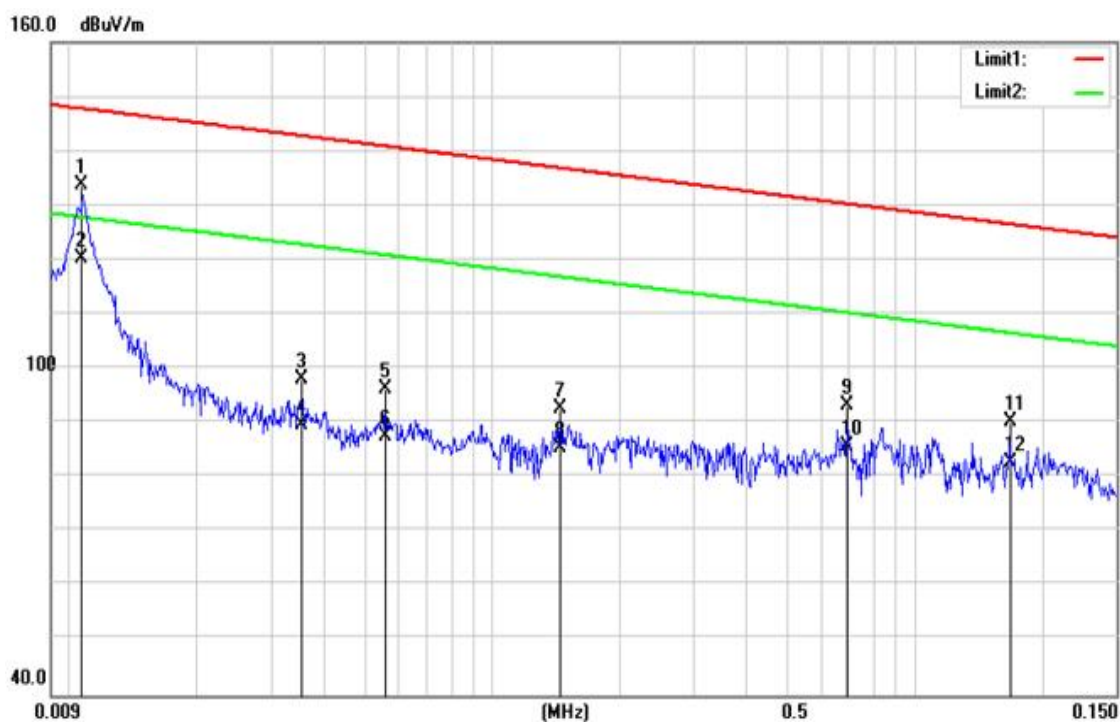**SPSURIUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)****9KHz~ 150KHz**

No.	Frequency (MHz)	Reading level (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0106	101.84	31.97	133.81	147.83	-14.02	QP
2	0.0106	88.40	31.97	120.37	127.83	-7.46	AVG
3	0.0352	73.30	24.86	98.16	142.78	-44.62	QP
4	0.0352	64.77	24.86	89.63	122.78	-33.15	AVG
5	0.0558	73.07	23.11	96.18	140.84	-44.66	QP
6	0.0558	64.38	23.11	87.49	120.84	-33.35	AVG
7	0.1446	70.57	22.00	92.57	136.84	-44.27	QP
8	0.1446	63.31	22.00	85.31	116.84	-31.53	AVG
9	0.6900	71.44	21.78	93.22	130.26	-37.04	QP
10	0.6900	64.08	21.78	85.86	110.26	-24.40	AVG
11	1.6780	68.90	21.47	90.37	126.52	-36.15	QP
12	1.6780	61.34	21.47	82.81	106.52	-23.71	AVG

Note: Measurement = Reading Level + Correction Factor.

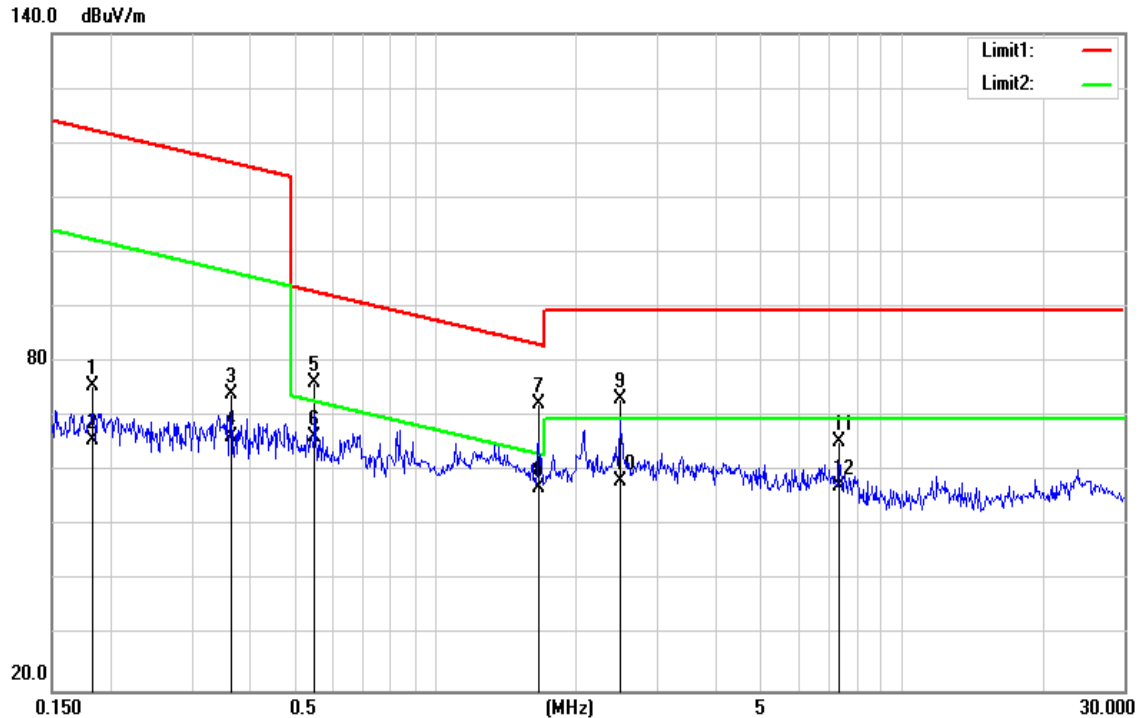150KHz ~ 30MHz

No.	Frequency (MHz)	Reading level (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1833	53.28	22.23	75.51	122.34	-46.83	QP
2	0.1833	43.49	22.23	65.72	102.34	-36.62	AVG
3	0.3634	51.58	22.59	74.17	116.40	-42.23	QP
4	0.3634	43.69	22.59	66.28	96.40	-30.12	AVG
5	0.5493	54.37	21.82	76.19	92.81	-16.62	QP
6	0.5493	44.55	21.82	66.37	72.81	-6.44	AVG
7	1.6625	50.76	21.49	72.25	83.19	-10.94	QP
8	1.6625	35.57	21.49	57.06	63.19	-6.13	AVG
9	2.4868	52.23	21.01	73.24	89.54	-16.30	QP
10	2.4868	37.15	21.01	58.16	69.54	-11.38	AVG
11	7.3290	47.68	17.85	65.53	89.54	-24.01	QP
12	7.3290	39.51	17.85	57.36	69.54	-12.18	AVG

Note: Measurement = Reading Level + Correction Factor.




10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a) and RSS-Gen Clause 8.8

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

TEST SETUP AND PROCEDURE

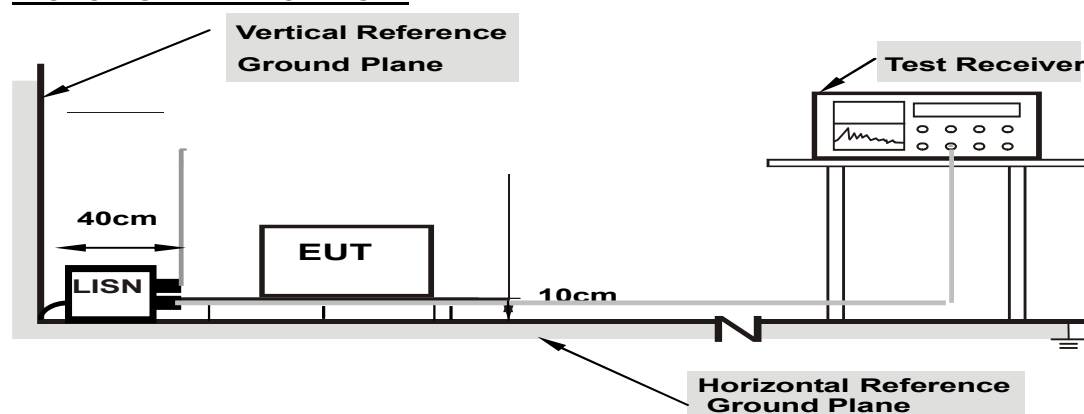


- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

The EUT is put on a table of non-conducting material that is 10cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V/60Hz
Test mode	BLE channel 00 (worst mode)		

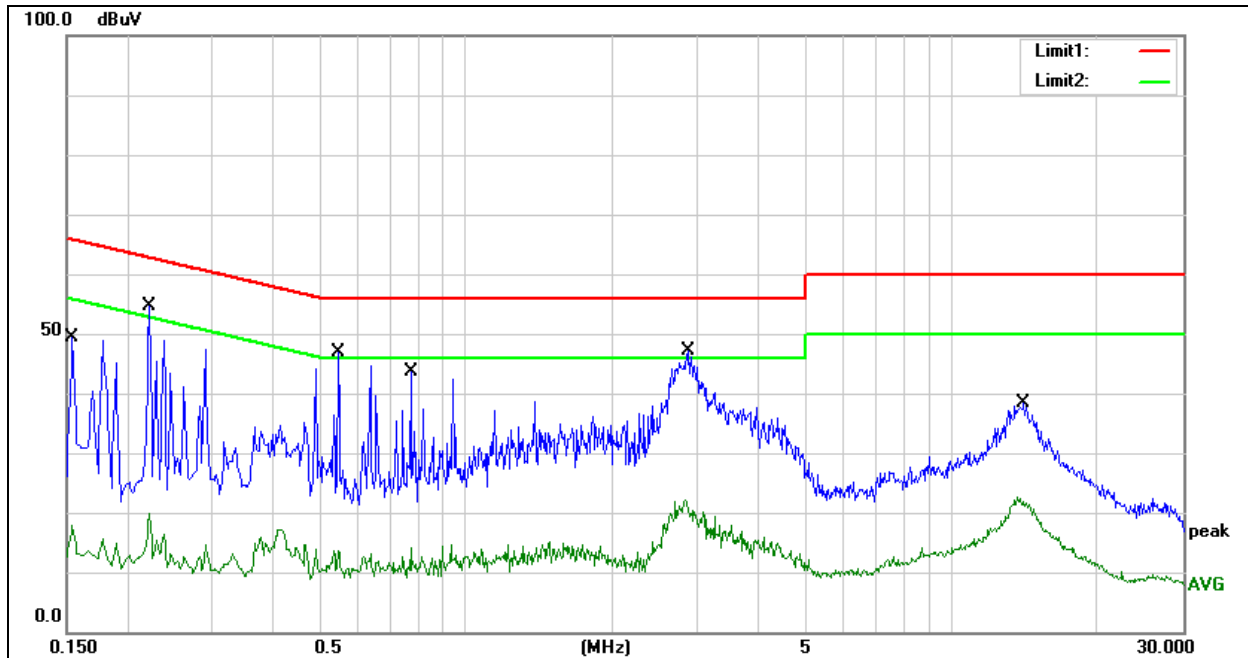**NAUGHT LINE RESULTS**


No.	Frequency (MHz)	Reading level (dBuV)	Correcti on dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	39.61	9.76	49.37	65.78	-16.41	QP
2	0.1540	8.11	9.76	17.87	55.78	-37.91	AVG
3	0.2220	44.63	9.96	54.59	62.74	-8.15	QP
4	0.2220	9.87	9.96	19.83	52.74	-32.91	AVG
5	0.5460	36.89	9.95	46.84	56.00	-9.16	QP
6	0.5460	3.72	9.95	13.67	46.00	-32.33	AVG
7	0.7700	33.89	9.84	43.73	56.00	-12.27	QP
8	0.7700	4.21	9.84	14.05	46.00	-31.95	AVG
9	2.8820	37.22	9.91	47.13	56.00	-8.87	QP
10	2.8820	10.27	9.91	20.18	46.00	-25.82	AVG
11	14.0820	28.27	10.05	38.32	60.00	-21.68	QP
12	14.0820	11.75	10.05	21.80	50.00	-28.20	AVG

Note: 1. Result = Reading Level + Correction Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

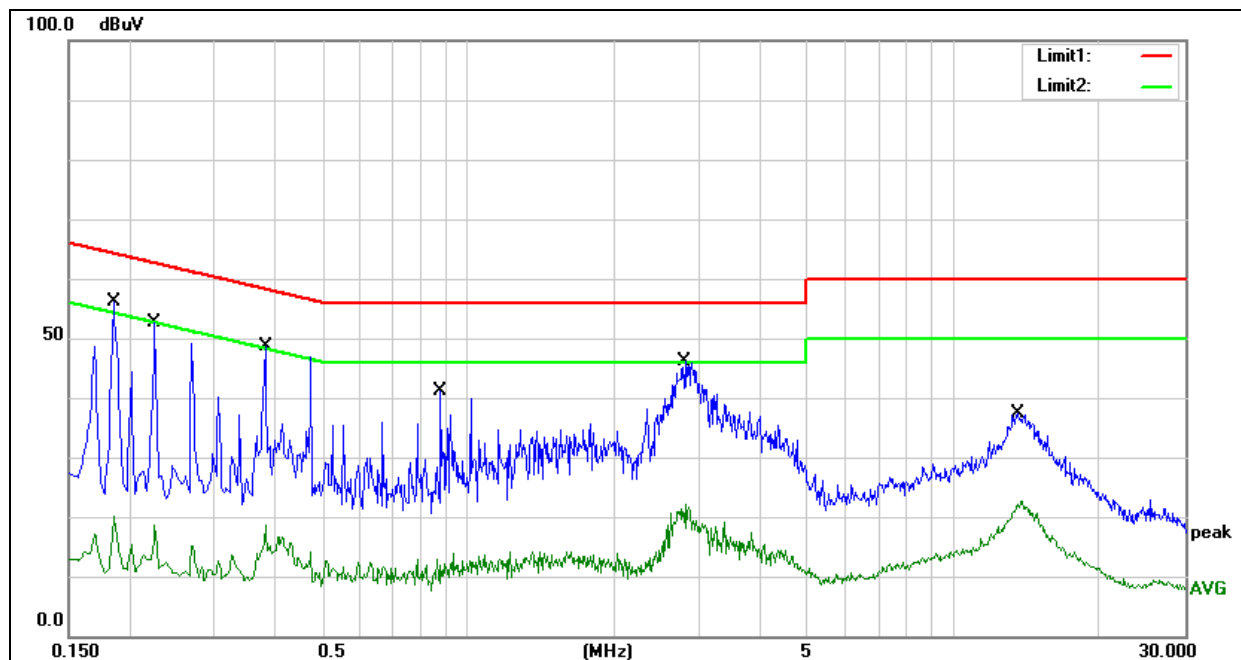**LIVE LINE RESULTS**

No.	Frequency (MHz)	Reading level (dBuV)	Correcti on dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1860	46.46	9.78	56.24	64.21	-7.97	QP
2	0.1860	10.45	9.78	20.23	54.21	-33.98	AVG
3	0.2260	42.80	9.90	52.70	62.60	-9.90	QP
4	0.2260	8.63	9.90	18.53	52.60	-34.07	AVG
5	0.3820	38.64	10.07	48.71	58.24	-9.53	QP
6	0.3820	8.44	10.07	18.51	48.24	-29.73	AVG
7	0.8780	31.27	9.82	41.09	56.00	-14.91	QP
8	0.8780	3.97	9.82	13.79	46.00	-32.21	AVG
9	2.7980	36.29	9.81	46.10	56.00	-9.90	QP
10	2.7980	12.24	9.81	22.05	46.00	-23.95	AVG
11	13.6100	27.12	10.23	37.35	60.00	-22.65	QP
12	13.6100	12.38	10.23	22.61	50.00	-27.39	AVG

Note: 1. Result = Reading Level + Correction Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



11. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

ANTENNA CONNECTOR

EUT has a Integral Antenna without antenna connector.



ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi.



Test photos

Radiated Test Setup

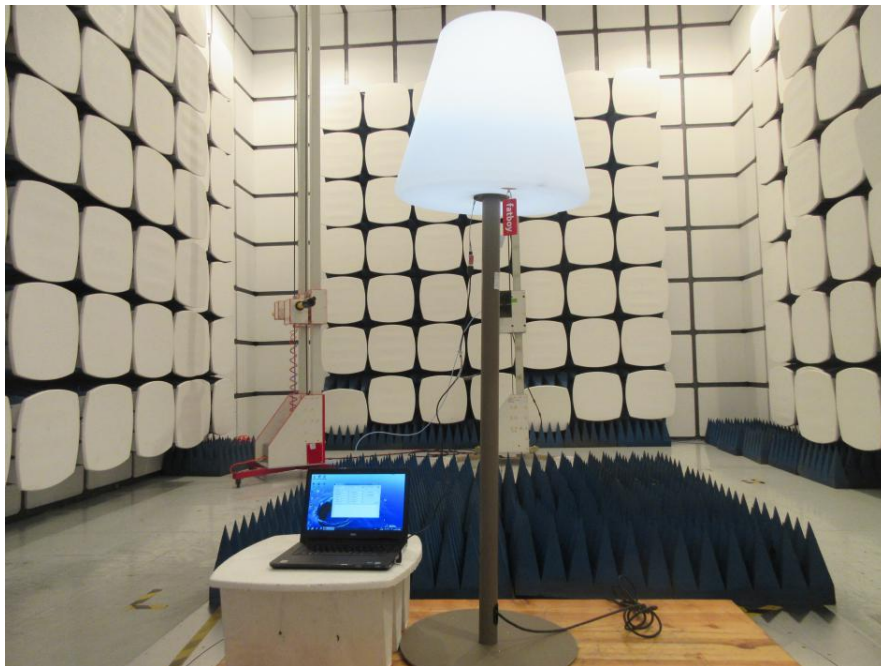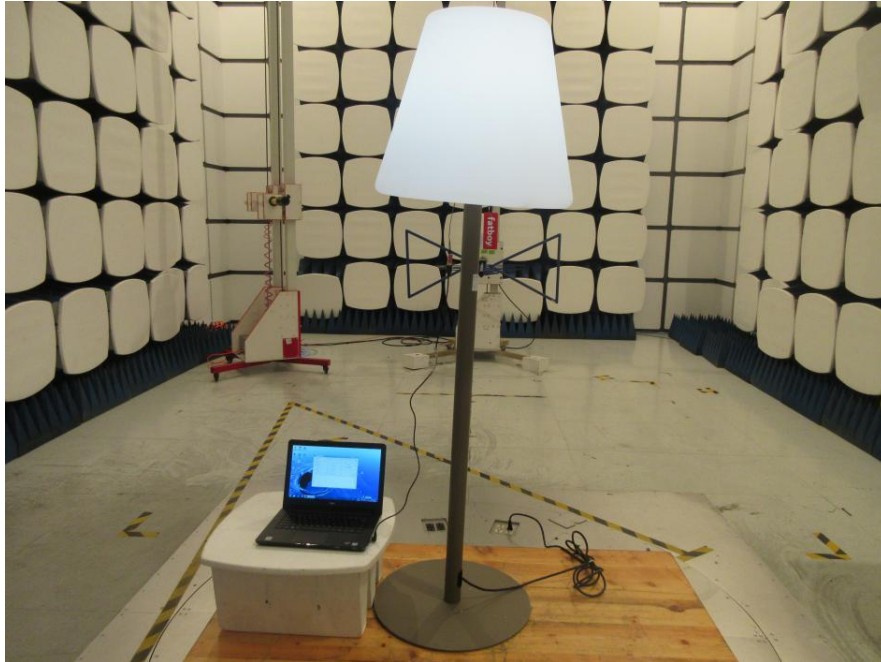



Conducted Test Setup



END OF REPORT