

TEST REPORT

Applicant Name: Shenzhen Jiayz photo industrial ., Ltd
Address: A16 Building, Intelligent Terminal Industrial Park of Silicon Valley Power, Guanlan, Longhua District, Shenzhen, China
Report Number: 2501U62725E-RF-00
FCC ID: 2ARN3-42101RX

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: AI-Powered Transformable Wireless Microphone
Model No.: BOYA Magic-RXU
Multiple Model(s) No.: BOYA Magic-RX, BOYA Magic-RXD, BOYA Magic 2-RX, BOYA Magic Pro-RX, BOYA Magic 2-RXU, BOYA Magic Pro-RXU, BOYA Magic 2-RXD, BOYA Magic Pro-RXD
Trade Mark: BOYA
Date Received: 2025/06/03
Issue Date: 2025/07/08

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ekko Wu

Ekko Wu
RF Engineer

Approved By:

Jimmy Xiao

Jimmy Xiao
EMC Manager

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.247 (I)&§1.1307 (B) &§2.1093 - RF EXPOSURE.....	13
APPLICABLE STANDARD	13
MEASUREMENT RESULT	13
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (A) - AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	16
FACTOR & OVER LIMIT CALCULATION.....	16
TEST DATA	16
FCC §15.205, §15.209&§15.247(D) – RADIATED EMISSIONS	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	21
FACTOR & OVER LIMIT/MARGIN CALCULATION	21
TEST DATA	21
FCC §15.247(A) (1) - CHANNEL SEPARATION TEST	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39

FCC §15.247(A) (1) - 20DBEMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH41
 APPLICABLE STANDARD 41
 TEST PROCEDURE41
 TEST DATA42

FCC §15.247(A) (1) (III) - QUANTITY OF HOPPING CHANNEL TEST.....45
 APPLICABLE STANDARD45
 TEST PROCEDURE45
 TEST DATA45

FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....47
 APPLICABLE STANDARD47
 TEST PROCEDURE47
 TEST DATA47

FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT49
 APPLICABLE STANDARD49
 TEST PROCEDURE49
 TEST DATA50

FCC §15.247(D) - BAND EDGES TESTING.....52
 APPLICABLE STANDARD52
 TEST PROCEDURE52
 TEST DATA52

EUT PHOTOGRAPHS.....54

TEST SETUP PHOTOGRAPHS55

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2501U62725E-RF-00	Original Report	2025/07/08

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	AI-Powered Transformable Wireless Microphone
Tested Model	BOYA Magic-RXU
Multiple Model(s)	BOYA Magic-RX, BOYA Magic-RXD, BOYA Magic 2-RX, BOYA Magic Pro-RX, BOYA Magic 2-RXU, BOYA Magic Pro-RXU, BOYA Magic 2-RXD, BOYA Magic Pro-RXD
Frequency Range	2402-2480MHz
Maximum conducted peak output power	2.71dBm
Modulation Technique	GFSK
Antenna Specification [#]	0.9dBi (provided by the applicant)
Voltage Range	DC 5V from USB Port
Sample serial number	33Z4-3 for RF Conducted Test 33Z4-4 for Radiated emissions and AC line conducted emissions. (Assigned by BAACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note: The Multiple models are electrically identical with the test model except for model name and sales channels. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9 kHz~150 KHz	3.63dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel list

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	42	2444
...
...
36	2438	75	2477
37	2439	76	2478
38	2440	77	2479
39	2441	78	2480

Channel 0, 38, 78 was tested.

EUT Exercise Software

“BT-Tool V1.1.4”[#] exercise software was used and the power level is 7[#]. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
iKU	mobile phone	X9	Unknown
BLU	adapter	US-CR-2000	Unknown
BULL	Receptacle	GN-415K	5503290068073

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detachable USB Cable	0.2	Adapter	EUT


Block Diagram of Test Setup

For Conducted Emissions:

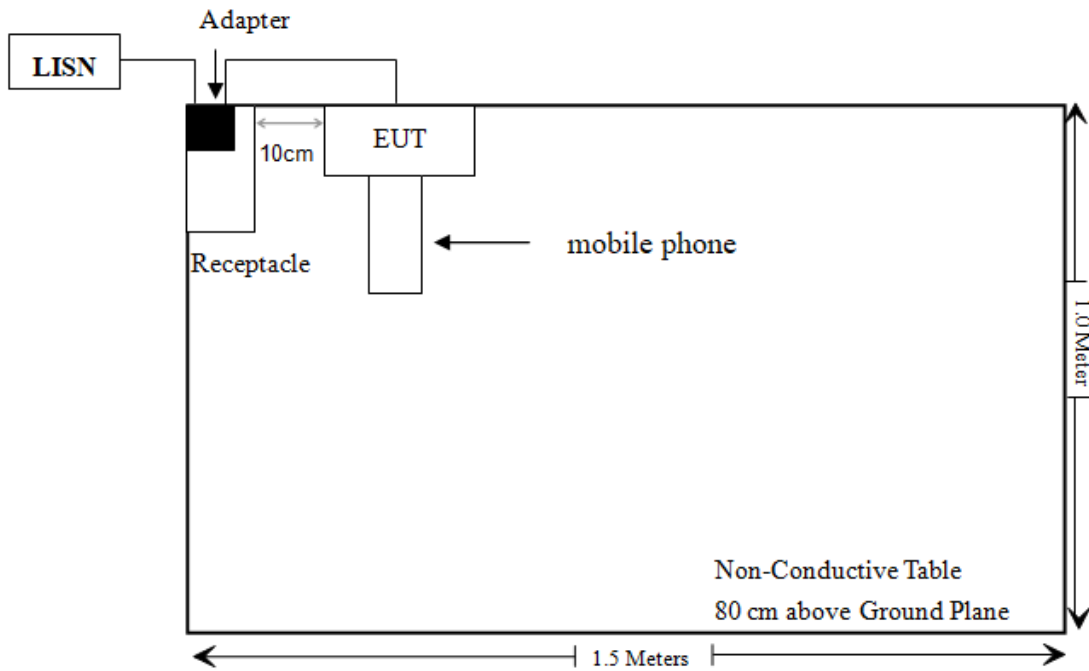


For Radiated Emissions:

Below 1G

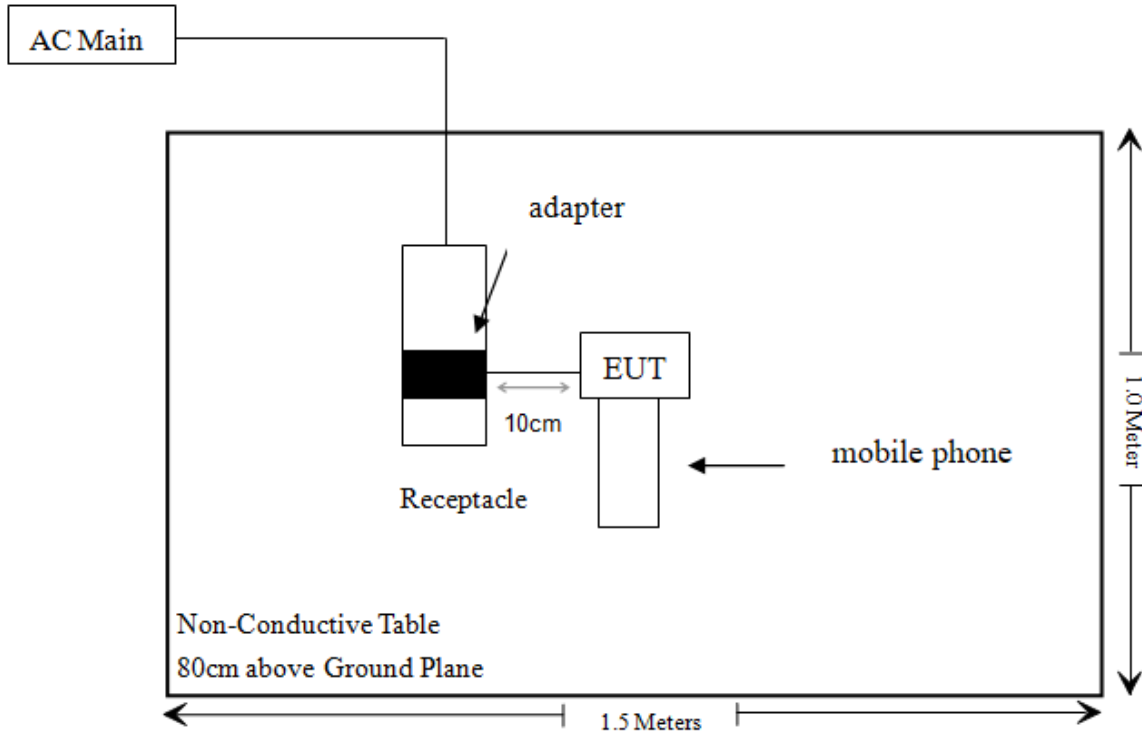

Above 1G

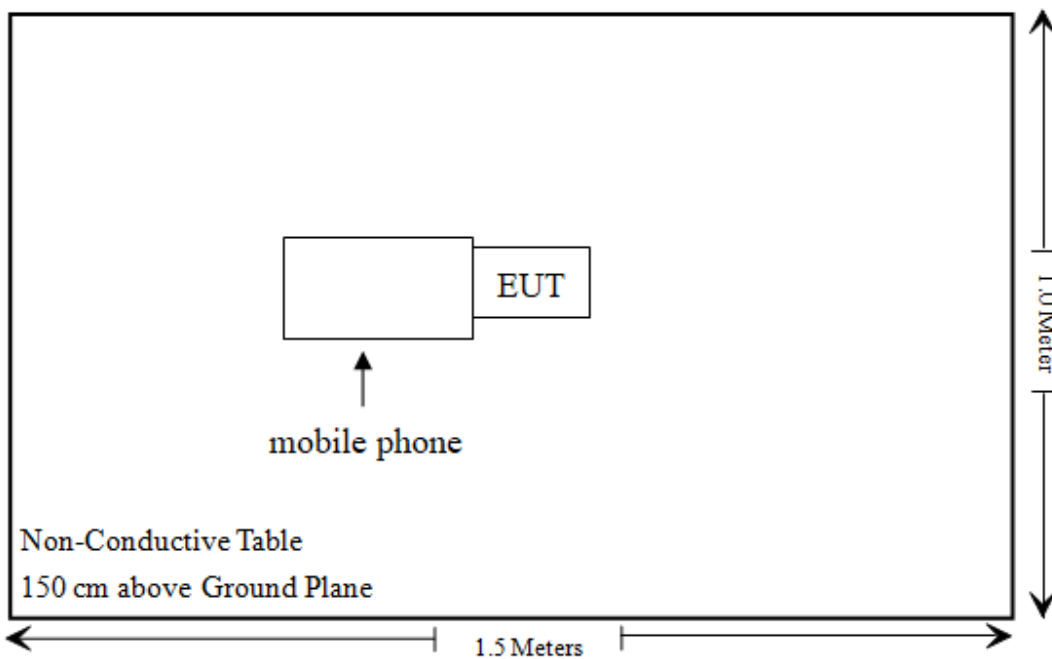

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20dBEmission Bandwidth&99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/04/29	2026/04/28
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/04/29	2026/04/28
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310 N	186238	2025/04/29	2026/04/28
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2025/04/29	2026/04/28
Unknown	Cable	XH500C	J-10M-A	2025/04/29	2026/04/28
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/03/26	2026/03/25
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/04/29	2026/04/28
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/12/18	2025/12/17

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2024/12/04	2025/12/03
Unknown	10dB Attenuator	Unknown	F-03-EM190	2025/06/26	2026/06/25

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i)&§1.1307 (b) &§2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

Mode	Frequency (MHz)	Max tune-up conducted power # (dBm)	Max tune-up conducted power # (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
GFSK	2402-2480	3.0	2.0	5	0.6	3.0	Yes

Note: the tune up conducted power was declared by the applicant.

Result: Compliant

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the antenna gain[#] is 0.9dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

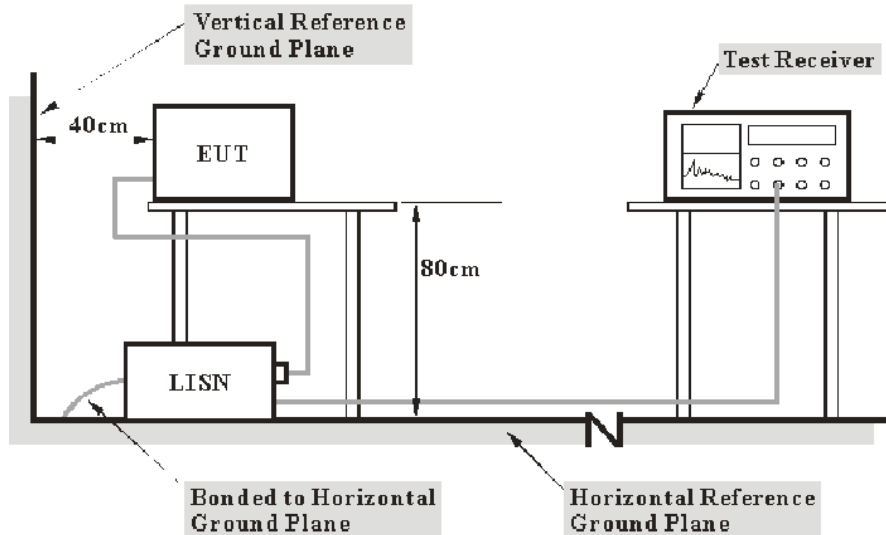

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2020. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions


Temperature:	26.5 °C
Relative Humidity:	67 %
ATM Pressure:	100.2 kPa

The testing was performed by Macy Shi on 2025-06-25.

EUT operation mode: Transmitting (Maximum output power mode: Middle channel)

AC 120V/60 Hz, Line

Date: 2025-06-25

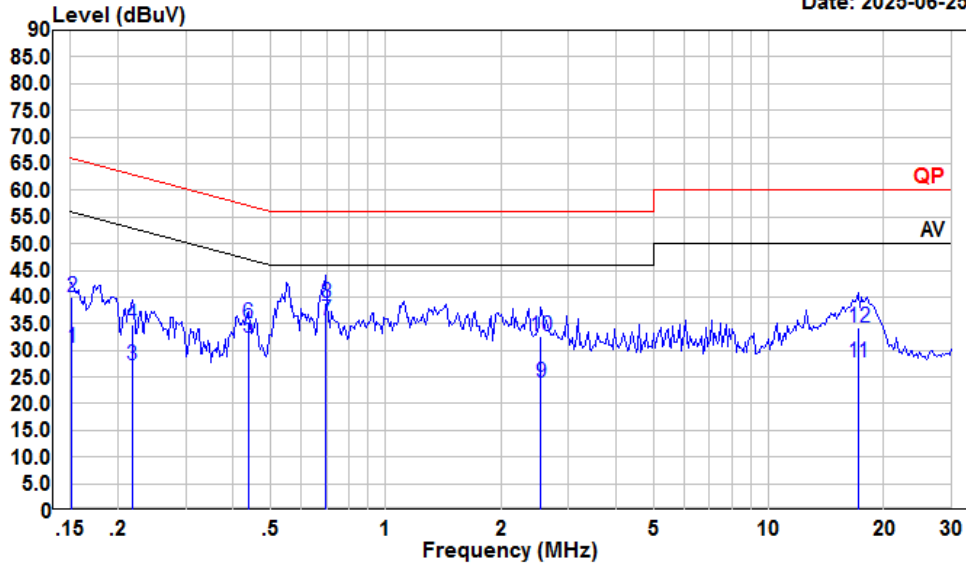


Condition: Line
 Project : 2501U62725E-RF
 tester : Macy.shi Note:Transmitting
 Setting : RBW:9kHz

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	10.01	30.58	10.41	10.16	55.91	-25.33	Average
2	0.152	19.51	40.08	10.41	10.16	65.91	-25.83	QP
3	0.217	6.46	27.33	10.68	10.19	52.92	-25.59	Average
4	0.217	13.95	34.82	10.68	10.19	62.92	-28.10	QP
5	0.437	11.61	32.35	10.53	10.21	47.11	-14.76	Average
6	0.437	14.27	35.01	10.53	10.21	57.11	-22.10	QP
7	0.697	14.42	35.55	10.90	10.23	46.00	-10.45	Average
8	0.697	17.89	39.02	10.90	10.23	56.00	-16.98	QP
9	2.540	2.56	23.84	11.03	10.25	46.00	-22.16	Average
10	2.540	11.39	32.67	11.03	10.25	56.00	-23.33	QP
11	17.109	6.81	27.69	10.62	10.26	50.00	-22.31	Average
12	17.109	13.33	34.21	10.62	10.26	60.00	-25.79	QP

AC 120V/60 Hz, Neutral

Date: 2025-06-25

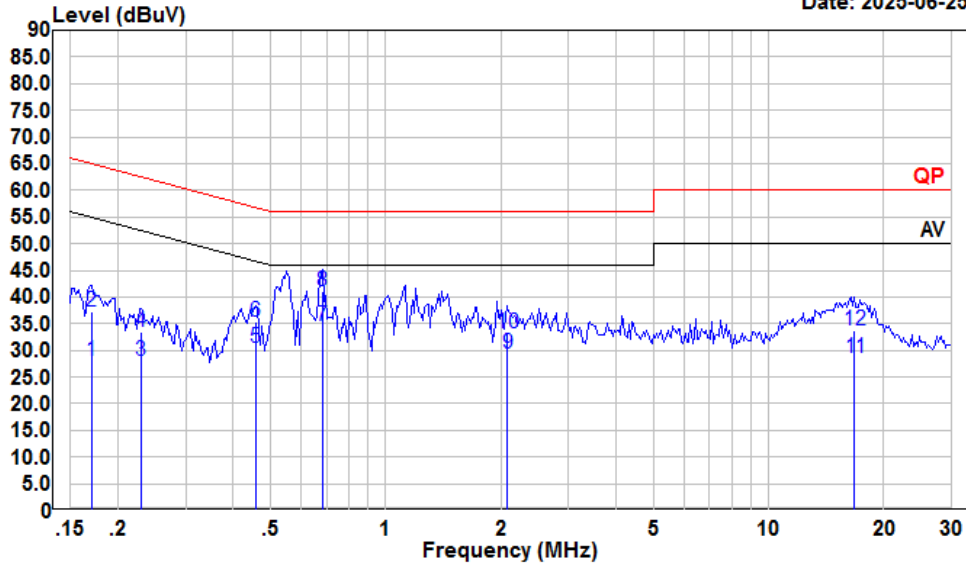

Condition: Neutral
 Project : 2501U62725E-RF
 tester : Macy.shi Note:Transmitting
 Setting : RBW:9kHz

	Read Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.170	7.24	28.01	10.58	10.19	54.94	-26.93	Average
2	0.170	16.56	37.33	10.58	10.19	64.94	-27.61	QP
3	0.229	6.95	27.91	10.76	10.20	52.48	-24.57	Average
4	0.229	12.54	33.50	10.76	10.20	62.48	-28.98	QP
5	0.456	9.63	30.36	10.53	10.20	46.76	-16.40	Average
6	0.456	14.55	35.28	10.53	10.20	56.76	-21.48	QP
7	0.683	13.59	34.41	10.59	10.23	46.00	-11.59	Average
8	0.683	20.12	40.94	10.59	10.23	56.00	-15.06	QP
9	2.077	8.37	29.32	10.72	10.23	46.00	-16.68	Average
10	2.077	12.15	33.10	10.72	10.23	56.00	-22.90	QP
11	16.750	7.68	28.55	10.61	10.26	50.00	-21.45	Average
12	16.750	12.95	33.82	10.61	10.26	60.00	-26.18	QP


FCC §15.205, §15.209&§15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup


9 kHz-30MHz:

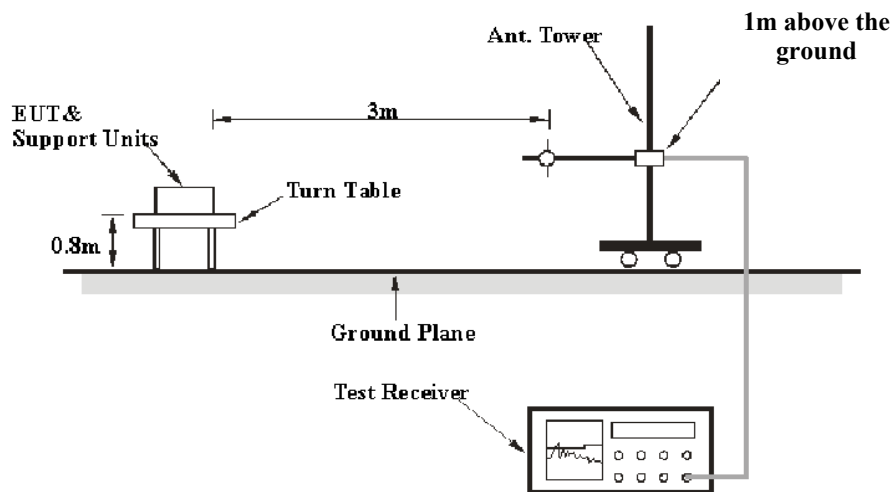

30MHz-1GHz:

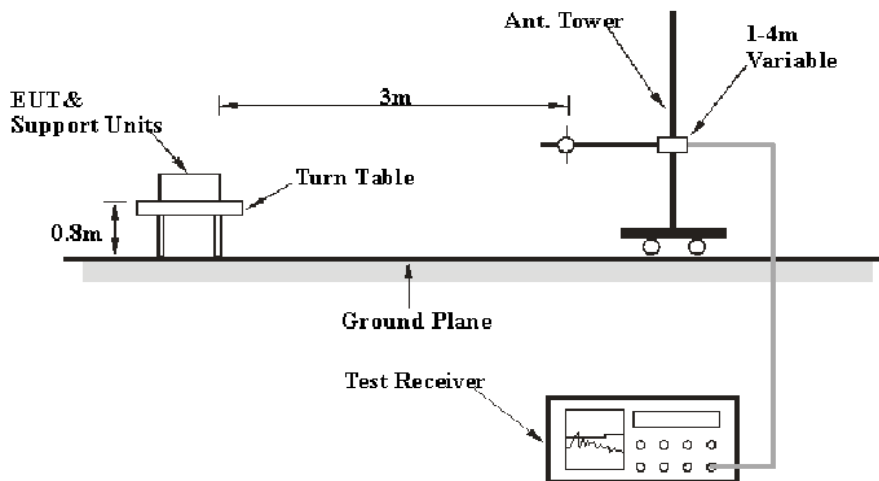

Above 1GHz:

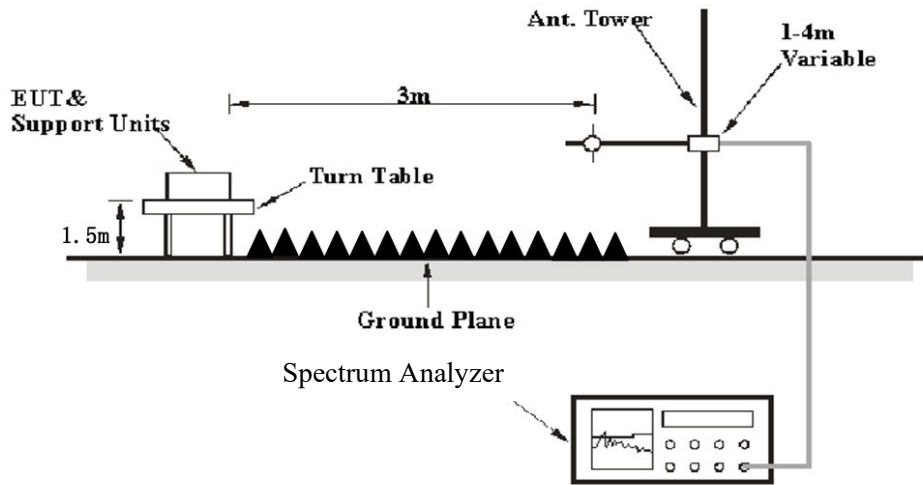

The radiated emission tests were performed in the 3meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak
Above 1 GHz	Harmonics				
	1MHz	3 MHz	/	PK	Peak
	Average Emission Level=Peak Emission Level+20*log(Duty cycle)				
	Band Edge & Other Emissions				
	1MHz	3 MHz	/	PK	Peak
	1MHz	≥10 Hz	/	Average	Peak

For Duty cycle measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time=N1*L1+N2*L2+...Nn-1*Ln-1+Nn*Ln,

Where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	20.3~24.5 °C
Relative Humidity:	48~50 %
ATM Pressure:	100.3~101.5 kPa

The testing was performed by Anson Su on 2025-06-25 for below 1GHz and Ive Wang on 2025-06-27 for above 1GHz.


EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.

9 kHz-30MHz: Transmitting (Maximum output power mode: Middle channel)


Note: When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.

Parallel (Worst case)

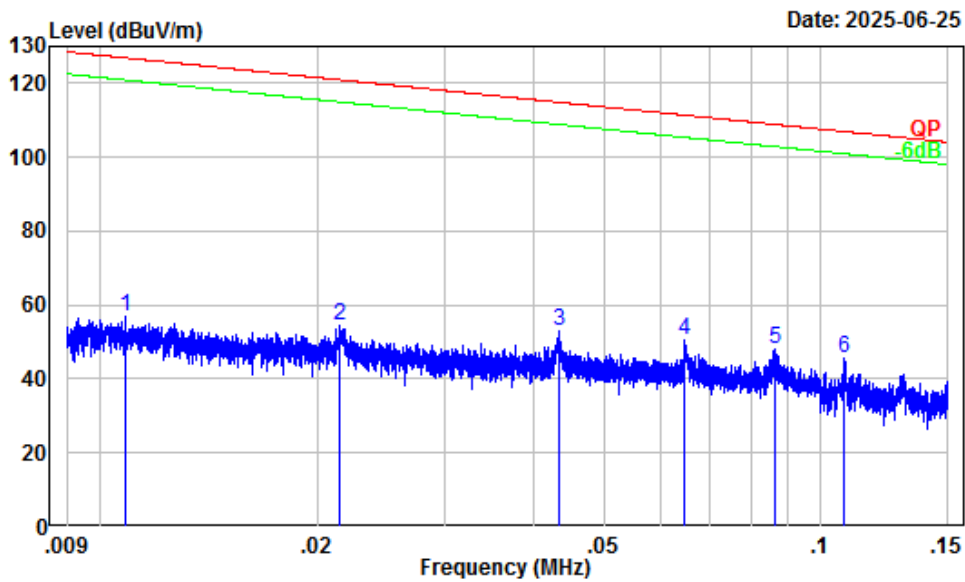

Site : Chamber A
 Condition : 3m
 Project Number : 2501U62725E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 0.3/1kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	32.14	24.78	56.92	126.91	-69.99	Peak
2	0.022	30.11	24.11	54.22	120.94	-66.72	Peak
3	0.043	27.11	25.96	53.07	114.88	-61.81	Peak
4	0.065	24.92	25.39	50.31	111.37	-61.06	Peak
5	0.086	22.96	24.89	47.85	108.89	-61.04	Peak
6	0.108	21.53	23.87	45.40	106.94	-61.54	Peak

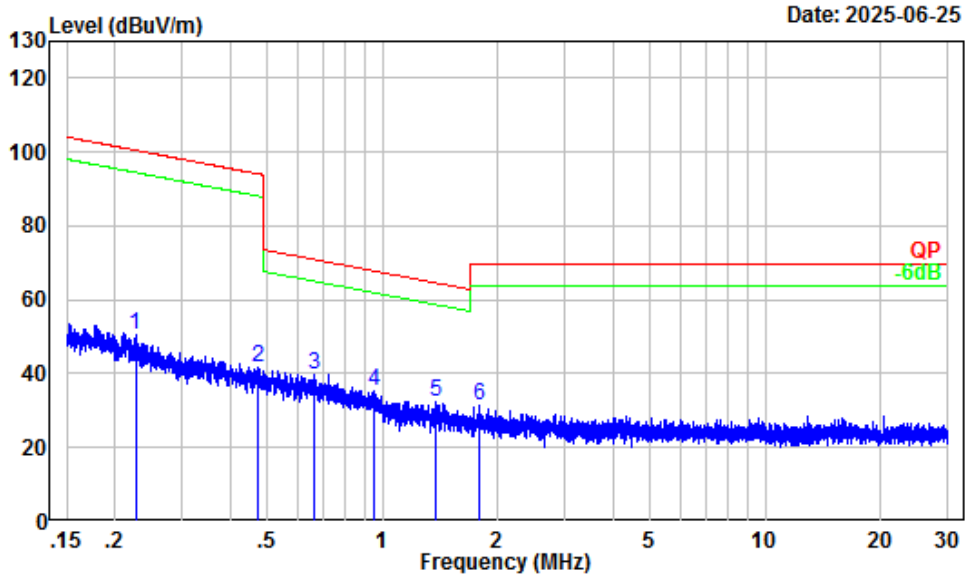


Site : Chamber A
 Condition : 3m
 Project Number : 2501U62725E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 10/30kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.227	14.53	35.78	50.31	100.50	-50.19	Peak
2	0.473	6.91	35.02	41.93	94.10	-52.17	Peak
3	0.663	4.38	35.60	39.98	71.11	-31.13	Peak
4	0.951	1.57	33.56	35.13	67.92	-32.79	Peak
5	1.380	0.14	32.06	32.20	64.61	-32.41	Peak
6	1.787	-1.00	32.44	31.44	69.54	-38.10	Peak

30MHz-1GHz: (Maximum output power mode, Middle channel)


Horizontal

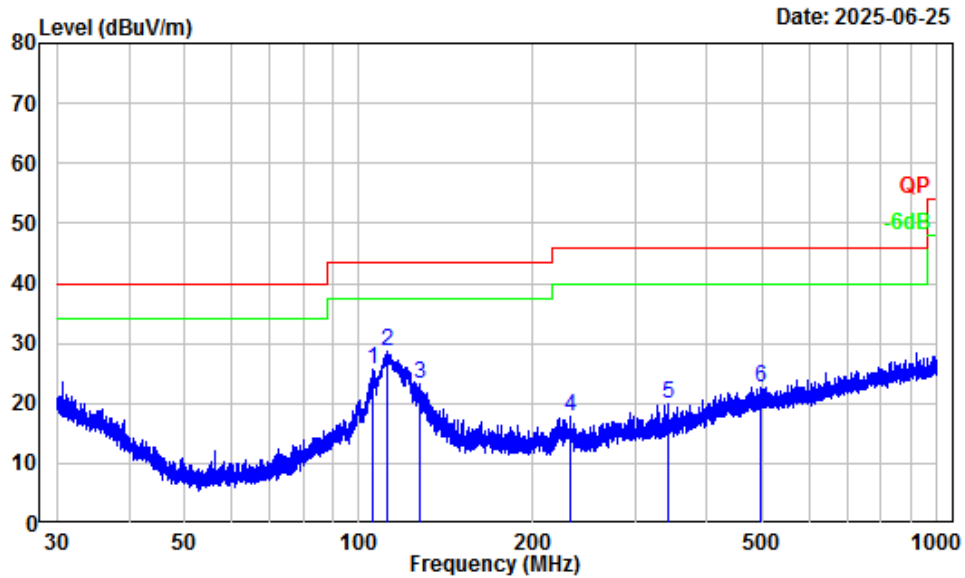

Site : Chamber A
 Condition : 3m Horizontal
 Project Number : 2501U62725E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 100/300kHz
 Tester : Anson Su

	Freq Factor		Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	105.92	-14.15	39.82	25.67	43.50	-17.83	Peak
2	111.84	-12.78	41.41	28.63	43.50	-14.87	Peak
3	127.44	-11.12	34.45	23.33	43.50	-20.17	Peak
4	231.72	-13.76	31.70	17.94	46.00	-28.06	Peak
5	343.33	-10.32	30.18	19.86	46.00	-26.14	Peak
6	495.07	-5.93	28.55	22.62	46.00	-23.38	Peak

Vertical

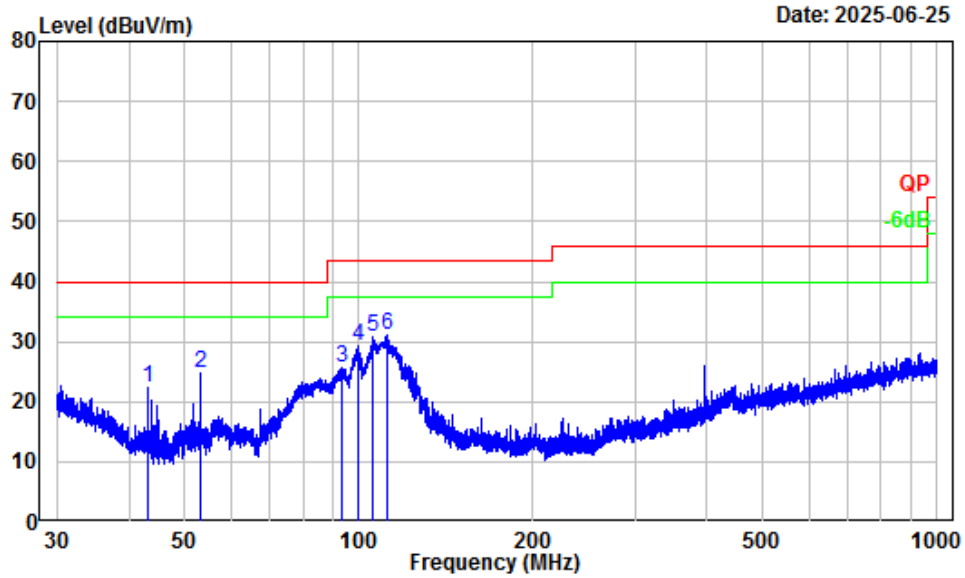

Site : Chamber A
 Condition : 3m Vertical
 Project Number : 2501U62725E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 100/300kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	43.26	-14.74	37.10	22.36	40.00	-17.64 Peak
2	53.29	-18.32	43.17	24.85	40.00	-15.15 Peak
3	93.40	-17.60	43.40	25.80	43.50	-17.70 Peak
4	99.44	-16.07	45.24	29.17	43.50	-14.33 Peak
5	105.97	-14.14	44.87	30.73	43.50	-12.77 Peak
6	111.84	-12.78	43.77	30.99	43.50	-12.51 Peak

Above 1GHz:

Frequency (MHz)	Reading (dBµV)	PK/AV	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Low Channel							
4804.00	56.18	PK	H	-7.79	48.39	74	-25.61
4804.00	54.40	PK	V	-7.79	46.61	74	-27.39
Middle Channel							
4880.00	55.94	PK	H	-7.58	48.36	74	-25.64
4880.00	54.40	PK	V	-7.58	46.82	74	-27.18
High Channel							
4960.00	54.51	PK	H	-7.56	46.95	74	-27.05
4960.00	53.36	PK	V	-7.56	45.80	74	-28.20

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


Other emissions which were more than 20dB below limit or on noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.

Test plots for Band Edge Measurements (Radiated):

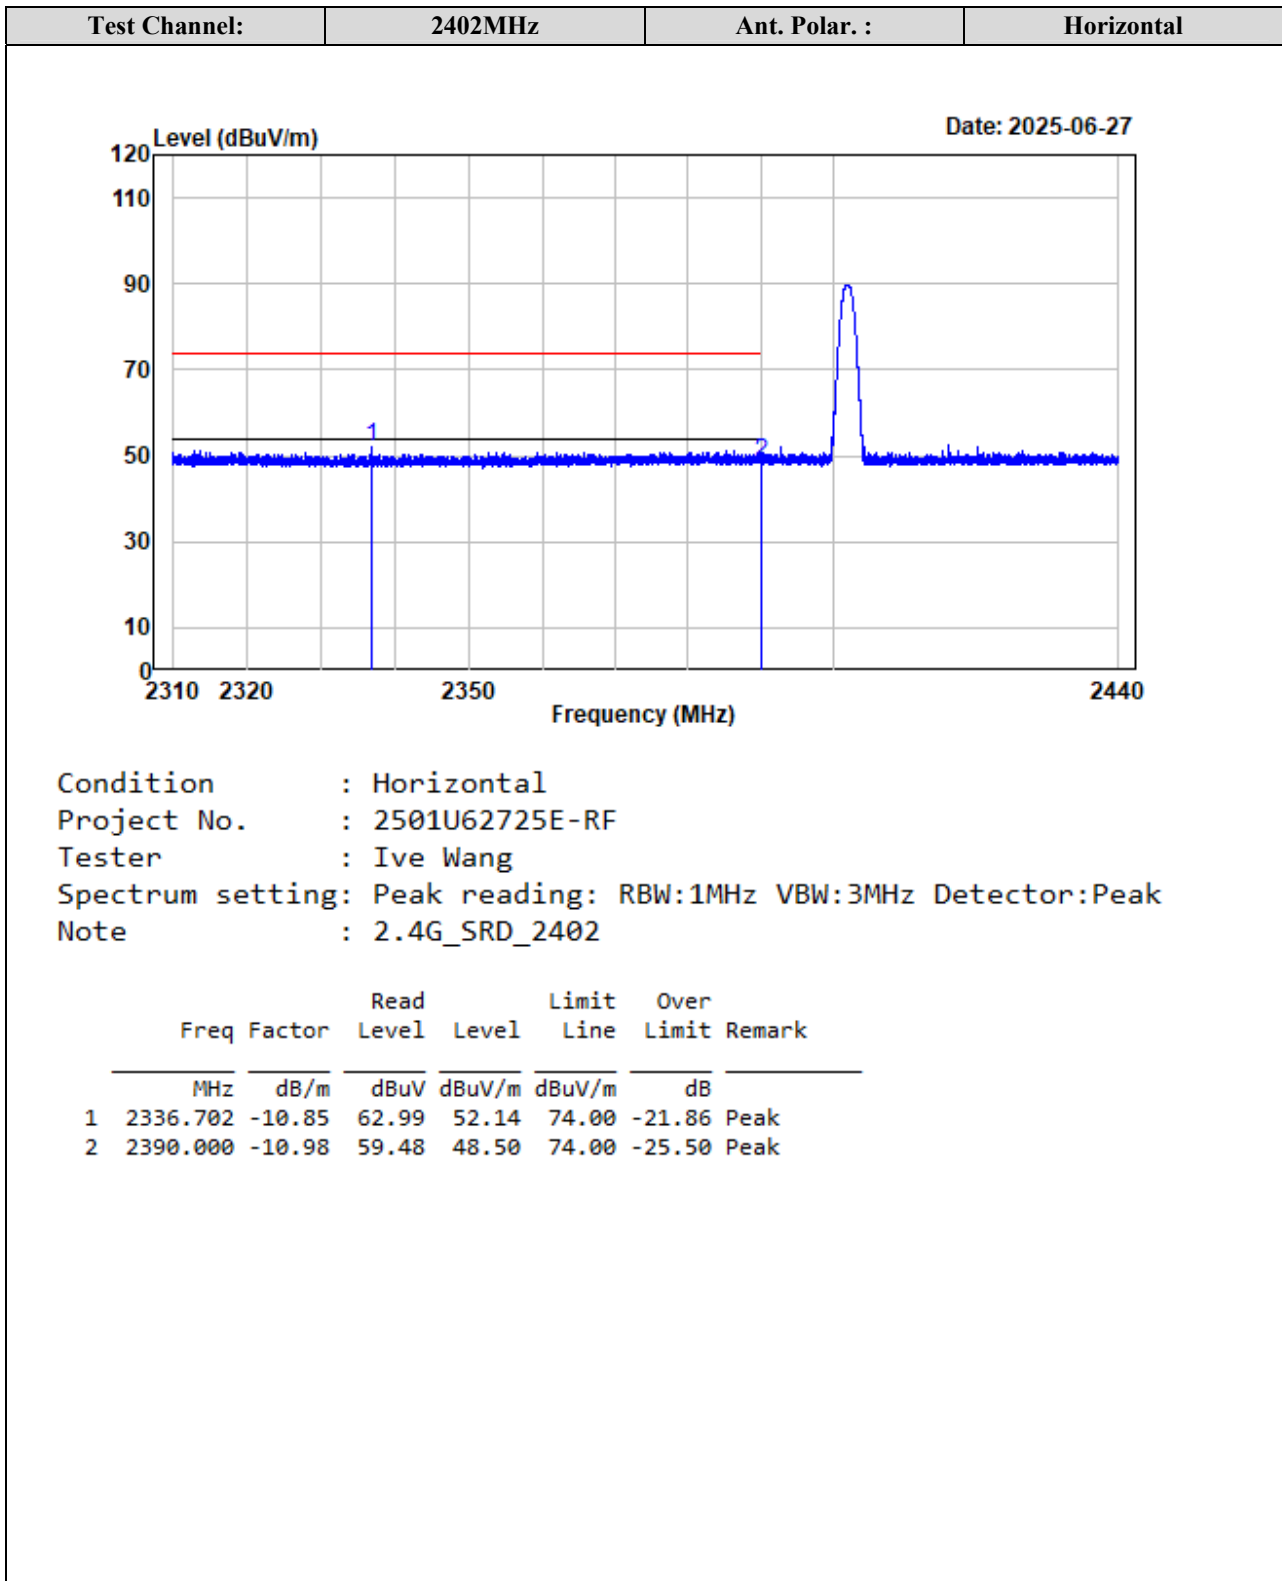


Test Channel:	2402MHz	Ant. Polar. :	Vertical
---------------	---------	---------------	----------

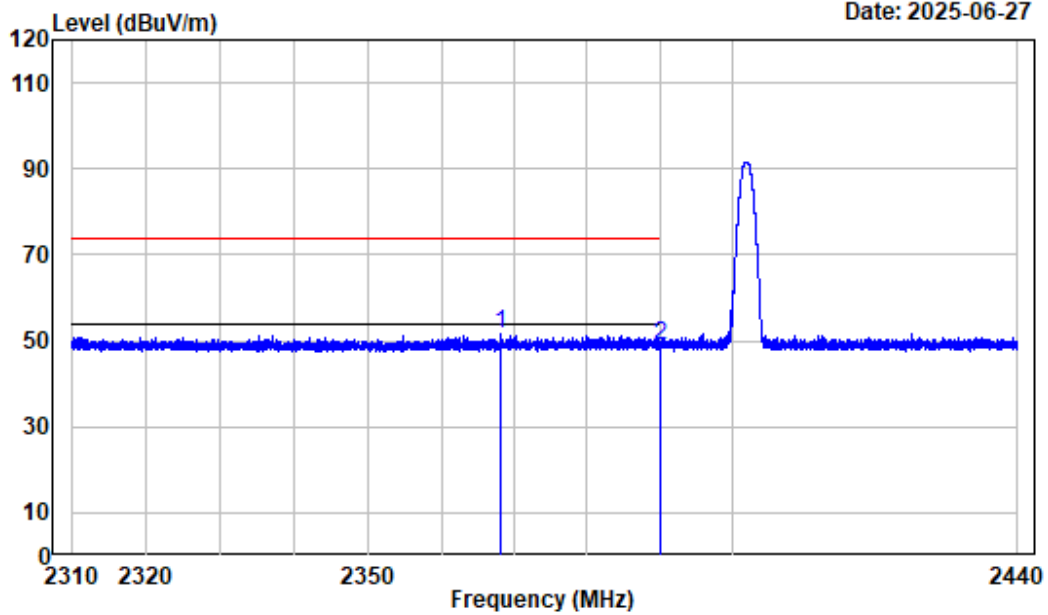

Condition : Vertical
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4G_SRD_2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2368.166	-10.94	62.42	51.48	74.00	-22.52	Peak
2	2390.000	-10.98	59.70	48.72	74.00	-25.28	Peak


Test Channel:	2480MHz	Ant. Polar. :	Horizontal
---------------	---------	---------------	------------

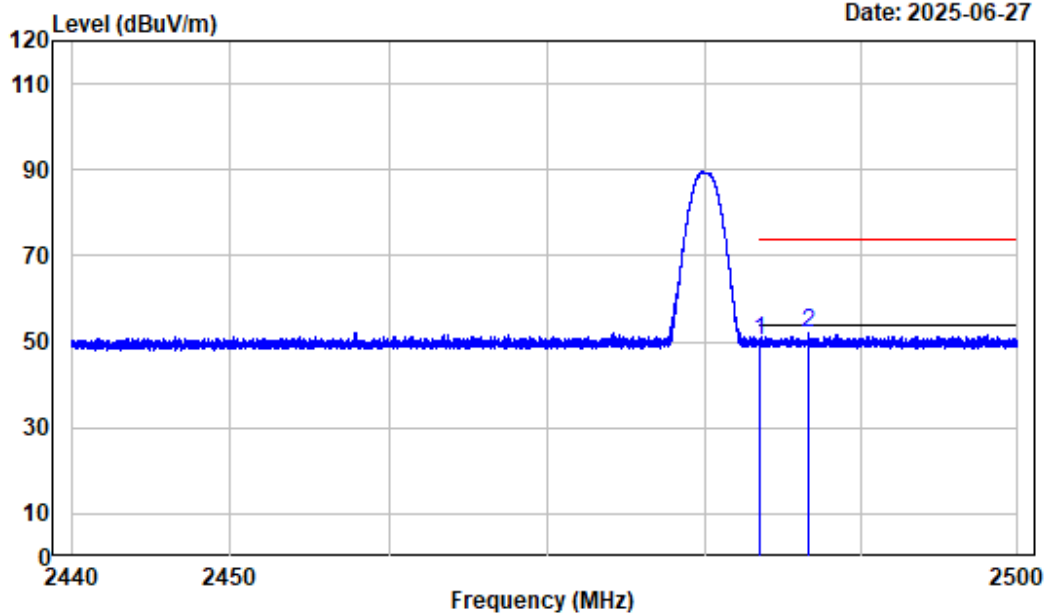

Condition : Horizontal
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4G_SRD_2480

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	61.20	50.23	74.00	-23.77	Peak
2	2486.596	-10.97	63.04	52.07	74.00	-21.93	Peak


Test Channel:	2480MHz	Ant. Polar. :	Vertical
---------------	---------	---------------	----------

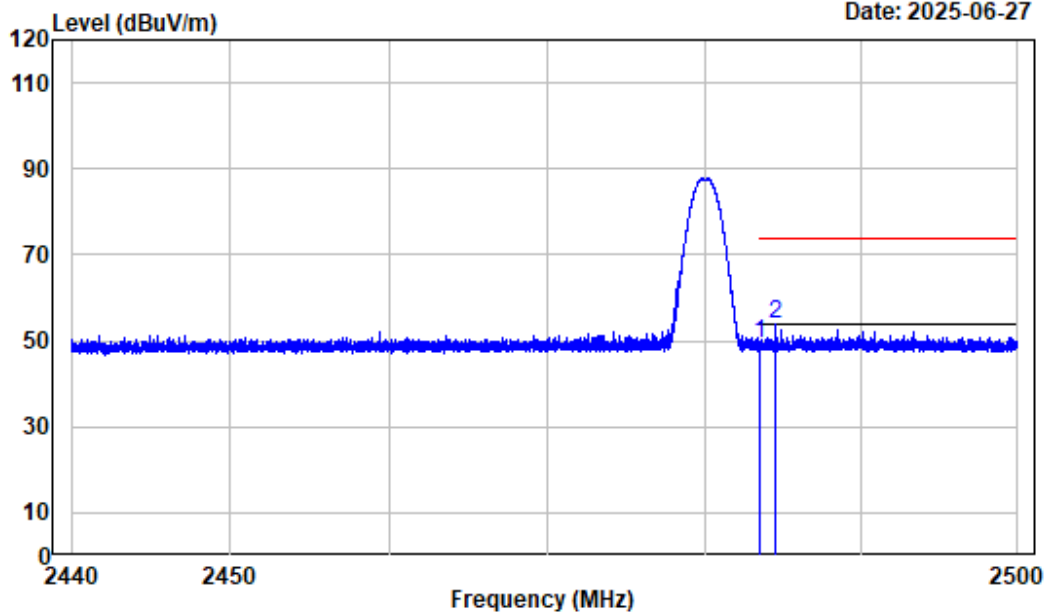


Condition : Vertical
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4G_SRD_2480

	Read	Limit	Over		
Freq	Level	Level	Line	Limit Remark	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 2483.500	-10.97	60.21	49.24	74.00	-24.76 Peak
2 2484.510	-10.97	64.63	53.66	74.00	-20.34 Peak

Listed with the worst harmonic margin test plot:

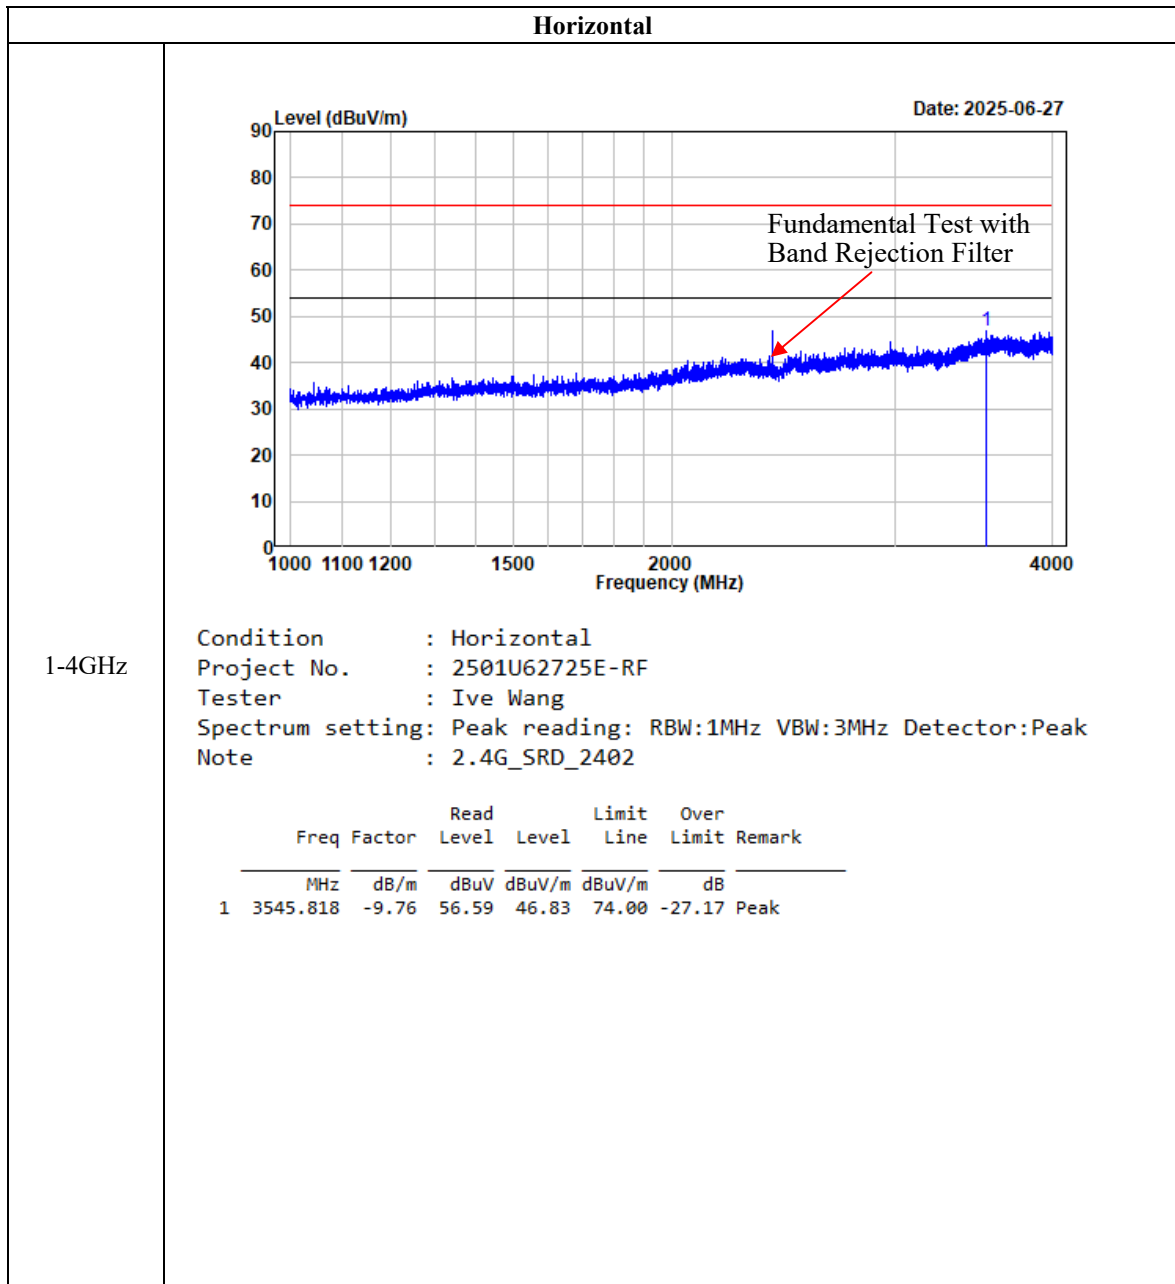

Vertical

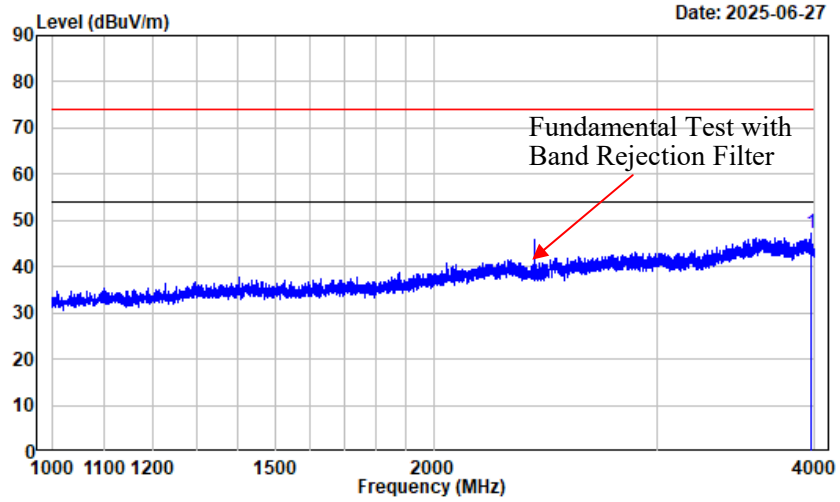


1-4GHz

Condition : Vertical
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4G_SRD_2402

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3971.872	-9.29	56.44	47.15	74.00	-26.85	Peak

Horizontal-Peak

4-18GHz

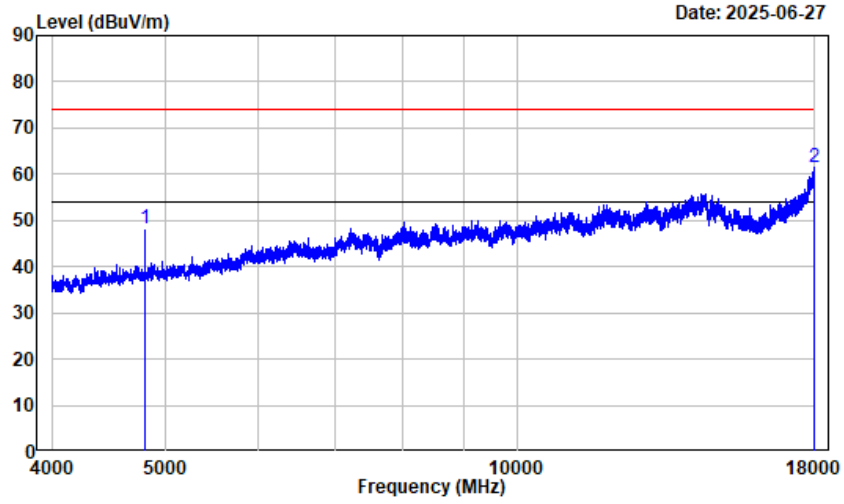


Condition : Horizontal
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4G_SRD_2402

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	-7.79	56.18	48.39	74.00	-25.61	Peak
2	17989.500	13.16	48.35	61.51	74.00	-12.49	Peak

Horizontal-Average


4-18GHz

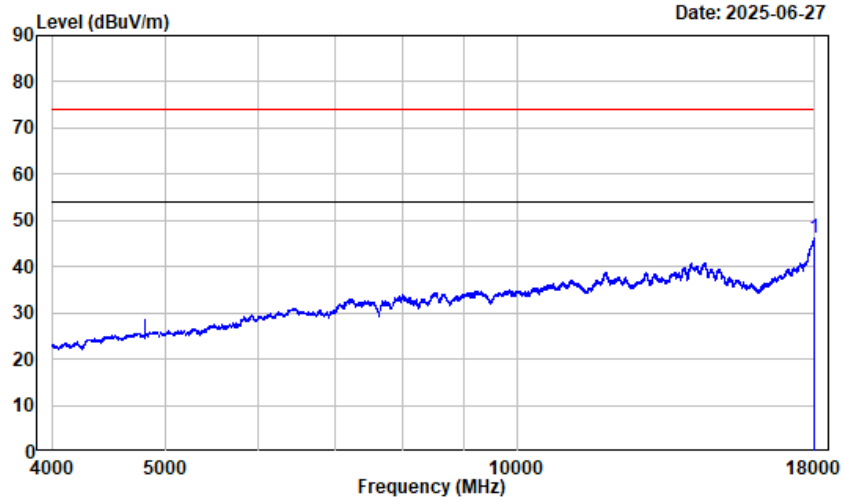

Condition : Horizontal
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
 Note : 2.4G_SRD_2402

Freq	Factor	Read		Limit	Over	Remark
		Level	Level			
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17993.000	13.17	33.04	46.21	54.00	-7.79	Average

Vertical-Peak

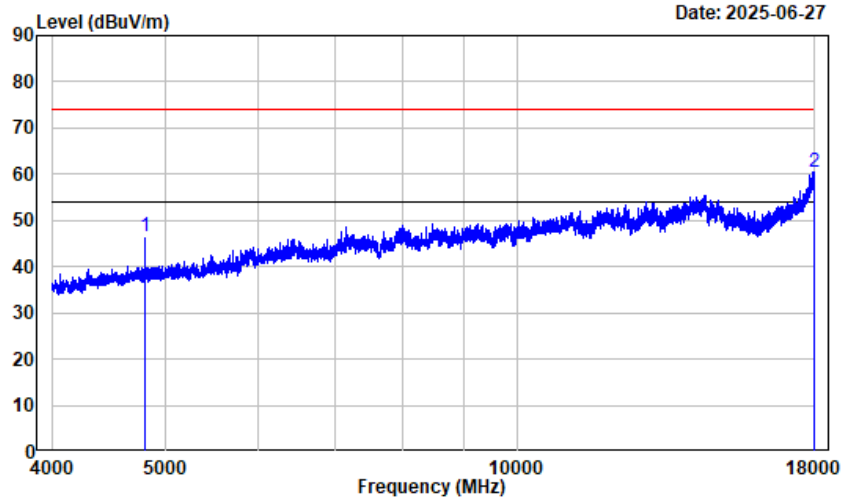


4-18GHz

Condition : Vertical
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4G_SRD_2402

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4804.000	-7.79	54.40	46.61	74.00	-27.39	Peak
2	17998.250	13.19	47.27	60.46	74.00	-13.54	Peak

Vertical-Average

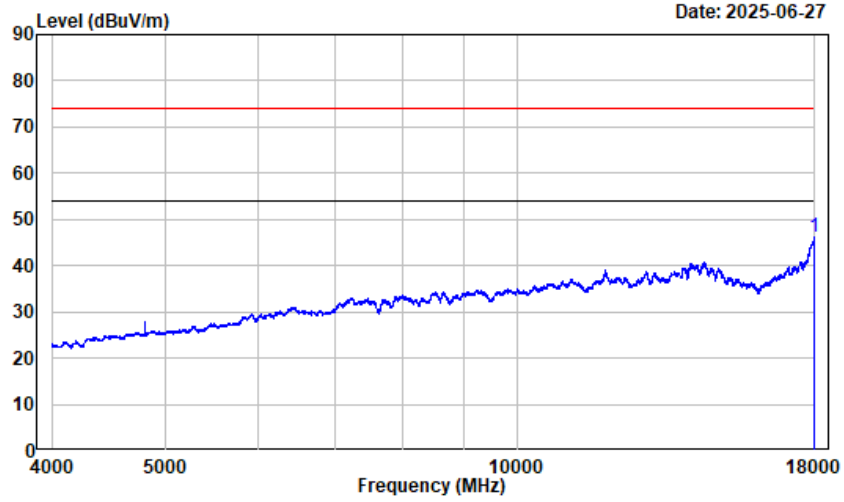


4-18GHz

Condition : Vertical
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
 Note : 2.4G_SRD_2402

Freq	Factor	Read		Limit	Over	Remark
		Level	Level			
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.250	13.19	32.96	46.15	54.00	-7.85	Average

Horizontal

18-25GHz

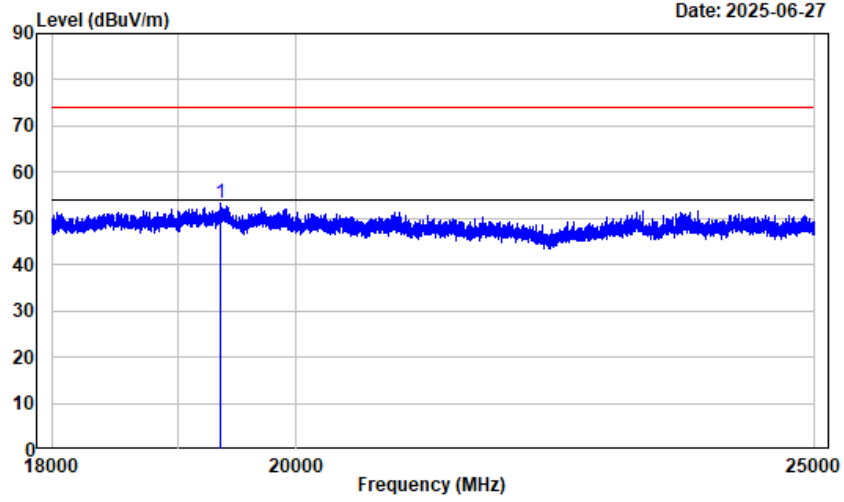


Condition : Horizontal
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4G_SRD_2402

Freq	Factor	Read		Limit	Over	Remark
		Level	Level			
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19356.420	15.43	37.87	53.30	74.00	-20.70	peak

Vertical

18-25GHz

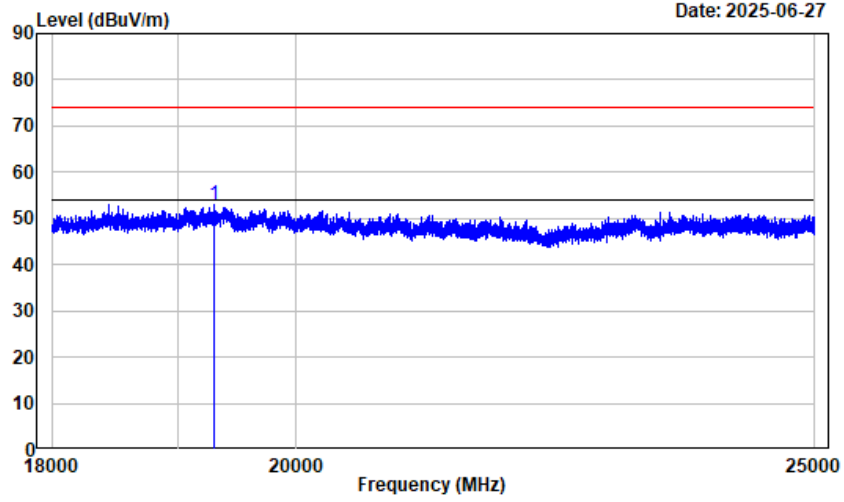

Condition : Vertical
 Project No. : 2501U62725E-RF
 Tester : Ive Wang
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 2.4G_SRD_2402

Freq	Factor	Read		Limit	Over	Remark
		Level	Level			
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19306.540	15.42	37.64	53.06	74.00	-20.94	peak

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Test Procedure

Test Method: ANSI C63.10-2020 Clause 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined.



Test Data

Environmental Conditions

Temperature:	23.8 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa

The testing was performed by Kungfumaster Liang on 2025-06-27.


EUT operation mode: Transmitting

Test Result: Compliant

Mode	Channel	Result (MHz)	Limit (MHz)	Verdict
GFSK	Middle Channel	0.999	0.583	Pass

Note: the limit is $2/3 * 20\text{dB}$ bandwidth.

GFSK_Middle

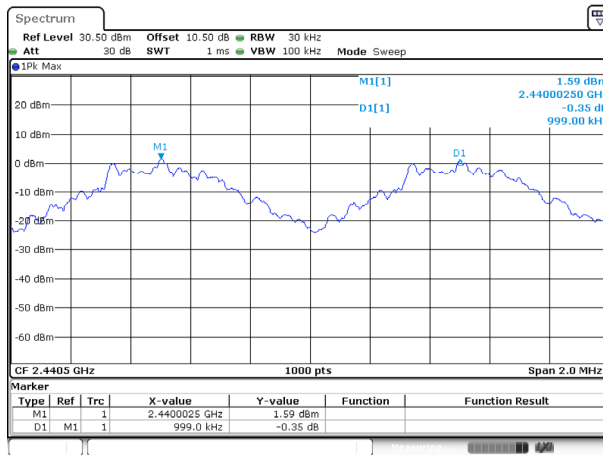

ProjectNo.:2501U62725E-RF Tester:Kungfumaeter Liang
Date: 27.JUN.2025 00:48:10

FCC §15.247(a) (1) - 20dBEMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

In some cases, the “20 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 20 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.


Test Procedure

Test Method: ANSI C63.10-2020 Clause 7.8.7 & Clause 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an un-modulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an un-modulated carrier, then turn the EUT modulation on, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “- xx dB down

amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “- xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).



Test Data

Environmental Conditions

Temperature:	23.8 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa

The testing was performed by Kungfumaster Liang on 2025-06-27.


EUT operation mode: Transmitting

Test Result: Compliant

20 dB Emission Bandwidth


Mode	Channel	Result (MHz)
GFSK	Low Channel	0.871
	Middle Channel	0.871
	High Channel	0.874

GFSK_Low

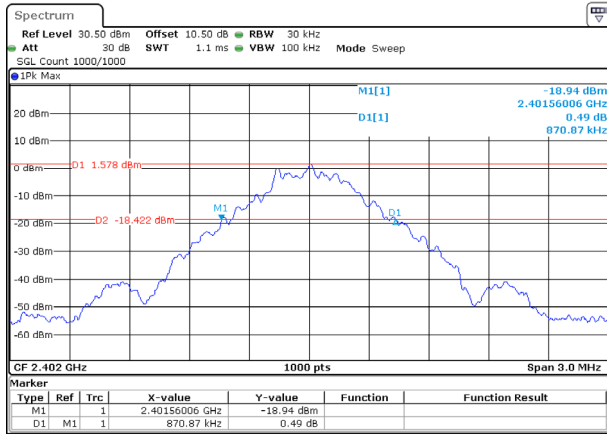


ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:36:25

GFSK_Middle

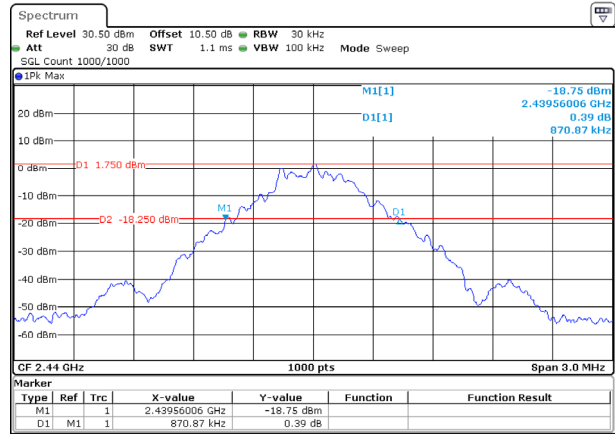

ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:41:43

GFSK_High

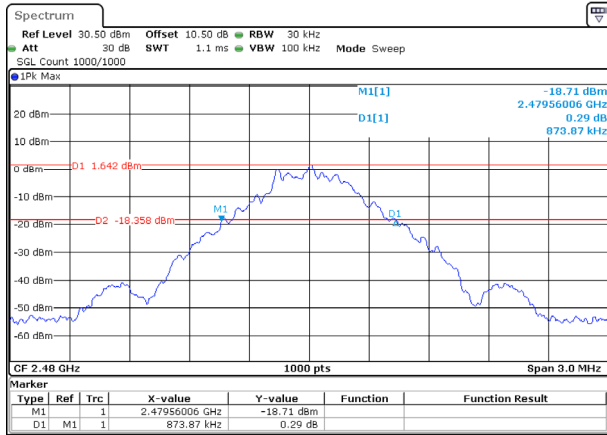


ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:43:30


99% Occupied Bandwidth

Mode	Channel	99% OBW (MHz)
GFSK	Low Channel	0.816
	Middle Channel	0.816
	High Channel	0.822


GFSK_Low

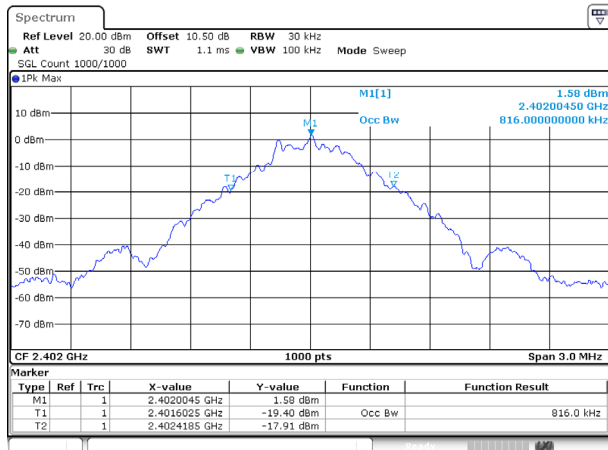

GFSK_Middle

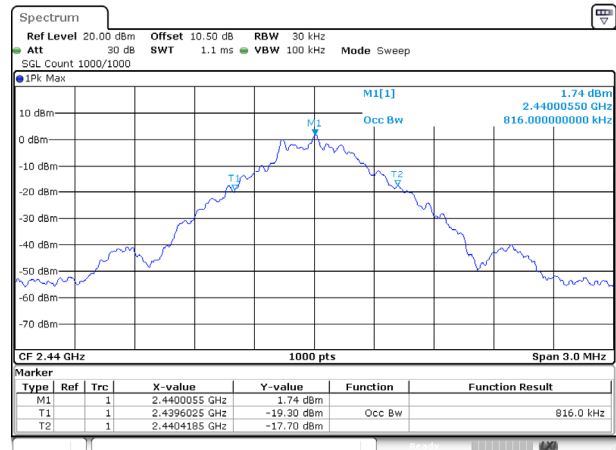

GFSK_High

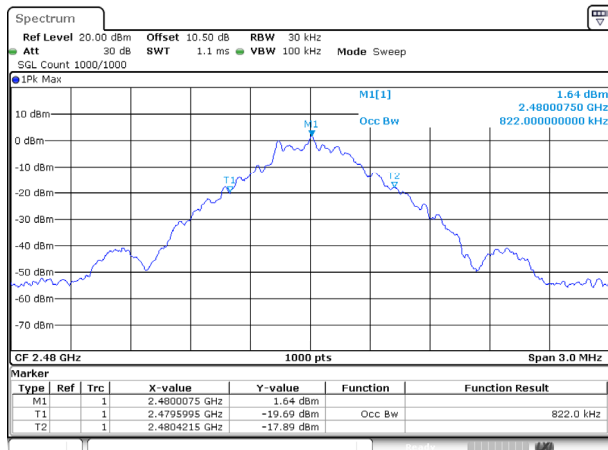

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 7.8.3

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW ≥ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.

It might prove necessary to break the span up into sub ranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels.



Test Data

Environmental Conditions

Temperature:	23.8 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa


The testing was performed by Kungfumaster Liang on 2025-06-27.

EUT operation mode: Transmitting

Test Result: Compliant

Mode	Channel	Result	Limit	Verdict
GFSK	Hopping Channel	79	15	Pass

GFSK_Hopping

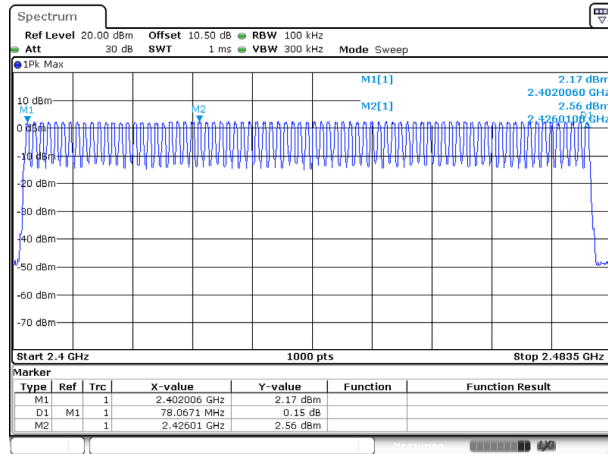

ProjectNo.:2501U62725E-RF Tester:Kungfumaister Liang
Date: 27.JUN.2025 00:50:34

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)


Applicable Standard

Frequency hopping systems (FHSs) in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses



Test Data

Environmental Conditions

Temperature:	23.8 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa

The testing was performed by Kungfumaster Liang on 2025-06-27.


EUT operation mode: Transmitting

Test Result: Compliant

Test Mode	Test Frequency (MHz)	Pulse width (ms)	Observation time (s)	Hopping Numbers in 3.2s Observation time	Total Hopping Numbers in Observation time	Dwell Time (s)	Limit (s)
GFSK	2440	0.404	31.6	32	320	0.129	0.400

Note 1: Observation time= Hopping Channel Number× 0.4

Note 2: Dwell Time = Pulse width *Total Hopping Numbers in Observation time

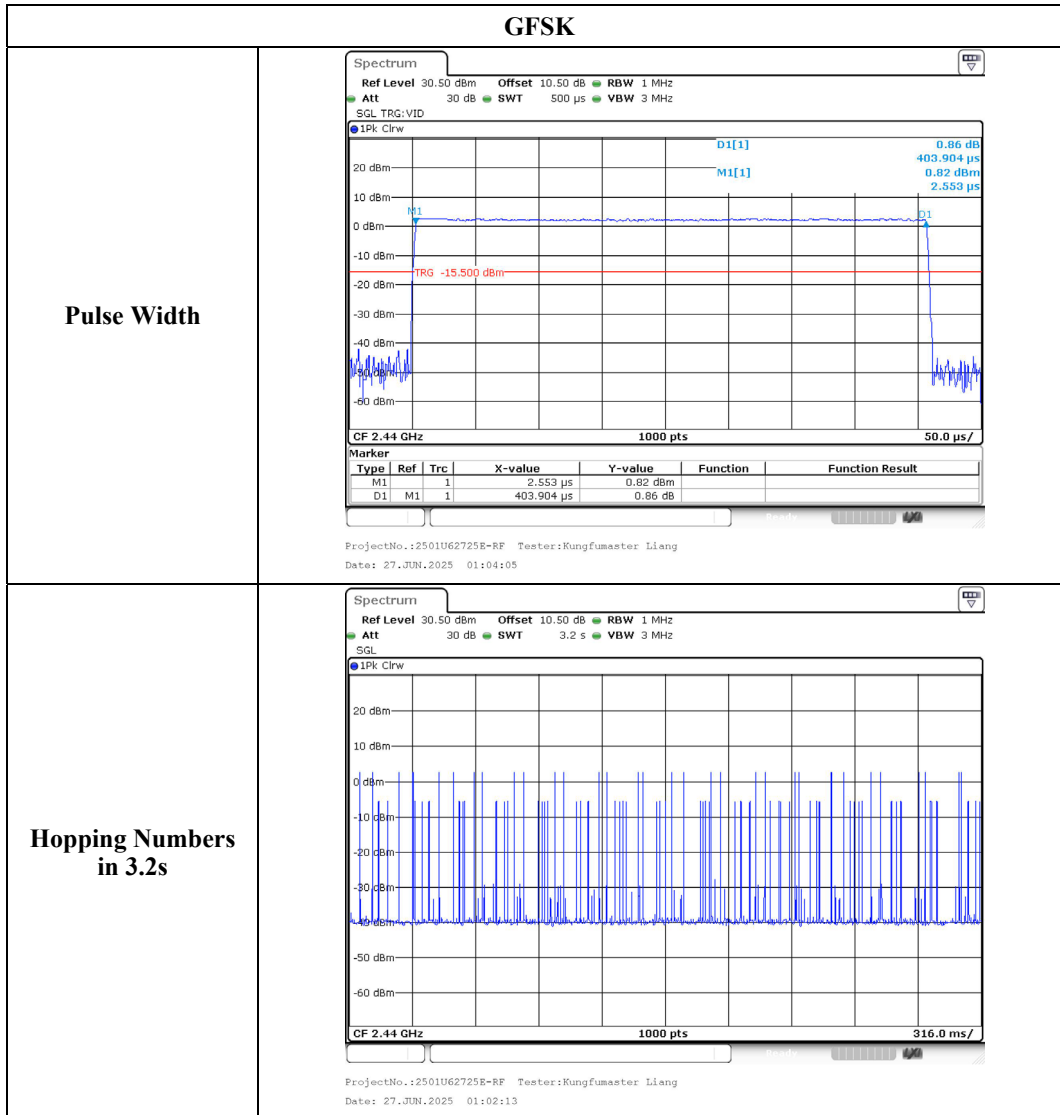

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

Test Method: ANSI C63.10-2020 Clause 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:


a) Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW ≥ RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.



Test Data**Environmental Conditions**

Temperature:	23.8 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa


The testing was performed by Kungfumaster Liang on 2025-06-27.

EUT operation mode: Transmitting

Test Result: Compliant


Mode	Test Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Verdict
GFSK	2402	2.59	21.00	Pass
	2440	2.71	21.00	Pass
	2480	2.65	21.00	Pass

GFSK_Low

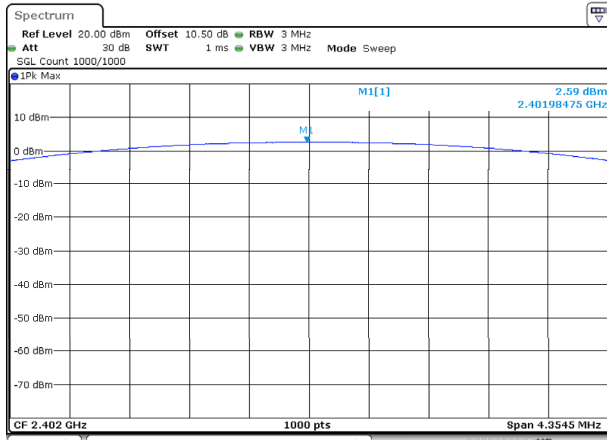


ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:37:01

GFSK_Middle

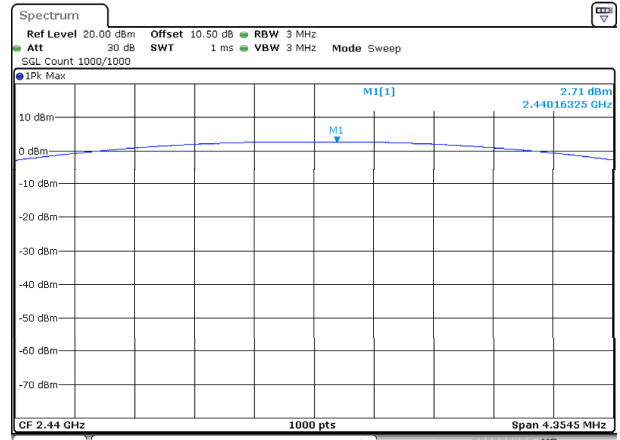

ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:43:06

GFSK_High

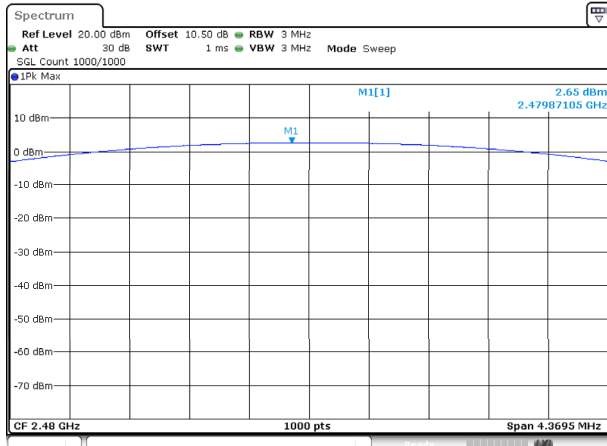

ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:44:03

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard


According to FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2020 Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions


Temperature:	23.8 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa

The testing was performed by Kungfumaster Liang on 2025-06-27.

EUT operation mode: Transmitting


Test Result: Compliant

GFSK_Low

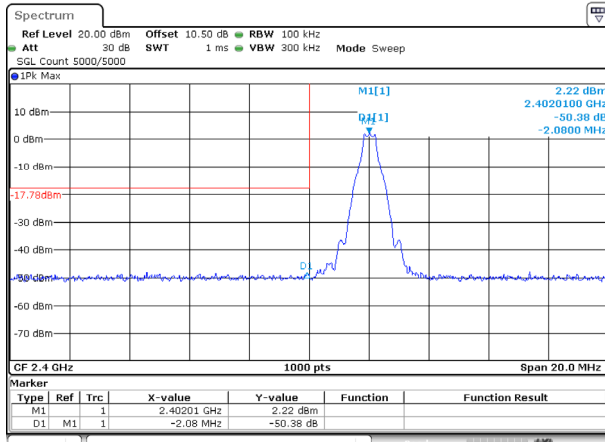


ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:39:48

GFSK_High

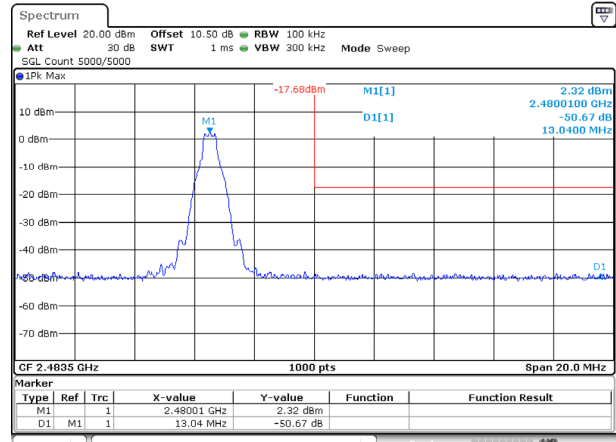


ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:45:53

GFSK_Hopping_Lower

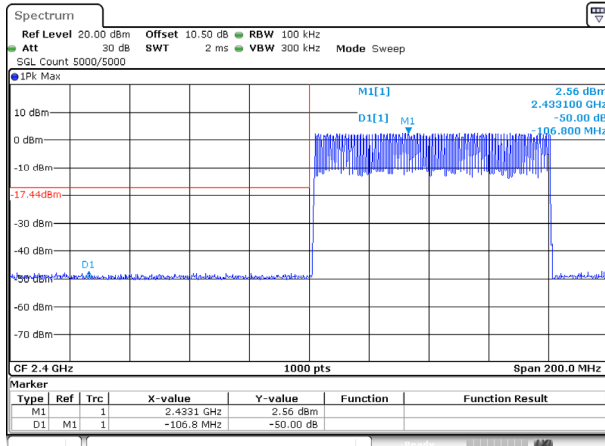

ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:52:32

GFSK_Hopping_Upper

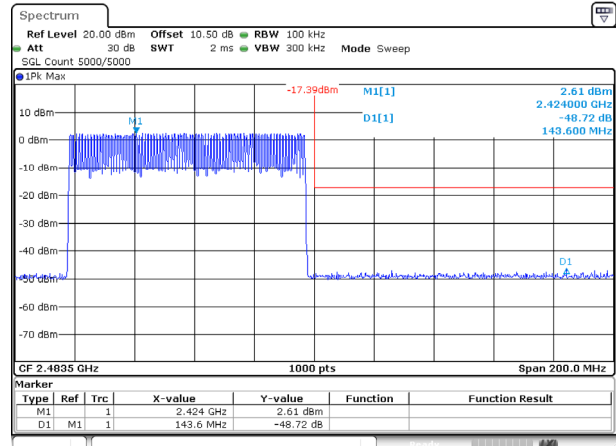

ProjectNo.:2501U62725E-RF Tester:Kungfumaster Liang
Date: 27.JUN.2025 00:54:08

EUT PHOTOGRAPHS

Please refer to the attachment 2501U62725E-RF External photo and 2501U62725E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2501U62725E-RF Test Setup photo.

******* END OF REPORT *******