

**EXHIBIT 8 – EMC TEST REPORT**

**See Attached**



Test Report Serial Number:

45461470 R2.0

Test Report Date:

16 November 2018

Project Number:

1425

## EMC Test Report - New Filing

Applicant:



**Zinck Engineering Limited**  
131 Ilesley Ave, Unit C  
Dartmouth, NS B3B 1T1  
Canada

FCC ID:

**2ARN7RADIOCAPE100**

Product Model Number / HVIN

**IMPHC100**

IC Registration Number

**24195-RADCAPE100**

Product Name / PMN

**RadioCape**

In Accordance With:

**CFR Title 47, Part 15 Subpart C (§15.247), Part 15 Subpart B**

Digital Transmission System (DTS)

**RSS-Gen, RSS-247 Issue 2**

Digital Transmission Systems (DTSs)

Approved By:

**Ben Hewson, President**

Celltech Labs Inc.

21-364 Lougheed Rd.

Kelowna, BC, V1X 7R8

Canada



Test Lab Certificate: 2470.01



Industry  
Canada

IC Registration 3874A-1



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

© 2016 Celltech Labs Inc.

## Table of Contents

1.0 - DOCUMENT CONTROL .....	5
2.0 - CLIENT AND DUT INFORMATION .....	6
3.0 - SCOPE .....	7
4.0 - TEST SUMMARY .....	8
5.0 - NORMATIVE REFERENCES .....	9
6.0 - FACILITIES AND ACCREDITATIONS .....	10
7.0 - DUTY CYCLE EVALUATION .....	11
8.0 - OCCUPIED BANDWIDTH .....	16
9.0 - 6DB DTS BANDWIDTH .....	21
10.0 - CONDUCTED FUNDAMENTAL POWER .....	26
11.0 - POWER SPECTRAL DENSITY .....	32
12.0 - CONDUCTED SPURIOUS EMISSIONS .....	38
13.0 - BAND EDGE .....	55
14.0 - RESTRICTED BANDS .....	60
15.0 - RADIATED RX SPURIOUS EMISSIONS .....	73
16.0 - POWER LINE CONDUCTED EMISSIONS .....	77
APPENDIX A - TEST SETUP DRAWINGS AND CONDITIONS .....	81
APPENDIX B - EQUIPMENT LIST AND CALIBRATION .....	86
APPENDIX C - MEASUREMENT INSTRUMENT UNCERTAINTY .....	87

## Table of Figures

Figure A.1 – Test Setup – Conducted Measurements .....	81
Figure A.2 – Test Setup Radiated Measurements 30MHz – 1GHz .....	83
Figure A.3 – Test Setup Power Line Conducted Measurements .....	85

**Table of Plots**

Plot 7.1 – Transmit Duty Cycle - 2405 MHz.....	12
Plot 7.2 – Transmit Duty Cycle - 2440 MHz.....	13
Plot 7.3 – Transmit Duty Cycle - 2480 MHz.....	14
Plot 8.1 – Occupied Bandwidth - 2405MHz .....	17
Plot 8.2 – Occupied Bandwidth - 2440MHz .....	18
Plot 8.3 – Occupied Bandwidth - 2480MHz .....	19
Plot 9.1 – 6dB DTS Bandwidth - 2405MHz.....	22
Plot 9.2 – 6dB DTS Bandwidth - 2440MHz.....	23
Plot 9.3 – 6dB DTS Bandwidth - 2480MHz.....	24
Plot 10.1 – Maximum Conducted Power - 2405MHz.....	28
Plot 10.2 – Maximum Conducted Power – 2440MHz .....	29
Plot 10.3 – Maximum Conducted Power – 2480MHz .....	30
Plot 11.1 – Power Spectral Density – 2405MHz.....	34
Plot 11.2 – Power Spectral Density – 2440MHz .....	35
Plot 11.3 – Power Spectral Density – 2480MHz .....	36
Plot 12.1 – Reference Level Measurement – 2405MHz .....	40
Plot 12.2 – Reference Level Measurement – 2440MHz .....	41
Plot 12.3 – Reference Level Measurement – 2480MHz .....	42
Plot 12.4 – Conducted Spurious Emissions – 90kHz - 1MHz.....	44
Plot 12.5 – Conducted Spurious Emissions – 1MHz - 10MHz.....	45
Plot 12.6 – Conducted Spurious Emissions – 10MHz - 100MHz.....	46
Plot 12.7 – Conducted Spurious Emissions – 100MHz - 1000MHz.....	47
Plot 12.8 – Conducted Spurious Emissions – 1GHz – 3GHz .....	48
Plot 12.9 – Conducted Spurious Emissions – 3GHz – 10GHz .....	49
Plot 12.10 – Conducted Spurious Emissions – 10GHz – 13.6GHz .....	50
Plot 12.11 – Conducted Spurious Emissions – 13.6GHz – 25GHz .....	51
Plot 12.12 – Conducted Spurious Emissions – 4.81GHz .....	52
Plot 12.13 – Conducted Spurious Emissions – 7.215GHz .....	53
Plot 13.1 – Lower Band Edge – 2405MHz.....	57
Plot 13.2 – Upper Band Edge – 2480MHz.....	58
Plot 14.1 – Restricted Band – 9kHz – 150kHz.....	63
Plot 14.2 – Restricted Band – 150kHz – 1MHz.....	64
Plot 14.3 – Restricted Band – 1MHz – 30MHz .....	65
Plot 14.4 – Restricted Band – 30MHz – 1000MHz .....	66
Plot 14.5 – Restricted Band – 1GHz – 30GHz .....	67
Plot 14.6 – Restricted Band – 3GHz – 13.6GHz .....	68
Plot 14.7 – Restricted Band – 13.6GHz – 25GHz .....	69
Plot 14.8 – Restricted Band – 4.81GHz .....	70
Plot 14.9 – Restricted Band – 7.215GHz .....	71
Plot 15.1 – Radiated Emissions 30MHz – 1000MHz, Horizontal.....	74
Plot 15.2 – Radiated Emissions 30MHz – 1000MHz, Vertical.....	75
Plot 16.1 – Power Line Conducted – L1 .....	78
Plot 16.2 – Power Line Conducted – L2 .....	79

## Table of Tables

<i>Table 7.1 – Summary of Duty Cycle Evaluation .....</i>	15
<i>Table 8.1 – Summary of Occupied Bandwidth Measurements.....</i>	20
<i>Table 9.1 – Summary of 6dB DTS Bandwidth Measurements .....</i>	25
<i>Table 10.1 – Summary of Maximum Conducted Power Measurements .....</i>	31
<i>Table 11.1 – Summary of Power Spectral Density Measurements .....</i>	37
<i>Table 12.1 – Summary of Reference Level Measurements .....</i>	43
<i>Table 12.2 – Summary of Conducted Spurious Emissions Measurements .....</i>	54
<i>Table 13.1 – Summary of Band Edge Measurements.....</i>	59
<i>Table 14.1 – Summary of Restricted Band Measurements .....</i>	72
<i>Table 15.1 – Summary of Radiated Rx Spurious Emissions.....</i>	76
<i>Table 16.1 – Summary of Power Line Conducted Emissions.....</i>	80
<i>Table A.1 – Conducted Measurement Setup and Environmental.....</i>	81
<i>Table A.2 – Radiated Emissions Measurement Equipment and Environmental.....</i>	82
<i>Table A.3 – Power Line Conducted Measurement Equipment and Environmental.....</i>	84

**1.0 - DOCUMENT CONTROL**

Revision History				
Samples Tested By:		Date(s) of Evaluation:		24 Oct - 8 Nov, 2018
Report Prepared By:		Report Reviewed By:		Ben Hewson
Report Revision	Description of Revision	Revised Section	Revised By	Revision Date
1.0	Initial Release	n/a	Art Voss	8 November 2018
2.0	Revised per TCB POH 1931UC18 Revised per TCB POH 1931IC18	all	Art Voss	16 November 2018

**2.0 - CLIENT AND DUT INFORMATION**

<b>Client Information</b>	
<b>Applicant Name</b>	Zinck Engineering Limited
	131 Ilsley Ave, Unit C
<b>Applicant Address</b>	Dartmouth, NS
	B3B 1T1
	Canada
<b>DUT Information</b>	
<b>Device Identifier(s):</b>	<b>FCC ID:</b> 2ARM7RADIOCAPE100
	<b>ISED ID:</b> 24195-RADCAPE100
<b>Device Type:</b>	Digital Transceiver Module
<b>Type of Equipment:</b>	Digital QPSK Transceiver Module (802.15.4)
<b>Device Model(s) / HVIN:</b>	IMPHC100
<b>Device Marketing Name / PMN:</b>	RadioCape
<b>Firmware Version ID Number / FVIN:</b>	-
<b>Host Marketing Name / HMN:</b>	Imperisys Home Controller
<b>Test Sample Serial No.:</b>	T/A Sample - Identical Prototype
<b>Transmit Frequency Range:</b>	2405 - 2480MHz
<b>Test Channels:</b>	16 Channel Programmable
<b>Manuf. Max. Rated Output Power:</b>	18.29dBm, 0.067W, +/- 0.5dB
<b>Manuf. Max. Rated BW/Data Rate:</b>	3MHz
<b>Antenna Make and Model:</b>	Shenzhen Sida P/N: SA5JB2.4SMA
<b>Antenna Type and Gain:</b>	Whip, 5dBi Nominal
<b>Modulation:</b>	O-QPSK
<b>Mode:</b>	Simplex
<b>Emission Designator:</b>	See Section 8.0
<b>DUT Power Source:</b>	5VDC
<b>DUT Dimensions [HxWxD] (mm)</b>	H x W x D: 25mm x 85mm x 55mm
<b>Deviation(s) from standard/procedure:</b>	None
<b>Modification of DUT:</b>	None

### 3.0 - SCOPE

This Certification Report was prepared on behalf of:

#### **Zinck Engineering Limited**

,(the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and ,unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC CFR 47 Part §2.1091 and §2.1093 and Health Canada Safety Code 6, an RF Exposure evaluation report is required for this *Equipment* and the results of the RF Exposure evaluation appear in a separate exhibit from this report.

#### **Application:**

This application is for a new certification of a modular transmitter, as per FCC 47 CFR §15.212(a)(1) and ISED RSP-100 (5.3.2), as a **Limited Split Modular Approval**. The associated modular transmitter checklists accompany this report as a separate exhibit.

**4.0 - TEST SUMMARY**

**TEST SUMMARY**

Section	Description of Test	Procedure Reference	Applicable Rule Part(s) FCC	Applicable Rule Part(s) ISED	Test Date	Result
<b>7.0</b>	Duty Cycle and Transmission Duration	ANSI C63.10-2013 KDB 558074 D01v05	n/a	n/a	29 Oct 2018	n/a
<b>8.0</b>	Occupied Bandwidth	ANSI C63.10-2013 KDB 558074 D01v05	§2.1049 n/a	RSS-Gen RSS-247 (5.2)(a)	29 Oct 2018	Pass
<b>9.0</b>	6dB Bandwidth	ANSI C63.10-2013 KDB 558074 D01v05	n/a §15.247(a)(2)	RSS-Gen RSS-247 (5.2)(a)	29 Oct 2018	Pass
<b>10.0</b>	Conducted Power (Fundamental)	ANSI C63.10-2013 KDB 558074 D01v05	§2.1046 §15.247(b)(3)	RSS-Gen RSS-247 (5.4)(d)	29 Oct 2018	Pass
<b>11.0</b>	Power Spectral Density	ANSI C63.10-2013 KDB 558074 D01v05	§15.247(e)	RSS-247 (5.2)(b)	30 Oct 2018	Pass
<b>12.0</b>	Conducted TX Spurious Emissions	ANSI C63.10-2013 KDB 558074 D01v05	§2.1051 §15.247(d)	RSS-Gen RSS-247 (5.5)	30 Oct 2018	Pass
<b>13.0</b>	Conducted TX Spurious Emissions Band Edge	ANSI C63.10-2013 KDB 558074 D01v05	§2.1051 §15.247(d)	RSS-Gen RSS-247 (5.5)	1 Nov 2018	Pass
<b>14.0</b>	Conducted TX Spurious Emissions Restricted Bands	ANSI C63.10-2013 KDB 558074 D01v05	§15.205, 15.209 §15.247(d)	n/a	30 Oct 2018	Pass
<b>15.0</b>	Radiated RX Spurious Emissions	ANSI C63.4-2014 KDB 558074 D01v05	§15.109 §15.247(d)	ICES-003(6.2)	1 Nov 2018	Pass
<b>16.0</b>	Power Line Conducted Emissions	ANSI C63.4-2014	§15.107	ICES-003(6.1)	1 Nov 2018	Pass

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.  
Technical Manager  
Celltech Labs Inc.  
8 November 2018

Date




## 5.0 - NORMATIVE REFERENCES

<b>Normative References</b>	
ISO/IEC 17025:2017	General requirements for the competence of testing and calibration laboratories
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
CFR	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Sub Part C (15.247) Intentional Radiators
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Subpart B: Unintentional Radiators
ISED	Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification RSS-Gen Issue 5: General Requirements and Information for the Certification of Radiocommunication Equipment
ISED	Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification RSS-247 Issue 2: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licensed-Exempt Local Area Network (LE_LAN) Devices
FCC KDB	OET Major Guidance Publications, Knowledge Data Base 558074 D01v05 Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247

## 6.0 - FACILITIES AND ACCREDITATIONS

### Facility and Accreditation:

The facilities used to evaluate this device outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874 and Innovation, Science and Economic Development Canada under Test Site File Number ISED 3874A-1. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

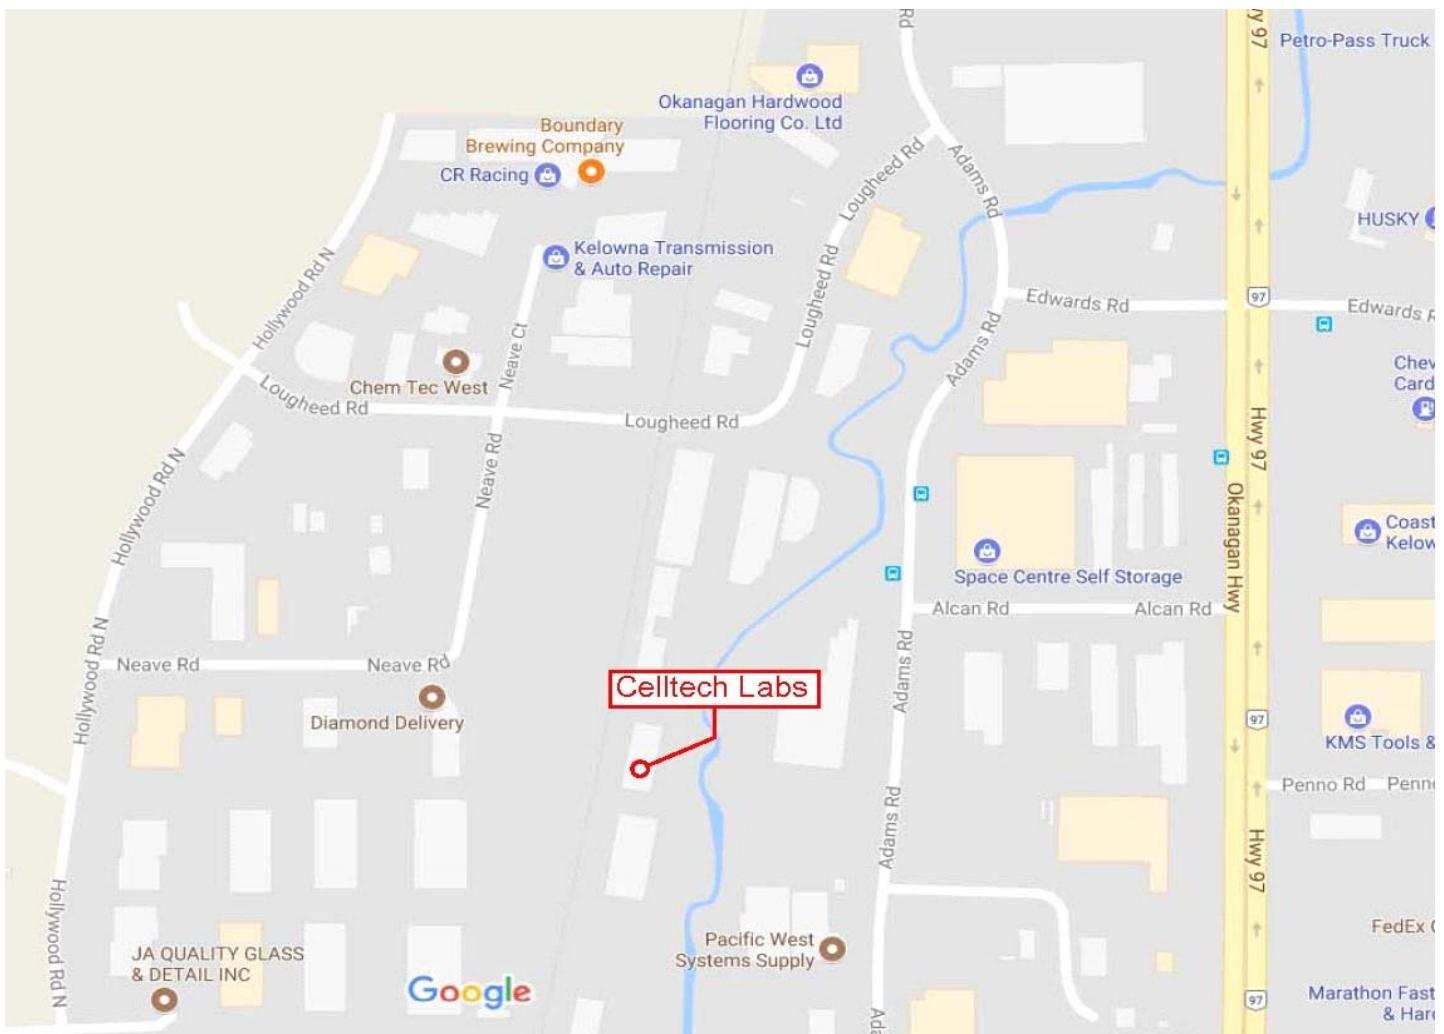

## 7.0 - DUTY CYCLE EVALUATION

### Test Procedure

Normative Reference	KDB 558074 (6.0), ANSI C63.10 (11.6)
---------------------	--------------------------------------

### Limits


KDB 558074 (6.0) C63.10 (11.6)	<p><b>6.0 Duty cycle, transmission duration and maximum power control level</b></p> <p>b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on- and off-times of the transmitted signal.</p> <ol style="list-style-type: none"> <li>1) Set the center frequency of the instrument to the center frequency of the transmission.</li> <li>2) Set <math>RBW \geq OBW</math> if possible; otherwise, set <math>RBW</math> to the largest available value.</li> <li>3) Set detector = peak or average.</li> <li>4) The zero-span measurement method shall not be used unless both <math>RBW</math> and <math>VBW</math> are <math>&gt; 50/T</math> and the number of sweep points across duration <math>T</math> exceeds 100.</li> </ol>
-----------------------------------	--

Test Setup	Appendix A	Figure A.1
------------	------------	------------


### Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as above using the Zero Span and Positive Trigger. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle. The variation in Duty Cycle was determined to be less than +/- 2%.

**Plot 7.1 – Transmit Duty Cycle - 2405 MHz**

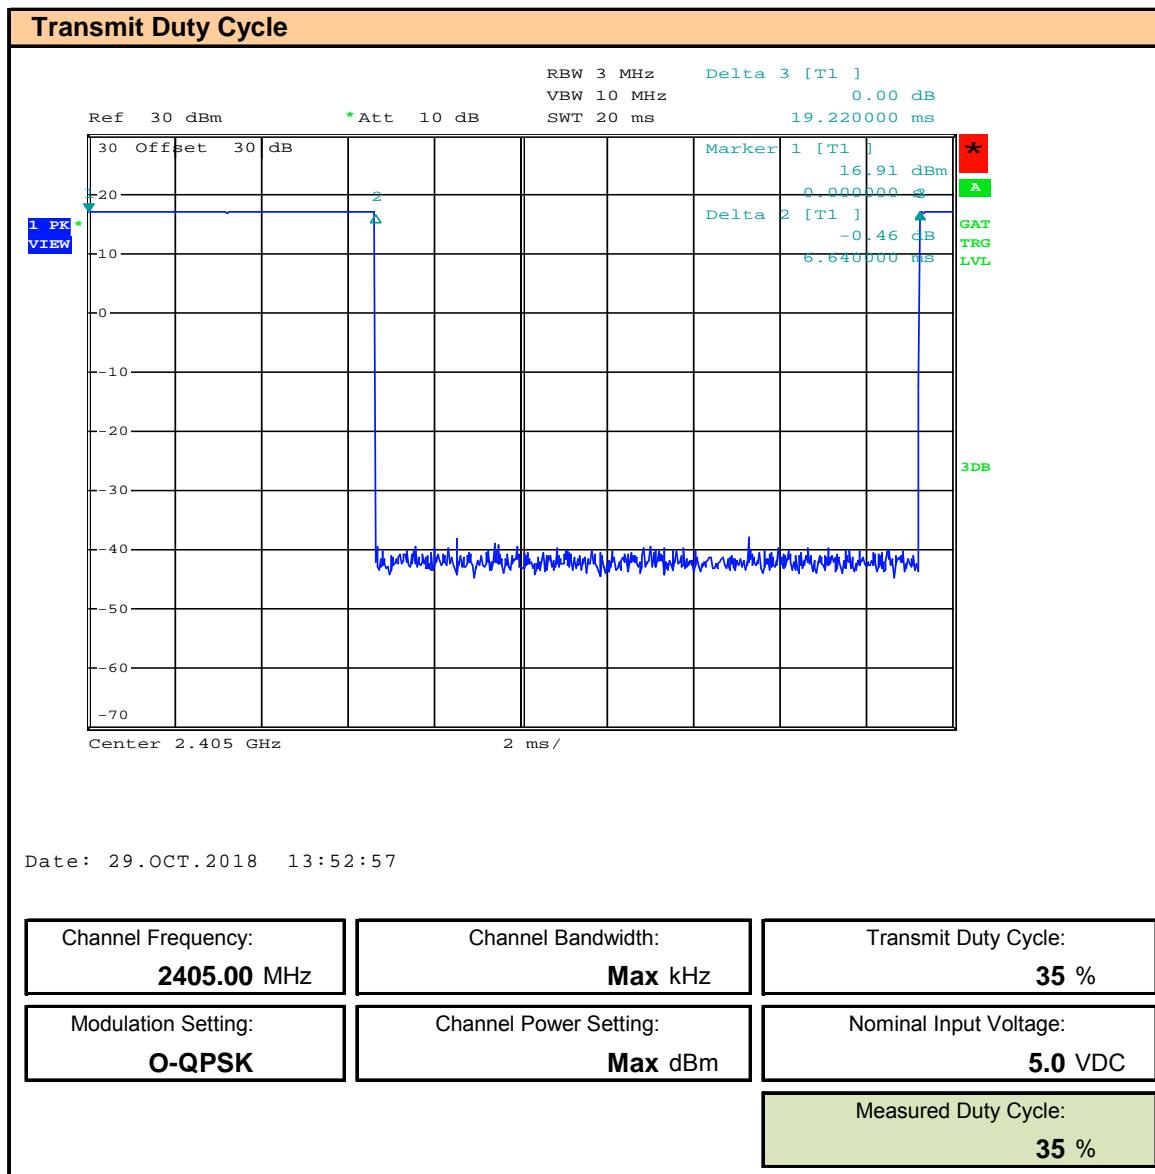

**Plot 7.2 – Transmit Duty Cycle - 2440 MHz**

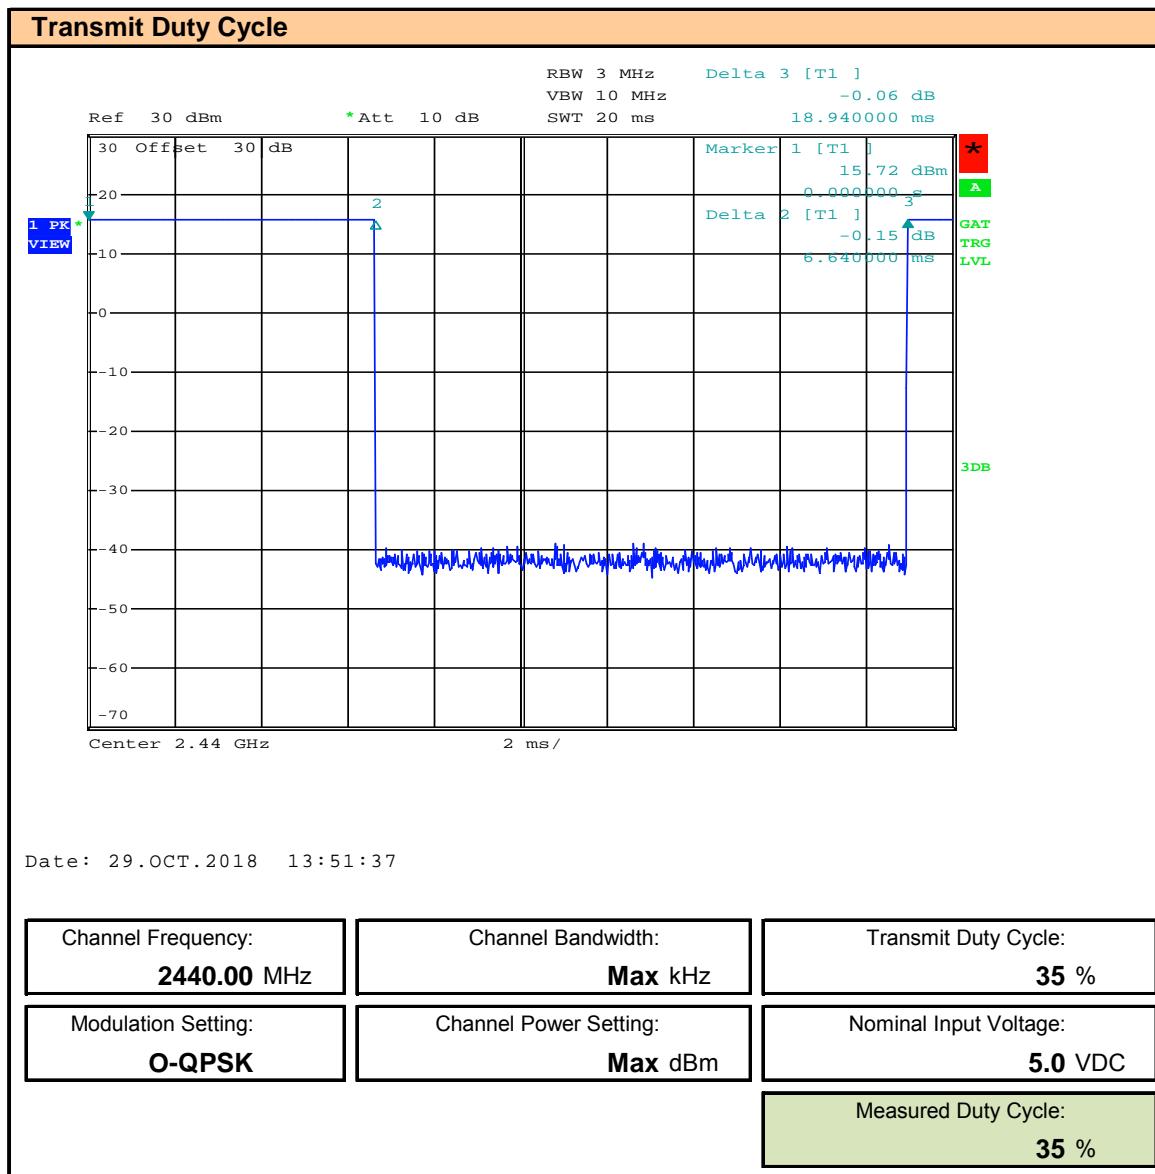

**Plot 7.3 – Transmit Duty Cycle - 2480 MHz**

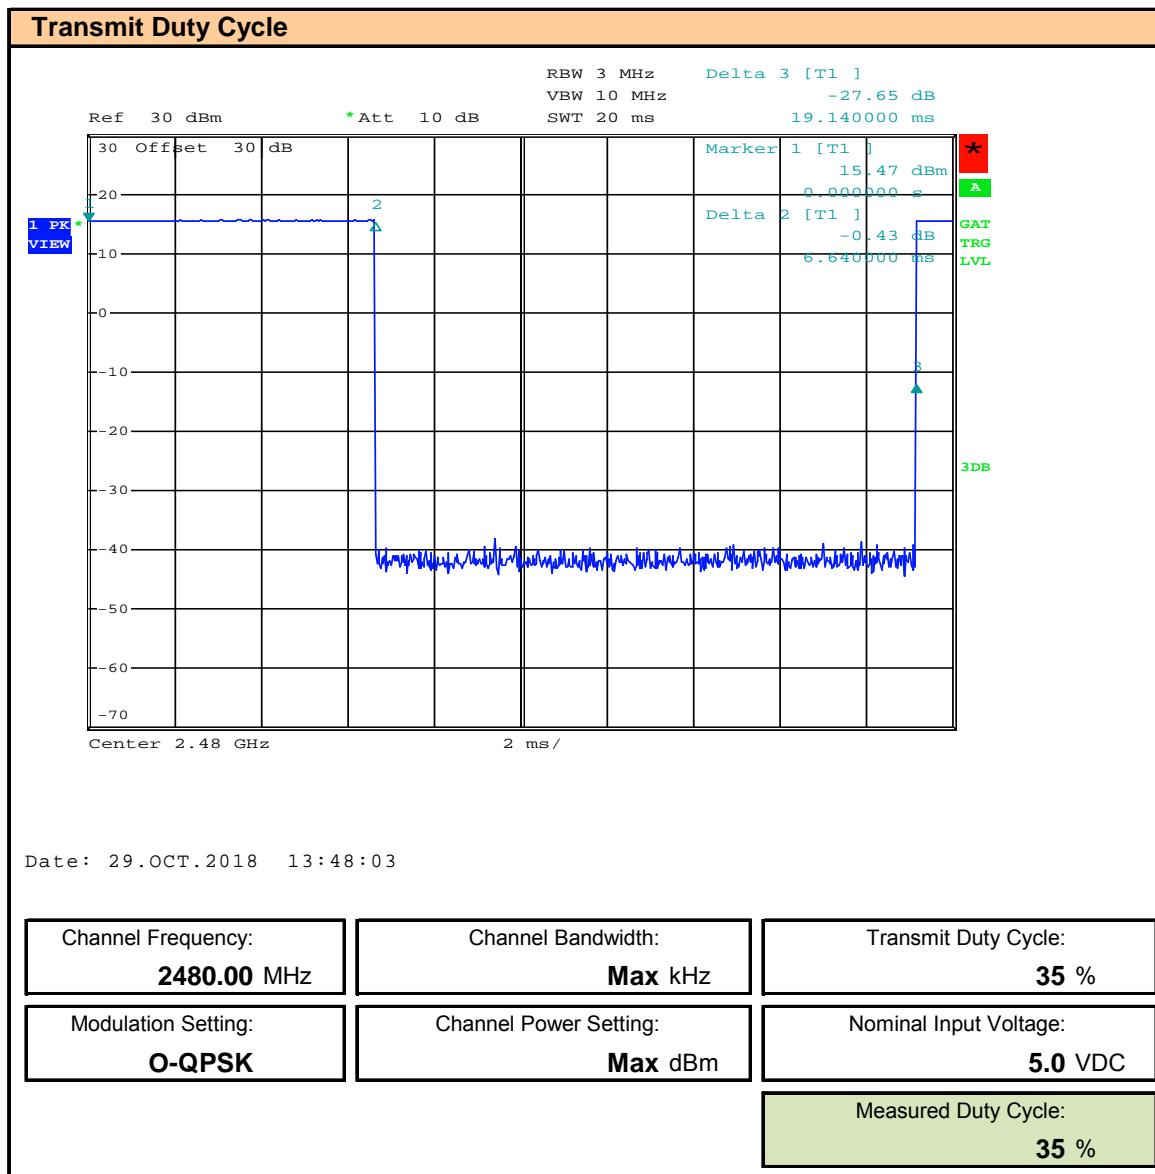


Table 7.1 – Summary of Duty Cycle Evaluation

Transmit Duty Cycle Results				
Frequency (MHz)	Bandwidth Setting (kHz)	Modulation	Supply Voltage (VDC)	Measured Duty Cycle Cycle (%)
2405.00	Max	O-QPSK	5.0	35
2440.00				35
2480.00				35

The variation of the transmit duty cycle was less than 2%

## 8.0 - OCCUPIED BANDWIDTH

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d), KDB 558074 (9.2.1), ANSI C63.10 (6.9.3)
----------------------------	--


### Limits

KDB 558074 (9.2.1)	<p>9.2.1 General</p> <p>Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.</p>
C63.10 (6.9.3)	<p>6.9.3 Occupied bandwidth—power bandwidth (99%) measurement procedure</p> <p>The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:</p> <ul style="list-style-type: none"> <li>a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.</li> <li>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.</li> <li>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than <math>[10 \log (\text{OBW}/\text{RBW})]</math> below the reference level. Specific guidance is given in 4.1.5.2.</li> <li>d) Step a) through step c) might require iteration to adjust within the specified range.</li> <li>e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.</li> <li>f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.</li> </ul>


<b>Test Setup</b>	<b>Appendix A</b>	<b>Figure A.1</b>
-------------------	-------------------	-------------------

<b>Measurement Procedure</b>
The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above using the 99% Occupied Bandwidth function. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle. The 99% Occupied Bandwidth was measured and recorded and used for the basis for measuring the Conducted Output Power (See Section 10.0) and Power Spectral Density (See Section 11.0).

**Plot 8.1 – Occupied Bandwidth - 2405MHz**

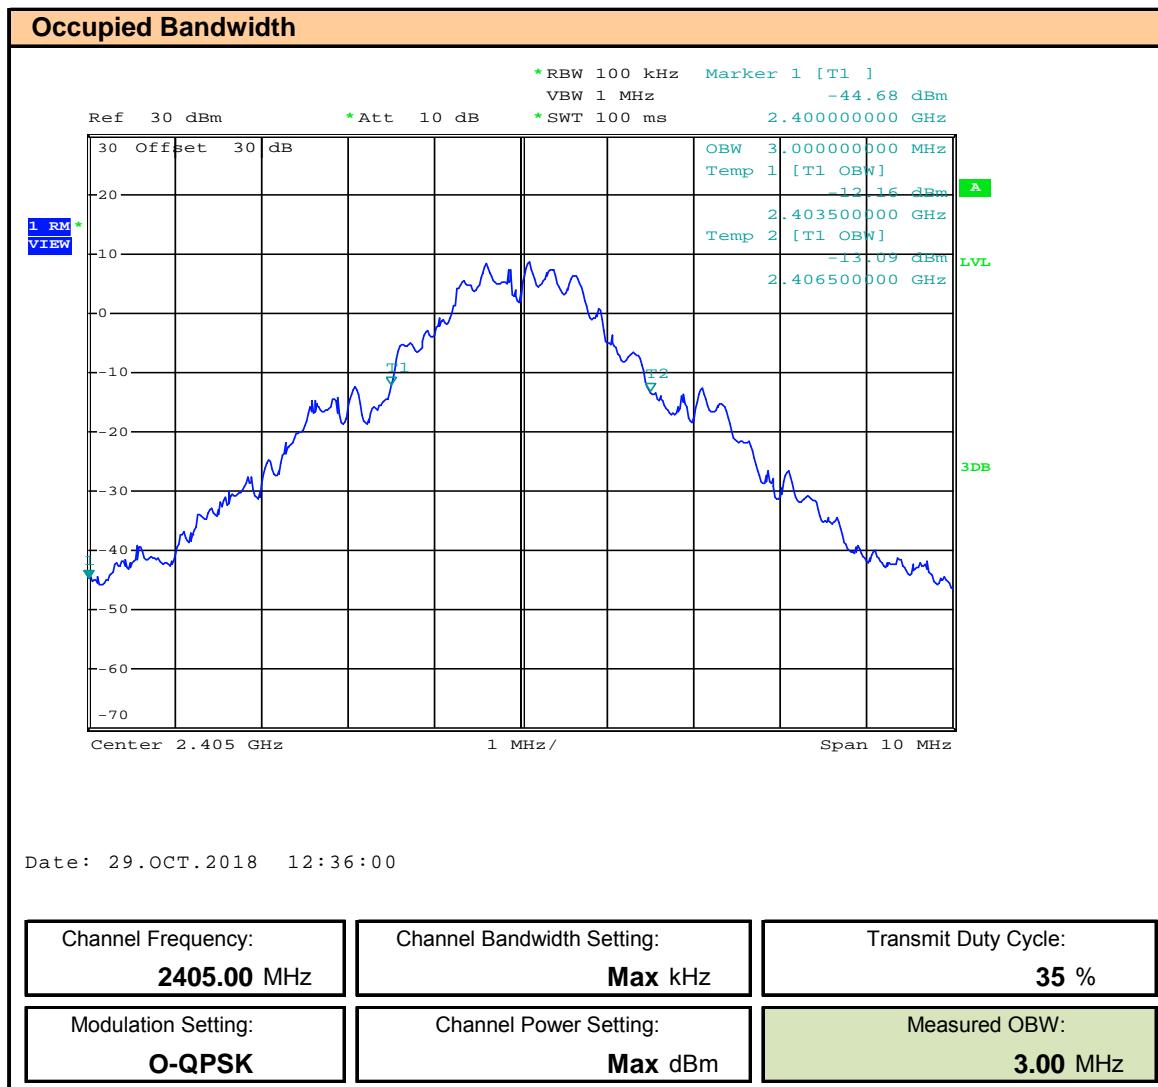

**Plot 8.2 – Occupied Bandwidth - 2440MHz**

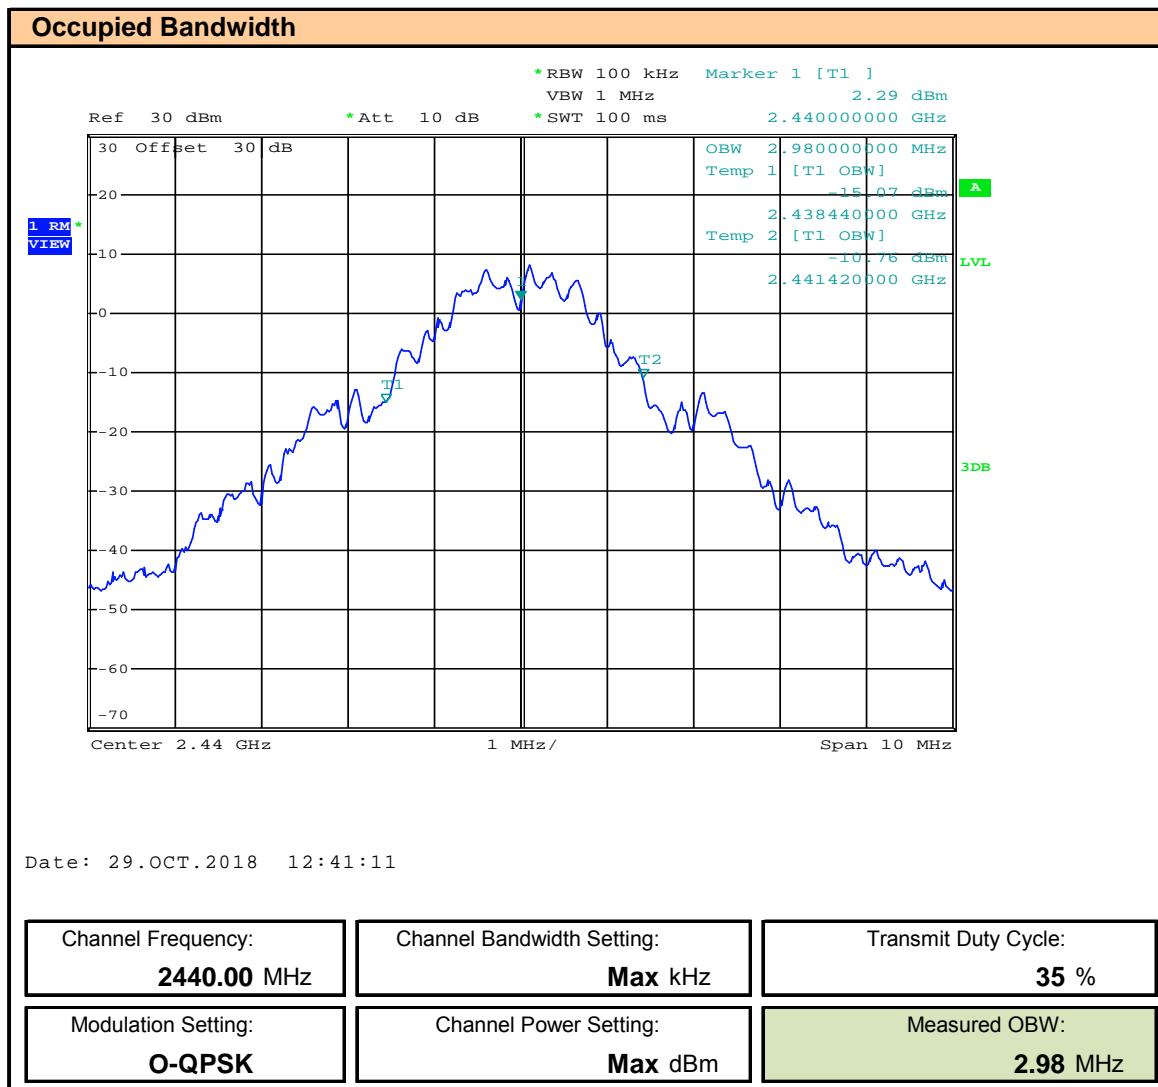

**Plot 8.3 – Occupied Bandwidth - 2480MHz**

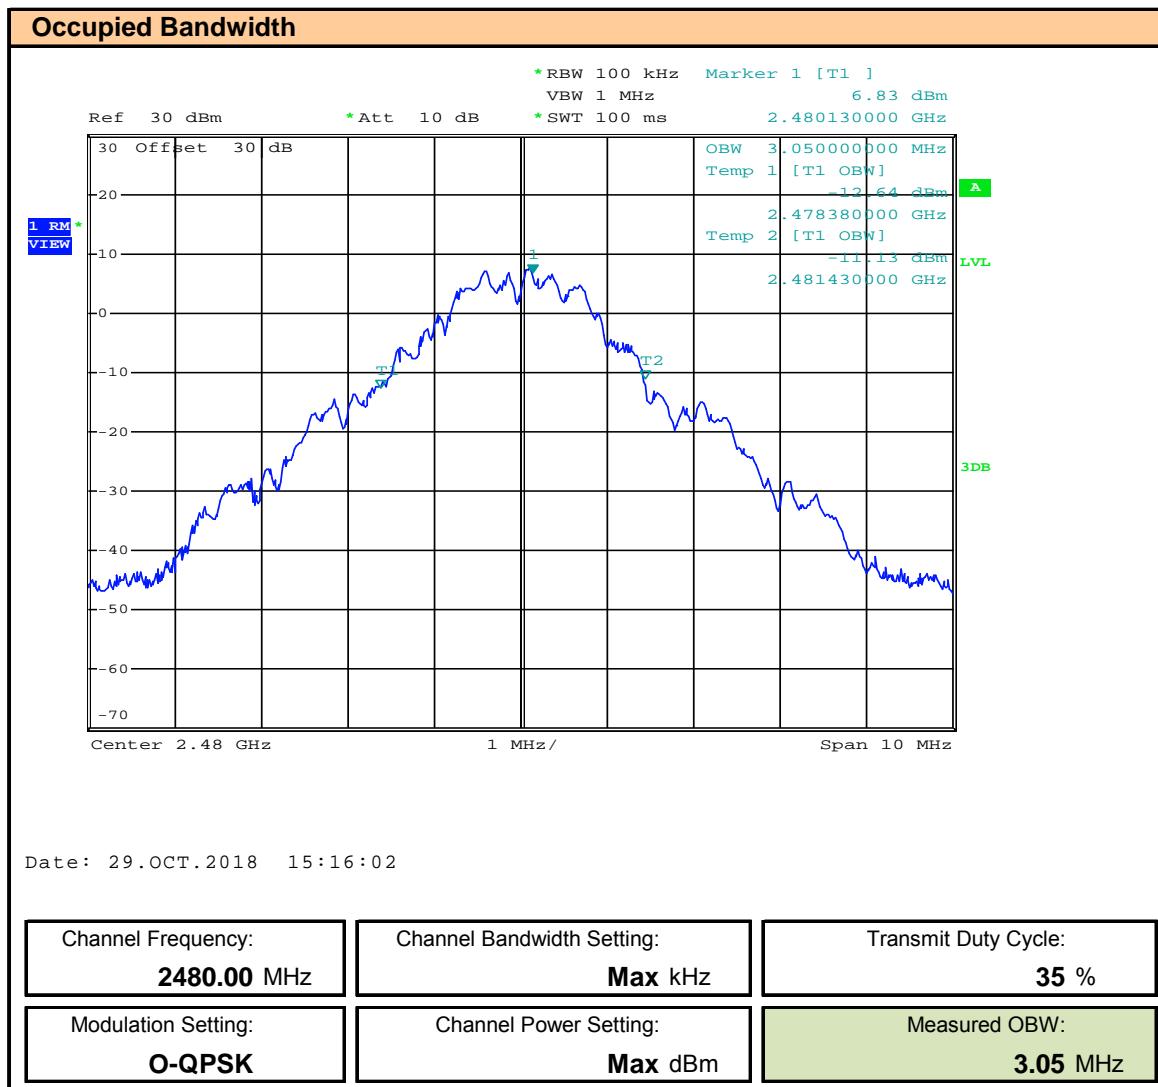


Table 8.1 – Summary of Occupied Bandwidth Measurements

Occupied Bandwidth Measurements				
Frequency (MHz)	Bandwidth Setting (MHz)	Modulation	Measured OBW (MHz)	Emission Designator
2405.00	Max	O-QPSK	3.00	3M00G1D
2440.00			2.98	2M98G1D
2480.00			3.05	3M95G1D

## 9.0 - 6DB DTS BANDWIDTH

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §2.1049, §15.247(a)(2), RSS-Gen (6.7), RSS-247 (5.2)(a), KDB 558074 (8.2), ANSI C63.10 (11.8.2)
----------------------------	---


### Limits

47 CFR §15.247(a)(2)	(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
RSS-247 (5.2)(a)	5.2 Digital transmission systems DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400 - 2483.5 MHz: a) The minimum 6 dB bandwidth shall be 500 kHz.
KDB 558074 (8.2) C63.10 (11.8.2)	<b>8.2 Option 2</b> The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3 X RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq$ 6 dB.


<b>Test Setup</b>	<b>Appendix A</b>	<b>Figure A.1</b>
-------------------	-------------------	-------------------

<b>Measurement Procedure</b>
The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as above using the Automatic 6dB Cursor Bandwidth measurement. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle.

**Plot 9.1 – 6dB DTS Bandwidth - 2405MHz**

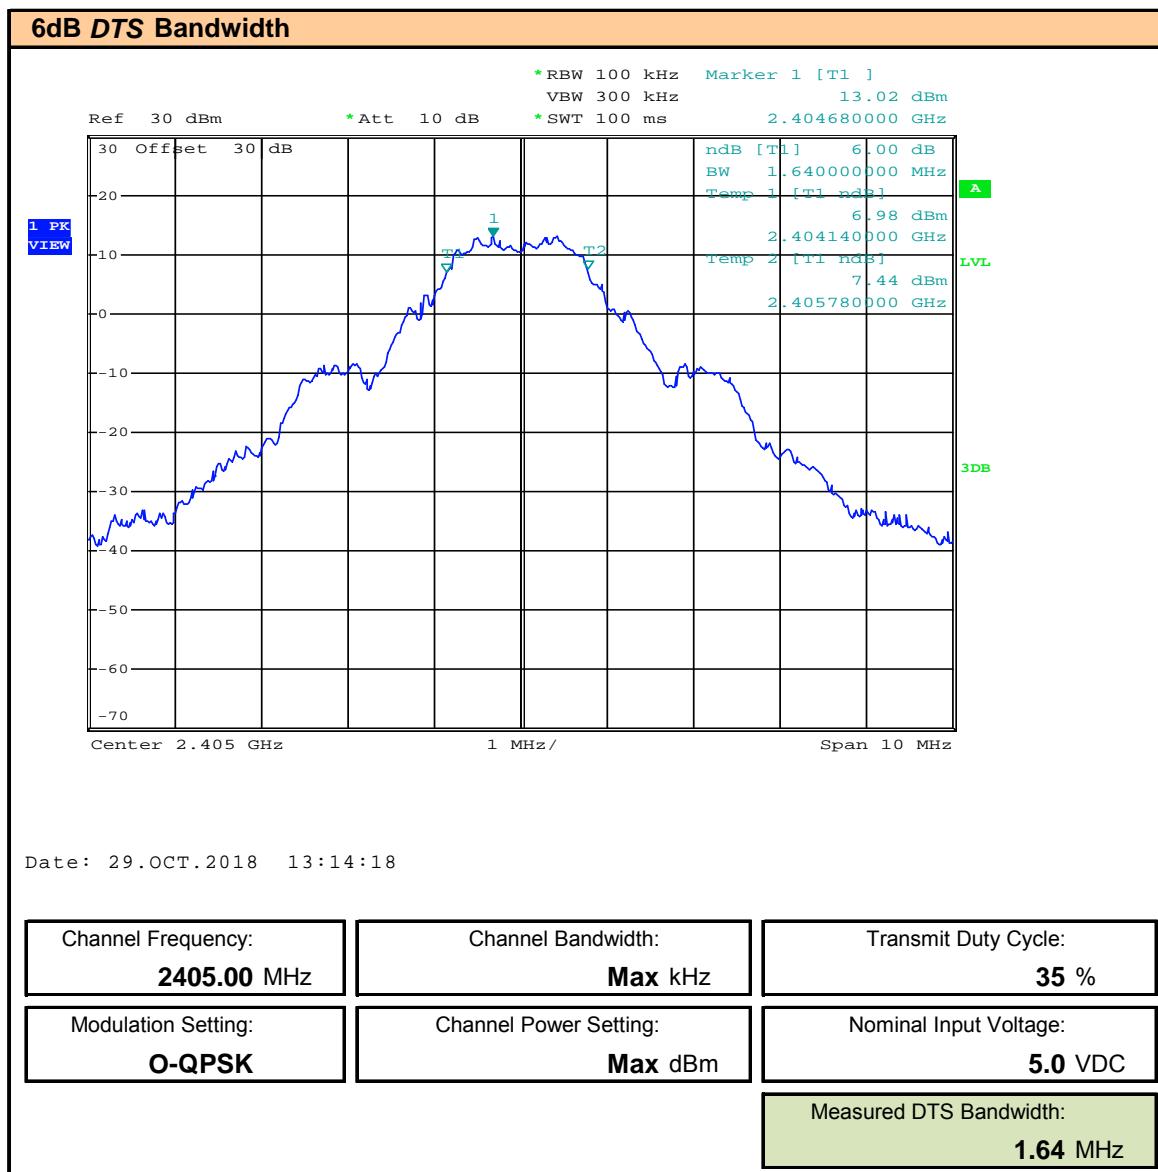

**Plot 9.2 – 6dB DTS Bandwidth - 2440MHz**

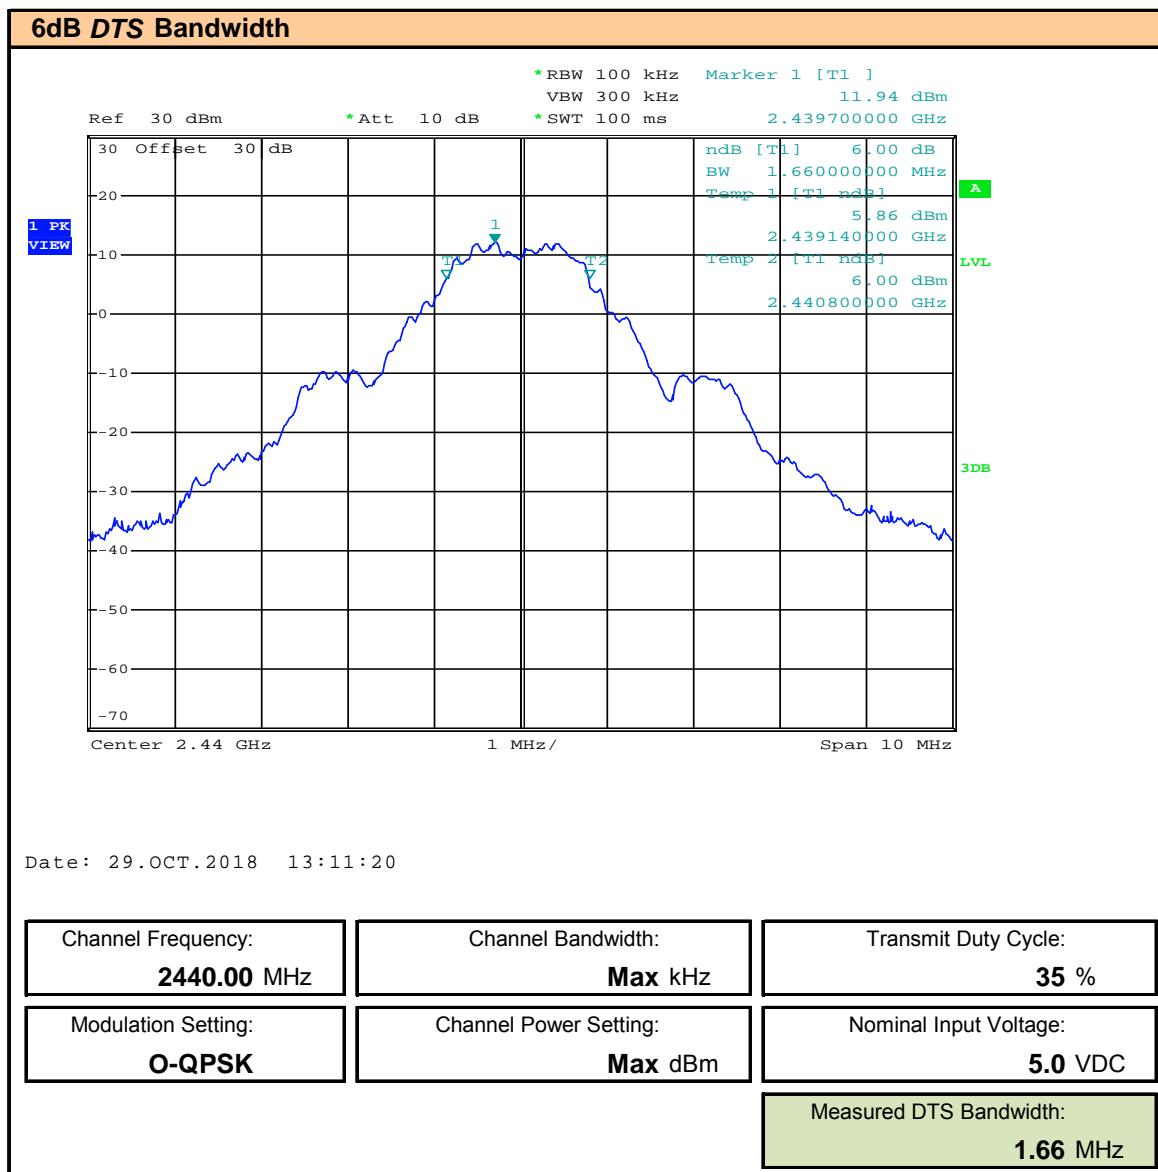

**Plot 9.3 – 6dB DTS Bandwidth - 2480MHz**

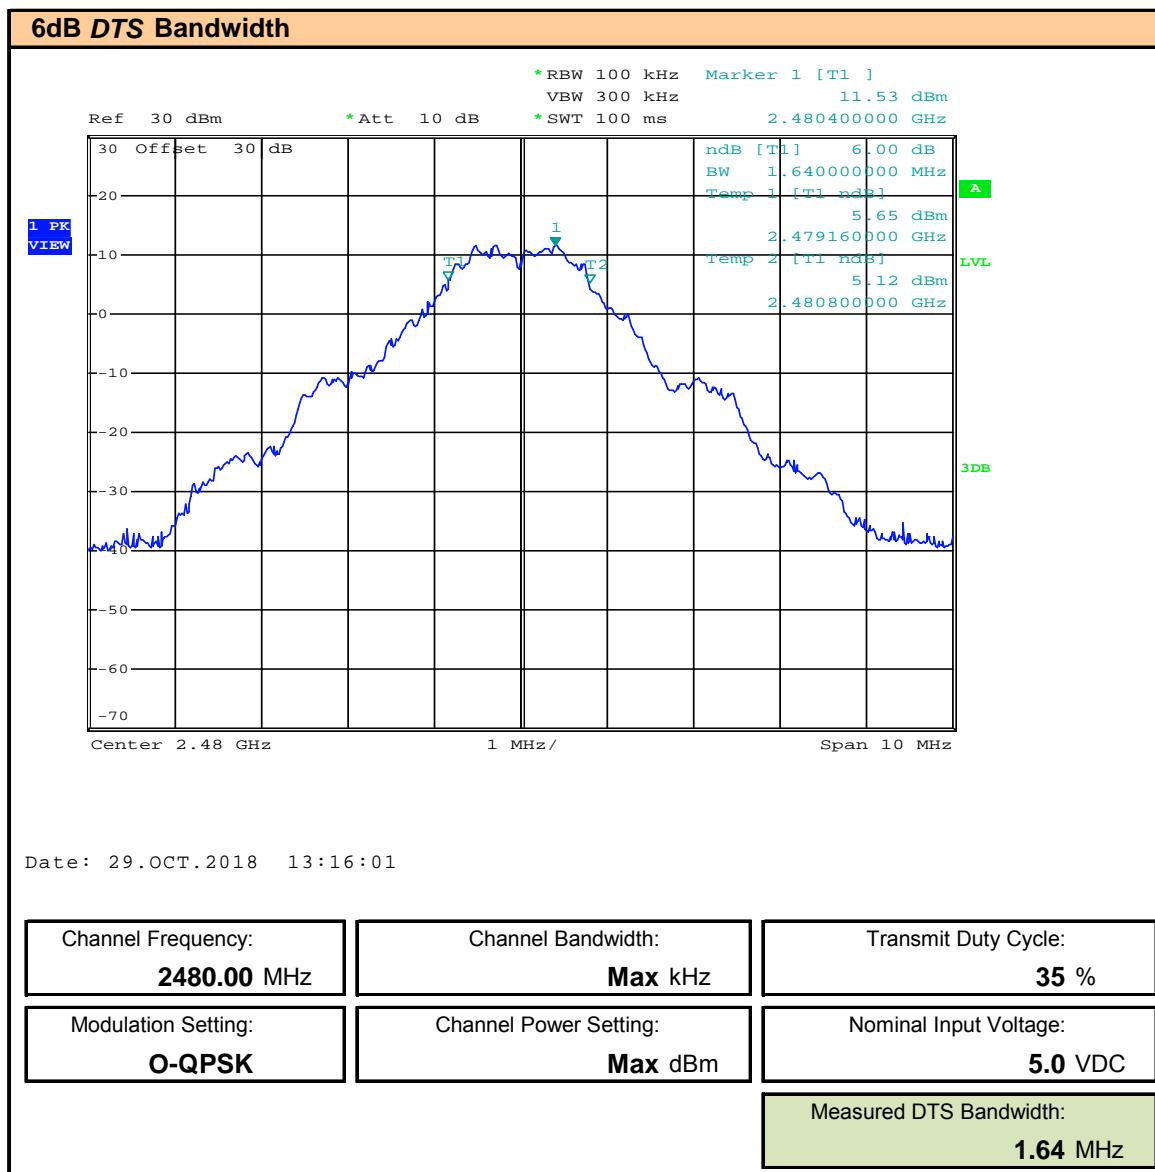


Table 9.1 – Summary of 6dB DTS Bandwidth Measurements

6dB DTS Bandwidth Measurement Results						
Frequency (MHz)	Bandwidth Setting (kHz)	Modulation	Supply Voltage (VDC)	Measured 6dB BW [BW] (MHz)	Minimum 6dB BW [MBW] (kHz)	Margin (kHz)
2405.00	Max	O-QPSK	5.0	1.64	500	1140.00
2440.00				1.66		1160.00
2480.00				1.64		1140.00
					Result:	Complies

Margin = BW - MBW

## 10.0 - CONDUCTED FUNDAMENTAL POWER

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d), KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.6)
----------------------------	---

### Limits

47 CFR §15.247(b)(3)	(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output
RSS-247 (5.4)(d)	<b>5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) requirements</b> Devices shall comply with the following requirements, where applicable: d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.
KDB 558074 (8.3.2.1)	<b>8.3.2.1 General</b> Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.
C63.10 (11.9.2.2.1)	<b>9.2.2.1 Selection of Test Method</b> c) Method AVGSA-3 (RMS detection across on- and off-times of the EUT with max hold) or AVGSA-3 Alternative (reduced VBW averaging across on- and off-times of the EUT with max hold) shall be applied if the conditions of the preceding paragraphs a) and b) cannot be achieved.
C63.10 (11.9.2.2.6)	<b>11.9.2.2.6 Method AVGSA-3</b> (RMS detection across on- and off-times of the EUT with max hold) a) Set span to at least 1.5 X OBW. b) Set sweep trigger to "free run". c) Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz. d) Set VBW $\geq$ 3 X RBW. e) Number of points in sweep $\geq$ 2 X span / RBW. f) Sweep time $\leq$ (number of points in sweep) x T, where T is defined in Section 6.0. g) Detector = RMS h) Trace mode = Max Hold. i) Allow max hold to run for at least 60 s, or longer as needed to allow the trace to stabilize. j) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW.


### Test Procedure (Cont.)

Normative Reference	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d), KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.6)
Test Setup	Appendix A      Figure A.1


### Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above. Span = 1.5 X OBW = 1.5 X 3MHz = 4.5MHz. Number of Sweep Points  $\geq$  2 X Span / RBW = 2 X (4.5MHz / 100kHz), the SA was configured for 1001 Points. Sweep Time  $\leq$  (Sweep Points) X T = 1001 X 6.7mSec = 6.7Sec, the Sweep Time was set to 100mSec. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle. The Channel Bandwidth was set to the measured 99% Occupied Bandwidth (See Section 8.0). The Band Channel Power was measured and recorded.

Plot 10.1 – Maximum Conducted Power - 2405MHz

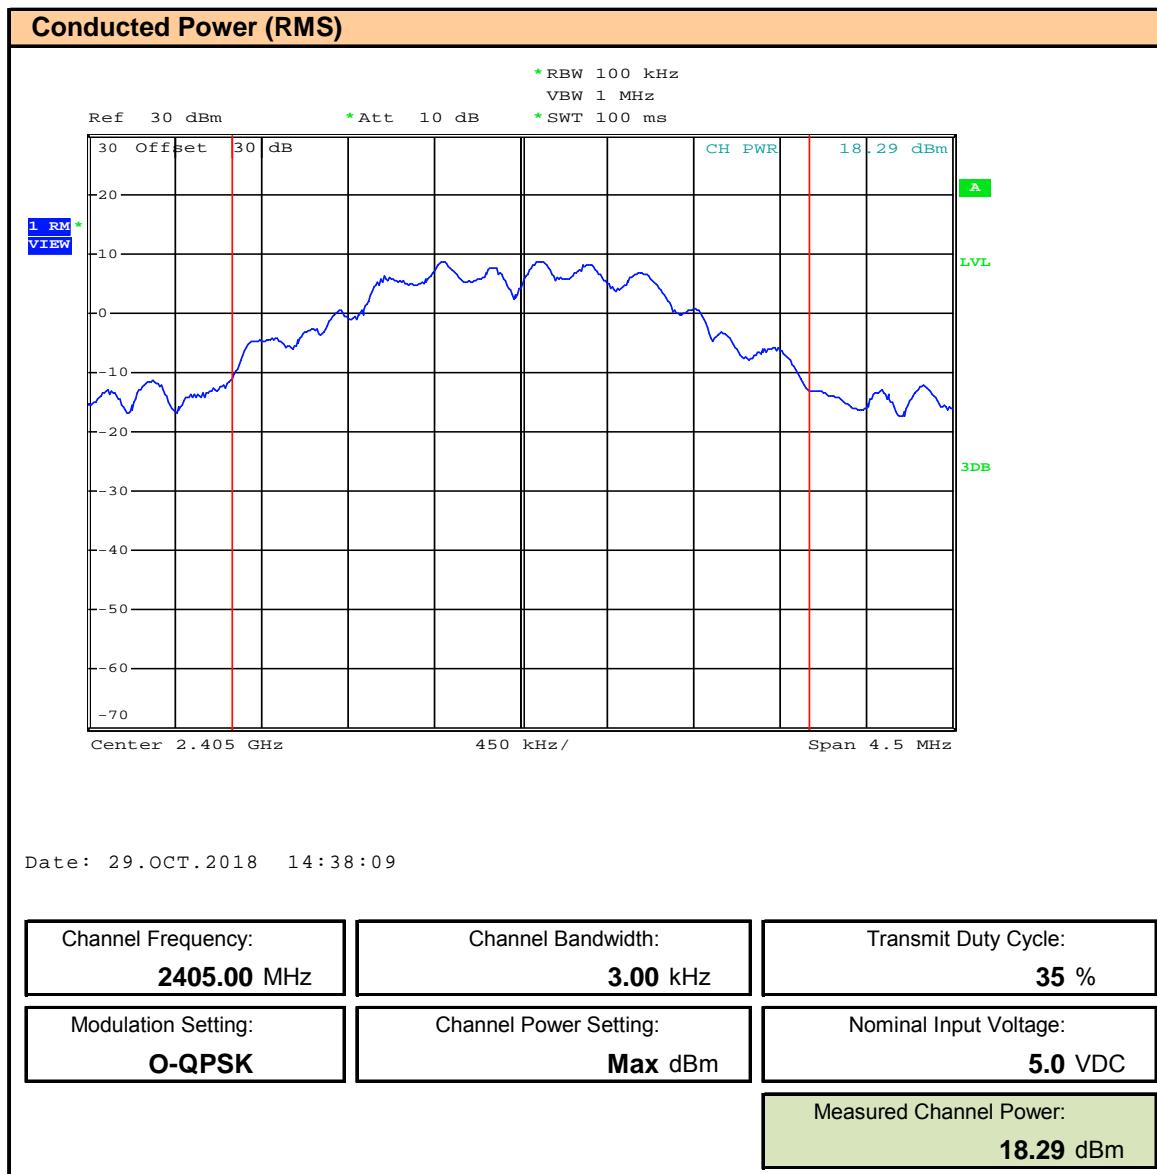

Plot 10.2 – Maximum Conducted Power – 2440MHz

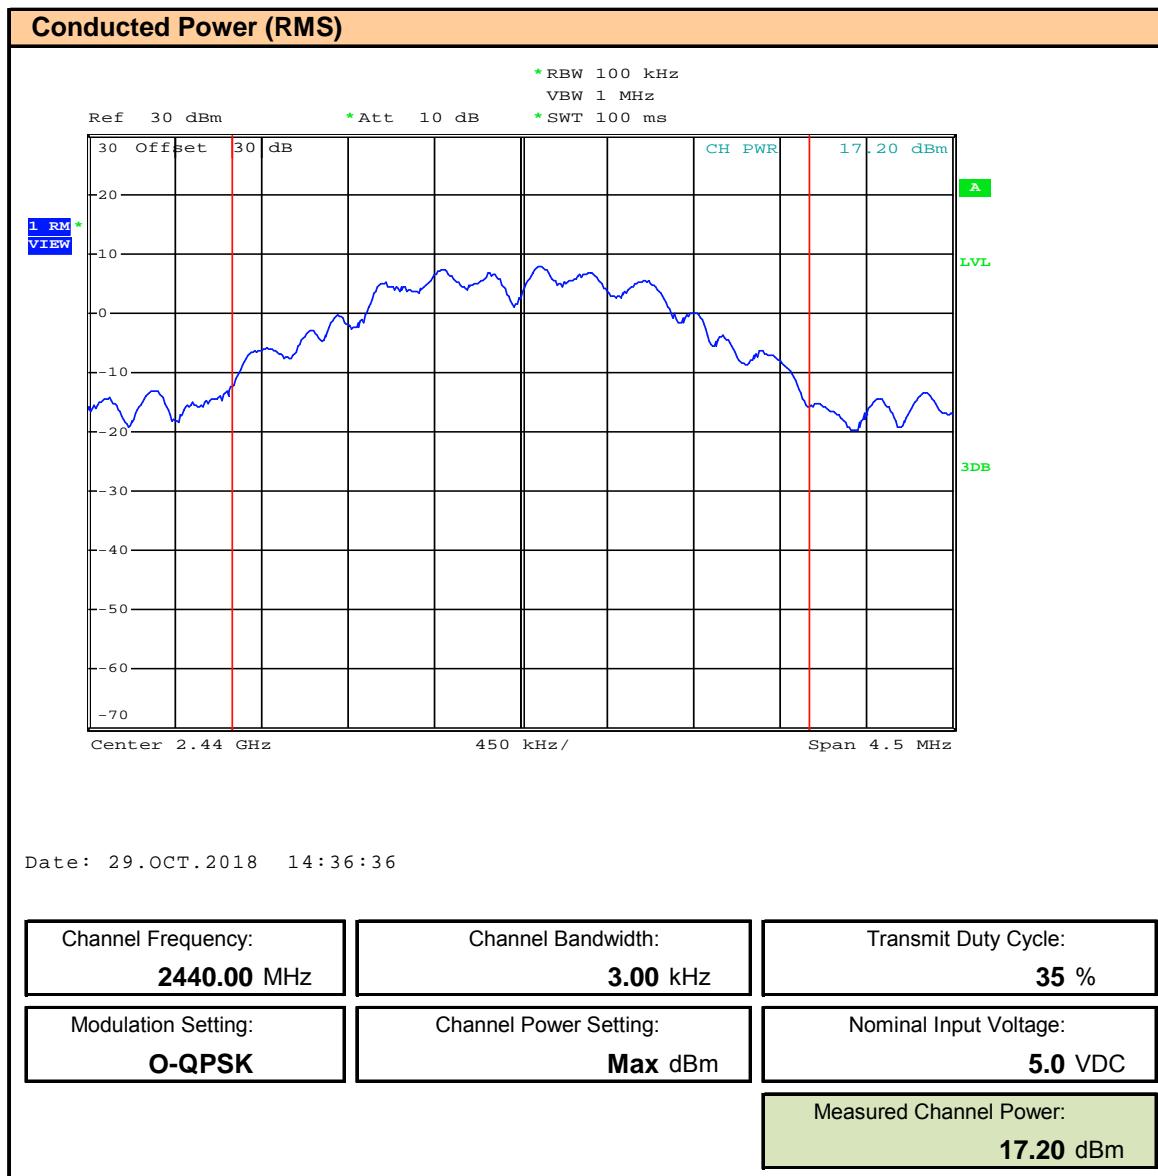

Plot 10.3 – Maximum Conducted Power – 2480MHz

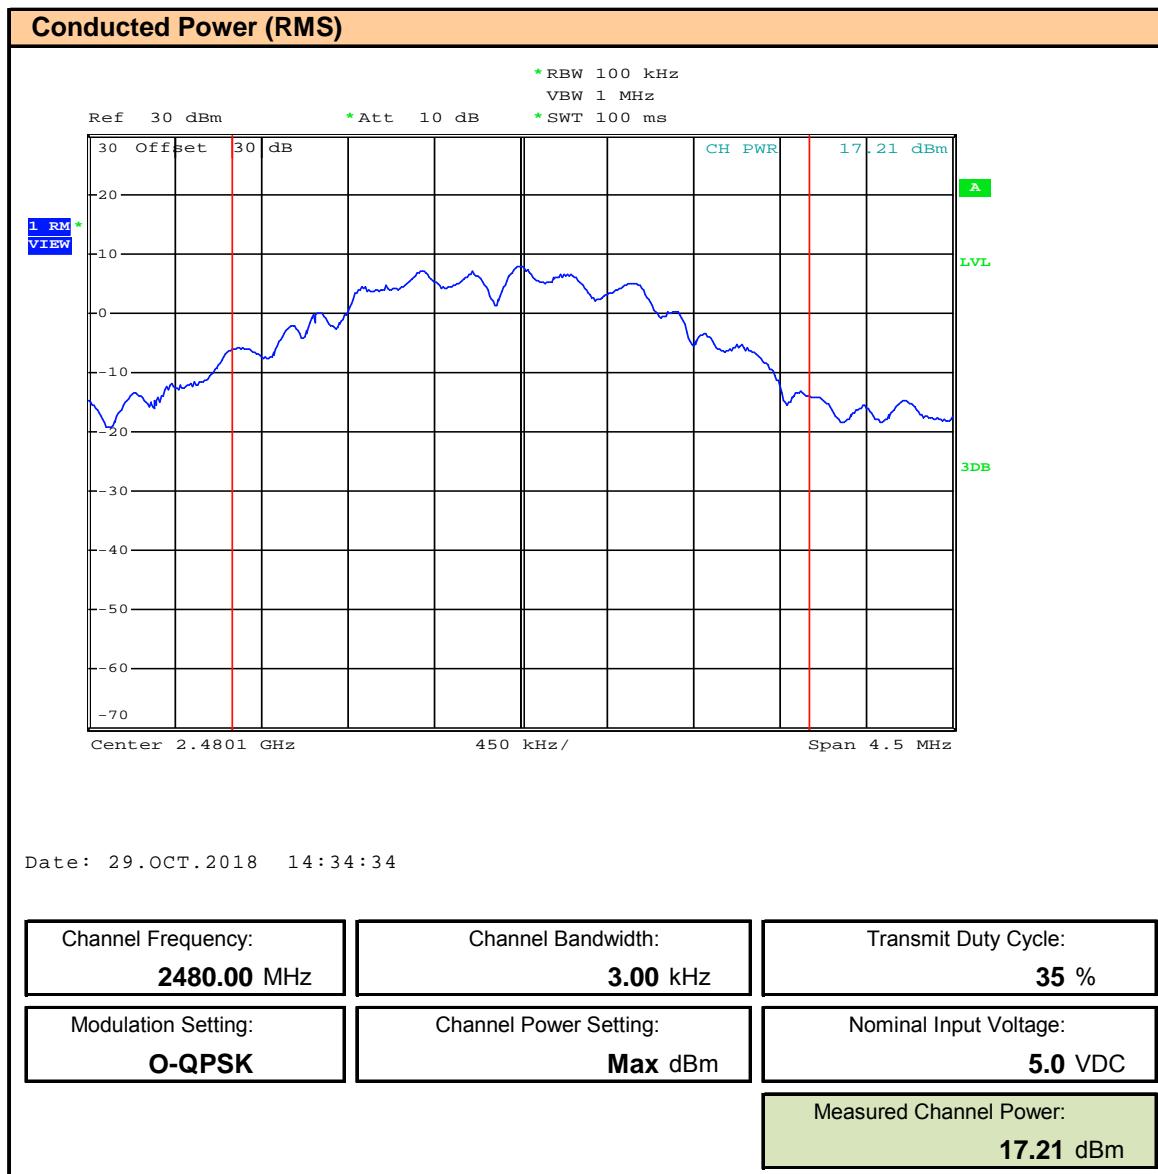


Table 10.1 – Summary of Maximum Conducted Power Measurements

<b>§15.247(b)(3), RSS-247 (5.4)(d) Channel Output Power (RMS)</b>								
Frequency (MHz)	BW (MHz)	Modulation	Power Setting <sup>(1)</sup> (dBm)	Supply Voltage (VDC)	Measured Power [E <sub>Meas</sub> ] (dBm)	Measured Power [E <sub>Meas</sub> ] (W)	Limit (W)	Margin (dB)
2405.0	3	O-QPSK	Max	5.0	18.29	0.067	1.0	11.7
2440.0					17.20	0.052		12.8
2480.0					17.21	0.053		12.8
								<b>Result:</b> <b>Complies</b>

(1) The output power is factory set to maximum

Margin = 10\*Log(Limit / E<sub>meas</sub>)

<b>RSS-247 (5.4)(d) Channel EIRP (RMS)</b>											
Frequency (MHz)	BW (kHz)	Modulation	Power Setting <sup>(1)</sup> (dBm)	Supply Voltage (VDC)	Measured Power [E <sub>Meas</sub> ] (dBm)	Antenna Gain [G <sub>T</sub> ] (dBi)	Cable Loss [L <sub>C</sub> ] (dB)	EIRP (dBm)	EIRP (W)	Limit (W)	Margin (dB)
2405.0	764	4FSK	Max	5.0	18.29	5	0.5	23.79	0.24	4.0	12.2
2440.0					17.20			22.70	0.19		13.3
2480.0					17.21			22.71	0.19		13.3
								<b>Result:</b> <b>Complies</b>			

EIRP (dBm) = E<sub>Meas</sub> + G<sub>T</sub> + L<sub>C</sub>

Margin = Limit - EIRP in dB

(1) The output power is factory set to maximum

## 11.0 - POWER SPECTRAL DENSITY

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §15.247(e), RSS-247 (5.2)(b), KDB 558074 (8.4), ANSI C63.10 (11.10.7)
----------------------------	---

### Limits

47 CFR §15.247(e)	(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
RSS-247 (5.2)(b)	b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).
C63.10 (11.10.1)	<p><b>11.10.1 Selection of Test Method</b></p> <p>c) Method AVGPSD-3 (RMS detection across on- and off-times of the EUT with max hold) or AVGSA-3 Alternative (reduced VBW averaging across on- and off-times of the EUT with max hold) shall be applied if the conditions of the preceding paragraphs a) and b) cannot be achieved.</p>
C63.10 (11.10.7)	<p><b>11.10.7 Method AVGPSD-3</b> (RMS detection across on- and off-times of the EUT with max hold)</p> <p>This procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., duty cycle &lt; 98 %), and when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level and when the transmission duty cycle is not constant (i.e., duty cycle variations exceed <math>\pm 2\%</math>):</p> <p>a) Set span to at least 1.5 X OBW. b) Set sweep trigger to "free run". c) Set RBW to <math>3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}</math> d) Set VBW <math>\geq 3 \times \text{RBW}</math>. e) Number of points in sweep <math>\geq 2 \times \text{span} / \text{RBW}</math>. f) Sweep time <math>\leq (\text{number of points in sweep}) \times T</math>, where T is defined in Section 6.0. g) Detector = RMS h) Trace mode = Max Hold. i) Allow max hold to run for at least 60 s, or longer as needed to allow the trace to stabilize. j) Use the peak marker function to determine the maximum PSD level. k) If the measured value exceeds limit, reduce RBW (to no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).</p>

### Test Procedure (Cont.)


<b>Normative Reference</b>	FCC 47 CFR §15.247(e), RSS-247 (5.2)(b), KDB 558074 (8.4), ANSI C63.10 (11.10.7)
----------------------------	---

<b>Test Setup</b>	Appendix A	Figure A.1
-------------------	------------	------------


### Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above. Number of Sweep Points  $\geq 2 \times \text{Span} / \text{RBW} = 2 \times (1.5\text{MHz} / 3\text{kHz})$ , the SA was configured for 1001 Points. Sweep Time  $\leq (\text{Sweep Points}) \times T = 1001 \times 6.7\text{mSec} = 6.7\text{Sec}$ , the Sweep Time was set to 100mSec. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle. The RBW was reduced to 20kHz as permitted. The Power Spectral Density was measured and recorded.

Plot 11.1 – Power Spectral Density – 2405MHz

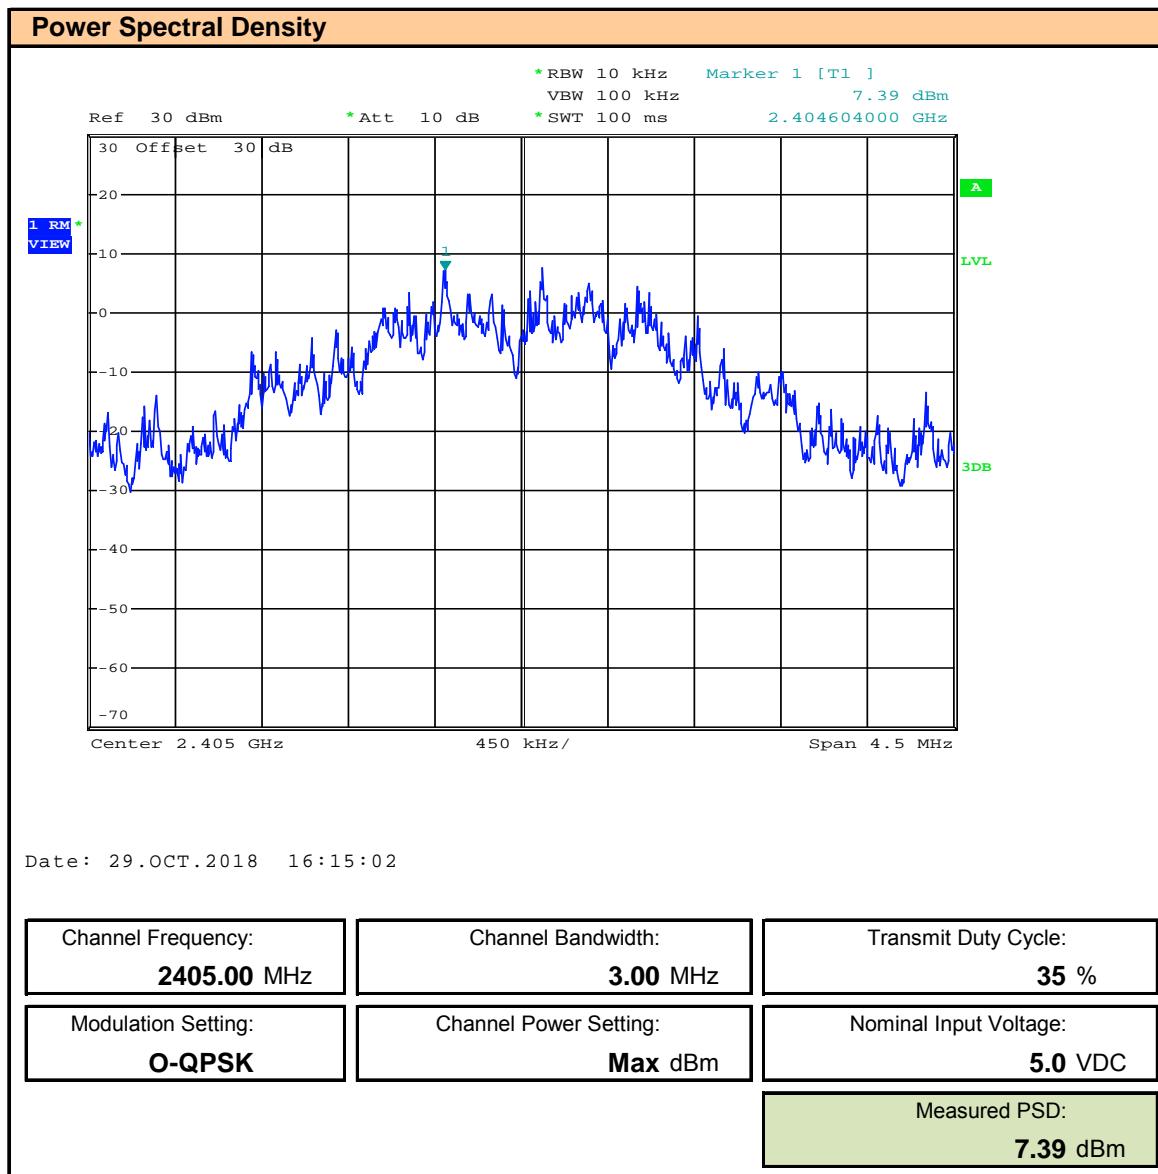

Plot 11.2 – Power Spectral Density – 2440MHz

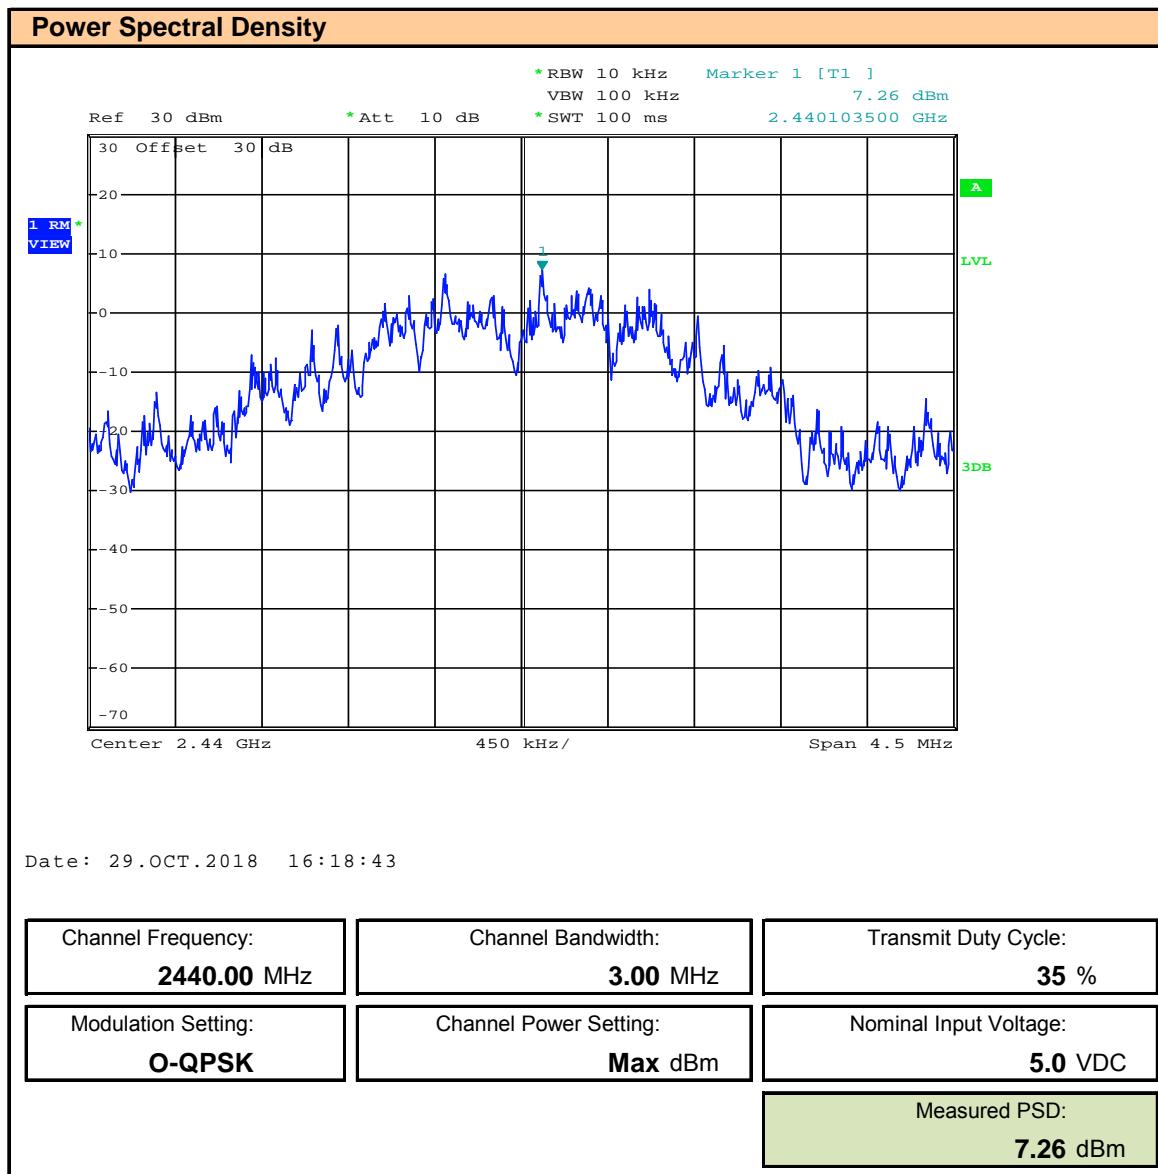

Plot 11.3 – Power Spectral Density – 2480MHz

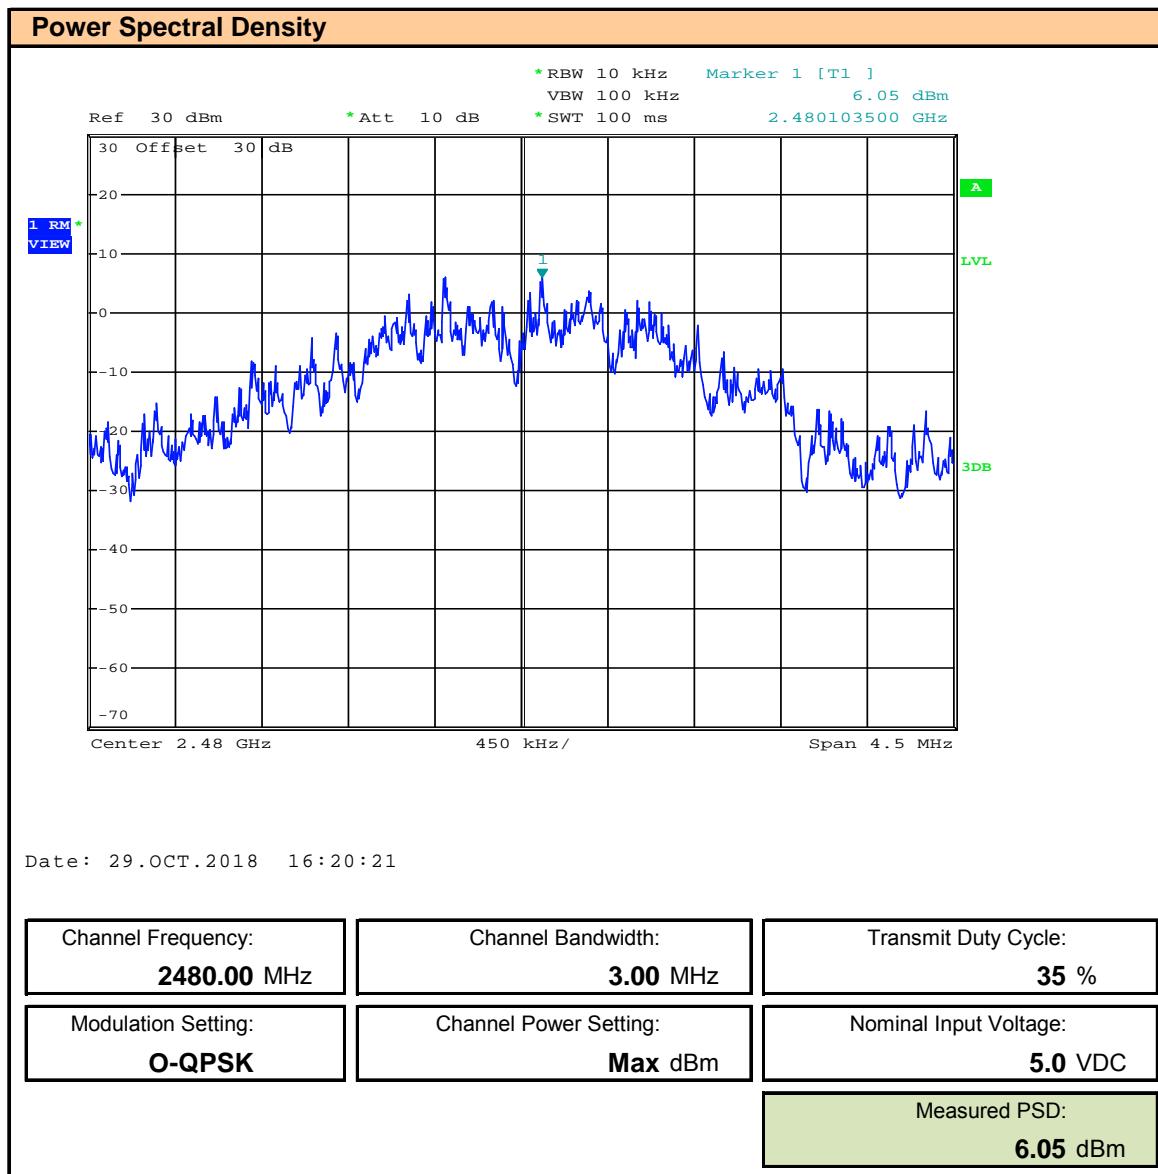


Table 11.1 – Summary of Power Spectral Density Measurements

Power Spectral Density Measurement Results								
Frequency (MHz)	BW (MHz)	Modulation	Power Setting <sup>(1)</sup> (dBm)	Supply Voltage (VDC)	Transmit Duty Cycle (%)	Measured PSD [PSD <sub>Meas.</sub> ] (dBm)	Limit (dBm)	Margin (dB)
2405.0	3.0	O-QPSK	Max	5.0	35	7.39	8.0	0.6
2440.0						7.26		0.7
2480.0						6.05		2.0
Result:						<b>Complies</b>		

(1) The output power is factory set to maximum

Margin = Limit - PSD<sub>meas</sub>

## 12.0 - CONDUCTED SPURIOUS EMISSIONS

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §2.1051, §15.247(d), RSS-Gen (6.13), RSS-247 (5.5), KDB 558074 (8.5), ANSI C63.10 (11.11.3)
----------------------------	---

### Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.
RSS-247 (5.5)	<p><b>5.5 Unwanted emissions</b></p> <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.</p> <p>d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).</p> <p>As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.</p>

**Test Procedure (Cont.)**

<b>Normative Reference</b>	FCC 47 CFR §2.1051, §15.247(d), RSS-Gen (6.13), RSS-247 (5.5), KDB 558074 (8.5), ANSI C63.10 (11.11.3)
----------------------------	---


**Limits**

C63.10 (11.11.2)	<p><b>11.11.1 General</b></p> <p>The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:</p> <p>b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).</p> <p><b>11.11.2 Reference level measurement</b></p> <p>a) Set instrument center frequency to DTS channel center frequency.</p> <p>b) Set the span to <math>\geq 1.5 \times DTS \text{ bandwidth}</math>.</p> <p>c) Set the RBW = 100 kHz.</p> <p>d) Set the VBW <math>\geq 3 \times \text{RBW}</math>.</p> <p>e) Detector = peak.</p> <p>f) Sweep time = auto couple.</p> <p>g) Trace mode = max hold.</p> <p>h) Allow trace to fully stabilize.</p> <p>i) Use the peak marker function to determine the maximum PSD level.</p> <p>Note that the channel found to contain the maximum PSD level can be used to establish the reference</p>
C63.10 (11.11.3)	<p><b>11.11.3 Emission level measurement</b></p> <p>a) Set the center frequency and span to encompass frequency range to be measured.</p> <p>b) Set the RBW = 100 kHz.</p> <p>c) Set the VBW <math>\geq 3 \times \text{RBW}</math>.</p> <p>d) Detector = peak.</p> <p>e) Sweep time = auto couple.</p> <p>f) Trace mode = max hold.</p> <p>g) Allow trace to fully stabilize.</p> <p>h) Use the peak marker function to determine the maximum amplitude level.</p>


**Test Setup**
**Appendix A**
**Figure A.1**
**Measurement Procedure**

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above. The Reference Level Measurement was The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The unwanted emissions were measured and recorded. The highest Reference Level Measurement was to determine the attenuation of the unwanted emissions. Due to the response of the spectrum analyzer at low frequencies and  $\text{RBW} = 100\text{kHz}_{[\text{Required}]}$ , an  $\text{RBW} = 30\text{kHz}_{[\text{Meas}]}$  was used for the emissions between 90kHz and 1MHz. The limit line was scaled by  $10\log(\text{RBW}_{[\text{Required}]}/\text{RBW}_{[\text{Meas}]}) = 5.2\text{dB}$ .

Plot 12.1 – Reference Level Measurement – 2405MHz

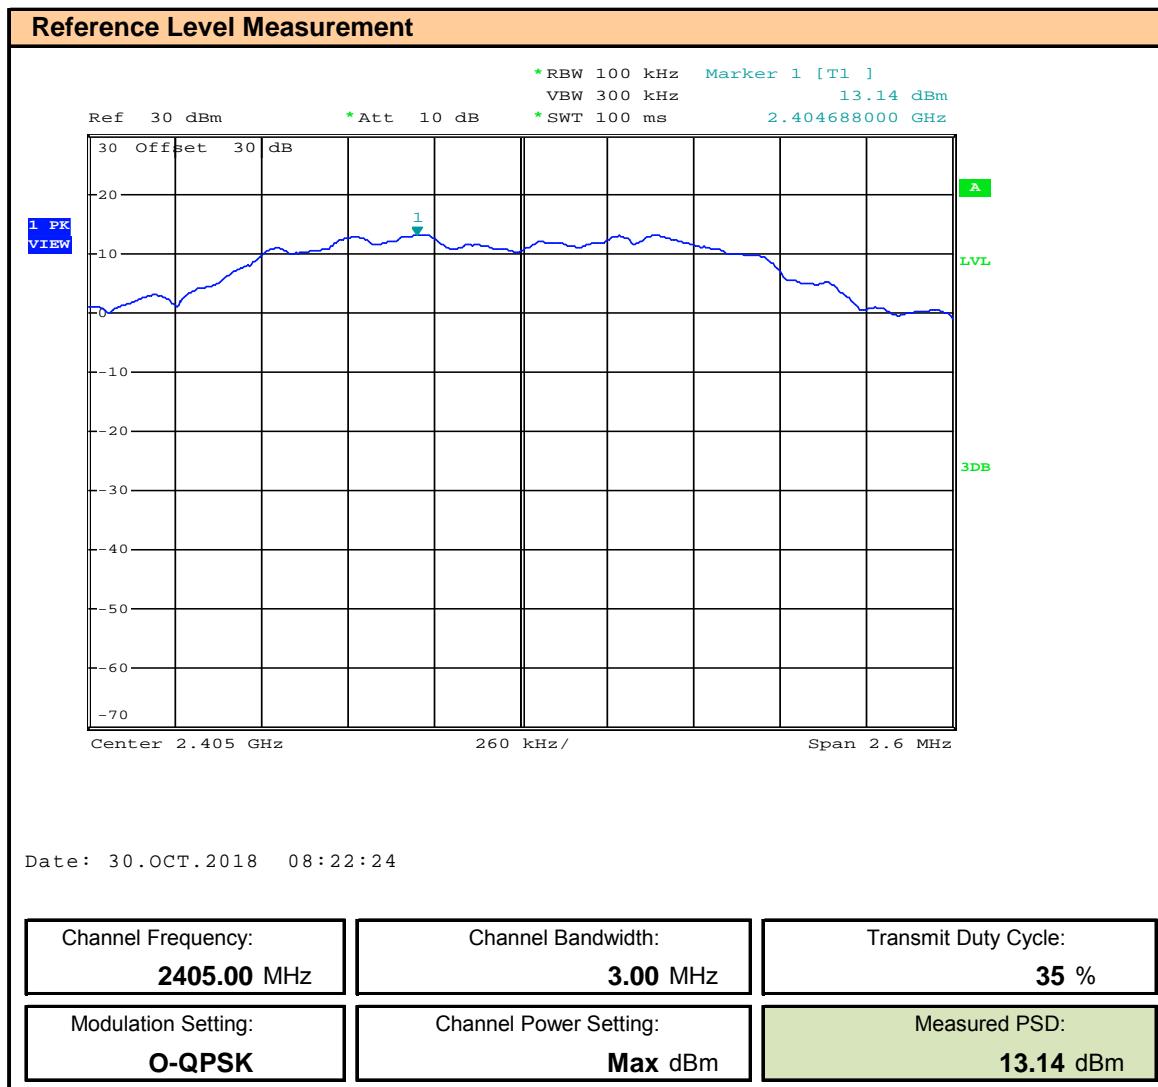

Plot 12.2 – Reference Level Measurement – 2440MHz

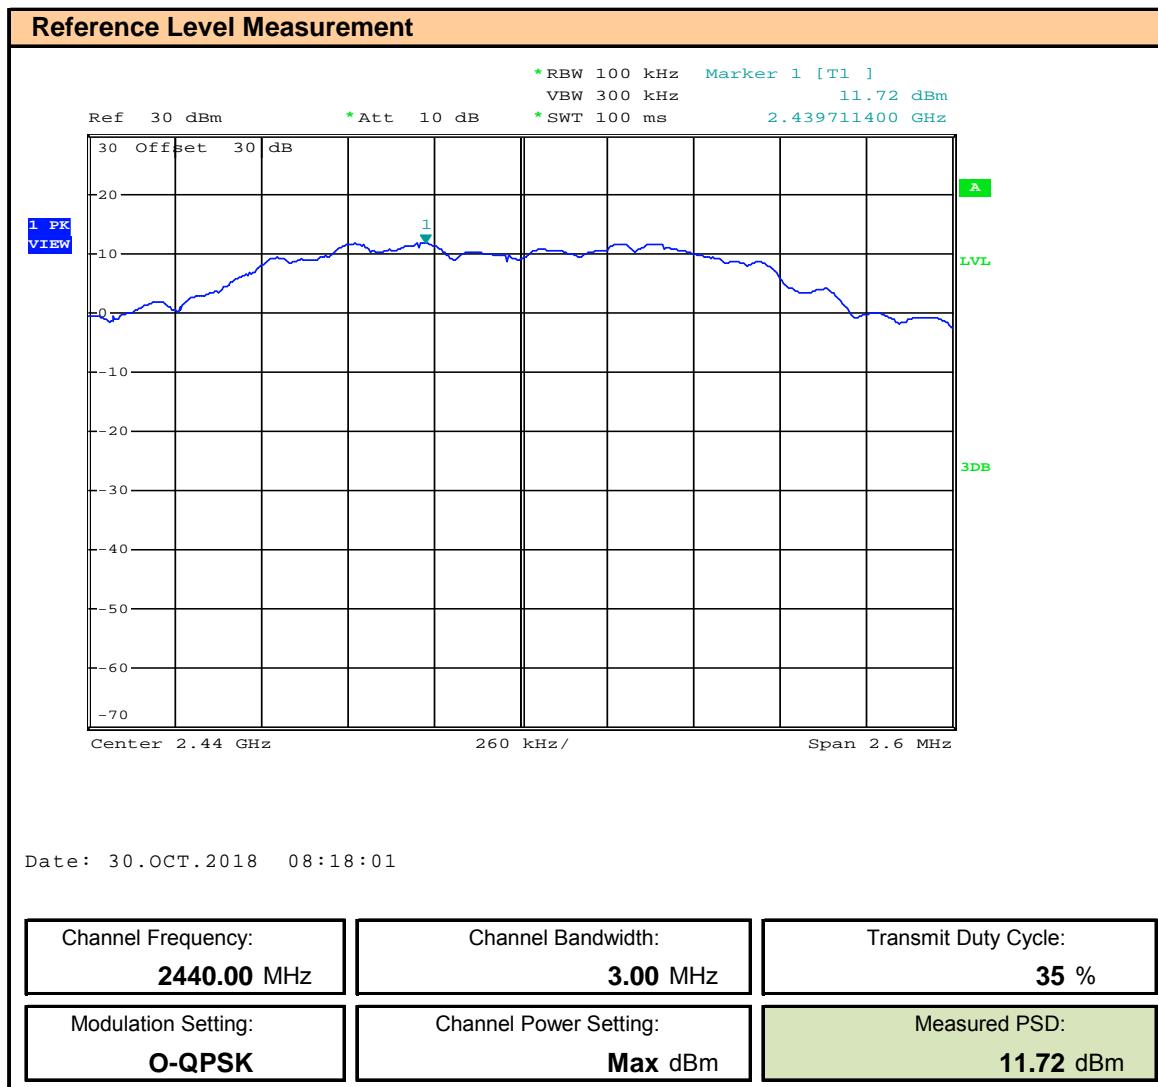

Plot 12.3 – Reference Level Measurement – 2480MHz

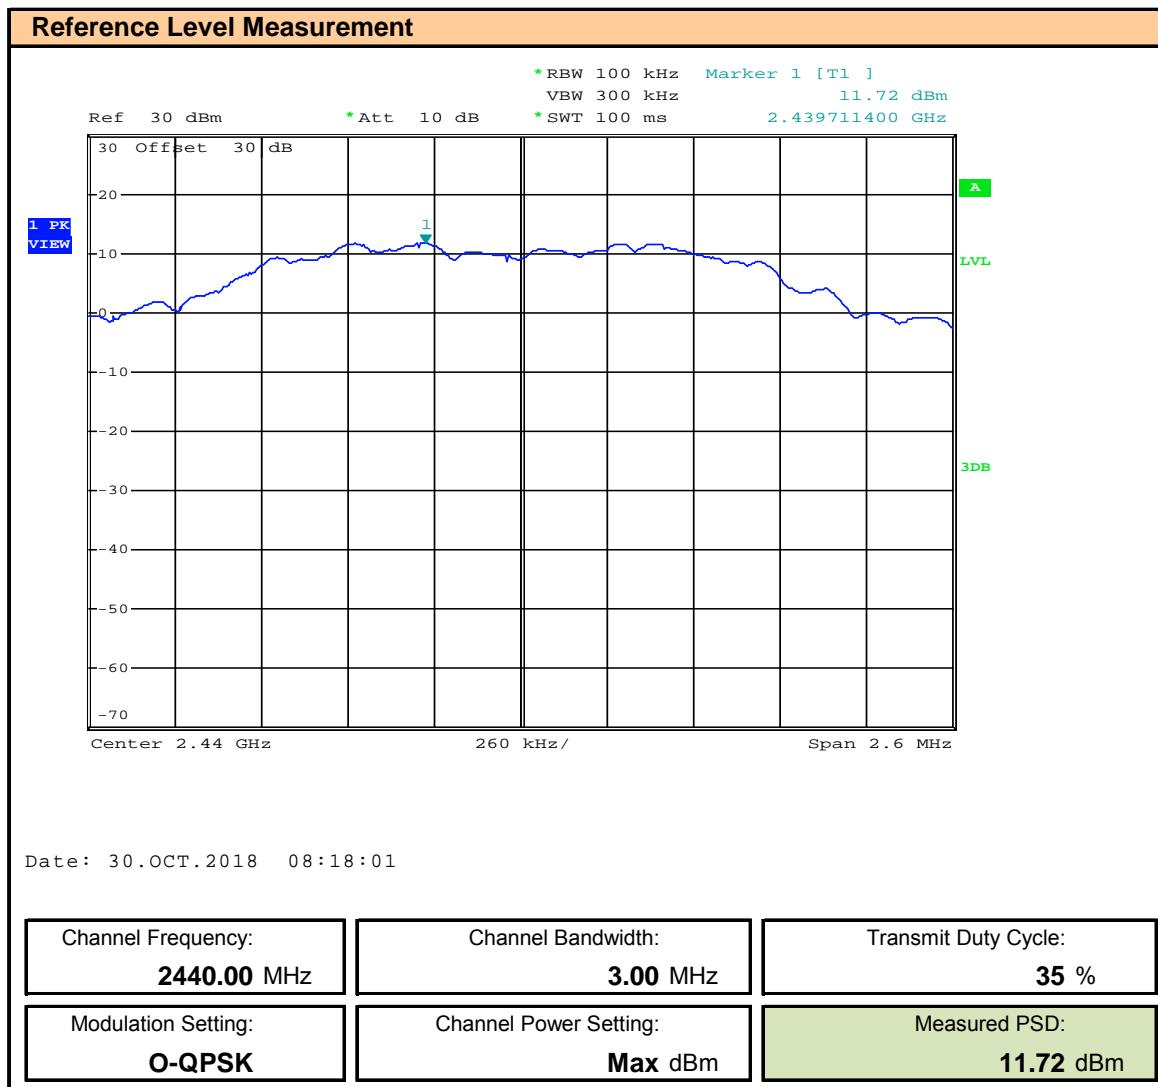


Table 12.1 – Summary of Reference Level Measurements

Reference Level Measurement							
Frequency (MHz)	BW (MHz)	Modulation	Power Setting <sup>(1)</sup> (dBm)	Transmit Duty Cycle (%)	Measured PSD [PSD <sub>Meas</sub> ] (dBm)	Required Attenuation <sup>(2)</sup> [A <sub>A</sub> ] (dBc)	Limit Line [A <sub>L</sub> ] (dBm)
2405.0	3	4FSK	Max	35	13.14	30.00	-16.86
2440.0					11.72		
2480.0					11.72		


(1) The output power is factory set to maximum

(2) The Maximum Conducted (average) output power was used for compliance therefore the required attenuation is 30dBc.


\* The highest 100kHz PSD is used to demonstrate compliance.

Limit Line (A<sub>L</sub>) = A<sub>A</sub> - PSD<sub>meas</sub>


Plot 12.4 – Conducted Spurious Emissions – 90kHz - 1MHz

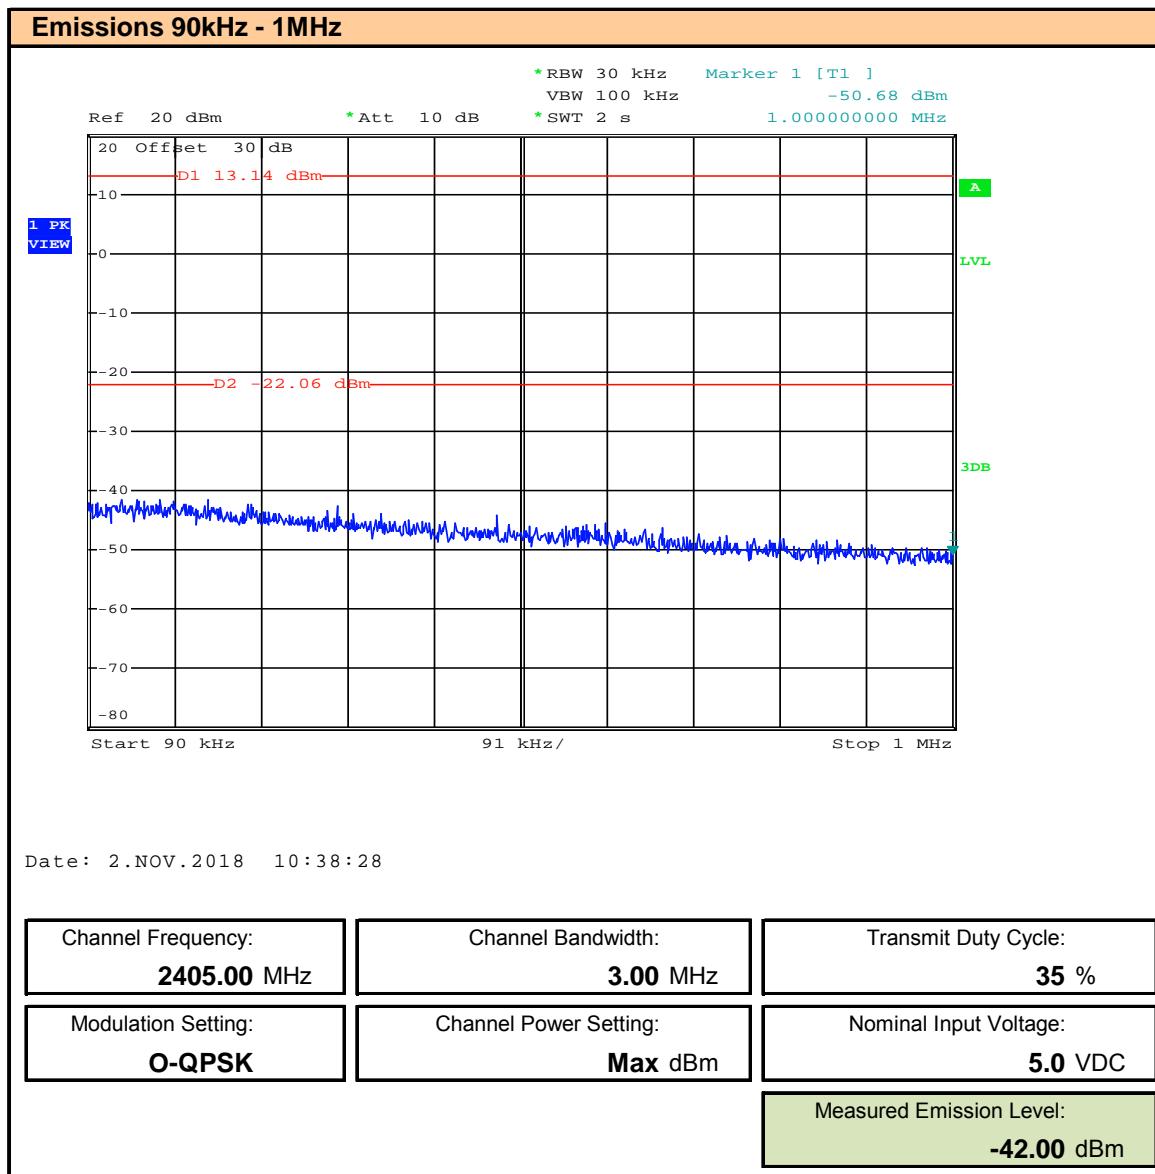


Plot 12.5 – Conducted Spurious Emissions – 1MHz - 10MHz

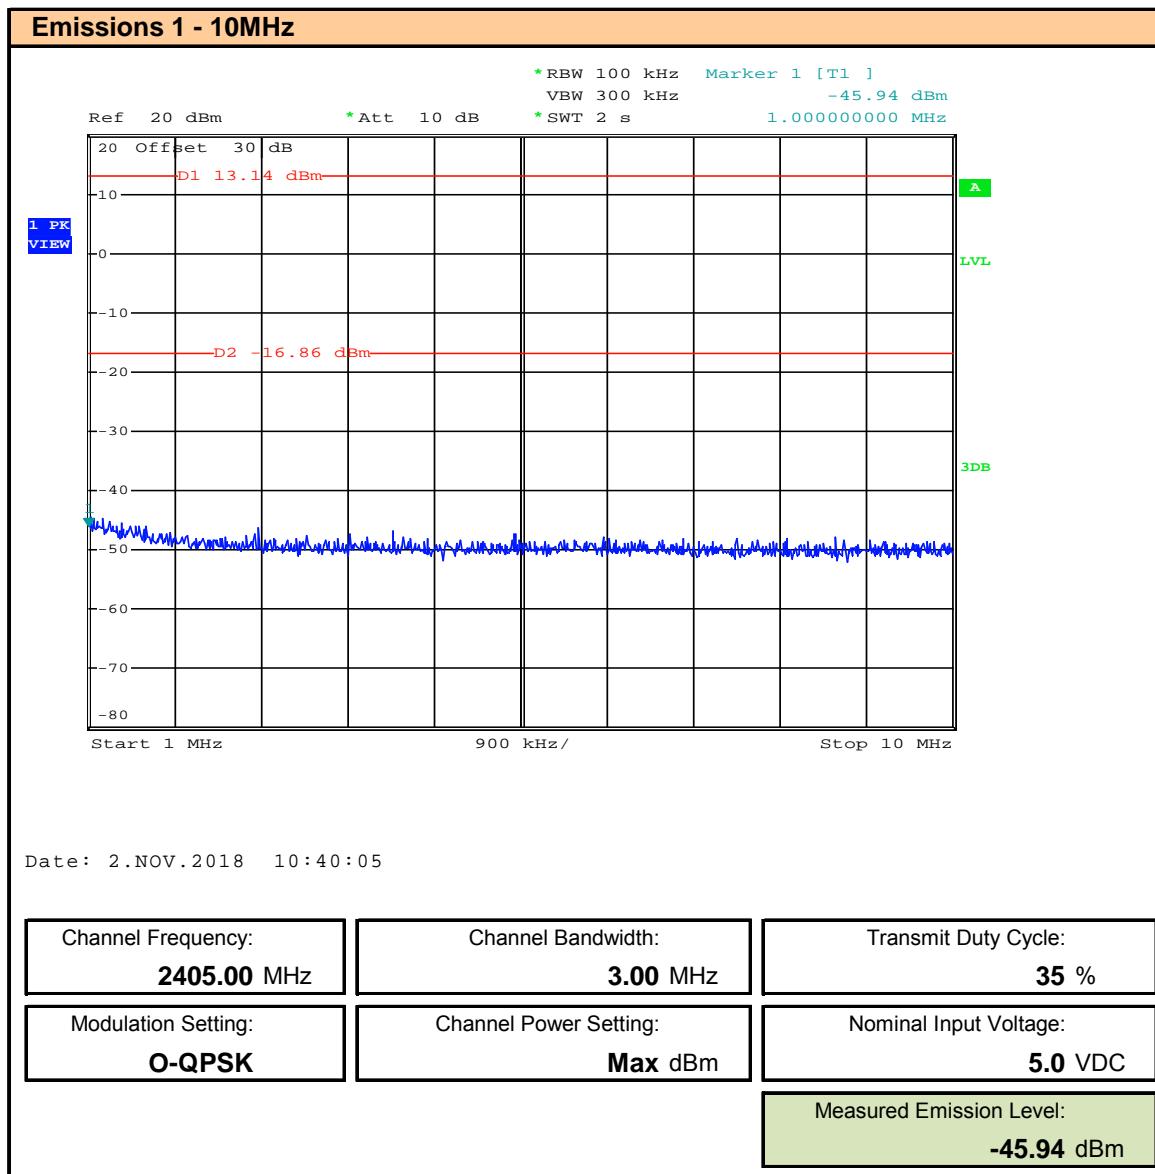


Plot 12.6 – Conducted Spurious Emissions – 10MHz - 100MHz

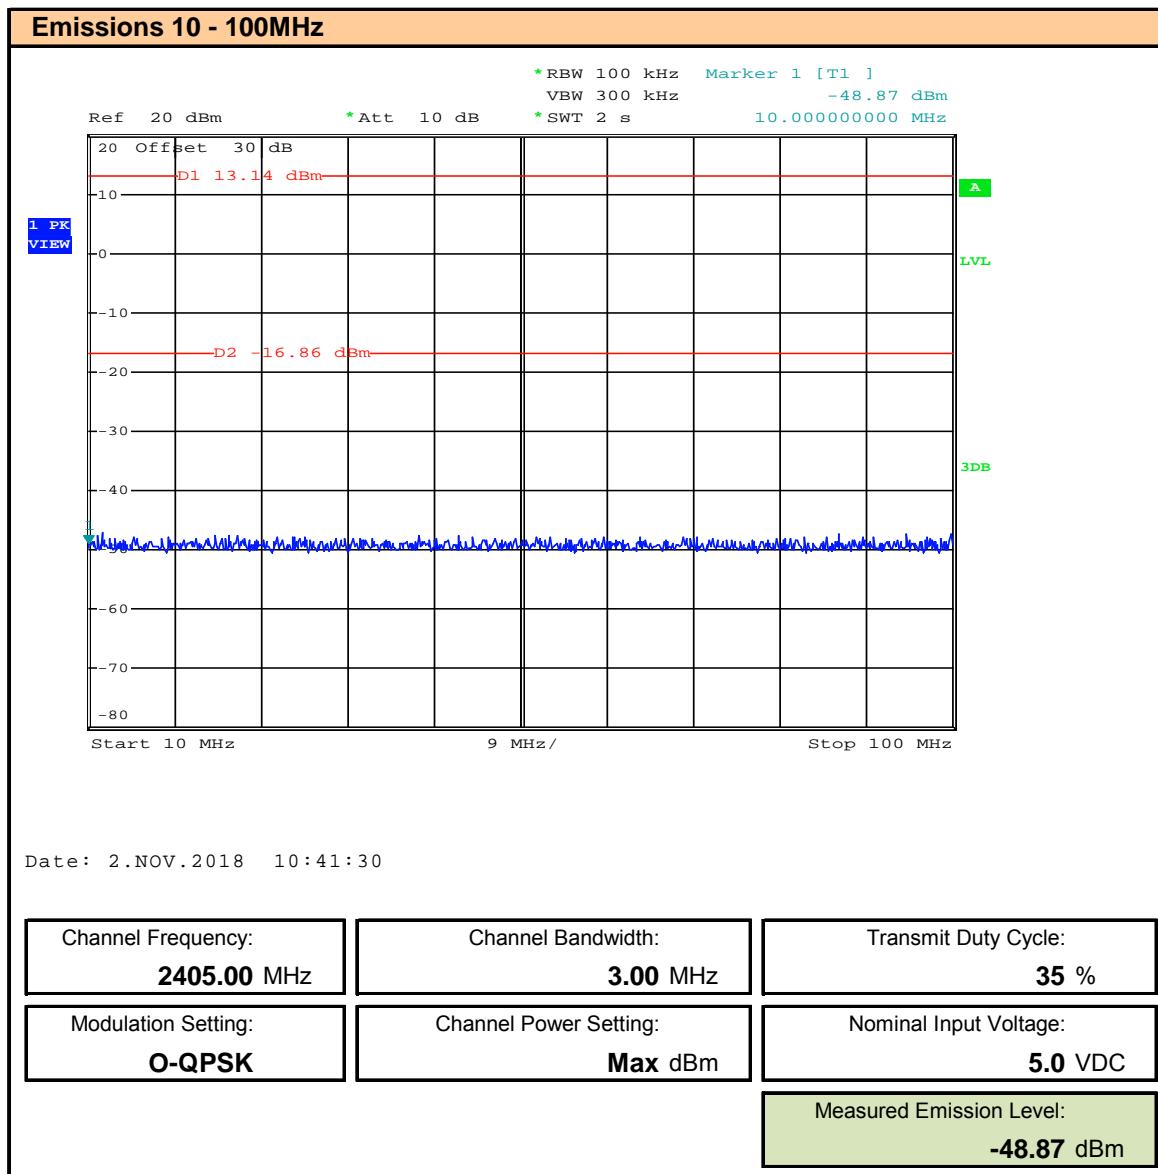


Plot 12.7 – Conducted Spurious Emissions – 100MHz - 1000MHz

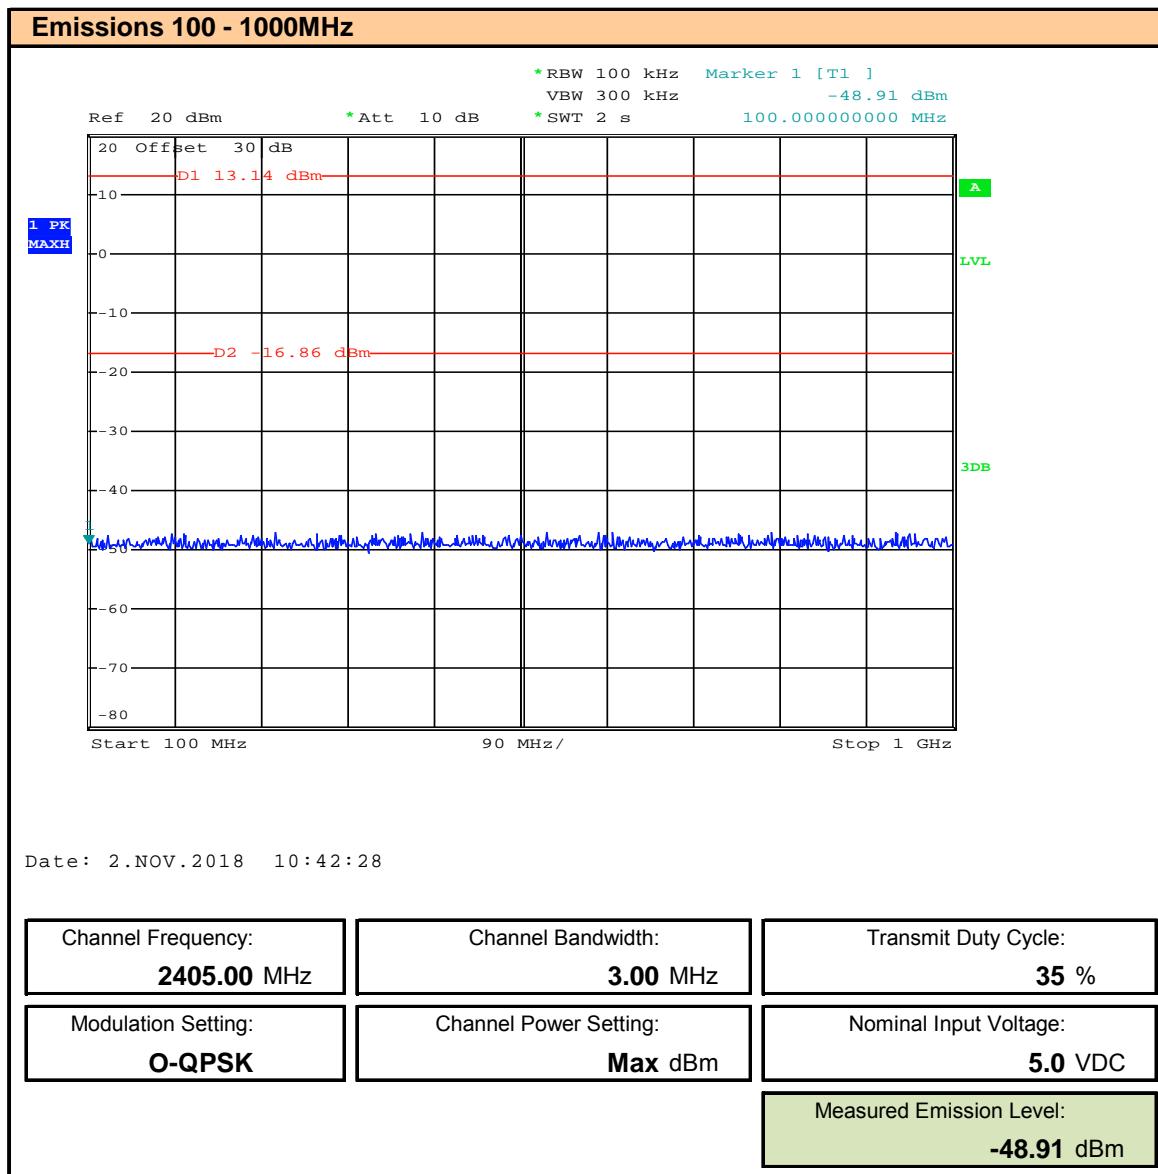


### Plot 12.8 – Conducted Spurious Emissions – 1GHz – 3GHz

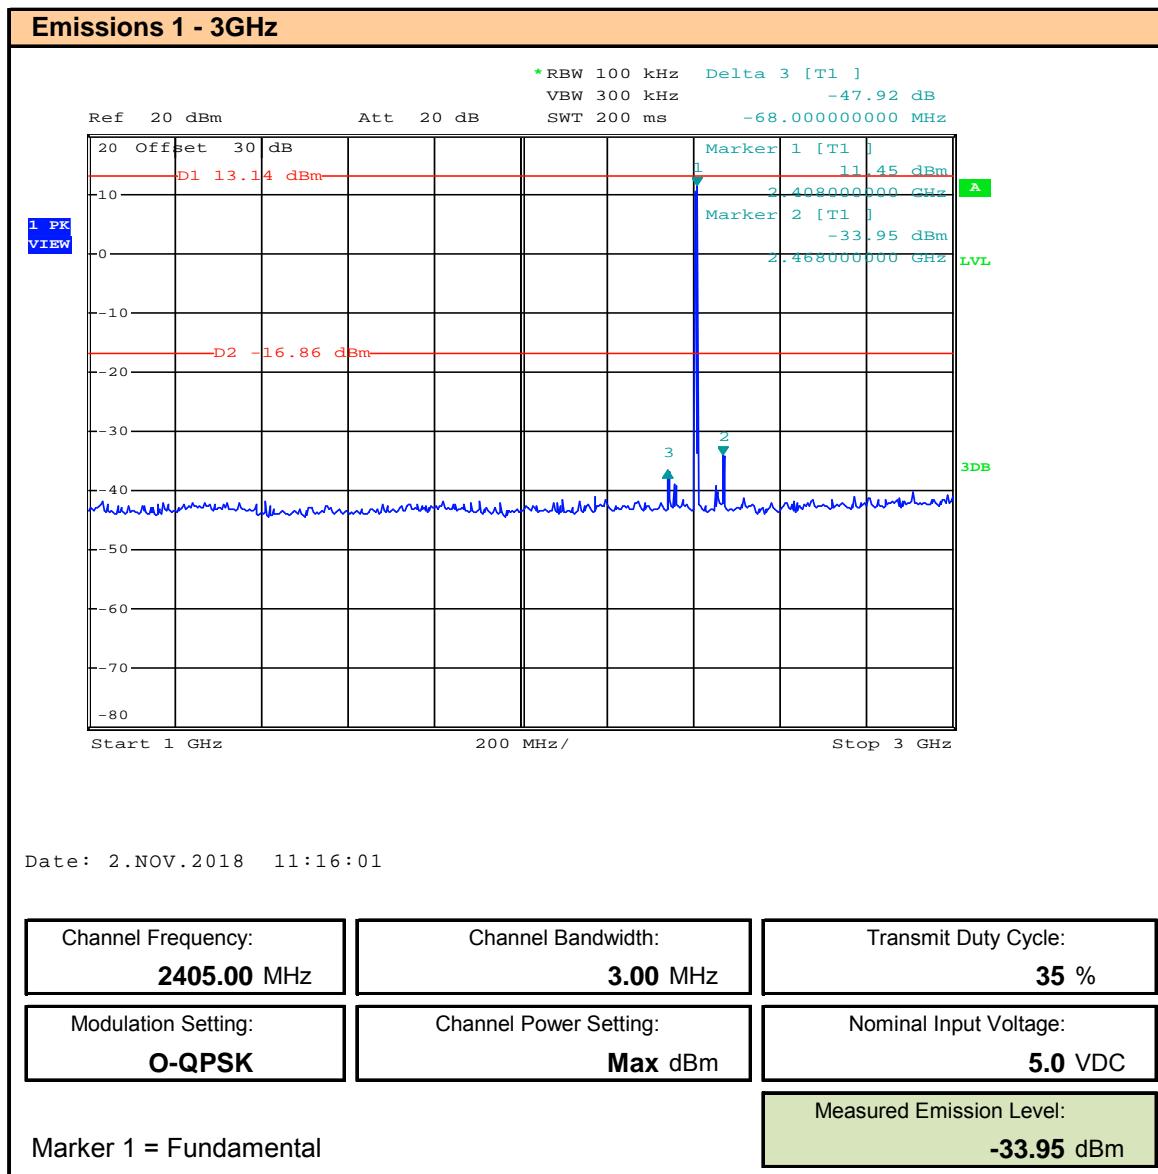


Plot 12.9 – Conducted Spurious Emissions – 3GHz – 10GHz

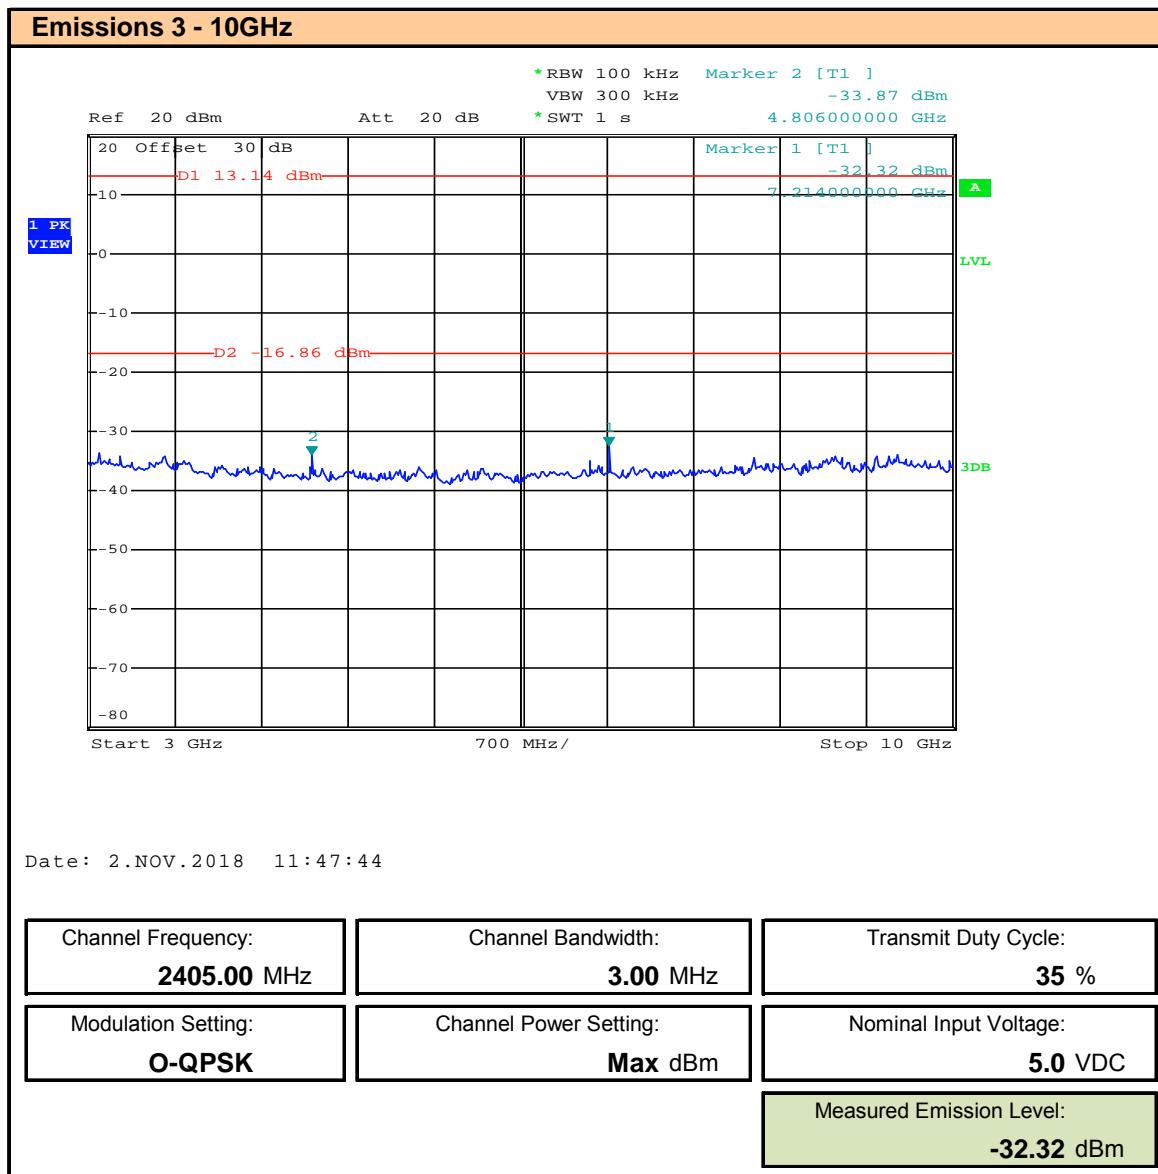


Plot 12.10 – Conducted Spurious Emissions – 10GHz – 13.6GHz

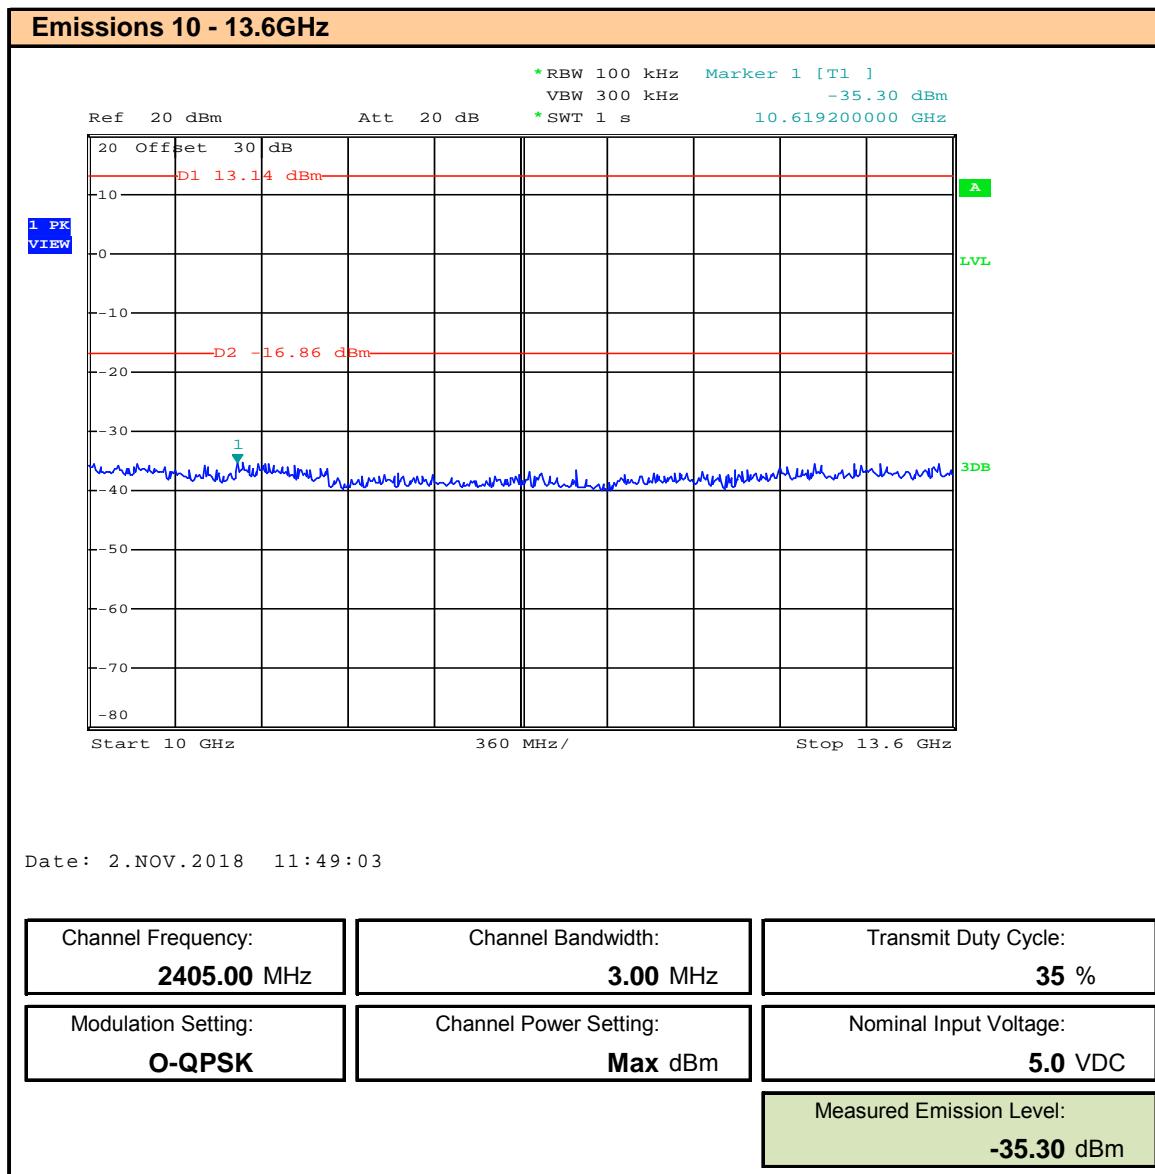

Plot 12.11 – Conducted Spurious Emissions – 13.6GHz – 25GHz

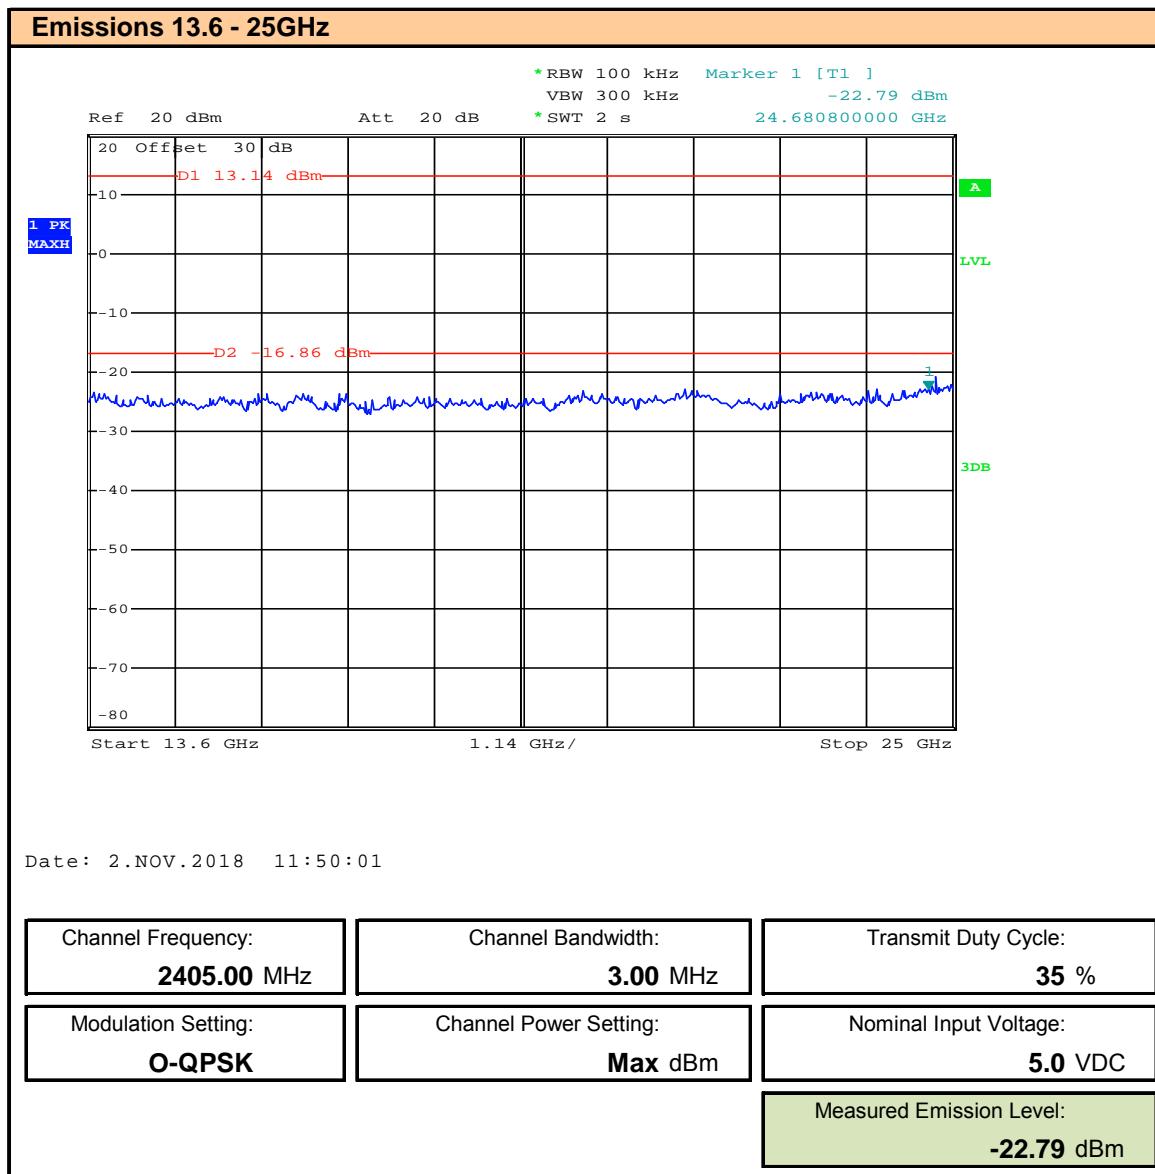

Plot 12.12 – Conducted Spurious Emissions – 4.81GHz

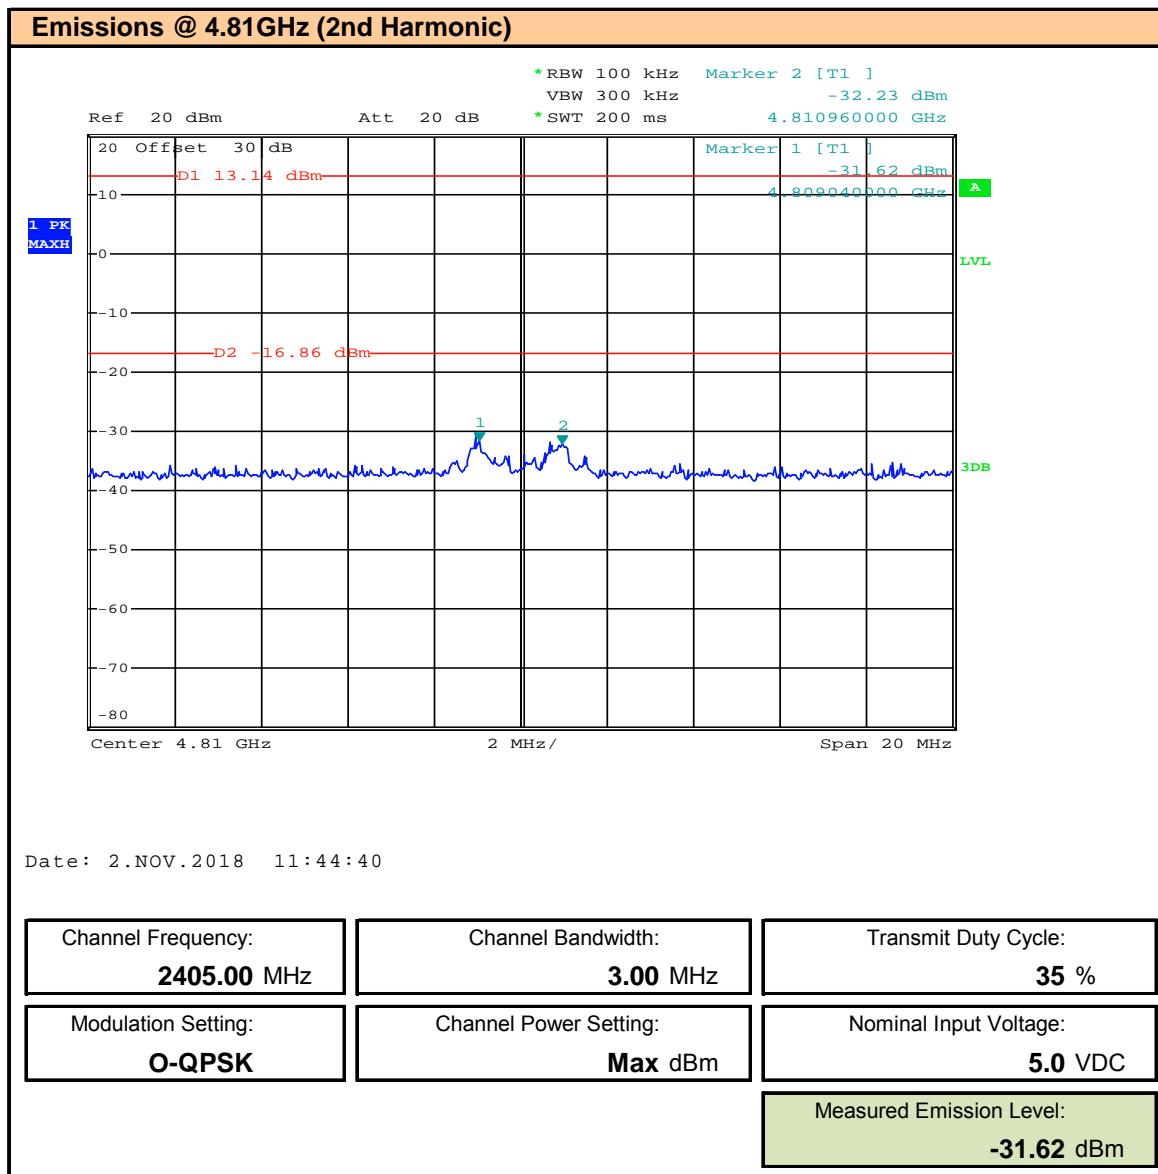

Plot 12.13 – Conducted Spurious Emissions – 7.215GHz

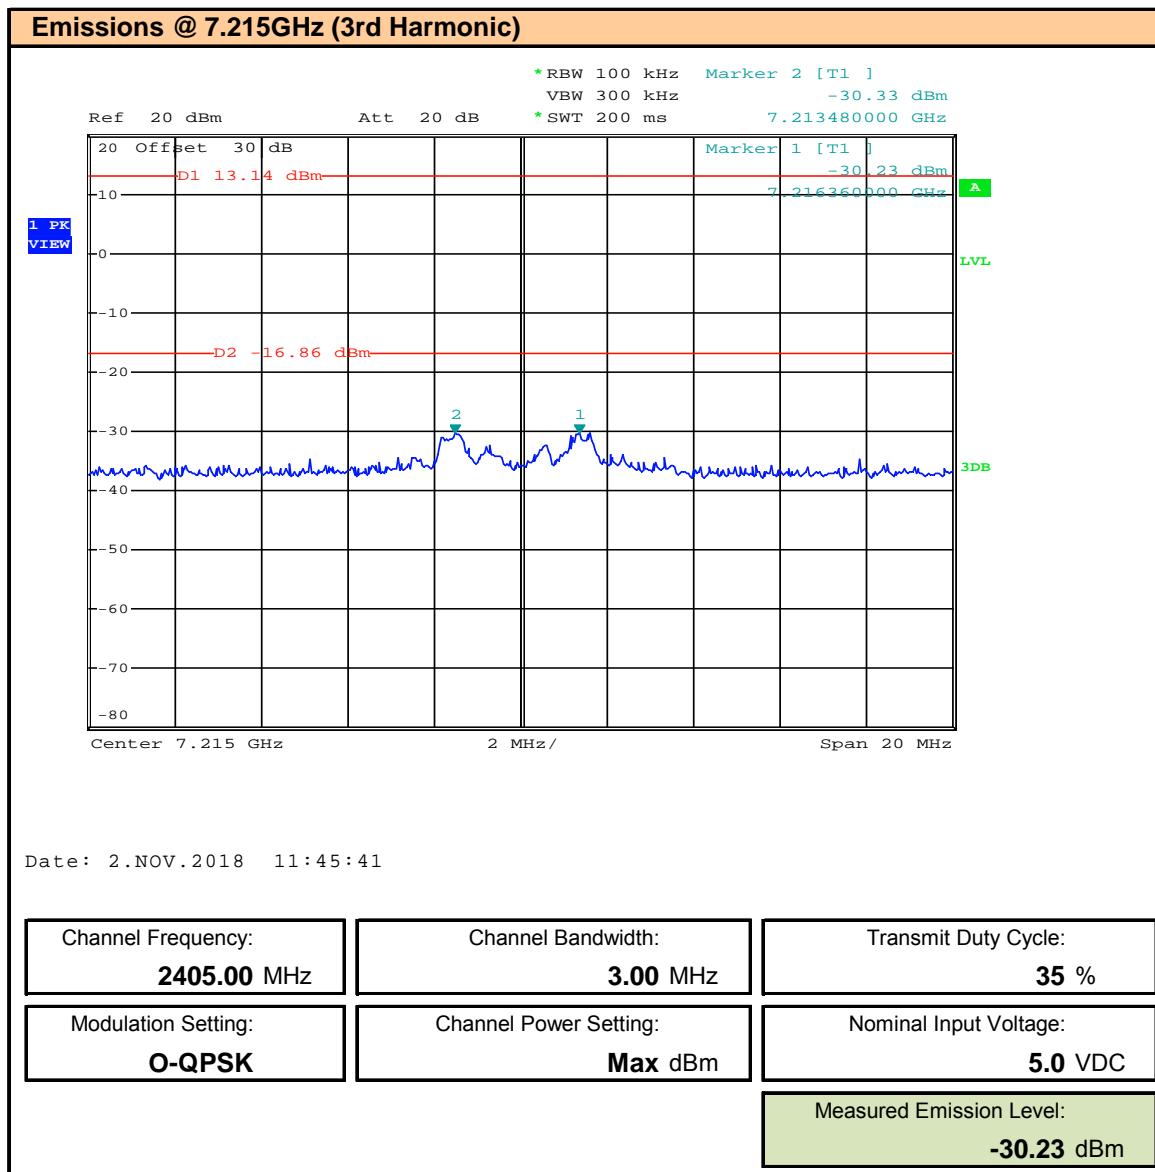


Table 12.2 – Summary of Conducted Spurious Emissions Measurements

Emission Level Measurement								
Frequency Range	BW (MHz)	Modulation	Power Setting <sup>(1)</sup> (dBm)	Supply Voltage (VDC)	Transmit Duty Cycle (%)	Measured Emission [E <sub>Meas</sub> ] (dBm)	Limit Line [A <sub>L</sub> ] (dBm)	Margin (dB)
90kHz - 1MHz	3	O-QPSK	Max	5.0	35	-42.00	-22.06	<b>19.94</b>
1 - 10MHz						-45.94	-16.86	<b>29.08</b>
10 - 100MHz						-48.87		<b>32.01</b>
100 - 1000MHz						-48.91		<b>32.05</b>
1 - 3GHz						-33.95		<b>17.09</b>
3 - 10GHz						-32.32		<b>15.46</b>
10 - 13.6GHz						-35.30		<b>18.44</b>
13.6 - 25GHz						-22.79		<b>5.93</b>
4.81GHz						-31.62		<b>14.76</b>
7.215GHz						-30.23		<b>13.37</b>
						<b>Result:</b>	<b>Complies</b>	

(1) The output power is factory set to maximum

Margin = A<sub>L</sub> - E<sub>MEAS</sub>

## 13.0 - BAND EDGE

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §2.1051, §15.247(d), RSS-Gen (6.13), RSS-247 (5.5), KDB 558074 (8.7), ANSI C63.10 (11.13.3.4)
----------------------------	---

### Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.
RSS-247 (5.5)	<p><b>5.5 Unwanted emissions</b></p> <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.</p> <p>d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).</p> <p>As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.</p>
C63.10 (11.13.1)	<p><b>11.13.1 General</b></p> <p>Emissions within a restricted band and within 2 MHz of an authorized band edge may be measured using either the marker-delta method or the integration method, which is described in 11.13.3, provided that the DTS bandwidth (or EBW) edge falls within 2 MHz of the band edge. Otherwise, all unwanted emissions measurements shall be performed using the standard methods.</p>
C63.10 (11.13.3) C63.10 (11.13.3.1)	<p><b>11.13.3 Integration method</b></p> <p><b>11.13.3.1 General</b></p> <p>The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is used, then use the procedure described in 11.13.3.2. Use the procedure described in 11.13.3.3 when using an average detector and the EUT can be configured to transmit continuously (i.e., <math>D \geq 98\%</math>). Use the procedure described in 11.13.3.4 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than <math>\pm 2\%</math>). Use the procedure described in 11.13.3.5 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2%).</p>

### Test Procedure (Cont.)

<b>Normative Reference</b>	FCC 47 CFR §2.1051, §15.247(d), RSS-Gen (6.13), RSS-247 (5.5), KDB 558074 (8.7), ANSI C63.10 (11.13.3.4)
----------------------------	---

### Limits

C63.10 (11.13.3.4)	<p><b>11.13.3.4 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle</b></p> <p>a) The EUT shall be configured to operate at the maximum achievable duty cycle.</p> <p>b) Measure the duty cycle, <math>x</math>, of the transmitter output signal as described in Section 6.0.</p> <p>c) Set instrument center frequency to the frequency of the emission to be measured.</p> <p>d) Set span to 2 MHz</p> <p>e) RBW = 100 kHz.</p> <p>f) VBW <math>\geq 3 \times</math> RBW.</p> <p>g) Detector = RMS, if span/(# of points in sweep) <math>\leq</math> (RBW/2).</p> <p>h) Averaging type = power (i.e., RMS).</p> <p>i) Sweep time = auto.</p> <p>j) Perform a trace average of at least 100 traces.</p> <p>k) Compute the power by integrating the spectrum over 1 MHz using the instrument's band power measurement function with band limits set equal to the emission frequency (<math>f_{\text{emission}} \pm 0.5</math> MHz). If the spectrum analyzer does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by (<math>f_{\text{emission}} \pm 0.5</math> MHz).</p> <p>l) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle. The correction factor is computed as follows:</p> <p>1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is <math>10 \log(1/x)</math>, where <math>x</math> is the duty cycle.</p>
--------------------	--

### Test Setup


### Appendix A

### Figure A.1

### Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above. The Reference Level Measurement was The output power of the DUT was set to the manufacturer's highest output power setting at the Low and High frequency channels as permitted by the device. The unwanted band edge emissions were measured and recorded. The highest Reference Level Measurement from Section 12 was to determine the attenuation of the unwanted band edge emissions. The measured Duty Cycle was 35%, reference Section 7. The limit line was reduced by a factor of  $10 \log(1/.35) = 4.6$ dB.

Plot 13.1 – Lower Band Edge – 2405MHz

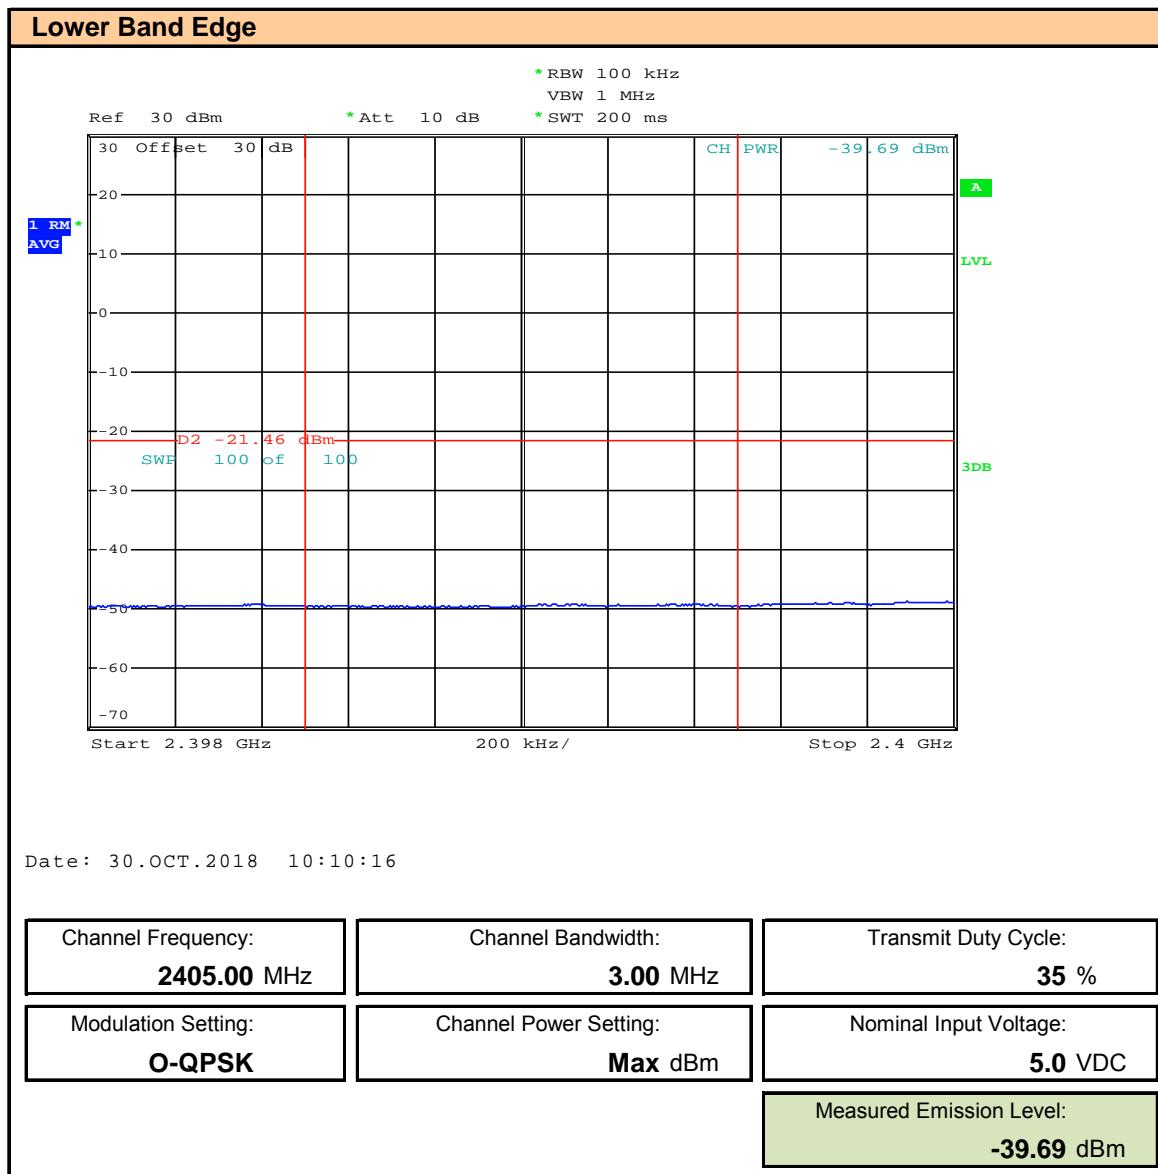

Plot 13.2 – Upper Band Edge – 2480MHz

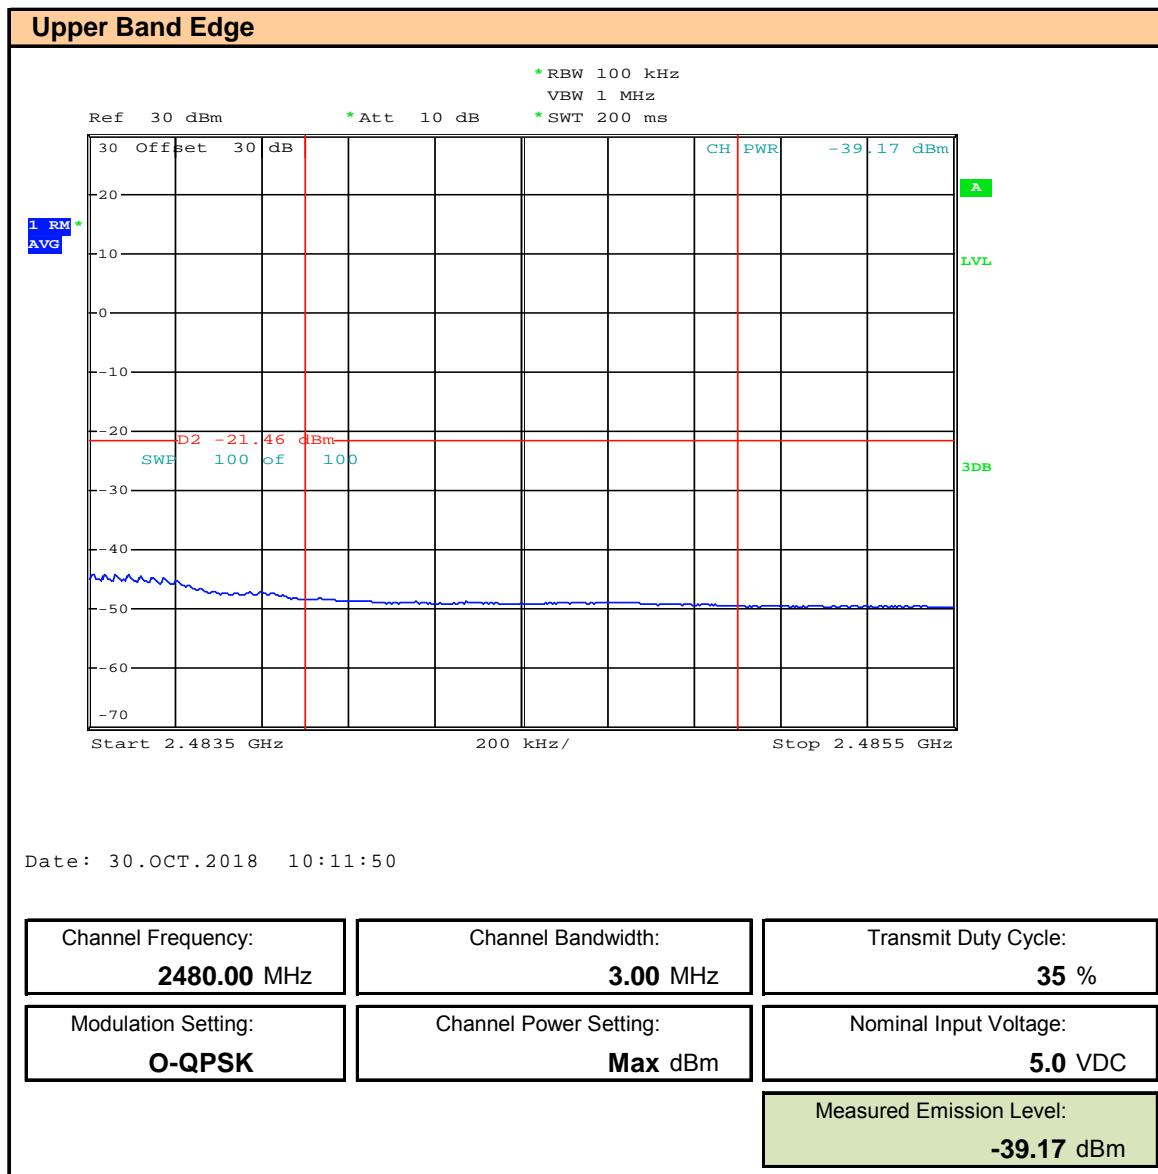


Table 13.1 – Summary of Band Edge Measurements

Band Edge Emission Measurement								
Frequency Range (MHz)	BW (MHz)	Modulation	Power Setting <sup>(1)</sup> (dBm)	Supply Voltage (VDC)	Transmit Duty Cycle (%)	Measured Emission [E <sub>Meas</sub> ] (dBm)	Limit Line [A <sub>L</sub> ] (dBm)	Margin (dB)
2398 - 2400	3	O-QPSK	Max	5.0	35	-39.69	-21.46	18.23
2483.5 - 2485.5						-39.17		17.71
Result:							Complies	

(1) The output power is factory set to maximum

Margin = A<sub>L</sub> - E<sub>MEAS</sub>

## 14.0 - RESTRICTED BANDS

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §2.1051, §15.247(d), §15.205(a), §15.205(c ), §15.209(a) KDB 558074 (8.6), ANSI C63.10 (11.12.2.4)
----------------------------	--

### Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
C63.10 (11.12)	<b>11.12.0 Emissions in restricted frequency bands</b> The DTS rules specify that emissions which fall into restricted frequency bands shall comply with the general radiated emission limits.
C63.10 (11.12.2)	<b>11.12.2 Antenna-port conducted measurements</b> <b>11.12.2.1 General</b> Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required. <b>11.12.2.2 General Procedure for conducted measurements in restricted bands</b> a) Measure the conducted output power (in dBm) using the detector specified (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies $\leq$ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies $>$ 1000 MHz). e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship: $E = EIRP - 20\log D + 104.8$ where: E = electric field strength in $\text{dB}\mu\text{V}/\text{m}$ , EIRP = equivalent isotropic radiated power in dBm D = specified measurement distance in meters. f) Compare the resultant electric field strength level to the applicable g) Perform radiated spurious emission test

**Test Procedure (Cpnt.)**

<b>Normative Reference</b>	FCC 47 CFR §2.1051, §15.247(d), §15.205(a), §15.205(c), §15.209(a) KDB 558074 (8.6), ANSI C63.10 (11.12.2.4)
----------------------------	---

**Limits**

C63.10 (11.12.2.4)	<p><b>11.12.2.4 Peak power measurement procedure</b></p> <p>a) RBW = as specified in Table 1.</p> <p>b) VBW <math>\geq</math> 3 X RBW.</p> <p>c) Detector = Peak.</p> <p>d) Sweep time = auto.</p> <p>e) Trace mode = max hold.</p> <p>f) Allow sweeps to continue until the trace stabilizes.</p> <p><b>Table 1 - RBW as a Function of Frequency</b></p> <table border="1"> <thead> <tr> <th>Frequency</th><th>RBW</th></tr> </thead> <tbody> <tr> <td>9 - 150kHz</td><td>200 - 300Hz</td></tr> <tr> <td>0.15 - 30MHz</td><td>9 - 10kHz</td></tr> <tr> <td>30 - 1000</td><td>100 - 120kHz</td></tr> <tr> <td>&gt; 1000</td><td>1MHz</td></tr> </tbody> </table> <p>If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.</p>	Frequency	RBW	9 - 150kHz	200 - 300Hz	0.15 - 30MHz	9 - 10kHz	30 - 1000	100 - 120kHz	> 1000	1MHz						
Frequency	RBW																
9 - 150kHz	200 - 300Hz																
0.15 - 30MHz	9 - 10kHz																
30 - 1000	100 - 120kHz																
> 1000	1MHz																
47 CFR §15.209(a)	<p><b>§15.209 Radiated emission limits; general requirements.</b></p> <p>(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field Strength (microvolts/meter)</th> </tr> </thead> <tbody> <tr> <td>0.009 - 0.490</td> <td>2400/F (kHz) @300m</td> </tr> <tr> <td>0.490 - 1.705</td> <td>24000/F (kHz) @30m</td> </tr> <tr> <td>1.705 - 30</td> <td>30 @ 30m</td> </tr> <tr> <td>30 - 88</td> <td>100 @3m</td> </tr> <tr> <td>88 - 216</td> <td>150 @3m</td> </tr> <tr> <td>216 - 960</td> <td>200 @3m</td> </tr> <tr> <td>Above 960</td> <td>500 @3m</td> </tr> </tbody> </table>	Frequency (MHz)	Field Strength (microvolts/meter)	0.009 - 0.490	2400/F (kHz) @300m	0.490 - 1.705	24000/F (kHz) @30m	1.705 - 30	30 @ 30m	30 - 88	100 @3m	88 - 216	150 @3m	216 - 960	200 @3m	Above 960	500 @3m
Frequency (MHz)	Field Strength (microvolts/meter)																
0.009 - 0.490	2400/F (kHz) @300m																
0.490 - 1.705	24000/F (kHz) @30m																
1.705 - 30	30 @ 30m																
30 - 88	100 @3m																
88 - 216	150 @3m																
216 - 960	200 @3m																
Above 960	500 @3m																

### Test Procedure (Cont.)

<b>Normative Reference</b>	FCC 47 CFR §2.1051, §15.247(d), §15.205(a), §15.205(c), §15.209(a) KDB 558074 (8.6), ANSI C63.10 (11.12.2.5.2)
----------------------------	---

### Limits

C63.10 (11.12.2.5.2)	<p><b>11.12.2.5.2 Trace averaging across on- and off-times of the EUT transmissions followed by duty cycle correction</b></p> <p>a) The EUT shall be configured to operate at the maximum achievable duty cycle.</p> <p>b) Measure the duty cycle, x, of the transmitter output signal as described in Section 6.0.</p> <p>c) RBW = 1 MHz</p> <p>d) VBW <math>\geq</math> 3 X RBW.</p> <p>e) Detector = RMS, if span/(# of points in sweep) <math>\leq</math> (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.</p> <p>f) Averaging type = power (i.e., RMS).</p> <p>g) Sweep time = auto.</p> <p>h) Perform a trace average of at least 100 traces.</p> <p>i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle. The correction factor is computed as follows:</p> <p>1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is <math>10 \log(1/x)</math>, where x is the duty cycle.</p>
----------------------	---

### Test Setup


### Appendix A

### Figure A.1


### Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above. The output power of the DUT was set to the manufacturer's highest output power setting at the Low frequency channel as permitted by the device. The unwanted emissions were measured and recorded and compare to the limits converted to dBuV/m @3m.


Plot 14.1 – Restricted Band – 9kHz – 150kHz

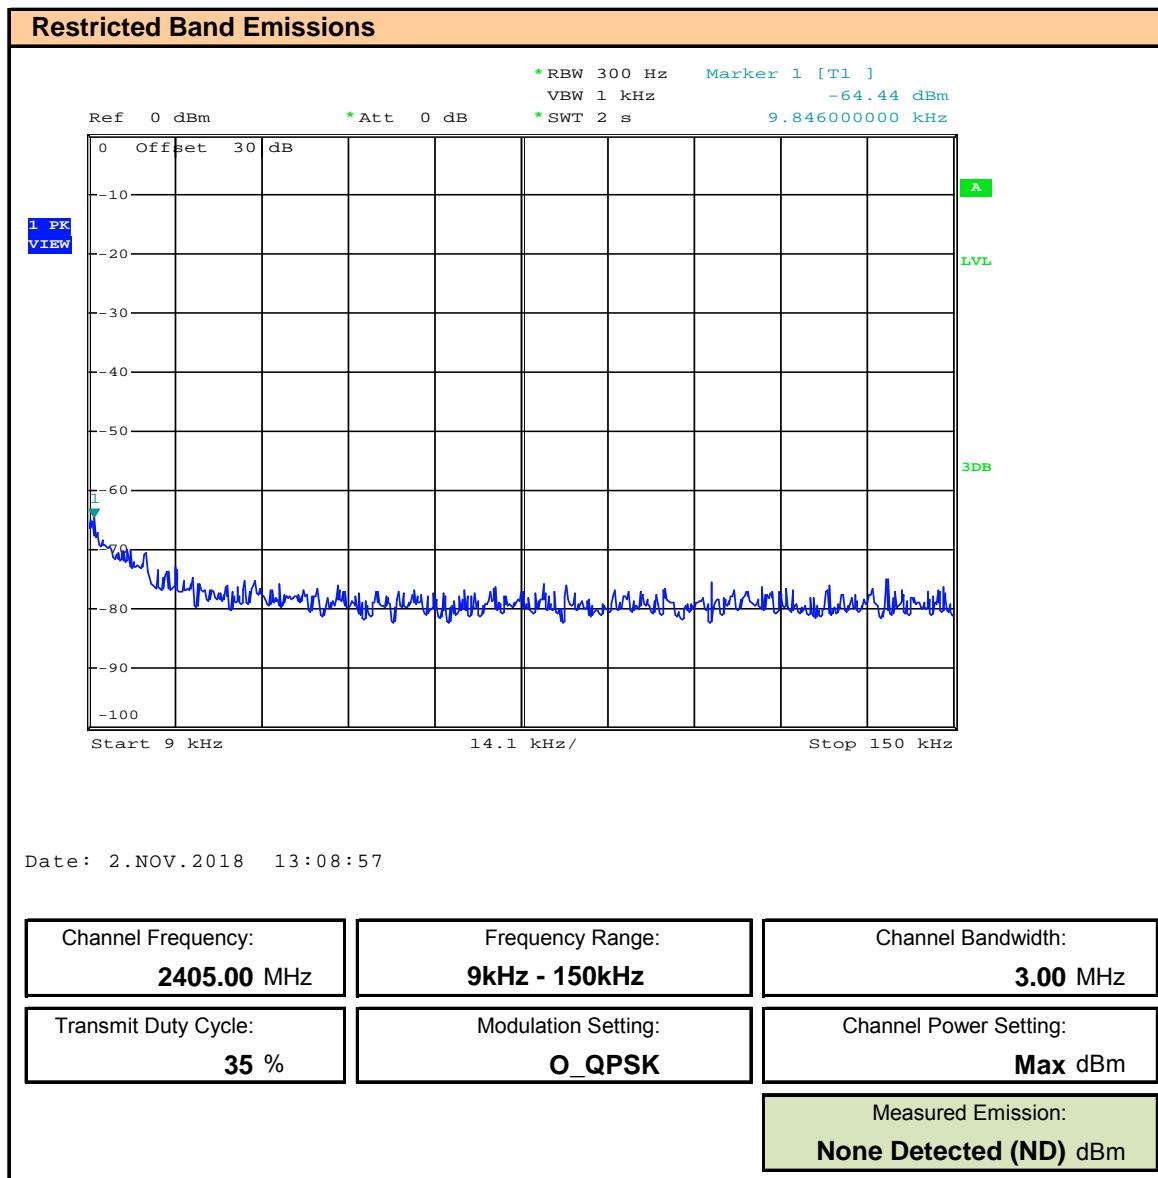


Plot 14.2 – Restricted Band – 150kHz – 1MHz

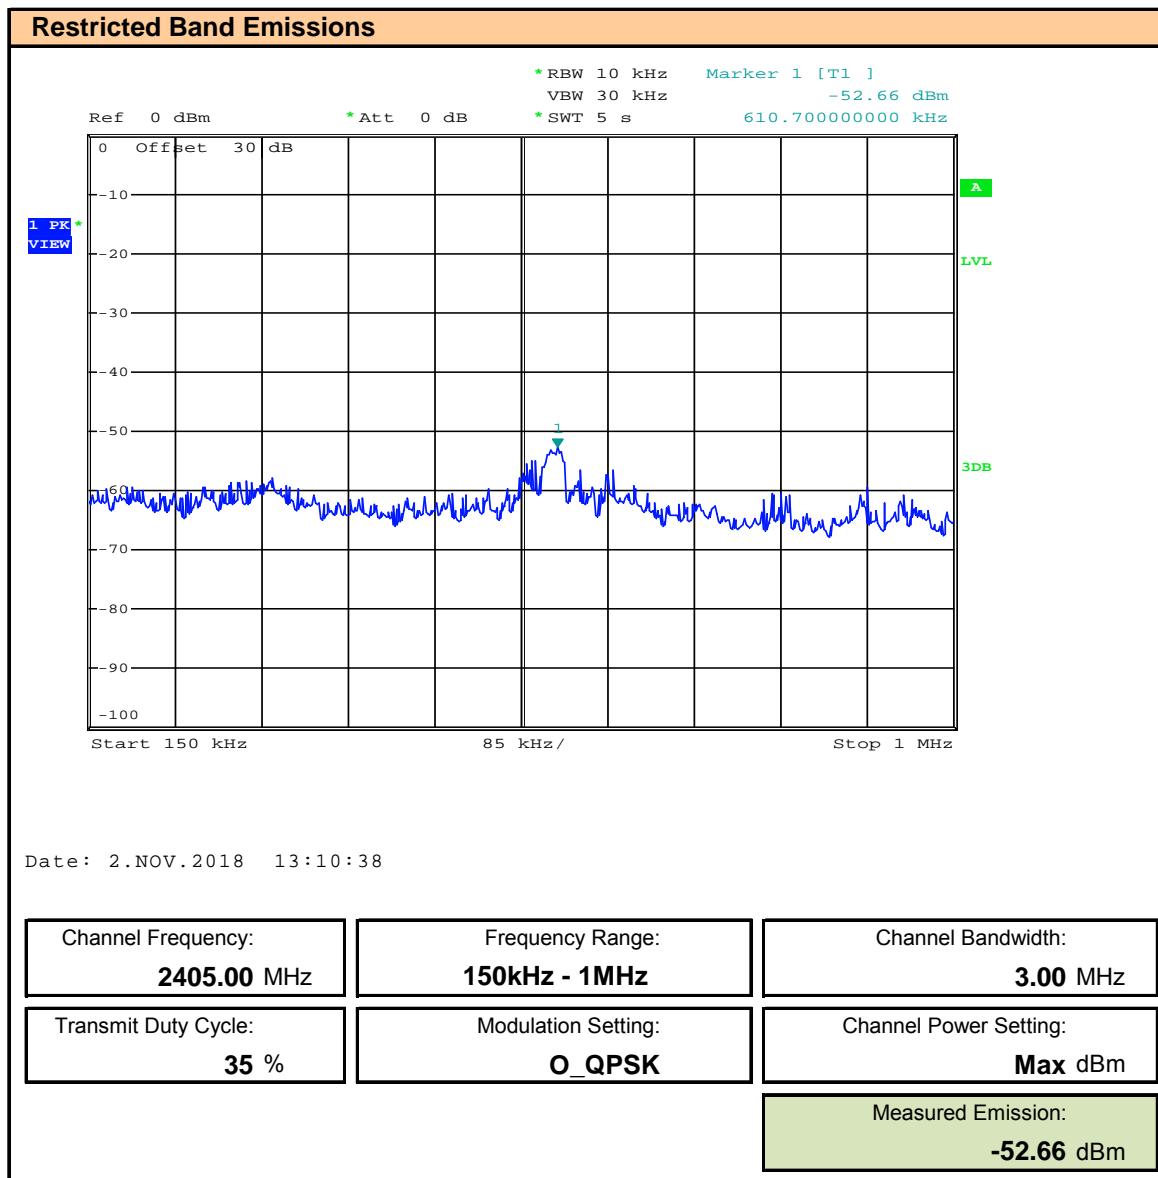


Plot 14.3 – Restricted Band – 1MHz – 30MHz

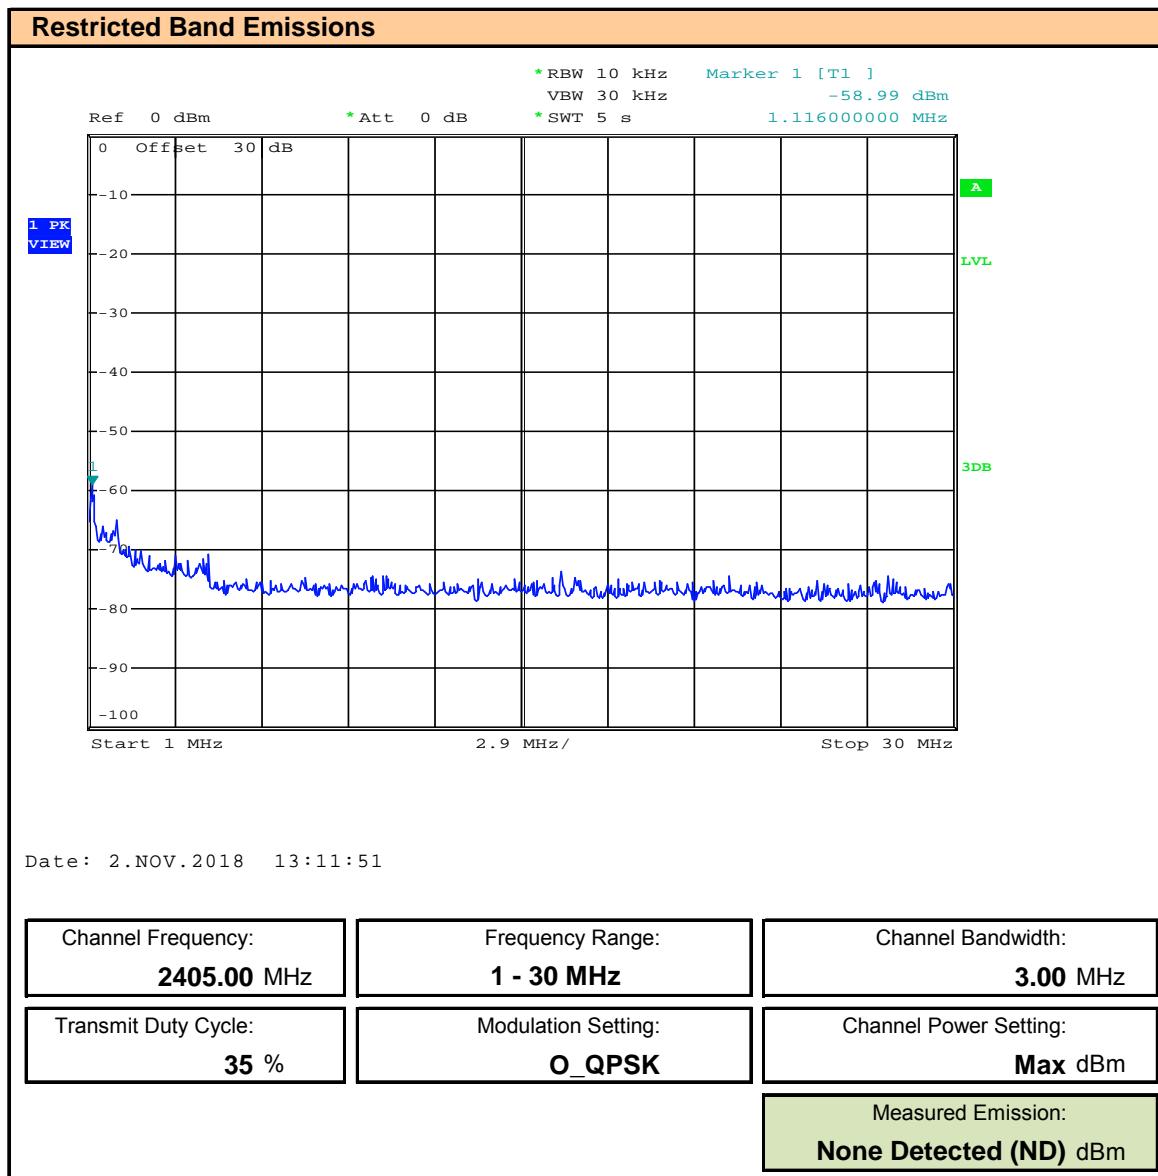


Plot 14.4 – Restricted Band – 30MHz – 1000MHz

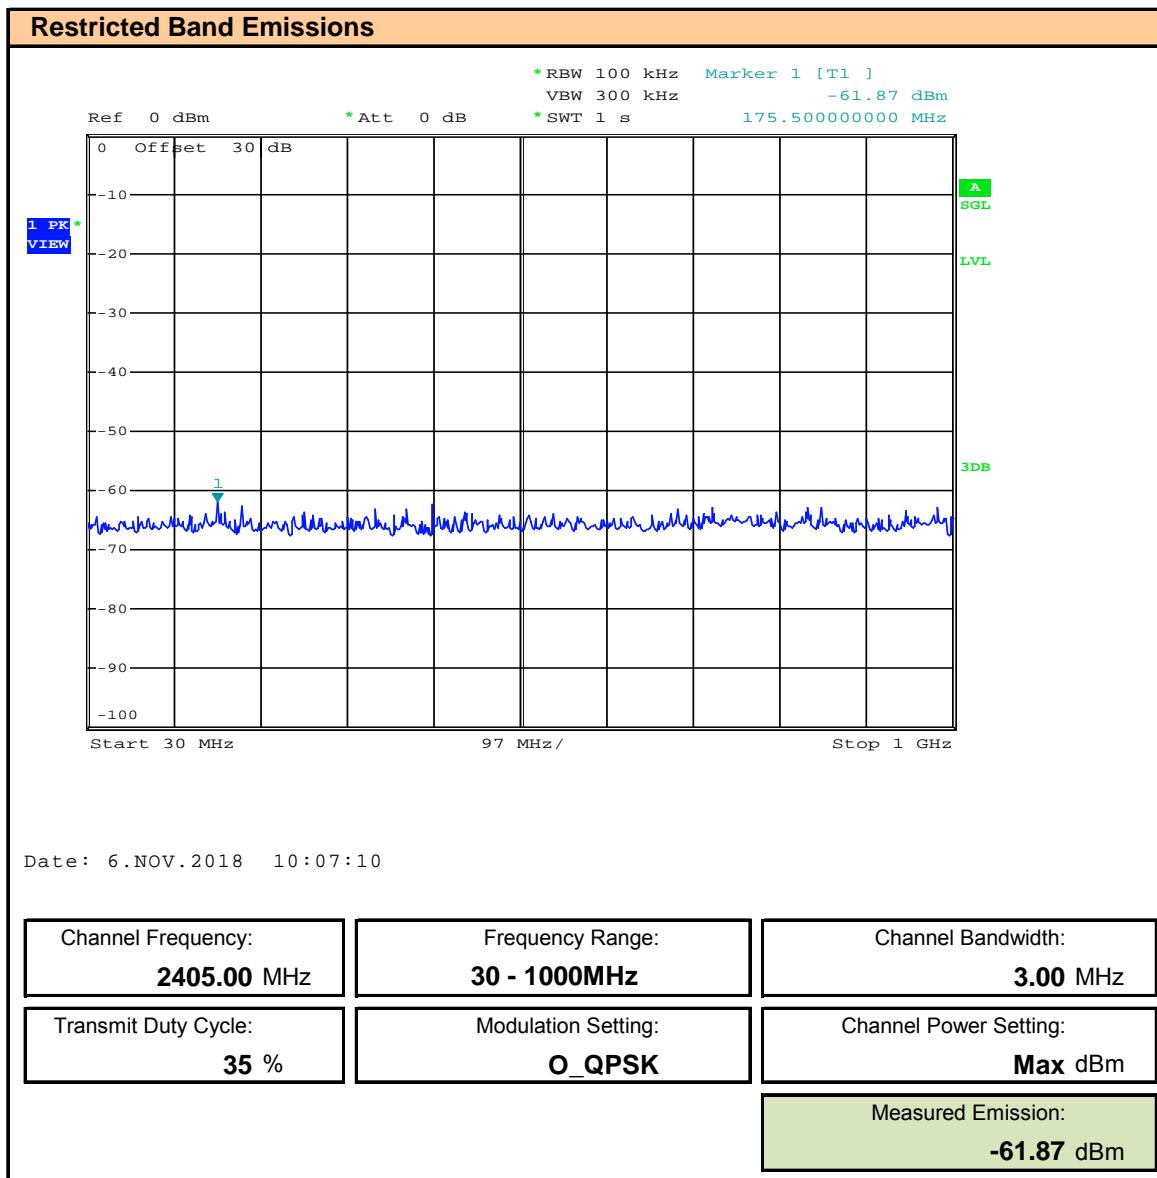


**Plot 14.5 – Restricted Band – 1GHz – 30GHz**

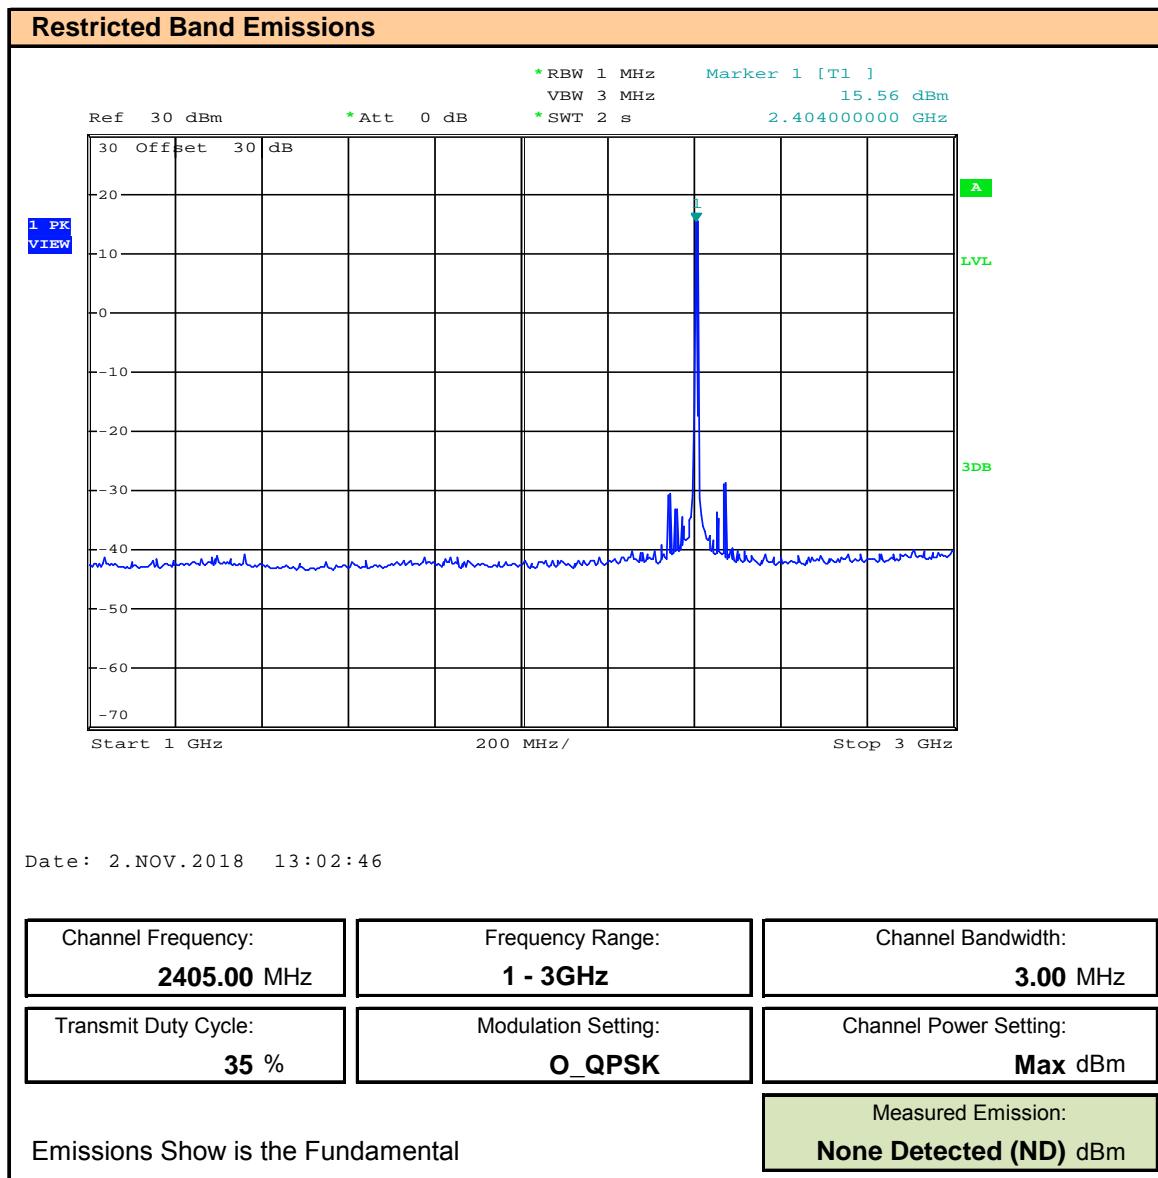


**Plot 14.6 – Restricted Band – 3GHz – 13.6GHz**

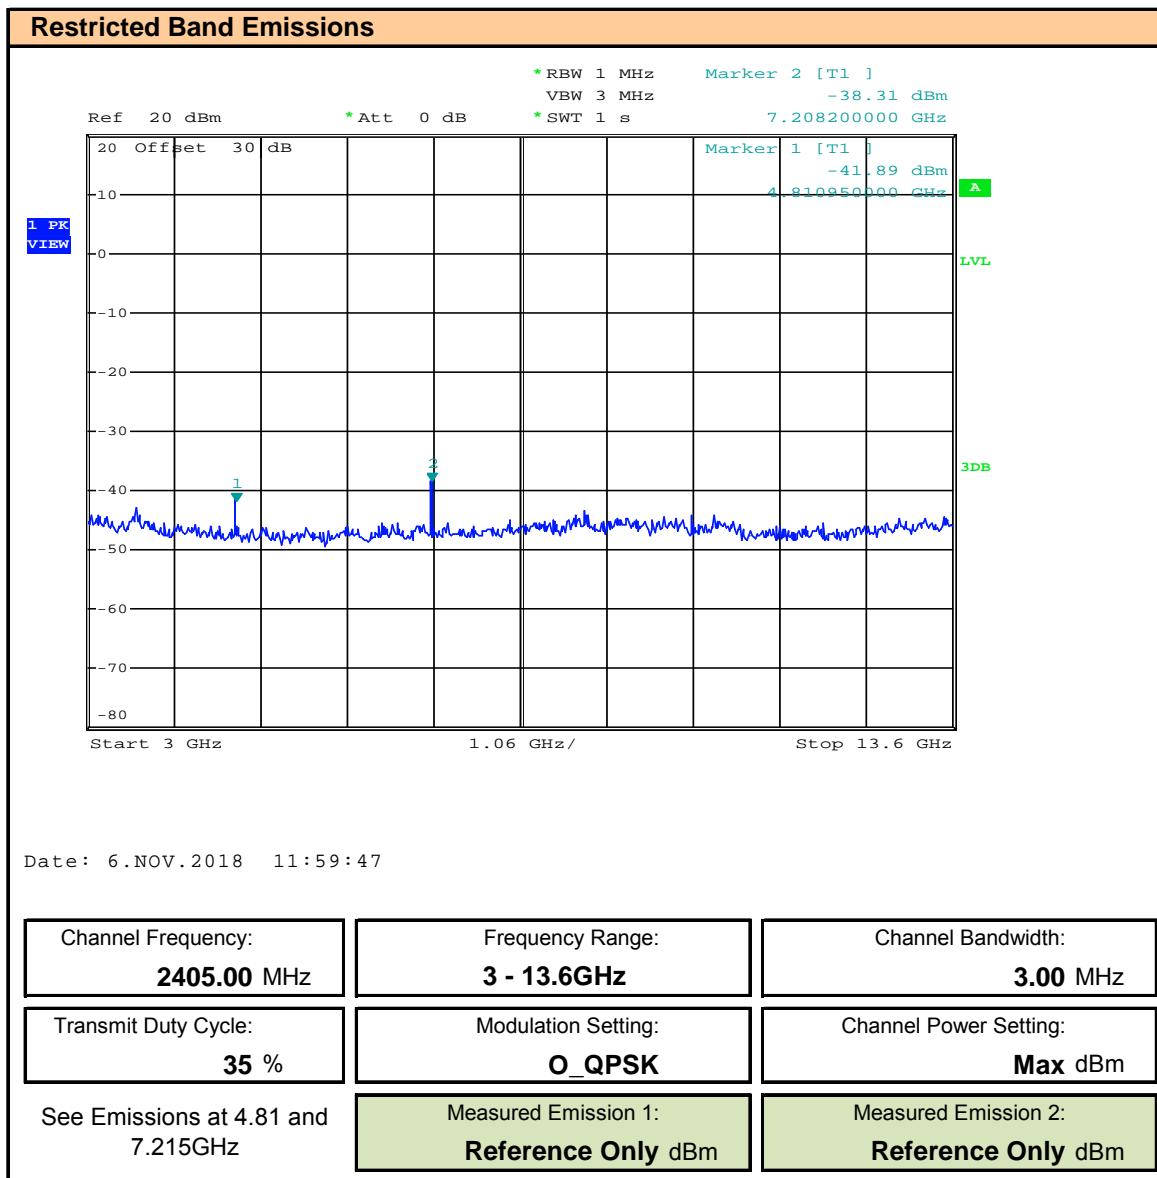

**Plot 14.7 – Restricted Band – 13.6GHz – 25GHz**

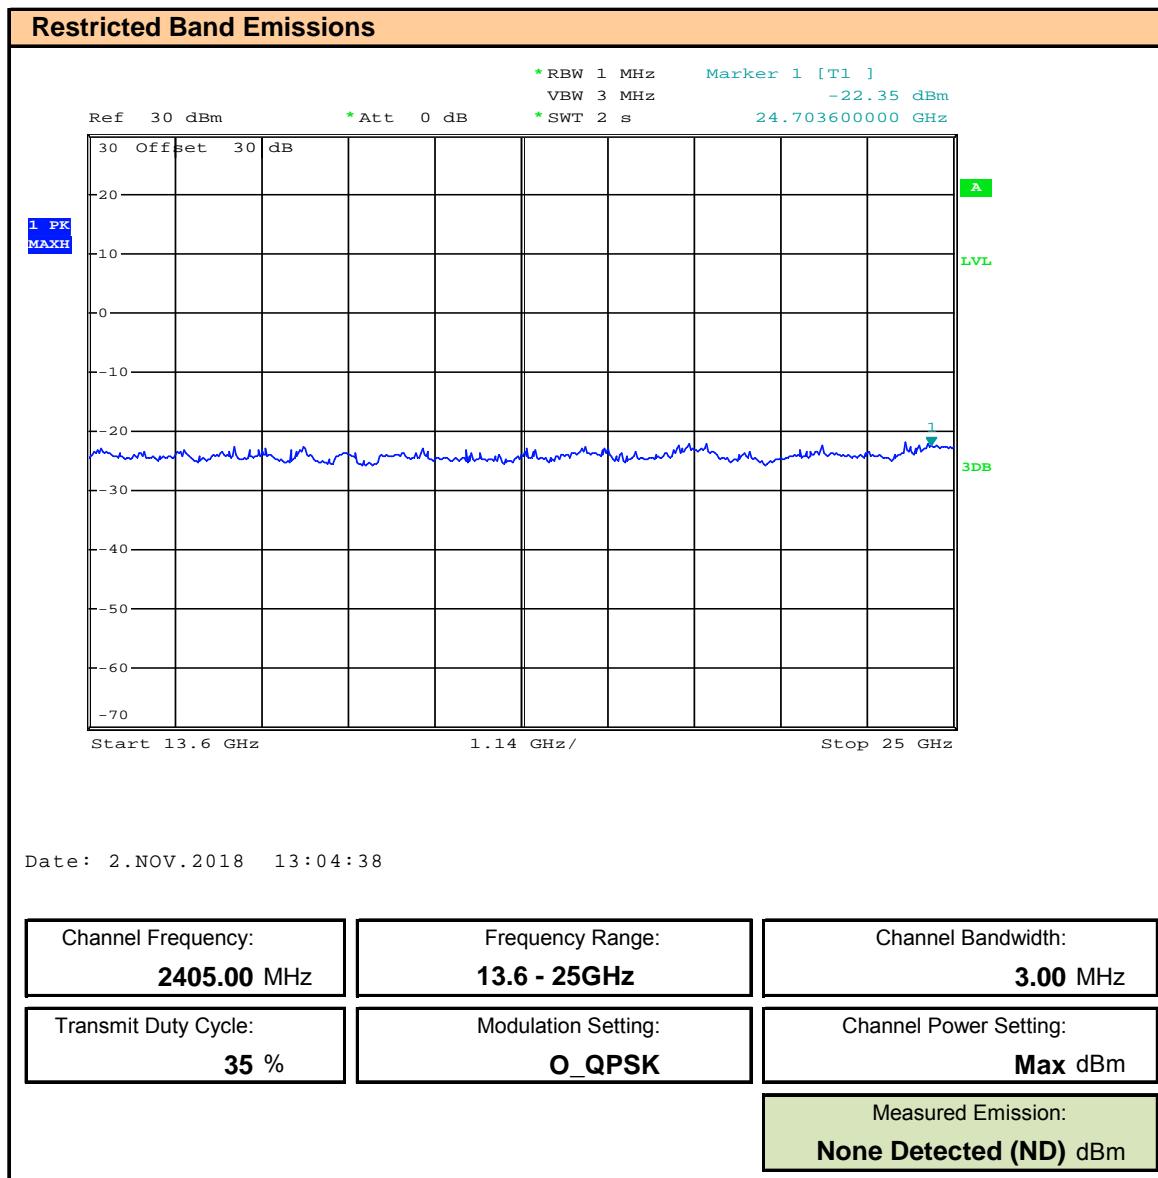

Plot 14.8 – Restricted Band – 4.81GHz

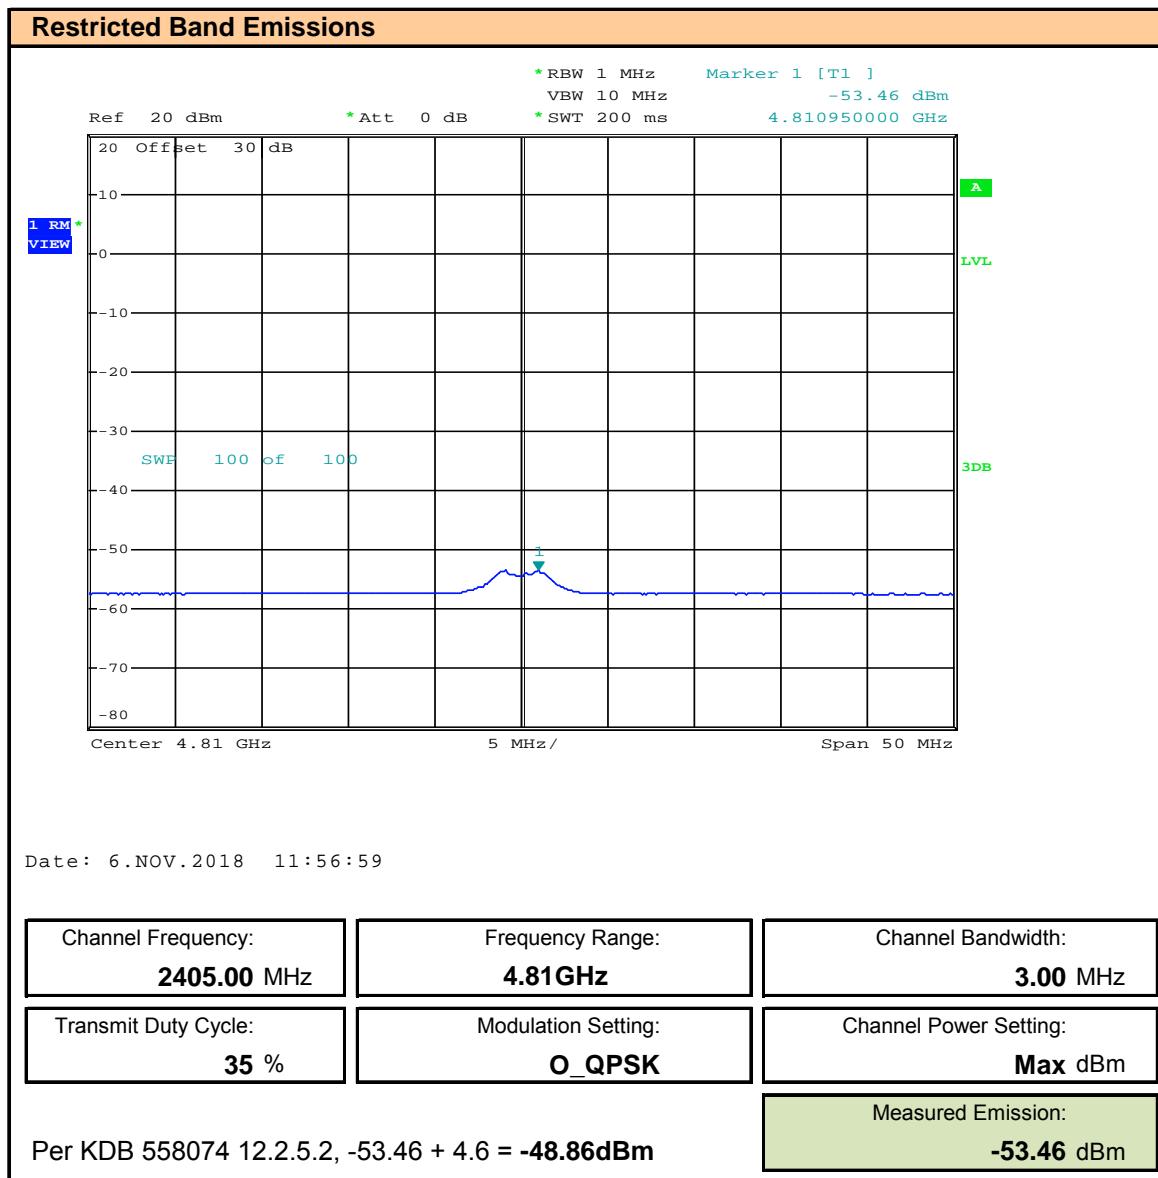

Plot 14.9 – Restricted Band – 7.215GHz

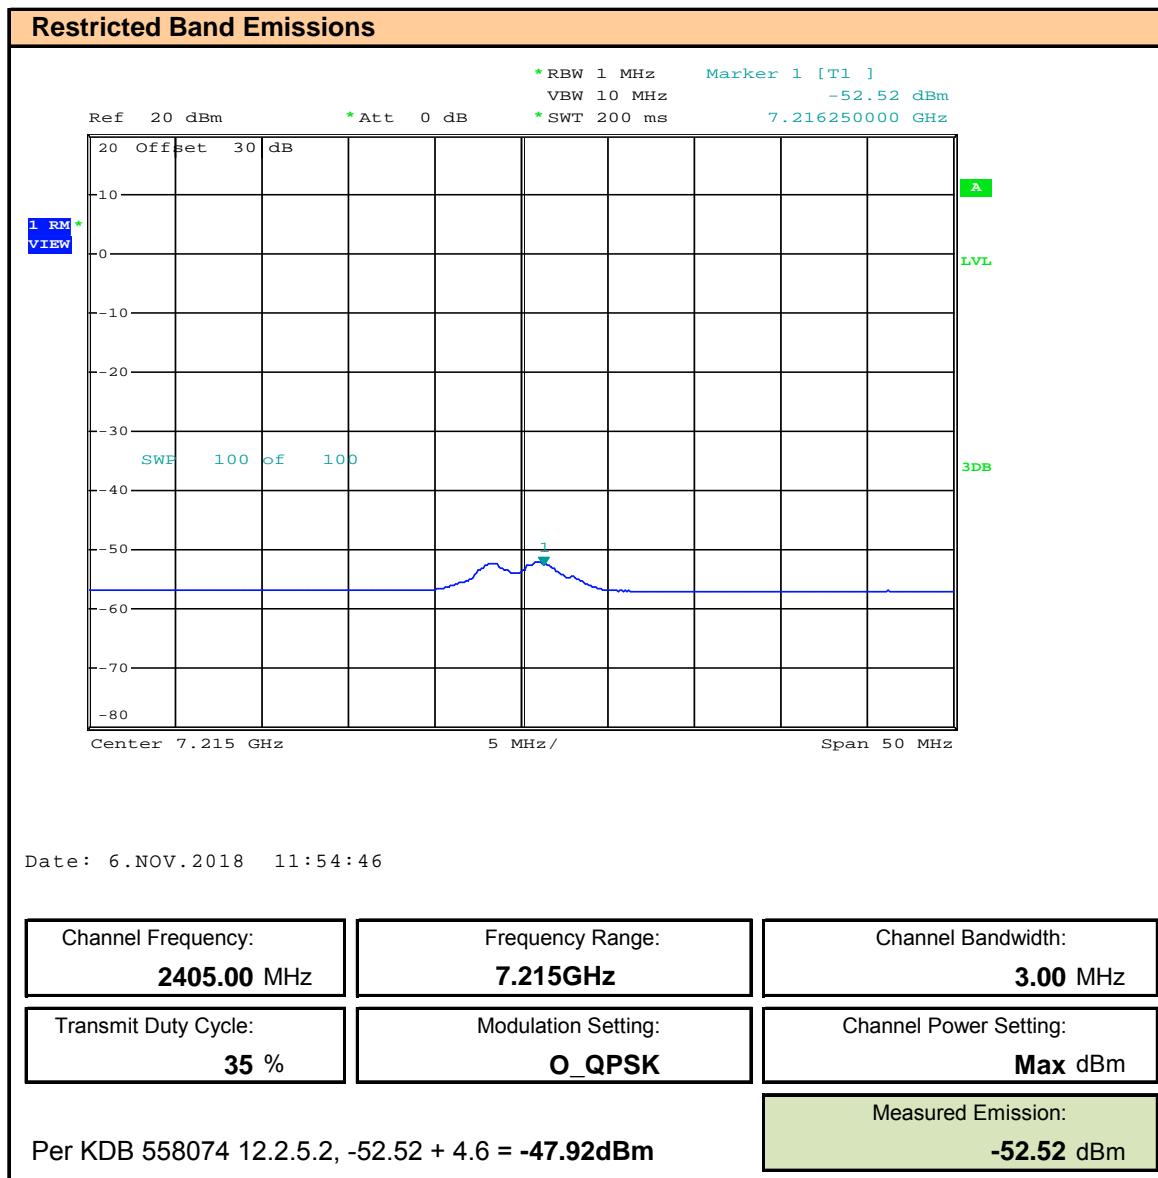


Table 14.1 – Summary of Restricted Band Measurements

Emission Level Measurement Results										
Frequency Range	BW (MHz)	Modulation	Power Setting <sup>(1)</sup> (dBm)	Transmit Duty Cycle (%)	Measured Emission [E <sub>Meas</sub> ] (dBm)	Antenna Gain [G <sub>T</sub> ] (dBi)	EIRP <sup>(2)</sup> [EIRP] (dBm)	Field Strength <sup>(3)</sup> [E] (dBuV/m @ 3m)	Worst Case Limit <sup>(4)</sup> [A <sub>L</sub> ] (dBuV @ 3m)	Margin (dB)
9kHz - 150kHz	3	O_QPSK	Max	35	ND	5.00				n/a
150kHz - 1MHz					-52.66		-41.66	53.60	63.0	9.40
1 - 30MHz					ND					n/a
30 - 1000MHz					-61.87		-52.17	43.09	43.5	0.41
1 - 3GHz					ND					n/a
3 - 13.6GHz					ND					n/a
13.6 - 25GHz					ND					n/a
4.81GHz(5)					-48.86		-43.86	51.40	54.0	2.60
7.215GHz(5)					-47.92		-42.92	52.34	54.0	1.66
Results:										Complies

(1) The output power is factory set to maximum

(2) Calculated: EIRP = E<sub>[MEAS]</sub> + G<sub>T</sub> + CF, CF = 6dB for F ≤ 30MHz, 4.7dB for 30MHz ≤ F ≤ 1000MHz, 0dB for F > 1000MHz

(3) Calculated: E = EIRP - 20Log(D) + 104.8, D=3m

(4) The lowest limit within the test frequency range applied.

(5) Evaluated per KDB 558074 (12.2.5.2), E<sub>[MEAS]</sub> = E<sub>[MEAS]</sub> + 10Log(1/x), x = Duty Cycle (35%), Duty Cycle Correction = 4.6dB

Limit between 9kHz and 490kHz = 2400/F (kHz) @300m = 266uV/m to 4.89uV/m

dBuV/m = 20Log (uV/m) = 48.5dBuV/m to 13.8dBuV/m

Distance Corrected: = 128.5dBuV/m to 93.8dBuV/m

Limit between 490kHz and 1705kHz = 24000/F (kHz) @30m = 160uV/m to 14uV/m

dBuV/m = 20Log (uV/m) = 44.1dBuV/m to 23dBuV/m

Distance Corrected: = 88.1dBuV/m to 63dBuV/m

Limit Between 1705kHz and 30MHz = 30uV/m @30m

dBuV/m = 20Log (uV/m) = 29.5dBuV/m

Distance Corrected: = 69.5dBuV/m

Limit between 30MHz and 88MHz = 100uV/m @ 3m

dBuV/m = 20Log (uV/m) = 40dBuV/m

Limit between 88MHz and 216MHz = 150uV/m @ 3m

dBuV/m = 20Log (uV/m) = 43.5dBuV/m

Limit between 216MHz and 960MHz = 200uV/m @3m

dBuV/m = 20Log (uV/m) = 46dBuV/m

Limit Above 960MHz = 500uV/m @3m

dBuV/m = 20Log (uV/m) = 54.0dBuV/m

Distance Correction: 40Log(D<sub>LIM</sub>/D<sub>MEAS</sub>) + Limit

Below 30MHz Where D<sub>LIM</sub> is the Limit Distance, D<sub>MEAS</sub> is the Measurement Distance, Below

= 80dB + Limit @300m

= 40dB + Limit @30m

§15.31(f)(2) At frequencies below 30 MHz...when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

## 15.0 - RADIATED RX SPURIOUS EMISSIONS

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §15.109, ICES-003(6.2) ANSI C63.4:2014
----------------------------	--

### Limits


47 CFR §15.109	(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values: 30-88MHz: 40dB <sub>u</sub> V/m 88-216MHz: 216-960MHz: > 960MHz: 54dB <sub>u</sub> V/m
ICES-003(6.2.1)	6.2.1 - Radiated Emissions Limits Below 1 GHz Class B: ITE that does not meet the conditions for Class A operation shall comply with the Class B radiated limits set out in Table 5 determined at a distance of 3 metres. 30-88MHz: 40dB <sub>u</sub> V/m 88-216MHz: 216-960MHz: > 960MHz: 54dB <sub>u</sub> V/m

<b>Test Setup</b>	<b>Appendix A</b>	<b>Figure A.2</b>
-------------------	-------------------	-------------------

### Measurement Procedure

The DUT was set up as per ANSI C63.4:2014. Emissions were scanned between 30MHz and 1000MHz. The turntable was rotated 360 degrees and the antenna was elevated to 4m to optimize the measured emissions.

**Plot 15.1 – Radiated Emissions 30MHz – 1000MHz, Horizontal**

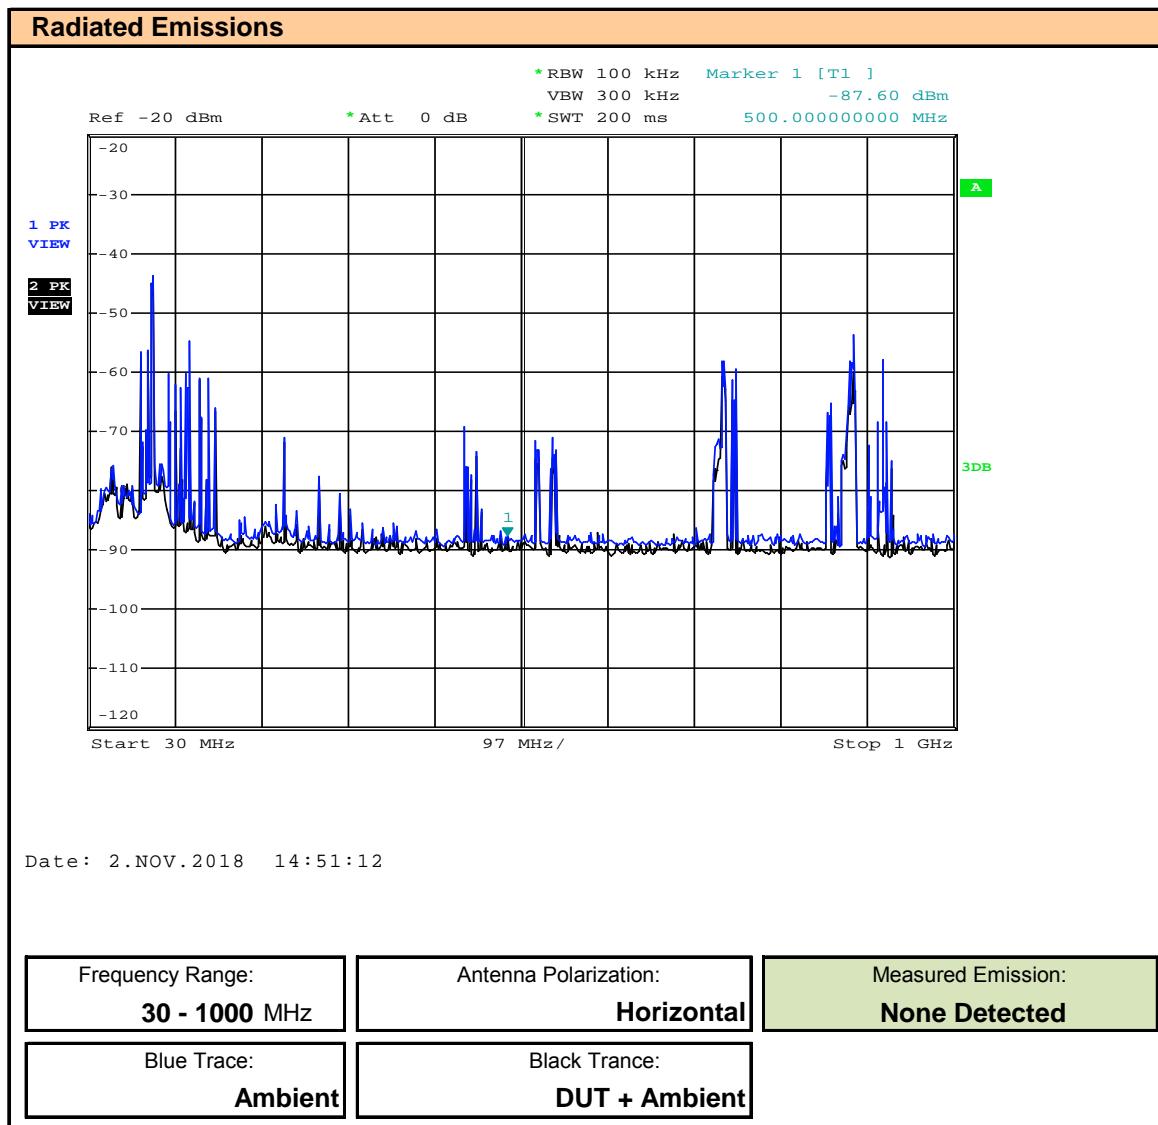

Plot 15.2 – Radiated Emissions 30MHz – 1000MHz, Vertical

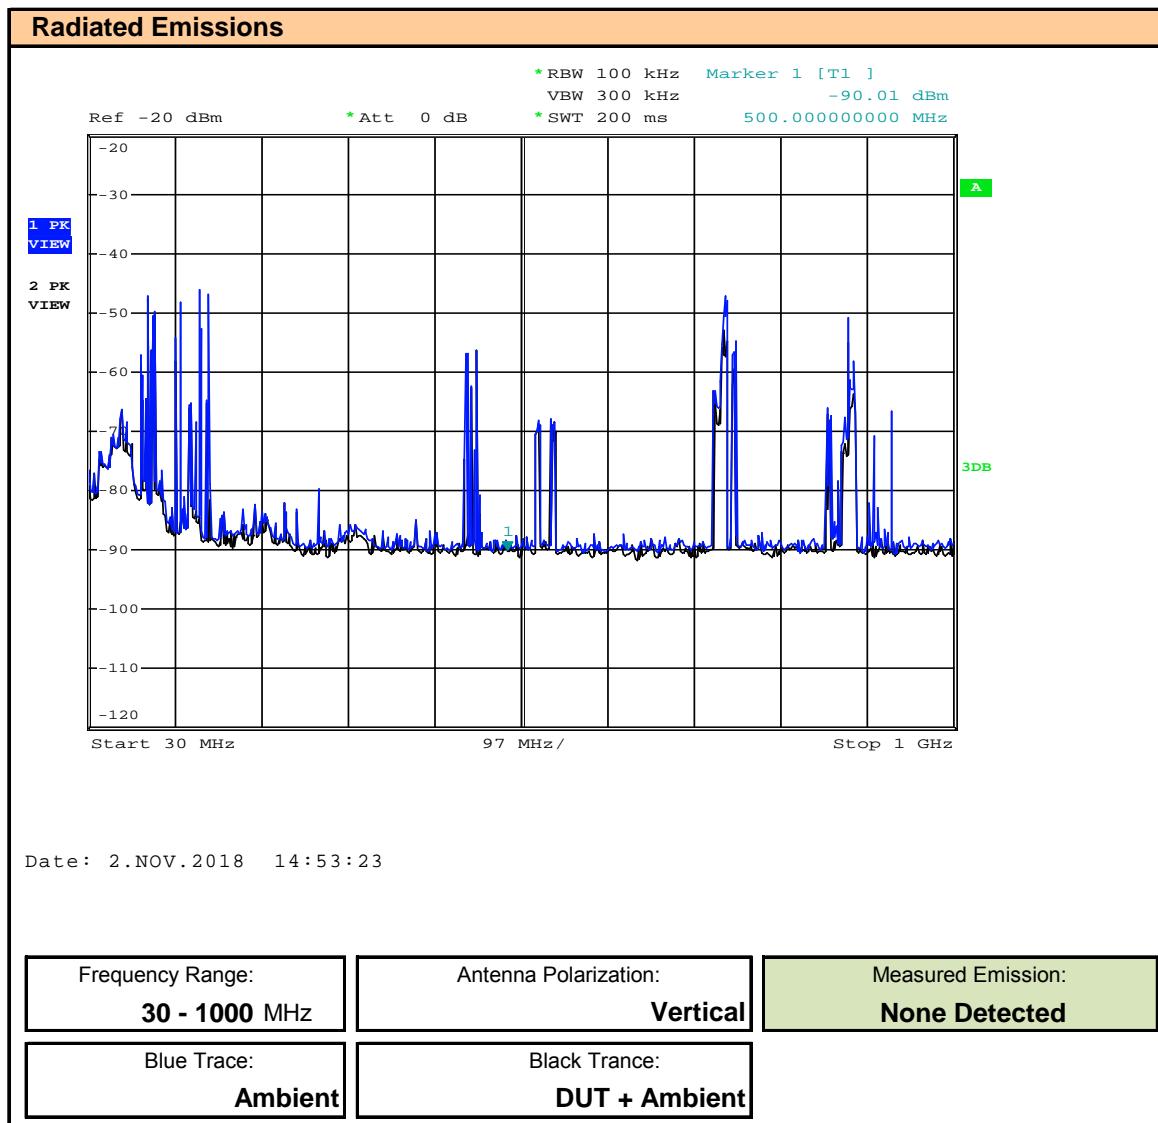


Table 15.1 – Summary of Radiated Rx Spurious Emissions

<b>§15.109, ICES-003 (6.2)</b>					
<b>Emission Frequency (MHz)</b>	<b>Antenna Polarization</b>	<b>Measured Emission [E<sub>Meas</sub>] (dBuV)</b>	<b>Corrected Emission [E<sub>Corr</sub>] (W)</b>	<b>Limit (W)</b>	<b>Margin (dB)</b>
30-1000	Horizontal	n/a	n/a	-	-
30-1000	Vertical	n/a	n/a	-	-
<b>Results:</b>				<b>Complies</b>	

No emissions detected above ambient noise.

## 16.0 - POWER LINE CONDUCTED EMISSIONS

### Test Procedure

<b>Normative Reference</b>	FCC 47 CFR §15.109, ICES-003(6.1) ANSI C63.4:2014
----------------------------	--

### Limits


47 CFR §15.109	(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges. 0.15-0.5MHz: 66-56 dBuV Quasi Peak, 56-46 dBuV Average, Decreases with the logarithm of the 0.5 - 5.0 MHz: 56 dBuV Quasi Peak, 46 dBuV Average 5.0 - 30.0 MHz: 60 dBuV Quasi Peak, 50 dBuV Average
ICES-003(6.1)	6.1 - AC Power Line Conducted Emissions Limits Class B: ITE that does not meet the conditions for Class A operation shall comply with the Class B radiated limits set out in Table 2. 0.15-0.5MHz: 66-56 dBuV Quasi Peak, 56-46 dBuV Average, Decreases with the logarithm of the 0.5 - 5.0 MHz: 56 dBuV Quasi Peak, 46 dBuV Average 5.0 - 30.0 MHz: 60 dBuV Quasi Peak, 50 dBuV Average

<b>Test Setup</b>	<b>Appendix A</b>	<b>Figure A.3</b>
-------------------	-------------------	-------------------

### Measurement Procedure

The DUT was connected to a LISN as per ANSI C63.4:2014 as shown in Figure A.3. The DUT was configured to transmit at 2405MHz at its maximum duty cycle. The AC Power Line Conducted Emissions were measured and recorded.

Plot 16.1 – Power Line Conducted – L1

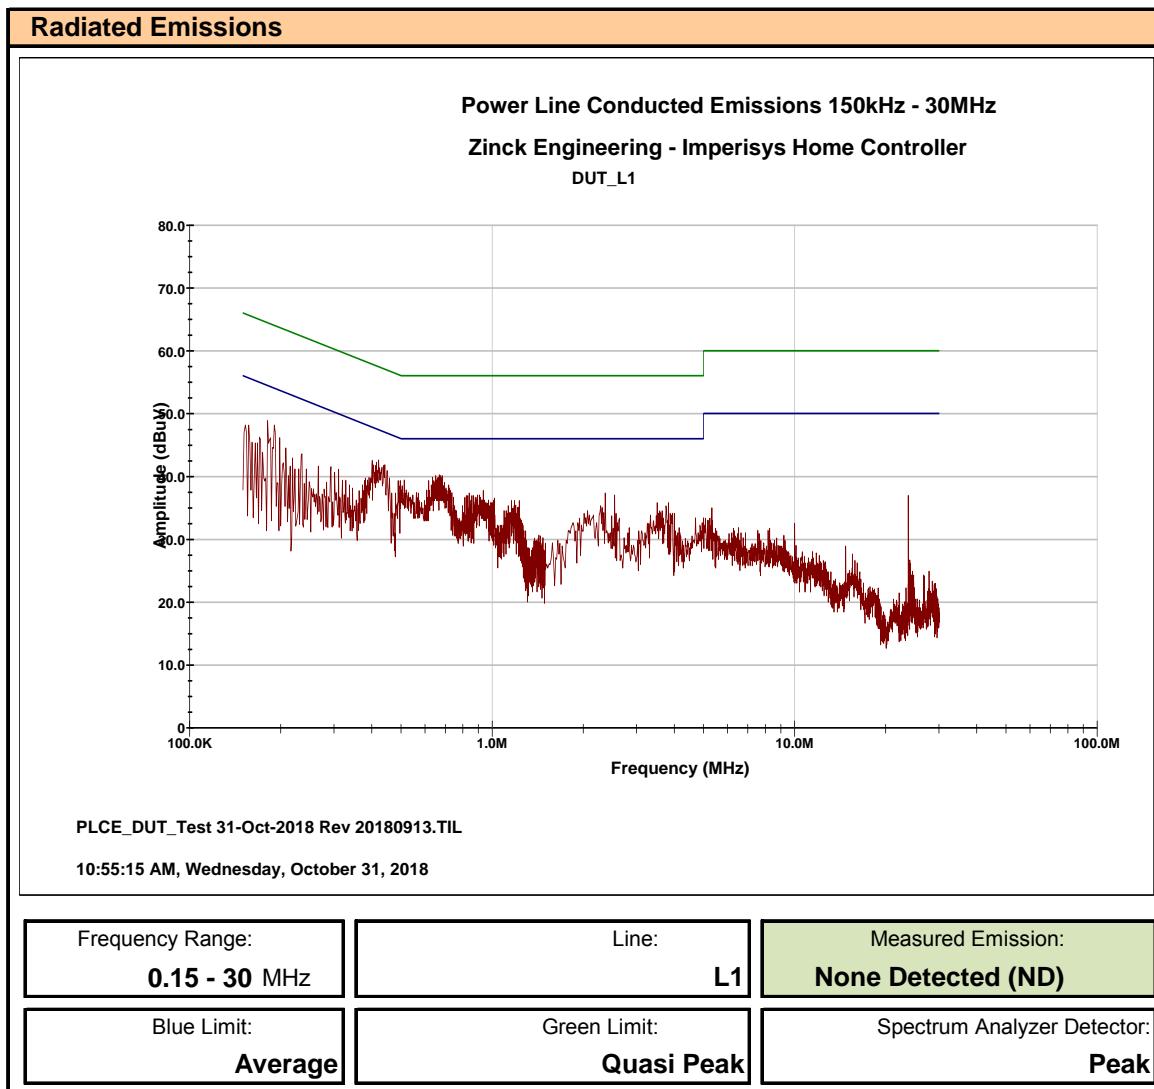

Plot 16.2 – Power Line Conducted – L2

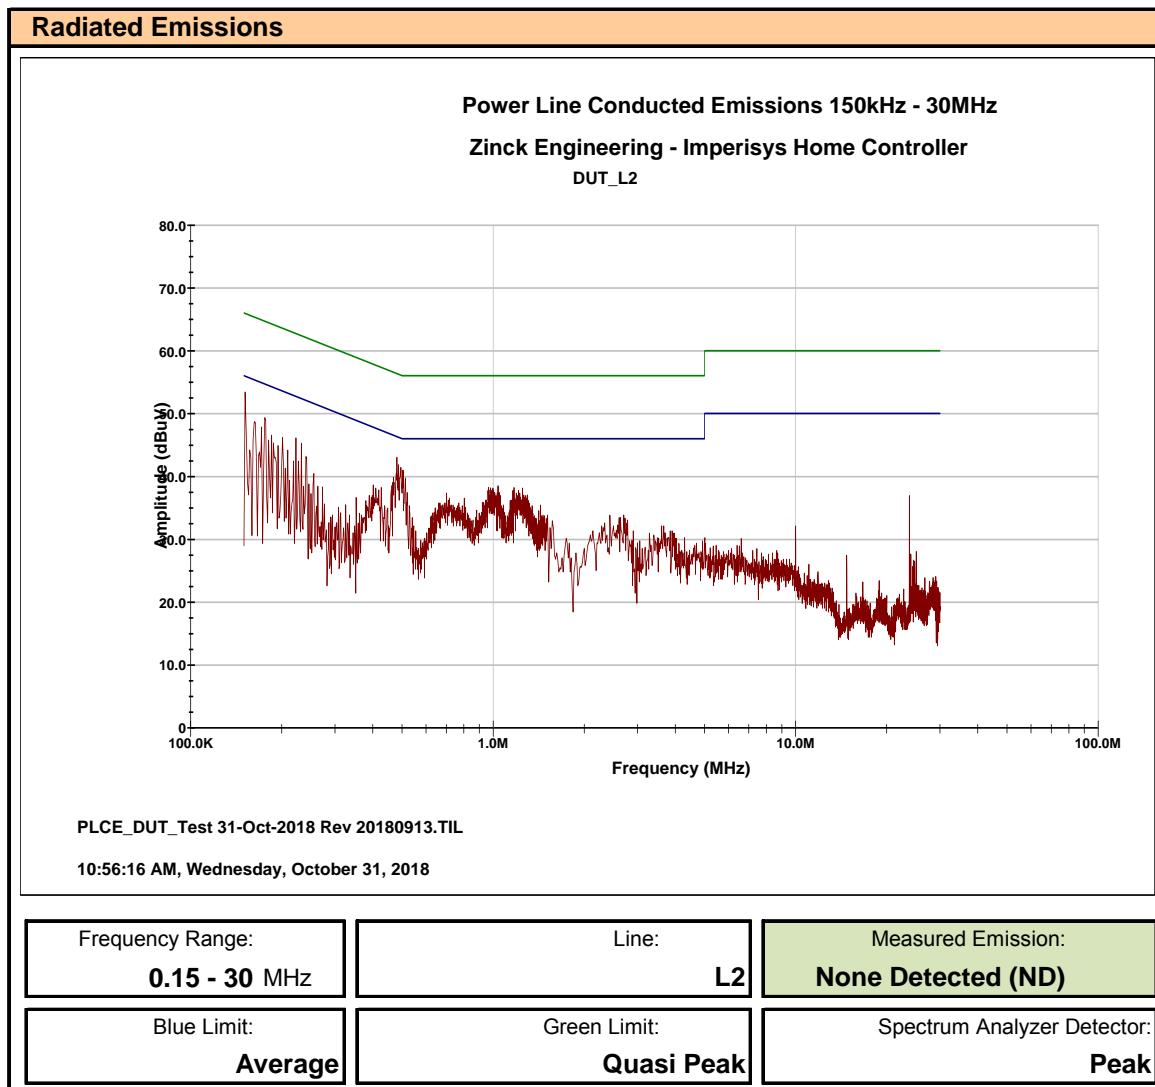


Table 16.1 – Summary of Power Line Conducted Emissions

<b>§15.107, ICES-003 (6.1)</b>				
<b>Emission Frequency (kHz)</b>	<b>Line</b>	<b>Measured Emission [E<sub>Meas</sub>] (dBuV)</b>	<b>Limit (W)</b>	<b>Margin (dB)</b>
-	L1	ND	n/a	n/a
-	L2	ND	n/a	n/a
<b>Result:</b>			<b>Complies</b>	

Measured Emissions with Peak Detector Compared to Average Limits.

**APPENDIX A - TEST SETUP DRAWINGS AND CONDITIONS**

**Table A.1 – Conducted Measurement Setup and Environmental**

<b>Environmental Conditions (Typical)</b>	
<b>Temperature</b>	25°C
<b>Humidity</b>	<60%
<b>Barometric Pressure</b>	101 +/- 3kPa

<b>Equipment List</b>			
<b>Asset Number</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Description</b>
00241	R&S	FSU40	Spectrum Analyzer

**Figure A.1 – Test Setup – Conducted Measurements**

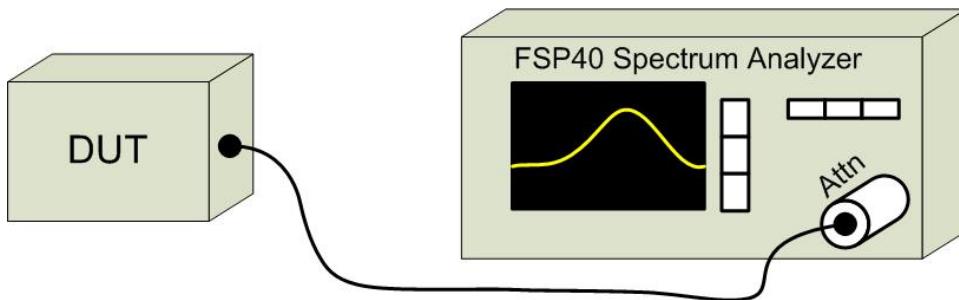


Table A.2 – Radiated Emissions Measurement Equipment and Environmental

<b>Environmental Conditions (Typical)</b>			
<b>Equipment List</b>			
<b>Asset Number</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Description</b>
00051	HP	8566B	Spectrum Analyzer
00049	HP	85650A	Quasi-peak Adapter
00047	HP	85685A	RF Preselector
00072	EMCO	2075	Mini-mast
00073	EMCO	2080	Turn Table
00071	EMCO	2090	Multi-Device Controller
00265	Miteq	JS32-00104000-58-5P	Microwave L/N Amplifier
00241	R&S	FSU40	Spectrum Analyzer
00050	Chase	CBL-6111A	Bilog Antenna
00275	Coaxis	LMR400	25m Cable
00276	Coaxis	LMR400	4m Cable
00278	TILE	34G3	TILE Test Software
00034	ETS	3115	Double Ridged Guide Horn
00085	EMCO	6502	Loop Antenna

**Figure A.2 – Test Setup Radiated Measurements 30MHz – 1GHz**


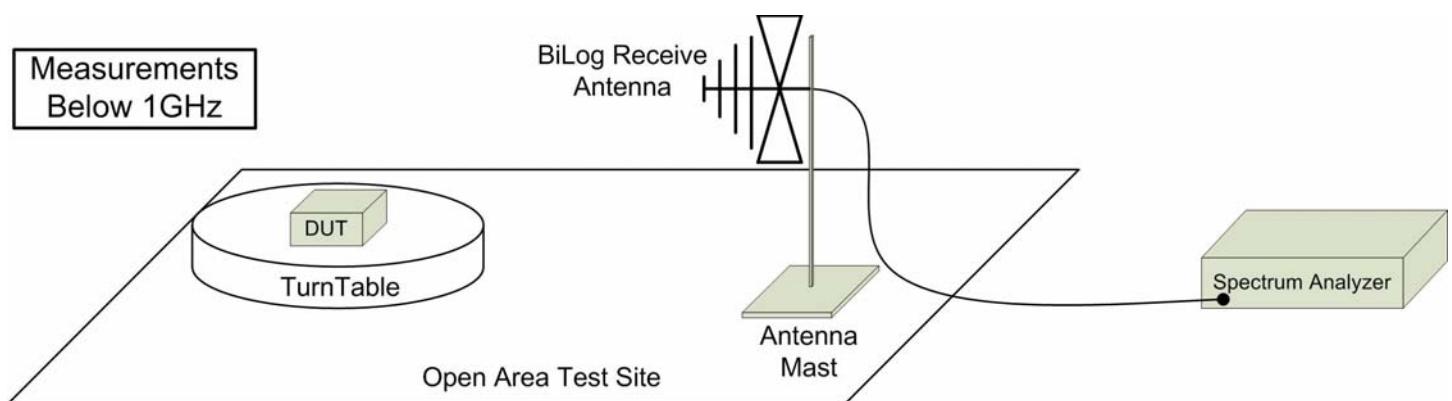


Table A.3 – Power Line Conducted Measurement Equipment and Environmental

<b>Environmental Conditions (Typical)</b>			
<b>Equipment List</b>			
<b>Asset Number</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Description</b>
00051	HP	8566B	Spectrum Analyzer
00049	HP	85650A	Quasi-peak Adapter
00047	HP	85685A	RF Preselector
00275	Coaxis	LMR400	25m Cable
00276	Coaxis	LMR400	4m Cable
00278	TILE	34G3	TILE Test Software
00257	Comm Power	LI-215A	LISN

**Figure A.3 – Test Setup Power Line Conducted Measurements**

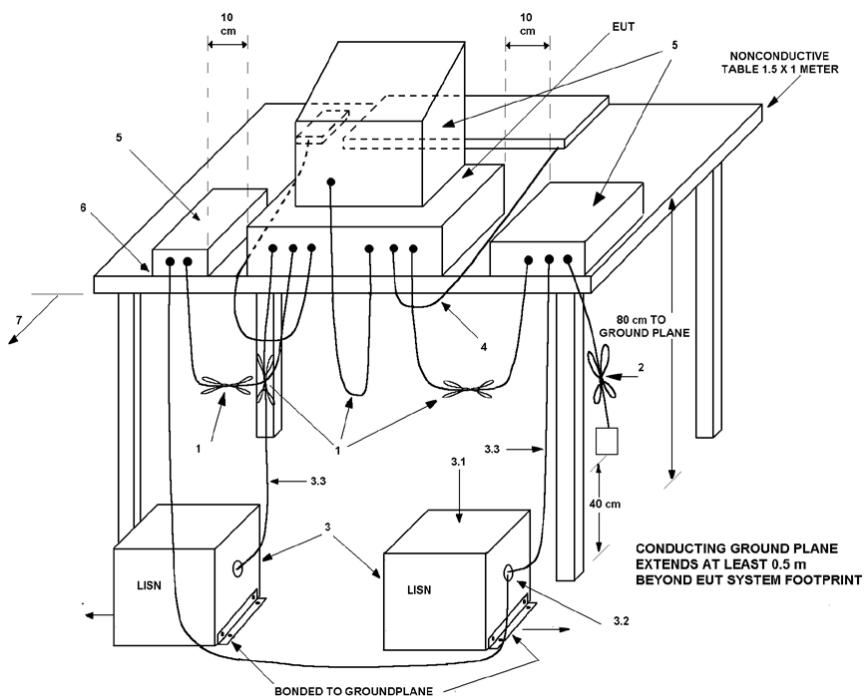

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.2.5, also 11.5.5).
2. Input/output (I/O) cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.5).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated into  $50 \Omega$  loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 5.2.4 and 7.3.1).
  - 3.1 All other equipment powered from additional LISN(s).
  - 3.2 Multiple outlet strips can be used for multiple power cords of non-EUT equipment.
  - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal use (see 6.3.2.4 and 11.5.5).
5. Non-EUT components of EUT system being tested (see also Figure 7).
6. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.3.2.2 and 6.3.2.3).
7. Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 5.2.3 for options).

**APPENDIX B - EQUIPMENT LIST AND CALIBRATION**

Equipment List								
(*)	Asset Number	Manufacturer	Model Number	Serial Number	Description	Last Calibrated	Calibration Interval	Calibration Due
*	00050	Chase	CBL-6111A	1607	Bilog Antenna	23 Jun 2017	Triennial	23 Jun 2020
*	00034	ETS	3115	6267	Double Ridged Guide Horn	2 Dec 2015	Triennial	2 Dec 2018
	00035	ETS	3115	6276	Double Ridged Guide Horn	2 Dec 2015	Triennial	2 Dec 2018
*	00085	EMCO	6502	9203-2724	Loop Antenna	8 Jun 2016	Triennial	8 Jun 2019
*	00047	HP	85685A	2837A00826	RF Preselector	23 Jun 2017	Triennial	23 Jun 2020
*	00049	HP	85650A	2043A00162	Quasi-peak Adapter	23 Jun 2017	Triennial	23 Jun 2020
*	00051	HP	8566B	2747A05510	Spectrum Analyzer	23 Jun 2017	Triennial	23 Jun 2020
	00223	HP	8901A	3749A07154	Modulation Analyzer	27 Dec 2017	Triennial	27 Dec 2020
	00224	HP	8903B	3729A18691	Audio Analyzer	28 Dec 2017	Triennial	28 Dec 2020
*	00241	R&S	FSU40	100500	Spectrum Analyzer	23 Apr 2015	Triennial	23 Apr 2018
*	00005	HP	8648D	3847A00611	Signal Generator	21 Jun 2017	Triennial	21 Jun 2020
	00006	R&S	SMR20	100104	Signal Generator	29 May 2017	Triennial	29 May 2020
	00243	Rigol	DS1102E	DS1ET150502164	Oscilloscope	7 Nov 2017	Triennial	7 Nov 2020
	00254	LeCroy	WM8600A	532	Oscilloscope	NCR	n/a	NCR
	00110	Gigatronics	8652A	1875801	Power Meter	29 Feb 2016	Triennial	29 Feb 2019
	00237	Gigatronics	80334A	1837001	Power Sensor	23 Jun 2014	Triennial	23 Jun 2017
	00232	ETS Lindgren	HI-6005	91440	Isotropic E-Field Probe	18 Dec 2017	Triennial	18 Dec 2020
	00003	HP	53181A	3736A05175	Frequency Counter	21 Jun 2017	Triennial	21 Jun 2020
*	00257	Com-Power	LI-215A	191934	LISN	5 Jan 2018	Triennial	5 Jan 2021
	00041	AR	10W1000C	27887	Power Amplifier	NCR	n/a	NCR
	00106	AR	5SIG4	26235	Power Amplifier	NCR	n/a	NCR
	00280	AR	25A250AM6	22702	Power Amplifier	NCR	n/a	NCR
	00265	Miteq	JS32-00104000-58-5P	1939850	Microwave L/N Amplifier	COU	n/a	COU
	00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a	n/a
*	00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a	n/a
*	00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a	n/a
	00081	ESPEC	ECT-2	0510154-B	Environmental Chamber	CNR	n/a	CNR
	00234	VWR	61161-378	140320430	Temp/Humidity Meter	New	Triennial	New
	00236	Nokia	-	236	ESD Table	NCR	n/a	NCR
	00255	Expert ESD	A4001	A4001-155	ESD Target	COU	n/a	COU
	00064	NARDA	3020A	n/a	Bi-Directional Coupler	COU	n/a	COU
	00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable	COU	n/a	COU
*	00263B	Koaxis	KP10-1.00M-TD	263B	1m Armoured Cable	COU	n/a	COU
*	00264	Koaxis	KP10-7.00M-TD	264	7m Armoured Cable	COU	n/a	COU
*	00275	TMS	LMR400	n/a	25m Cable	COU	n/a	COU
*	00276	TMS	LMR400	n/a	4m Cable	COU	n/a	COU
*	00277	TMS	LMR400	n/a	4m Cable	COU	n/a	COU
*	00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a	NCR
Rented Equipment								

\* Used during the course of this investigation

CNR: Calibration Not Required

COU: Calibrate On Use

**APPENDIX C - MEASUREMENT INSTRUMENT UNCERTAINTY**

**CISPR 16-4 Measurement Uncertainty (  $U_{LAB}$  )**

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of  $k=2$

**30MHz - 200MHz**

$U_{LAB} = 5.14\text{dB}$     $U_{CISPR} = 6.3\text{dB}$

**200MHz - 1000MHz**

$U_{LAB} = 5.90\text{dB}$     $U_{CISPR} = 6.3\text{dB}$

**1GHz - 6GHz**

$U_{LAB} = 4.80\text{dB}$     $U_{CISPR} = 5.2\text{dB}$

**6GHz - 18GHz**

$U_{LAB} = 5.1\text{dB}$     $U_{CISPR} = 5.5\text{dB}$

If the calculated uncertainty  $U_{lab}$  is **less** than  $U_{CISPR}$  then:

1	Compliance is deemed to occur if <b>NO</b> measured disturbance exceeds the disturbance limit
2	Non-Compliance is deemed to occur if <b>ANY</b> measured disturbance <b>EXCEEDS</b> the disturbance limit

If the calculated uncertainty  $U_{lab}$  is **greater** than  $U_{CISPR}$  then:

3	Compliance is deemed to occur if <b>NO</b> measured disturbance, increased by $( U_{lab} - U_{CISPR} )$ , exceeds the disturbance limit
4	Non-Compliance is deemed to occur if <b>ANY</b> measured disturbance, increased by $( U_{lab} - U_{CISPR} )$ , <b>EXCEEDS</b> the disturbance limit