

Report on the Radio Testing

For

OccupEye Limited

on

OccupEye

Report no. TRA-041276-47-05A

30 November 2018

RF915 6.0

Report Number: TRA-041276-47-05A
Issue: A

REPORT ON THE RADIO TESTING OF A
OccupEye Limited
OccupEye
WITH RESPECT TO SPECIFICATION
FCC 47CFR 15.247

TEST DATE: 2018-10-19 to 2018-10-29

Written by:

S Garwell
D Moncayola
Radio Test Engineer

Approved by:

J Charters
Department Manager-Radio

Date: 30 November 2018

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	30 November 2018	Original

2 Summary

TEST REPORT NUMBER: TRA-041276-47-05A

WORKS ORDER NUMBER: TRA-041276-03

PURPOSE OF TEST: USA: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J.

TEST SPECIFICATION(S): 47CFR15.247

EQUIPMENT UNDER TEST (EUT): OccupEye

FCC IDENTIFIER: 2ARNWOEH02

EUT SERIAL NUMBER: Not Stated

MANUFACTURER/AGENT: OccupEye Limited

ADDRESS: OccupEye Ltd.
Barnfield House
Accrington Road
Blackburn
Lancashire
BB1 3NY

CLIENT CONTACT: Andrew R. Butterworth
Director of Operations & General Manager
andrew.butterworth@asuresoftware.com
Tel: 01254 504400 (Office)
Tel: 01254 504417 (Direct)

ORDER NUMBER: 40718

TEST DATE: 2018-10-19 to 2018-10-29

TESTED BY: S Garwell
D Moncayola
Element

2.1 Test Summary

Test Method and Description		Requirement Clause 47CFR15	Applicable to this equipment	Result / Note
Radiated spurious emissions (restricted bands of operation and cabinet radiation)		15.205	<input checked="" type="checkbox"/>	Pass
AC power line conducted emissions		15.207	<input checked="" type="checkbox"/>	Pass
Occupied bandwidth		15.247(a)(2)	<input checked="" type="checkbox"/>	Pass
Conducted carrier power	Peak	15.247(b)(3)	<input checked="" type="checkbox"/>	Pass
	Max.		<input type="checkbox"/>	
Conducted / radiated RF power out-of-band		15.247(d)	<input checked="" type="checkbox"/>	Pass
Power spectral density, conducted		15.247(e)	<input checked="" type="checkbox"/>	Pass
Calculation of duty correction		15.35(c)	<input type="checkbox"/>	Note 1

Notes:

Note 1: No duty cycle correction needed, unit working 100 % of the time for testing purposes.

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record.....	3
2	Summary.....	4
2.1	Test Summary.....	5
3	Contents.....	6
4	Introduction	8
5	Test Specifications	9
5.1	Normative References	9
5.2	Deviations from Test Standards	9
6	Glossary of Terms.....	10
7	Equipment Under Test	11
7.1	EUT Identification	11
7.2	System Equipment	11
7.3	EUT Mode of Operation	11
7.3.1	Transmission.....	11
7.4	EUT Radio Parameters	11
7.4.1	General	11
7.4.2	Antennas	12
7.5	EUT Description	12
8	Modifications	13
9	EUT Test Setup.....	13
9.1	Block Diagram.....	13
9.2	General Set-up Photograph	14
10	General Technical Parameters.....	16
10.1	Normal Conditions.....	16
10.2	Varying Test Conditions	16
11	Radiated emissions.....	17
11.1	Definitions	17
11.2	Test Parameters.....	17
11.3	Test Limit	17
11.4	Test Method	18
11.5	Test Set-up Photograph	19
11.6	Test Equipment.....	19
11.7	Test Results	20
12	AC power-line conducted emissions	23
12.1	Definition	23
12.2	Test Parameters.....	23
12.3	Test Limit	23
12.4	Test Method	24
12.5	Test Set-up Photograph	24
12.6	Test Equipment.....	24
12.7	Test Results	25
13	Occupied Bandwidth	27
13.1	Definition	27
13.2	Test Parameters.....	27
13.3	Test Limit	27
13.4	Test Method	28
13.5	Test Equipment.....	28
13.6	Test Results	29
14	Maximum peak conducted output power.....	30
14.1	Definition	30
14.2	Test Parameters.....	30
14.3	Test Limit	30
14.4	Test Method	31
14.5	Test Equipment.....	31
14.6	Test Results	31
15	Out-of-band and conducted spurious emissions	32
15.1	Definition	32
15.2	Test Parameters.....	32
15.3	Test Limit	32
15.4	Test Method	33
15.5	Test Equipment.....	33
15.6	Test Results	34
16	Power spectral density	35

16.1	Definition	35
16.2	Test Parameters.....	35
16.3	Test Limit	35
16.4	Test Method	36
16.5	Test Equipment.....	36
16.6	Test Results	36
17	Measurement Uncertainty	37

4 Introduction

This report TRA-041276-47-05A presents the results of the Radio testing on an OccupEye Limited, OccupEye to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for OccupEye Limited by Element, at the address detailed below.

- | | |
|--|--|
| <input type="checkbox"/> Element Hull
Unit E
South Orbital Trading Park
Hedon Road
Hull
HU9 1NJ
UK | <input checked="" type="checkbox"/> Element Skelmersdale
Unit 1
Pendle Place
Skelmersdale
West Lancashire
WN8 9PN
UK |
|--|--|

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

IC Registration Number(s):

Element Hull	3483A
Element North West	3930B

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 *Normative References*

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

5.2 *Deviations from Test Standards*

There were no deviations from the test standard.

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

7 Equipment Under Test

7.1 EUT Identification

- Name: OccupEye
- Serial Number: Not Stated
- Model Number: Host
- Software Revision: EMC_RADIO_CUSTOM
- Build Level / Revision Number: pre-production

7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

Not Applicable – No support/monitoring equipment required.

7.3 EUT Mode of Operation

7.3.1 Transmission

The mode of operation for transmitter tests was as follows:

The unit was pre-programmed to transmit 100% duty cycle, modulated carrier on top and bottom channels.

7.4 EUT Radio Parameters

7.4.1 General

Frequency of operation:	902 MHz - 928 MHz Band
Modulation type(s):	FSK
Occupied channel bandwidth(s):	500 kHz
Declared output power(s):	14 dBm
Warning against use of alternative antennas in user manual (yes/no):	Not applicable
Nominal Supply Voltage:	5 Vdc

7.4.2 Antennas

Type:	Half-wave center-fed dipole antennas
Frequency range:	900 MHz - 930 MHz
Impedance:	50 Ω
SWR:	≤ 2.0 typical
Gain:	1.2 dBi
Connector type:	RP-SMA connector
Length:	142 mm
Mounting:	External

7.5 EUT Description

The EUT is a host to be used to monitor the room occupancy sensors working on the 902 to 928 MHz band.


8 Modifications

No modifications were performed during this assessment.

9 EUT Test Setup

9.1 *Block Diagram*

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

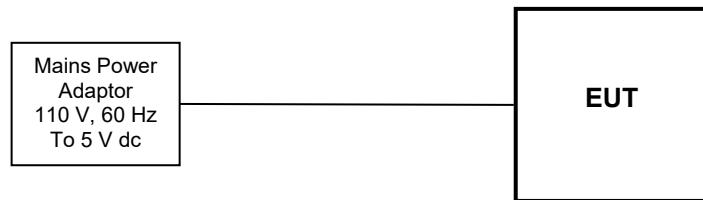

9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:



The following is a picture of the EUT:



10 General Technical Parameters

10.1 Normal Conditions

The EUT was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 5 V dc from a supplied adaptor connected to 110 V ac, 60 Hz, from the mains.

10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	Category	Nominal	Variation
<input checked="" type="checkbox"/>	Mains	110 V ac +/- 2 %	85 % and 115 %
<input type="checkbox"/>	Battery	New battery	N/A

11 Radiated emissions

11.1 Definitions

Spurious emissions

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Frequencies Measured:	910.43 MHz and 918.1 MHz
EUT Channel Bandwidths:	500 kHz
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz; Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak; Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 50 % RH	20 % RH to 75 % RH (as declared)
Supply: 5 V dc	5 V dc (as declared)

11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB μ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB μ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

Figure i Test Setup

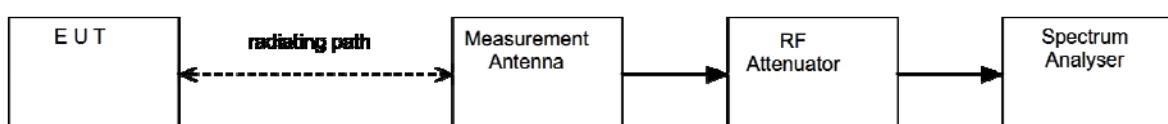


11.5 Test Set-up Photograph




11.6 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
CBL611/A	Chase	Bilog	U573	2019-08-02
ESVS10	R&S	Receiver	L317	2019-03-22
FSU26	R&S	Spectrum Analyser	U405	2019-09-21
3115	EMCO	1-18GHz Horn	L139	2019-09-25
Pre Amp	Agilent	8449B	L572	2019-10-12


11.7 Test Results

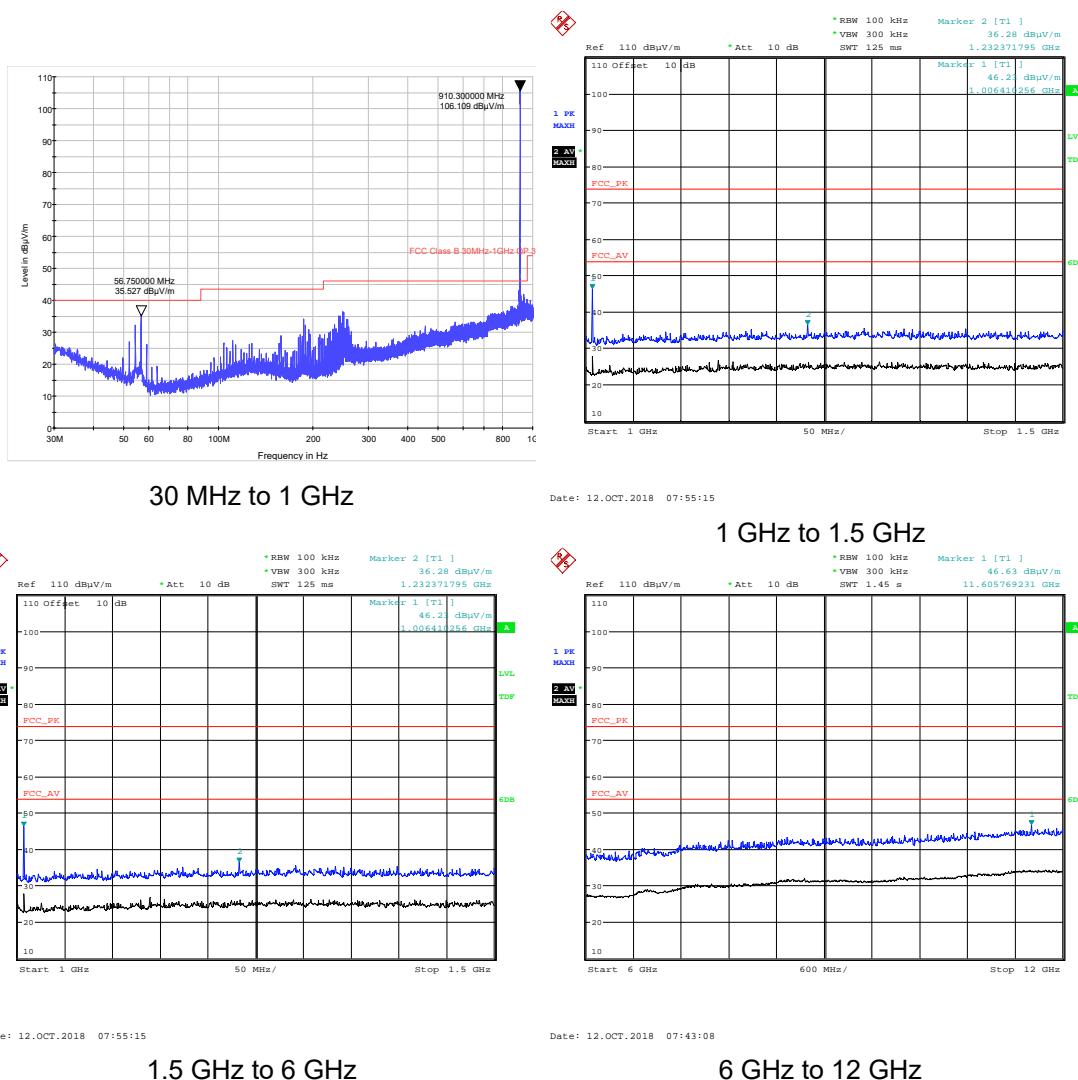

High Power; Channel: 910.43 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dB μ V)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
Pk	2731.29	50.51	4.40	29.20	36.50	0.00	0.00	47.61	240.16	5000
Av	2731.29	38.46	4.40	29.20	36.50	0.00	0.00	35.56	59.98	500

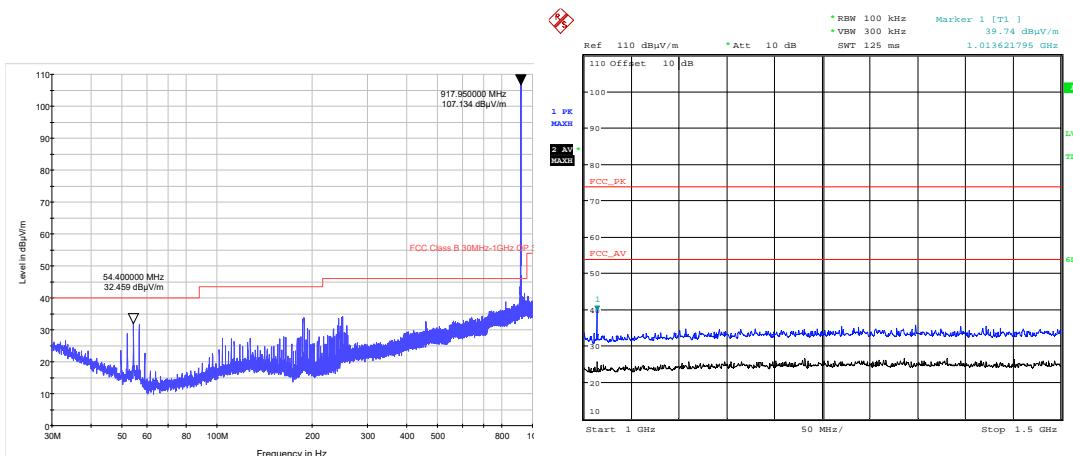

30 MHz to 1 GHz

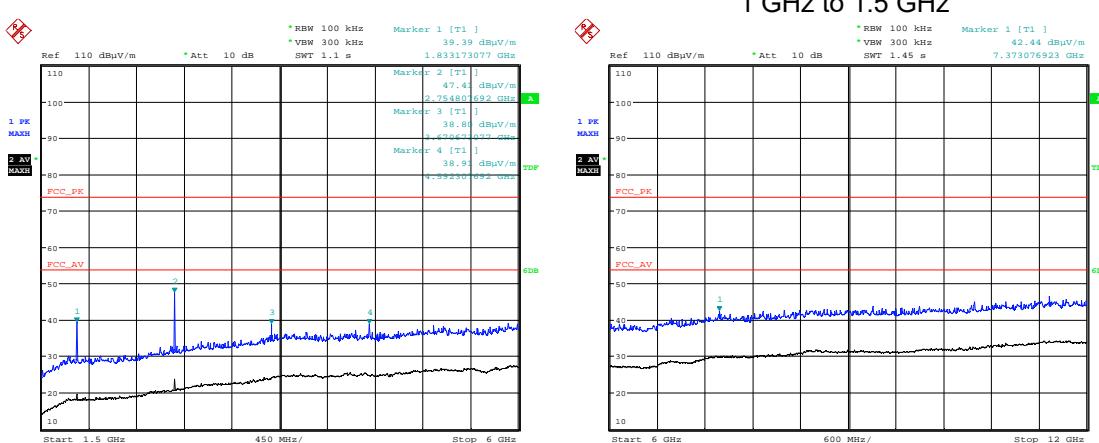


Date: 12.OCT.2018 07:44:40

Date: 12.OCT.2018 07:47:40


1.5 GHz to 6 GHz

6 GHz to 12 GHz

High Power; Channel: 918.1 MHz										
Detector	Freq. (MHz)	Meas'd Emission (dBµV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBµV/m)	Field Strength (µV/m)	Limit (µV/m)
Pk	2754.20	50.52	4.40	29.10	36.50	0.00	0.00	47.52	237.68	5000
Av	2754.20	40.00	4.40	29.10	36.50	0.00	0.00	37.00	70.79	500

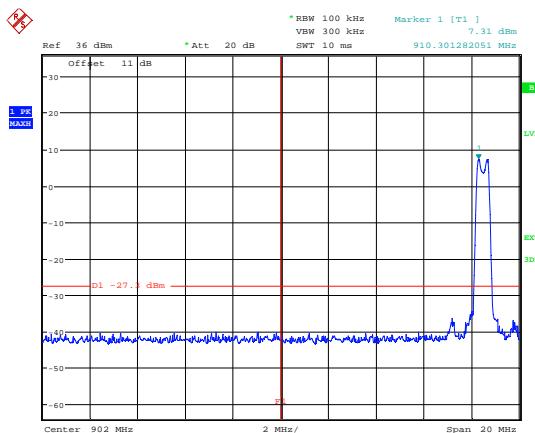

Lower Band Edge

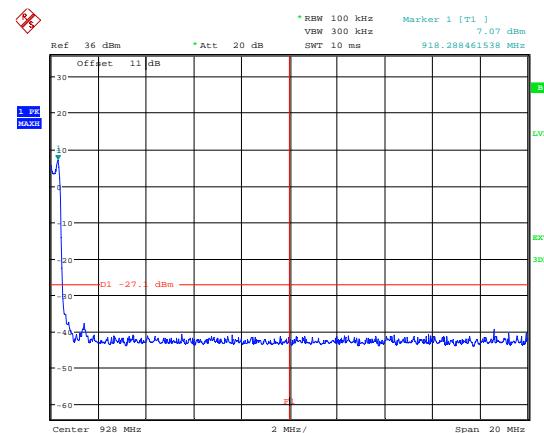

Upper Band Edge

12 AC power-line conducted emissions

12.1 Definition

Line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network.

12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Transient Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.2
EUT Channels Measured:	Mid
EUT Channel Bandwidths:	500 kHz
EUT Modulation:	FSK
Deviations From Standard:	None
Measurement BW:	10 kHz
Measurement Detectors:	Quasi-Peak and Average, RMS

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 50 % RH	20 % RH to 75 % RH (as declared)
Supply: 5 V dc	5 V dc (as declared)

12.3 Test Limit

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in Table 3.

Table 3 – AC Power Line Conducted Emission Limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average**
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

*The level decreases linearly with the logarithm of the frequency.

**A linear average detector is required.


12.4 Test Method

With the EUT setup in a screened room, as per section 9 of this report and connected as per Figure ii, the power line emissions were measured on a spectrum analyzer / EMI receiver.

AC power line conducted emissions from the EUT are checked first by preview scans with peak and average detectors covering both live and neutral lines. A spectrum analyzer is used to determine if any periodic emissions are present.

Formal measurements using the correct detector(s) and bandwidth are made on frequencies identified from the preview scans. Final measurements were performed with EUT set at its maximum duty in transmit and receive modes.

Figure ii Test Setup

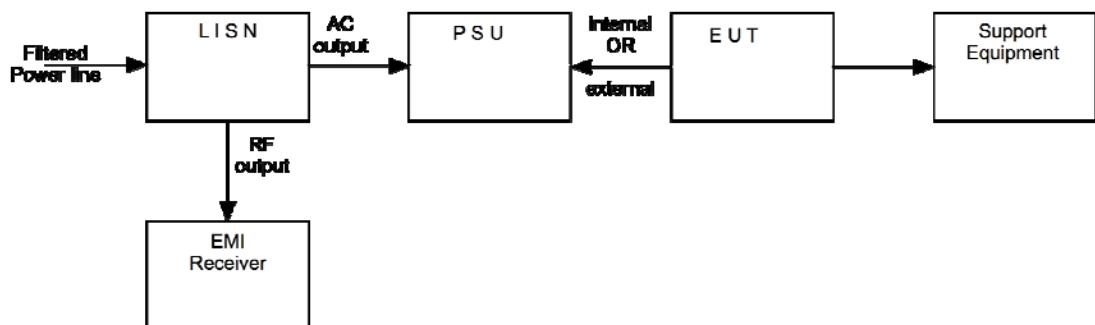


12.5 Test Set-up Photograph



12.6 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
ESHS10	R&S	Receiver	U187	2018-11-09
ENV216	R&S	Lisn	U396	2019-07-19

12.7 Test Results

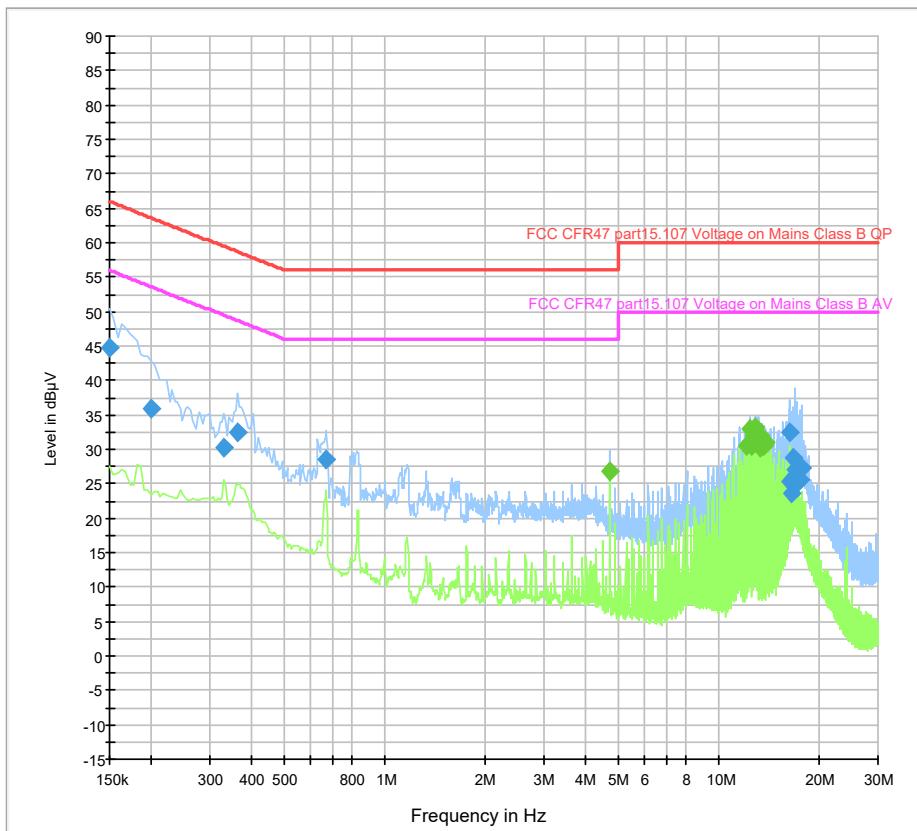

AC power-line conducted emissions, Transmit mode									
Results measured using the quasi-peak detector									
Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	44.8	2000.0	10.000	GND	L1	10.0	21.2	66.0	PASS
0.199500	36.0	2000.0	10.000	GND	N	10.0	27.7	63.6	PASS
0.330000	30.3	2000.0	10.000	GND	L1	10.1	29.2	59.5	PASS
0.361500	32.5	2000.0	10.000	GND	L1	10.1	26.2	58.7	PASS
0.667500	28.6	2000.0	10.000	GND	N	10.1	27.4	56.0	PASS
16.242000	25.3	2000.0	10.000	GND	L1	10.9	34.7	60.0	PASS
16.408500	32.5	2000.0	10.000	GND	N	10.9	27.5	60.0	PASS
16.480500	23.5	2000.0	10.000	GND	N	10.9	36.5	60.0	PASS
16.642500	25.6	2000.0	10.000	GND	N	10.9	34.4	60.0	PASS
16.804500	28.7	2000.0	10.000	GND	L1	11.0	31.3	60.0	PASS
16.845000	27.0	2000.0	10.000	GND	L1	11.0	33.0	60.0	PASS
16.953000	25.6	2000.0	10.000	GND	L1	11.0	34.4	60.0	PASS
17.052000	25.1	2000.0	10.000	GND	L1	11.0	34.9	60.0	PASS
17.533500	25.6	2000.0	10.000	GND	N	10.9	34.4	60.0	PASS
17.682000	27.4	2000.0	10.000	GND	L1	11.0	32.6	60.0	PASS

AC power-line conducted emissions, Transmit mode									
Results measured using the Average detector									
Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
4.726500	26.9	2000.0	10.000	GND	L1	10.3	19.1	46.0	PASS
12.048000	30.5	2000.0	10.000	GND	N	10.6	19.5	50.0	PASS
12.439500	33.0	2000.0	10.000	GND	N	10.6	17.0	50.0	PASS
12.588000	30.5	2000.0	10.000	GND	N	10.6	19.5	50.0	PASS
12.637500	32.0	2000.0	10.000	GND	N	10.6	18.0	50.0	PASS
12.831000	33.2	2000.0	10.000	GND	N	10.6	16.8	50.0	PASS
12.880500	30.9	2000.0	10.000	GND	N	10.7	19.1	50.0	PASS
13.029000	32.1	2000.0	10.000	GND	L1	10.8	17.9	50.0	PASS
13.222500	30.8	2000.0	10.000	GND	N	10.7	19.2	50.0	PASS
13.272000	31.9	2000.0	10.000	GND	N	10.7	18.1	50.0	PASS
13.321500	30.3	2000.0	10.000	GND	N	10.7	19.7	50.0	PASS
13.420500	31.5	2000.0	10.000	GND	N	10.7	18.5	50.0	PASS
13.470000	31.5	2000.0	10.000	GND	N	10.7	18.5	50.0	PASS
13.713000	30.6	2000.0	10.000	GND	N	10.7	19.4	50.0	PASS
13.861500	30.9	2000.0	10.000	GND	N	10.7	19.1	50.0	PASS

13 Occupied Bandwidth

13.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.8
EUT Channels / Frequencies Measured:	910.43 MHz and 918.1 MHz
EUT Channel Bandwidths:	500 kHz
EUT Test Modulations:	FSK
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Span: (requirement 2 to 5 times OBW)	1 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 45 % RH	20 % RH to 75 % RH (as declared)
Supply: 5 V dc	5 V dc (as declared)

13.3 Test Limit


The minimum -6 dB bandwidth shall be at least 500 kHz.

13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.


Figure iii Test Setup

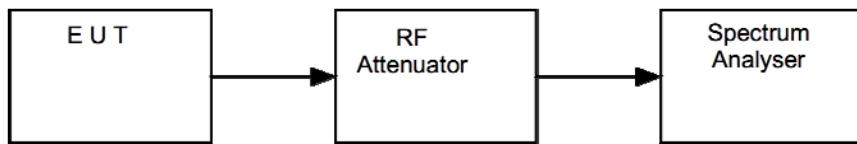

13.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2019-09-21

13.6 Test Results

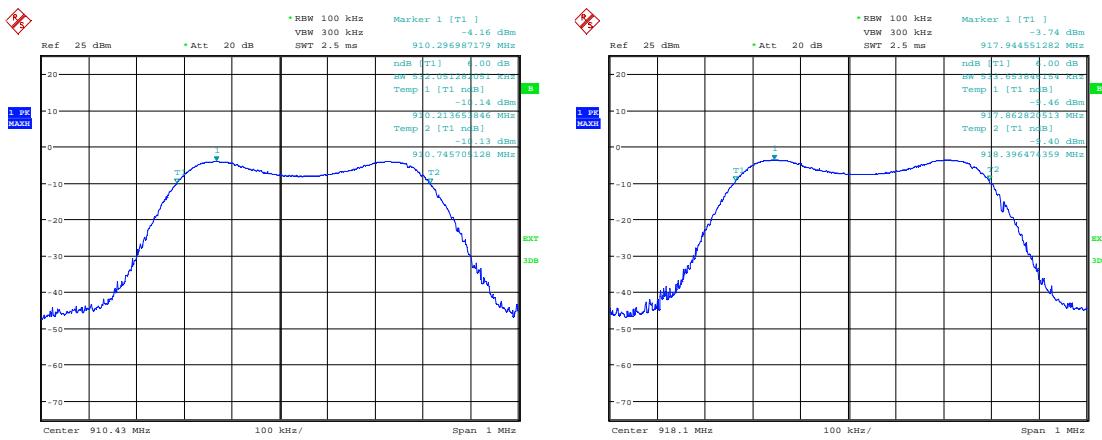

Date: 22.SEP.2018 15:04:46

Date: 22.SEP.2018 15:08:27

FCC 15.247. Modulation: FSK; Power setting: Higher				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	6dB Bandwidth (kHz)	Result
910.43	910.2136538	910.7457051	532.051282	PASS
918.10	917.8628205	918.3964744	533.653846	PASS

14 Maximum peak conducted output power

14.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

The maximum conducted output power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.9.1
EUT Frequencies Measured:	910.43 MHz and 918.1 MHz
EUT Channel Bandwidths:	500 kHz
Deviations From Standard:	None
Measurement BW:	1 MHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	3 MHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	Mains Power = 85 % and 115 % of Nominal (FCC only requirement);

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 50 % RH	20 % RH to 75 % RH (as declared)

14.3 Test Limit


For systems employing digital modulation techniques operating in the bands 902 to 928 MHz, 2400 to 2483.5 MHz and 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iv Test Setup

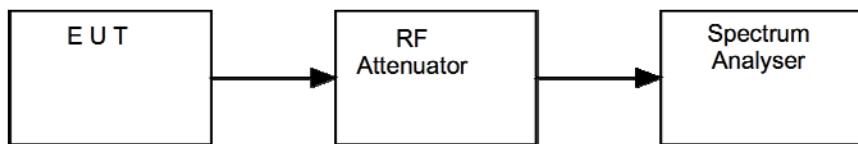

14.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2019-09-21

14.6 Test Results

Modulation: FSK; Power setting: Maximum				
Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (mW)	Verdict
910.43	7.46	0	5.57	Pass
918.1	7.27	0	5.34	Pass

15 Out-of-band and conducted spurious emissions

15.1 Definition

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.11
EUT Frequencies Measured:	910.43 MHz and 918.1 MHz
EUT Channel Bandwidths:	500 kHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	30 MHz to 12 GHz

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 40 % RH	20 % RH to 75 % RH (as declared)
Supply: 5 V dc	5 V dc (as declared)

15.3 Test Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.


Figure v Test Setup

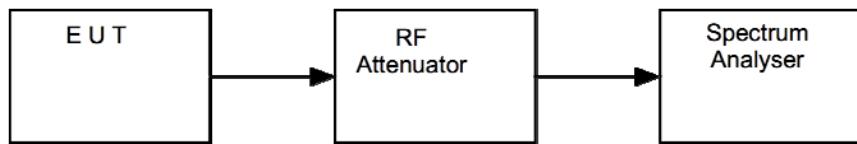

15.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2019-09-21

15.6 Test Results

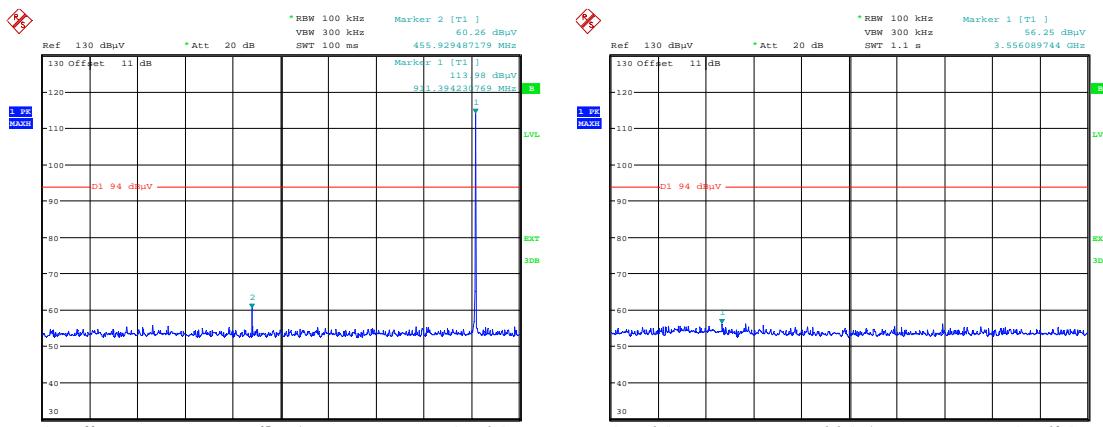


Date: 22.SEP.2018 18:54:36

30 MHz to 1 GHz

Date: 22.SEP.2018 18:55:23

1 GHz to 12 GHz

Frequency: 910.43 MHz; Modulation: FSK; Power setting: Higher						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No emissions within 20 dB to the limit						PASS

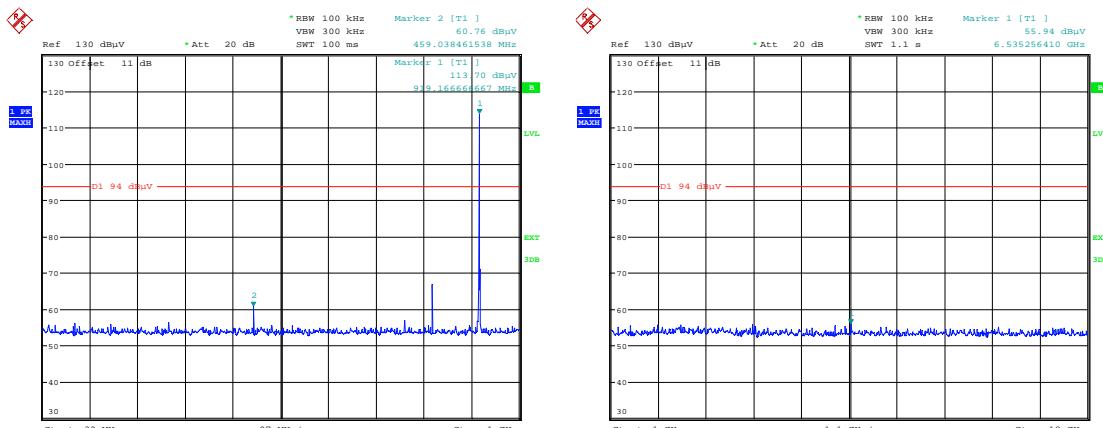

Date: 22.SEP.2018 18:58:06

30 MHz to 1 GHz

Date: 22.SEP.2018 18:57:00

1 GHz to 12 GHz

Frequency: 918.1 MHz; Modulation: FSK; Power setting: Higher						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No emissions within 20 dB to the limit						PASS

16 Power spectral density

16.1 Definition

The power per unit bandwidth.

16.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.10
EUT Channels / Frequencies Measured:	910.43 MHz and 918.1 MHz
EUT Channel Bandwidths:	500 kHz
Deviations From Standard:	None
Measurement BW:	3 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 kHz
Measurement Span: (requirement 1.5 times Channel BW)	750 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 50 % RH	20 % RH to 75 % RH (as declared)
Supply: 5 V dc	5 V dc (as declared)

16.3 Test Limit


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

16.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the peak emission of the EUT was measured on a spectrum analyser, with path losses taken into account.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.


Figure vi Test Setup

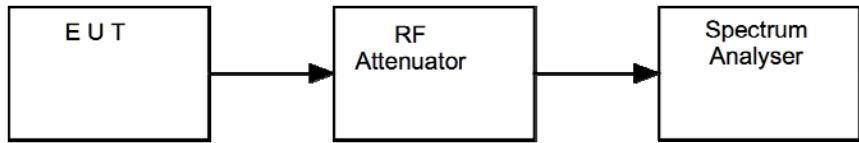

16.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2019-09-21

16.6 Test Results

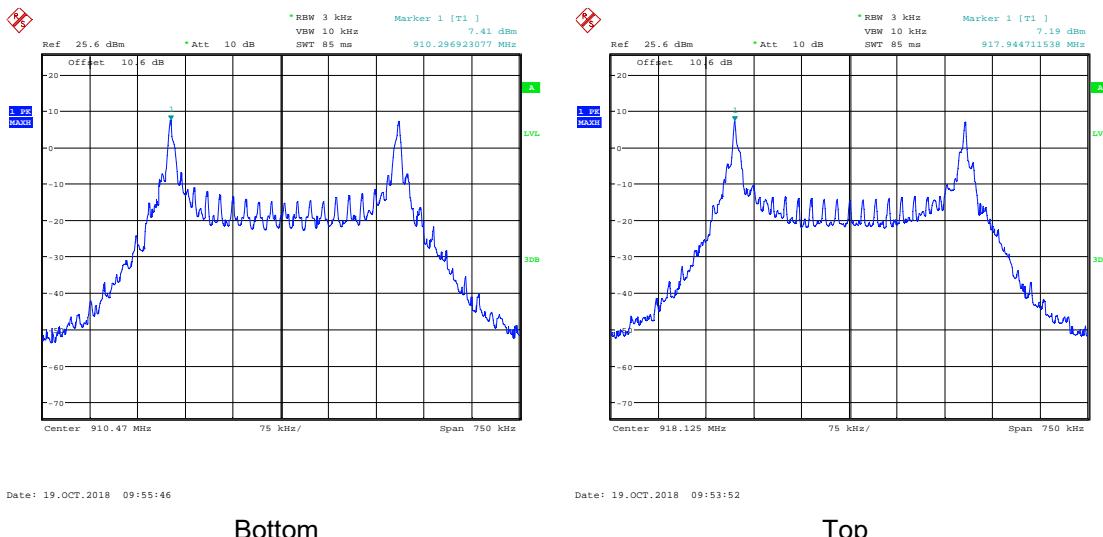

Modulation: FSK; Power setting: Higher				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (dBm)	Result
910.43	7.41	0	7.41	PASS
918.1	7.19	0	7.19	PASS

17 Measurement Uncertainty

Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

[1] Radiated spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.75 dB**
Uncertainty in test result (1 GHz to 18 GHz) = **4.46 dB**

[2] AC power line conducted emissions

Uncertainty in test result = **3.2 dB**

[3] Occupied bandwidth

Uncertainty in test result = **15.58 %**

[4] Conducted carrier power

Uncertainty in test result (Power Meter) = **0.93 dB**

[5] Conducted RF power out-of-band

Uncertainty in test result – up to 8.1 GHz = **3.31 dB**
Uncertainty in test result – 8.1 GHz to 15.3 GHz = **4.43 dB**

[6] Radiated RF power out-of-band

Uncertainty in test result (30 MHz to 1 GHz) = **4.75 dB**
Uncertainty in test result (1 GHz to 18 GHz) = **4.46 dB**

[7] Power spectral density

Uncertainty in test result (Spectrum Analyser) = **3.11 dB**

[8] ERP / EIRP

Uncertainty in test result (Laboratory) = **4.71 dB**
Uncertainty in test result (Pershore OATS) = **4.26 dB**