# <Justification of the extended calibration>


Referring to KDB 865664 D01, if dipoles are verified in return loss<-20dB, (within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.

Body 2450 MHz						
Date of  Measurement	Return Loss (dB)	Delta (%)	Impedance	Delta(ohm)		
2017.08.15	-32.75	-	48.8	-		
2018.10.31	-31.05	-5.16	47.15	-1.65		

The return loss is <-20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

### <Dipole Verification Data>

### Body 2450MHz

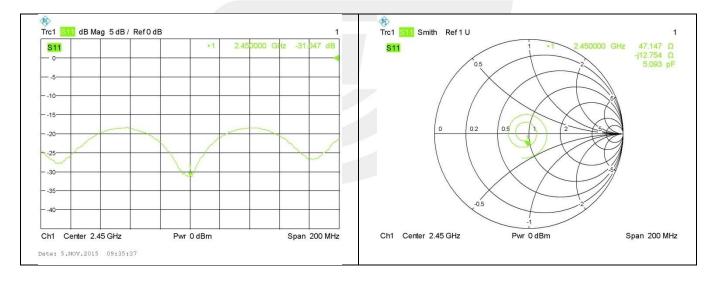

Body 5000 MHz						
Date of  Measurement	Return Loss (dB)	Delta (%)	Impedance	Delta(ohm)		
2017.08.15	< 13.94	-	-	-		
2018.10.31	< 13.52	-	-	-		

The return loss is <-8dB, within 20% of prior calibration; Therefore the verification result should support extended calibration.

## <Dipole Verification Data>

### Body 5000MHz

