

SPECIFICATION FOR APPROVAL

CUSTOMER: _____

CUST P/N: _____

FINE P/N: 10mm

DESC: _____

MP-A11

DATE: A.0
2022/12/20

Version: _____

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE

Version Change History

[illegible]

SPECIFICATION

DESC $\Phi 20.5 \times 40-10Ts-0.08 \times 105-20mm-$

Rev: A.0

CUST:

331

Fine P/N:


FYD331003

CUST P/N:


A11

DIMENSION:(mm)

SCHEMATIC DIAGRAM:

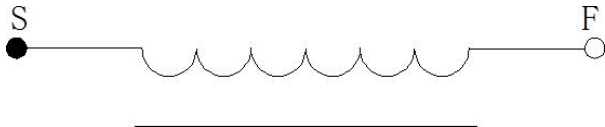

Winding Specification:

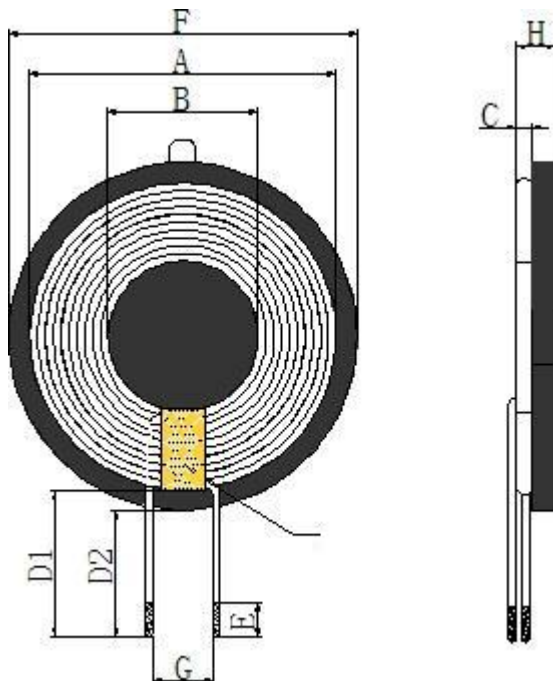

A	41.5±0.5
B	20.3±0.5
C	0.93±0.05
D1	20mm±0.2
D2	20mm±0.2
F	49.5±1
G	0.6. ref
H	2.0Max
I	5.3 ref
E	3±0.2

NO.	TERMINAL		WIRE	Turns	Winding Direction
1	S	F	0.08*105P	10Ts	CCW

ELECTRICAL CHARACTERISTICS:

TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.	S-F	6.4uH ±15%	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.8uH ±15%	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤50mΩ		LCZ METER 502B

PREPARED BY/DATE

2022/12/20

CHECKED BY/DATE

2022/12/22