

**Produkte**  
*Products*

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	50195307 001	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	144198848	<b>Seite 1 von 17</b> <i>Page 1 of 17</i>
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	30.10.2018	
<b>Auftraggeber:</b> <i>Client:</i>	Chip-ing AG Weiherstrasse 5, 8107 BUCHS, SWITZERLAND			
<b>Prüfgegenstand:</b> <i>Test item:</i>	Golf Ball with Bluetooth Low Energy Connectivity			
<b>Bezeichnung / Typ-Nr.:</b> Neverlost (NL-1811) <i>Identification / Type No.:</i>				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC Certification			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC Part 15 Subpart C ANSI C63.10-2013			
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	05.11.2018			
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	A000833026			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	06.11.2018 - 13.11.2018			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland Hong Kong Ltd.			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland Hong Kong Ltd.			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
				
<b>geprüft von / tested by:</b>		<b>kontrolliert von / reviewed by:</b>		
				
19.12.2018	Mika Chan / Project Manager	19.12.2018	Benny Lau / Senior Project Manager	
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>
<b>Sonstiges / Other:</b> FCC ID: 2ARPRCHPIG0001				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>	
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = nicht anwendbar N/T = nicht getestet N/A = not applicable N/T = not tested				
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

## Table of Content

	Page
<b>Cover Page .....</b>	<b>1</b>
<b>Table of Content .....</b>	<b>2</b>
<b>Product information.....</b>	<b>4</b>
Manufacturers declarations .....	4
Product function and intended use.....	4
Submitted documents.....	4
Independent Operation Modes .....	4
Related Submittal(s) Grants .....	4
Remark .....	5
<b>Test Set-up and Operation Mode.....</b>	<b>6</b>
Principle of Configuration Selection .....	6
Test Operation and Test Software.....	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
<b>Test Methodology .....</b>	<b>7</b>
Radiated Emission .....	7
Field Strength Calculation.....	7
<b>Test Setup Diagram .....</b>	<b>8</b>
<b>Test Facility .....</b>	<b>10</b>
Test Laboratory Information .....	10
<b>List of Test and Measurement Instruments.....</b>	<b>11</b>
<b>Measurement Uncertainty .....</b>	<b>12</b>
<b>Results FCC Part 15 – Subpart C .....</b>	<b>13</b>
FCC 15.203 – Antenna Requirement 1.....	Pass.....13
FCC 15.204 – Antenna Requirement 2.....	Pass.....13
FCC 15.207 – Conducted Emission on AC Mains .....	Pass.....13
FCC 15.247 (a)(2) – 6dB Bandwidth Measurement .....	Pass.....13
FCC 15.247(b)(3) – Maximum Peak Conducted Output Power .....	Pass.....14
FCC 15.247(e) – Power Spectral Density.....	Pass.....14
FCC 15.247(d) – Spurious Conducted Emissions.....	Pass.....15

FCC\_15.247\_DTS\_v2.0

<b>FCC 15.205 – Radiated Emissions in Restricted Frequency Bands.....</b>	<b>Pass.....</b>	<b>16</b>
<b>Appendix 1 – Test protocols .....</b>		<b>15 pages</b>
<b>Appendix 2 – Test setup .....</b>		<b>2 pages</b>
<b>Appendix 3 – EUT External Photos .....</b>		<b>2 pages</b>
<b>Appendix 4 – EUT Internal Photos .....</b>		<b>4 pages</b>
<b>Appendix 5 – RF exposure information.....</b>		<b>2 pages</b>

## Product information

### Manufacturers declarations

	<b>BLE Transceiver</b>
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK
Number of channels	40
Channel separation	2 MHz
Type of antenna	PCB Antenna
Antenna gain (dBi)	2.1 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	No
Nominal voltage	$V_{nor.}$ : 3.0 VDC
Independent Operation Modes	Transmitting

### Product function and intended use

The equipment under test (EUT) is an in gold ball with Bluetooth connectivity . It is powered by 3.0 VDC CR2032 battery.

FCC ID: 2ARPRCHPIG0001

Models	Product description
Neverlost (NL-1811)	Golf Ball with Bluetooth Low Energy Connectivity

### Submitted documents

Circuit Diagram  
Block Diagram  
Technical Description  
User manual  
Label

### Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

### Related Submittal(s) Grants

This is a single application for certification of the transmitter.

FCC\_15.247\_DTS\_v2.0

### Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

## Test Set-up and Operation Mode

### Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

### Special Accessories and Auxiliary Equipment

- NIL

### Countermeasures to achieve EMC Compliance

- NIL

## Test Methodology

### Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

### Field Strength Calculation

The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.  
R = Reading of Spectrum Analyzer in dBuV.  
AF = Antenna Factor in dB.  
CF = Cable Attenuation Factor in dB.  
FA = Filter Attenuation Factor in dB.  
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


## Test Setup Diagram


Diagram of Measurement Configuration for Radiation Test

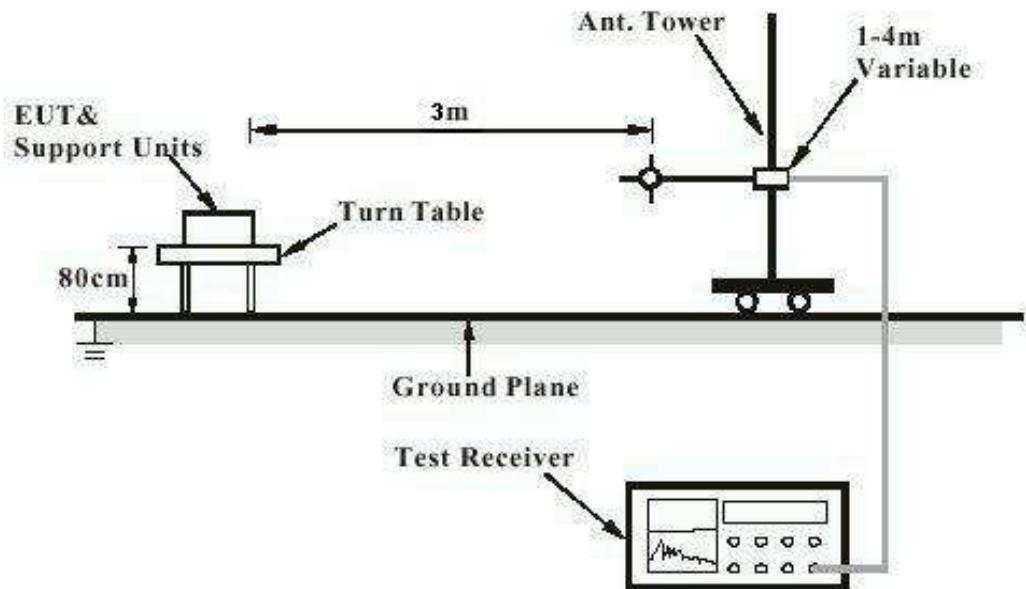

**Note:** Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

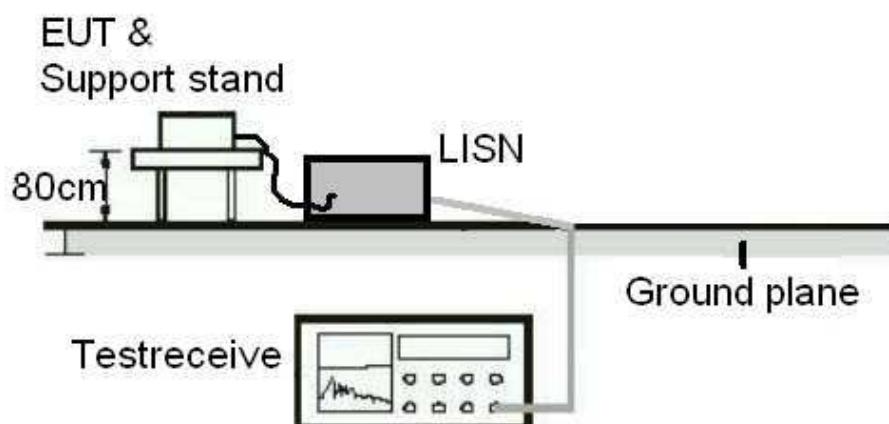

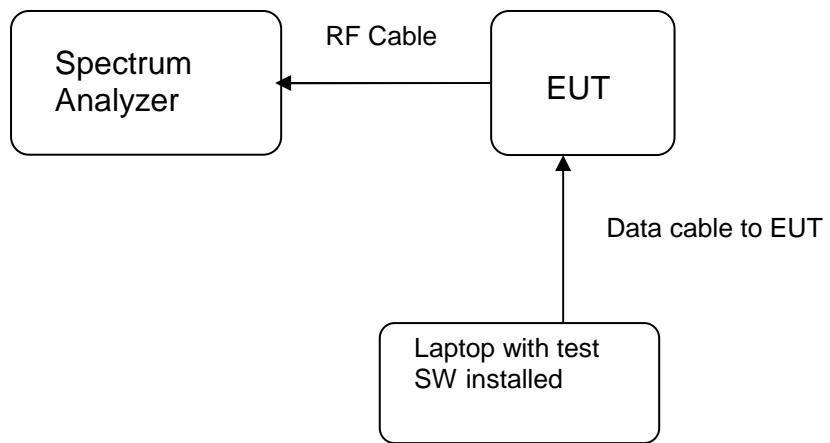**Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)**

## Test Facility

### Test Laboratory Information

TÜV Rheinland Hong Kong Ltd.

Address: 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong

Tel.: +852 2192 1000

Fax: +852 2192 1001

Email [service-gc@tuv.com](mailto:service-gc@tuv.com)

Web: [www.tuv.com](http://www.tuv.com)

The test facility is recognized or accredited by the following organizations:

#### FCC

Type	: Accredited Test Firm
Designation Number	: HK0013
Test Firm Registration Number	: 371735
Scope	: Intentional Radiators

## List of Test and Measurement Instruments

### TÜV Rheinland Hong Kong Ltd

#### Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	23-Apr-18	23-Apr-19
Test Receiver	R & S	ESU40	12-Jun-18	12-Jun-19
Active Loop Antenna	EMCO	6502	25-Oct-18	25-Oct-19
Bi-conical Antenna	R & S	HK116	21-Mar-18	21-Mar-20
Log Periodic Antenna	R & S	HL223	22-Mar-18	22-Mar-20
Horn Antenna	EMCO	3115	28-Mar-18	28-Mar-20
Coaxial cable	Huber+Suhner	CNM-NMCMILX800-473	11-Dec-17	11-Dec-19
High Frequency Cable	Huber+Suhner	CNM-NMCMILX800-473	11-Dec-17	11-Dec-19
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	18-Jul-17	18-Jul-19
Preamplifier 18GHz to 40GHz with cable	A.H. Systems, Inc.	PAM-1840VH	29-Jan-18	29-Jan-19
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	30-Oct-17	30-Oct-19

#### Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	03 May 2018	02 May 2019

## Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is  $\pm 2.42\text{dB}$ .

The estimated combined standard uncertainty for radiated emissions measurements is  $\pm 4.81\text{dB}$  (9kHz to 30MHz) and  $\pm 4.62\text{dB}$  (30MHz to 200MHz) and  $\pm 5.67\text{dB}$  (200MHz to 1000MHz) and is  $\pm 5.07\text{dB}$  (1GHz to 8.2GHz) and  $\pm 4.58\text{dB}$  (8.2GHz to 12.4GHz) and  $\pm 4.78\text{dB}$  (12.4GHz to 18GHz)

The estimated combined standard uncertainty for antenna conducted emission is  $\pm 2.1\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for the level of confidence is approximately 95%.

## Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass	
<b>FCC Requirement:</b>	No antenna other than that furnished by the responsible party shall be used with the device		
a) Antenna type:	Fixed Integral PCB Antenna		
b) Manufacturer and model no:	N/A		
c) Peak Gain:	2.10 dBi		
<b>Verdict:</b>	Pass		
FCC 15.204 – Antenna Requirement 2		Pass	
<b>FCC Requirement:</b>	An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
<b>Results:</b>	Only one integral antenna can be used.		
<b>Verdict:</b>	N/A		
FCC 15.207 – Conducted Emission on AC Mains		Pass	
There is no AC power input or output ports on the EUT.			
FCC 15.247 (a)(2) – 6dB Bandwidth Measurement		Pass	
<b>FCC Requirement:</b>	Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.		
Test Specification :	ANSI C63.10 – 2013		
Test date	13.11.2018		
Mode of operation	Tx mode		
Port of testing	Temporary antenna port		
Supply voltage	3.0VDC		
Temperature	23°C		
Humidity	50%		
<b>Results:</b>	For test protocols please refer to Appendix 1		
Channel frequency (MHz)	6 dB left (MHz)	6 dB right (MHz)	6dB bandwidth (kHz)
2402	2401.622	2402.348	726.0
2440	2439.628	2440.348	720.0
2480	2479.592	2480.354	762.0

<b>FCC 15.247(b)(3) – Maximum Peak Conducted Output Power</b>		<b>Pass</b>	
<b>FCC Requirement:</b> For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)			
Test Specification : ANSI C63.10 – 2013 Test date : 13.11.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 3.0VDC Temperature : 23°C Humidity : 50%			
<b>Results:</b> For test protocols please refer to Appendix 1			
Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict
2402	7.22	1 / 30.0	Pass
2440	7.26	1 / 30.0	Pass
2480	7.16	1 / 30.0	Pass

<b>FCC 15.247(e) – Power Spectral Density</b>		<b>Pass</b>	
<b>FCC Requirement:</b> For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.			
Test Specification : ANSI C63.10 – 2013 Test date : 13.11.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 3.0VDC Temperature : 23°C Humidity : 50%			
<b>Results:</b> For test protocols please refer to Appendix 1.			
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict
2402	6.45	8.0	Pass
2440	6.45	8.0	Pass
2480	6.37	8.0	Pass

FCC 15.247(d) – Spurious Conducted Emissions		Pass			
Test Specification	:	ANSI C63.10 – 2013			
Test date	:	13.11.2018			
Mode of operation	:	Tx mode			
Port of testing	:	Temporary antenna port			
Supply voltage	:	3.0VDC			
Temperature	:	23°C			
Humidity	:	50%			
<b>FCC Requirement:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
<b>Results:</b>	<p>Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.</p> <p>Only the worst cases is shown below. For test protocols refer to Appendix 1</p>				
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	2399.840	-32.76	6.45	39.21	Pass
2440	2948.000	-40.44	6.45	46.89	Pass
2480	2483.720	-34.57	6.37	40.94	Pass

FCC 15.205 – Radiated Emissions in Restricted Frequency Bands			Pass
Test Specification : ANSI C63.10 – 2013			
Test Specification : 08.11.2018			
Mode of operation : Tx mode			
Port of testing : Enclosure			
Frequency range : 9kHz – 25GHz			
Supply voltage : 3.7VDC			
Temperature : 23°C			
Humidity : 50%			
<b>FCC Requirement:</b> In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).			
<b>Results:</b>			Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.
			Simultaneous transmission was investigated and no new emissions were found.
			All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.
Mode: 2402MHz TX		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2390.000	50.8	74.0 / PK	
2390.000	26.7	54.0 / AV	
4804.479	44.0	74.0 / PK	
4804.479	31.3	54.0 / AV	
7206.000	45.6	74.0 / PK	
7206.000	31.7	54.0 / AV	
Mode: 2402 MHz TX		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2390.000	55.9	74.0 / PK	
2390.000	30.1	54.0 / AV	
4803.347	43.8	74.0 / PK	
4803.347	30.1	54.0 / AV	
Mode: 2440 MHz TX		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4879.487	45.9	74.0 / PK	
4879.487	32.7	54.0 / AV	
Mode: 2440 MHz TX		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4879.487	43.9	74.0 / PK	
4879.487	34.4	54.0 / AV	
Mode: 2480MHz TX		Vertical Polarization	
Freq	Level	Limit/ Detector	

FCC\_15.247\_DTS\_v2.0

MHz	dBuV/m	dBuV/m
2483.500	65.8	74.0 / PK
2483.500	40.6	54.0 / AV
Mode: 2480 MHz TX		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	70.4	74.0 / PK
2483.500	44.4	54.0 / AV