



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247 TEST REPORT

For

Xiamen Mairdi Electronic Technology Co., Ltd

Unit402, Building B, No.26 Xiangyue Road, Torch(Xiang'an) Industrial Park, Xiamen , China

FCC ID: 2ARQZ-M800BT

Report Type: Original Report	Product Name: Wireless Communication Headset
Report Number: RXM181108051-00A	
Report Date: 2018-11-30	
Reviewed By:	Dean Lau RF Supervisor 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	27
APPLICABLE STANDARD	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST PROCEDURE	27
TEST DATA	27
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33

TEST DATA	33
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST DATA	39
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	59
APPLICABLE STANDARD	59
TEST PROCEDURE	59
TEST EQUIPMENT LIST AND DETAILS.....	59
TEST DATA	59
FCC §15.247(d) - BAND EDGES TESTING	61
APPLICABLE STANDARD	61
TEST PROCEDURE	61
TEST EQUIPMENT LIST AND DETAILS.....	61
TEST DATA	62

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Wireless Communication Headset
EUT Model:	M800BTD
Multiple Models:	M800BT, M890BT, M890BTD
FCC ID:	2ARQZ-M800BT
Rated Input Voltage:	DC 3.7V from battery or DC 5V from USB port
External Dimension:	Headset: 157.1mm(L)*166.5mm(W)*49.3mm(H) Base: 74.7mm(L)*74.7mm(W)*52mm(H)
Serial Number:	181108051
EUT Received Date:	2018.11.08

Note: The series product, models are electrically identical, we selected M800BTD for testing. The difference between them was explained in the declaration letter.

Objective

This report is prepared on behalf of *Xiamen Mairdi Electronic Technology Co., Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2ARQZ-M800BT.

Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices" and KDB 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	$\pm 1.5\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer. For 2.4GHz BT, 79 channels are provided to testing.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
2	2404	...	...
...	...	77	2479
38	2440	78	2480
39	2441	/	/

Channel 0, 39 and 78 were selected to testing.

EUT Exercise Software

Test software: 'Bluetest3 V2.5.0' was used in test, the system configured maximum power level as below setting:

Mode	Channel	Frequency (MHz)	Power Level
GFSK	Low	2402	50
	Middle	2441	50
	High	2480	50
$\pi/4$ DQPSK	Low	2402	50
	Middle	2441	50
	High	2480	50
8DPSK	Low	2402	50
	Middle	2441	50
	High	2480	50

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Hunkey	Adapter	HKC0105020-9H	A10BF1784000004

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB cable	No	No	1.5	adapter	EUT/Base

Block Diagram of Test Setup

With Base:

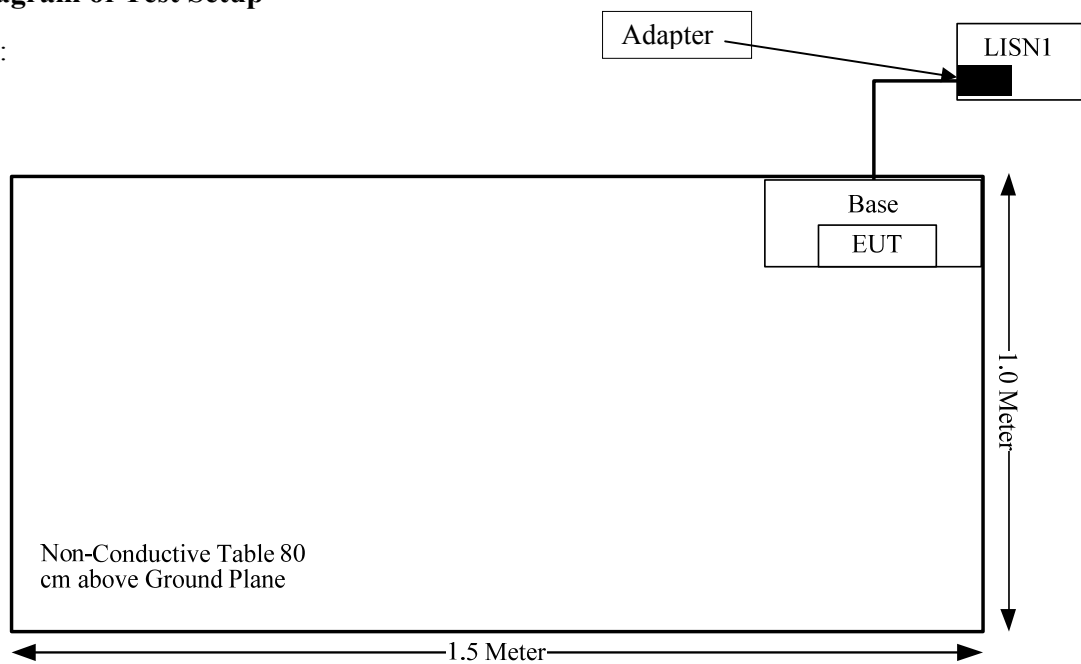

Without Base:

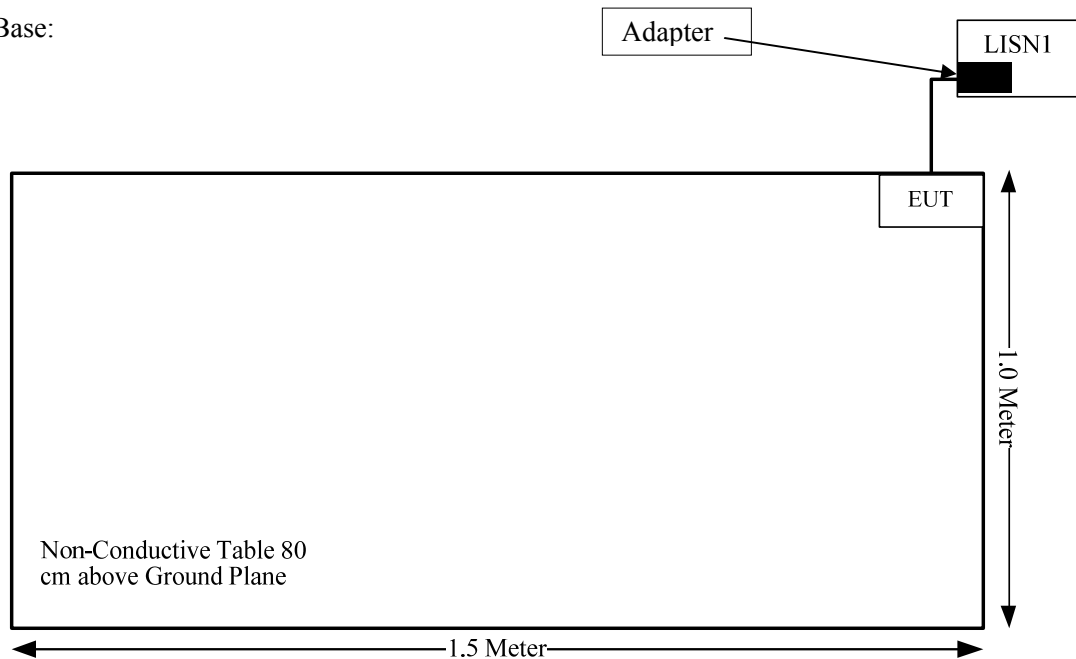

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is 7.0 dBm (5.01 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 5.01/5 \cdot (\sqrt{2.480}) = 1.6 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one PCB antenna arrangement for BT, and the antenna gain is -3.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

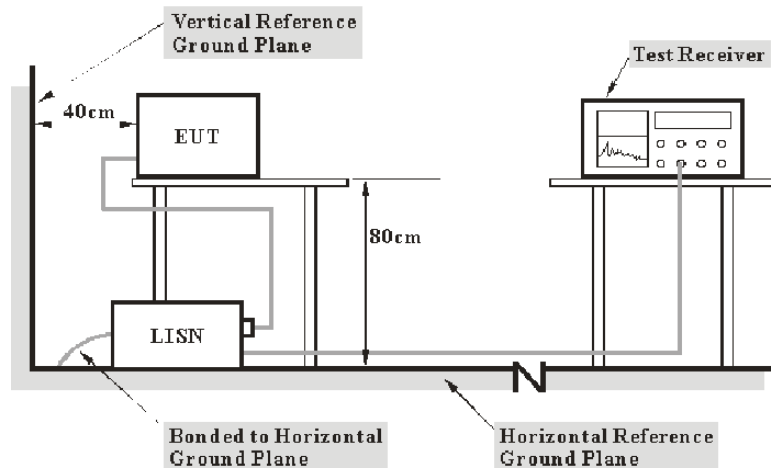

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26.2 °C
Relative Humidity:	55 %
ATM Pressure:	99.9 kPa

The testing was performed by Ade Xiao on 2018-11-26.

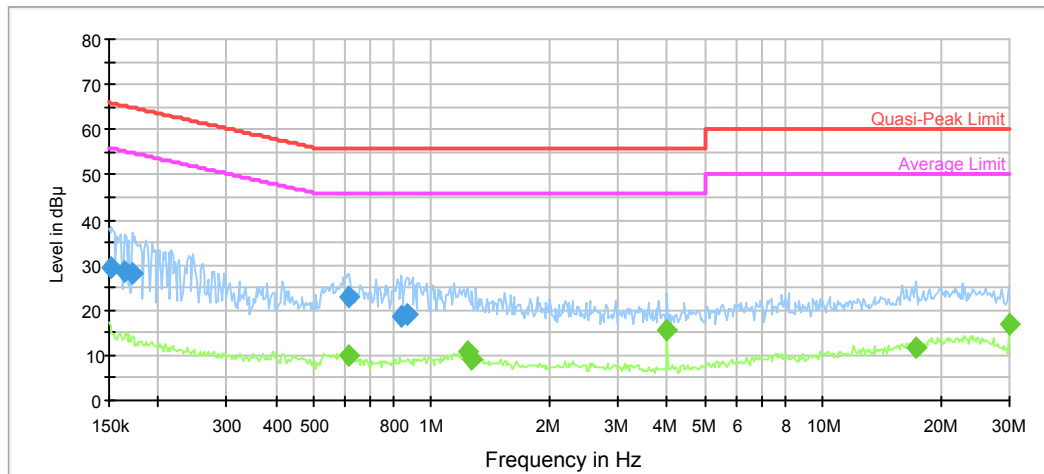Test Mode: Transmitting**With base:****AC120V, 60 Hz, Line:**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.152410	29.2	9.000	L1	11.1	36.7	65.9	Compliance
0.165051	28.5	9.000	L1	11.0	36.7	65.2	Compliance
0.171759	27.9	9.000	L1	10.9	37.0	64.9	Compliance
0.614619	22.8	9.000	L1	9.8	33.2	56.0	Compliance
0.838622	18.5	9.000	L1	9.8	37.5	56.0	Compliance
0.865782	19.1	9.000	L1	9.8	36.9	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.614619	10.0	9.000	L1	9.8	36.0	46.0	Compliance
1.239175	10.7	9.000	L1	9.8	35.3	46.0	Compliance
1.259081	9.0	9.000	L1	9.8	37.0	46.0	Compliance
3.997889	15.7	9.000	L1	9.8	30.3	46.0	Compliance
17.320829	11.6	9.000	L1	10.0	38.4	50.0	Compliance
30.000000	17.0	9.000	L1	10.1	33.0	50.0	Compliance

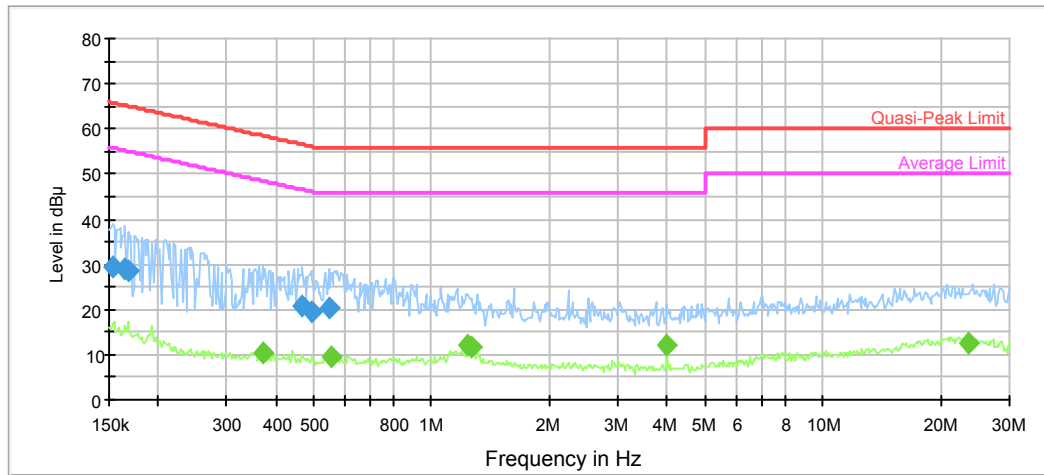
AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.153629	29.4	9.000	N	11.1	36.4	65.8	Compliance
0.165051	29.2	9.000	N	11.0	36.0	65.2	Compliance
0.167702	28.5	9.000	N	10.9	36.6	65.1	Compliance
0.468757	20.5	9.000	N	9.9	36.0	56.5	Compliance
0.491712	19.4	9.000	N	9.9	36.7	56.1	Compliance
0.545378	20.2	9.000	N	9.8	35.8	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.372042	10.2	9.000	N	10.0	38.3	48.5	Compliance
0.554139	9.7	9.000	N	9.8	36.3	46.0	Compliance
1.239175	12.1	9.000	N	9.8	33.9	46.0	Compliance
1.259081	11.5	9.000	N	9.8	34.5	46.0	Compliance
3.997889	12.1	9.000	N	9.8	33.9	46.0	Compliance
23.446008	12.6	9.000	N	10.1	37.4	50.0	Compliance


Without base:

AC120V, 60 Hz, Line:

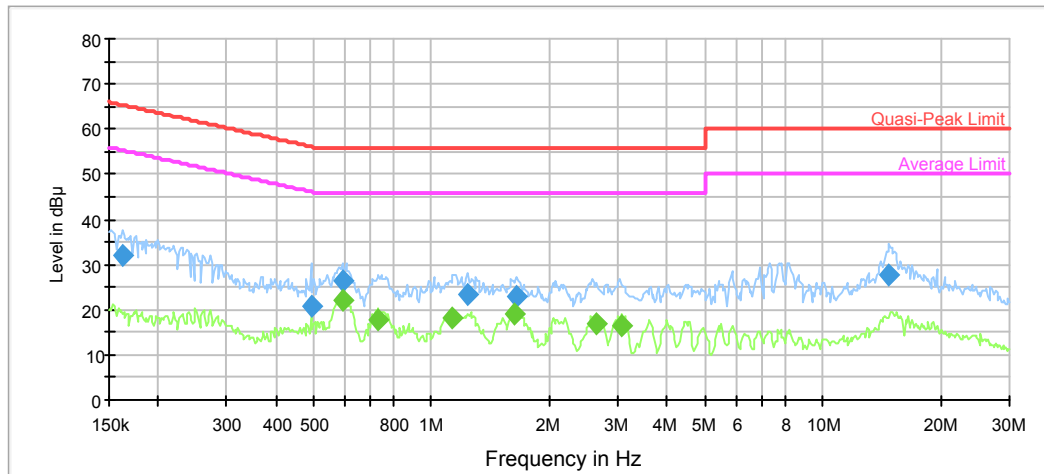

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.162441	32.1	9.000	L1	11.0	33.2	65.3	Compliance
0.491712	21.0	9.000	L1	9.9	35.1	56.1	Compliance
0.590613	26.4	9.000	L1	9.8	29.6	56.0	Compliance
1.239175	23.5	9.000	L1	9.8	32.5	56.0	Compliance
1.650866	22.9	9.000	L1	9.7	33.1	56.0	Compliance
14.769236	27.7	9.000	L1	9.9	32.3	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.590613	22.0	9.000	L1	9.8	24.0	46.0	Compliance
0.732382	17.8	9.000	L1	9.8	28.2	46.0	Compliance
1.126176	18.1	9.000	L1	9.8	27.9	46.0	Compliance
1.637763	18.9	9.000	L1	9.7	27.1	46.0	Compliance
2.641698	16.9	9.000	L1	9.8	29.1	46.0	Compliance
3.073500	16.4	9.000	L1	9.8	29.6	46.0	Compliance


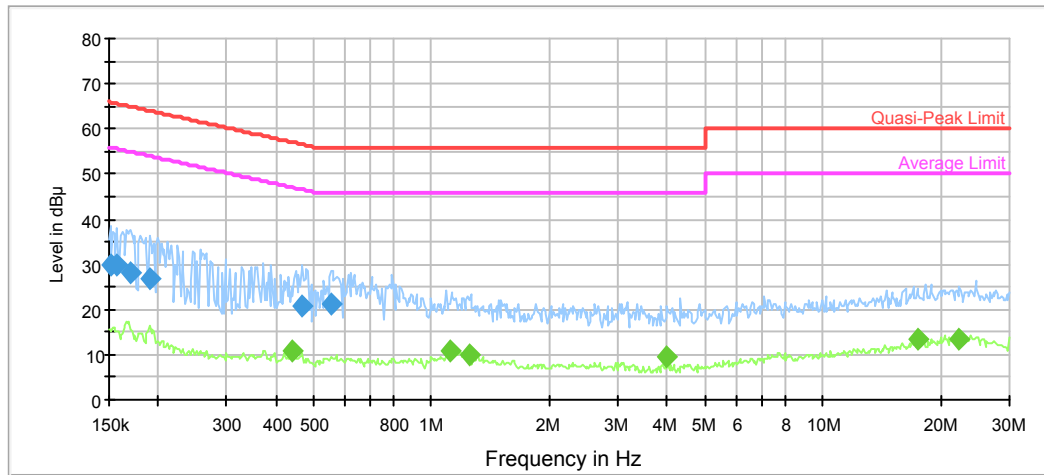
AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.151200	30.1	9.000	N	11.1	35.8	65.9	Compliance
0.157346	29.7	9.000	N	11.1	35.9	65.6	Compliance
0.170396	28.1	9.000	N	10.9	36.8	64.9	Compliance
0.190505	26.9	9.000	N	10.7	37.1	64.0	Compliance
0.468757	20.6	9.000	N	9.9	35.9	56.5	Compliance
0.554139	21.3	9.000	N	9.8	34.7	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.443327	11.0	9.000	N	9.9	36.0	47.0	Compliance
1.117238	10.8	9.000	N	9.8	35.2	46.0	Compliance
1.249088	9.9	9.000	N	9.8	36.1	46.0	Compliance
3.997889	9.5	9.000	N	9.8	36.5	46.0	Compliance
17.599071	13.3	9.000	N	10.0	36.7	50.0	Compliance
22.351451	13.3	9.000	N	10.0	36.7	50.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

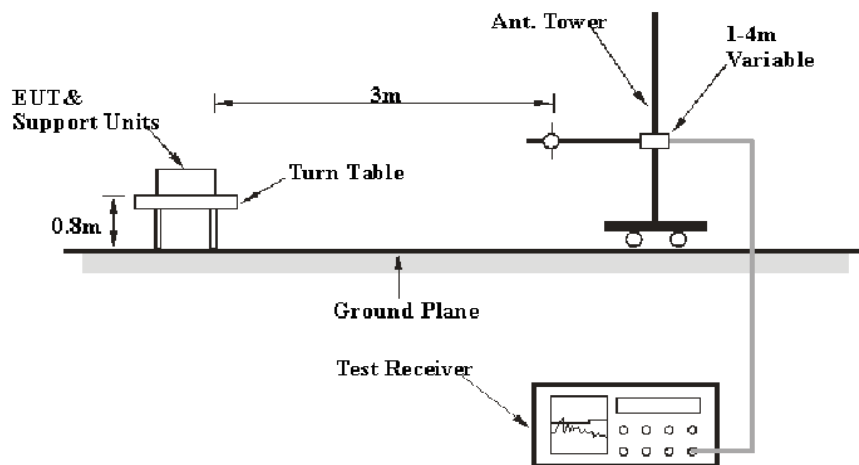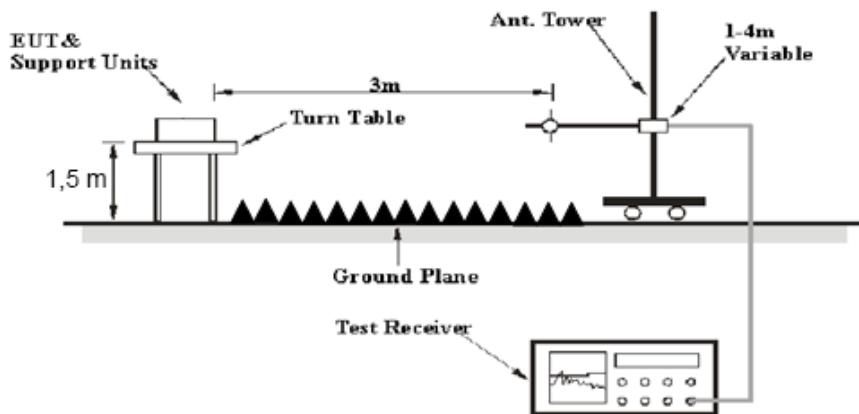EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2018-08-03	2019-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2018-09-24	2019-09-24
Sonoma	Amplifier	310N	185914	2018-10-13	2019-10-13
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Data

Environmental Conditions


Temperature:	24.4~24.7°C
Relative Humidity:	35~57 %
ATM Pressure:	99.9~100.7 kPa

The testing was performed by Vito Chen and Tyler Pan from 2018-11-21 to 2018-11-25.


Test Mode: Transmitting

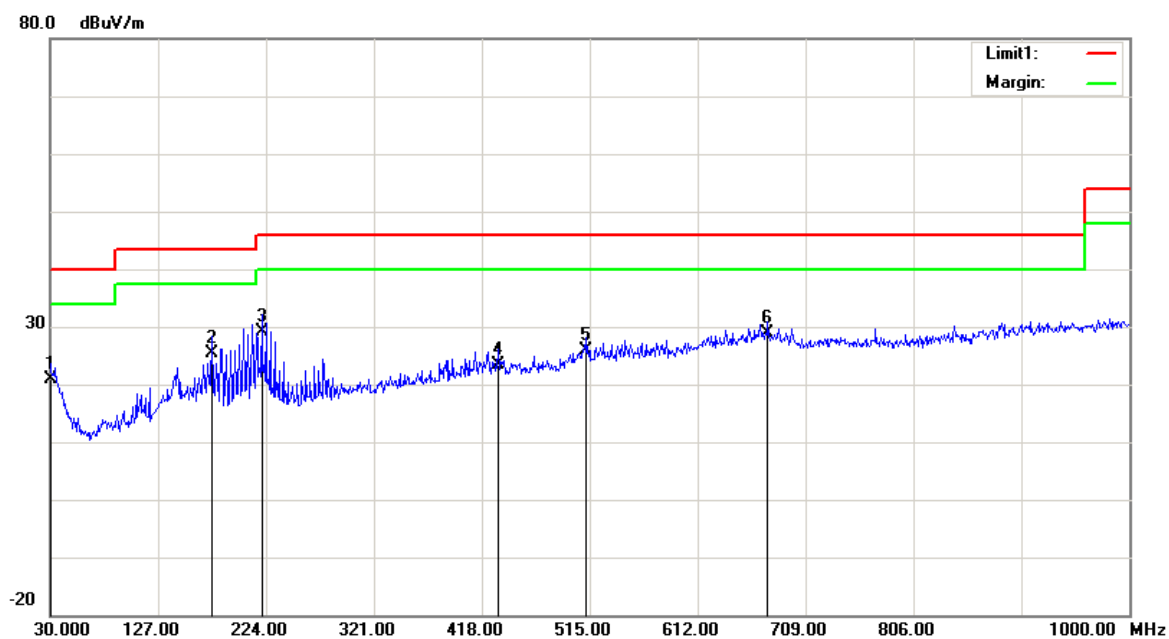1) 30MHz-1GHz (GFSK high channel was the worst)*With Base:***Horizontal:**


Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	25.13	QP	-4.33	20.80	40.00	19.20
175.5000	35.44	QP	-10.04	25.40	43.50	18.10
220.1200	40.34	QP	-11.14	29.20	46.00	16.80
432.5500	28.09	QP	-4.59	23.50	46.00	22.50
512.0900	28.83	QP	-2.93	25.90	46.00	20.10
675.0500	28.80	QP	0.00	28.80	46.00	17.20

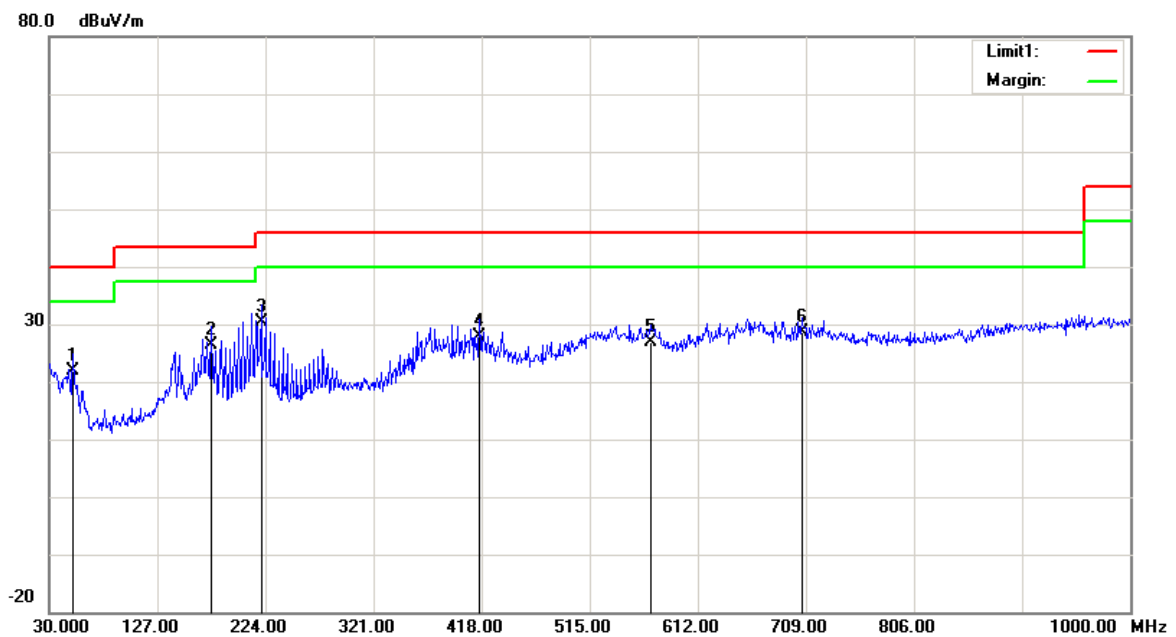Vertical:

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
51.3400	37.64	QP	-15.74	21.90	40.00	18.10
175.5000	36.54	QP	-10.04	26.50	43.50	17.00
220.1200	41.54	QP	-11.14	30.40	46.00	15.60
416.0600	32.62	QP	-4.82	27.80	46.00	18.20
569.3200	28.36	QP	-1.46	26.90	46.00	19.10
705.1200	28.55	QP	0.05	28.60	46.00	17.40

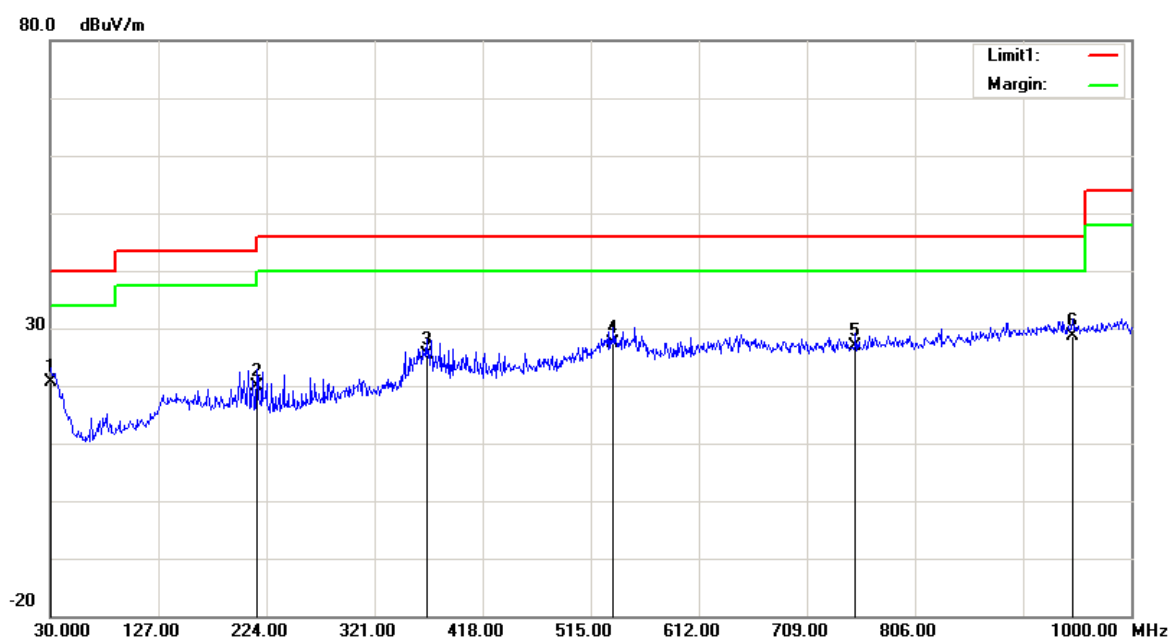*Without Base:***Horizontal:**

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	24.93	QP	-4.33	20.60	40.00	19.40
215.2700	31.11	QP	-11.31	19.80	43.50	23.70
367.5600	31.48	QP	-6.08	25.40	46.00	20.60
535.3700	29.85	QP	-2.35	27.50	46.00	18.50
752.6500	26.08	QP	0.72	26.80	46.00	19.20
947.6200	23.78	QP	4.82	28.60	46.00	17.40

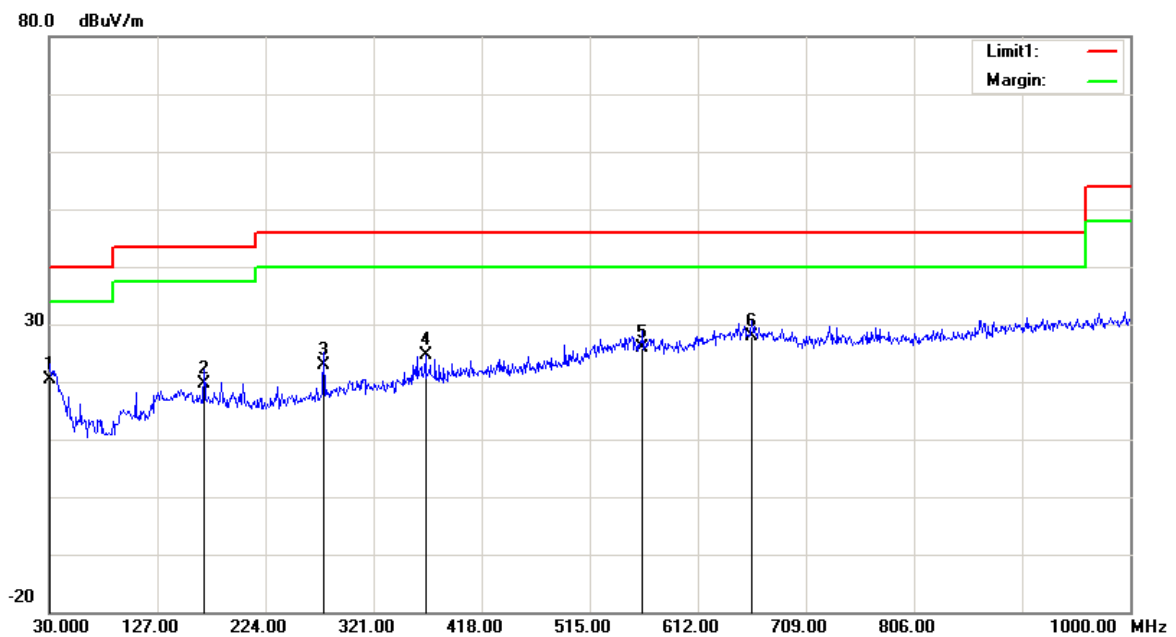Vertical:

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	24.83	QP	-4.33	20.50	40.00	19.50
168.7100	29.43	QP	-9.73	19.70	43.50	23.80
276.3800	31.47	QP	-8.67	22.80	46.00	23.20
367.5600	30.68	QP	-6.08	24.60	46.00	21.40
562.5300	27.43	QP	-1.53	25.90	46.00	20.10
660.5000	27.87	QP	-0.07	27.80	46.00	18.20




2) 1GHz-25GHz:

Pre-scan all modes and the worst case is GFSK mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	58.23	PK	H	28.10	1.80	0.00	88.13	N/A	N/A
2402.00	48.10	AV	H	28.10	1.80	0.00	78.00	N/A	N/A
2402.00	60.63	PK	V	28.10	1.80	0.00	90.53	N/A	N/A
2402.00	50.41	AV	V	28.10	1.80	0.00	80.31	N/A	N/A
2390.00	26.15	PK	V	28.08	1.80	0.00	56.03	74.00	17.97
2390.00	12.98	AV	V	28.08	1.80	0.00	42.86	54.00	11.14
4804.00	50.33	PK	V	32.91	3.17	37.20	49.21	74.00	24.79
4804.00	37.80	AV	V	32.91	3.17	37.20	36.68	54.00	17.32
7206.00	49.18	PK	V	35.74	4.82	37.23	52.51	74.00	21.49
7206.00	36.70	AV	V	35.74	4.82	37.23	40.03	54.00	13.97
Middle Channel: 2441 MHz									
2441.00	57.39	PK	H	28.18	1.82	0.00	87.39	N/A	N/A
2441.00	47.22	AV	H	28.18	1.82	0.00	77.22	N/A	N/A
2441.00	59.92	PK	V	28.18	1.82	0.00	89.92	N/A	N/A
2441.00	49.88	AV	V	28.18	1.82	0.00	79.88	N/A	N/A
4882.00	49.88	PK	V	33.06	3.27	37.21	49.00	74.00	25.00
4882.00	37.65	AV	V	33.06	3.27	37.21	36.77	54.00	17.23
7323.00	48.86	PK	V	36.04	4.62	37.38	52.14	74.00	21.86
7323.00	36.34	AV	V	36.04	4.62	37.38	39.62	54.00	14.38
High Channel: 2480 MHz									
2480.00	58.54	PK	H	28.26	1.84	0.00	88.64	N/A	N/A
2480.00	48.46	AV	H	28.26	1.84	0.00	78.56	N/A	N/A
2480.00	61.22	PK	V	28.26	1.84	0.00	91.32	N/A	N/A
2480.00	51.25	AV	V	28.26	1.84	0.00	81.35	N/A	N/A
2483.50	26.92	PK	V	28.27	1.84	0.00	57.03	74.00	16.97
2483.50	13.57	AV	V	28.27	1.84	0.00	43.68	54.00	10.32
4960.00	50.62	PK	V	33.22	3.23	37.25	49.82	74.00	24.18
4960.00	38.27	AV	V	33.22	3.23	37.25	37.47	54.00	16.53
7440.00	49.29	PK	V	36.34	4.41	37.52	52.52	74.00	21.48
7440.00	36.87	AV	V	36.34	4.41	37.52	40.10	54.00	13.90




Worst plots (GFSK High channel) **Horizontal**

Fundamental
Test with Band
Rejection Filter

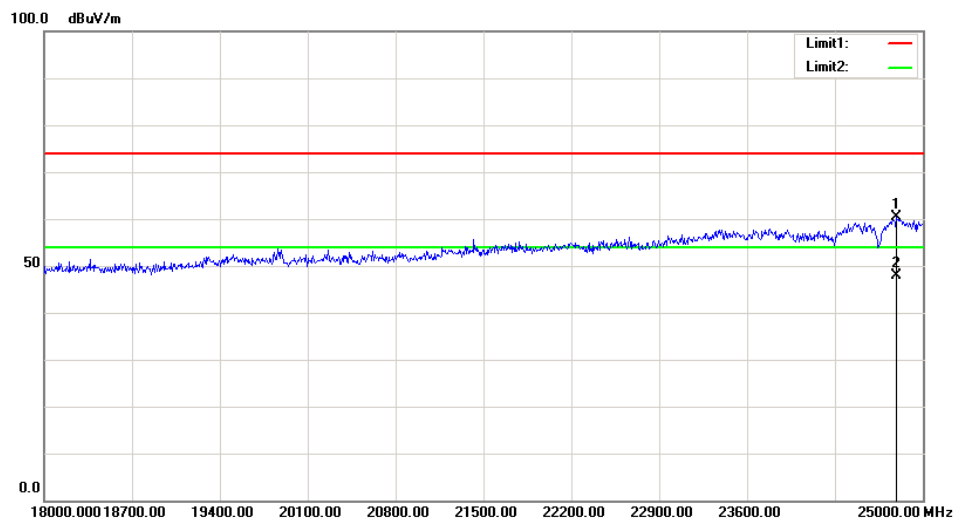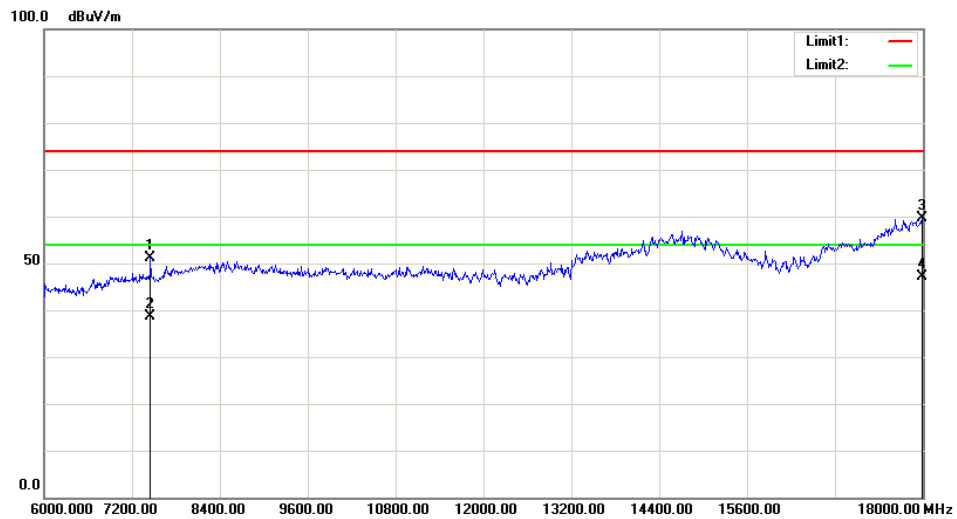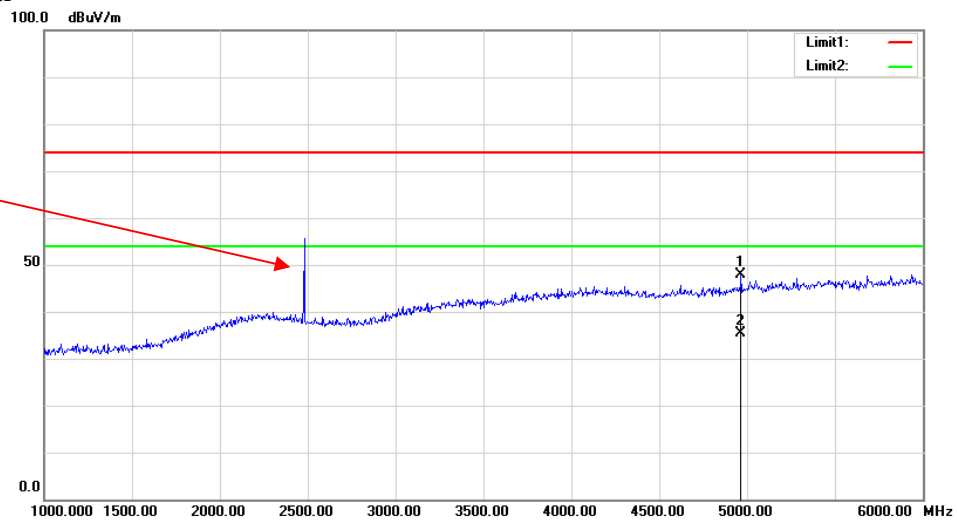

Vertical

Fundamental
Test with Band
Rejection Filter

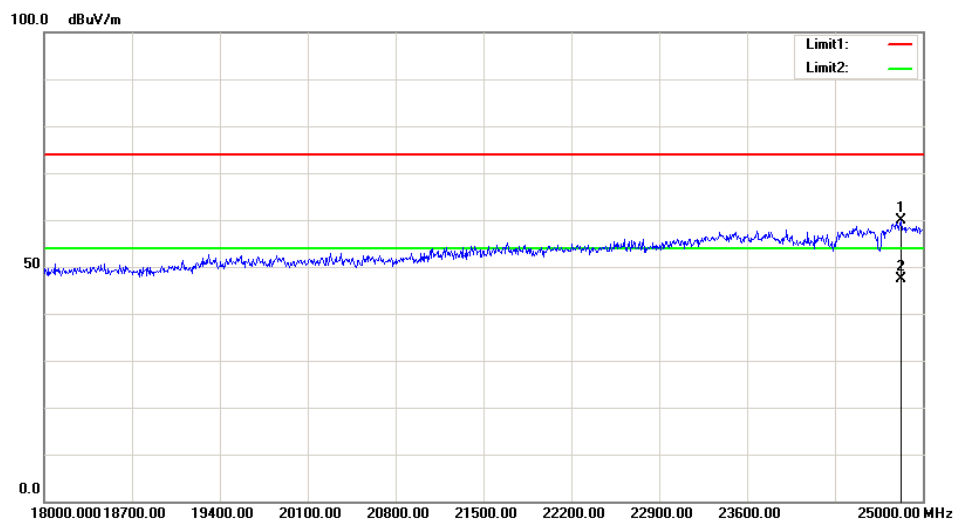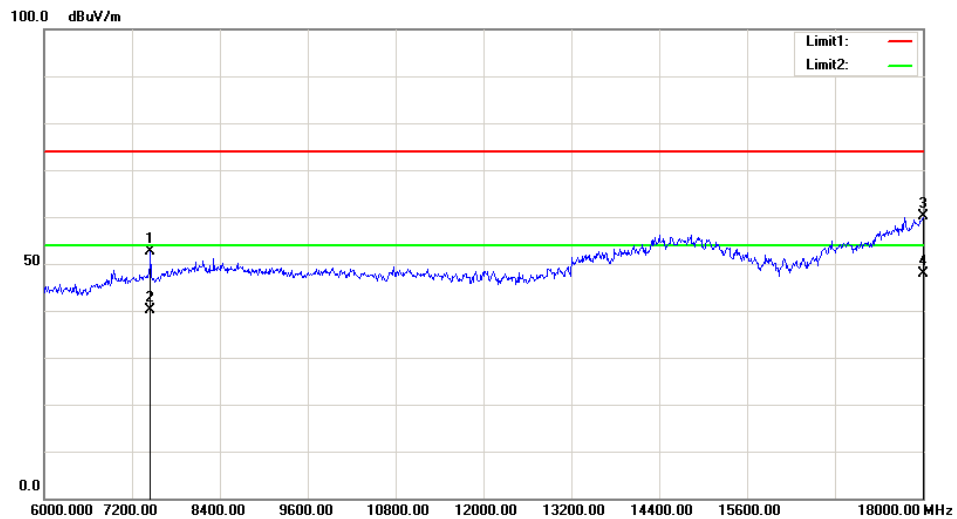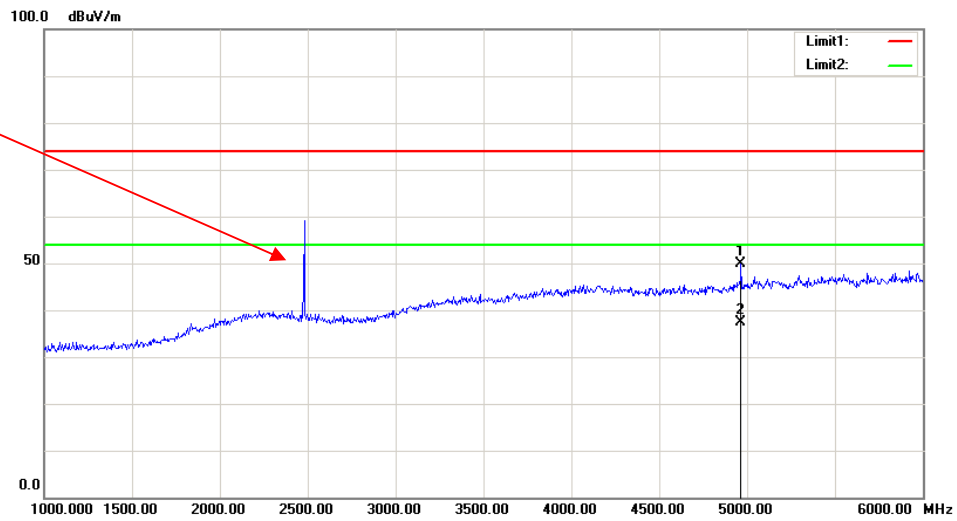

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa

* The testing was performed by Blake Yang on 2018-11-26.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	1.004	0.62
	Middle	2441	1.000	0.61
	High	2480	1.004	0.61
EDR ($\pi/4$ -DQPSK)	Low	2402	1.004	0.81
	Middle	2441	1.000	0.82
	High	2480	1.000	0.82
EDR (8DPSK)	Low	2402	1.004	0.80
	Middle	2441	1.004	0.80
	High	2480	1.004	0.80


Note: Limit= $(2/3) \times 20\text{dB bandwidth}$

BDR Mode (GFSK):

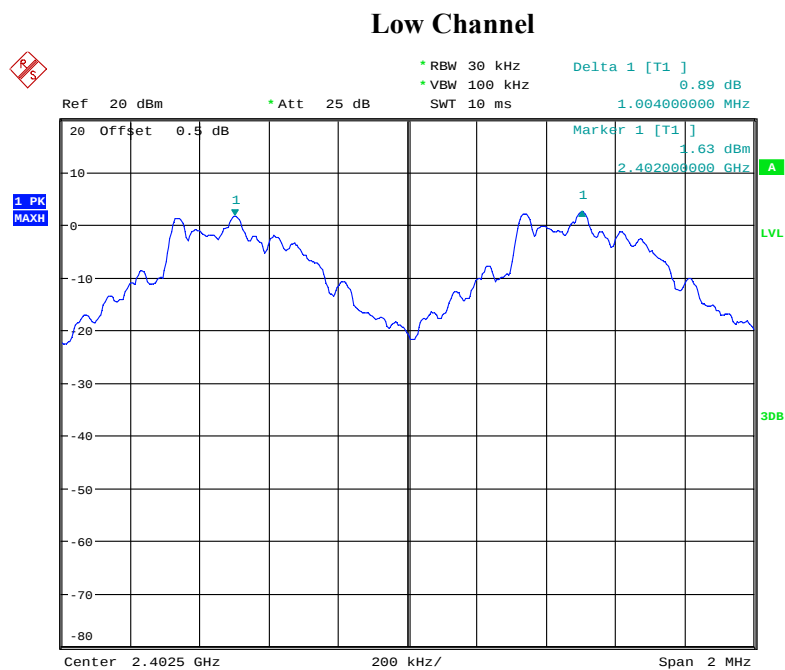


Date: 26.NOV.2018 22:37:49

Middle Channel

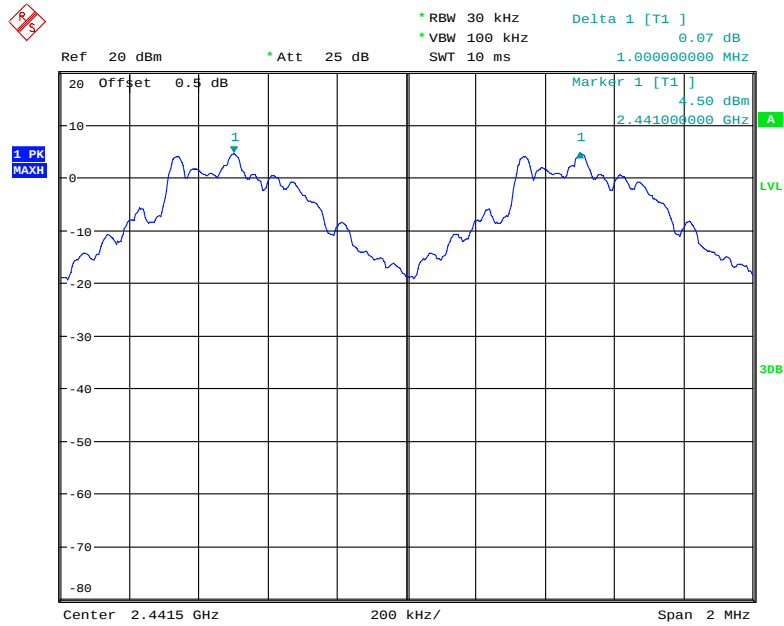


Date: 26.NOV.2018 22:38:45


High Channel

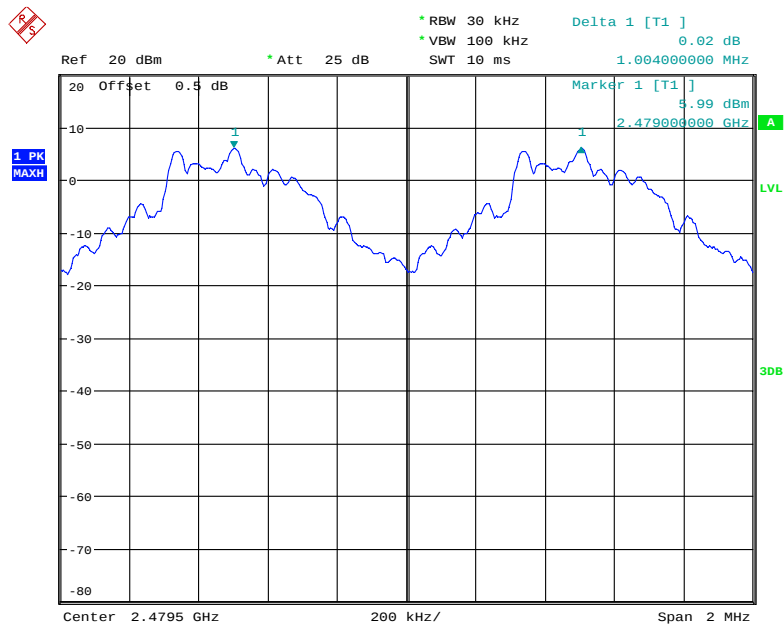

Date: 26.NOV.2018 22:39:43

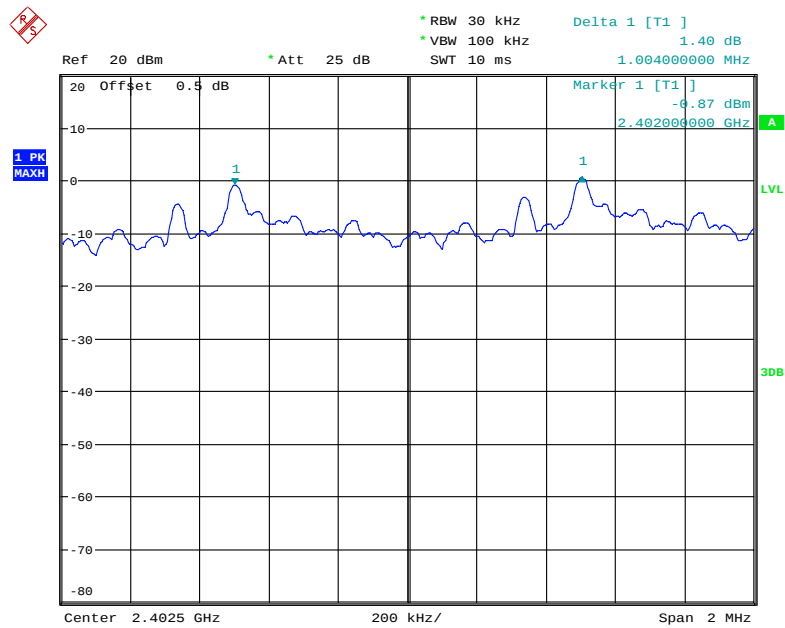
*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**

Date: 26.NOV.2018 22:40:49

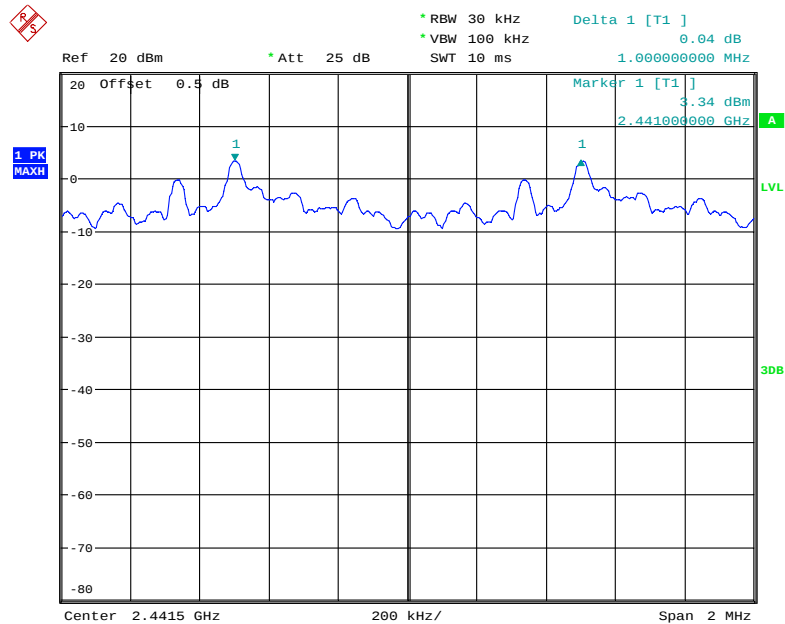Middle Channel

Date: 26.NOV.2018 22:41:37


High Channel

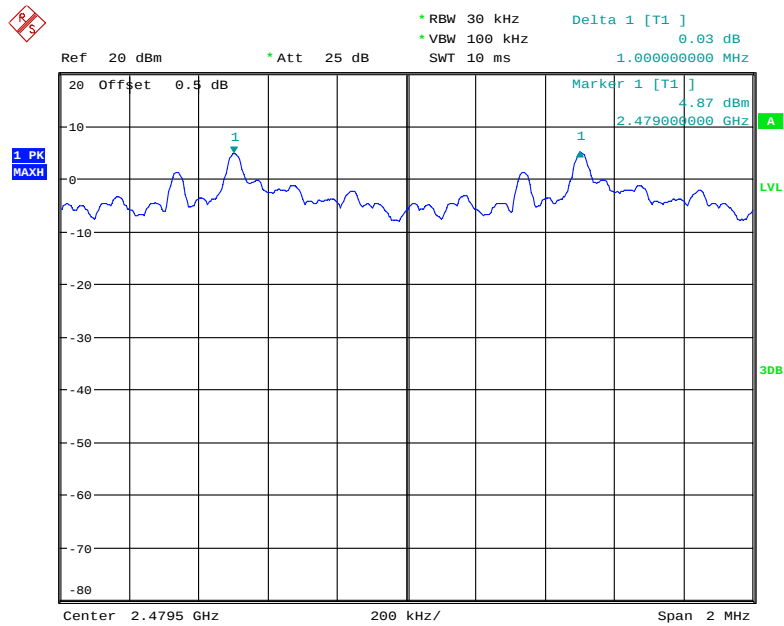

Date: 26.NOV.2018 22:42:29


EDR Mode (8DPSK):

Low Channel

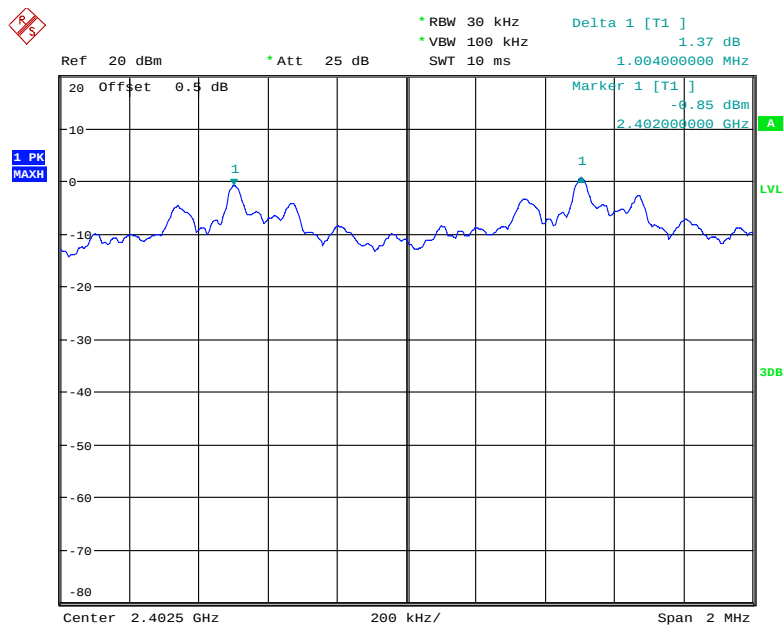


Date: 26.NOV.2018 22:43:40

Middle Channel

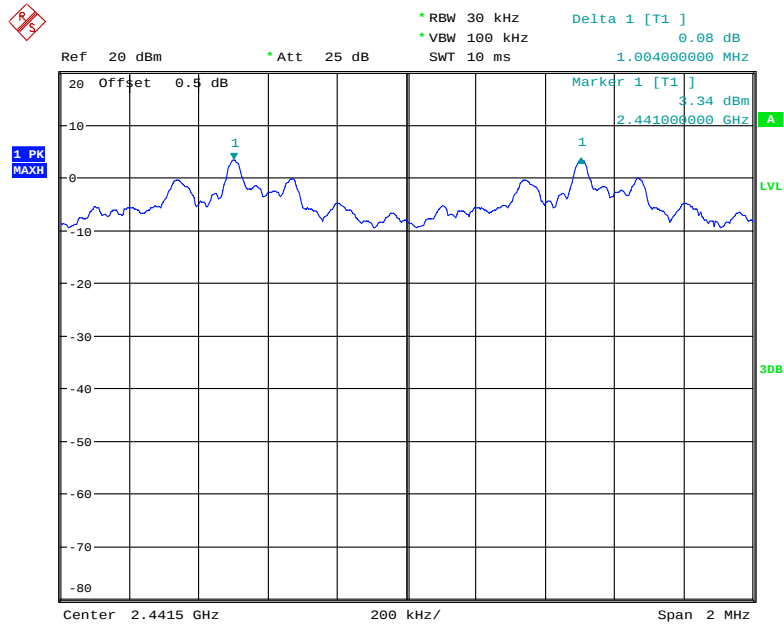

Date: 26.NOV.2018 22:44:26

High Channel

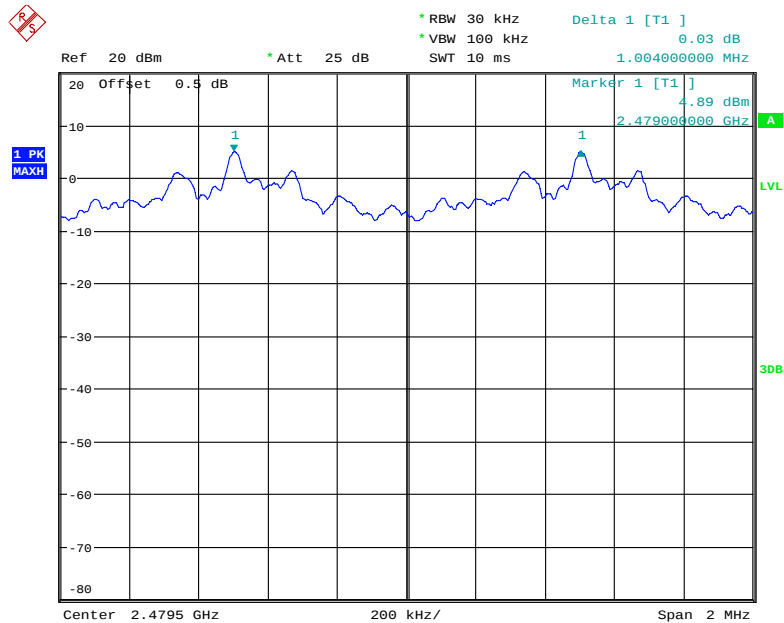

Date: 26.NOV.2018 22:46:23

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa

* The testing was performed by Blake Yang on 2018-11-26.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.926
	Middle	2441	0.922
	High	2480	0.918
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.212
	Middle	2441	1.224
	High	2480	1.224
EDR Mode (8DPSK)	Low	2402	1.198
	Middle	2441	1.194
	High	2480	1.194

BDR Mode (GFSK):

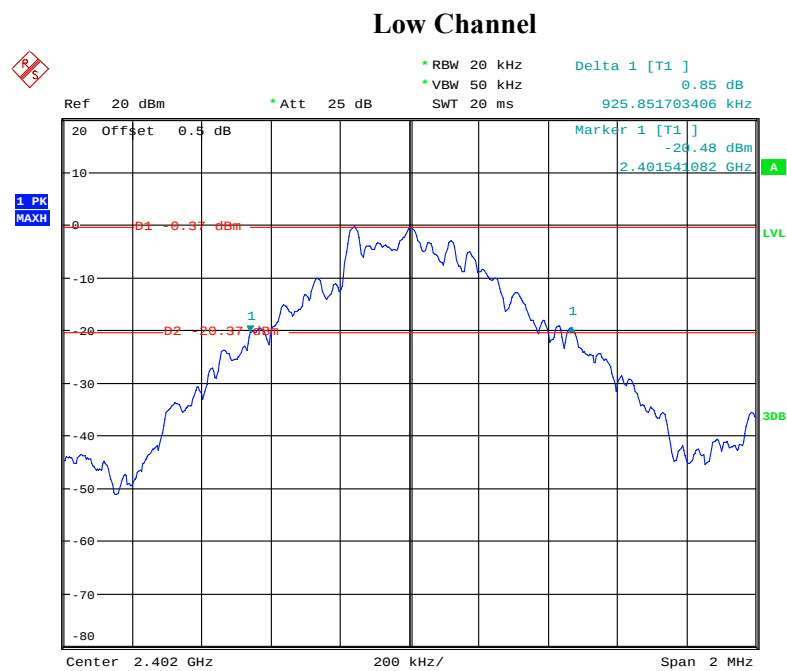


Date: 26.NOV.2018 22:11:43

Middle Channel

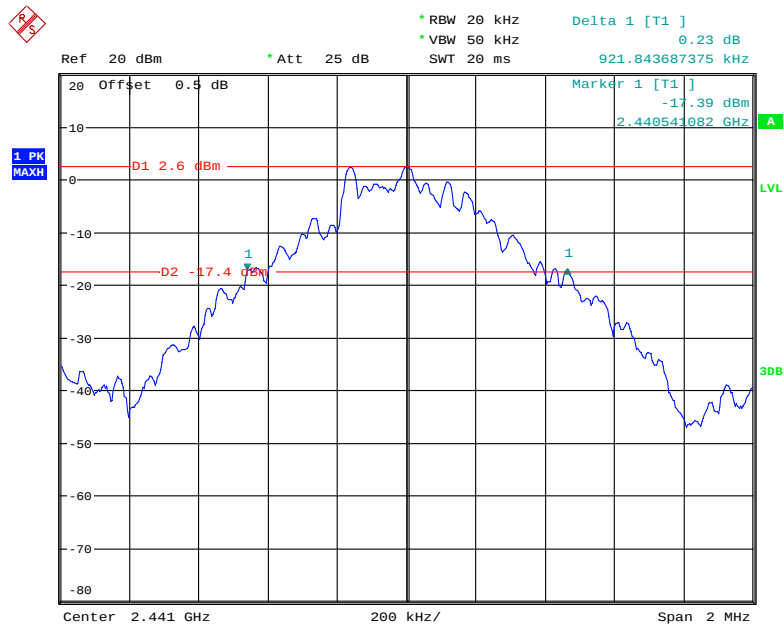

Date: 26.NOV.2018 22:13:26


High Channel

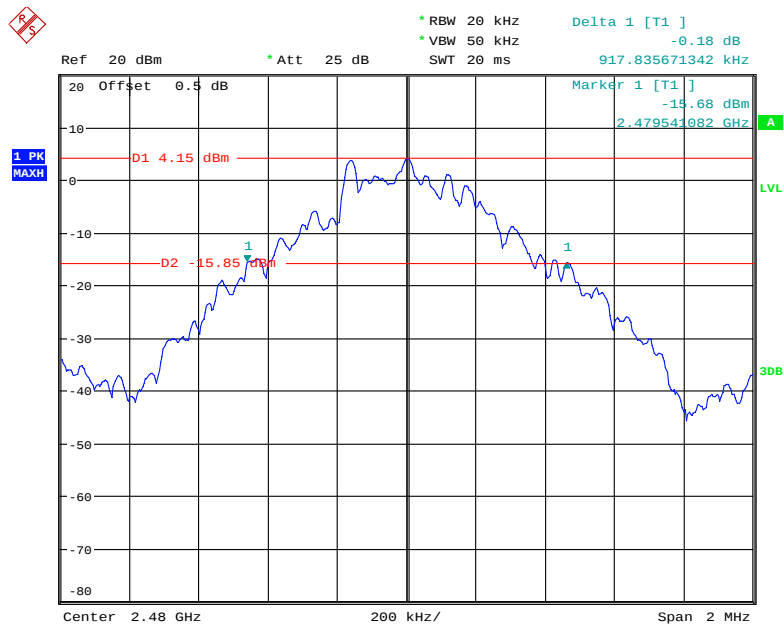

Date: 26.NOV.2018 22:10:27


*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**

Date: 26.NOV.2018 23:24:51

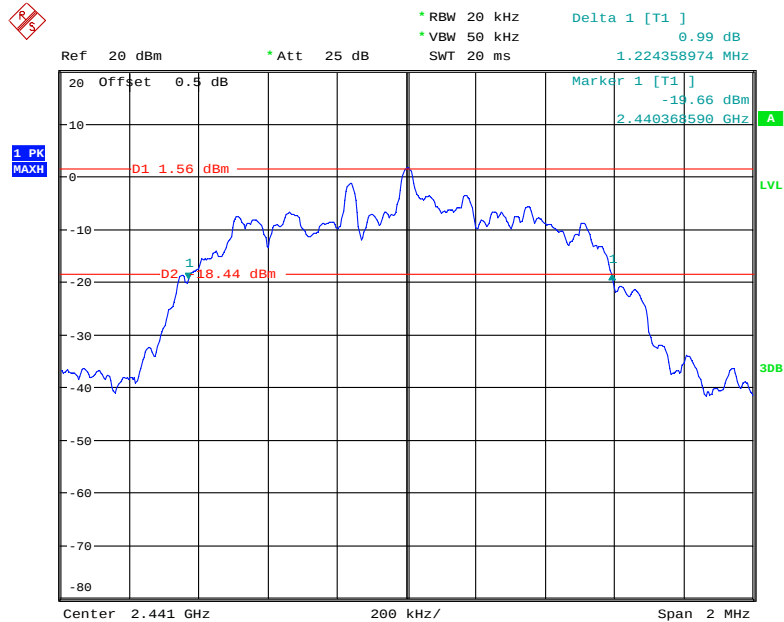Middle Channel

Date: 26.NOV.2018 23:26:31


High Channel

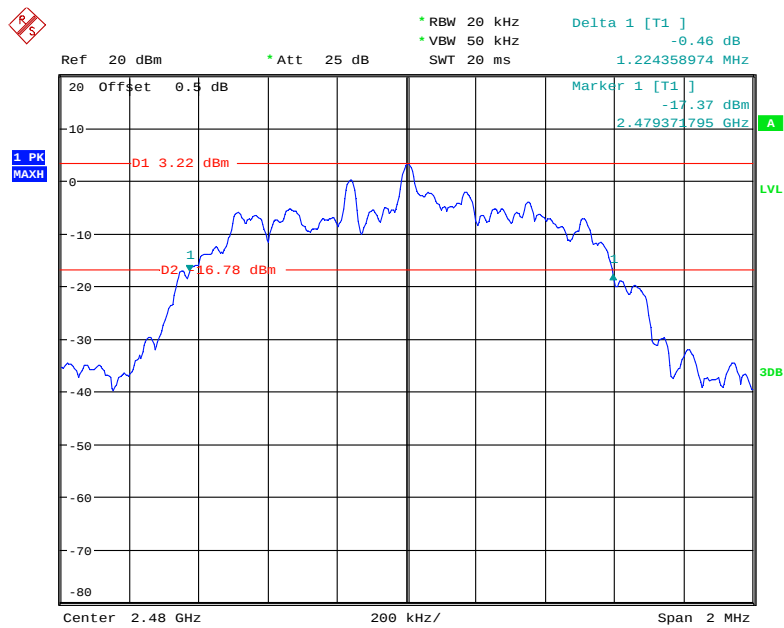

Date: 26.NOV.2018 23:23:12


EDR Mode (8DPSK):

Low Channel

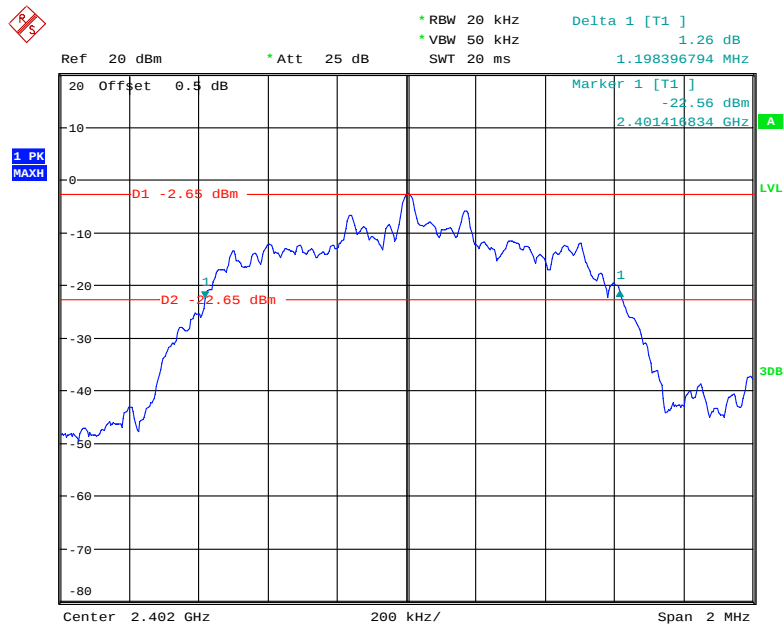


Date: 26.NOV.2018 22:21:38

Middle Channel

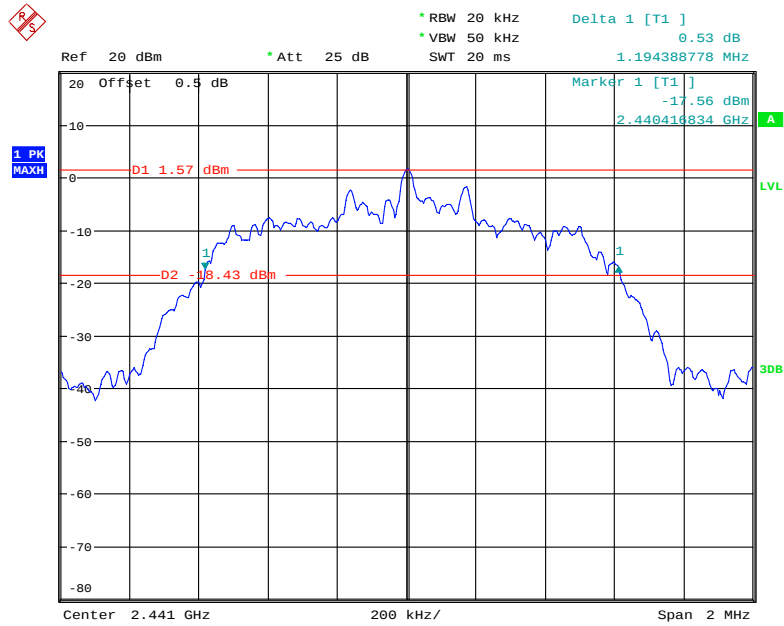

Date: 26.NOV.2018 22:24:12

High Channel

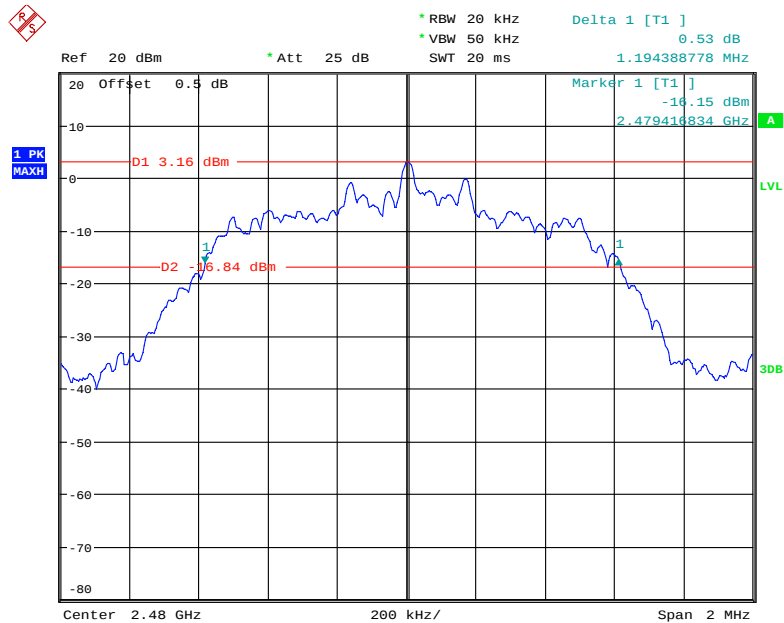

Date: 26.NOV.2018 22:19:20

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa

* The testing was performed by Blake Yang on 2018-11-26.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

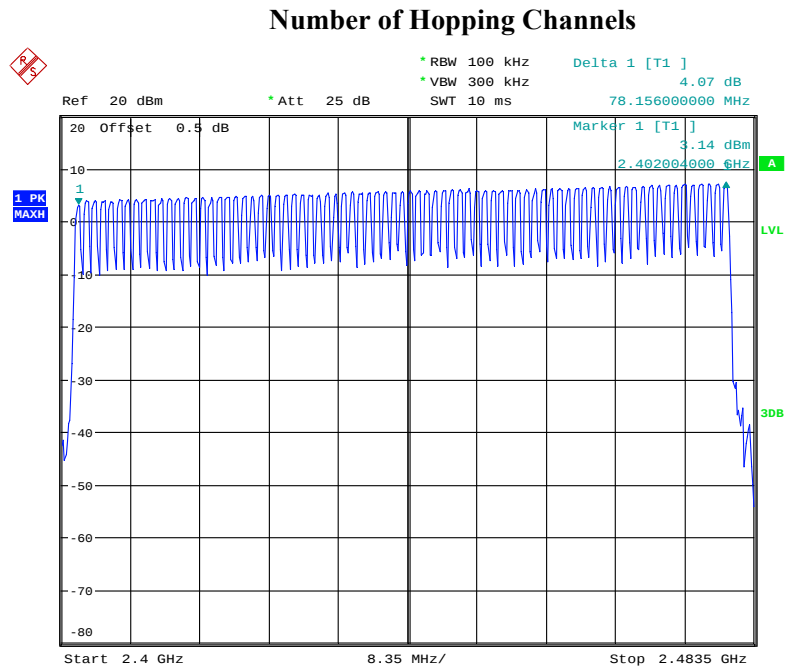


Date: 26.NOV.2018 23:15:44

EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15


Number of Hopping Channels

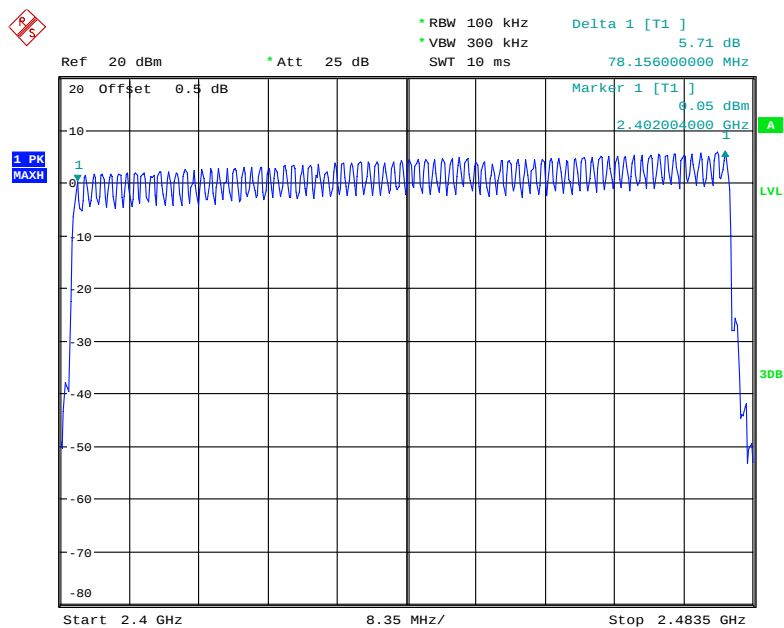

Date: 26.NOV.2018 22:59:58

EDR Mode (8DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

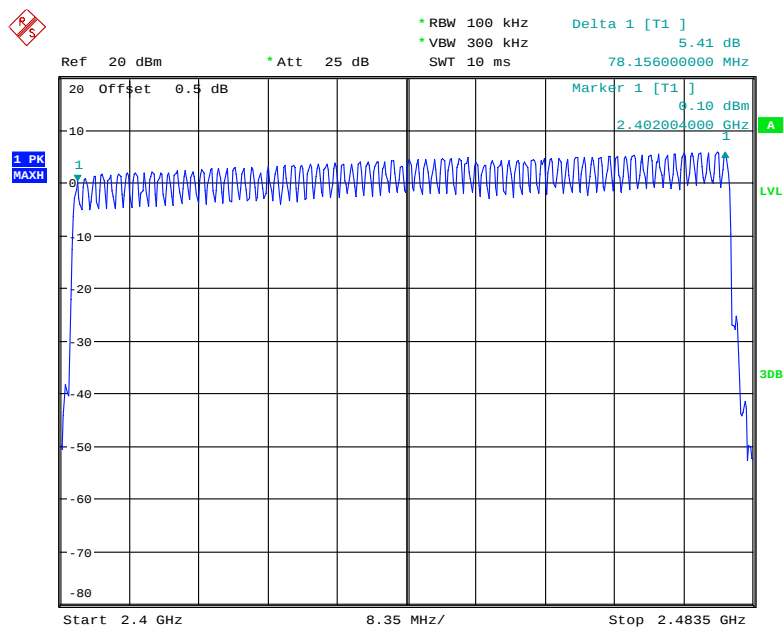Number of Hopping Channels

Date: 26.NOV.2018 22:53:38

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa


* The testing was performed by Blake Yang on 2018-11-26.

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.431	0.138	0.4	Compliance
	Middle	0.427	0.137	0.4	Compliance
	High	0.429	0.137	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
DH3	Low	1.701	0.272	0.4	Compliance
	Middle	1.701	0.272	0.4	Compliance
	High	1.707	0.273	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
DH5	Low	2.886	0.308	0.4	Compliance
	Middle	2.886	0.308	0.4	Compliance
	High	2.886	0.308	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

DH1: Low Channel

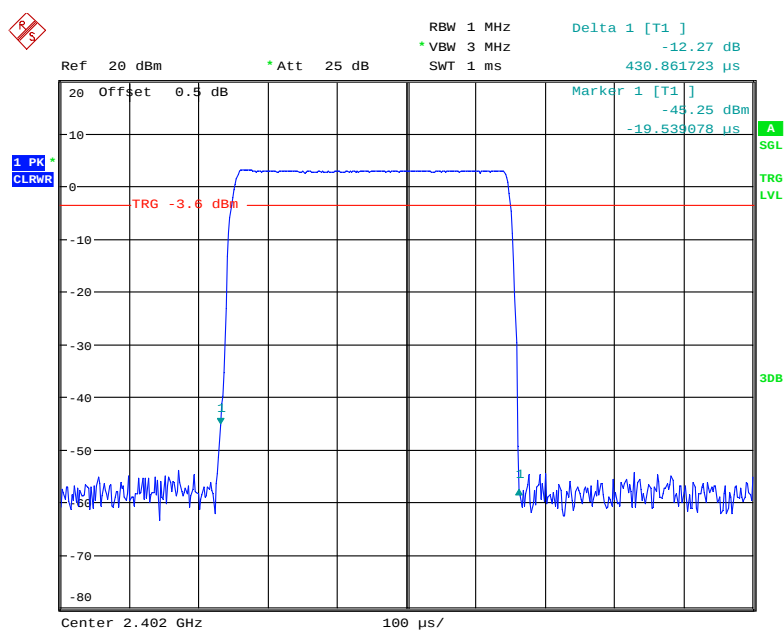


Date: 26.NOV.2018 22:26:56

DH1: Middle Channel

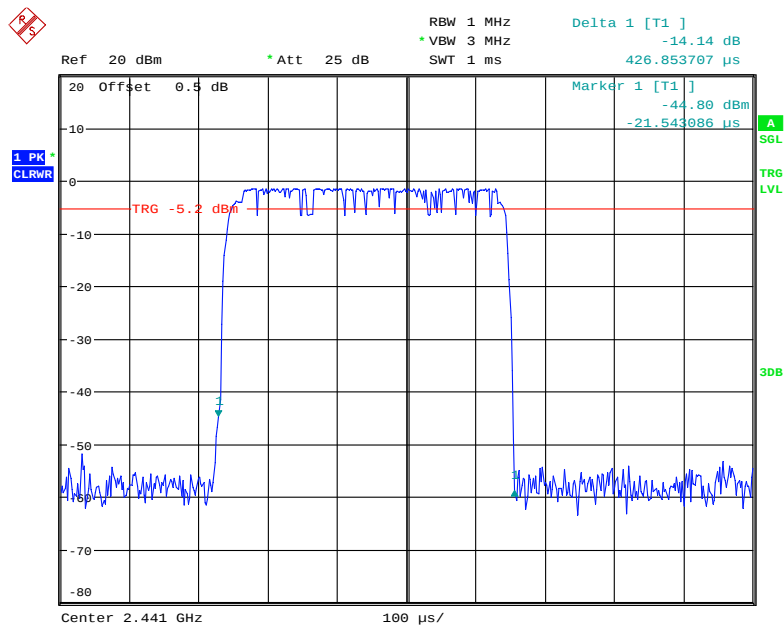


Date: 26.NOV.2018 22:27:08

DH1: High Channel

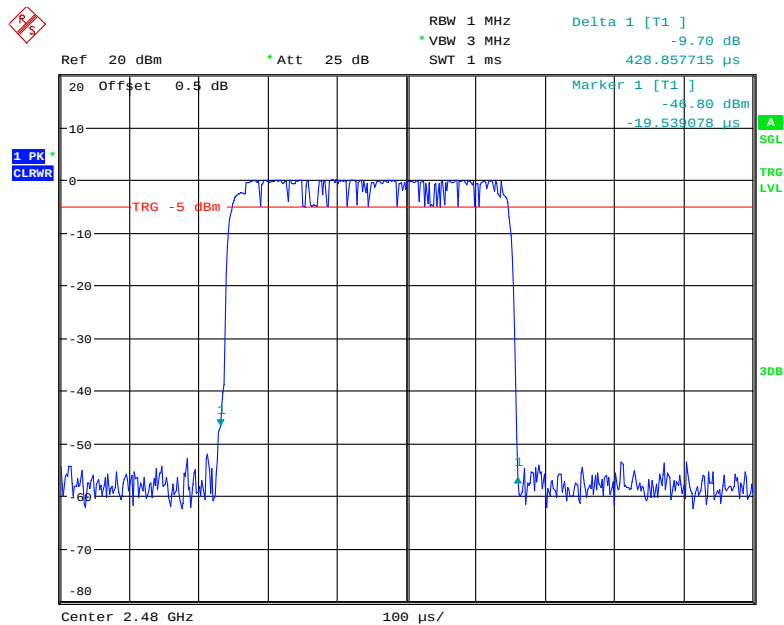


Date: 26.NOV.2018 22:27:12

DH3: Low Channel

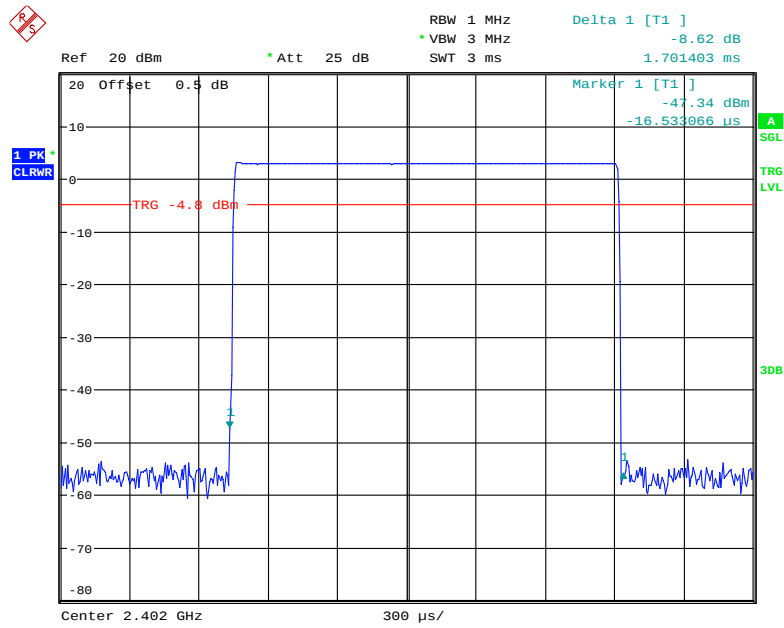


Date: 26.NOV.2018 22:27:53

DH3: Middle Channel

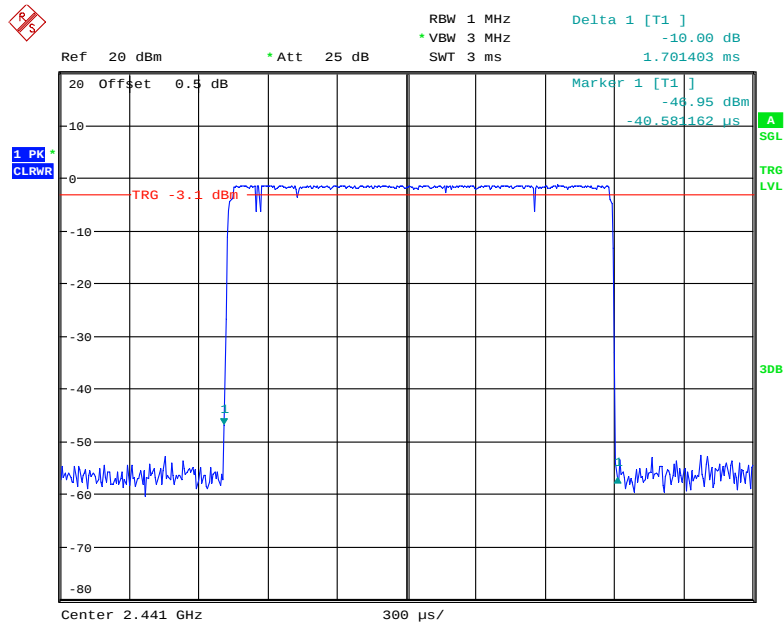


Date: 26.NOV.2018 22:27:59

DH3: High Channel

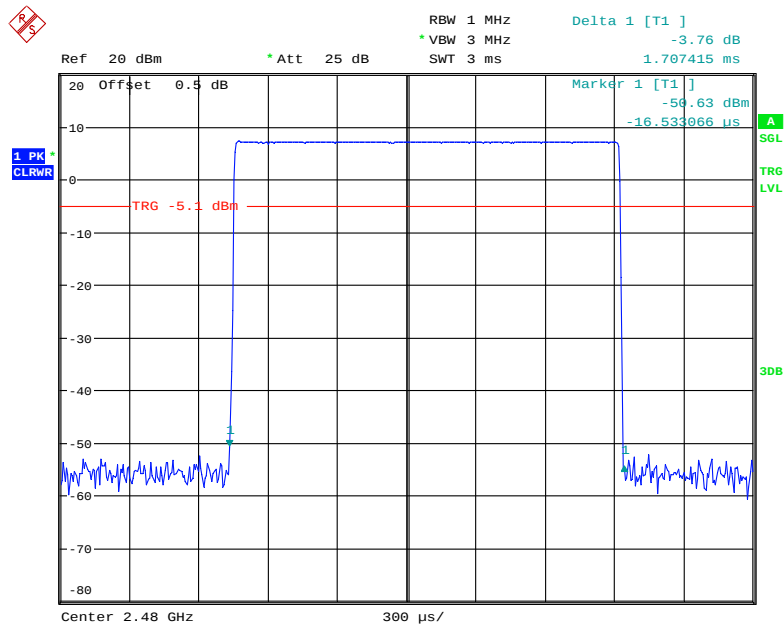


Date: 26.NOV.2018 22:28:03


DH5: Low Channel

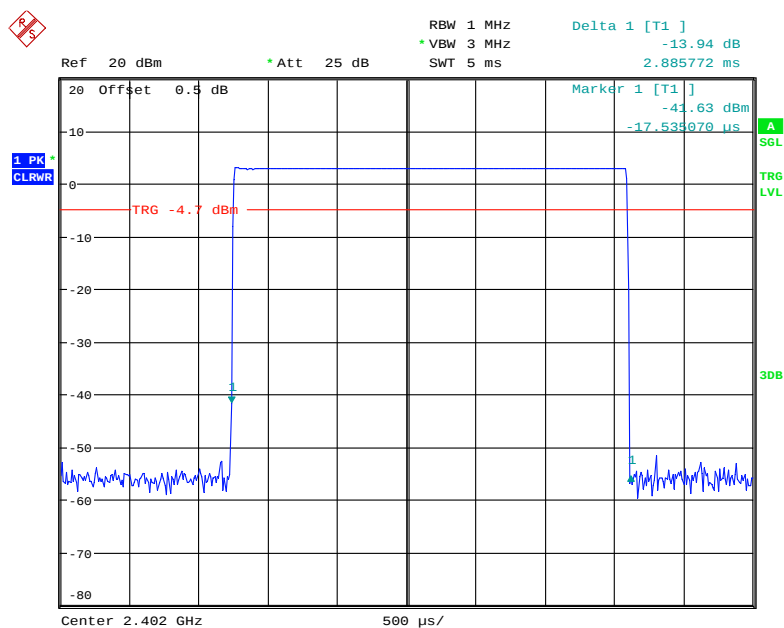

Date: 26.NOV.2018 22:28:44

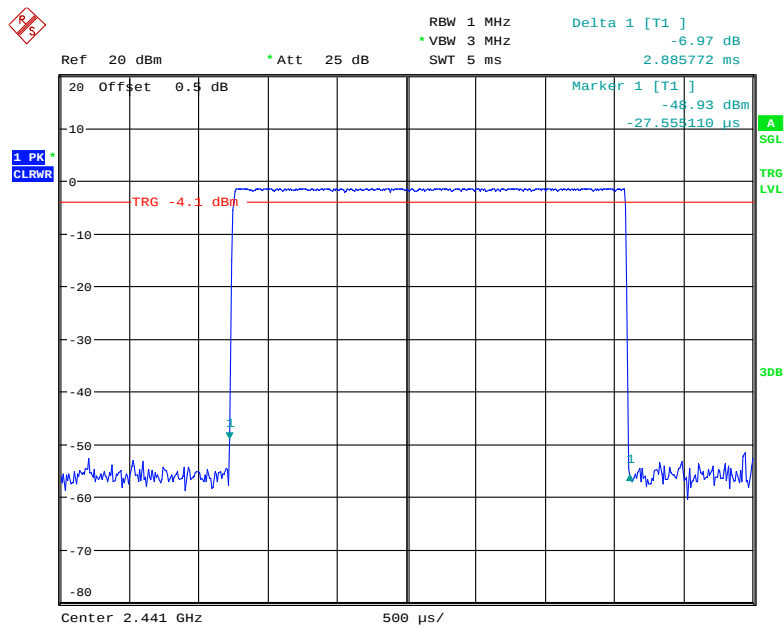DH5: Middle Channel

Date: 26.NOV.2018 22:28:48

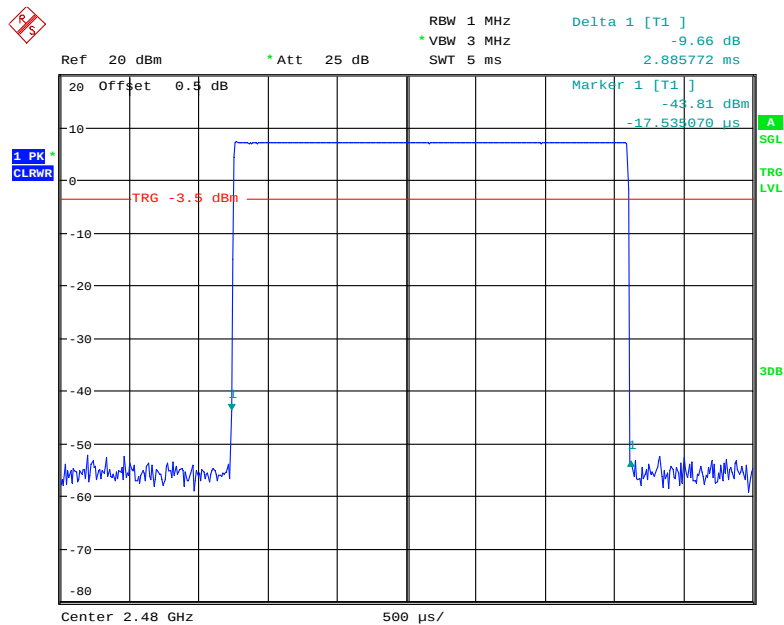
DH5: High Channel

Date: 26.NOV.2018 22:28:52

EDR Mode ($\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.439	0.140	0.4	Compliance
	Middle	0.443	0.142	0.4	Compliance
	High	0.439	0.140	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
2DH3	Low	1.713	0.274	0.4	Compliance
	Middle	1.713	0.274	0.4	Compliance
	High	1.707	0.273	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
2DH5	Low	2.966	0.316	0.4	Compliance
	Middle	2.966	0.316	0.4	Compliance
	High	2.976	0.317	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

2DH1: Low Channel

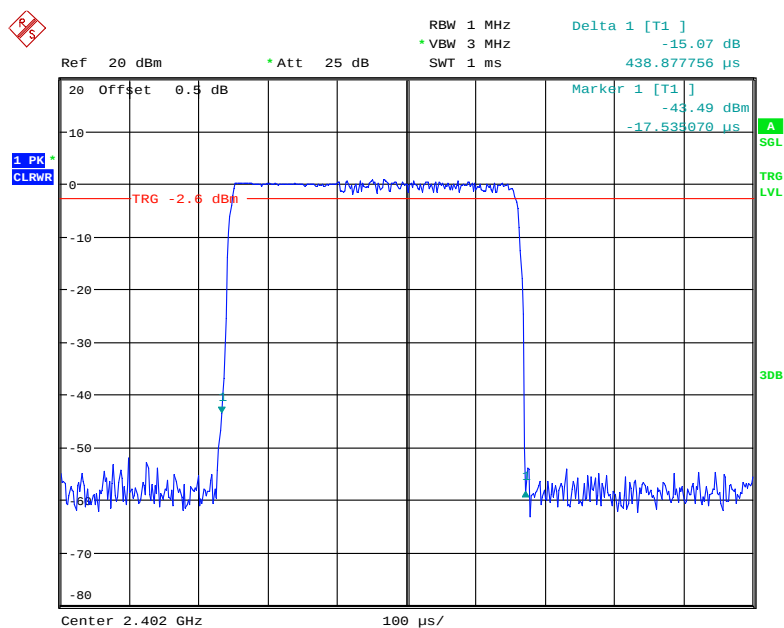


Date: 26.NOV.2018 22:29:37

2DH1: Middle Channel

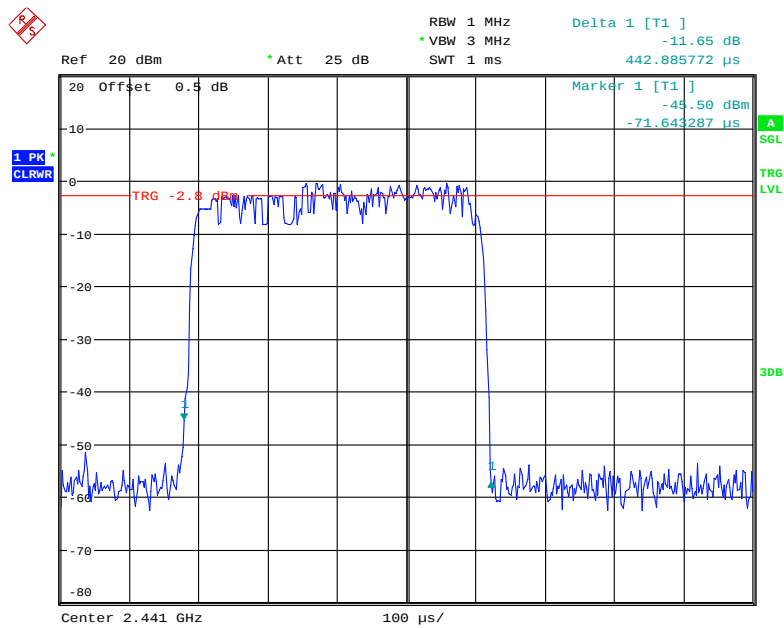


Date: 26.NOV.2018 22:29:46


2DH1: High Channel

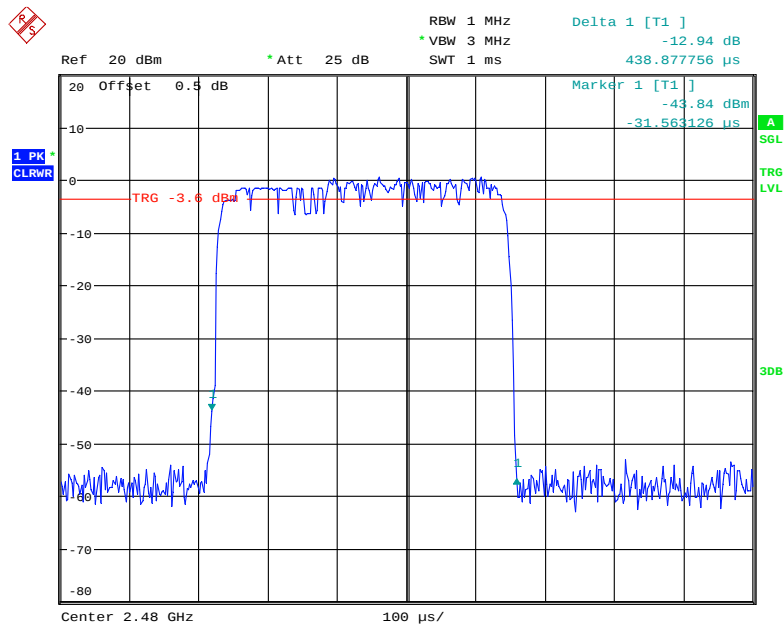


Date: 26.NOV.2018 22:29:50

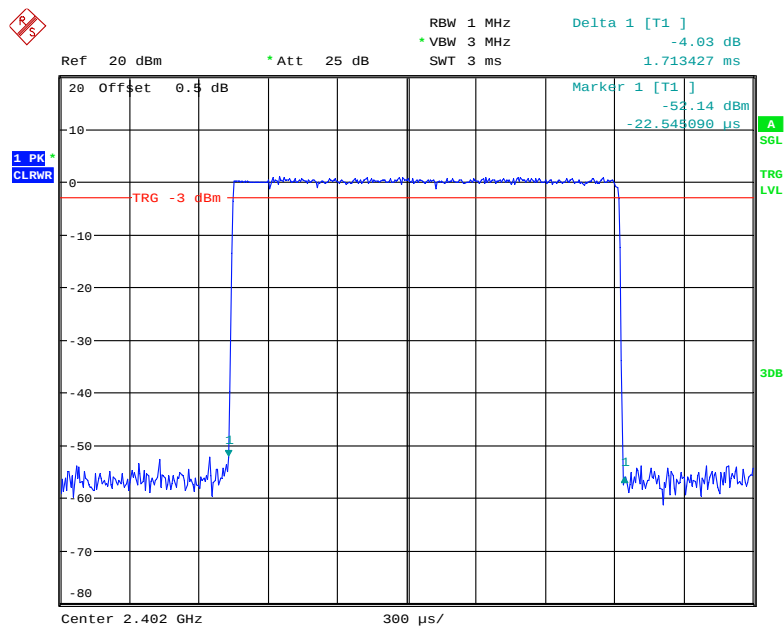2DH3: Low Channel


Date: 26.NOV.2018 22:30:57

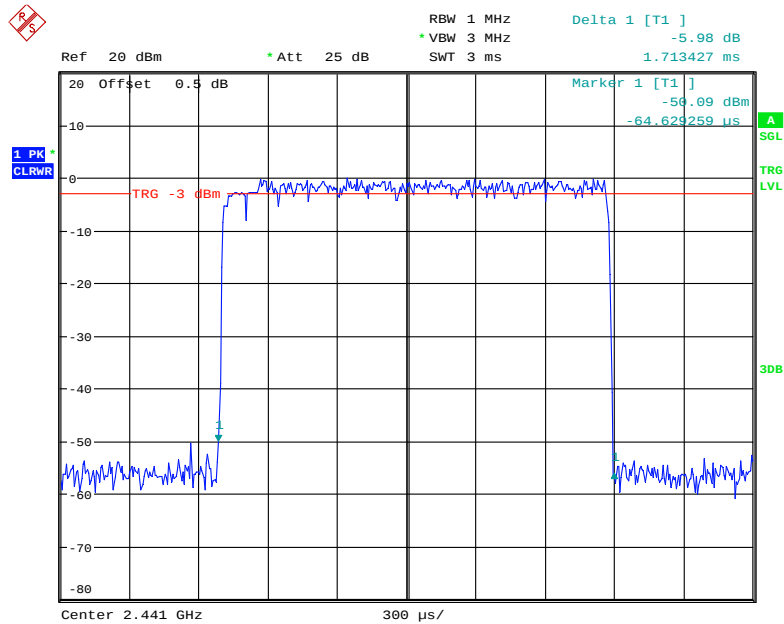2DH3: Middle Channel

Date: 26.NOV.2018 22:31:01

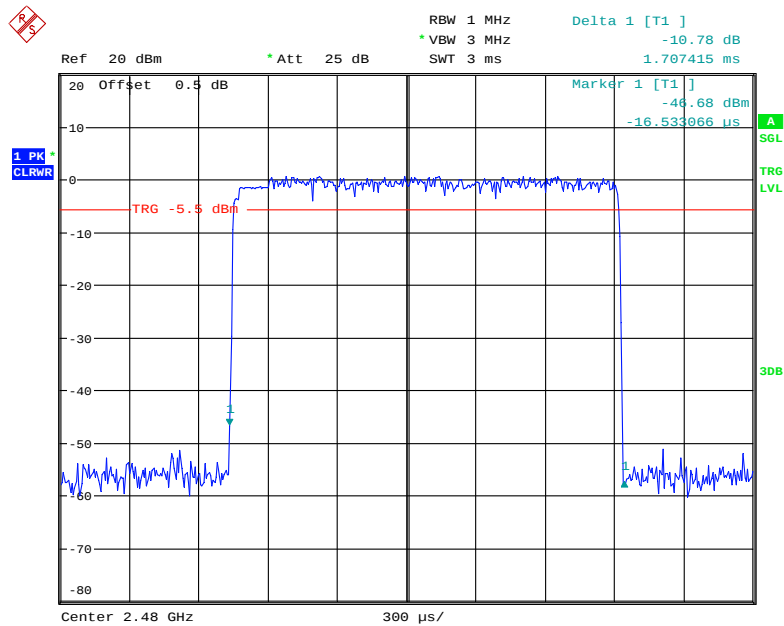
2DH3: High Channel

Date: 26.NOV.2018 22:31:05

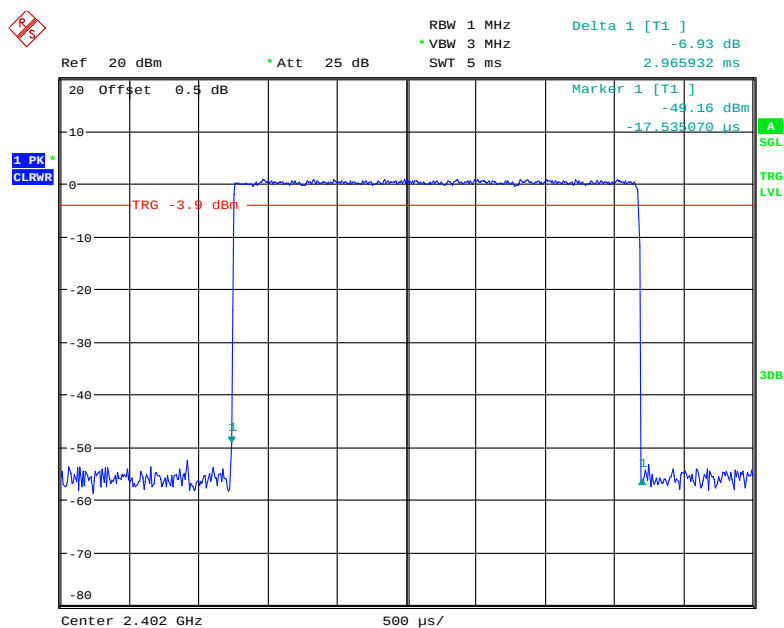2DH5: Low Channel


Date: 26.NOV.2018 22:31:44

2DH5: Middle Channel

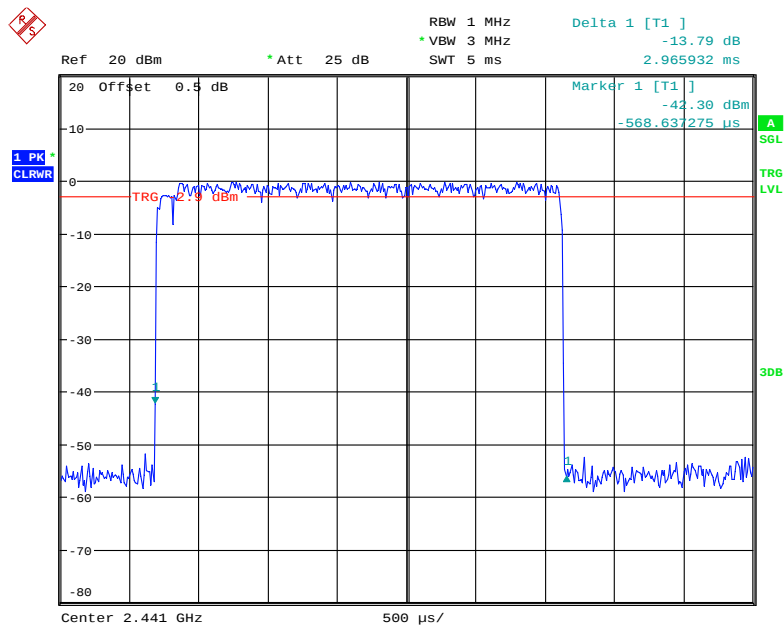

Date: 26.NOV.2018 22:31:49


2DH5: High Channel

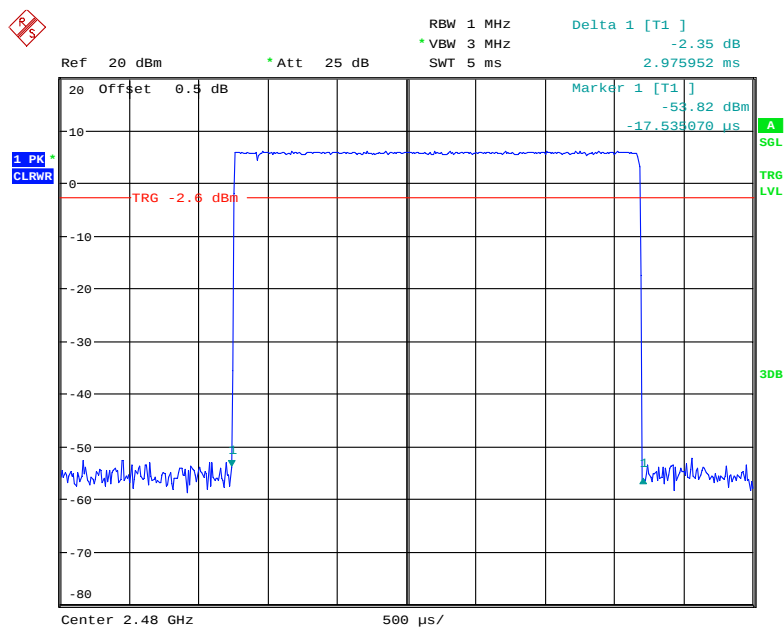


Date: 26.NOV.2018 22:31:53

EDR Mode (8DPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.441	0.141	0.4	Compliance
	Middle	0.441	0.141	0.4	Compliance
	High	0.443	0.142	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
3DH3	Low	1.707	0.273	0.4	Compliance
	Middle	1.701	0.272	0.4	Compliance
	High	1.701	0.272	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
3DH5	Low	2.966	0.316	0.4	Compliance
	Middle	2.966	0.316	0.4	Compliance
	High	2.976	0.317	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

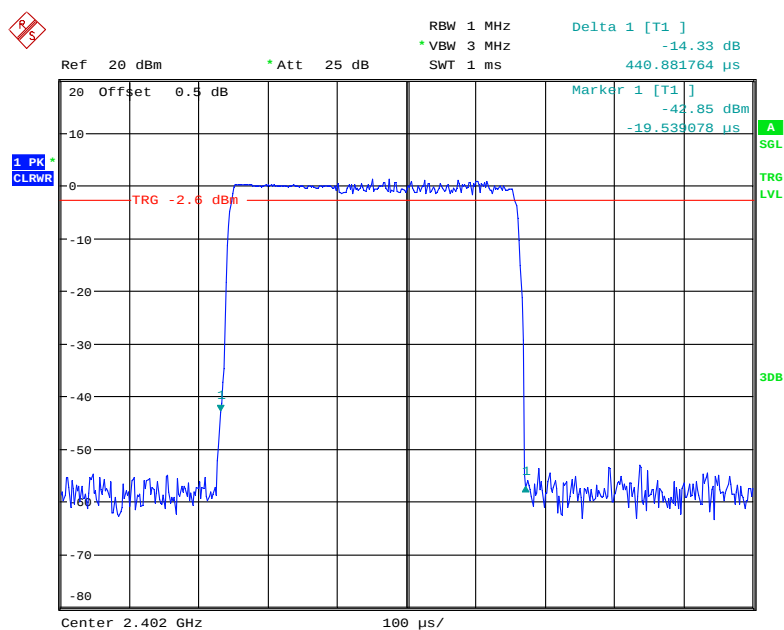3DH1: Low Channel

Date: 26.NOV.2018 22:32:57

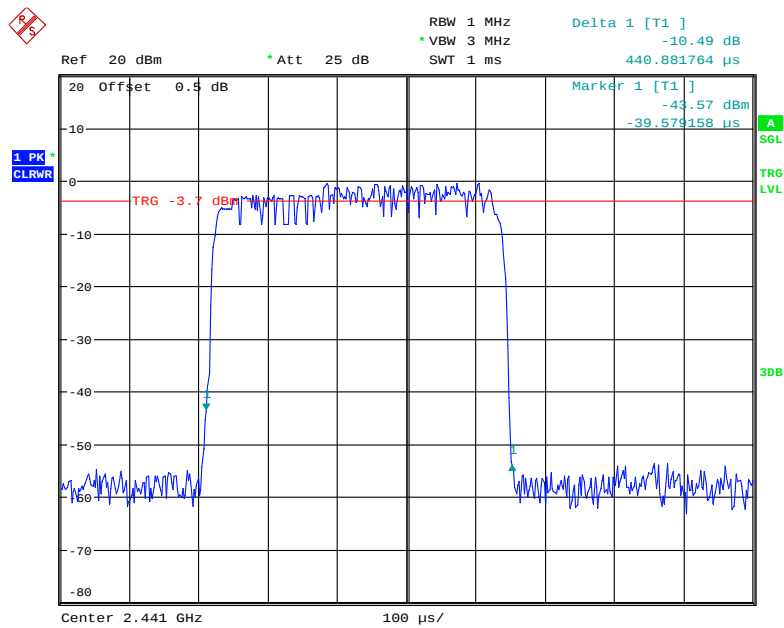
3DH1: Middle Channel

Date: 26.NOV.2018 22:33:01

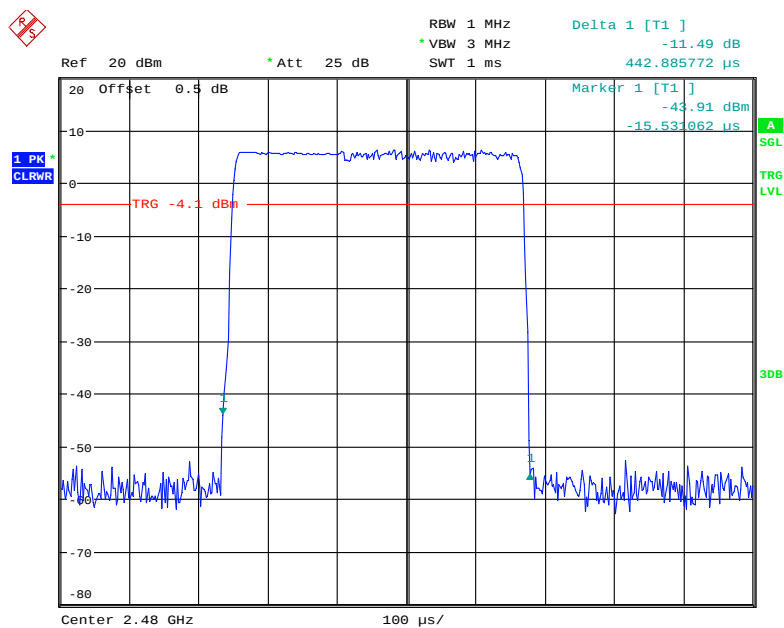3DH1: High Channel


Date: 26.NOV.2018 22:33:05

3DH3: Low Channel

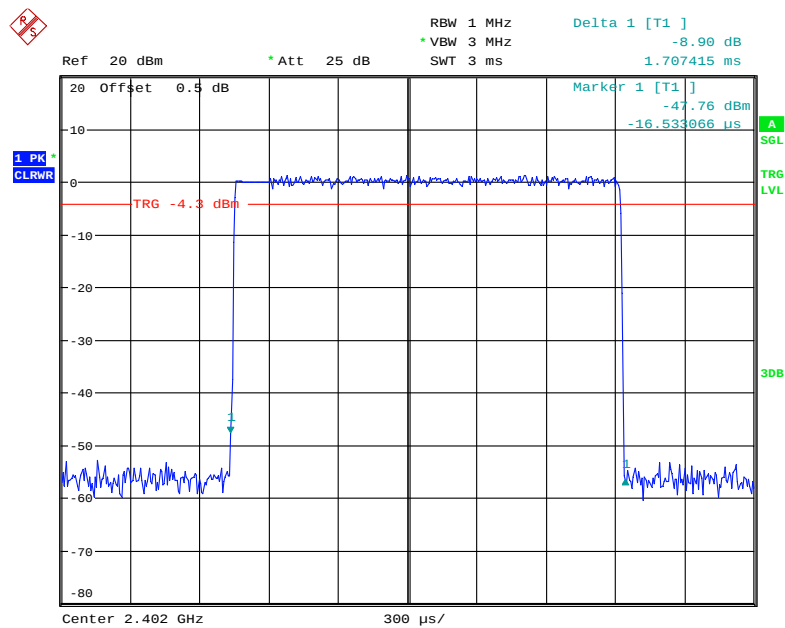


Date: 26.NOV.2018 22:33:43


3DH3: Middle Channel

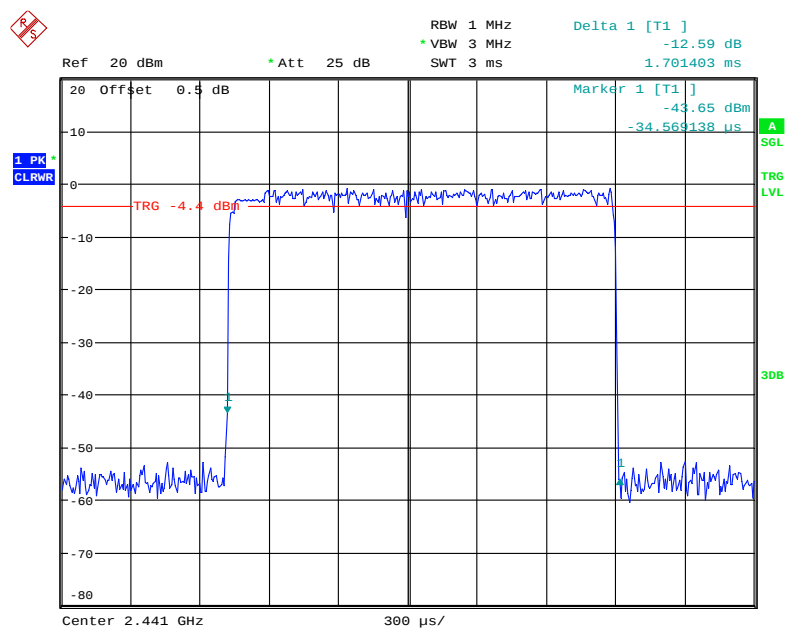

Date: 26.NOV.2018 22:33:47

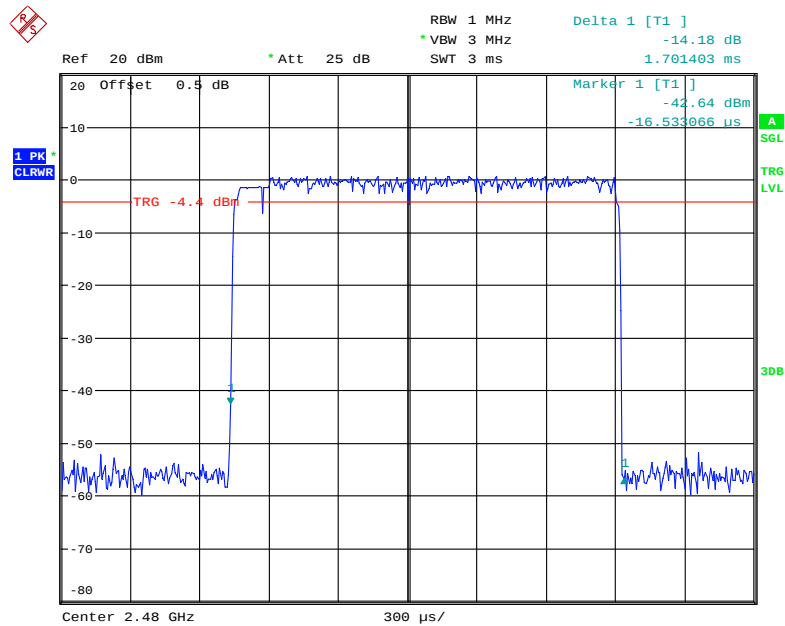
3DH3: High Channel

Date: 26.NOV.2018 22:33:52

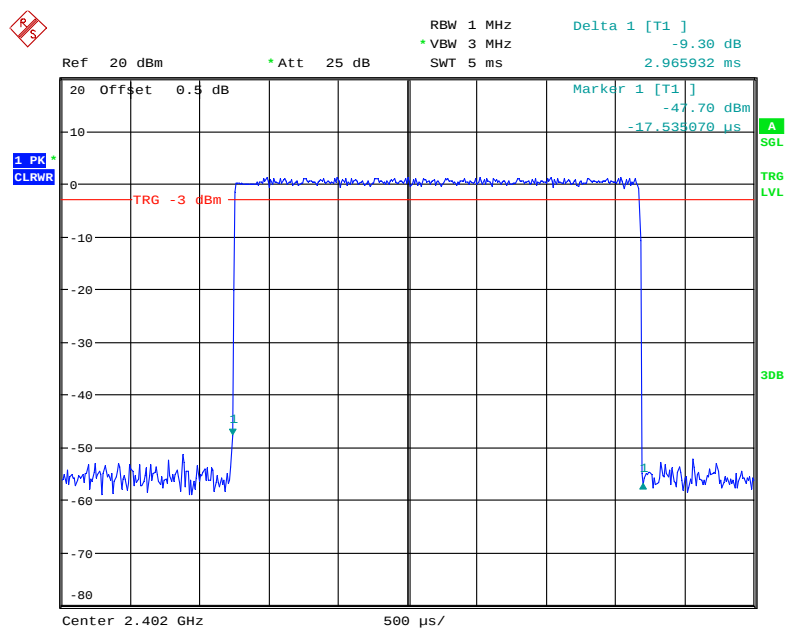3DH5: Low Channel


Date: 26.NOV.2018 22:34:32

3DH5: Middle Channel

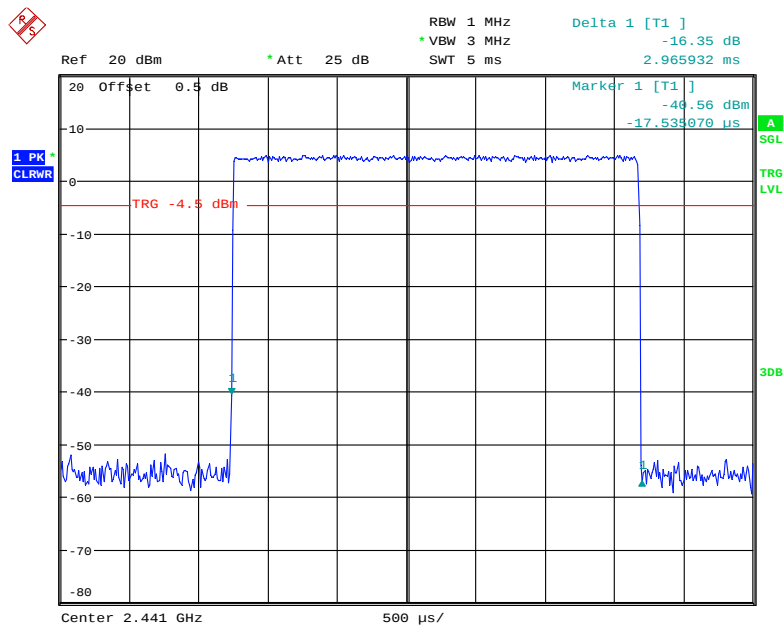

Date: 26.NOV.2018 22:34:36

3DH5: High Channel

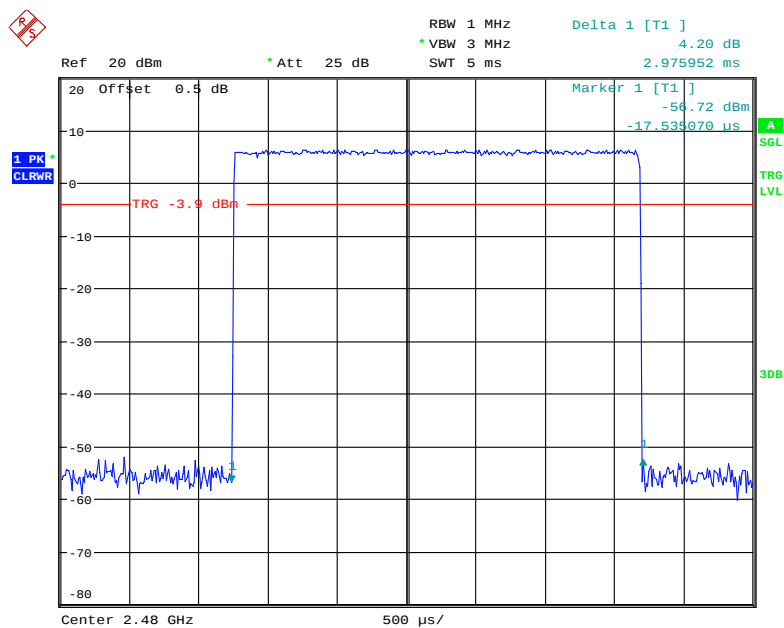

Date: 26.NOV.2018 22:34:40

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa

* The testing was performed by Blake Yang on 2018-11-26.

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	3.08	21
	2441	5.66	21
	2480	6.92	21
EDR Mode ($\pi/4$ -DQPSK)	2402	0.18	21
	2441	4.12	21
	2480	5.60	21
EDR Mode (8DPSK)	2402	0.09	21
	2441	4.10	21
	2480	5.56	21

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.5 °C
Relative Humidity:	51 %
ATM Pressure:	99.9 kPa


* The testing was performed by Blake Yang on 2018-11-26 & 2018-11-29.

Test Result: Compliance


Single mode:

BDR Mode (GFSK):


Band Edge, Left Side

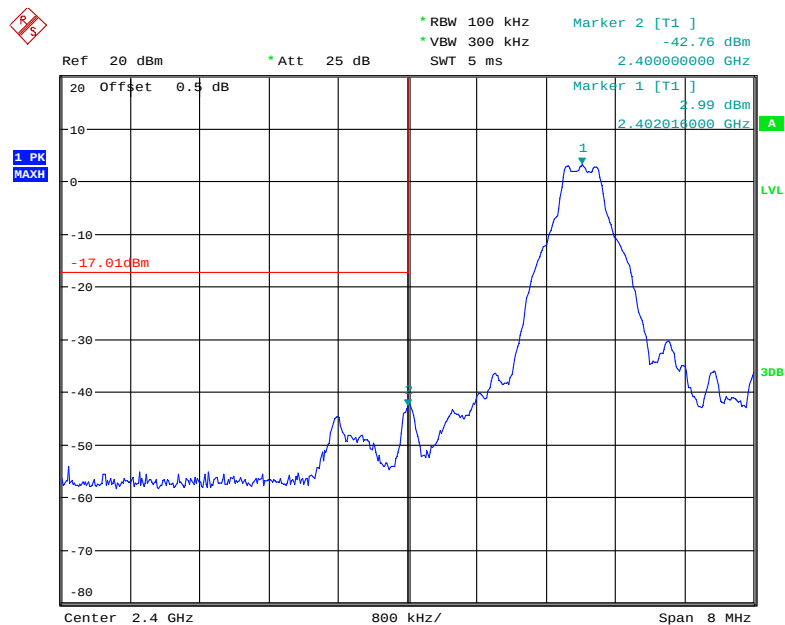


Date: 26.NOV.2018 22:12:28

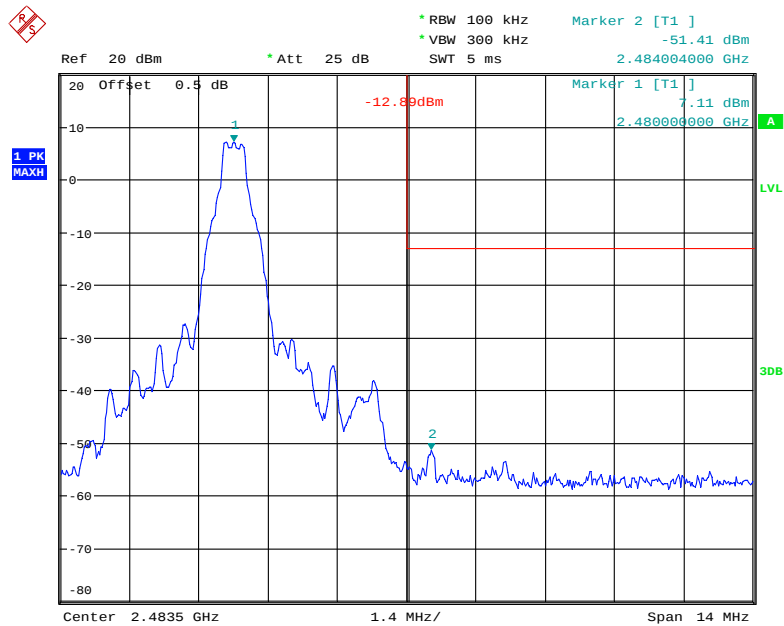Band Edge, Right Side


Date: 26.NOV.2018 22:11:08

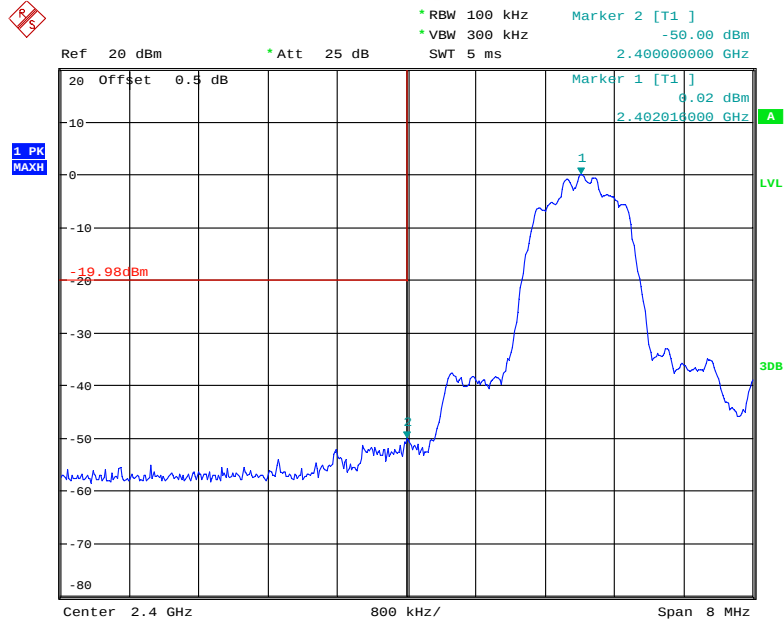*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side**


Date: 26.NOV.2018 22:16:53

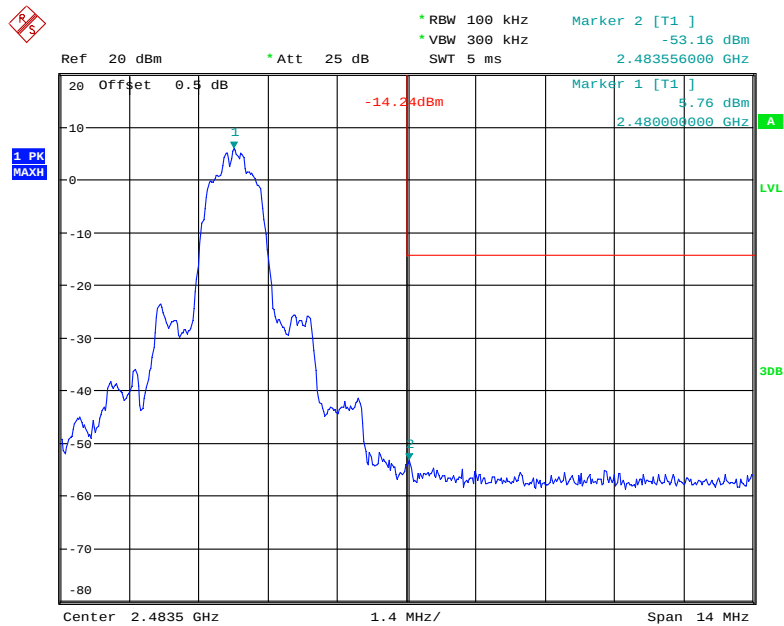Band Edge, Right Side

Date: 26.NOV.2018 22:18:09

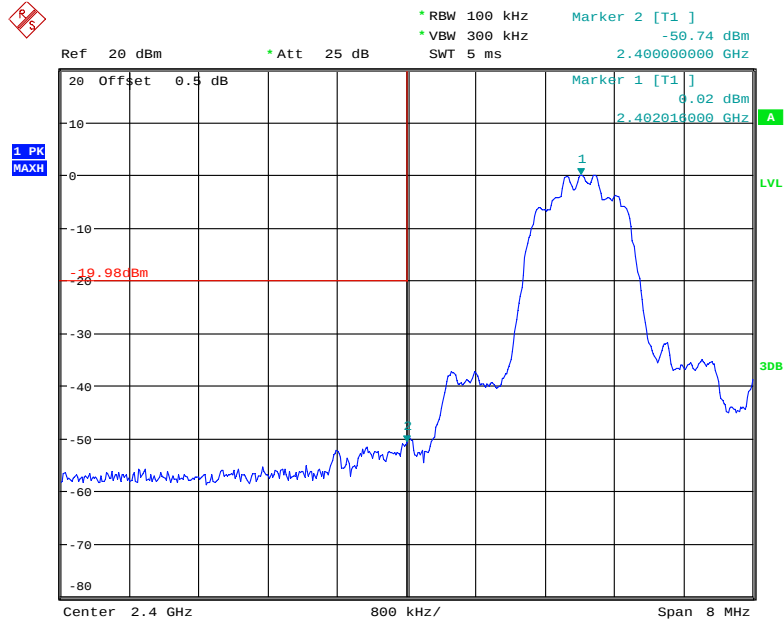
*EDR Mode (8DPSK):***Band Edge, Left Side**

Date: 26.NOV.2018 22:22:19

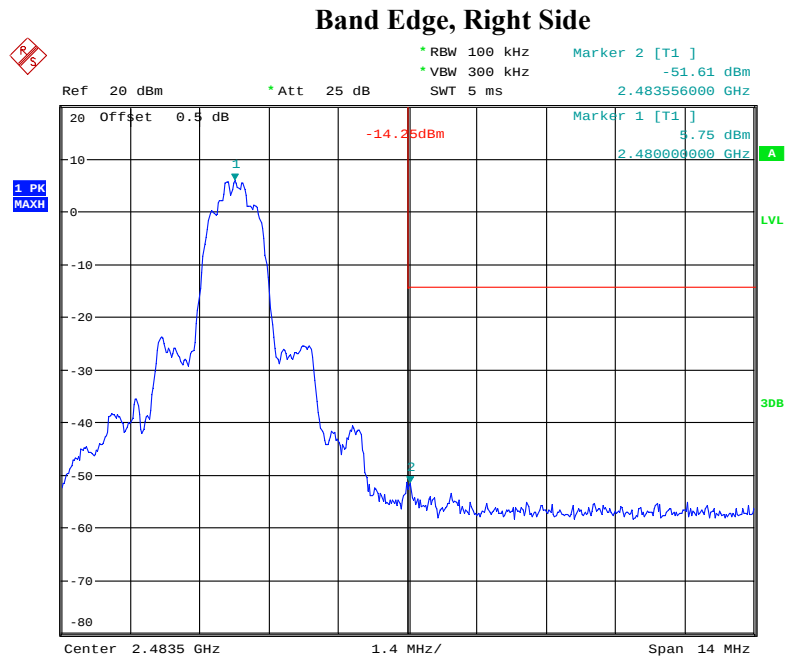


Date: 26.NOV.2018 22:20:12


Hopping mode:
BDR Mode (GFSK):

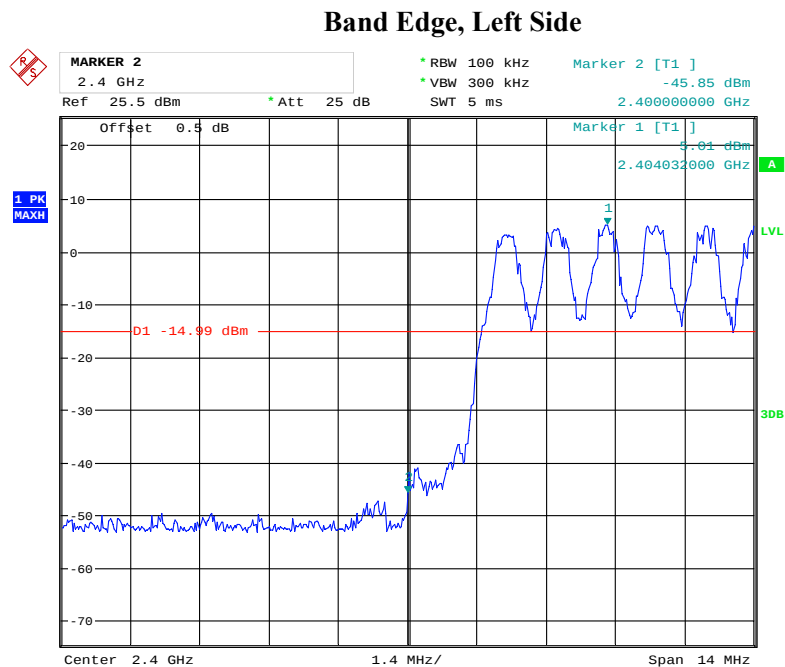


Date: 29.NOV.2018 01:16:25

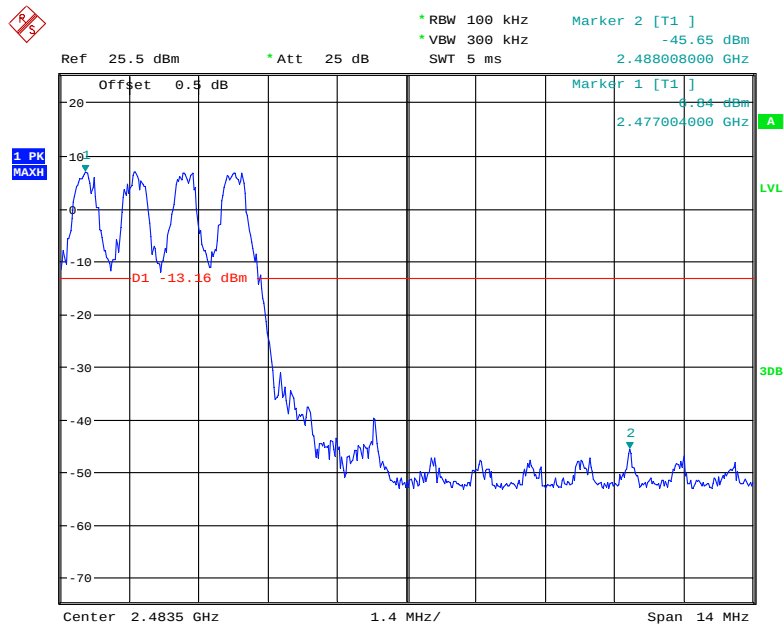Band Edge, Right Side


Date: 29.NOV.2018 01:18:11

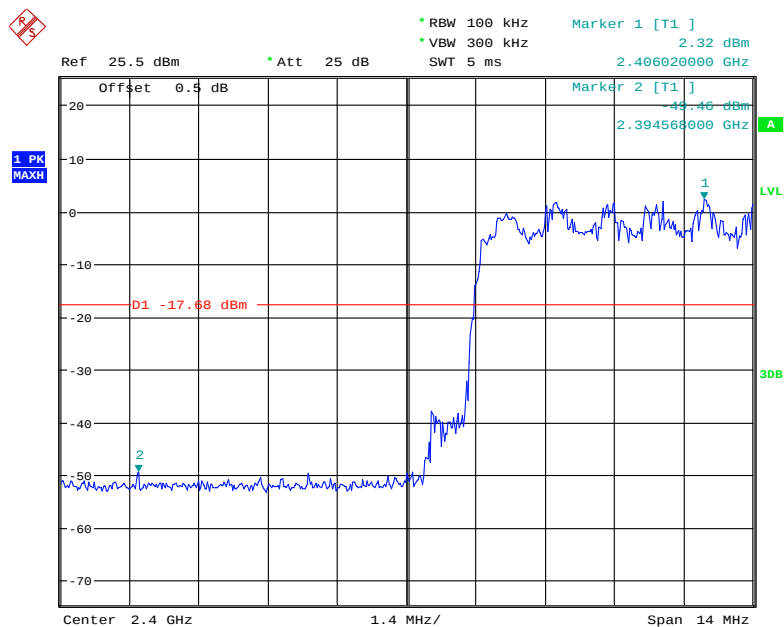*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side**


Date: 29.NOV.2018 01:22:25

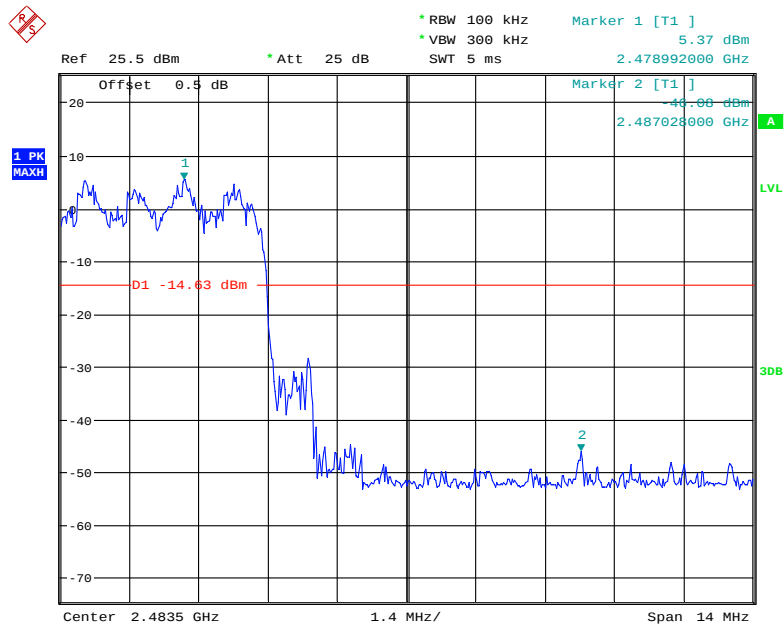Band Edge, Right Side

Date: 29.NOV.2018 01:20:48

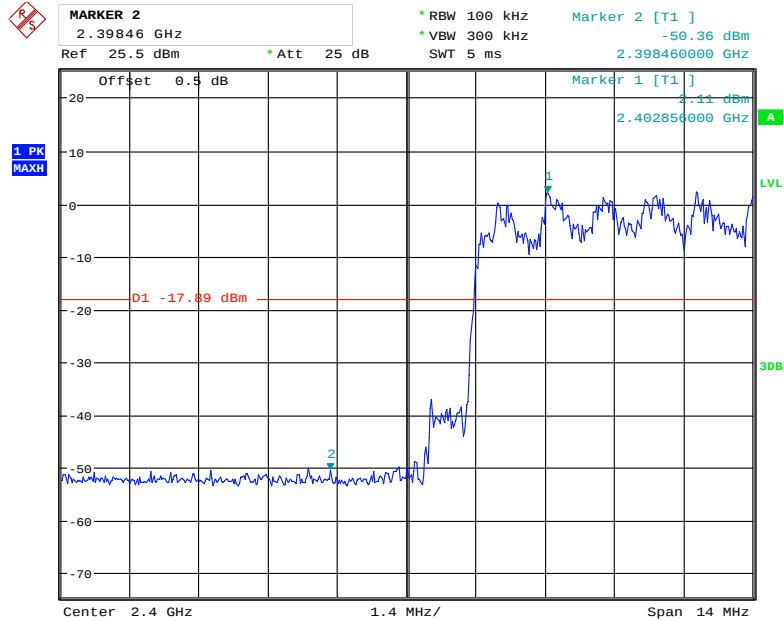*EDR Mode (8DPSK):***Band Edge, Left Side**

Date: 29.NOV.2018 01:24:02

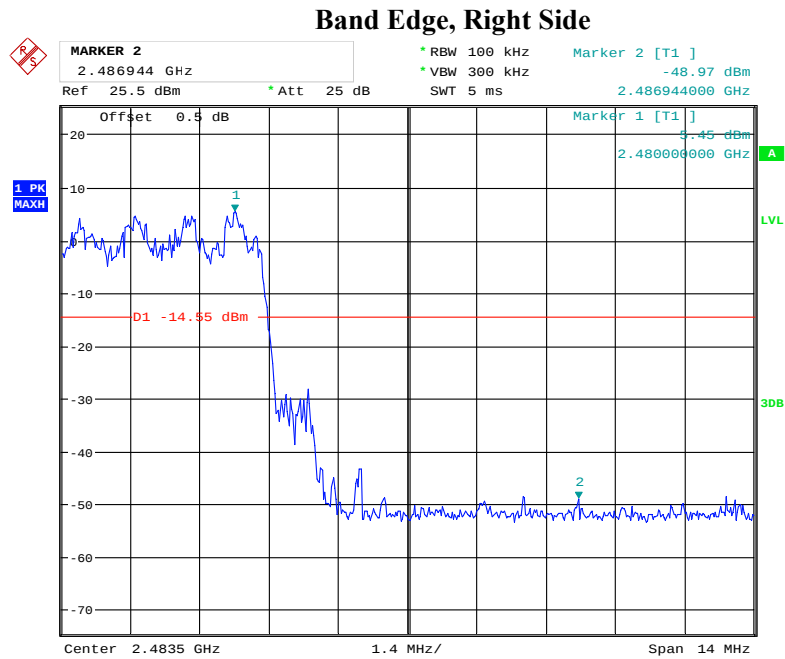

Date: 29.NOV.2018 01:25:37

***** END OF REPORT *****