

Plot 1#: 2.4G FHSS_Handheld Front with antenna unfold_Mid**DUT: Video baby monitor; Type: VM65 CONNECTPU; Serial: SZ1210218-04515E-SA-S2**

Communication System: GFSK; Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2440 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2020/9/30
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (101x51x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.546 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.53 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.575 W/kg

Maximum value of SAR (measured) = 0.612 W/kg

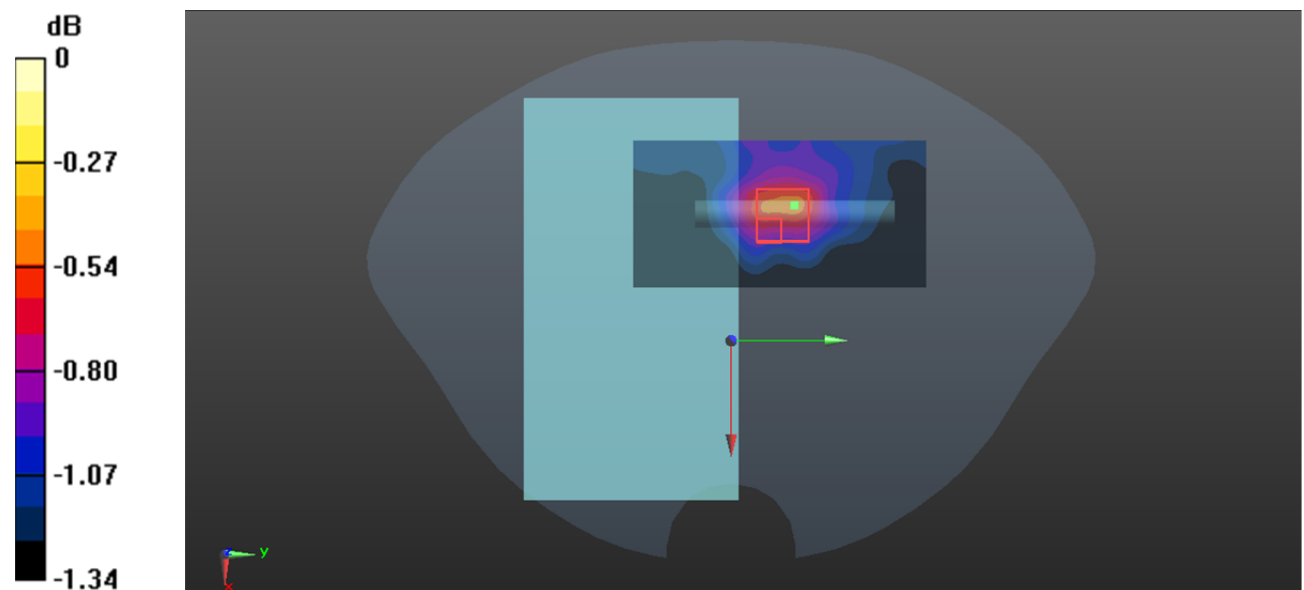

0 dB = 0.612 W/kg = -2.13 dBW/kg

Plot 2#: 2.4G FHSS_Handheld Back with antenna unfold_Low**DUT: Video baby monitor; Type: VM65 CONNECTPU; Serial: SZ1210218-04515E-SA-S2**

Communication System: GFSK; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.725$ S/m; $\epsilon_r = 38.953$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2402 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2020/9/30
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (101x51x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.14 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.60 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.642 W/kg

Maximum value of SAR (measured) = 2.04 W/kg

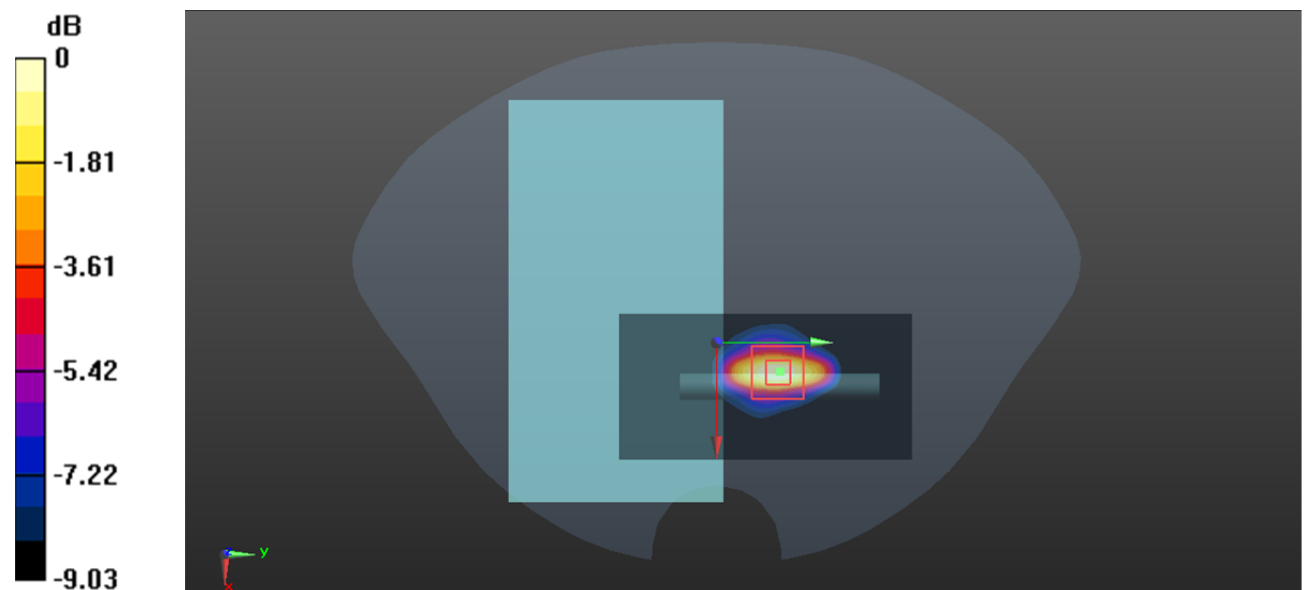

0 dB = 2.04 W/kg = 3.10 dBW/kg

Plot 3#: 2.4G FHSS_Handheld Back with antenna unfold_Mid**DUT: Video baby monitor; Type: VM65 CONNECTPU; Serial: SZ1210218-04515E-SA-S2**

Communication System: GFSK; Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2440 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2020/9/30
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (101x51x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.46 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.977 W/kg; SAR(10 g) = 0.660 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

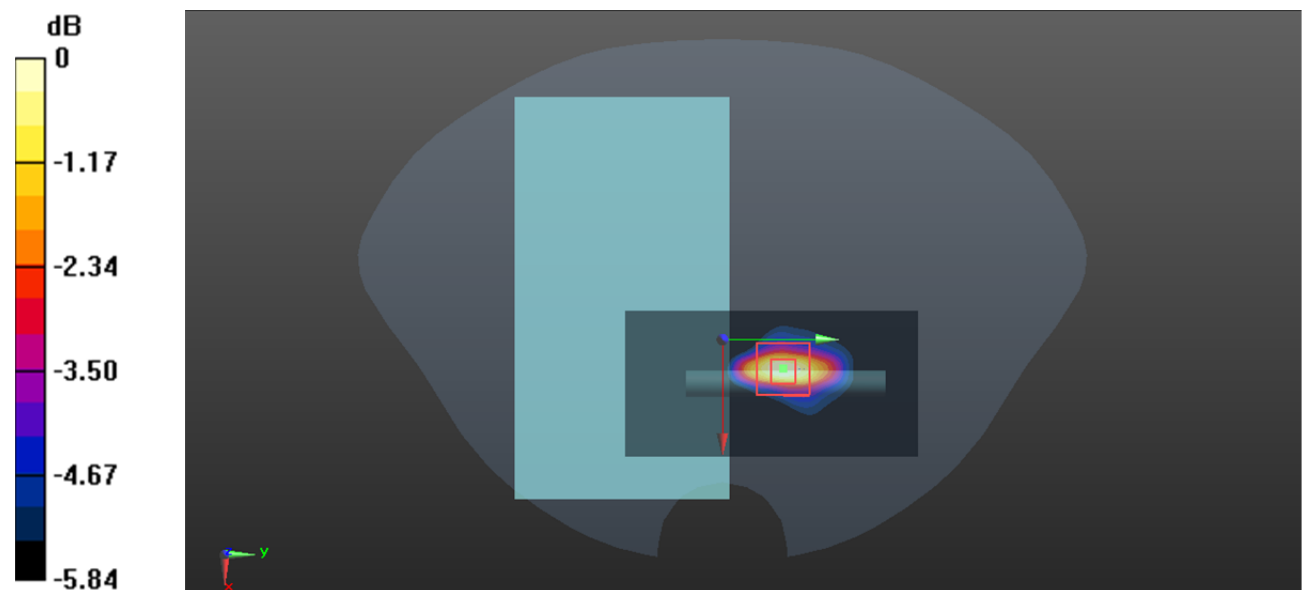

0 dB = 1.48 W/kg = 1.70 dBW/kg

Plot 4#: 2.4G FHSS_Handheld Back with antenna unfold_High**DUT: Video baby monitor; Type: VM65 CONNECTPU; Serial: SZ1210218-04515E-SA-S2**

Communication System: GFSK; Frequency: 2477 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2477$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 38.194$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2477 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2020/9/30
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (101x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.953 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.02 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.396 W/kg

Maximum value of SAR (measured) = 0.921 W/kg

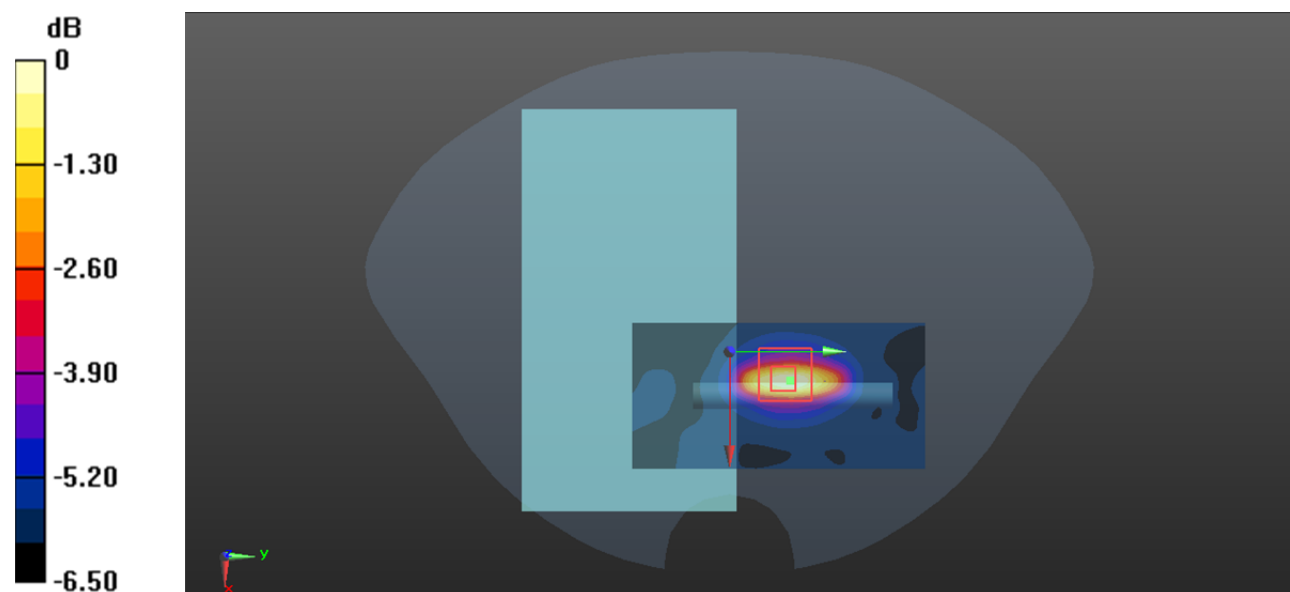

0 dB = 0.921 W/kg = -0.36 dBW/kg

Plot 5#: 2.4G FHSS_Handheld Front with antenna fold_Mid**DUT: Video baby monitor; Type: VM65 CONNECTPU; Serial: SZ1210218-04515E-SA-S2**

Communication System: GFSK; Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2440 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2020/9/30
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (111x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.123 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.971 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

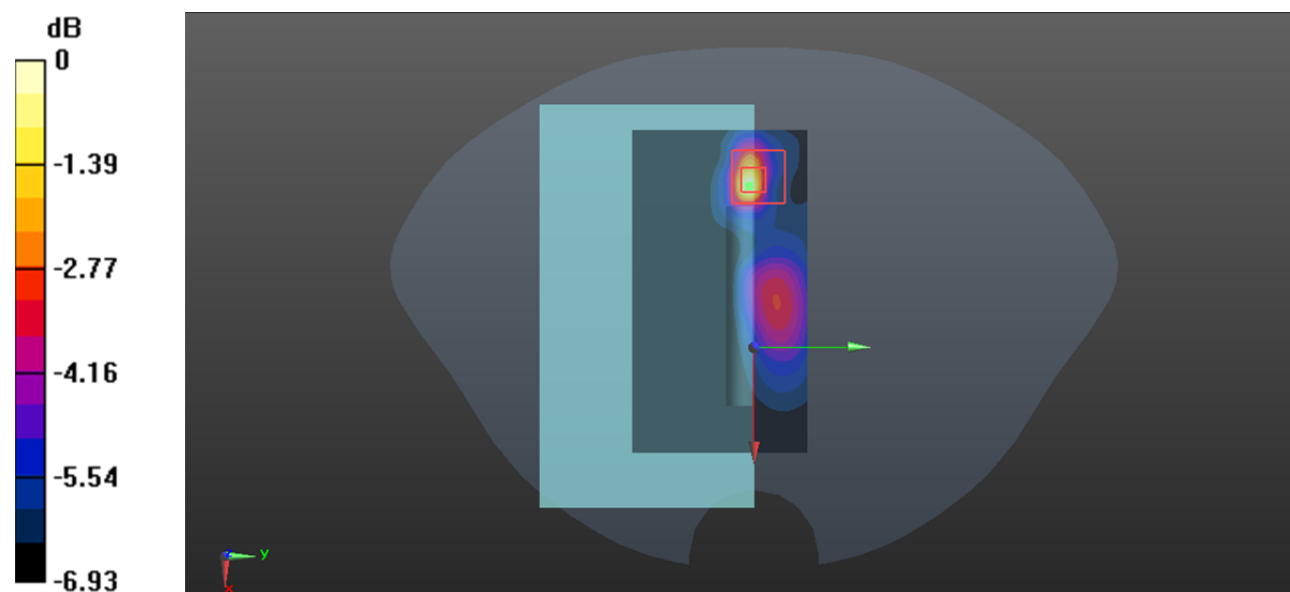

0 dB = 0.122 W/kg = -9.14 dBW/kg

Plot 6#: 2.4G FHSS_Handheld Back with antenna fold_Mid**DUT: Video baby monitor; Type: VM65 CONNECTPU; Serial: SZ1210218-04515E-SA-S2**

Communication System: GFSK; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.725$ S/m; $\epsilon_r = 38.953$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2402 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2020/9/30
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (101x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.81 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.42 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.48 W/kg

SAR(1 g) = 0.950 W/kg; SAR(10 g) = 0.362 W/kg

Maximum value of SAR (measured) = 1.94 W/kg

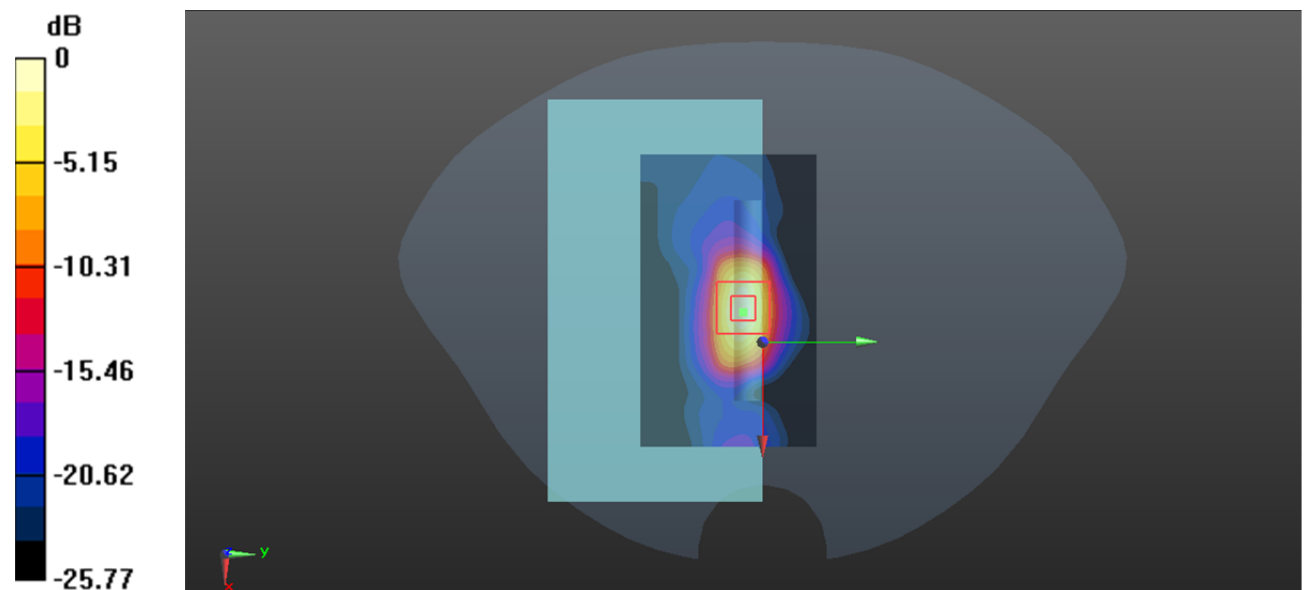

0 dB = 1.94 W/kg = 2.88 dBW/kg

Plot 7#: 2.4G FHSS_Handheld Back with antenna fold_Mid**DUT: Video baby monitor; Type: VM65 CONNECTPU; Serial: SZ1210218-04515E-SA-S2**

Communication System: GFSK; Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2440 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2020/9/30
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (101x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.26 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.69 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.467 W/kg

Maximum value of SAR (measured) = 2.31 W/kg

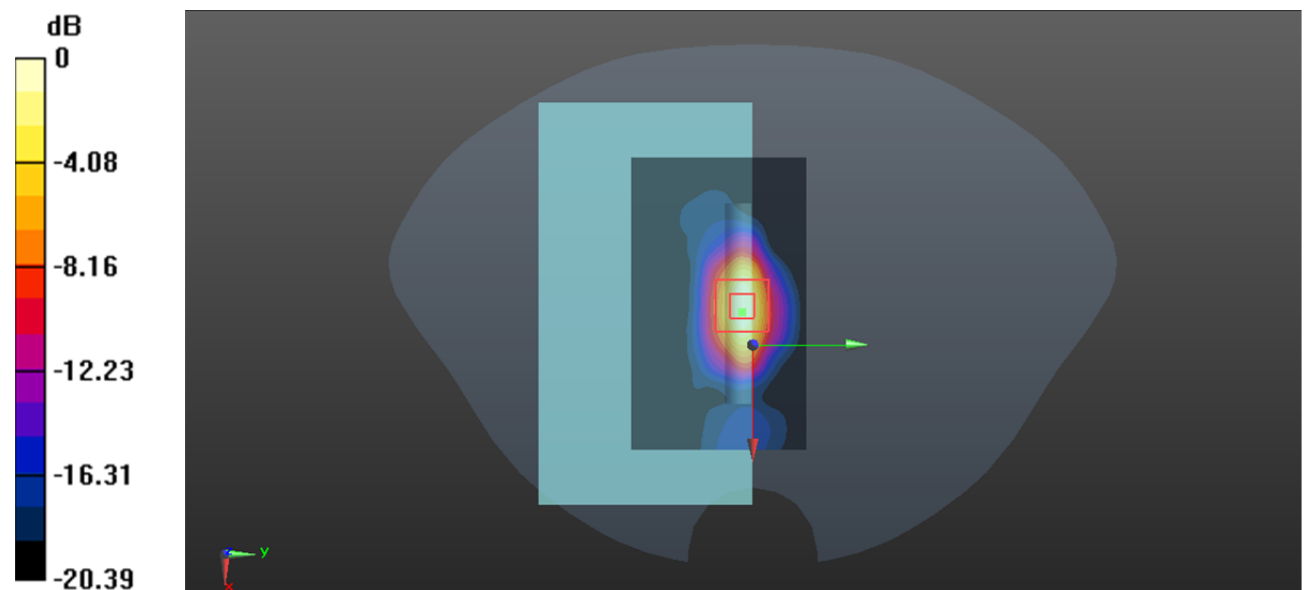

0 dB = 2.31 W/kg = 3.64 dBW/kg

Plot 8#: 2.4G FHSS_Handheld Back with antenna fold_High**DUT: Video baby monitor; Type: VM65 CONNECTPU; Serial: SZ1210218-04515E-SA-S2**

Communication System: GFSK; Frequency: 2477 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2477$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 38.194$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2477 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2020/9/30
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (101x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.92 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.55 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.61 W/kg

SAR(1 g) = 0.999 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 2.04 W/kg

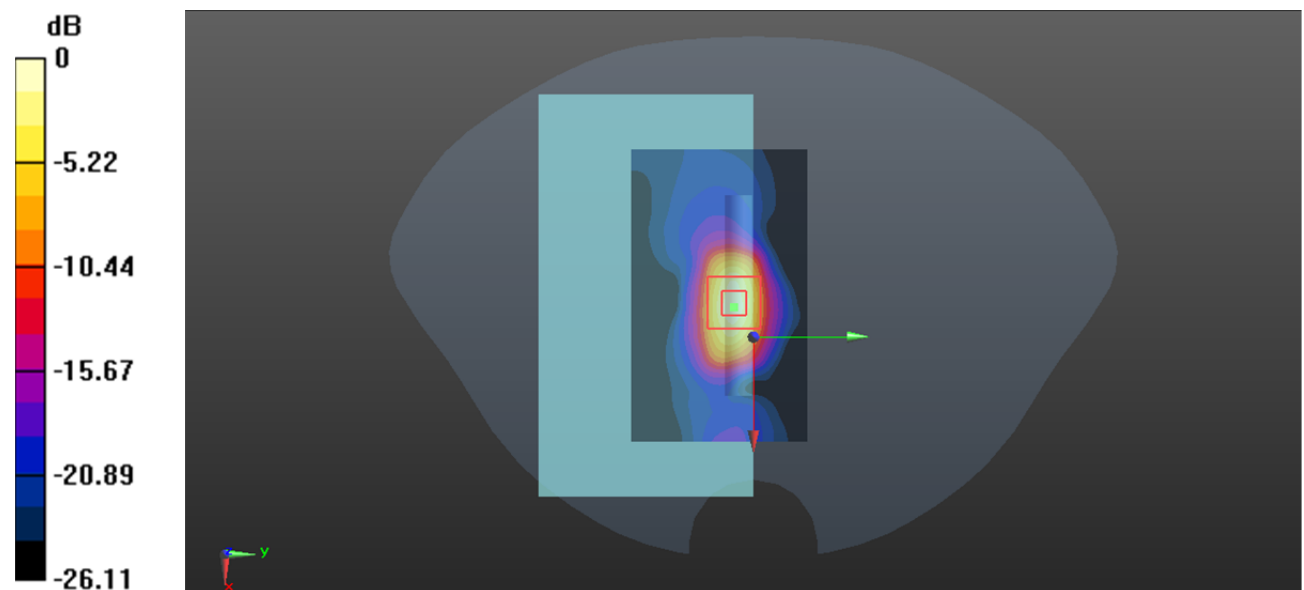

0 dB = 2.04 W/kg = 3.10 dBW/kg

Plot 9#: 2.4G FHSS_Handheld Top with antenna fold_Mid**DUT: Video baby monitor; Type: VM65 CONNECTPU; Serial: SZ1210218-04515E-SA-S2**

Communication System: GFSK; Frequency: 2440 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2440$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 38.557$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2440 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2020/9/30
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (101x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.910 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.63 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.526 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.911 W/kg

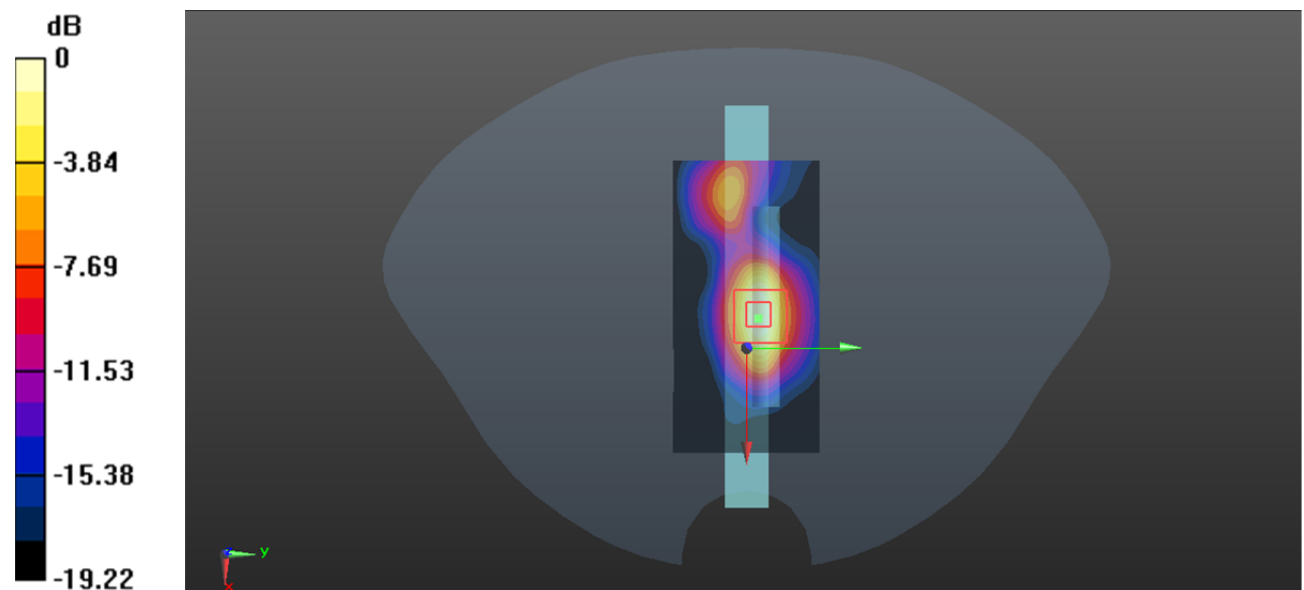

0 dB = 0.911 W/kg = -0.40 dBW/kg