

FCC Part 22H 24E 27 Test Report

FCC ID: 2ARRL-RT-400

Product Name:	Digital still image video Camera
Trademark:	
Model Name:	RT-400 Lookout Dual, Lookout, RT-LTE
Prepared For:	Innovative World Technologies Inc.
Address:	5022 Red Bud Drive, Grovetown, Goergia, 30813 USA
Prepared By:	Shenzhen BCTC Testing Co., Ltd.
Address:	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	May 08, 2019 – Jun. 13, 2019
Date of Report:	Jun. 13, 2019
Report No.:	BCTC-FY190502382E

VERIFICATION OF COMPLIANCE

Applicant's name: Innovative World Technologies Inc.
Address.....: 5022 Red Bud Drive, Grovetown, Goergia, 30813 USA
Manufacture's Name: Ching Tat Development Ltd
Address.....: Unit 1005, 10/F, Prosperous Building, 48-52 Des Voeux Road,
Central, Hongkong

Product description

Product name: Digital still image video Camera
Trademark: N/A
Model Name: RT-400
Lookout Dual, Lookout, RT-LTE
FCC CFR Title 47 Part 2: 2016
FCC CFR Title 47 Part22 Subpart H: 2016
FCC CFR Title 47 Part24 Subpart E: 2016
Test procedure FCC CFR Title 47 Part27 Subpart L: 2016
ANSI/ TIA/ EIA-603-D-2010
FCC KDB 971168 D01 Power Meas. License Digital Systems
v02v02

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result : **Pass**

Prepared by(Engineer): Leke Xie

Reviewer(Supervisor): Eric Yang

Approved(Manager): Zero Zhou

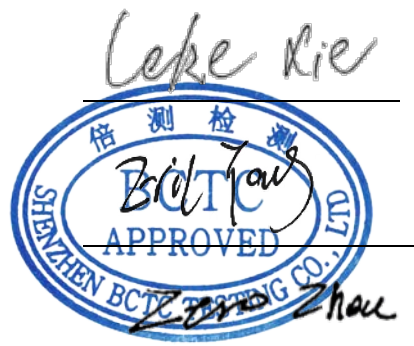


TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	5
2.1. Description of Device (EUT)	5
2.2. Product Function.....	6
2.3. Independent Operation Modes	6
3. TEST SITES	7
3.1. Test Facilities	7
3.2. List of Test and Measurement Instruments	9
4. TEST SET-UP	10
4.1. Principle of Configuration Selection.....	10
4.2. Block Diagram of Test Set-up.....	10
4.3. Test Environment:	10
5. EMISSION TEST RESULTS.....	11
5.1. Conducted RF Output Power.....	11
5.2. Peak-to-average Ratio of Transmitter	13
5.3. -26dB and 99% Occupied Bandwidth.....	20
5.4. Frequency Stability.....	28
5.5. Conducted Spurious Emissions	30
5.6. Conducted Out of Band Emissions.....	40
5.7. Transmitter Radiated Power (EIRP/ERP)	44
5.8. Radiated Out of Band Emissions	48
6. PHOTOGRAPHS OF TEST SET-UP	59
7. PHOTOGRAPHS OF THE EUT	60

1.TEST SUMMARY

Test Items	Test Requirement	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Passed* (Please refer to SAR Report)
Conducted RF Output Power	2.1046	PASS
Peak to Average Ratio	2.1055,22.355 24.235,27.54	PASS
99% & -26 dB Occupied Bandwidth	2.1049, 22.917 24.238,	PASS
Frequency Stability	2.1055, 22.355 24.235,	PASS
Conducted Out of Band Emissions	2.1051,2.1057 22.917, 24.238	PASS
Band Edge	2.1051,2.1057 22.917, 24.238	PASS
Transmitter Radiated Power (EIPR/ERP)	22.913, 24.232	PASS
Radiated Out of Band Emissions	2.1053,2.1057 22.917, 24.238	PASS

2.GENERAL PRODUCT INFORMATION

2.1. Description of Device (EUT)

Product Name:	Digital still image video Camera
Trademark	N/A
Model No.:	RT-400 Lookout Dual, Lookout, RT-LTE
Model Difference	All the model are the same circuit and RF module, except model names .
Operation Frequency:	WCDMA Band II: Tx: 1852.40 - 1907.60MHz; Rx: 1932.60 – 1987.40MHz WCDMA Band IV: Tx: 1712.40 - 1752.60MHz; Rx: 2112.60 – 2452.40MHz WCDMA Band V: Tx: 826.40 - 846.60MHz; Rx: 871.40 – 891.60MHz
Modulation technology:	WCDMA Mode with BPSK Modulation HSDPA Mode with QPSK, 16QAM Modulation HSUPA Mode with QPSK, 16QAM Modulation
Antenna Type:	External Antenna
Antenna gain:	WCDMA BAND II 3.2 dBi WCDMA BAND IV 3.15dBi WCDMA BAND V 3.2dBi
Power supply:	DC 12V from battery

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.2. Product Function

Refer to Technical Construction Form and User Manual.

2.3. Independent Operation Modes

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
WCDMA Band II	■ RMC 12.2Kbps link	■ RMC 12.2Kbps link
WCDMA Band IV	■ RMC 12.2Kbps link	■ RMC 12.2Kbps link
WCDMA Band V	■ RMC 12.2Kbps link	■ RMC 12.2Kbps link

Note: The maximum power levels are GSM mode for GMSK link, EGPRS multi-slot class 8 mode for 8PSK link, RMC12.2Kbps mode for WCDMA Band II and V. only these modes were used for all tests.

The conducted average power tables are as follows:

Average Conducted Power									
Band	WCDMA Band II.			WCDMA Band IV.			WCDMA Band V.		
Frequency	1852.4	1880.0	1907.6	1712.4	1732.4	1752.6	826.4	836.6	846.6
RMC 12.2Kbps	22.30	22.43	22.63	21.61	21.96	21.78	22.30	22.55	22.38

3. TEST SITES

3.1. Test Facilities

Site Description

Name of Firm	: Shenzhen BCTC Testing Co., Ltd.
Site Location	: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Lab Qualifications	: FCC Test Firm Registration Number: 712850 IC Registered No.: 23583

3.1.1. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59°C

3.2. List of Test and Measurement Instruments

3.2.1. For conducted emission at the mains terminals test

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	2018.06.20	2019.06.20
2	LISN	SCHWARZBECK	NSLK8127	8127739	2018.06.19	2019.06.19
3	LISN	R&S	ENV216	101375	2018.06.20	2019.06.20
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2019.02.12	2020.02.12
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

3.2.2. For radiated test

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	2018.06.20	2019.06.20
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	2018.06.20	2019.06.20
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	VULB9163-942	2018.06.23	2019.06.23
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	2018.06.23	2021.06.22
5	Horn Antenna (18GHz-40GHz)	SCHWARZBECK	BBHA9170	822	2018.08.06	2019.08.06
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2018.06.20	2019.06.20
7	Amplifier (0.5GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2018.06.20	2019.06.20
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	2018.08.06	2019.08.06
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	014	2018.06.23	2019.06.23
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2019.02.12	2020.02.12
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	2019.03.27	2020.03.27
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	2018.06.19	2019.06.19
13	Power Metter	Keysight	E4419	\	2018.06.15	2019.06.15
14	Power Sensor (AV)	Keysight	E9 300A	\	2018.06.15	2019.06.15
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	2018.08.14	2019.08.13
16	Test Receiver 9kHz-40GHz	R&S	FSP40	100550	2019.06.13	2020.06.12
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

4. TEST SET-UP

4.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

4.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: RidgeTec Lookout)

4.3. Test Environment:

Ambient conditions in the test laboratory:

Items	Actual
Temperature (°C)	21~23
Humidity (%RH)	50~65

5. EMISSION TEST RESULTS

5.1. Conducted RF Output Power

5.1.1. Limit

According to FCC section 2.1046(a) , FCC part22.913(a) and FCC part 24.232(b) ,for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

5.1.2. Test Setup

The EUT, which is powered by the adapter, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power.

5.1.3. Test Result

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

Measurement data

The conducted power tables are as follows:

Average Conducted Power									
Band	WCDMA Band II.			WCDMA Band IV.			WCDMA Band V.		
Frequency	1852.4	1880.0	1907.6	1712.4	1732.4	1752.6	826.4	836.6	846.6
RMC 12.2Kbps	22.43	22.63	22.48	21.61	21.95	21.78	22.30	22.55	22.38
RMC 64kbps	22.41	22.60	22.44	21.58	21.91	21.75	22.28	22.53	22.36
RMC 144kbps	22.34	22.53	22.40	21.51	21.85	21.70	22.21	22.38	22.31
RMC 384kbps	22.38	22.56	22.42	21.54	21.88	21.73	22.25	22.50	22.33
HSDPA Subtest-1	21.13	21.33	21.20	20.42	20.69	20.55	20.93	21.37	21.33
HSDPA Subtest-2	21.07	21.26	21.14	20.36	20.62	20.50	20.87	21.30	21.28
HSDPA Subtest-3	21.05	21.23	21.10	20.32	20.60	20.48	20.85	21.26	21.25
HSDPA Subtest-4	21.10	21.31	21.17	20.39	20.64	20.52	20.91	21.33	21.30
HSUPA Subtest-1	20.57	20.79	20.64	19.85	20.16	20.02	20.49	20.71	20.77
HSUPA Subtest-2	20.46	20.70	20.55	19.77	20.04	19.90	20.40	20.58	20.68
HSUPA Subtest-3	20.55	20.75	20.62	19.82	20.12	19.96	20.44	20.68	20.75
HSUPA Subtest-4	20.51	20.72	20.59	19.79	20.09	19.93	20.41	20.62	20.71

Note: Measurement Uncertainty: ± 2.6 dB.

5.2. Peak-to-average Ratio of Transmitter

5.2.1. Limit


According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

5.2.2. Test Setup

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

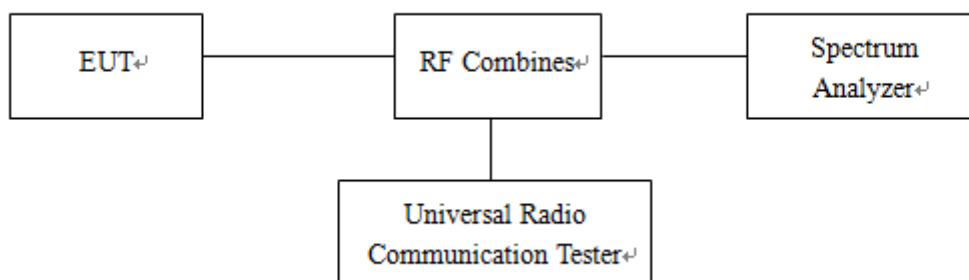

5.2.3. Test Result

For WCDMA Band II

Test Mode	Channel	Frequency (MHz)	PAR(dB)	Limited (dB)
WCDMA	9262	1852.4	2.82	13
	9400	1880.0	3.03	13
	9538	1907.6	2.93	13
HSDPA	9262	1852.4	2.69	13
	9400	1880.0	2.98	13
	9538	1907.6	2.36	13
HSUPA	9262	1852.4	2.68	13
	9400	1880.0	2.55	13
	9538	1907.6	2.16	13

For WCDMA Band IV


Test Mode	Channel	Frequency (MHz)	PAR(dB)	Limited (dB)
WCDMA	1312	1712.4	3.20	13
	1412	1732.4	3.12	13
	1513	1752.6	3.20	13
HSDPA	1312	1712.4	2.22	13
	1412	1732.4	2.58	13
	1513	1752.6	2.72	13
HSUPA	1312	1712.4	2.53	13
	1412	1732.4	2.48	13
	1513	1752.6	2.57	13

For WCDMA Band V


Test Mode	Channel	Frequency (MHz)	PAR(dB)	Limited (dB)
WCDMA	4132	826.4	3.10	13
	4175	836.6	3.08	13
	4233	846.6	3.08	13
HSDPA	4132	826.4	2.68	13
	4175	836.6	2.36	13
	4233	846.6	2.96	13
HSUPA	4132	826.4	2.52	13
	4175	836.6	2.16	13
	4233	846.6	2.33	13



BAND II-L

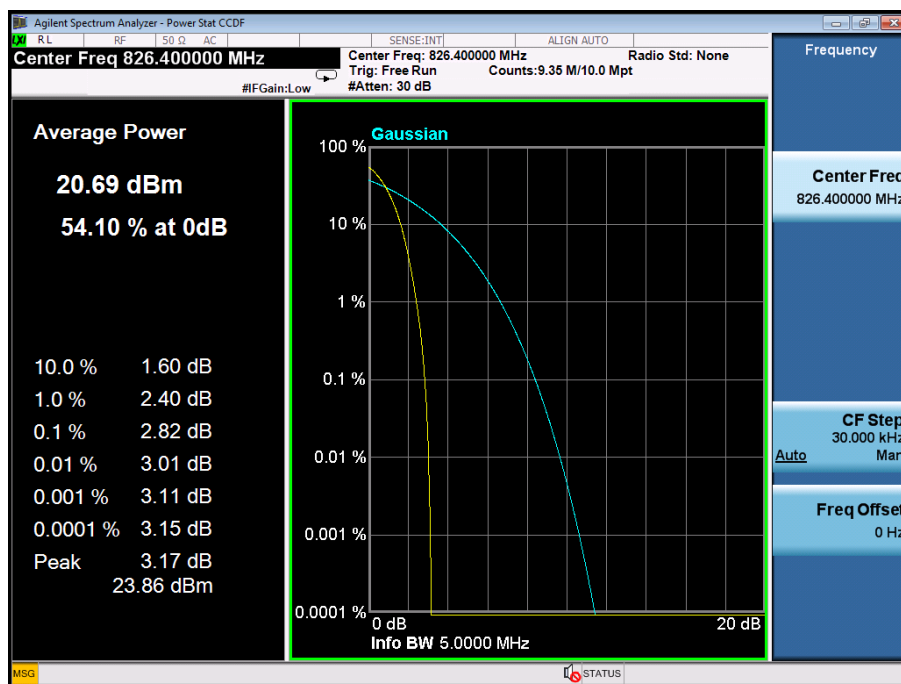


BAND II-M

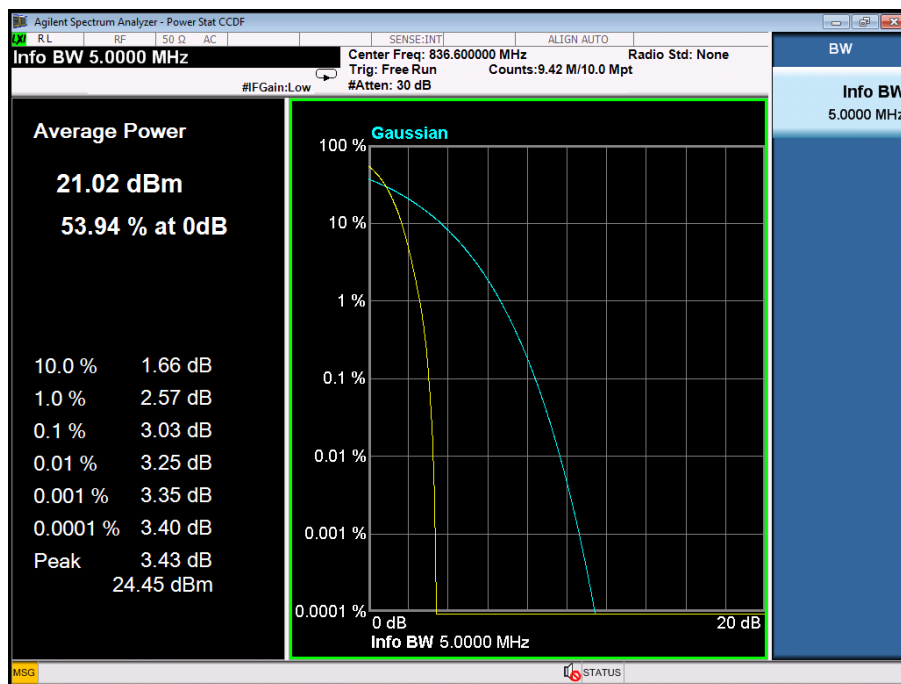




BAND II-H

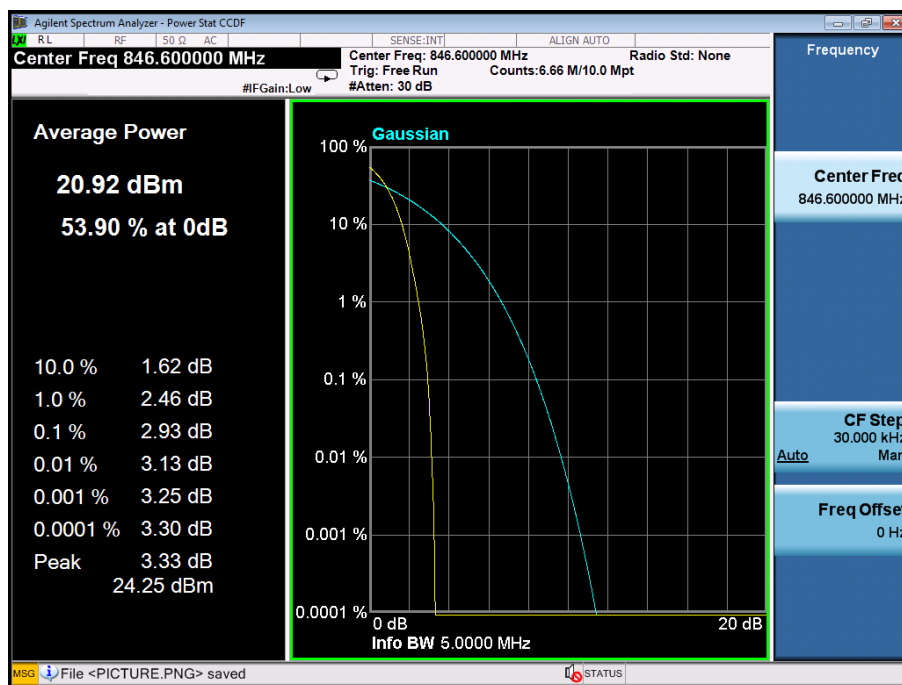


BAND IV-L

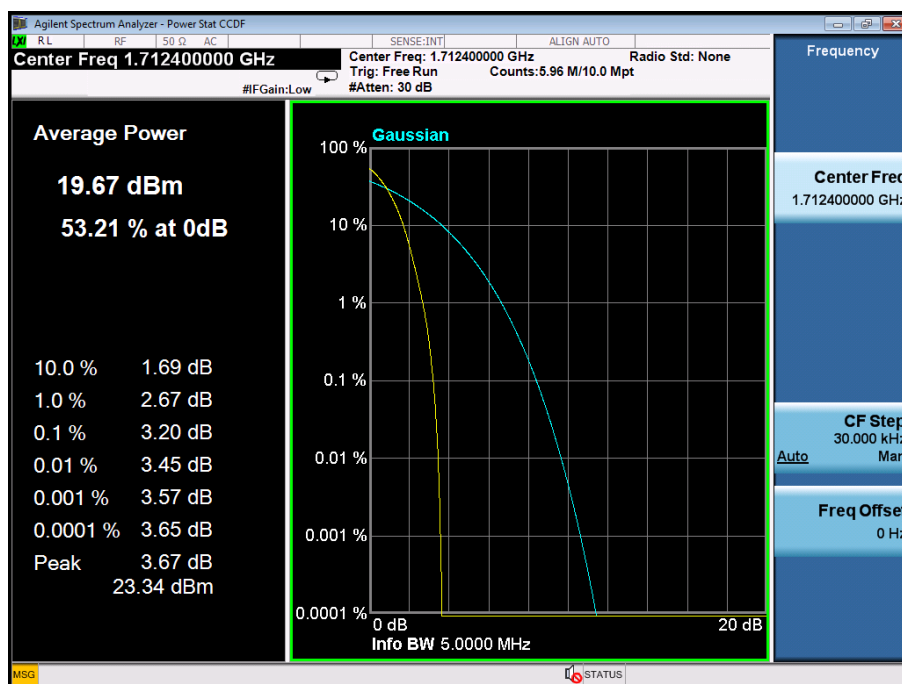




BAND IV-M

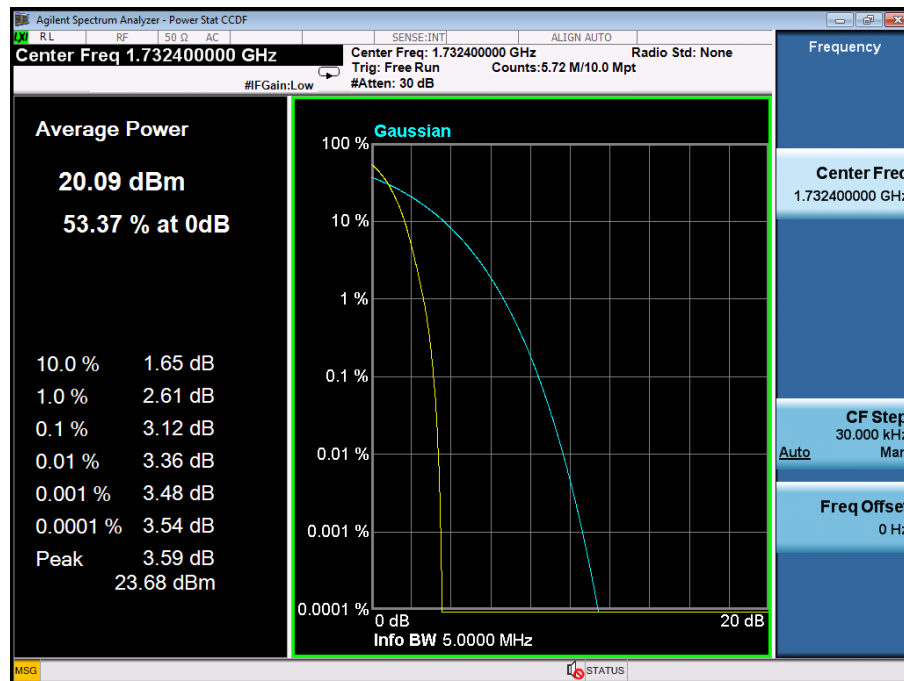


BAND IV-H

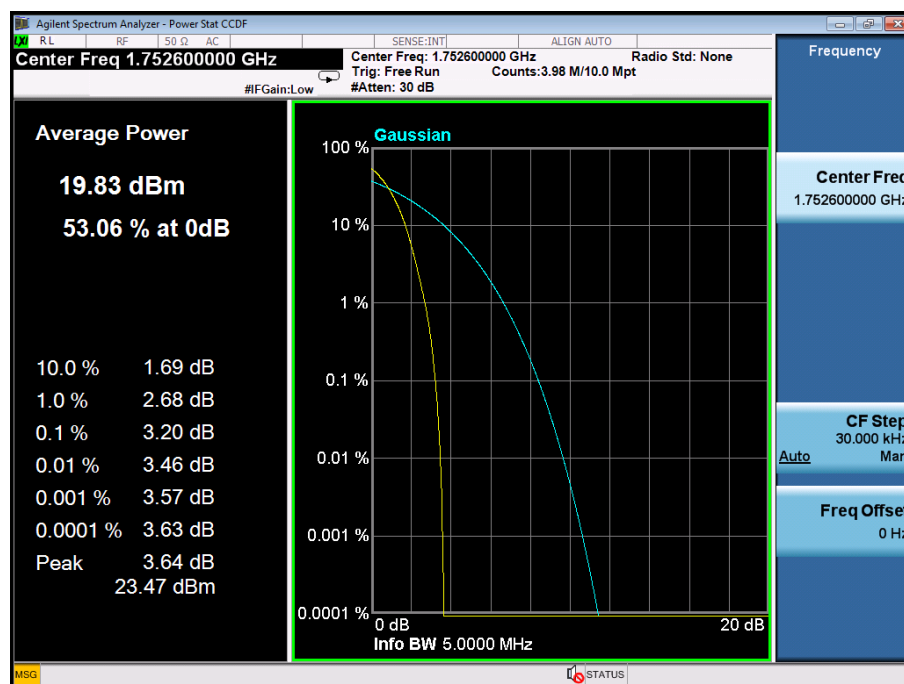




BAND V-L

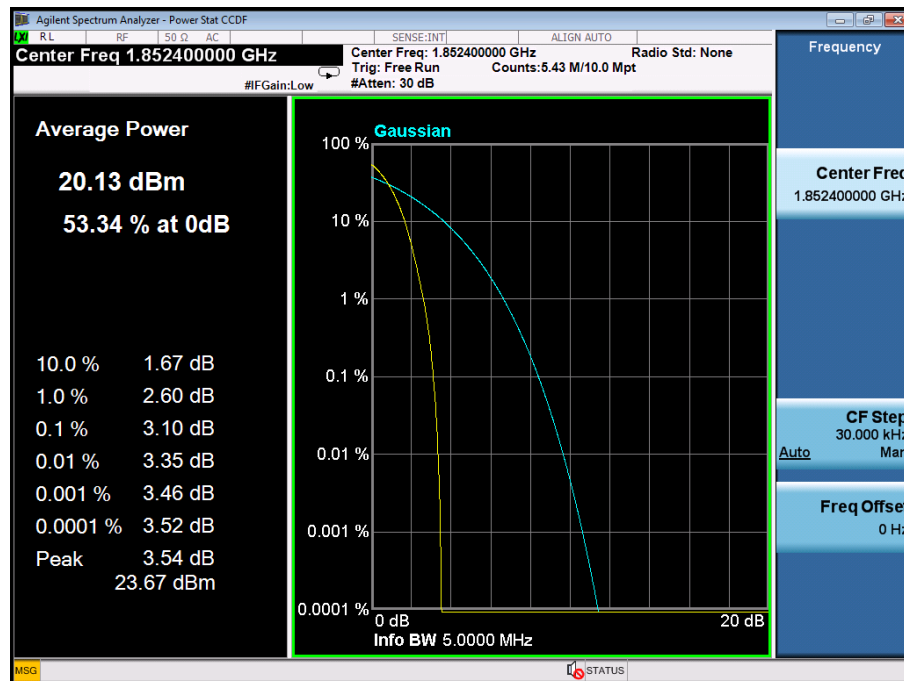


BAND V-M

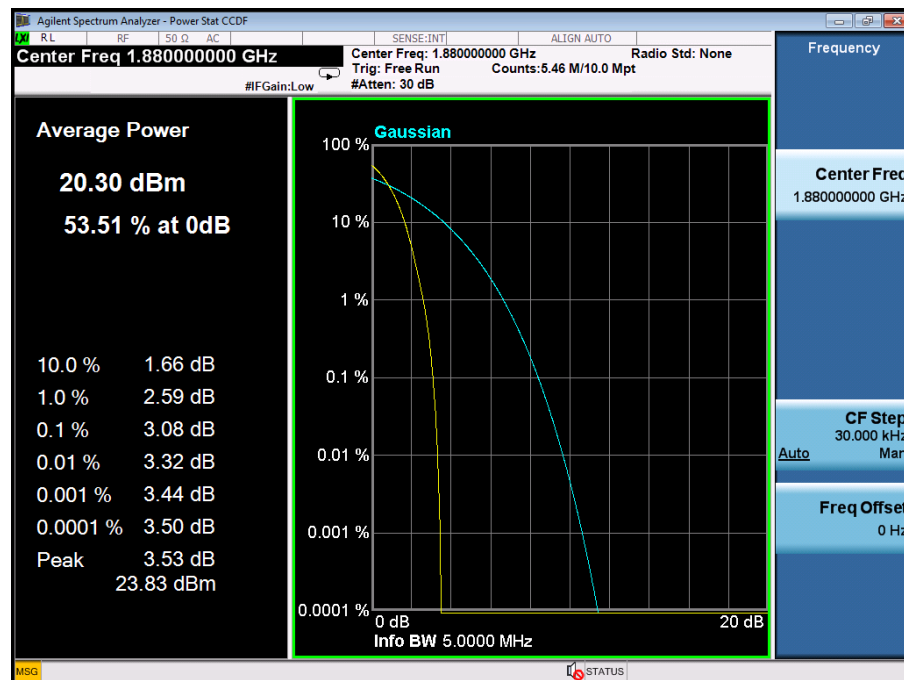



BAND V-H

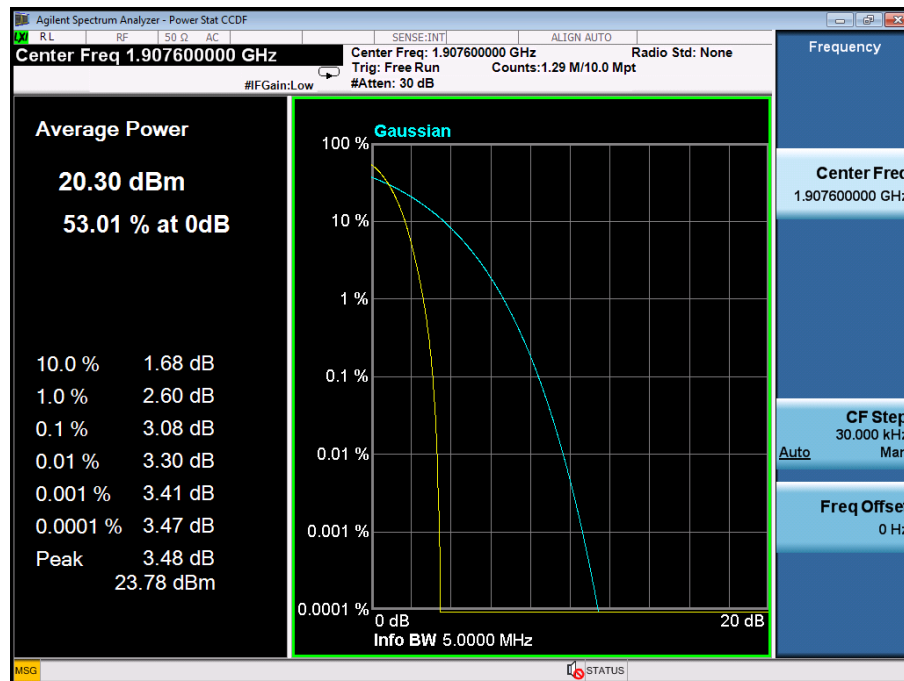

5.3. -26dB and 99% Occupied Bandwidth

5.3.1. Limit

According to FCC section 2.1049 and FCC part22.913(a) and FCC part24.232(b), the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

5.3.2. Test Setup

The EUT, which is powered by the adapter, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power.



5.3.3. Test Result

Measurement Data

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
WCDMA Band V	4132	826.4	4160	4680
	4175	836.6	4129	4694
	4233	846.6	4144	4683
WCDMA Band IV	1312	1712.4	4122	4645
	1412	1732.4	4133	4689
	1513	1752.6	4137	4675
WCDMA Band II	9262	1852.4	4127	4676
	9400	1880.0	4134	4659
	9538	1907.6	4122	4684

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
HSDPA Band V	4132	826.4	4175	4693
	4175	836.6	4143	4709
	4233	846.6	4155	4985
HSDPA Band IV	1312	1712.4	4116	4697
	1412	1732.4	4112	4656
	1513	1752.6	4132	4677
HSDPA Band II	9262	1852.4	4135	4676
	9400	1880.0	4140	4693
	9538	1907.6	4127	4671


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
HSUPA Band V	4132	826.4	4167	4688
	4175	836.6	4144	4674
	4233	846.6	4178	5086
HSUPA Band IV	1312	1712.4	4139	4655
	1412	1732.4	4136	4690
	1513	1752.6	4112	4681
HSUPA Band II	9262	1852.4	4131	4689
	9400	1880.0	4132	4657
	9538	1907.6	4124	4667

Note: Measurement Uncertainty: $\pm 20\text{Hz}$.




Test plot as follows:


WCDMA Band V Lowest channel

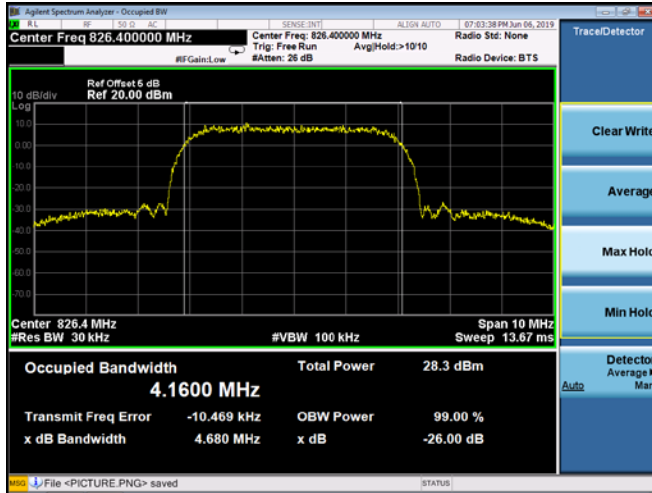


WCDMA Band IV Lowest channel

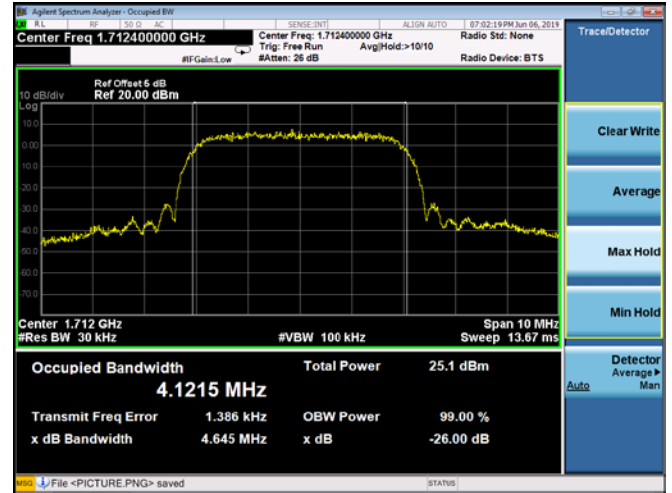


WCDMA Band V Middle channel

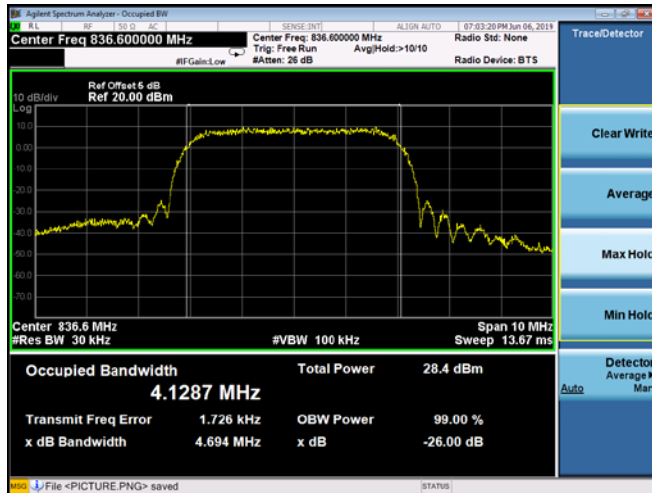


WCDMA Band IV Middle channel

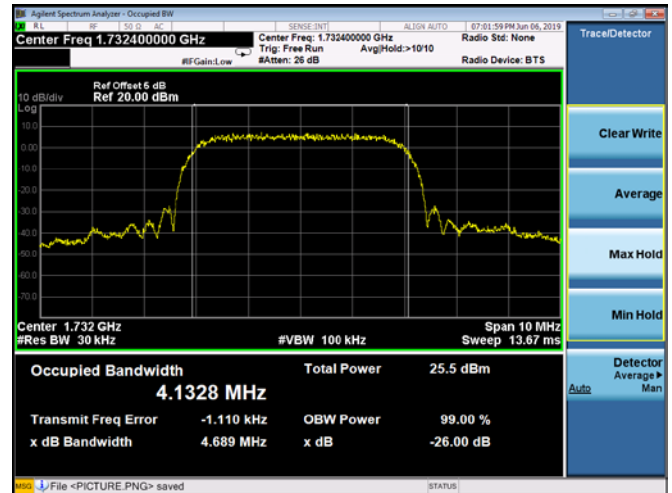

WCDMA Band V Highest channel

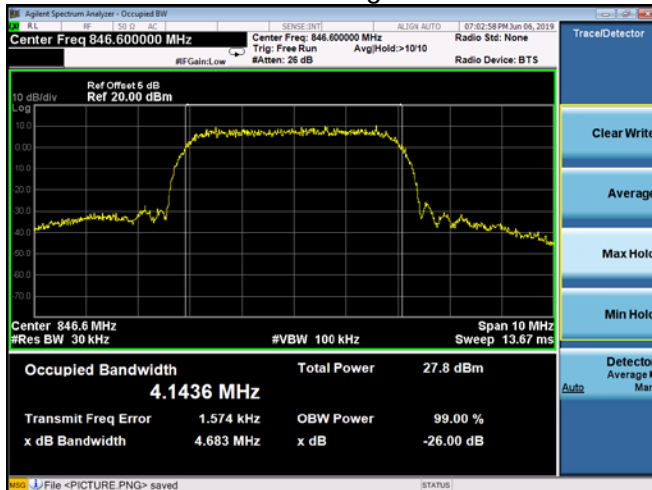


WCDMA Band IV Highest channel

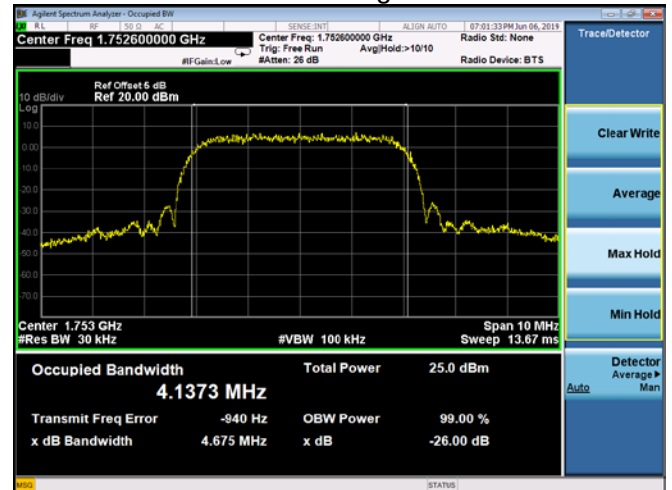





WCDMA Band II Lowest channel

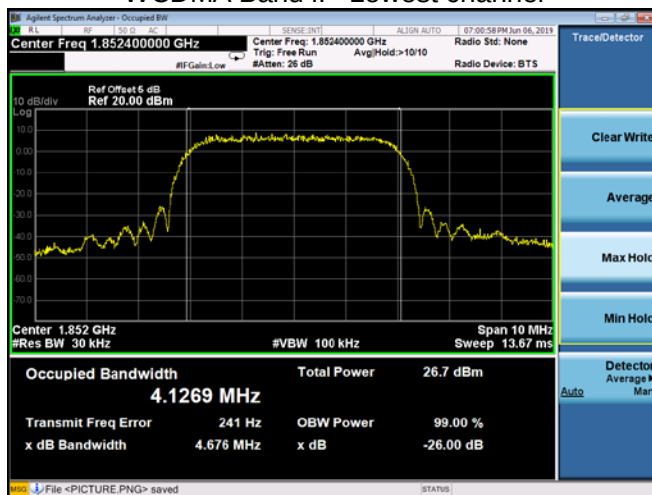

WCDMA Band II Middle channel

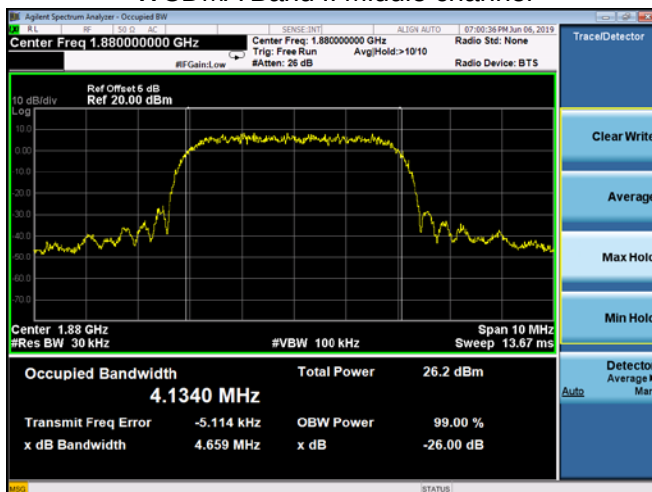


WCDMA Band II Highest channel

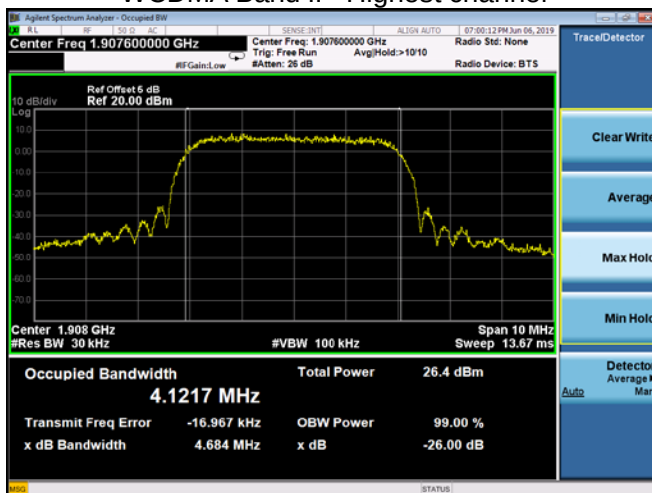





HSDPA Band V Lowest channel

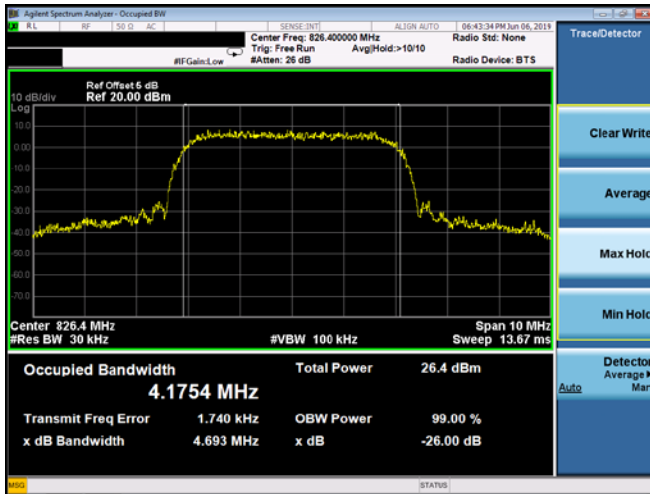


HSDPA Band IV Lowest channel

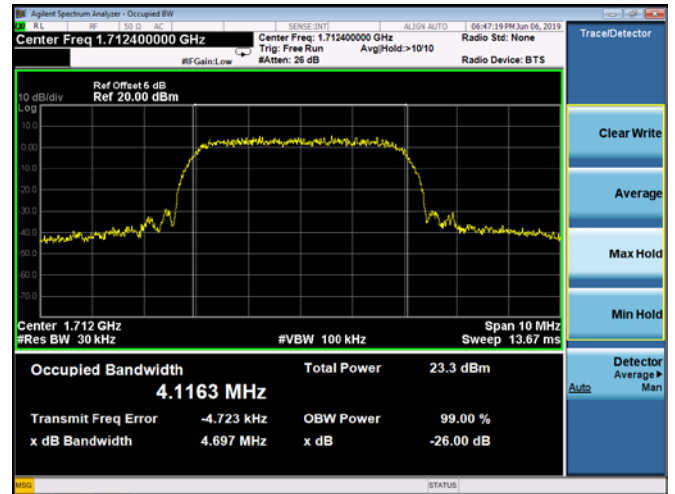


HSDPA Band V Middle channel

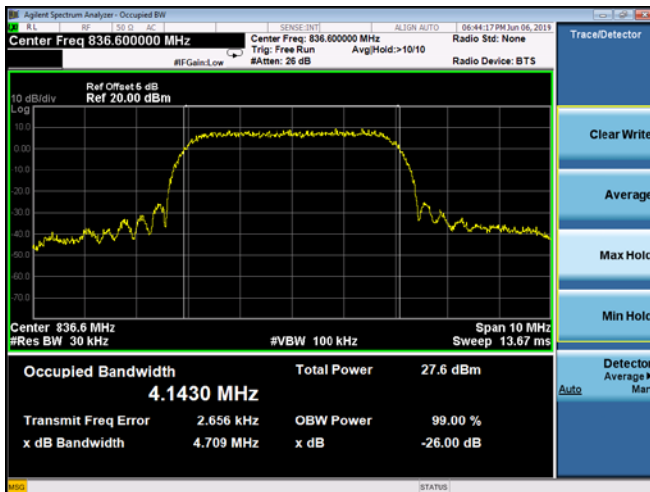


HSDPA Band IV Middle channel

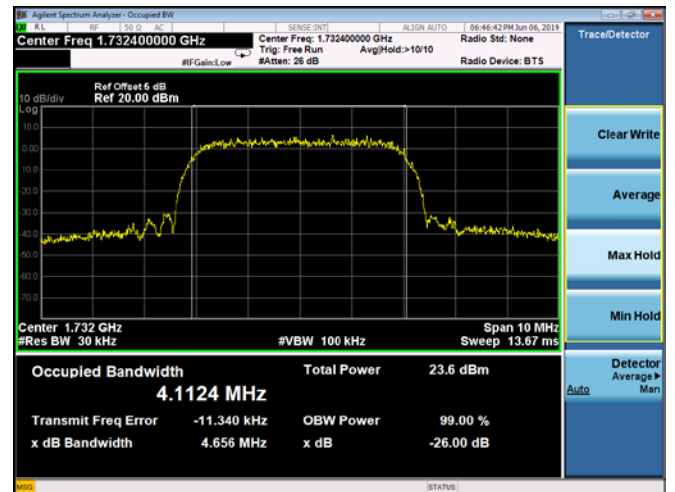

HSDPA Band V Highest channel

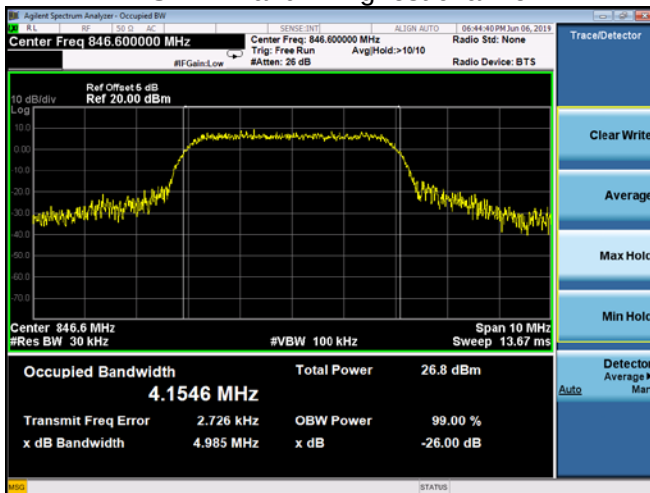


HSDPA Band IV Highest channel

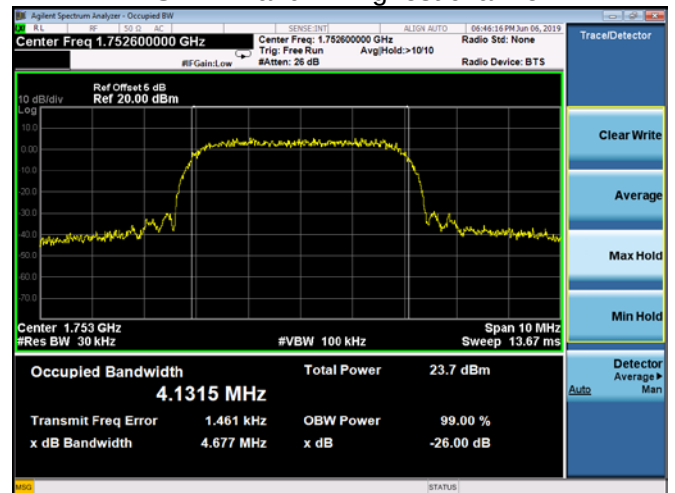





HSDPA Band II Lowest channel

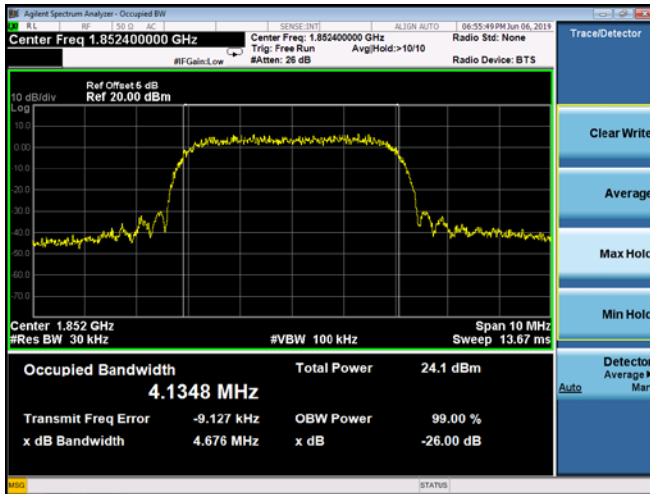

HSDPA Band II Middle channel

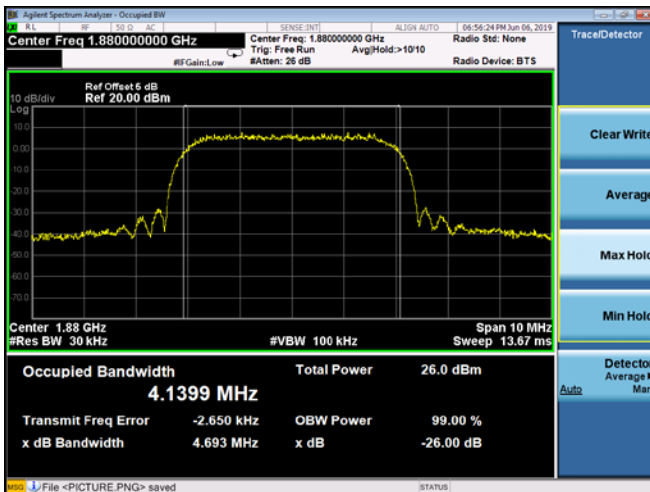


HSDPA Band II Highest channel

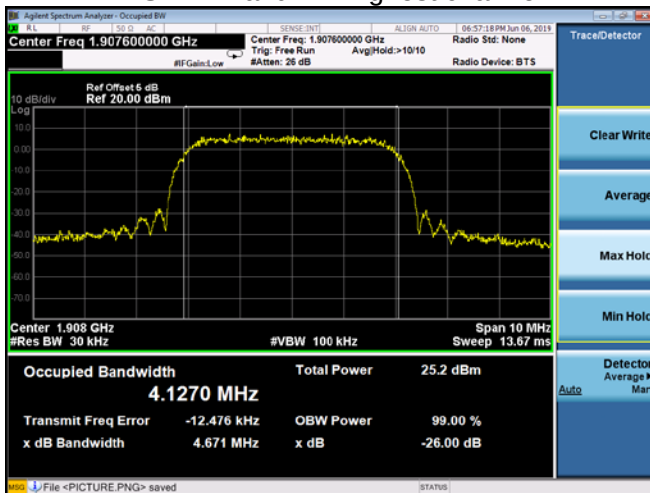





HSUPA Band V Lowest channel

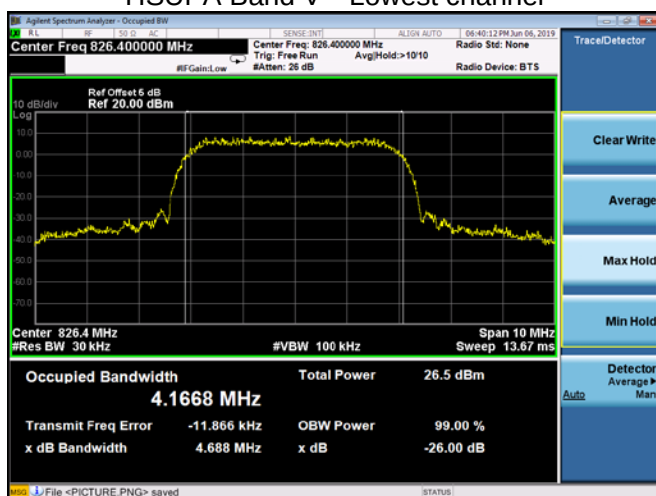


HSUPA Band IV Lowest channel

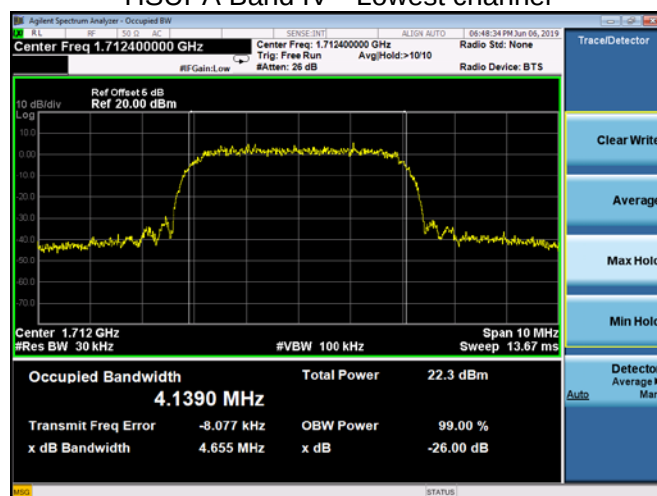


HSUPA Band V Middle channel

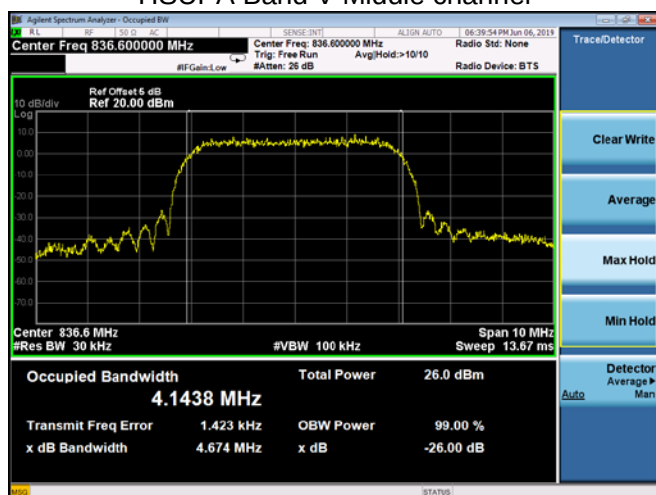


HSUPA Band IV Middle channel

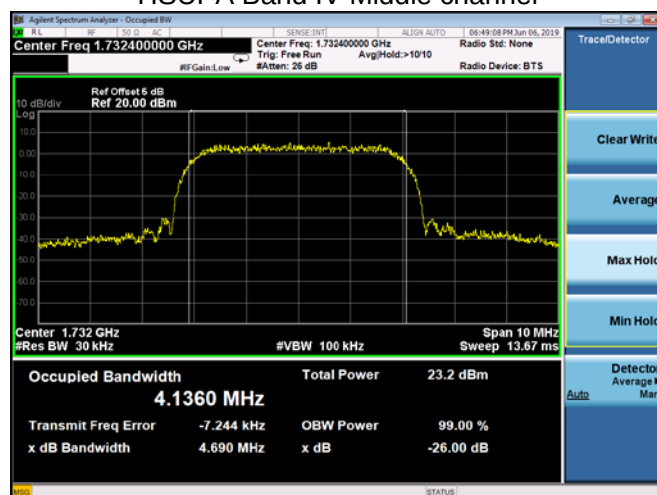

HSUPA Band V Highest channel

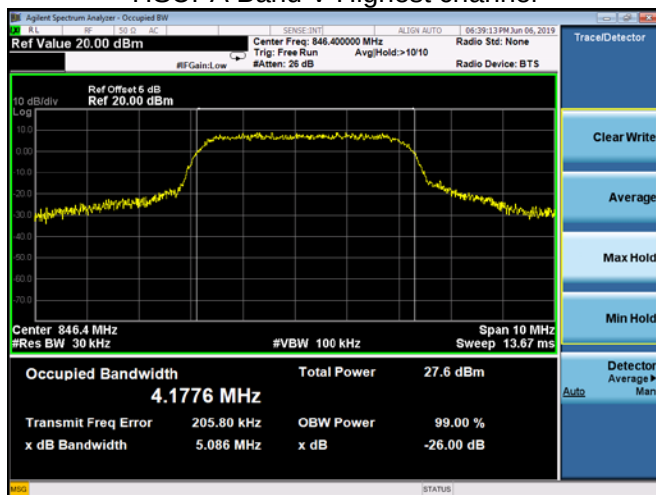


HSUPA Band IV Highest channel

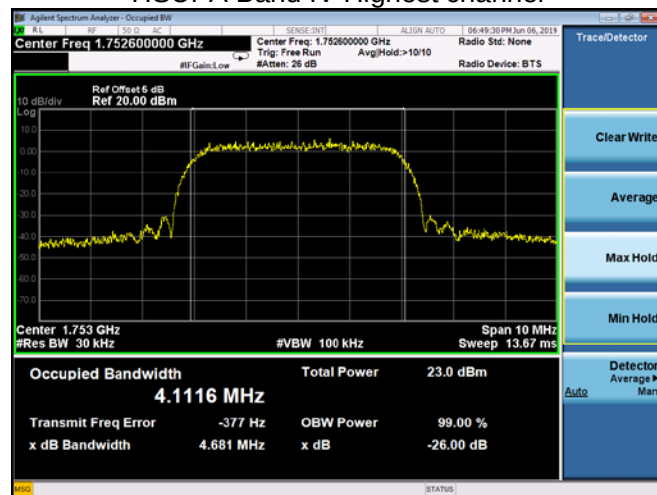





HSUPA Band II Lowest channel

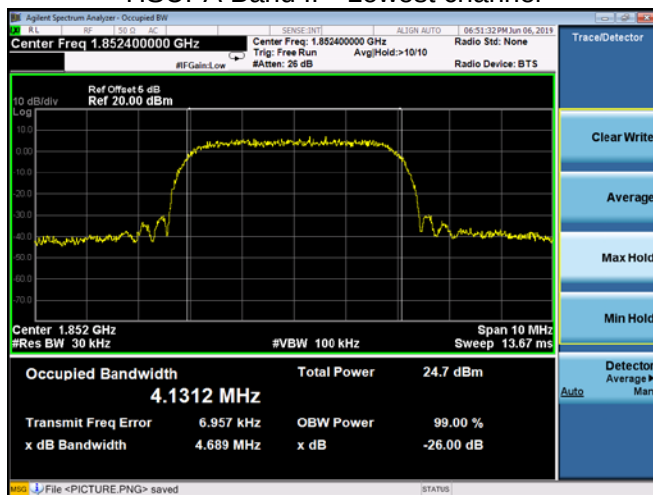

HSUPA Band II Middle channel

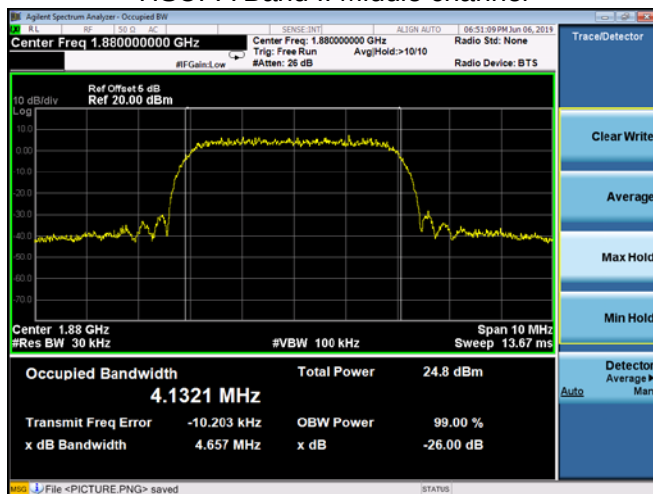

HSUPA Band II Highest channel

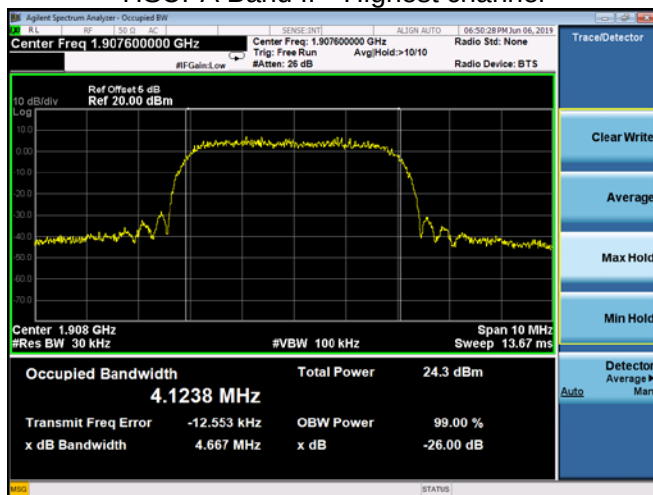


5.4. Frequency Stability

5.4.1. Limit

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30 °C to +50°C at intervals of not
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

5.4.2. Test Setup

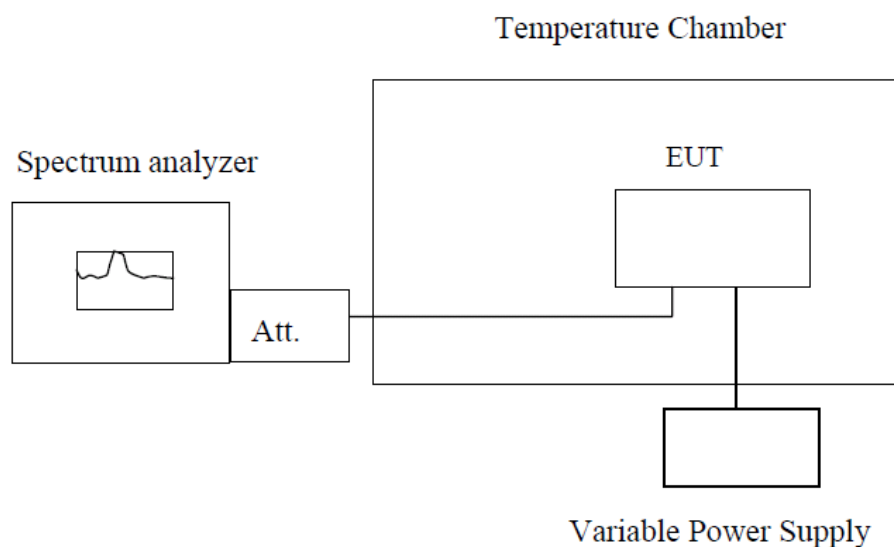

Note : Measurement setup for testing on Antenna connector

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber.

The EUT is commanded by the System Simulator (SS) to operate at the maximum output power

5.4.3. Test Result

The nominal, highest and lowest extreme voltages are separately 3.8VDC, 4.25VDC and 3.6VDC which are specified by the applicant; the normal temperature here used is 25 °C. The frequency deviation limit of 850MHz band is $\pm 2.5\text{ppm}$, and 1900MHz is $\pm 1\text{ppm}$



Test Conditions			Frequency Deviation			Result
Band	Power(Vdc)	Temperature(°C)	Frequency Error(Hz)	ppm	Limit	
WCDMA Band II Middle channel=188 0.0MHz	12	-30	85	0.0452	±2.5	PASS
	12	-20	37	0.0197		
	12	-10	45	0.0239		
	12	0	61	0.0324		
	12	10	48	0.0255		
	12	20	62	0.0330		
	12	30	78	0.0415		
	12	40	46	0.0245		
	12	50	27	0.0144		
	13.2	25	42	0.0223		
	12	25	37	0.0197		
	10.8	25	41	0.0218		
	10.8	25	41	0.0218		
WCDMA Band IV Middle channel=173 2.4MHz	12	-30	70	0.0404	±2.5	PASS
	12	-20	31	0.0179		
	12	-10	28	0.0162		
	12	0	41	0.0237		
	12	10	20	0.0115		
	12	20	36	0.0208		
	12	30	35	0.0202		
	12	40	24	0.0139		
	12	50	33	0.0190		
	13.2	25	22	0.0127		
	12	25	31	0.0179		
	10.8	25	40	0.0231		
	10.8	25	40	0.0231		
WCDMA Band V Middle channel=836. 6MHz	12	-30	74	0.0885	±2.5	PASS
	12	-20	34	0.0406		
	12	-10	33	0.0394		
	12	0	46	0.0550		
	12	10	24	0.0287		
	12	20	32	0.0383		
	12	30	42	0.0502		
	12	40	21	0.0251		
	12	50	31	0.0371		
	13.2	25	29	0.0347		
	12	25	35	0.0418		
	10.8	25	42	0.0502		
	10.8	25	42	0.0502		


Note: Measurement Uncertainty: ±20Hz.

5.5. Conducted Spurious Emissions

5.5.1. Limit

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.

5.5.2. Test Setup

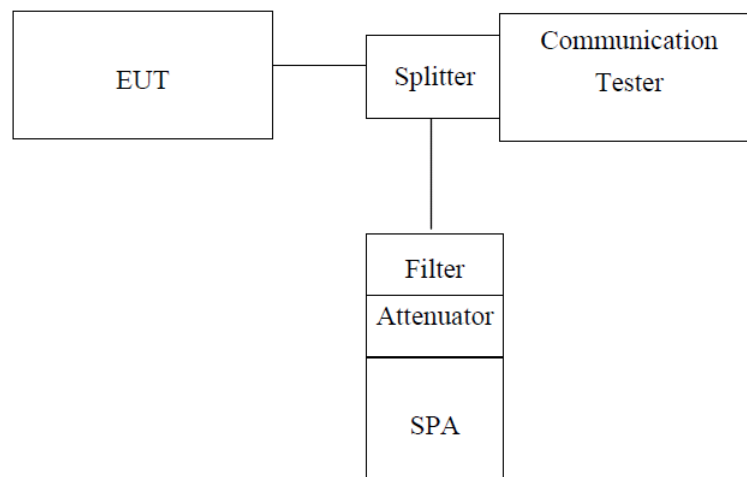

Note: Measurement setup for testing on Antenna connector

5.5.3. Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 100KHz, Start=30MHz, Stop= 10th harmonic.

Limit = -13dBm

5.5.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

Test plot as follows:



WCDMA Band II Lowest channel



WCDMA Band II Middle channel



WCDMA Band II Highest channel





WCDMA Band IV Lowest channel



WCDMA Band IV Middle channel



WCDMA Band IV Highest channel





WCDMA Band V Lowest channel



WCDMA Band V Middle channel



WCDMA Band V Highest channel





HSDPA Band II Lowest channel



HSDPA Band II Middle channel



HSDPA Band II Highest channel





HSDPA Band IV Lowest channel



HSDPA Band IV Middle channel



HSDPA Band IV Highest channel





HSDPA Band V Lowest channel



HSDPA Band V Middle channel



HSDPA Band V Highest channel





HSUPA Band II Lowest channel



HSUPA Band II Middle channel



HSUPA Band II Highest channel





HSUPA Band IV Lowest channel



HSUPA Band IV Middle channel



HSUPA Band IV Highest channel





HSUPA Band V Lowest channel



HSUPA Band V Middle channel



HSUPA Band V Highest channel






5.6. Conducted Out of Band Emissions

5.6.1. Limit

According to FCC section 22.917(b) and FCC section 24.238(b), 27.53(g)(h) in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

5.6.2. Test Setup

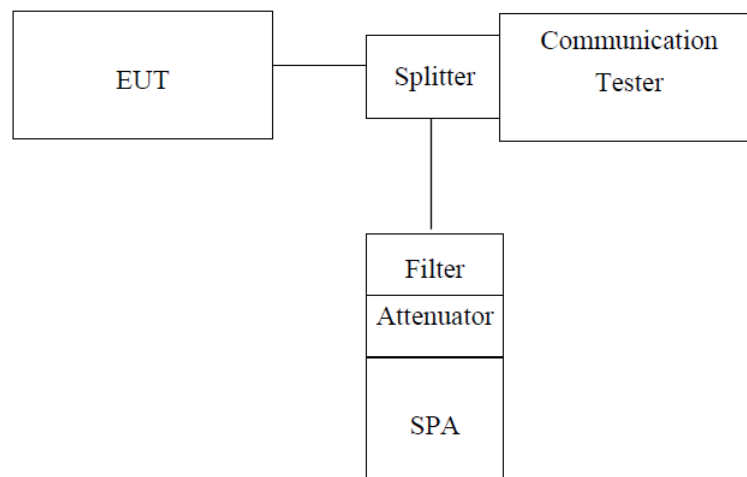

Note: Measurement setup for testing on Antenna connector

5.6.3. Measurement Procedure

The EUT, which is powered by the adapter, is coupled to the Spectrum Analyzer and the System Simulator with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the System Simulator to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the System Simulator.

and reference KDB 971168 D01 Power Meas. License Digital Systems v02v02

5.6.4. Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

Note: Offset=Cable loss+ $10\log((-26\text{dB bandwidth}/100)/\text{RBW})$

Test plot as follows:




WCDMA Band II Lowest channel

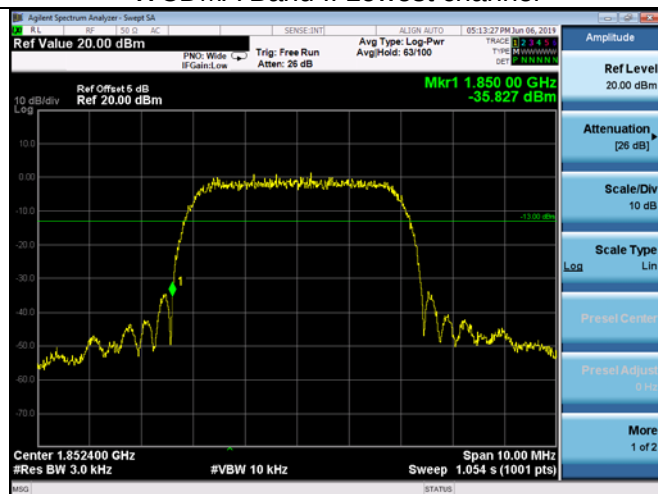


Note: Offset=Cable loss (4.5) + 10log
(47.12/30)=4.5+2.0=6.5dB

WCDMA Band II Highest channel

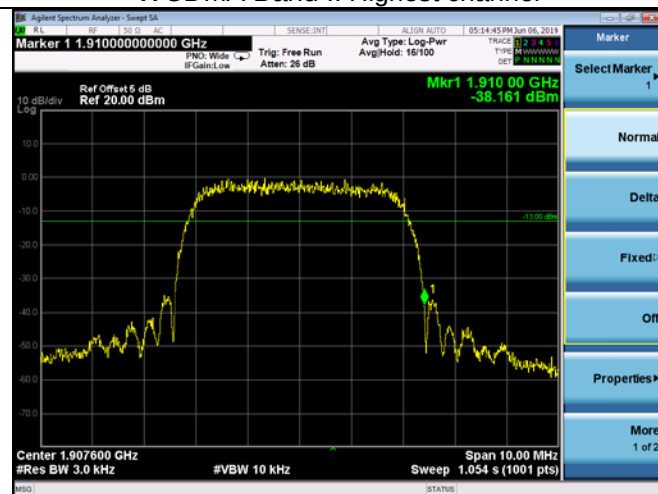


Note: Offset=Cable loss (4.5) + 10log (47.14/30)=4.5+2.0=6.5dB

WCDMA Band IV Lowest channel

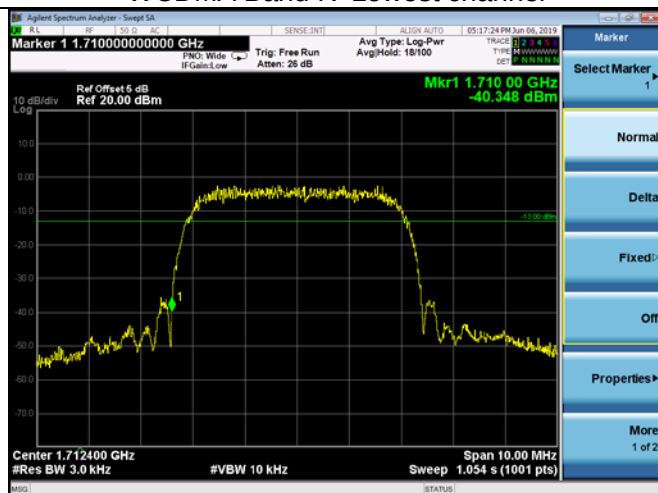


Note: Offset=Cable loss (4.5) + 10log(47.12/30)=4.5+2.0=6.5dB

WCDMA Band IV Highest channel

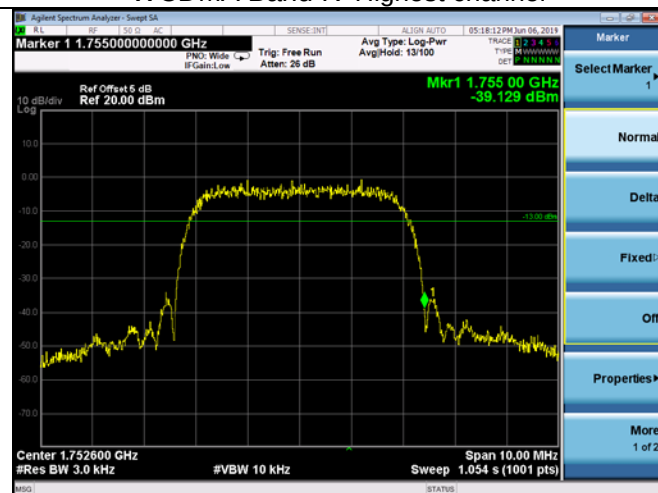


Note: Offset=Cable loss (4.5) + 10log (47.14/30)=4.5+2.0=6.5dB

WCDMA Band V Lowest channel

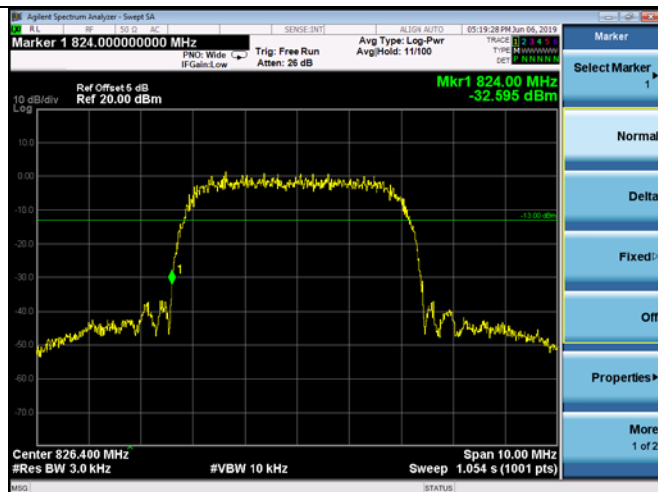

Note: Offset=Cable loss (4.0) + 10log (46.95/30)=4.0+1.9=5.9
dB


WCDMA Band V Highest channel

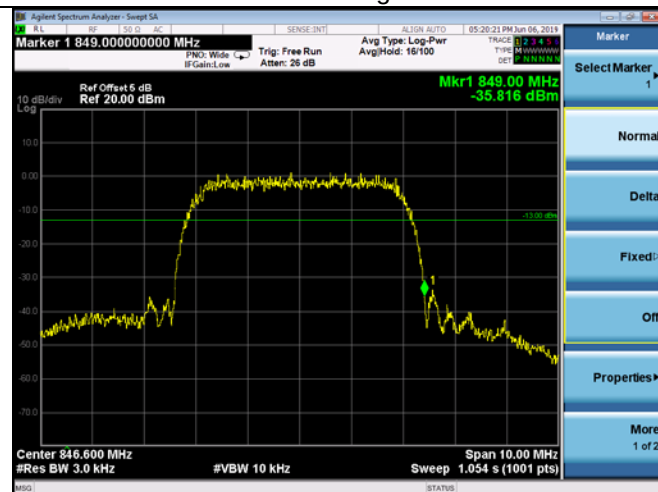

Note: Offset=Cable loss (4.0) + 10log (46.97/30)=4.0+1.9=5.9 dB




HSDPA Band II Lowest channel

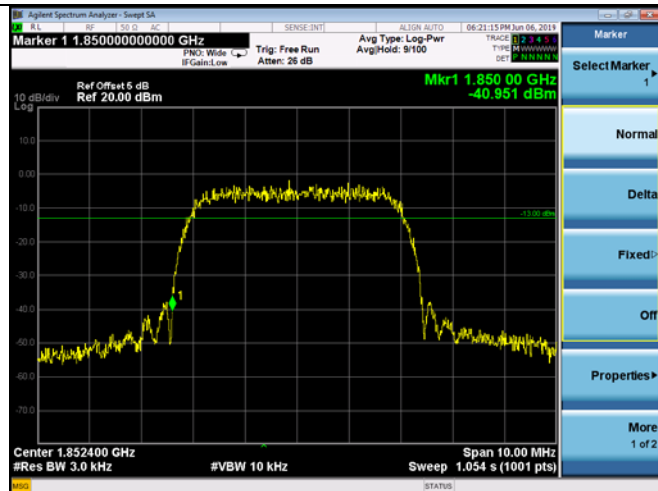


Note: Offset=Cable loss (4.5) + 10log(47.12/30)=4.5+2.0=6.5dB

HSDPA Band II Highest channel

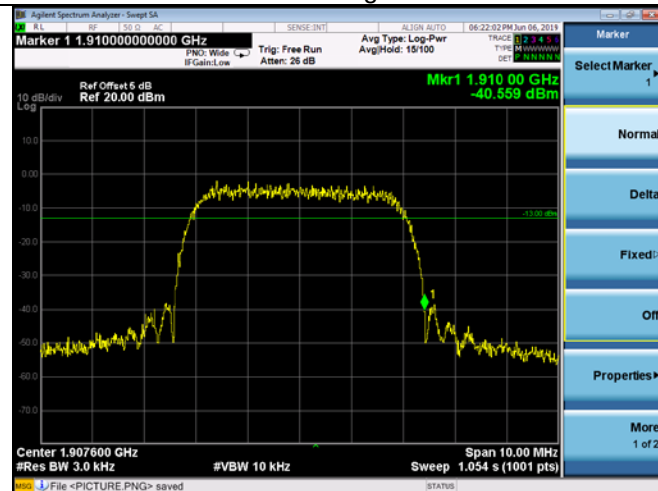


Note: Offset=Cable loss (4.5) + 10log (47.14/30)=4.5+2.0=6.5dB

HSDPA Band IV Lowest channel

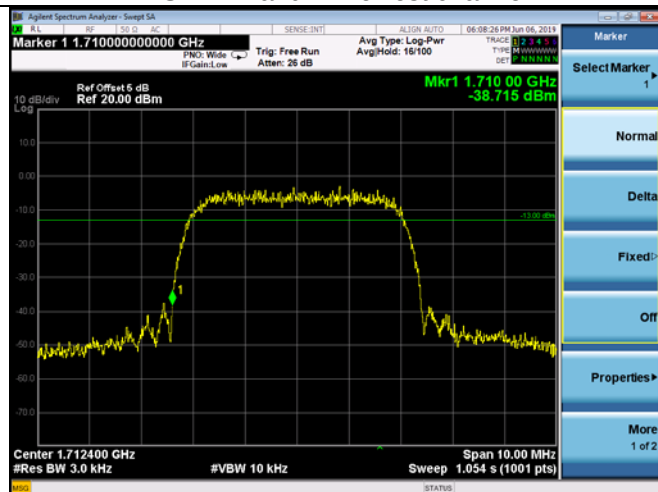


Note: Offset=Cable loss (4.5) + 10log(47.12/30)=4.5+2.0=6.5dB

HSDPA Band IV Highest channel

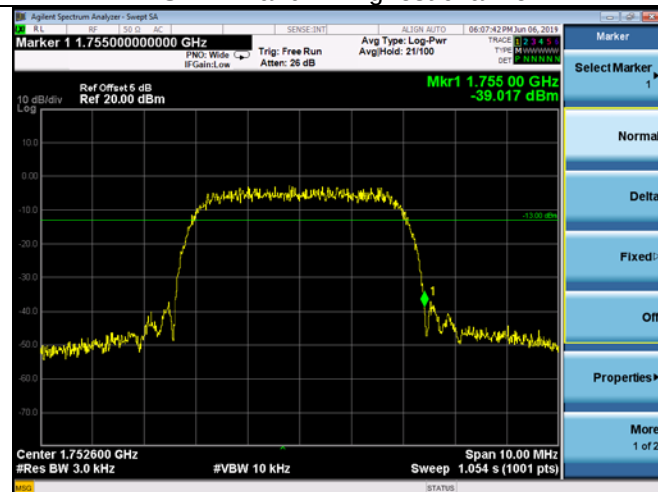


Note: Offset=Cable loss (4.5) + 10log (47.14/30)=4.5+2.0=6.5dB

HSDPA Band V Lowest channel

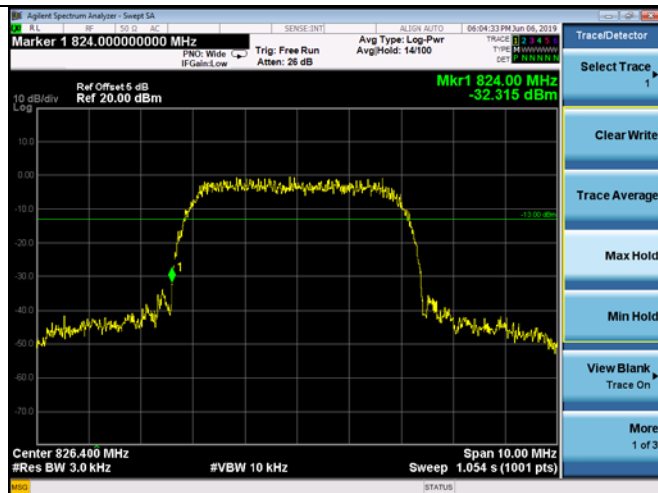

Note: Offset=Cable loss (4.0) + 10log (46.95/30)=4.0+1.9=5.9 dB


HSDPA Band V Highest channel

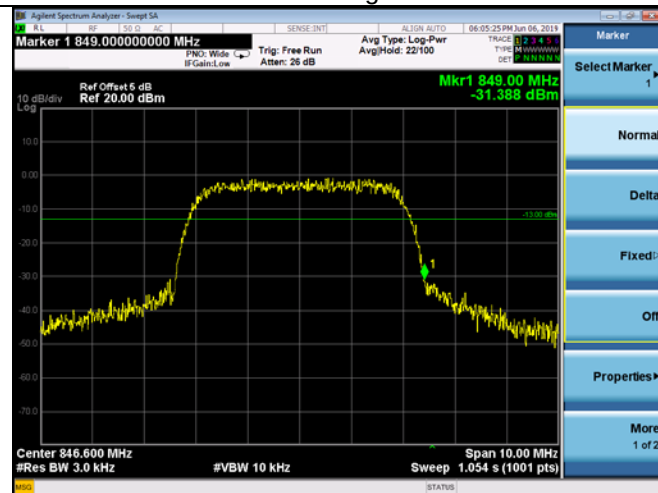

Note: Offset=Cable loss (4.0) + 10log (46.97/30)=4.0+1.9=5.9 dB




HSUPA Band II Lowest channel

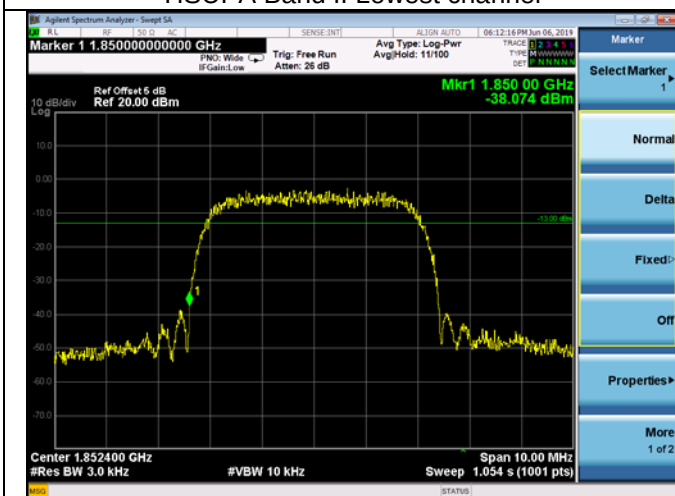


Note: Offset=Cable loss (4.5) + 10log(47.12/30)=4.5+2.0=6.5dB

HSUPA Band II Highest channel

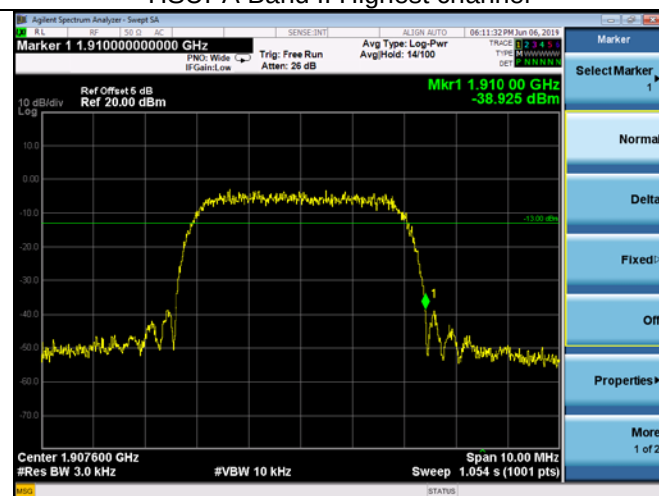


Note: Offset=Cable loss (4.5) + 10log (47.14/30)=4.5+2.0=6.5dB

HSUPA Band IV Lowest channel

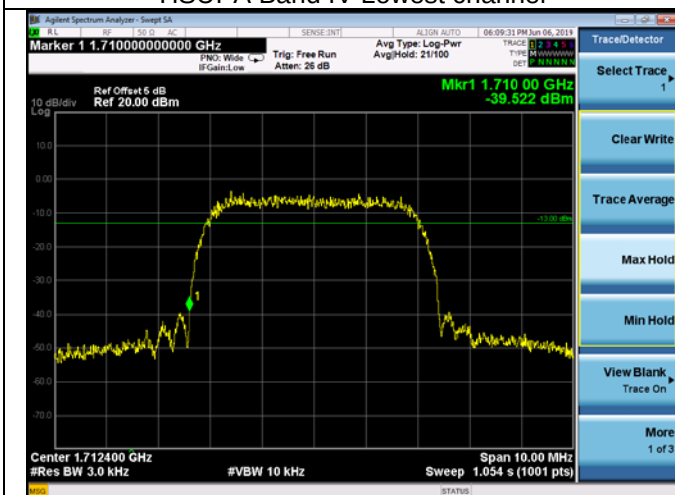


Note: Offset=Cable loss (4.5) + 10log(47.12/30)=4.5+2.0=6.5dB

HSUPA Band IV Highest channel

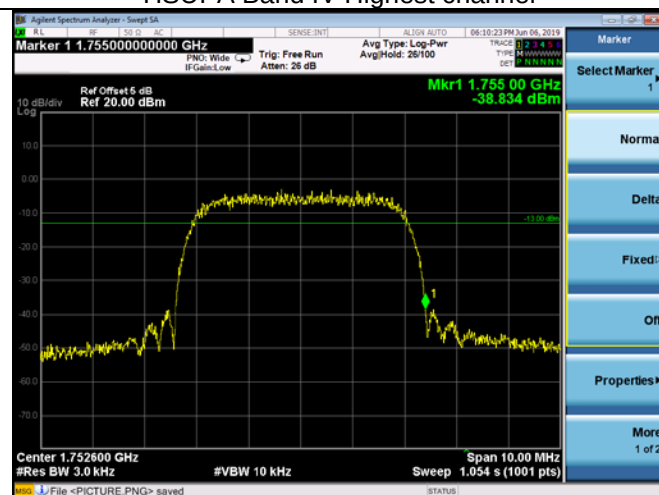


Note: Offset=Cable loss (4.5) + 10log (47.14/30)=4.5+2.0=6.5dB

HSUPA Band V Lowest channel

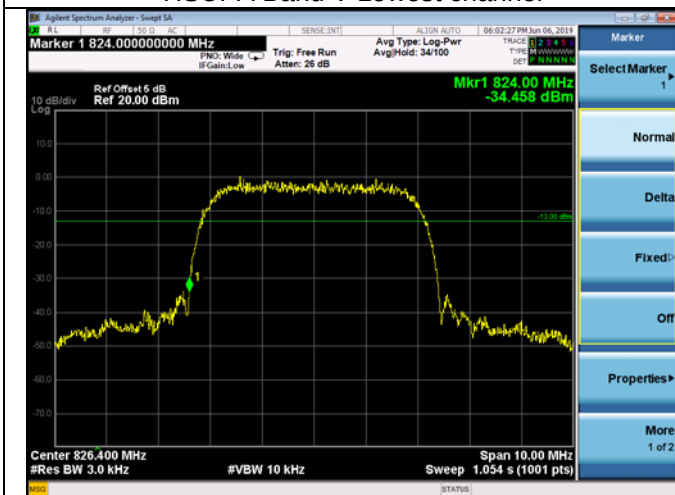

Note: Offset=Cable loss (4.0) + 10log (46.95/30)=4.0+1.9=5.9 dB

HSUPA Band V Highest channel

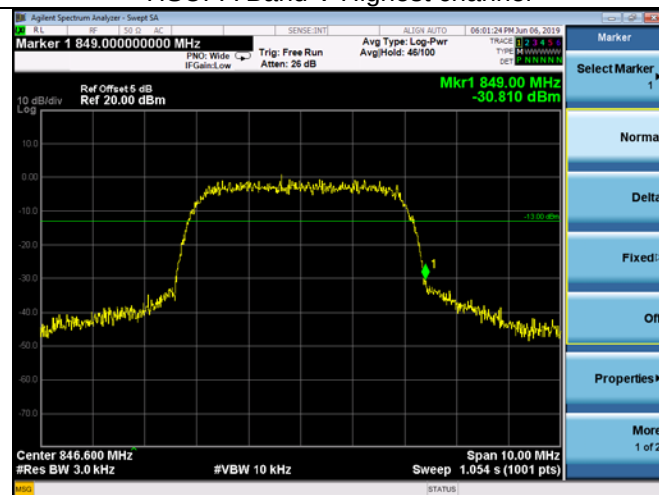

Note: Offset=Cable loss (4.0) + 10log (46.97/30)=4.0+1.9=5.9 dB


5.7. Transmitter Radiated Power (EIRP/ERP)

5.7.1. Limit


According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

5.7.2. Test Setup


Below 1GHz

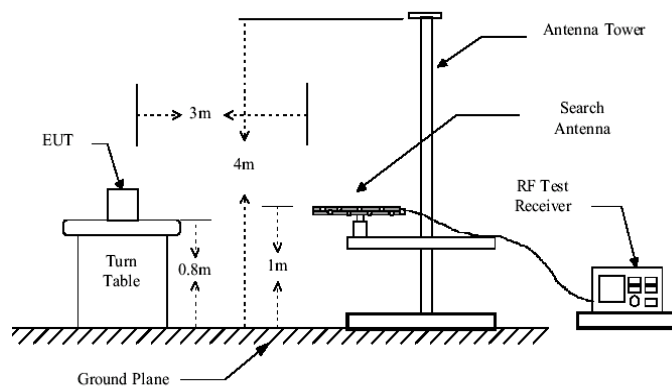

Above 1GHz

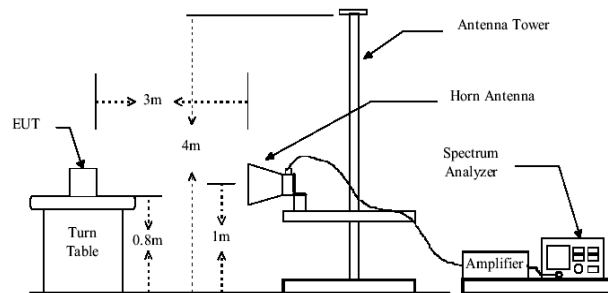

Substituted method:

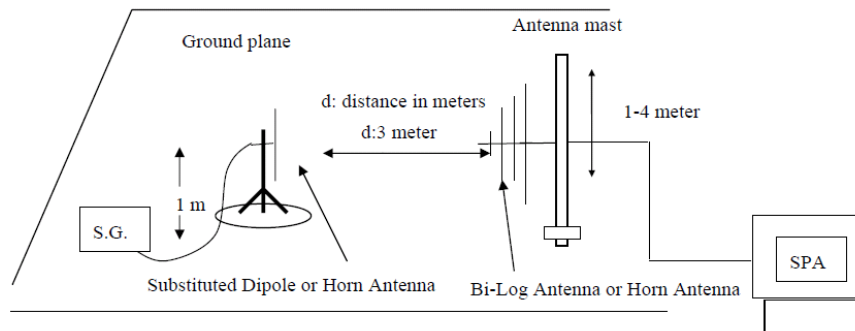

5.7.3. Measurement Procedure

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. All test in Full-Anechoic Chamber.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

For BAND II: $ERP = S.G. \text{ output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$

For BAND V: $EIRP = S.G. \text{ output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$

5.7.4. Test Result



EUT mode	Channel	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Result
----------	---------	--------------	-------------------	--------------------	-----------------	------------	-------------	--------

WCDMA Band II	Lowest	V	6.10	19.33	2.52	22.91	33.00	Pass
		H	5.33	19.33	2.52	22.14		
	Middle	V	5.59	19.50	2.60	22.49	33.00	Pass
		H	5.42	19.50	2.60	22.32		
	Highest	V	4.87	19.94	2.71	22.10	33.00	Pass
		H	4.80	19.94	2.71	22.03		

EUT mode	Channel	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Result
----------	---------	--------------	-------------------	--------------------	-----------------	------------	-------------	--------

WCDMA Band IV	Lowest	V	5.19	19.33	2.52	22.00	30.00	Pass
		H	5.21	19.33	2.52	22.02		
	Middle	V	5.53	19.50	2.60	22.43	30.00	Pass
		H	5.31	19.50	2.60	22.21		
	Highest	V	4.85	19.94	2.71	22.08	30.00	Pass
		H	4.62	19.94	2.71	21.85		



EUT mode	Channel	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)	Result
WCDMA Band V	Lowest	V	6.88	15.68	1.65	20.91	38.45	Pass
		H	6.93	15.68	1.65	20.96		
	Middle	V	5.43	15.70	1.67	19.46	38.45	Pass
		H	4.33	15.70	1.67	18.36		
	Highest	V	7.39	15.70	1.71	21.38	38.45	Pass
		H	7.90	15.70	1.71	21.89		

5.8. Radiated Out of Band Emissions


5.8.1. Limit

According to FCC section 22.917(a) and section 24.238(a), 27.53(g) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.


The spurious emission with frequency band 1900 according to FCC section 2.1057.

5.8.2. Test Setup


Below 1GHz

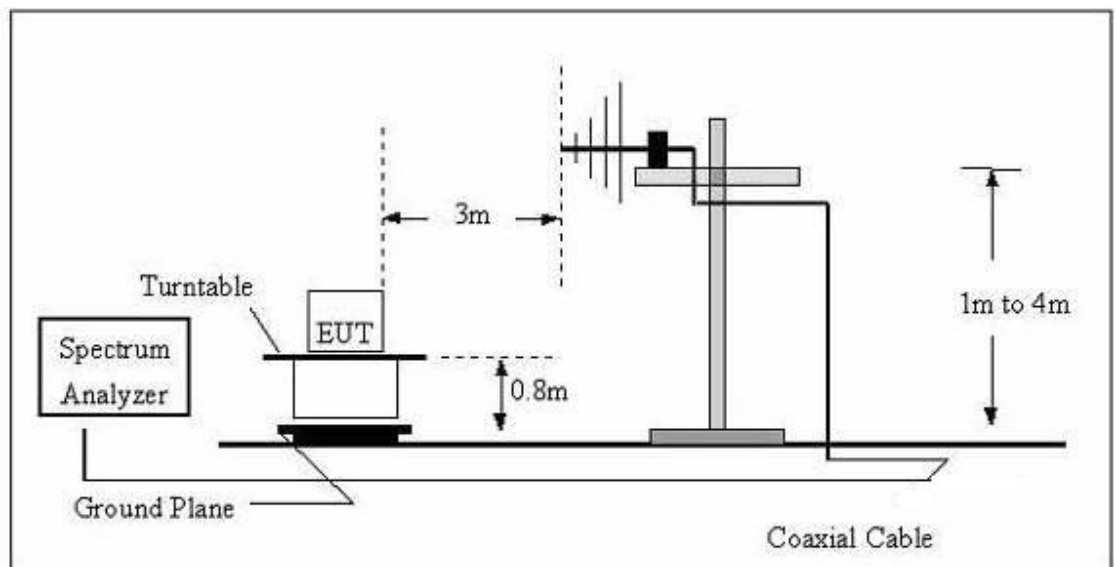

Above 1GHz

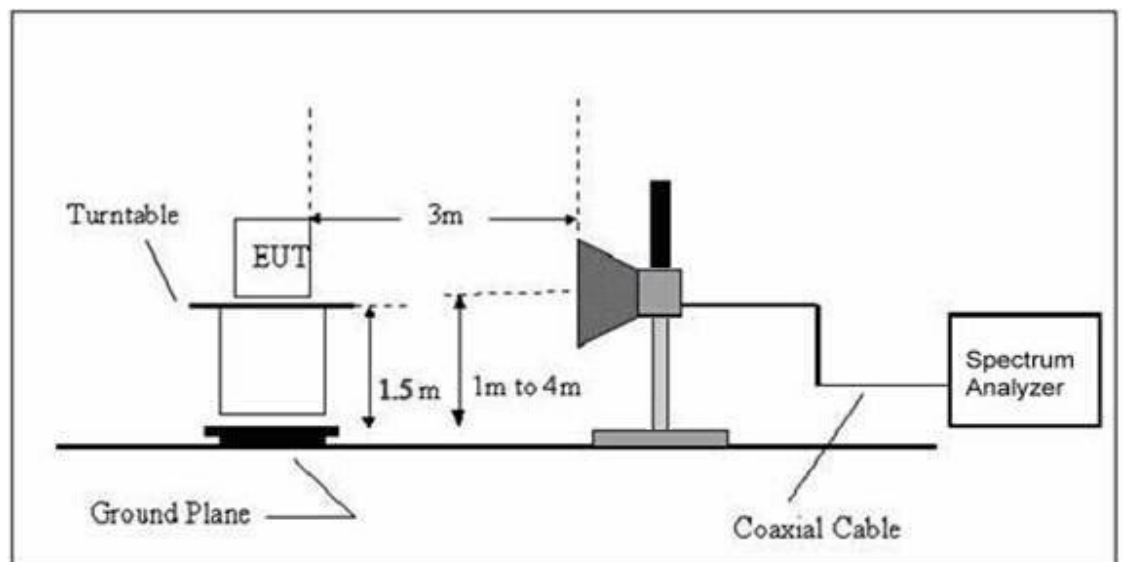

Substituted method:

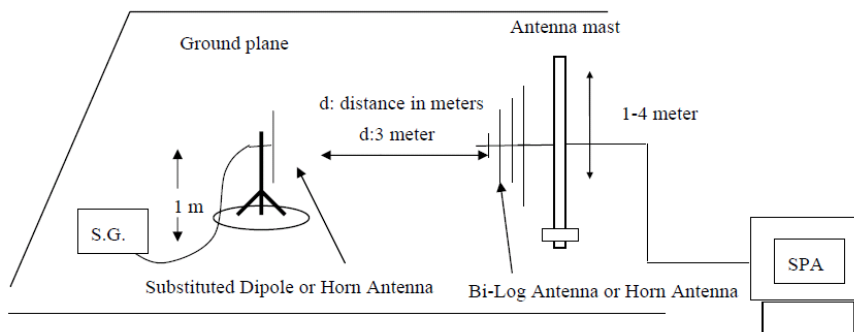

5.8.3. Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. all test in Full-Anechoic Chamber.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$EIRP (Level) = S.G. \text{ output (dBm)} + \text{Antenna Gain(dBi)} - \text{Cable Loss (dB)}$

Note: Measurement Uncertainty: $\pm 3.6 \text{ dB}$.

The data show only the worst results, and the other results are very low and not shown in the report.



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
WCDMA Band II Lowest	87.21	Vertical	-75.42	3.35	0.38	-72.45	-13	PASS
	3700.40	Vertical	-46.14	7.76	3.75	-42.13		
	5550.60	Vertical	-47.31	9.84	4.94	-42.41		
	7400.80	Vertical	-39.71	10.21	5.32	-34.82		
	9251.00	Vertical	-43.13	11.36	6.02	-37.79		
	11101.20	Vertical	-44.66	14.52	6.68	-36.82		
	137.26	Horizontal	-75.55	4.12	0.51	-71.94		
	3700.40	Horizontal	-48.41	7.76	3.75	-44.40		
	5550.60	Horizontal	-47.64	9.84	4.94	-42.74		
	7400.80	Horizontal	-42.36	10.21	5.32	-37.47		
	9251.00	Horizontal	-47.52	11.36	6.02	-42.18		
	11101.20	Horizontal	-47.36	14.52	6.68	-39.52		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
WCDMA Band II Middle	88.39	Vertical	-75.46	3.35	0.38	-72.49	-13	PASS
	3760.00	Vertical	-47.51	7.76	3.75	-43.50		
	5640.00	Vertical	-47.11	9.84	4.94	-42.21		
	7520.00	Vertical	-42.73	10.21	5.32	-37.84		
	9400.00	Vertical	-42.13	11.36	6.02	-36.79		
	11280.00	Vertical	-46.08	14.52	6.68	-38.24		
	137.43	Horizontal	-75.58	4.12	0.51	-71.97		
	3760.00	Horizontal	-45.93	7.76	3.75	-41.92		
	5640.00	Horizontal	-46.67	9.84	4.94	-41.77		
	7520.00	Horizontal	-39.33	10.21	5.32	-34.44		
	9400.00	Horizontal	-43.22	11.36	6.02	-37.88		
	11280.00	Horizontal	-45.09	14.52	6.68	-37.25		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
WCDMA Band II Highest	88.24	Vertical	-75.41	3.35	0.38	-72.44	-13	PASS
	3819.60	Vertical	-47.14	7.79	3.53	-42.88		
	5729.40	Vertical	-41.52	9.88	5.02	-36.66		
	7639.20	Vertical	-37.75	10.25	5.54	-33.04		
	9549.00	Vertical	-44.64	11.38	6.16	-39.42		
	11458.80	Vertical	-47.07	14.56	6.72	-39.23		
	139.04	Horizontal	-75.53	4.12	0.51	-71.92		
	3819.60	Horizontal	-45.44	7.79	3.53	-41.18		
	5729.40	Horizontal	-41.43	9.88	5.02	-36.57		
	7639.20	Horizontal	-37.16	10.25	5.54	-32.45		
	9549.00	Horizontal	-42.78	11.38	6.16	-37.56		
	11458.80	Horizontal	-44.61	14.56	6.72	-36.77		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
WCDMA Band IV Lowest	87.21	Vertical	-74.49	3.35	0.38	-71.52	-13	PASS
	3700.40	Vertical	-47.12	7.76	3.75	-43.11		
	5550.60	Vertical	-46.38	9.84	4.94	-41.48		
	7400.80	Vertical	-35.79	10.21	5.32	-30.90		
	9251.00	Vertical	-45.18	11.36	6.02	-39.84		
	11101.20	Vertical	-43.67	14.52	6.68	-35.83		
	137.26	Horizontal	-74.53	4.12	0.51	-70.92		
	3700.40	Horizontal	-46.46	7.76	3.75	-42.45		
	5550.60	Horizontal	-46.62	9.84	4.94	-41.72		
	7400.80	Horizontal	-44.36	10.21	5.32	-39.47		
	9251.00	Horizontal	-45.51	11.36	6.02	-40.17		
	11101.20	Horizontal	-44.38	14.52	6.68	-36.54		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
WCDMA Band IV Middle	88.39	Vertical	-73.42	3.35	0.38	-70.45	-13	PASS
	3760.00	Vertical	-46.55	7.76	3.75	-42.54		
	5640.00	Vertical	-47.13	9.84	4.94	-42.23		
	7520.00	Vertical	-43.76	10.21	5.32	-38.87		
	9400.00	Vertical	-41.18	11.36	6.02	-35.84		
	11280.00	Vertical	-45.04	14.52	6.68	-37.20		
	137.43	Horizontal	-74.57	4.12	0.51	-70.96		
	3760.00	Horizontal	-46.95	7.76	3.75	-42.94		
	5640.00	Horizontal	-43.67	9.84	4.94	-38.77		
	7520.00	Horizontal	-36.32	10.21	5.32	-31.43		
	9400.00	Horizontal	-41.28	11.36	6.02	-35.94		
	11280.00	Horizontal	-46.02	14.52	6.68	-38.18		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
WCDMA Band IV Highest	88.24	Vertical	-74.46	3.35	0.38	-71.49	-13	PASS
	3819.60	Vertical	-46.14	7.79	3.53	-41.88		
	5729.40	Vertical	-41.58	9.88	5.02	-36.72		
	7639.20	Vertical	-35.73	10.25	5.54	-31.02		
	9549.00	Vertical	-43.66	11.38	6.16	-38.44		
	11458.80	Vertical	-47.01	14.56	6.72	-39.17		
	139.04	Horizontal	-72.57	4.12	0.51	-68.96		
	3819.60	Horizontal	-42.43	7.79	3.53	-38.17		
	5729.40	Horizontal	-43.45	9.88	5.02	-38.59		
	7639.20	Horizontal	-32.12	10.25	5.54	-27.41		
	9549.00	Horizontal	-45.77	11.38	6.16	-40.55		
	11458.80	Horizontal	-47.67	14.56	6.72	-39.83		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	Level (dBm)		
WCDMA Band V Lowest	87.48	Vertical	-75.61	3.35	0.38	-72.64	-13	PASS
	1652.80	Vertical	-29.24	6.51	1.35	-24.08		
	2479.20	Vertical	-35.45	6.88	2.53	-31.10		
	3305.60	Vertical	-37.32	7.61	3.67	-33.38		
	4132.00	Vertical	-45.44	8.67	4.06	-40.83		
	4958.40	Vertical	-40.07	9.35	4.38	-35.10		
	138.21	Horizontal	-75.73	4.12	0.51	-72.12		
	1652.80	Horizontal	-34.06	6.51	1.35	-28.90		
	2479.20	Horizontal	-37.24	6.88	2.53	-32.89		
	3305.60	Horizontal	-45.97	7.61	3.67	-42.03		
	4132.00	Horizontal	-49.24	8.67	4.06	-44.63		
	4958.40	Horizontal	-43.46	9.35	4.38	-38.49		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	Level (dBm)		
WCDMA Band V Middle	87.69	Vertical	-75.63	3.35	0.38	-72.66	-13	PASS
	1670.00	Vertical	-32.24	6.58	1.38	-27.04		
	2505.00	Vertical	-32.75	6.92	2.57	-28.40		
	3340.00	Vertical	-40.24	7.67	3.72	-36.29		
	4175.00	Vertical	-47.86	8.75	4.19	-43.30		
	5010.00	Vertical	-43.32	9.48	4.45	-38.29		
	139.86	Horizontal	-76.15	4.12	0.51	-72.54		
	1670.00	Horizontal	-29.57	6.58	1.38	-24.37		
	2505.00	Horizontal	-32.24	6.92	2.57	-27.89		
	3340.00	Horizontal	-48.56	7.67	3.72	-44.61		
	4175.00	Horizontal	-49.98	8.75	4.19	-45.42		
	5010.00	Horizontal	-39.93	9.48	4.45	-34.90		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	Level (dBm)		
WCDMA Band V Highest	88.26	Vertical	-75.23	3.35	0.38	-72.26	-13	PASS
	1693.20	Vertical	-31.15	6.57	1.48	-26.06		
	2539.80	Vertical	-33.06	6.96	2.67	-28.77		
	3386.40	Vertical	-36.23	7.68	3.78	-32.33		
	4233.00	Vertical	-41.56	8.76	4.24	-37.04		
	5079.60	Vertical	-46.98	9.47	4.63	-42.14		
	137.65	Horizontal	-76.31	4.12	0.51	-72.70		
	1693.20	Horizontal	-29.97	6.57	1.48	-24.88		
	2539.80	Horizontal	-32.82	6.96	2.67	-28.53		
	3386.40	Horizontal	-38.57	7.68	3.78	-34.67		
	4233.00	Horizontal	-47.23	8.76	4.24	-42.71		
	5079.60	Horizontal	-53.47	9.47	4.63	-48.63		




6. PHOTOGRAPHS OF TEST SET-UP

RE





7. PHOTOGRAPHS OF THE EUT

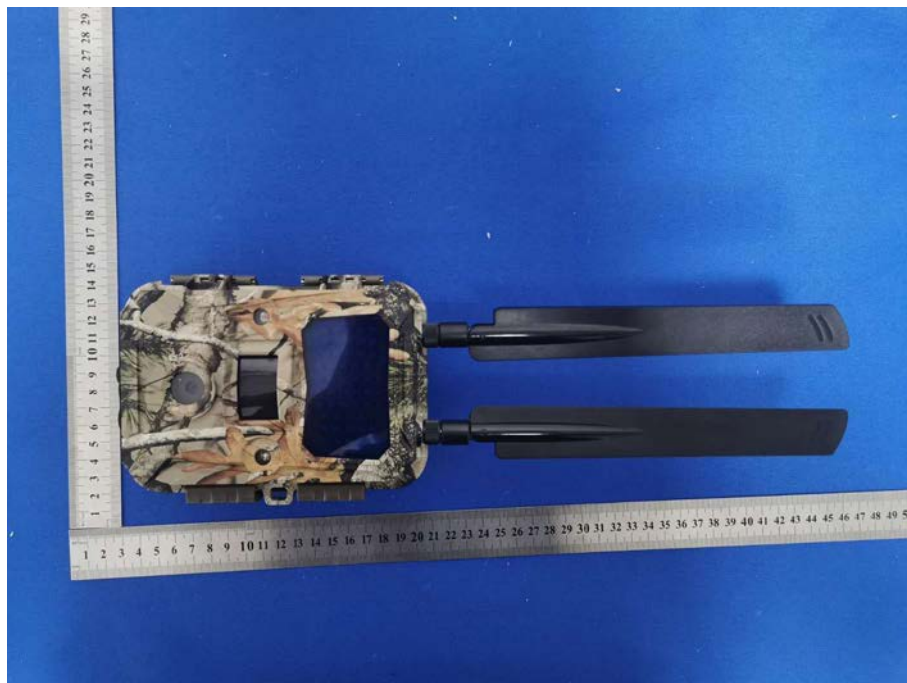

***** END OF REPORT *****