

TEST REPORT**Report Number: 18050997HKG-002**

Application for Original Grant of 47 CFR Part 15 Certification

FCC ID: 2ARU4GC272156**Prepared and Checked by:****Approved by:**

Signed On File

Wong Cheuk Ho, Herbert
Lead EngineerWong Kwok Yeung, Kenneth
Senior Lead Engineer
Date: October 29, 2018

TEST REPORT

GENERAL INFORMATION

Applicant Name:	Guangdong Futina Electrical Co., Ltd.
Applicant Address:	No.C06-1 Jiyue Industrial Zone (II Phase), Leliu Port, GuangDa Residents' Committee Leliu Sub-district Office, Shunde District, Foshan City, Guangdong Province, China.
FCC Specification Standard:	FCC Part 15, October 1, 2017 Edition
FCC ID:	2ARU4GC272156
FCC Model(s):	Z-206USWKL
Type of EUT:	Transceiver
Description of EUT:	USB wifi socket
Serial Number:	N/A
Sample Receipt Date:	May 17, 2018
Date of Test:	May 17, 2018 to October 25, 2018
Report Date:	October 29, 2018
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification.

TEST REPORT**TABLE OF CONTENTS**

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE	4
1.1 Summary of Test Results.....	4
1.2 Statement of Compliance.....	4
2.0 GENERAL DESCRIPTION.....	5
2.1 Product Description	5
2.2 Test Methodology	6
2.3 Test Facility	6
2.4 Related Submittal(s) Grants	6
3.0 SYSTEM TEST CONFIGURATION.....	7
3.1 Justification	7
3.2 EUT Exercising Software.....	8
3.3 Details of EUT and Description of Accessories.....	9
3.4 Measurement Uncertainty.....	9
4.0 TEST RESULTS	10
4.1 Maximum Conducted Output Power at Antenna Terminals	10
4.2 Minimum 6dB RF Bandwidth.....	12
4.3 Maximum Power Spectral Density	19
4.4 Out of Band Conducted Emissions	26
4.5 Field Strength Calculation.....	39
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions.....	40
4.6.1 Radiated Emission Configuration Photograph	40
4.6.2 Radiated Emission Data.....	40
4.6.3 Radiated Emission Test Setup.....	51
4.6.4 Transmitter Duty Cycle Calculation	52
4.7 AC Power Line Conducted Emission	53
4.7.1 AC Power Line Conducted Emission Configuration Photograph	53
4.7.2 AC Power Line Conducted Emission Data.....	53
4.7.3 Conducted Emission Test Setup	57
5.0 EQUIPMENT LIST	58

TEST REPORT

1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	Results	Details See Section
Antenna Requirement	15.203	Pass	2.1
Max. Conducted Output Power (Peak)	15.247(b)(3)&(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	Pass	4.2
Max. Power Density (average)	15.247(e)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2017 Edition

TEST REPORT

2.0 GENERAL DESCRIPTION

2.1 Product Description

The Equipment Under Test (EUT) Model: Z-206USWKL is a USB wifi socket, which equipped with a WLAN module. After connecting the EUT to the WLAN network, user can control the home appliance via smartphone Apps. The EUT has two USB ports for charging external devices purpose only.

The Equipment Under Test (EUT) operates at frequency range of 2412MHz to 2462MHz with 11 channels.

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

The EUT is power by a 120VAC adaptor.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.

TEST REPORT

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v04 (05-April-2017) All other measurements were made in accordance with the procedures in 47 CFR Part 2.

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (WiFi portion)

TEST REPORT

3.0 SYSTEM TEST CONFIGURATION

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 120VAC.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109.

TEST REPORT

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

TEST REPORT

3.3 Details of EUT and Description of Accessories

Details of EUT:

The EUT is power by 120VAC

Description of Accessories:

- 1) 1 x USB cable with length of 0.6m long with 2.38ohm load
- 2) 1 x power cable with length of 0.6 meter long with 8ohm load
(Provided by Intertek)

There are no accessories for compliance of this product.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.


TEST REPORT

4.0 TEST RESULTS

4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

RF Conduct Measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

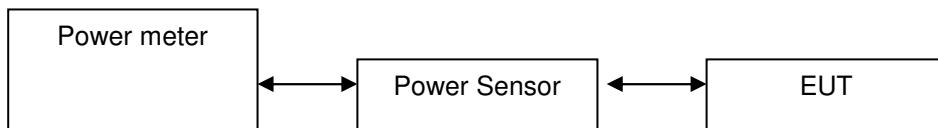

The antenna port of the EUT was connected to the input of a spectrum analyzer.

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	18.2	66.1
Middle Channel: 2437	18.6	72.4
High Channel: 2462	18.8	75.9

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	20.2	104.7
Middle Channel: 2437	20.4	109.6
High Channel: 2462	20.6	114.8

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 2 dBi

Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	20.4	109.6
Middle Channel: 2437	20.5	112.2
High Channel: 2462	20.8	120.2

TEST REPORT

4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: included in OFFSET function
 added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)
max. conducted (peak) output level = 18.8 dBm

IEEE 802.11g (OFDM, 9 Mbps)
max. conducted (peak) output level = 20.6 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)
max. conducted (peak) output level = 20.8 dBm

Limits:

1W (30dBm) for antennas with gains of 6dBi or less

____W (____dBm) for antennas with gains more than 6dBi

The plots of conducted output power are saved as below.

TEST REPORT

4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	8.24
Middle Channel: 2437	8.24
High Channel: 2462	8.24

IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	16.56
Middle Channel: 2437	16.52
High Channel: 2462	16.56

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	17.76
Middle Channel: 2437	17.84
High Channel: 2462	17.72

Limits


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth are saved as below.


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11b, Lowest Channel

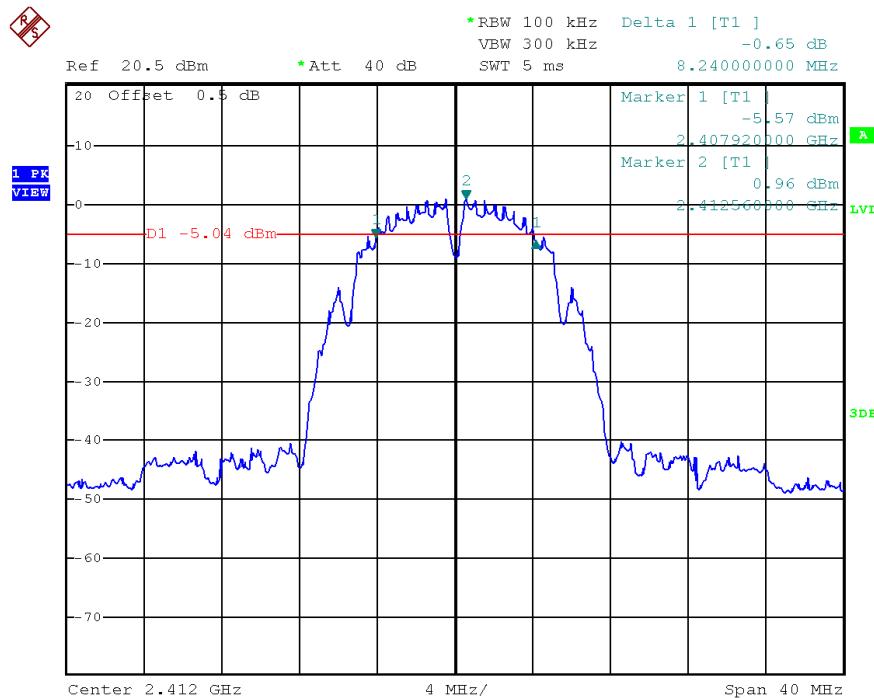


802.11b, Middle Channel

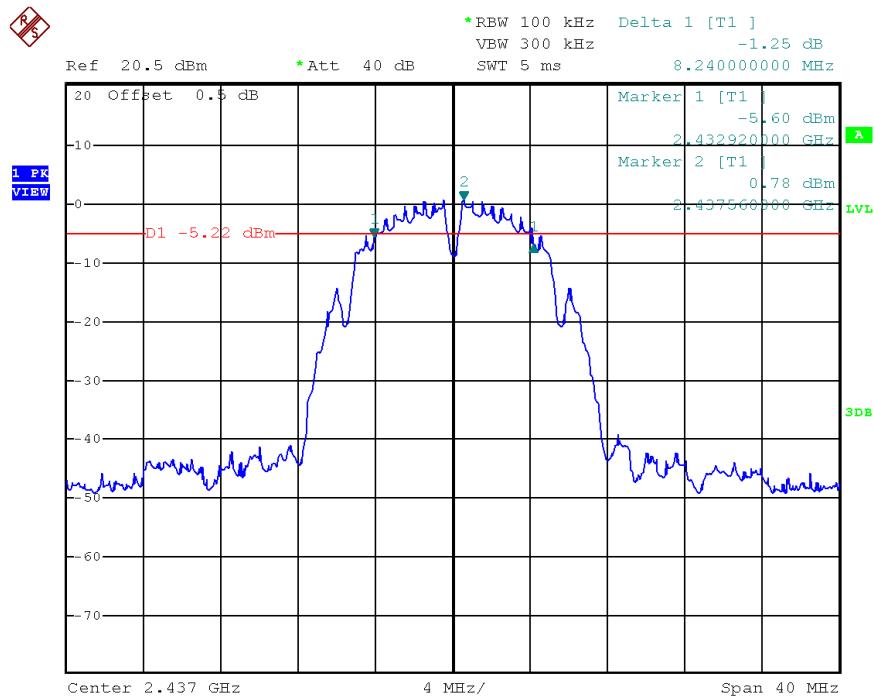

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH


802.11b, Highest Channel

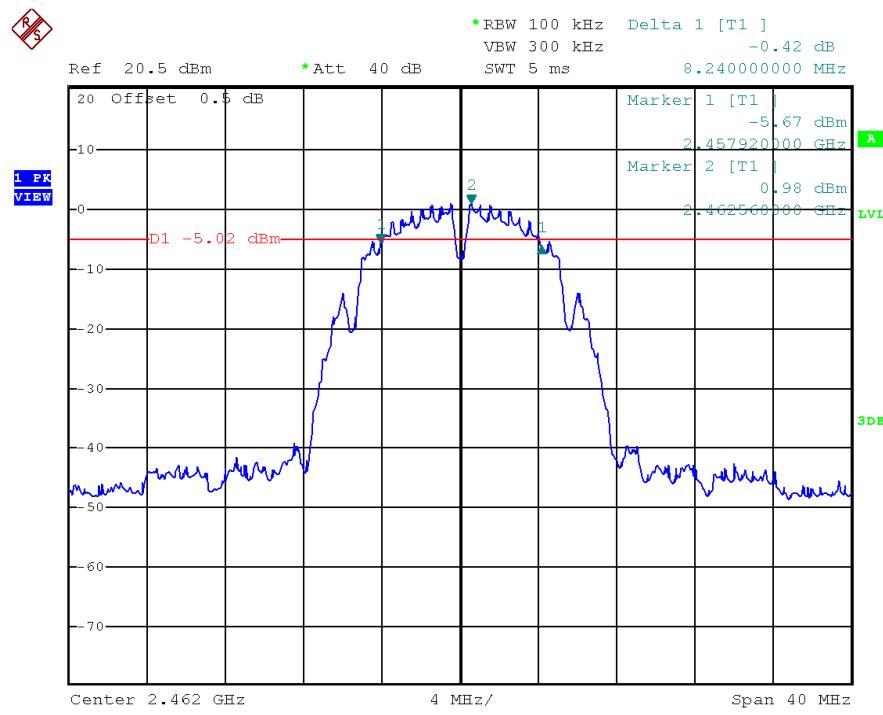


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11g, Lowest Channel

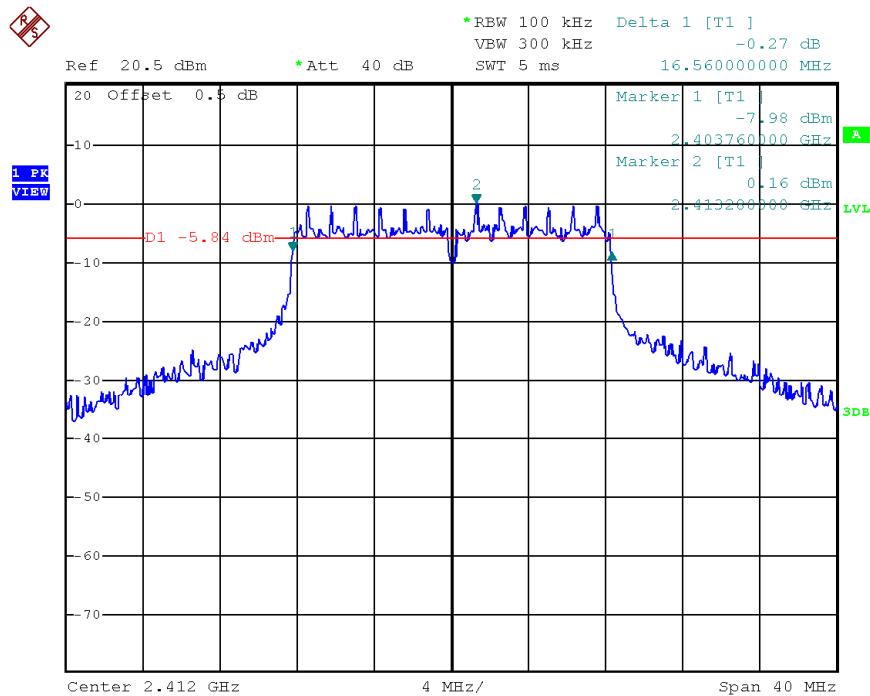


802.11g, Middle Channel

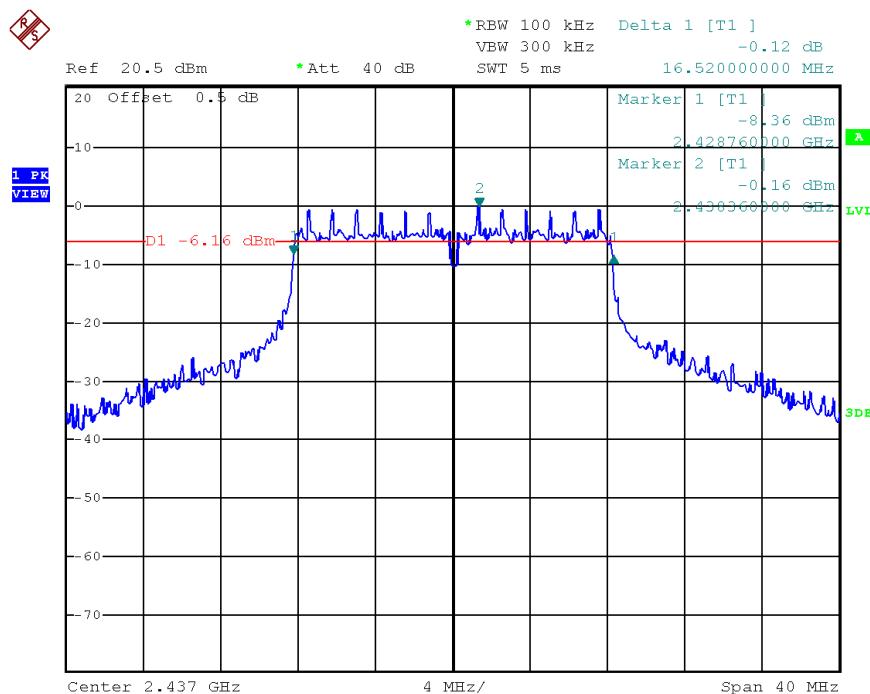

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH


802.11g, Highest Channel

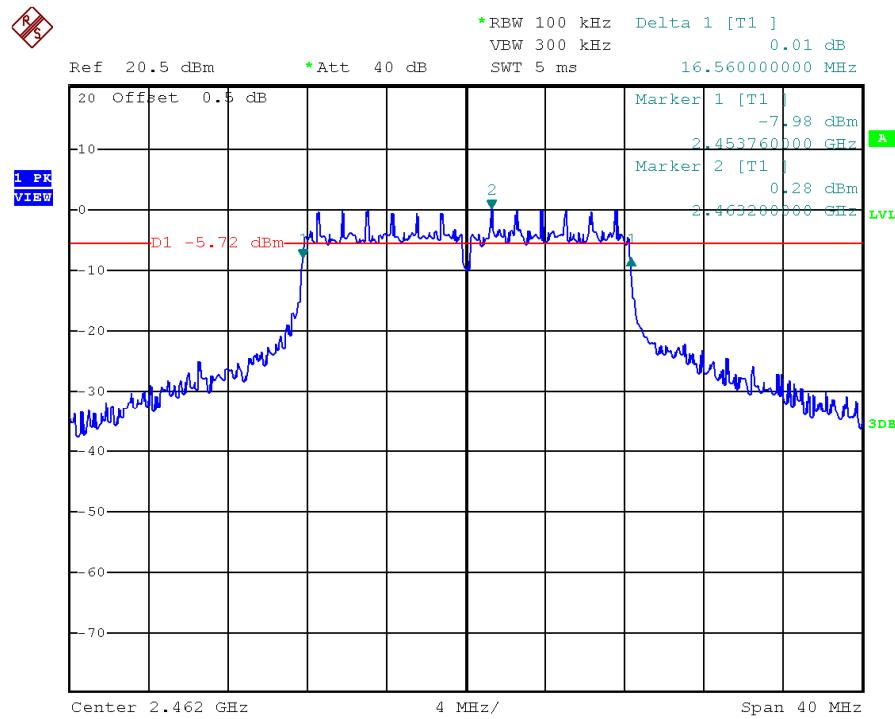


TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11n (20MHz), Lowest Channel

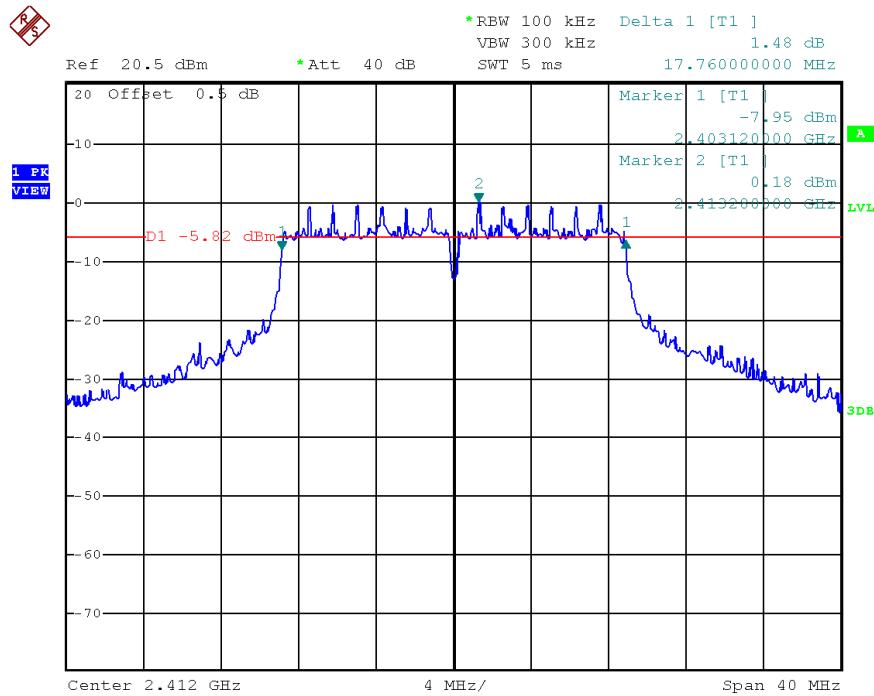


802.11n (20MHz), Middle Channel

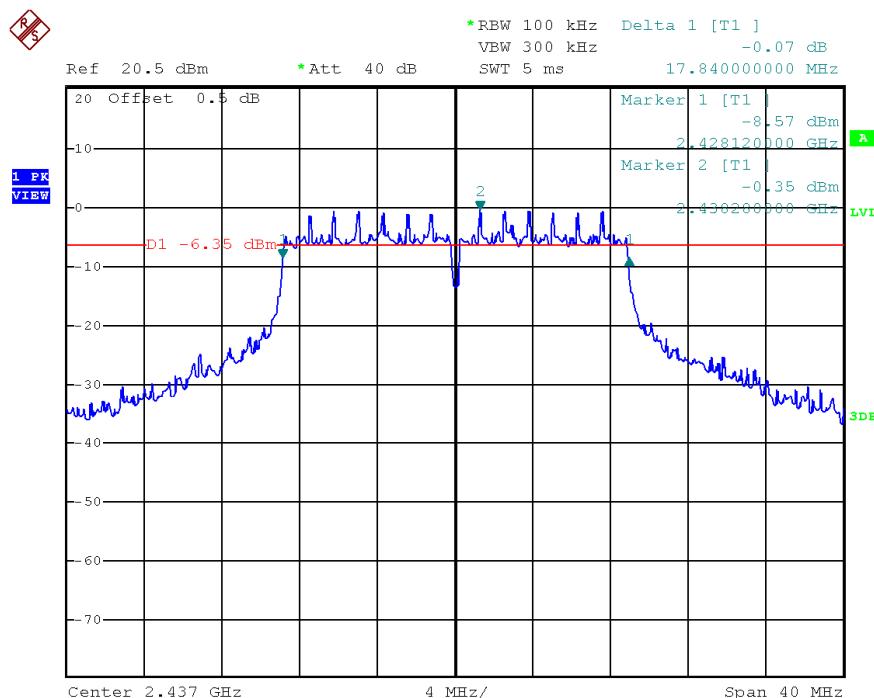

TEST REPORT

PLOTS OF 6dB RF BANDWIDTH

802.11n (20MHz), Highest Channel

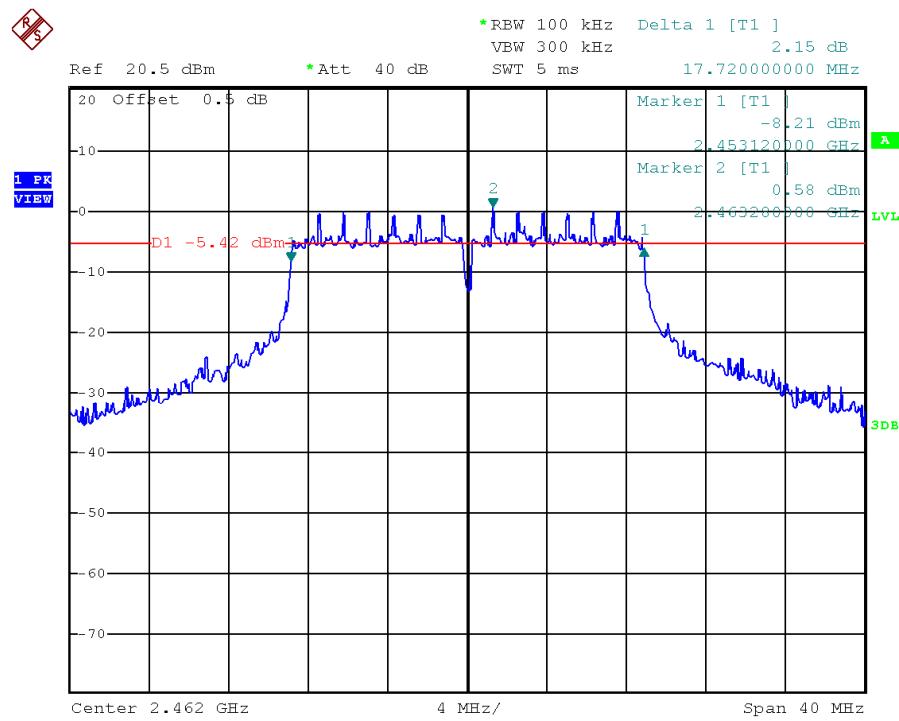

TEST REPORT

4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	0.74
Middle Channel: 2437	0.85
High Channel: 2462	0.65

IEEE 802.11g (OFDM, 6 Mbps)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-0.15
Middle Channel: 2437	0.00
High Channel: 2462	0.52

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	0.40
Middle Channel: 2437	-0.02
High Channel: 2462	0.42

Cable Loss: 0.5 dB


Limit:
8dBm

The plots of power spectral density are as below.


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11b, Lowest channel

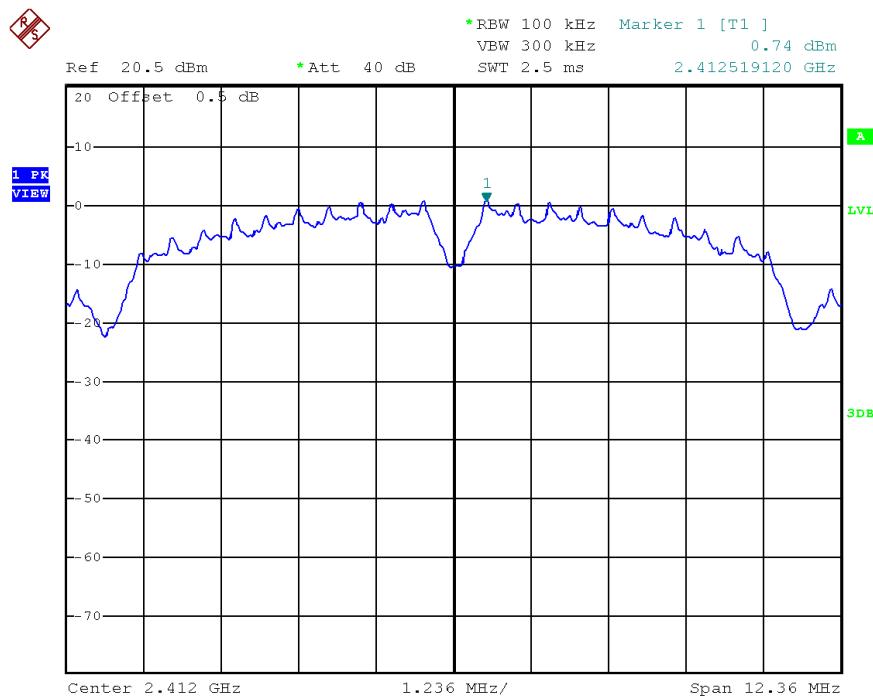


802.11b, Middle channel

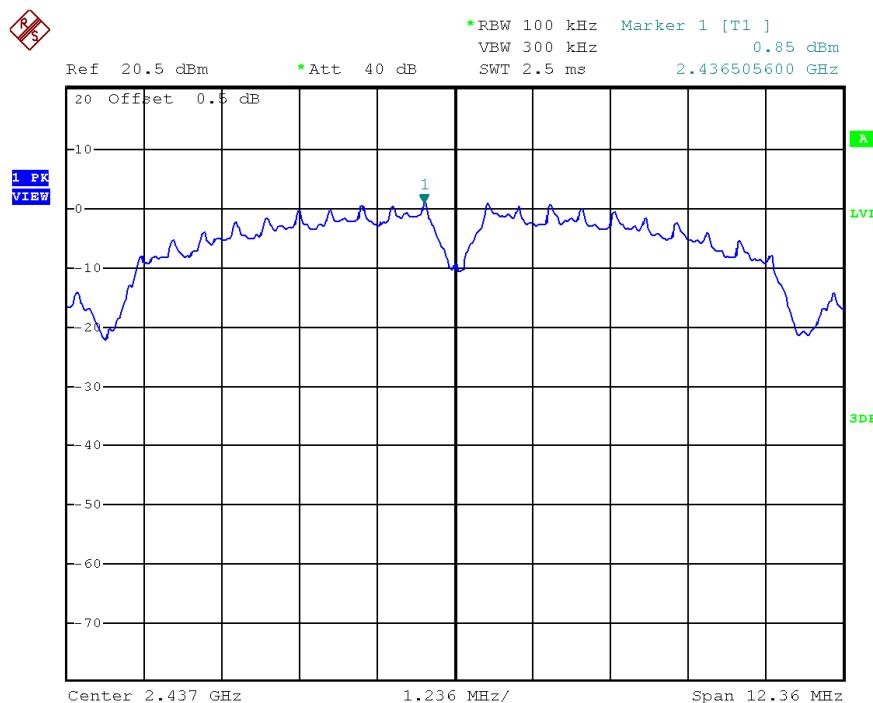

TEST REPORT**PLOTS OF POWER SPECTRAL DENSITY**


802.11b, Highest channel

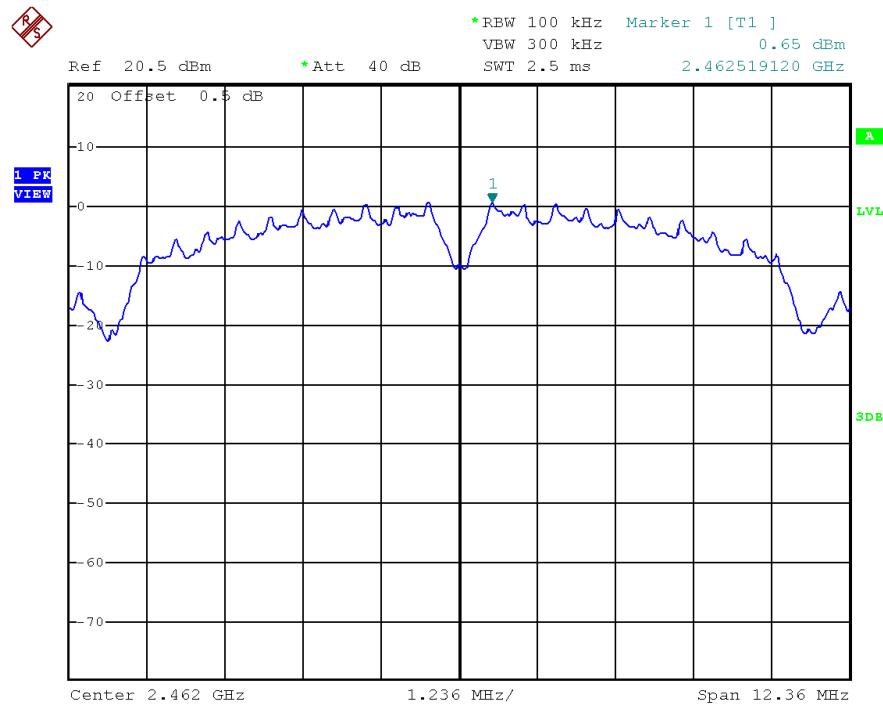


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11g, Lowest channel

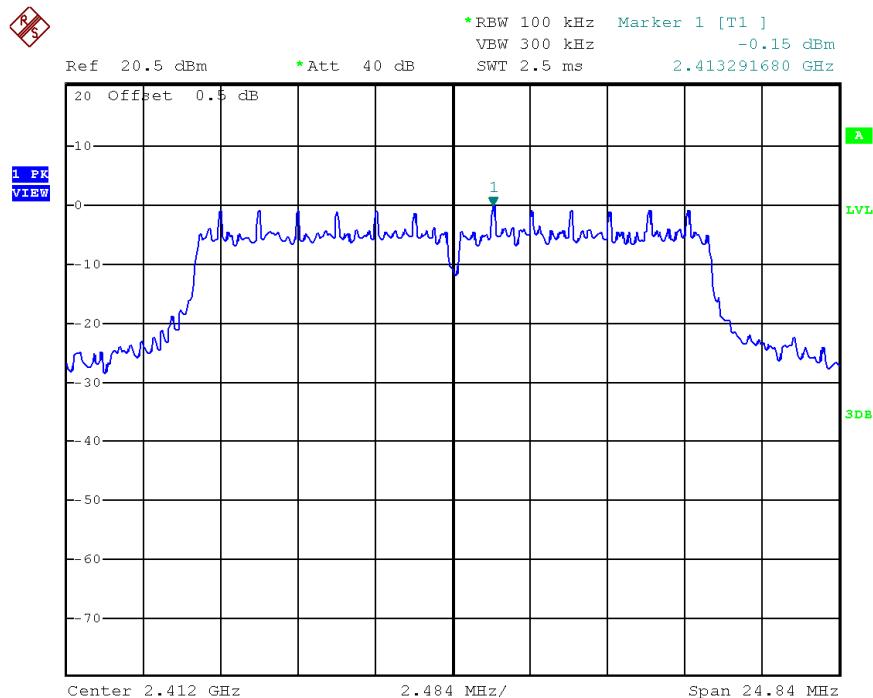


802.11g, Middle channel

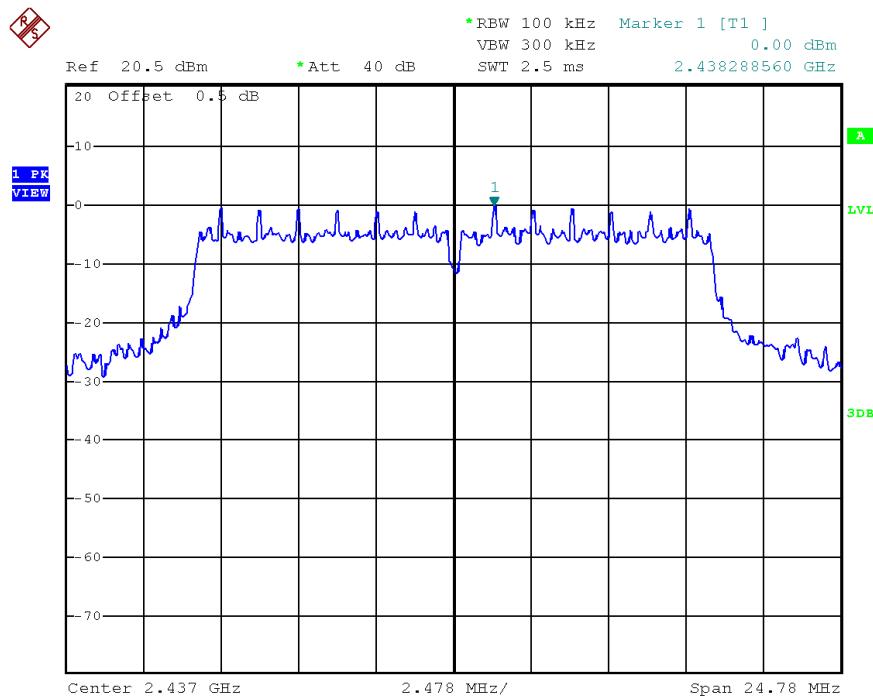

TEST REPORT**PLOTS OF POWER SPECTRAL DENSITY**


802.11g, Highest channel

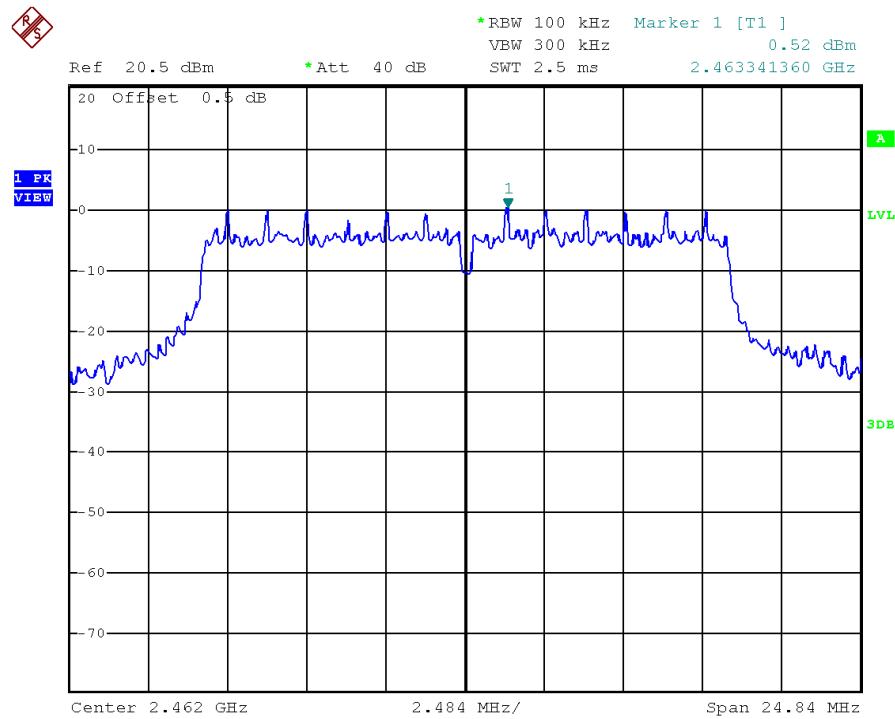


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY

802.11n (20MHz), Lowest channel

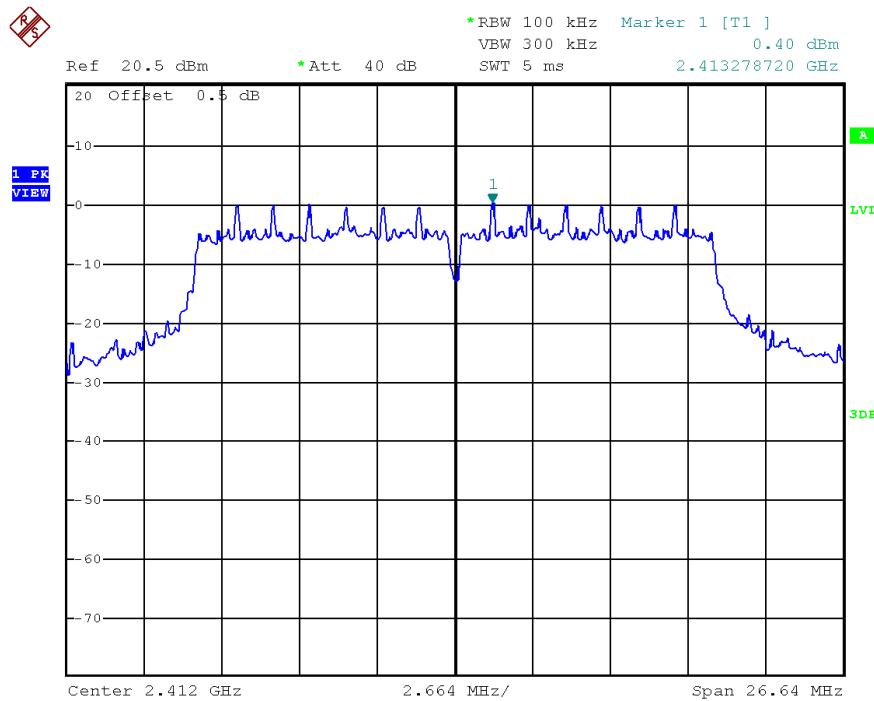


802.11n (20MHz), Middle channel

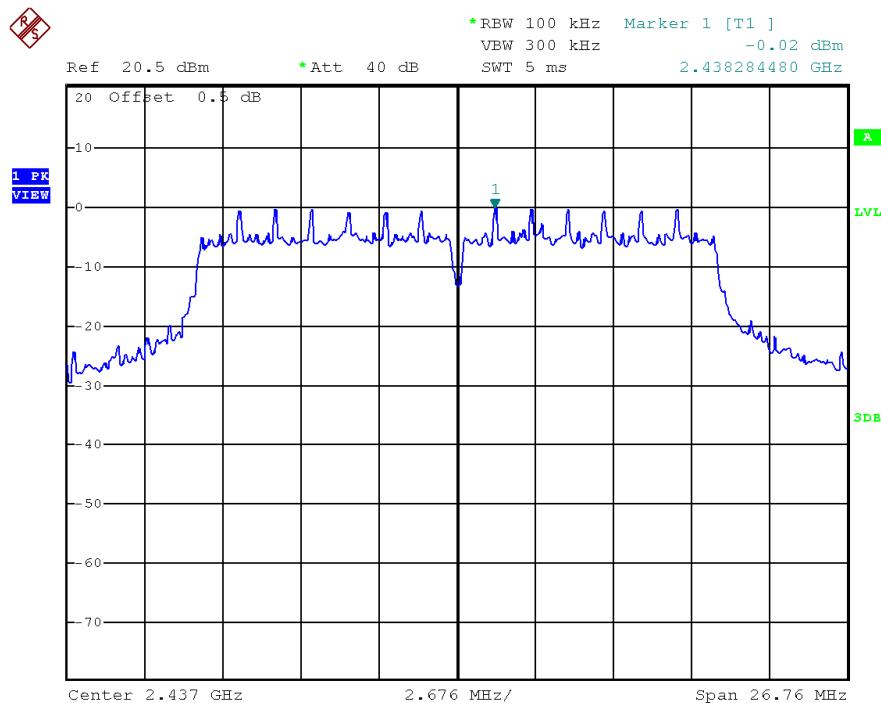

TEST REPORT**PLOTS OF POWER SPECTRAL DENSITY**

802.11n (20MHz), Highest channel

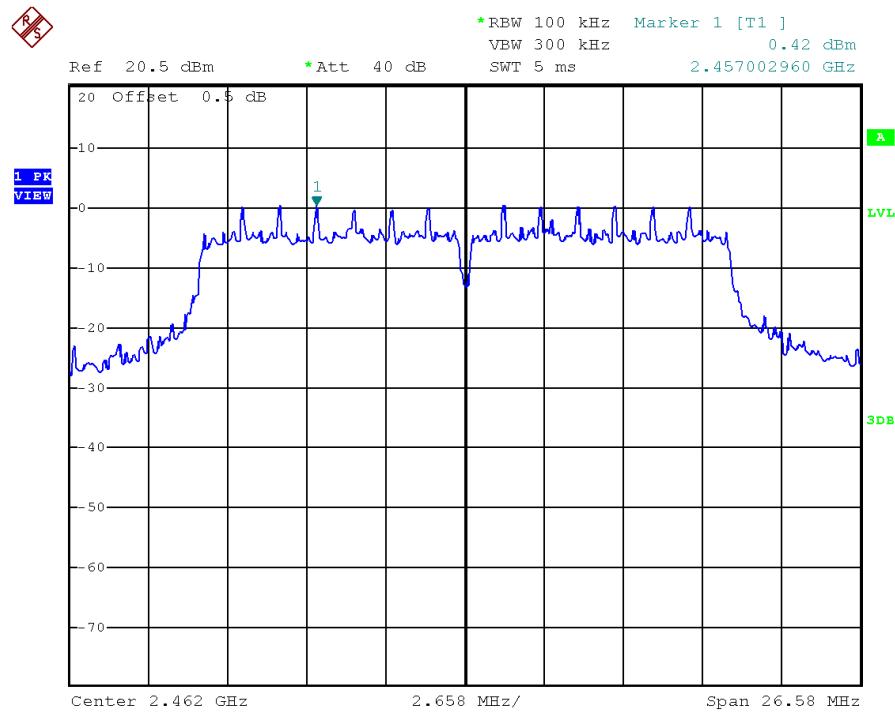

TEST REPORT

4.4 Out of Band Conducted Emissions

For 802.11b/g/n20/n40MHz, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11b/g/n20/n40MHz.

The measurement procedures under sections 11 of KDB558074 D01 v04 (05-April-2017) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.


Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least for 802.11b,g,n20MHz, n40MHz below the maximum measured in-band peak PSD level.

TEST REPORT


PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Lowest Channel, Bandedge

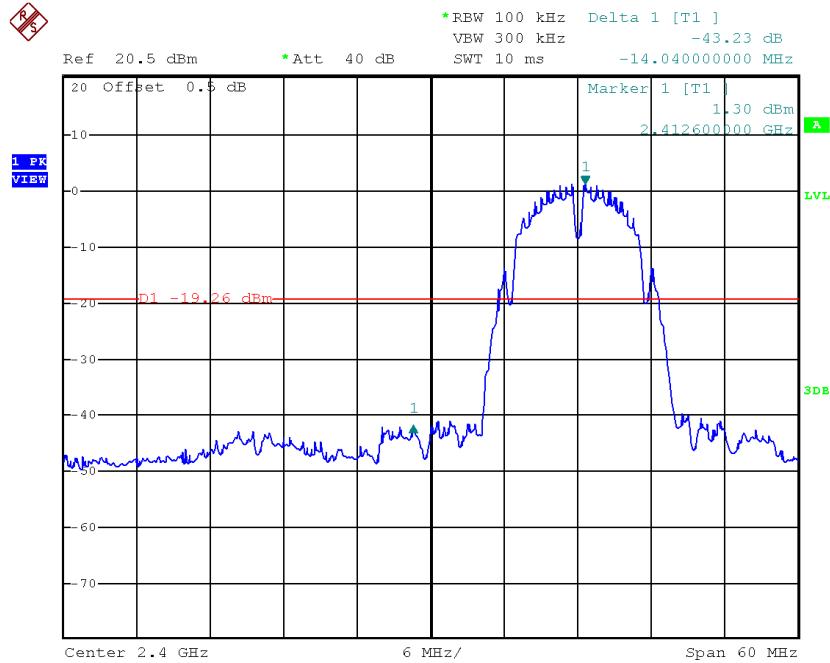

Date: 6.JUL.2018 04:55:15

802.11b, Highest Channel, Bandedge

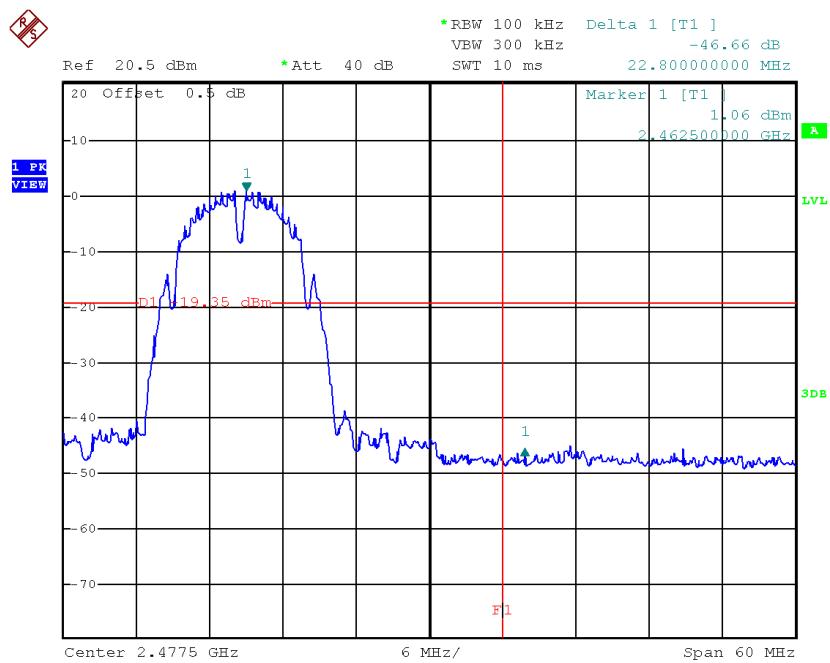


Date: 6.JUL.2018 05:07:54


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Lowest Channel, Plot A

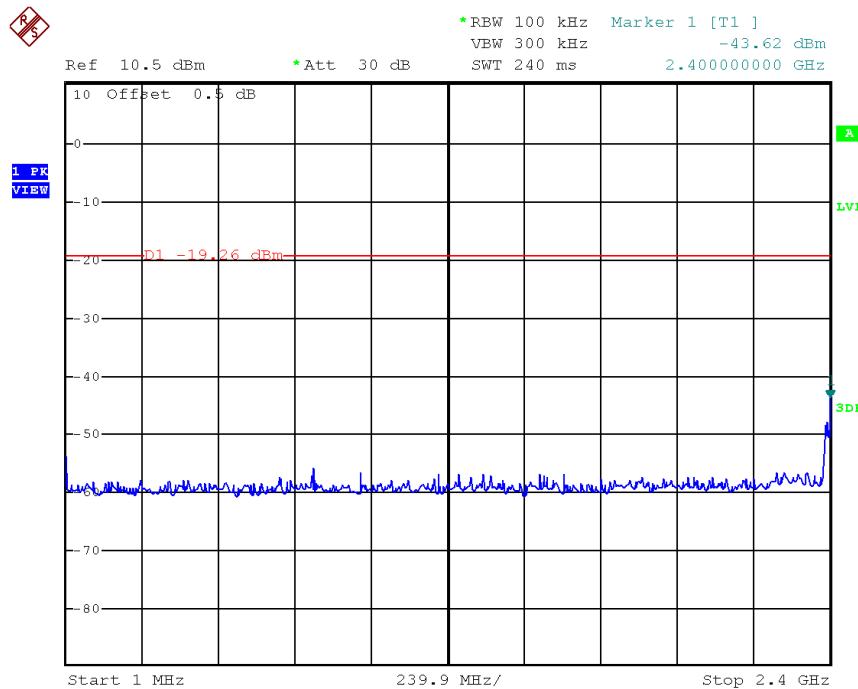


802.11b, Lowest Channel, Plot B

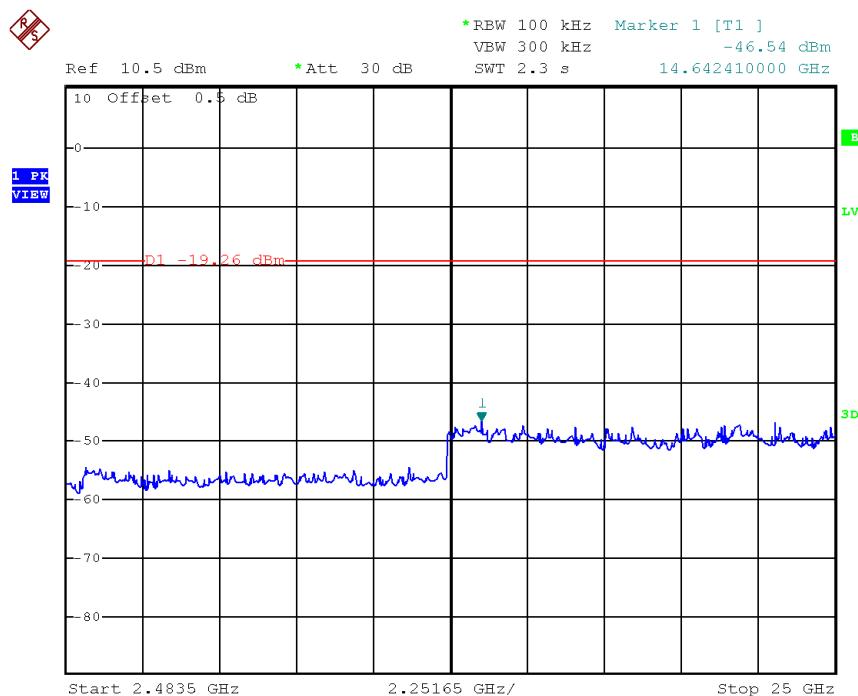


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Middle Channel, Plot A

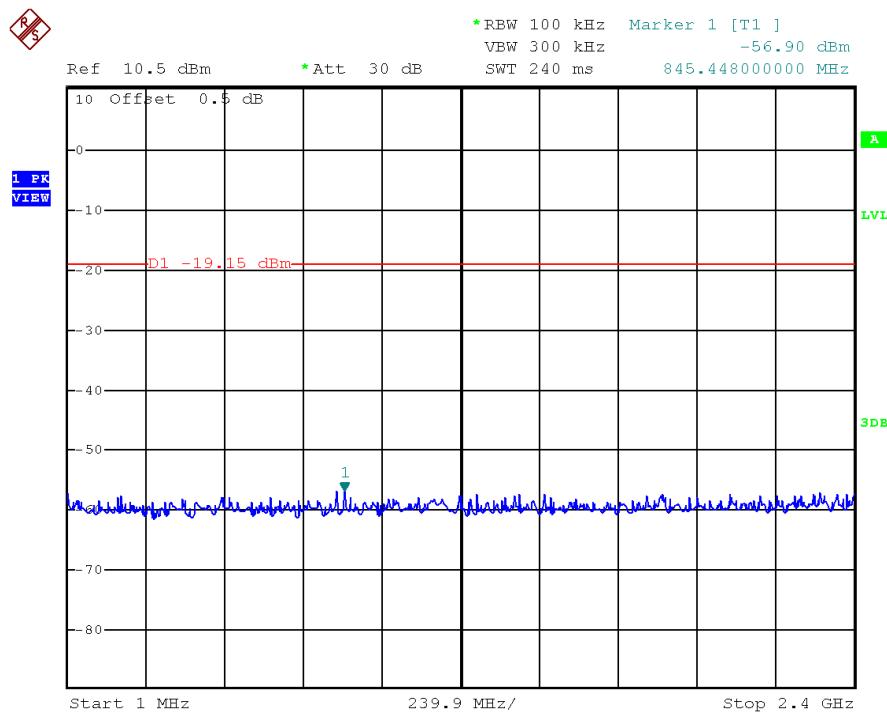


802.11b, Middle Channel, Plot B

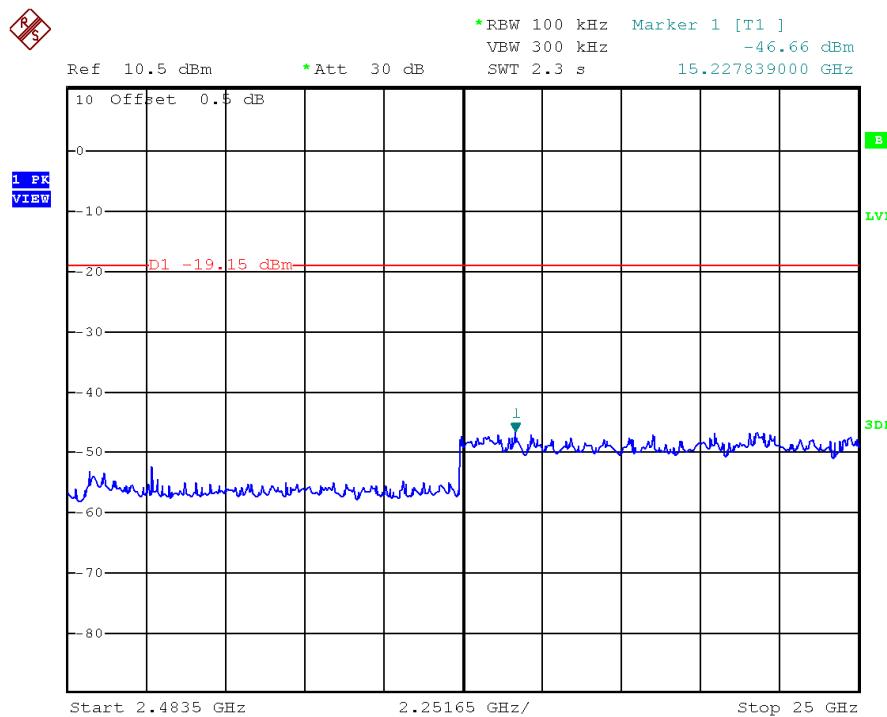


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11b, Highest Channel, Plot A

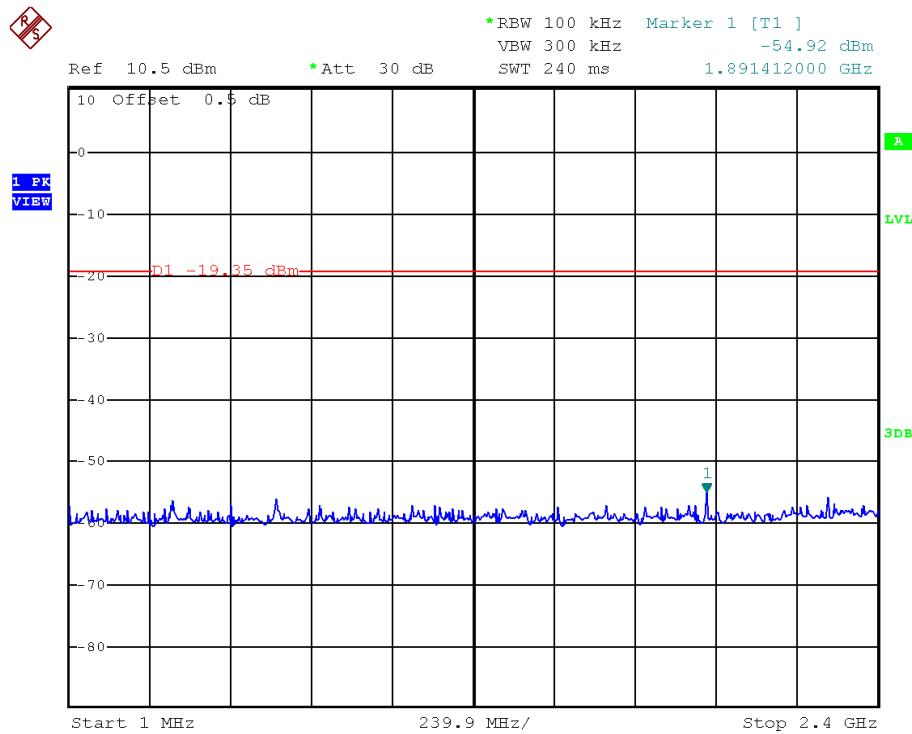


802.11b, Highest Channel, Plot B

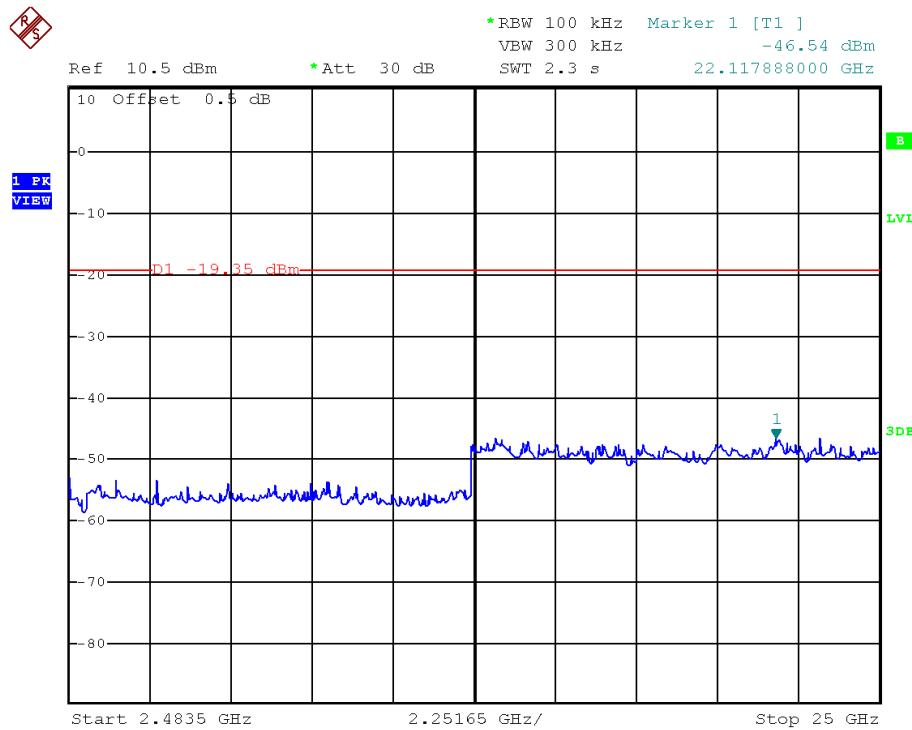

TEST REPORT


PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Lowest Channel, Bandedge

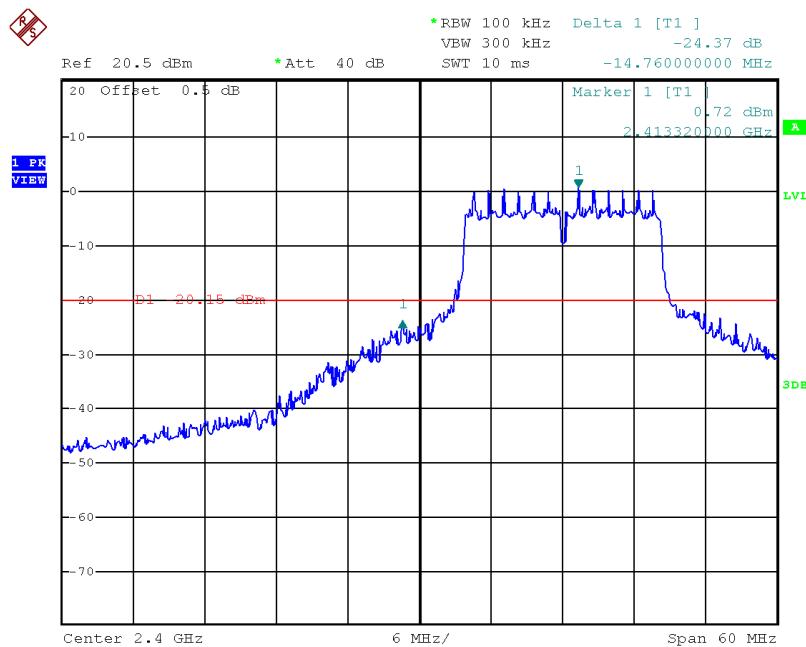

Date: 6.JUL.2018 05:00:49

802.11g, Lowest Channel, Bandedge

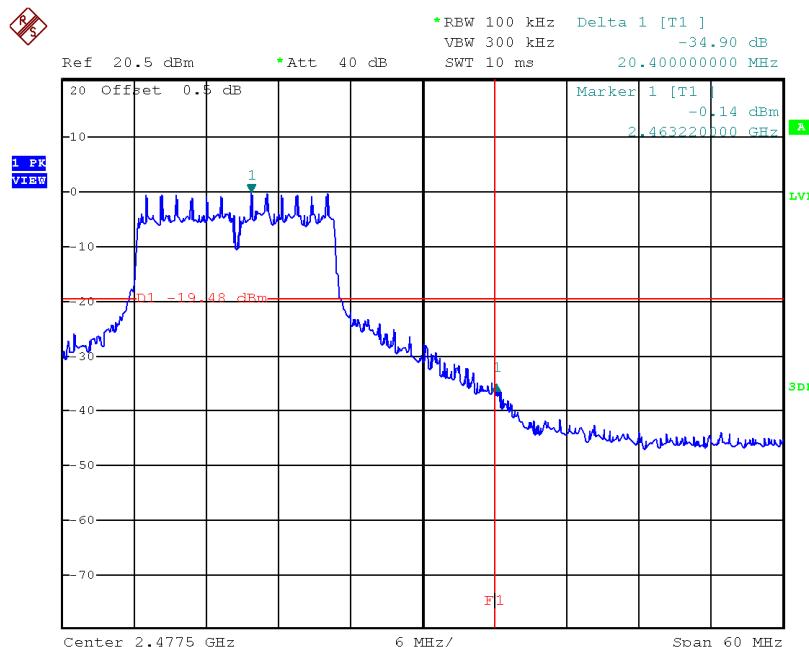


Date: 6.JUL.2018 05:09:32


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Lowest Channel, Plot A

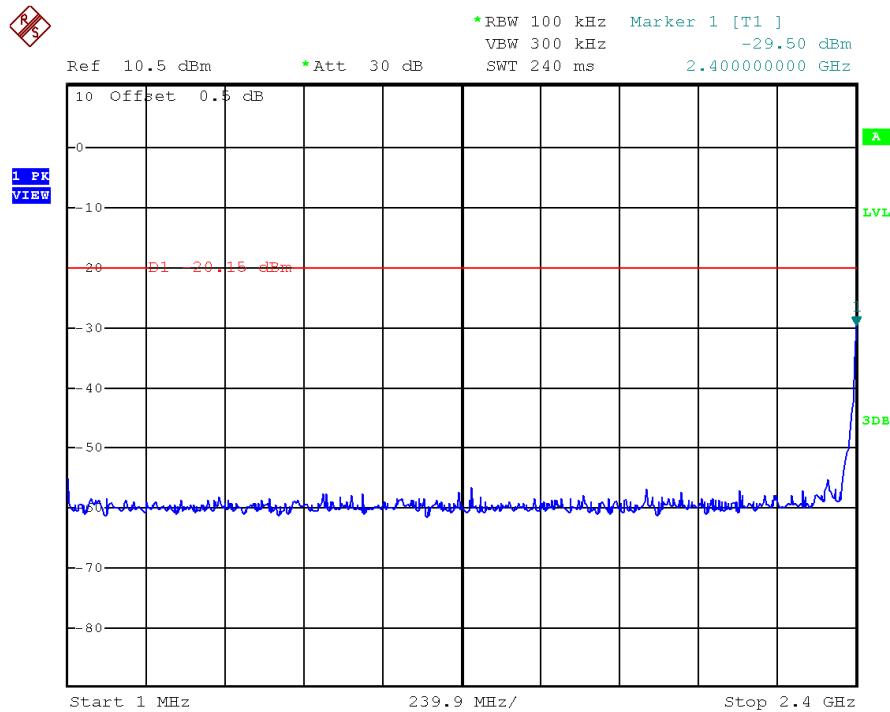


802.11g, Lowest Channel, Plot B

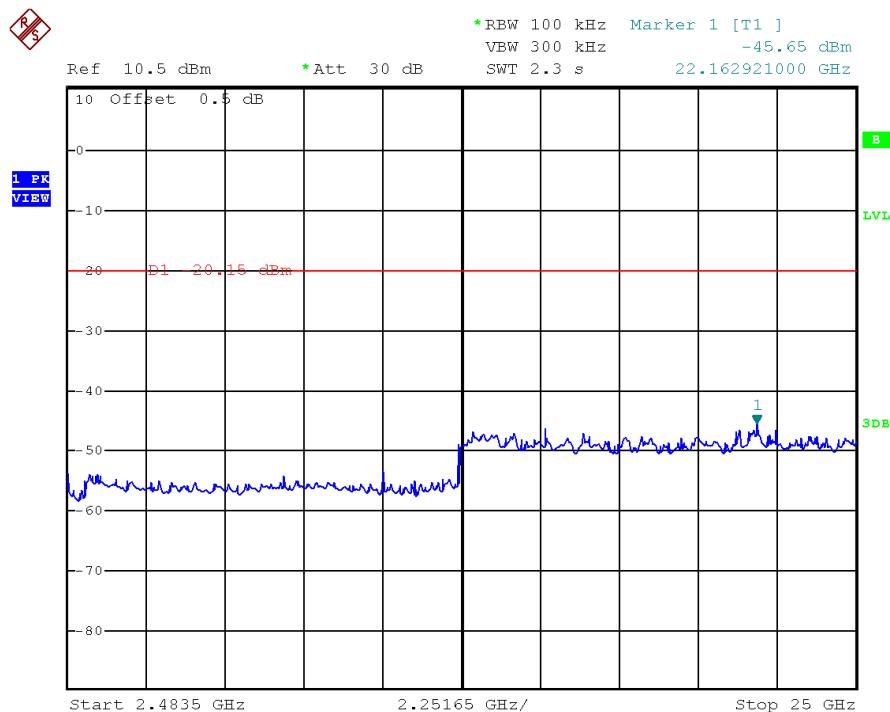


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Middle Channel, Plot A

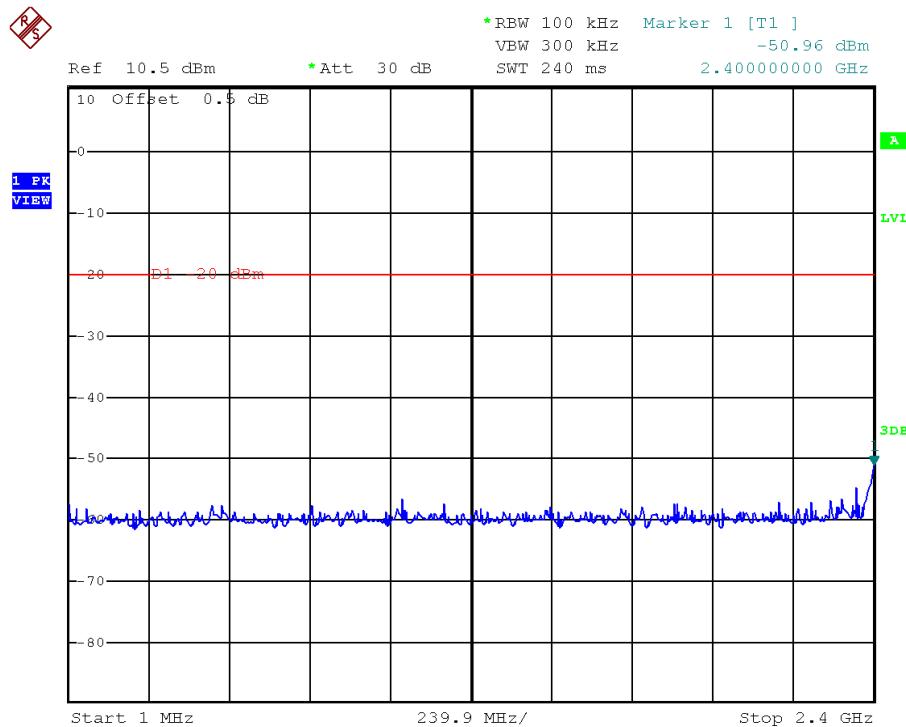


802.11g, Middle Channel, Plot B

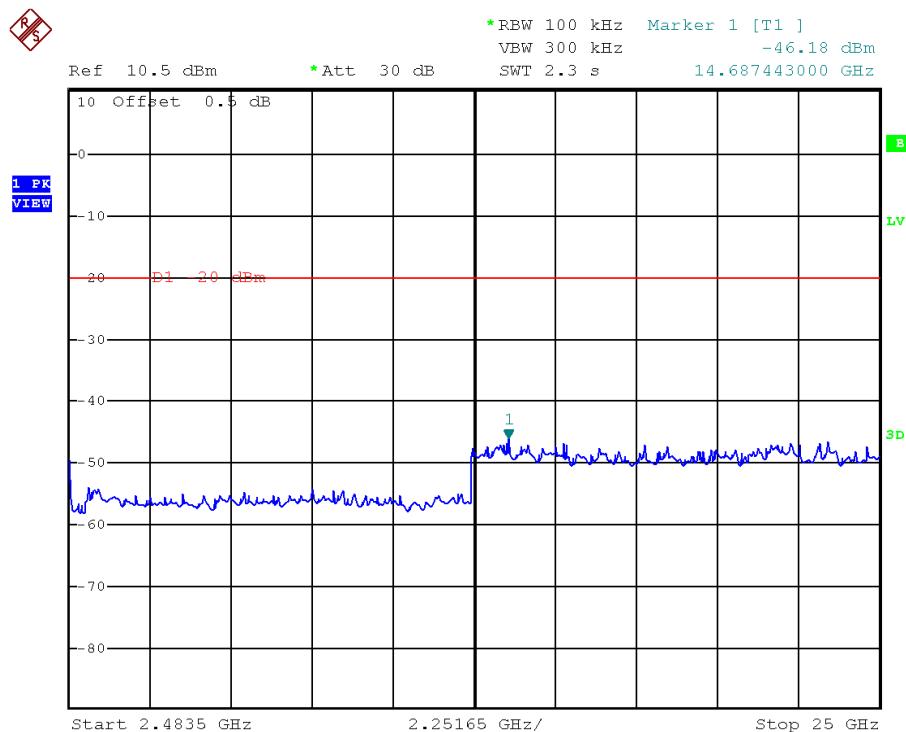


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11g, Highest Channel, Plot A

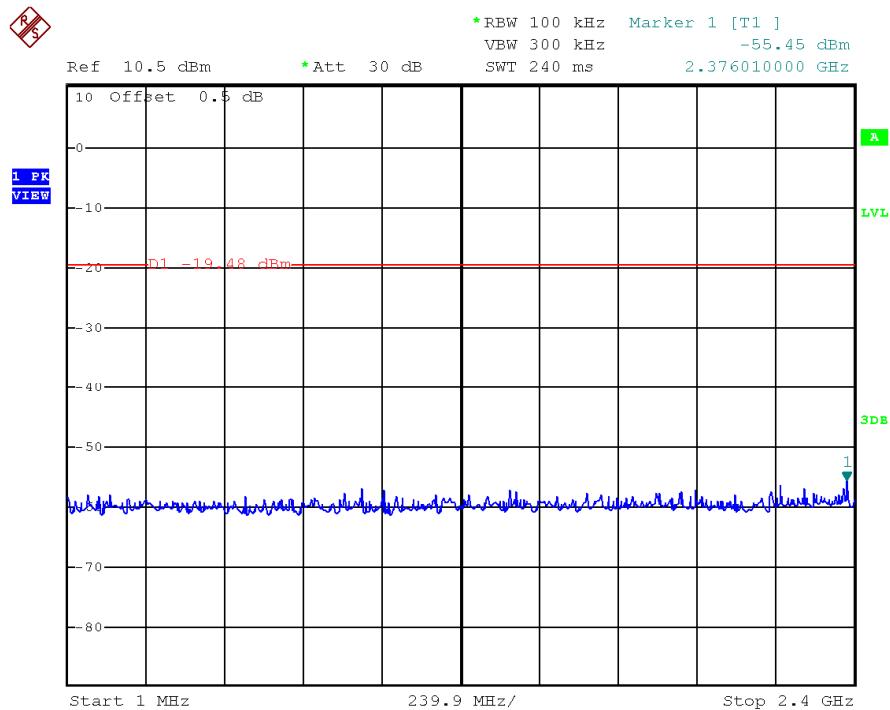


802.11g, Highest Channel, Plot B

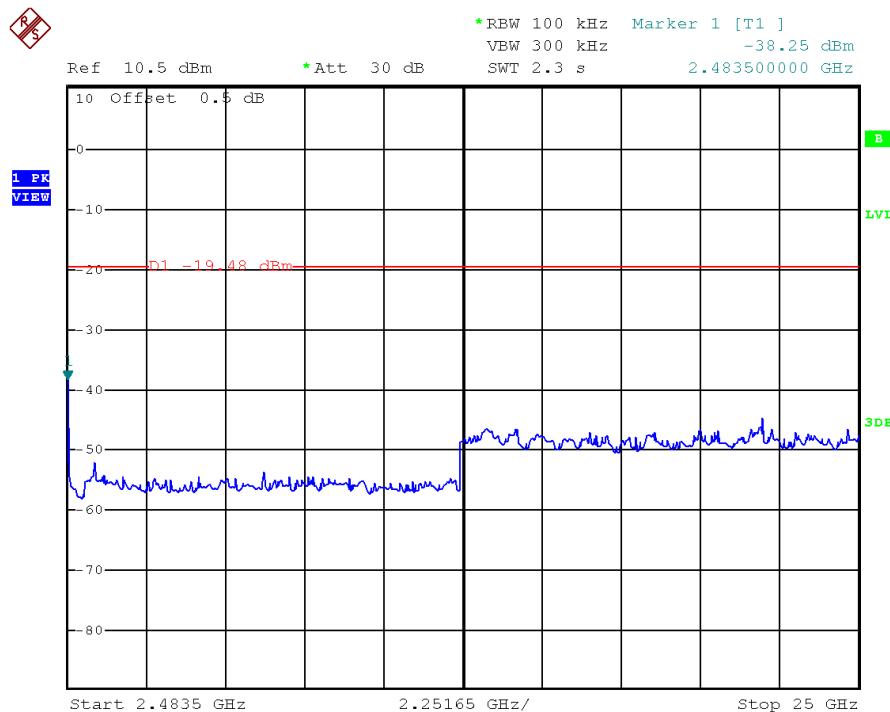

TEST REPORT


PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Lowest Channel, Plot A

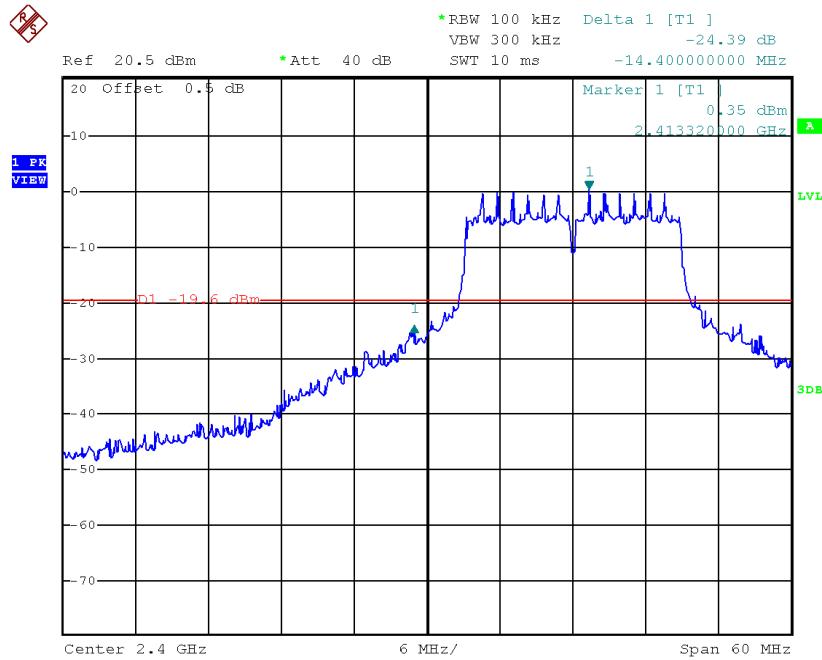

Date: 6.JUL.2018 05:04:05

802.11n (20MHz), Lowest Channel, Plot B

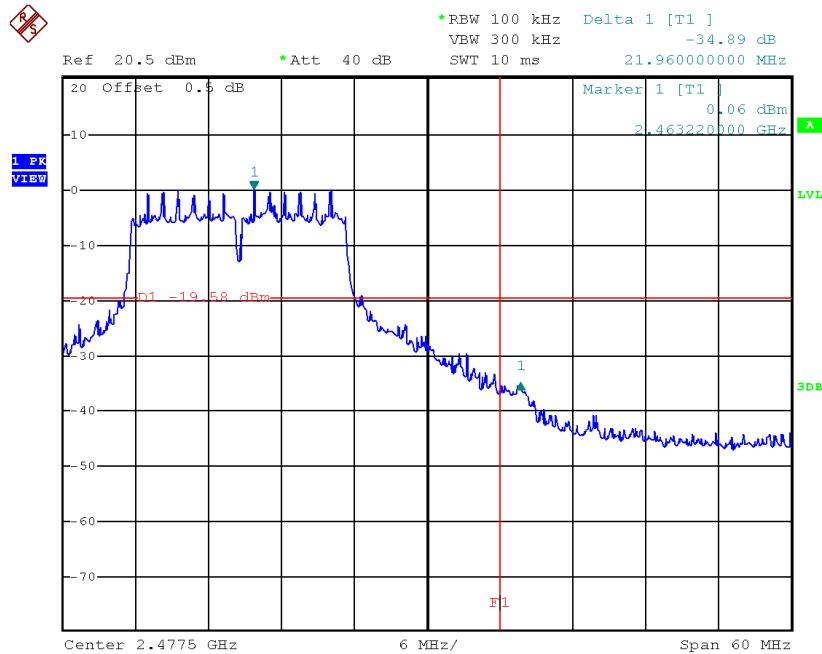


Date: 6.JUL.2018 05:11:17


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Lowest Channel, Plot A

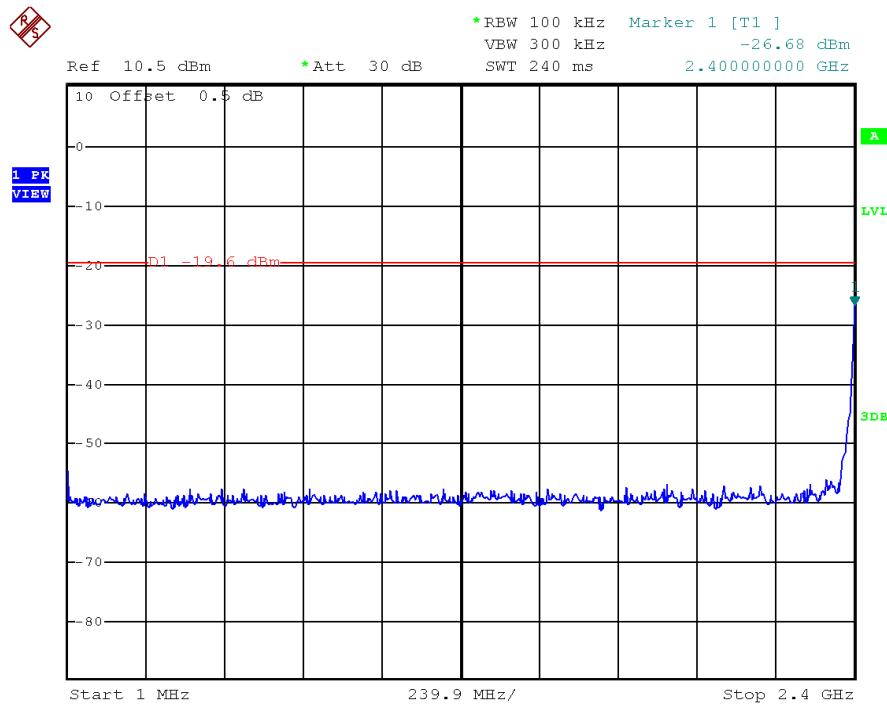


802.11n (20MHz), Lowest Channel, Plot B

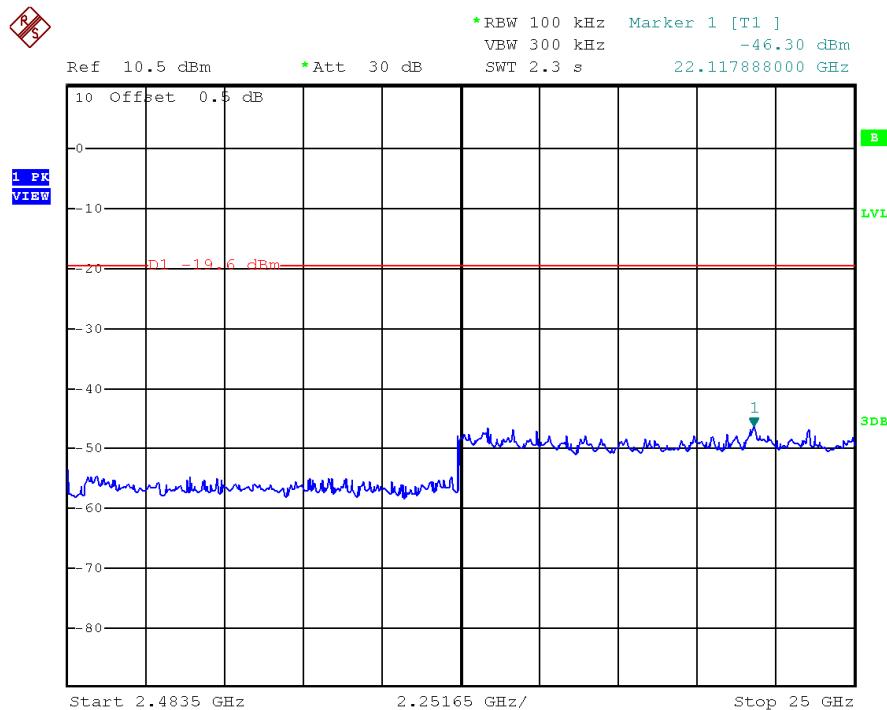


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Middle Channel, Plot A

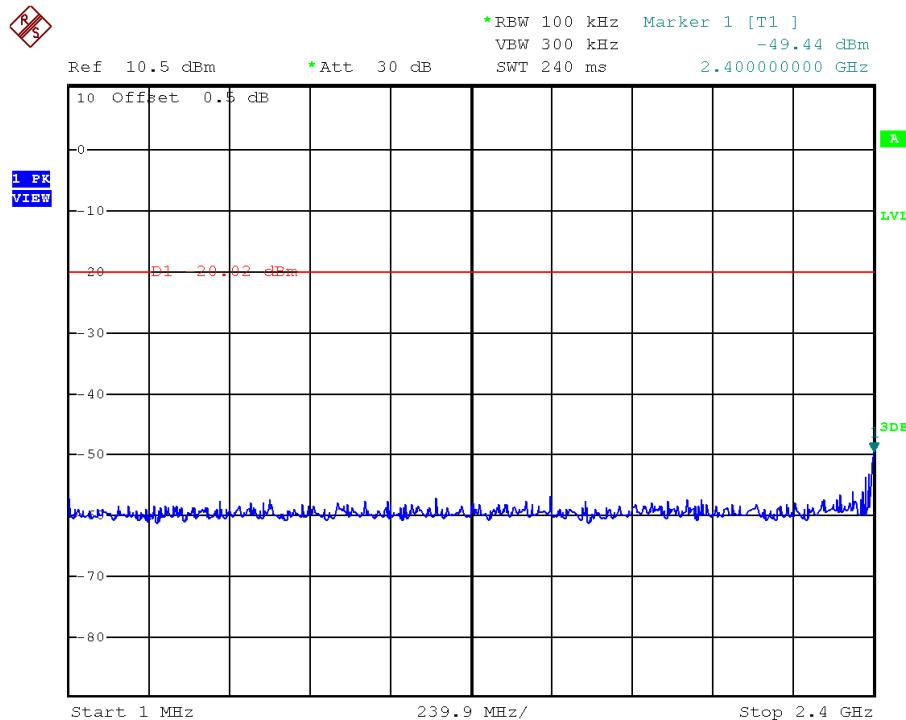


802.11n (20MHz), Middle Channel, Plot B

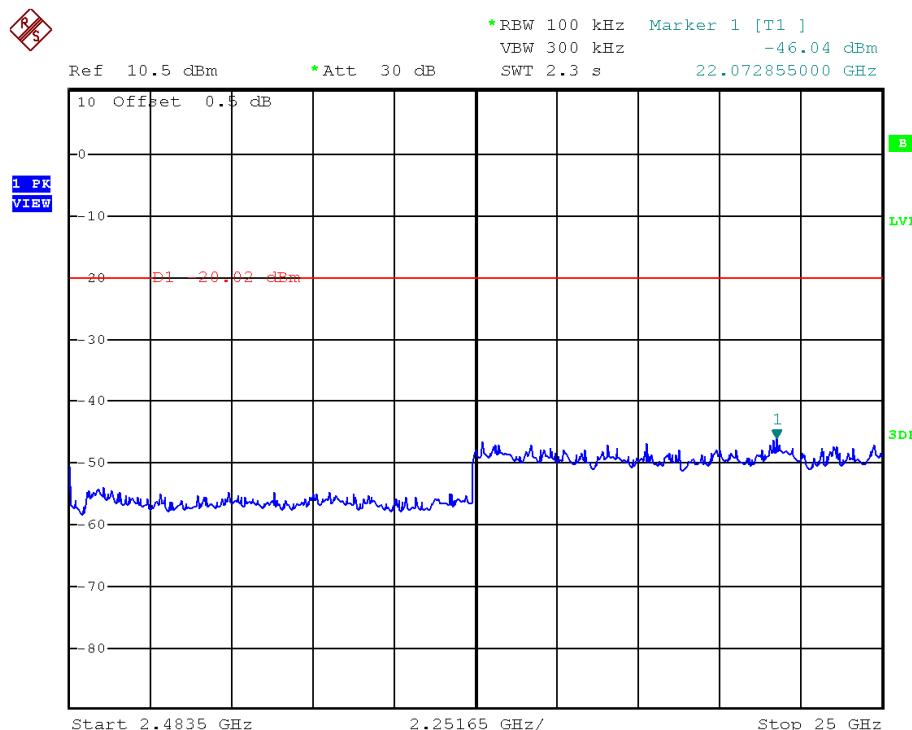


TEST REPORT

PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

802.11n (20MHz), Highest Channel, Plot A

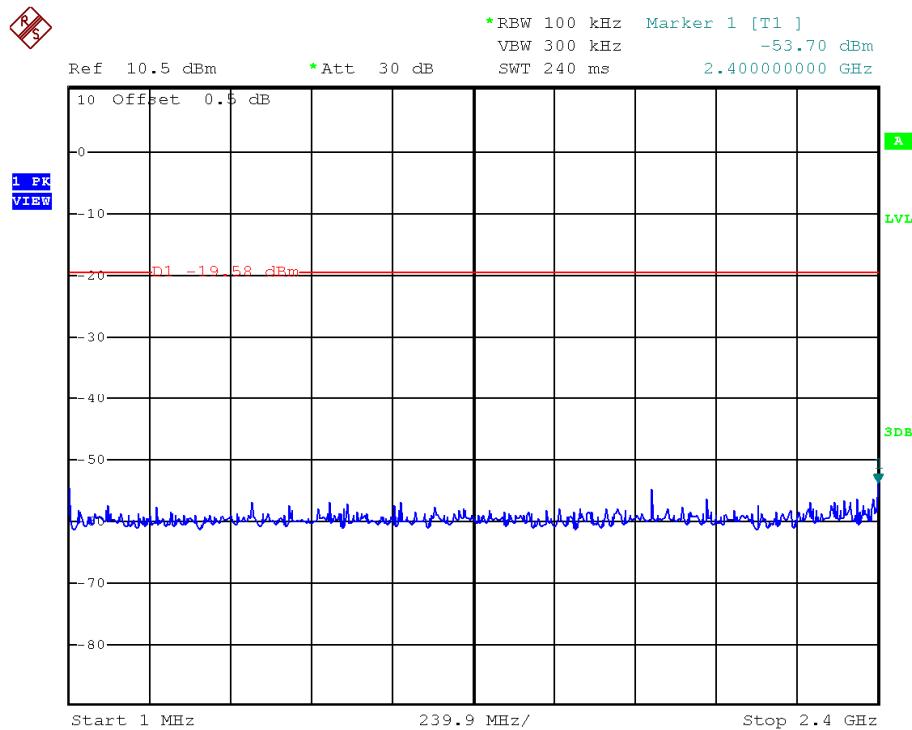

802.11n (20MHz), Highest Channel, Plot B

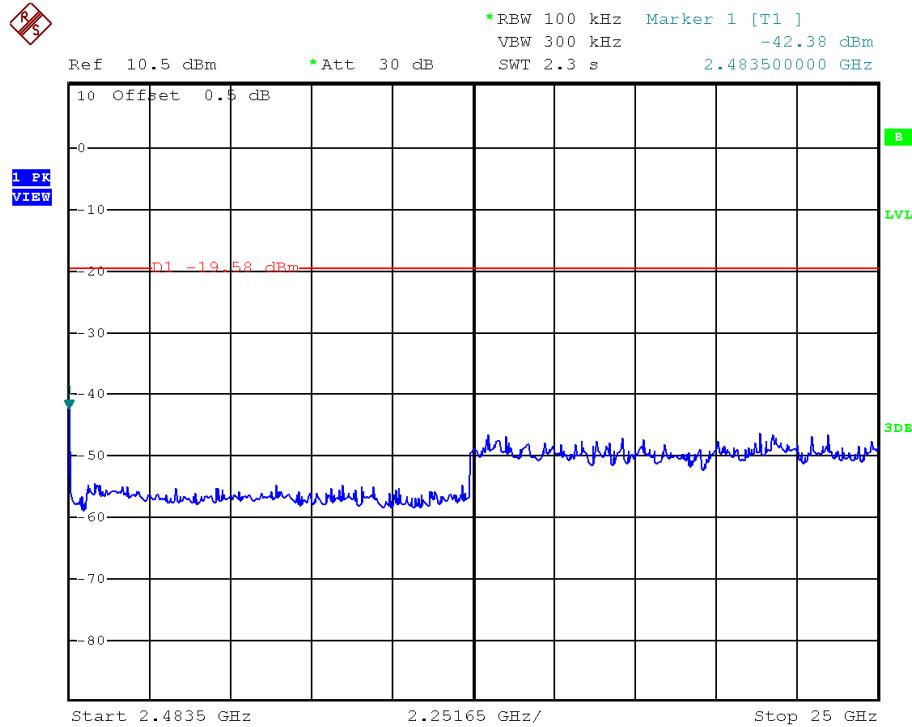

TEST REPORT

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ is converted to its corresponding level in $\mu\text{V}/\text{m}$.

RA = 62.0 $\text{dB}\mu\text{V}$

AF = 7.4 dB

CF = 1.6 dB

AG = 29.0 dB

PD = 0.0 dB

AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

TEST REPORT

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

2483.5 MHz

The worst case radiated emission configuration photographs are saved with filename: config photos.pdf

4.6.2 Radiated Emission Data

The data in tables 1-10 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.8 dB margin

TEST REPORT

RADIATED EMISSION DATA

Mode: TX-Channel 01

Table 1
 IEEE 802.11b (DSSS, 1 Mbps)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	51.8	33	29.4	48.2	54.0	-5.8
H	4824.000	49.8	33	34.9	51.7	54.0	-2.3
H	12060.000	34.3	33	40.5	41.8	54.0	-12.2

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	62.0	33	29.4	58.4	74.0	-15.6
H	4824.000	70.9	33	34.9	72.8	74.0	-1.2
H	12060.000	46.1	33	40.5	53.6	74.0	-20.4

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 06

Table 2
IEEE 802.11b (DSSS, 1 Mbps)

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	4874.000	49.6	33	34.9	51.5	54.0	-2.5
H	7311.000	31.6	33	37.9	36.5	54.0	-17.5
H	12185.000	34.1	33	40.5	41.6	54.0	-12.4

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	4874.000	70.8	33	34.9	72.7	74.0	-1.3
H	7311.000	43.6	33	37.9	48.5	74.0	-25.5
H	12185.000	45.8	33	40.5	53.3	74.0	-20.7

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 11

Table 3
IEEE 802.11b (DSSS, 1 Mbps)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	49.9	33	29.4	46.3	54.0	-7.7
H	4924.000	49.9	33	34.9	51.8	54.0	-2.2
H	7386.000	31.9	33	37.9	36.8	54.0	-17.2
H	12310.000	34.2	33	40.5	41.7	54.0	-12.3

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	57.3	33	29.4	53.7	74.0	-20.3
H	4924.000	71.1	33	34.9	73.0	74.0	-1.0
H	7386.000	43.9	33	37.9	48.8	74.0	-25.2
H	12310.000	45.9	33	40.5	53.4	74.0	-20.6

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 01

Table 4
IEEE 802.11g (OFDM, 6 Mbps)

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	53.9	33	29.4	50.3	54.0	-3.7
H	4824.000	39.8	33	34.9	41.7	54.0	-12.3
H	12060.000	34.1	33	40.5	41.6	54.0	-12.4

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	74.0	33	29.4	70.4	74.0	-3.6
H	4824.000	69.6	33	34.9	71.5	74.0	-2.5
H	12060.000	45.9	33	40.5	53.4	74.0	-20.6

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 06

Table 5
IEEE 802.11g (OFDM, 6 Mbps)

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	4874.000	40.1	33	34.9	42.0	54.0	-12.0
H	7311.000	33.3	33	37.9	38.2	54.0	-15.8
H	12185.000	34.2	33	40.5	41.7	54.0	-12.3

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	4874.000	70.2	33	34.9	72.1	74.0	-1.9
H	7311.000	49.4	33	37.9	54.3	74.0	-19.7
H	12185.000	46.1	33	40.5	53.6	74.0	-20.4

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 11

Table 6
IEEE 802.11g (OFDM, 6 Mbps)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	55.4	33	29.4	51.8	54.0	-2.2
H	4924.000	40.3	33	34.9	42.2	54.0	-11.8
H	7386.000	33.6	33	37.9	38.5	54.0	-15.5
H	12310.000	33.9	33	40.5	41.4	54.0	-12.6

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	76.8	33	29.4	73.2	74.0	-0.8
H	4924.000	70.3	33	34.9	72.2	74.0	-1.8
H	7386.000	49.7	33	37.9	54.6	74.0	-19.4
H	12310.000	45.8	33	40.5	53.3	74.0	-20.7

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 01

Table 7
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	54.1	33	29.4	50.5	54.0	-3.5
H	4824.000	39.9	33	34.9	41.8	54.0	-12.2
H	12060.000	34.2	33	40.5	41.7	54.0	-12.3

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2390.000	74.3	33	29.4	70.7	74.0	-3.3
H	4824.000	69.3	33	34.9	71.2	74.0	-2.8
H	12060.000	46.2	33	40.5	53.7	74.0	-20.3

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 06

Table 8
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	4874.000	40.6	33	34.9	42.5	54.0	-11.5
H	7311.000	33.5	33	37.9	38.4	54.0	-15.6
H	12185.000	33.9	33	40.5	41.4	54.0	-12.6

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	4874.000	70.4	33	34.9	72.3	74.0	-1.7
H	7311.000	49.4	33	37.9	54.3	74.0	-19.7
H	12185.000	45.8	33	40.5	53.3	74.0	-20.7

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: TX-Channel 11

Table 9
IEEE 802.11n (20MHz) (OFDM, MCS0)

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	54.5	33	29.4	50.9	54.0	-3.1
H	4924.000	40.6	33	34.9	42.5	54.0	-11.5
H	7386.000	33.4	33	37.9	38.3	54.0	-15.7
H	12310.000	34.1	33	40.5	41.6	54.0	-12.4

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2483.500	76.0	33	29.4	72.4	74.0	-1.6
H	4924.000	70.4	33	34.9	72.3	74.0	-1.7
H	7386.000	49.1	33	37.9	54.0	74.0	-20.0
H	12310.000	46.0	33	40.5	53.5	74.0	-20.5

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

TEST REPORT

Mode: Wifi Operating with Charging

Table 10

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	31.732	32.0	16	10.0	26.0	40.0	-14.0
V	43.510	27.2	16	10.0	21.2	40.0	-18.8
V	68.350	43.0	16	8.0	35.0	40.0	-5.0
V	103.062	37.5	16	13.0	34.5	43.5	-9.0
V	123.085	42.5	16	14.0	40.5	43.5	-3.0
V	164.345	34.8	16	17.0	35.8	43.5	-7.7
V	180.072	27.2	16	20.0	31.2	43.5	-12.3
V	201.135	29.4	16	16.0	29.4	43.5	-14.1
H	244.890	22.8	16	20.0	26.8	46.0	-19.2
H	319.960	17.2	16	23.0	24.2	46.0	-21.8
H	399.985	18.4	16	25.0	27.4	46.0	-18.6
H	639.992	23.0	16	29.0	36.0	46.0	-10.0
H	800.006	17.0	16	31.0	32.0	46.0	-14.0


NOTES: 1. Quasi-Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.


TEST REPORT

4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

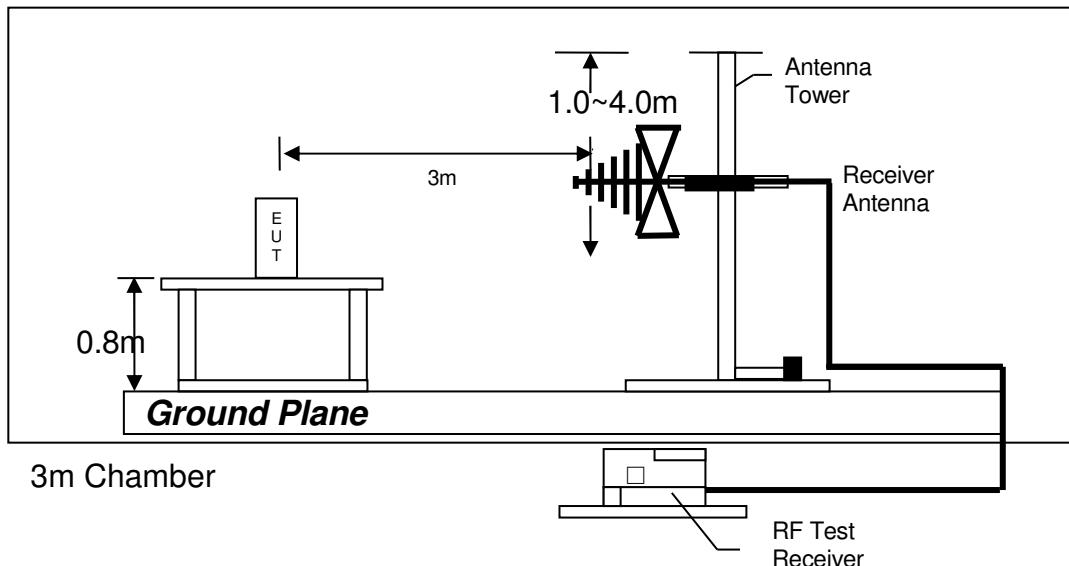

Test setup of radiated emissions up to 1GHz

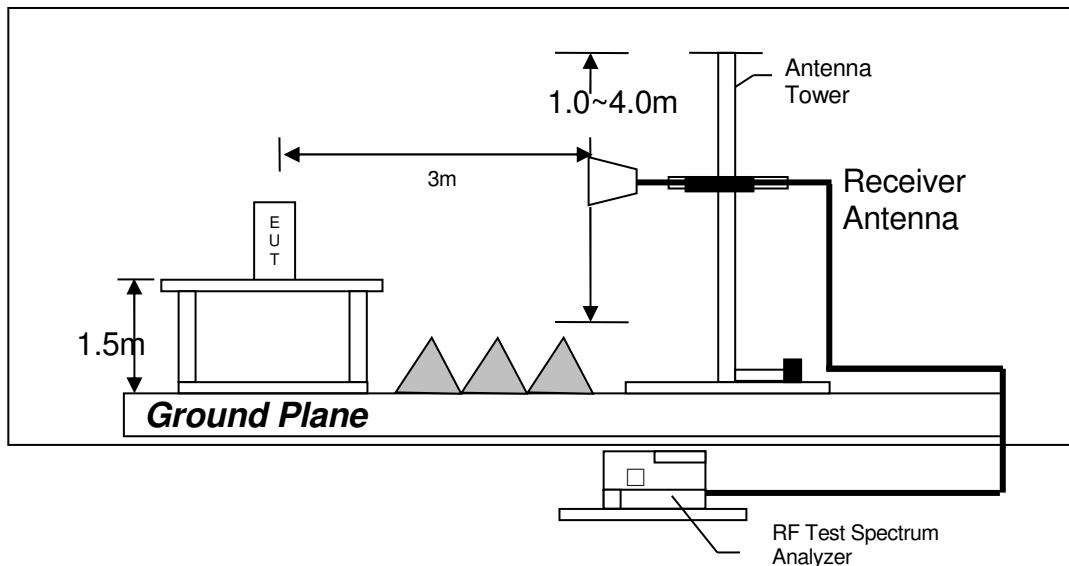

Test setup of radiated emissions above 1GHz

TEST REPORT

4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

TEST REPORT

4.7 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at
0.348 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.7.2 AC Power Line Conducted Emission Data


The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 6.5 dB margin compare with Quasi-peak limit

TEST REPORT

AC POWER LINE CONDUCTED EMISSION

Worst Case: Wifi Operating with Charging

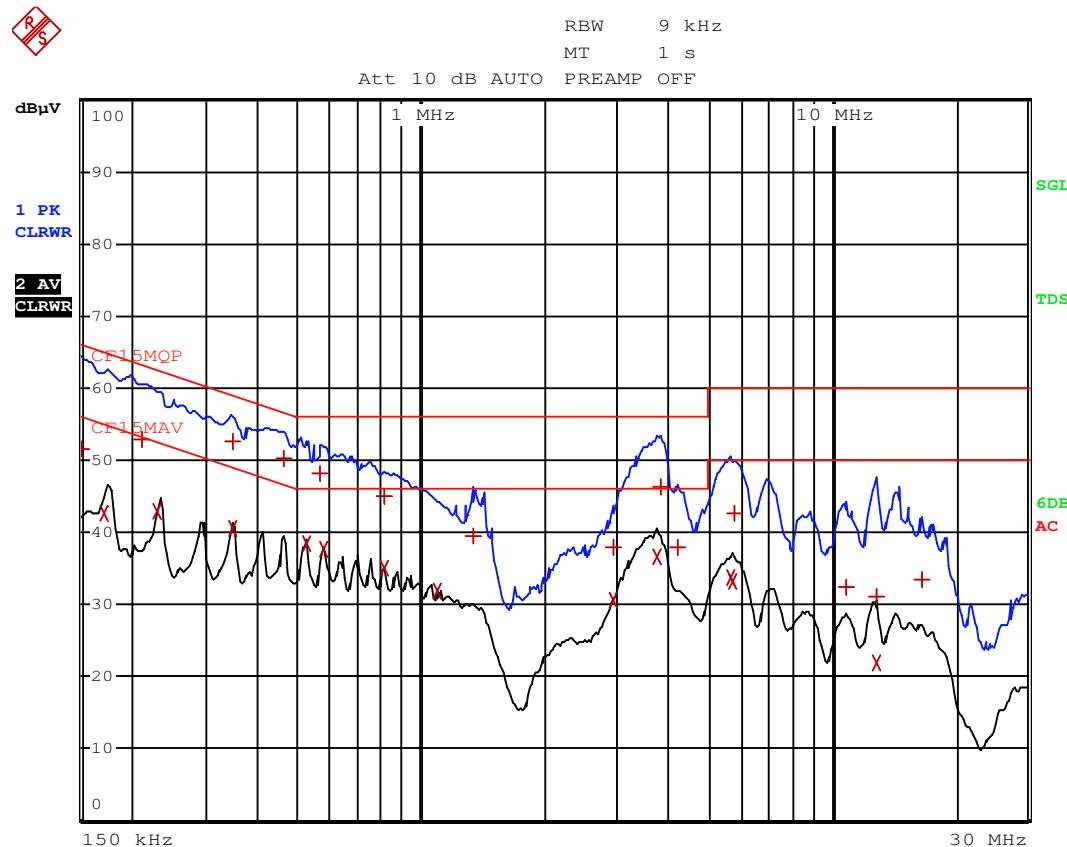

Date: 16.JUL.2018 05:24:49

TEST REPORT**Worst Case: Wifi Operating with Charging**

EDIT PEAK LIST (Final Measurement Results)						
Trace1:	CF15MQP					
Trace2:	CF15MAV					
Trace3:	---					
TRACE	FREQUENCY	LEVEL	dB μ V	N	DELTA	LIMIT dB
1	Quasi Peak 150 kHz	51.61		N	-14.38	
2	CISPR Average 172.5 kHz	42.55		L1	-12.28	
1	Quasi Peak 213 kHz	52.79		N	-10.28	
2	CISPR Average 231 kHz	42.85		L1	-9.55	
1	Quasi Peak 348 kHz	52.55		N	-6.45	
2	CISPR Average 348 kHz	40.56		N	-8.44	
1	Quasi Peak 460.5 kHz	50.19		L1	-6.49	
2	CISPR Average 523.5 kHz	38.48		N	-7.52	
1	Quasi Peak 568.5 kHz	48.15		L1	-7.84	
2	CISPR Average 577.5 kHz	37.64		N	-8.35	
1	Quasi Peak 811.5 kHz	44.91		L1	-11.08	
2	CISPR Average 816 kHz	35.00		N	-10.99	
2	CISPR Average 1.0995 MHz	31.95		N	-14.04	
1	Quasi Peak 1.338 MHz	39.56		N	-16.43	
1	Quasi Peak 2.94 MHz	37.88		L1	-18.12	
2	CISPR Average 2.949 MHz	30.46		L1	-15.53	
2	CISPR Average 3.759 MHz	36.53		N	-9.46	
1	Quasi Peak 3.822 MHz	46.43		N	-9.56	
1	Quasi Peak 4.2225 MHz	37.93		N	-18.06	
2	CISPR Average 5.6715 MHz	33.70		N	-16.29	

Date: 16.JUL.2018 05:24:00


TEST REPORT**Worst Case: Wifi Operating with Charging**

EDIT PEAK LIST (Final Measurement Results)						
Trace1:	CF15MQP					
Trace2:	CF15MAV					
Trace3:	---					
TRACE	FREQUENCY	LEVEL	dB μ V	N	DELTA	LIMIT dB
2	CISPR Average 5.73 MHz	33.22		N	-16.77	
1	Quasi Peak 5.7705 MHz	42.61		L1	-17.38	
1	Quasi Peak 10.788 MHz	32.41		N	-27.58	
2	CISPR Average 12.804 MHz	21.89		L1	-28.10	
1	Quasi Peak 12.8265 MHz	30.99		L1	-29.00	
1	Quasi Peak 16.593 MHz	33.53		L1	-26.46	

Date: 16.JUL.2018 05:24:28

TEST REPORT

4.7.3 Conducted Emission Test Setup

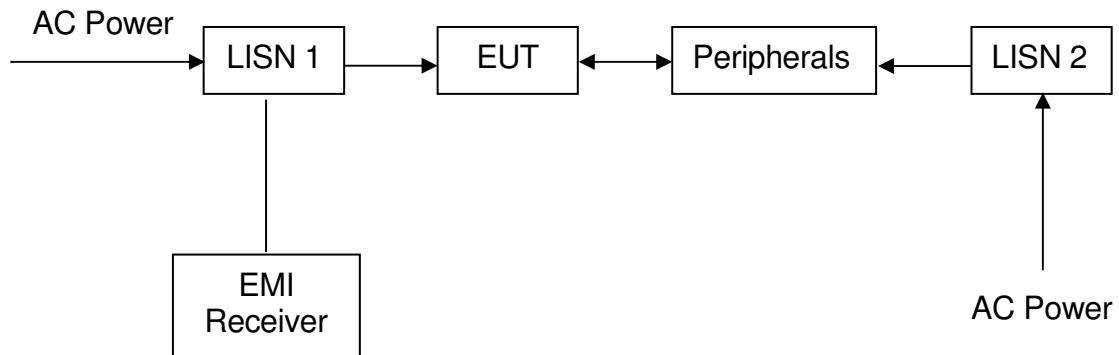

TEST REPORT

EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Biconical Antenna	Log Periodic Antenna
Registration No.	EW-3156	EW-0954	EW-0447
Manufacturer	ROHDE SCHWARZ	EMCO	EMCO
Model No.	ESR26	3104C	3146
Calibration Date	November 10, 2017	February 27, 2018	January 17, 2018
Calibration Due Date	November 10, 2018	August 27, 2019	July 17, 2019

Equipment	Active Loop H-field (9kHz to 30MHz)	12m Double Shield RF Cable (20MHz to 6GHz)	RF Cable (up to 40GHz)
Registration No.	EW-2313	EW-1852	EW-3155
Manufacturer	ELECTROMETRI	RADIALL	N/A
Model No.	EM-6876	N(m)-RG142 - N(m)	1-40 GHz
Calibration Date	March 08, 2018	January 19, 2018	January 29, 2018
Calibration Due Date	September 08, 2019	January 19, 2019	January 29, 2019

Equipment	Double Ridged Guide Antenna	Pyramidal Horn Antenna	Spectrum Analyzer
Registration No.	EW-1015	EW-0905	EW-3110
Manufacturer	EMCO	EMCO	R&S
Model No.	3115	3160-09	FSP30
Calibration Date	November 17, 2017	August 18, 2017	March 05, 2018
Calibration Due Date	May 17, 2019	February 18, 2019	March 05, 2019

Equipment	Notch Filter (cutoff frequency 2.4GHz to 2.5GHz)	Solid State Low Noise Preamplifier Assembly (1 - 18)GHz	RF Pre-amplifier (9kHz to 40GHz)
Registration No.	EW-2213	EW-3229	EW-3006
Manufacturer	MICROTRONICS	BONN ELEKTRO	SCHWARZBECK
Model No.	BRM50701-02	BLMA 0118-5G	BBV 9744
Calibration Date	May 24, 2018	January 30, 2018	April 26, 2018
Calibration Due Date	May 24, 2019	January 30, 2019	April 26, 2019

TEST REPORT

2) Conductive Measurement Test

Equipment	Spectrum Analyzer	RF Cable (up to 40GHz) 1.5m length	RF Power Meter with Power Sensor (N1921A)
Registration No.	EW-3110	EW-3104	EW-2270
Manufacturer	R&S	N/A	N/A
Model No.	FSP30	SMA-M to SMA-M	AGILENTTECH
Calibration Date	March 05, 2018	July 03, 2018	January 15, 2018
Calibration Due Date	March 05, 2019	July 03, 2019	January 15, 2019

TEST REPORT

3) Bandedge/Bandwidth Measurement

Equipment	RF Cable (up to 40GHz) 1.5m length	Spectrum Analyzer
Registration No.	EW-3104	EW-3110
Manufacturer	N/A	R&S
Model No.	SMA-M to SMA-M	FSP30
Calibration Date	July 03, 2018	March 05, 2018
Calibration Due Date	July 03, 2019	March 05, 2019

4) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142)	EMI Test Receiver	Artificial Mains Network
Registration No.	EW-2454	EW-3156	EW-2501
Manufacturer	RADIALL	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	bnc m st / 142 /bnc m ra 240cm	ESR26	ENV-216
Calibration Date	March 27, 2018	November 10, 2017	February 14, 2018
Calibration Due Date	March 27, 2019	November 10, 2018	February 14, 2019

END OF TEST REPORT