

**Test Report for the
EMC Testing of
Inductosense Wand 2.0
for
Spark Product Innovation**

Test Report number B2379TR1

Project number B3833



S. Pandey

Author:
Samiksha Pandey
Test Engineer

Checked:
Mr David Feasey, Technical Manager

Approved:
Mr David Feasey, Technical Manager

| Issue | Description | | | | | Issue by | Date |
|-------|-------------|--|--------|--|-----|----------|----------------------------|
| 1 | Copy 1 | | Copy 2 | | PDF | DF | 17 th July 2018 |

This report shall not be reproduced, except in full without the prior written approval of Eurofins York.
The results contained in this report are only applicable to the apparatus tested.



A BEIS designated Notified Body No 2636



Registered Address: Eurofins York
154 Business Park, Valiant Way, Wolverhampton, WV9 5GB, UK
Registered in England and Wales
Company Reg No. 6048589 | VAT Reg No. 887 1276 83

CONTENTS

| | |
|---|-----------|
| Test Report Change History | 4 |
| Section 1 Test Location..... | 5 |
| 1.1 UKAS Accreditation..... | 5 |
| Section 2 Customer Information | 6 |
| Section 3 Equipment Details..... | 7 |
| 3.1 Equipment Under Test (EUT)..... | 7 |
| 3.2 EUT Photos | 8 |
| 3.3 Configuration of EUT..... | 10 |
| 3.4 EUT Monitoring/Auxiliary Equipment | 10 |
| 3.5 Monitoring Software | 11 |
| Section 4 Test Specifications | 12 |
| 4.1 Knowledge Database References..... | 14 |
| 4.1.1 Conducted Emissions | 14 |
| 4.1.2 Radiated Emissions (30MHz to 1000MHz)..... | 14 |
| 4.1.3 Radiated Emissions (1GHz to 18/40GHz) | 14 |
| 4.2 Compliance Statement..... | 14 |
| 4.3 Test Sequence | 15 |
| Section 5 Conducted Emission Results | 16 |
| 5.1 Test Specification | 16 |
| 5.2 Power Line Emission Limits | 16 |
| 5.3 Receiver Settings | 16 |
| 5.4 Procedure and Test Software Version | 16 |
| 5.4.1 Date of Test..... | 16 |
| 5.4.2 Test Area..... | 17 |
| 5.4.3 Test Setup | 17 |
| 5.4.4 Plots | 19 |
| Section 6 Radiated Emission Results..... | 21 |
| 6.1 Test Specification | 21 |
| 6.2 Procedure and Test Software Version | 21 |
| 6.3 Radiated Emissions (30MHz to 1GHz) | 22 |
| 6.3.1 Limits at 3m | 22 |
| 6.3.2 Receiver Settings | 22 |
| 6.3.3 Emissions measurements | 22 |
| 6.3.4 Date of Test..... | 22 |
| 6.3.5 Test Area | 22 |
| 6.3.6 Test Setup | 23 |
| 6.3.7 Electric field emissions, 30MHz to 1GHz | 25 |
| 6.4 Radiated Emissions (1GHz to 6GHz)..... | 27 |
| 6.4.1 Limits | 27 |
| 6.4.2 Receiver Settings | 27 |
| 6.4.3 Emissions measurements | 27 |
| 6.4.4 Date of Test..... | 27 |
| 6.4.5 Test Area | 27 |
| 6.4.6 Test Setup | 28 |
| 6.4.7 Electric field emissions, 1GHz to 6GHz | 30 |
| Appendix A Test Equipment List | 34 |

List of Figures

| | |
|--------------------------------|----|
| Figure 1: Diagram of EUT | 10 |
|--------------------------------|----|

| | |
|--|----|
| Figure 2: Screenshot – Monitoring Software | 11 |
| Figure 3: Test setup for Conducted Emissions on the AC power port | 18 |
| Figure 4: Conducted Emissions Plot - Input Power 120V 60Hz Live (Charging mode) | 19 |
| Figure 5: Conducted Emissions Plot - Input Power 120V 60Hz Neutral (Charging mode) | 20 |
| Figure 6: Test Setup for E-Field Measurements from 30MHz to 1GHz | 24 |
| Figure 7: Electric field emissions Plot, 30MHz to 1GHz (Charging mode)..... | 25 |
| Figure 8 : Electric field emissions Plot, 30MHz to 1GHz (Trans receive mode)..... | 26 |
| Figure 9: Test Setup for Final E-Field Measurements from 1GHz to 6GHz..... | 28 |
| Figure 10: Electric field emissions Plot, 1GHz to 6GHz (Trans receive mode)..... | 30 |
| Figure 11 : Electric field emissions Plot, 1GHz to 6GHz (Charging mode)..... | 31 |

List of Tables

| | |
|---|----|
| Table 1: Test Sequence..... | 15 |
| Table 2: Input Power 120V 60Hz Live Conducted Emissions Peaks (Charging mode)..... | 19 |
| Table 3: Input Power 120V 60Hz Neutral Conducted Emissions Peaks (Charging mode)..... | 20 |
| Table 4: Electric Field Emissions Peaks, 30MHz to 1GHz (Charging mode)..... | 25 |
| Table 5 : Electric Field Emissions Peaks, 30MHz to 1GHz (Trans receive mode) | 26 |
| Table 6: Electric Field Emissions Peaks, 1GHz to 6GHz (Trans receive mode)..... | 30 |
| Table 7: Electric Field Emissions Peaks, 1GHz to 6GHz (Charging mode)..... | 31 |

Test Report Change History

| Issue | Date | Modification Details |
|-------|------|-------------------------------|
| 1 | | Original issue of test report |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | | |
| 10 | | |

Section 1 Test Location

All testing was performed at;

| | |
|-------------------------|---|
| Eurofins York | 46 Waverley Road |
| | Beeches Industrial Estate |
| | Yate |
| | Bristol |
| | BS37 5QT |
| Tel: | +44 (0) 1454 326998 |
| | |
| Website | http://www.yorkemc.com |
| UKAS Testing No. | 1574 |

1.1 UKAS Accreditation

Tests marked "Not UKAS Accredited" in this report are not included in the UKAS Accreditation Schedule for our laboratory.

Opinions and interpretations expressed herein are outside the scope of UKAS Accreditation.

York EMC Services latest accreditation schedule can be found at:

http://www.ukas.org/testing/lab_detail.asp?lab_id=989&location_id=&vMenuOption=3

Section 2 Customer Information

| | |
|--|---------------------------------------|
| Company name | Spark Product Innovation Ltd. |
| Address | Bristol and Bath Science Park |
| | Dirac Cresent , Emerson green |
| | Bristol |
| | BS16 7FR |
| Tel: | 0117 244 1915 |
| Contact | Stephen Causier |
| Email | stephen.causier@sparkpi.co.uk |
| Customer Representative(s) present during testing | Testing was witnessed by the customer |

Section 3 Equipment Details

3.1 Equipment Under Test (EUT)

| | | | | | | | | |
|---|--|------|-------------------|------|--------------|-------|--|--|
| Date received: | 15.05.2018 | | | | | | | |
| EUT name: | Inductosense Wand 2.0 | | | | | | | |
| Type/Part no: | Wand 2.0 | | | | | | | |
| Serial no/s: | Unknown | | | | | | | |
| EUT description: | <p>The EUT is a battery powered device that uses ultrasonic sound to measure and monitor the thickness and possible corrosion/erosion levels of pipework and structures.</p> <p>The EUT is primarily for use in industrial environments.</p> | | | | | | | |
| No of units tested: | One | | | | | | | |
| EUT power: | 120 | V | 60 | Hz | Single phase | | | |
| | 8.4 | V | Battery operation | | | | | |
| Highest internal frequency: | 916MHz | | | | | | | |
| Cables: | USB | | 1.2 | m | Unscreened | | | |
| | DC | | 1.2 | m | Unscreened | | | |
| Size of EUT (mm) | L: - | 0.29 | W: - | 0.12 | H: - | 0.035 | | |
| Tested as | Table top | | | | | | | |
| Mode/s of operation 1 | Charging | | | | | | | |
| 2 | Trans receive mode | | | | | | | |
| 3 | Standby | | | | | | | |
| Firmware Version | Nano M6E | | | | | | | |
| Software Version | Unknown | | | | | | | |
| Client modification statement: | None | | | | | | | |
| Modifications incorporated during testing: | None | | | | | | | |

| | |
|------------------------|-----------------------|
| Radio Module(s) | Thing Magic Non M6E |
| | FCC ID- QV5MERCURY6EN |

3.2 EUT Photos



Front view



Back view



L.H.S view



R.H.S view

3.3 Configuration of EUT

EUT was configured for Transmitting, Standby and Charging mode through Software.

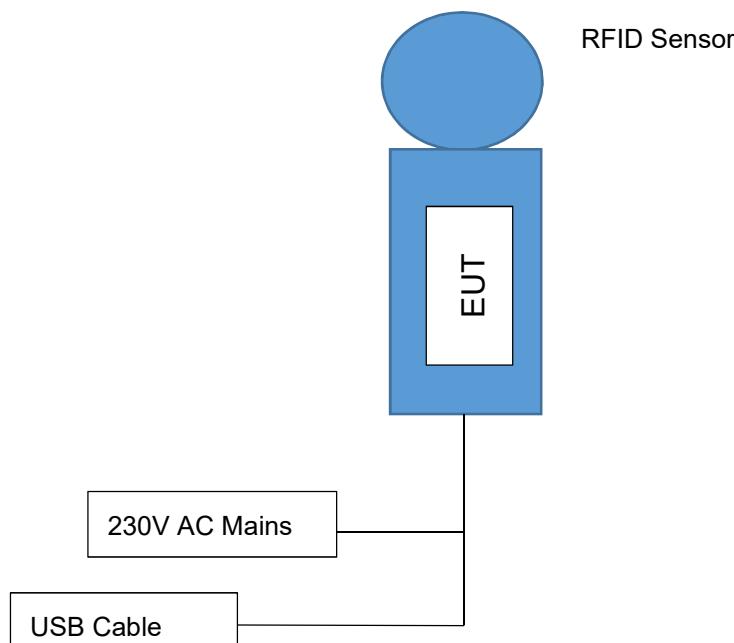


Figure 1: Diagram of EUT

3.4 EUT Monitoring/Auxiliary Equipment

| Equipment Name | Type No. | Serial No. |
|----------------|----------|------------|
| None | None | None |

3.5 Monitoring Software

None

Figure 2: Screenshot – Monitoring Software

Section 4 Test Specifications

The tests were performed in accordance with Eurofins York Quotation B3833.

| 47CFR Part 15, Sub Part B Unintentional Radiators | | | |
|---|-------------------------------|---|--------------------|
| Which references the following specification: - | | | |
| ANSI C63.4: 2014 Methods of Measurements of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range 9kHz to 40GHz. | | | |
| Test | Method | Levels | Result |
| Conducted Emissions (0.15 – 30MHz) | ANSI C63.4: 2014 Section 7 | Part 15 Clause 15.107 Part 18 Clause 18.307 Class A/B | Pass |
| Radiated Emissions Magnetic Field Measurements (9kHz to 30MHz) | ANSI C63.4: 2014 Section 8 | Part 15 Clause 15.109(e) Part 15 Clause 15.209 | Not Applicable |
| Radiated Emissions Electric Field Measurements (30MHz – 6000MHz) | ANSI C63.4: 2014 Section 8 | Part 15 Clause 15.109 Part 18 Clause 18.305 Class A/B | Pass See Note 1 |

Note 1 :All testing was carried out at a test distance of 3m and the limits adjusted accordingly. This is a deviation from the standard as Class A limits are specified at 10m test distance.

Note 2: Applies to carrier current systems see reference 47CFR Part 15Clause 15.109(e).

Industry Canada ICES-003:2016 – Information and Technology Equipment (ITE) – Limits and Methods of Measurement.

Conducted (clause 6.1) and Radiated (clause 6.2) Emission Limits

Which references the following specification:

ANSI C63.4: 2014 Methods of Measurements of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range 9kHz to 40GHz

| Test | Class/Limits | Result (Pass/Fail) |
|--|--------------|--------------------|
| Conducted Emissions (0.15 – 30MHz) | Class A | Pass |
| Radiated Emissions, Note 1, Note 2 (30MHz – 6GHz) | Class A | Pass |

Note 1 : Below 1GHz compliance can be demonstrated in 3 ways:

- (i) By complying with CAN/CSA-CISPR 22-10, Information and technology equipment - Radio disturbance characteristics – Limits and methods of measurements
- (ii) By complying with the limits shown in Section 6 using methods of measurement described in ANSI C63.4.
- (iii) By complying with limits referenced in Section 3a of CAN/CSA-CISPR 22-10, whilst using methods of measurement described in ANSI C63.4.

Method (ii) will be applied in this report.

Note 2 :To determine the conditional radiated disturbance testing procedure the highest frequency generated or used within the EUT has been advised by the customer as 800MHz.

Note 3 :Tests above 40GHz are not offered.

Note 4 :Class A limits are for non-residential operation and Class B limits (more stringent) are for residential.

Note 5 :All testing was carried out at a test distance of 3m and the limits adjusted accordingly. This is a deviation from the standard as Class A limits are specified at 10m test distance.

4.1 Knowledge Database References

The following KDBs were referenced during the testing of the Inductosense wand 2.0

The latest knowledge database references are available via the FCC KDB website at:

<https://apps.fcc.gov/kdb>

4.1.1 Conducted Emissions

| Publication Number | Keyword | Publication Date |
|--------------------|---|------------------|
| 174176 | Section 15.107, 15.207, 18.307, C63.4, C63.10, Suitable Dummy Load, AC Power Line Conducted Measurement | 03/06/2015 |

4.1.2 Radiated Emissions (30MHz to 1000MHz)

None

4.1.3 Radiated Emissions (1GHz to 18/40GHz)

| Publication Number | Keyword | Publication Date |
|--------------------|--|------------------|
| 714737 | 15B, Average Detector for Unintentional Radiator | 30/11/2010 |
| 414788 | Radiated Emissions Test Site | 04/18/2017 |

4.2 Compliance Statement

The **Inductosense wand 2.0** as tested was shown to meet requirements of the standards listed in Section 4 of this report.

4.3 Test Sequence

| Test Description | Test Order | Test Repeated | Comment |
|----------------------------|------------|---------------|---------|
| Radiated Emissions | | | |
| 30MHz to 1GHz | 3 | No | None |
| 1GHz to 6GHz | 1 | No | None |
| Conducted Emissions | | | |
| AC Power Ports | 2 | No | None |

Table 1: Test Sequence

Section 5 Conducted Emission Results

5.1 Test Specification

| | |
|-------------------------|---|
| Standard | ANSI C63.4:2014 |
| Measurement Uncertainty | <p>The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % is</p> <p>$\pm 3.35\text{dB}$ (EN55016-4-2:2011 +A1:2014) ESHS10</p> <p>$\pm 3.34\text{dB}$ (EN55016-4-2:2011 +A1:2014) ESHS30</p> <p>$\pm 3.31\text{dB}$ (EN55016-4-2:2011 +A1:2014) ESU40</p> |

5.2 Power Line Emission Limits

| Frequency (MHz) | Class A (dB μ V) | | Class B (dB μ V) | |
|--------------------|-------------------------|---------|-------------------------|----------|
| | Quasi Peak | Average | Quasi Peak | Average |
| 0.15 – 0.5 | 79.0 | 66.0 | 66 – 56* | 56 – 46* |
| 0.5 – 5.0 | 73.0 | 60.0 | 56.0 | 46.0 |
| 5.0 - 30 | 73.0 | 60.0 | 60.0 | 50.0 |

Note: * The limit decreases linearly with the logarithm of the frequency in the range

5.3 Receiver Settings

| Receiver Parameters | Setting |
|----------------------|------------------------|
| Detector Function | Quasi Peak and Average |
| Start Frequency | 150kHz |
| Stop Frequency | 30MHz |
| Resolution Bandwidth | 10kHz |
| Video Bandwidth | Auto |

5.4 Procedure and Test Software Version

| | |
|------------------------------|-----------------------------|
| Eurofins York test procedure | BEP19 Issue 8 20 Nov 2014 |
| Test software | RadiMation Version 2016.1.6 |

5.4.1 Date of Test

18th May 2018 to 21st May 2018

5.4.2 Test Area


LAB 2

5.4.3 Test Setup

This test was applied to the EUT's Live and Neutral lines. The EUT was configured in the screened room on an 80cm high table and was positioned 40cm from the room wall.

A calibrated mains extension lead was used to ensure known impedance was presented to the EUT

The EUT was then powered from the mains supply via a Line Impedance Stabilisation Network (LISN).

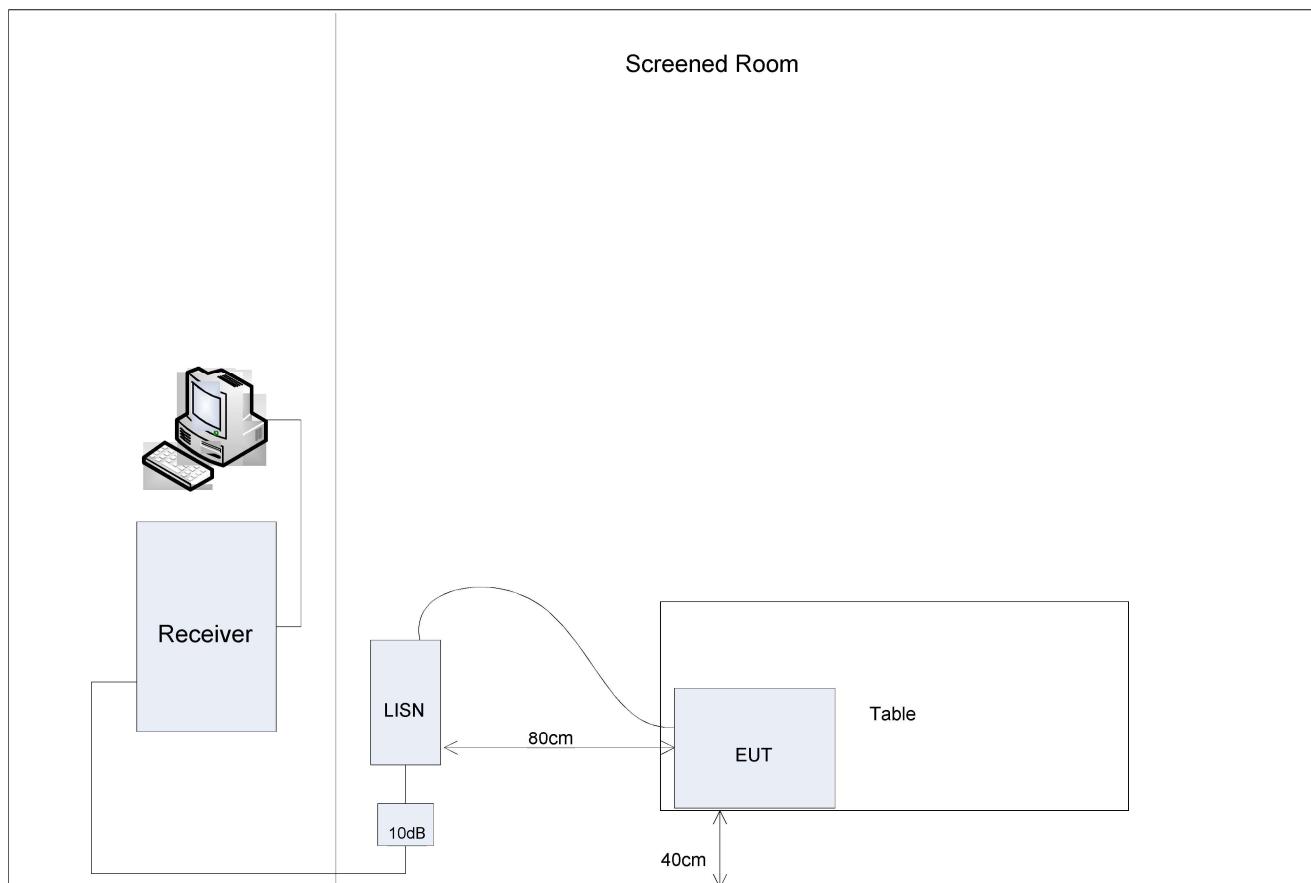

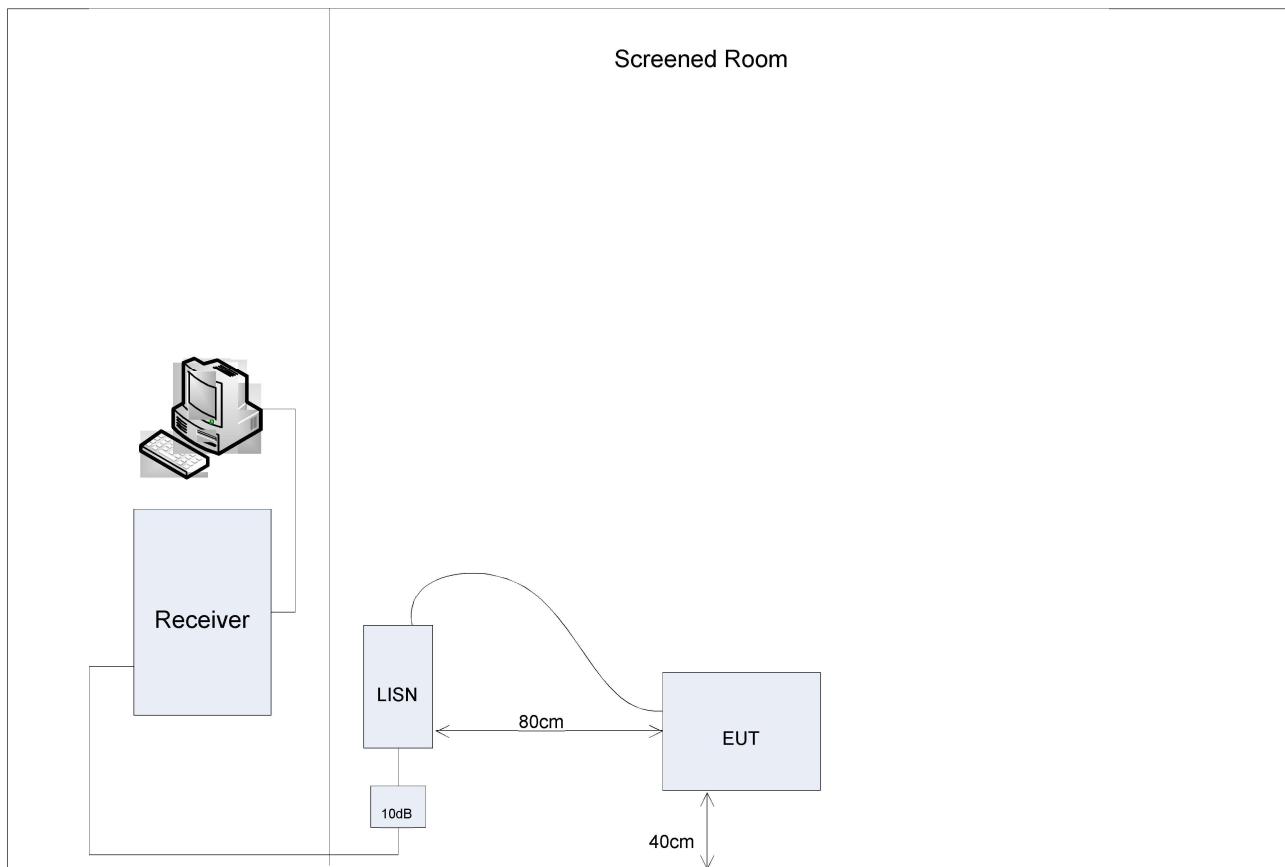


Figure 3: Test setup for Conducted Emissions on the AC power port

The screened room provides an environment that ensures valid, repeatable measurement results that meet the requirements of Clause 5.2 of ANSI C63.4-2014.

5.4.4 Plots

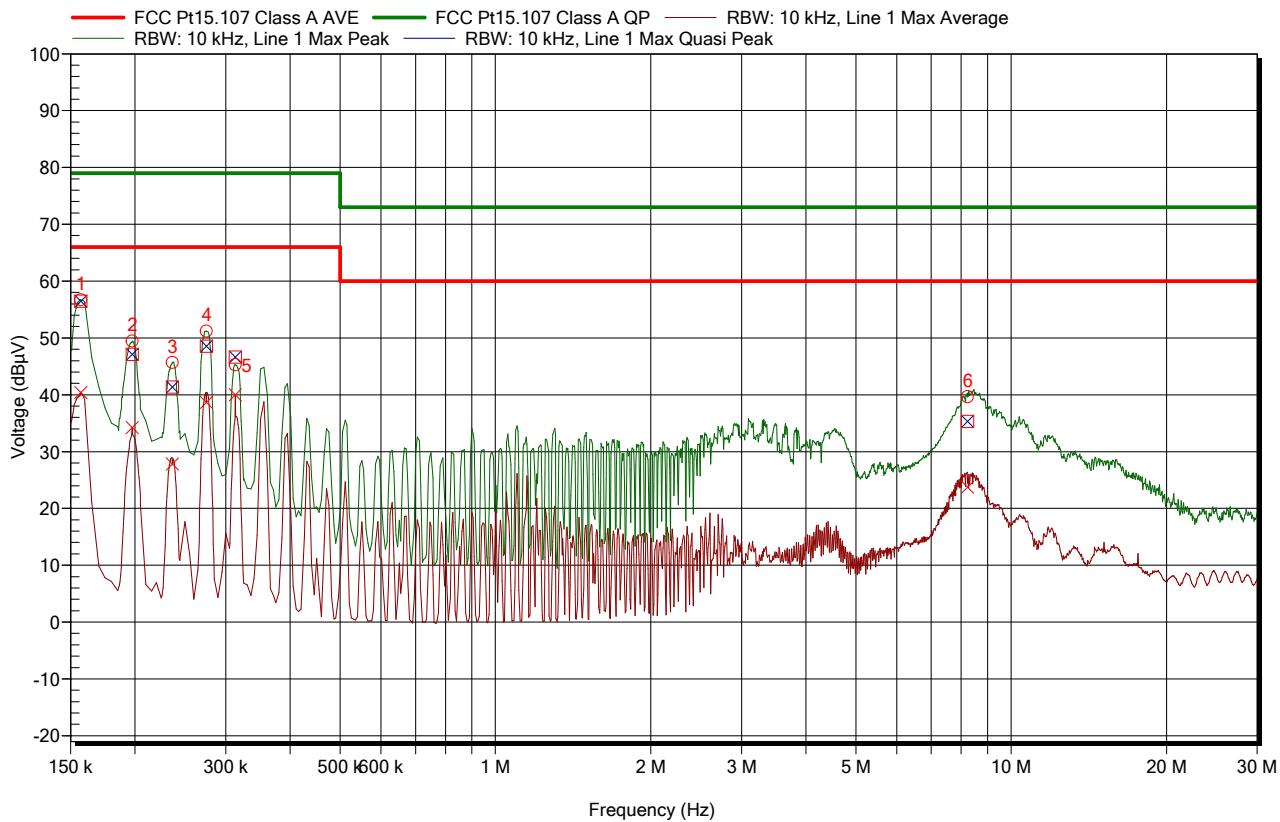
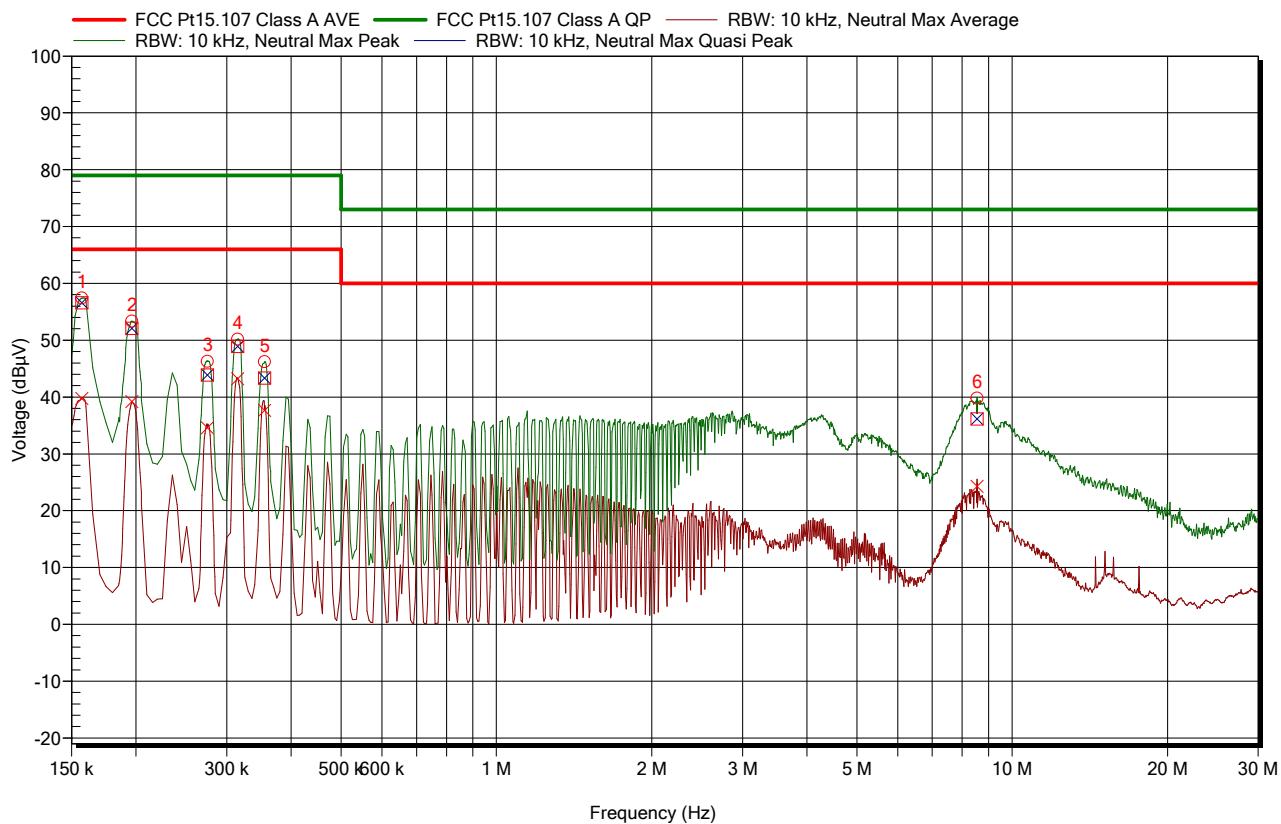


Figure 4: Conducted Emissions Plot - Input Power 120V 60Hz Live (Charging mode)

| Frequency | Peak | Average | Average Difference | Average Correction | Average Status | Quasi-Peak | Quasi-Peak Limit | Quasi-Peak Difference | Quasi-Peak Correction | Quasi-Peak Status |
|-----------|------------|------------|--------------------|--------------------|----------------|------------|------------------|-----------------------|-----------------------|-------------------|
| 157 kHz | 56.68 dBμV | 40.38 dBμV | -25.62 dB | 14.3 dB | Pass | 56.48 dBμV | 79 dBμV | -22.52 dB | 14.3 dB | Pass |
| 197.5 kHz | 49.44 dBμV | 34.23 dBμV | -31.77 dB | 14.3 dB | Pass | 47.13 dBμV | 79 dBμV | -31.87 dB | 14.3 dB | Pass |
| 236.5 kHz | 45.66 dBμV | 27.84 dBμV | -38.16 dB | 14.3 dB | Pass | 41.35 dBμV | 79 dBμV | -37.65 dB | 14.3 dB | Pass |
| 275 kHz | 51.16 dBμV | 38.69 dBμV | -27.31 dB | 14.3 dB | Pass | 48.55 dBμV | 79 dBμV | -30.45 dB | 14.3 dB | Pass |
| 313 kHz | 45.22 dBμV | 40 dBμV | -26 dB | 14.3 dB | Pass | 46.63 dBμV | 79 dBμV | -32.37 dB | 14.3 dB | Pass |
| 8.23 MHz | 39.63 dBμV | 23.74 dBμV | -36.26 dB | 13.8 dB | Pass | 35.29 dBμV | 73 dBμV | -37.71 dB | 13.8 dB | Pass |

Table 2: Input Power 120V 60Hz Live Conducted Emissions Peaks (Charging mode)

**Figure 5: Conducted Emissions Plot - Input Power 120V 60Hz Neutral (Charging mode)**

| Frequency | Peak | Average | Average Difference | Average Correction | Average Status | Quasi-Peak | Quasi-Peak Limit | Quasi-Peak Difference | Quasi-Peak Correction | Quasi-Peak Status |
|-----------|------------|------------|--------------------|--------------------|----------------|------------|------------------|-----------------------|-----------------------|-------------------|
| 157 kHz | 57.41 dBμV | 39.76 dBμV | -26.24 dB | 14.3 dB | Pass | 56.61 dBμV | 79 dBμV | -22.39 dB | 14.3 dB | Pass |
| 196.5 kHz | 53.35 dBμV | 39.23 dBμV | -26.77 dB | 14.3 dB | Pass | 52.07 dBμV | 79 dBμV | -26.93 dB | 14.3 dB | Pass |
| 275 kHz | 46.27 dBμV | 34.59 dBμV | -31.41 dB | 14.3 dB | Pass | 43.86 dBμV | 79 dBμV | -35.14 dB | 14.3 dB | Pass |
| 315 kHz | 50.2 dBμV | 43.21 dBμV | -22.79 dB | 14.3 dB | Pass | 48.89 dBμV | 79 dBμV | -30.11 dB | 14.3 dB | Pass |
| 355 kHz | 46.19 dBμV | 37.66 dBμV | -28.34 dB | 14.2 dB | Pass | 43.33 dBμV | 79 dBμV | -35.67 dB | 14.2 dB | Pass |
| 8.553 MHz | 39.8 dBμV | 24.28 dBμV | -35.72 dB | 13.8 dB | Pass | 36.17 dBμV | 73 dBμV | -36.83 dB | 13.8 dB | Pass |

Table 3: Input Power 120V 60Hz Neutral Conducted Emissions Peaks (Charging mode)

Section 6 Radiated Emission Results

6.1 Test Specification

| | |
|-------------------------|---|
| Standard | ANSI C63.4:2014 |
| Measurement Uncertainty | <p>The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95% is</p> <p>5.16dB (EN55016-4-2:2011 +A1:2014 (<1GHz)) ESU40</p> <p>4.66dB (EN55016-4-2:2011 +A1:2014 (1-6GHz)) ESU40/HL050</p> <p>4.96dB (EN55016-4-2:2011 +A1:2014 (6-18GHz)) ESU40/HL050</p> <p>4.92dB (EN55016-4-2:2011 +A1:2014 (18-40GHz)) ESU40/HL050</p> |

6.2 Procedure and Test Software Version

| | |
|--|-----------------------------|
| Eurofins York test procedure (30MHz to 1GHz) | BEP23 Issue 10 Oct 2016 |
| Eurofins York test procedure (1GHz to 40GHz) | BEP27 Issue 7 7 Oct 2016 |
| Test software | RadiMation Version 2016.1.6 |

6.3 Radiated Emissions (30MHz to 1GHz)

6.3.1 Limits at 3m

| Frequency (MHz) | Class A (dB μ V/m) | Class B (dB μ V/m) |
|--------------------|---------------------------|---------------------------|
| | Quasi Peak | Quasi Peak |
| 30 - 88 | 49.5 | 40.0 |
| 88 - 216 | 53.5 | 43.5 |
| 216 - 960 | 56.4 | 46.0 |
| 960- 1000 | 59.5 | 54.0 |

Note: FCC 47 CFR Part 15 Section 15.109 specifies test limits at 10m for Class A and 3m for Class B. Please note that for Class A, limits have adjusted by 10dB to correct for the measurement distance of 3m.

6.3.2 Receiver Settings

| Receiver Parameters | Setting |
|----------------------|------------|
| Detector Function | Quasi Peak |
| Start Frequency | 30MHz |
| Stop Frequency | 1000MHz |
| Resolution Bandwidth | 120kHz |
| Video Bandwidth | Auto |

6.3.3 Emissions measurements

6.3.4 Date of Test

22nd May 2018

6.3.5 Test Area


LAB 1 (SAC)

6.3.6 Test Setup

The EUT was configured in the SAC on an 80cm high table.

The measurement was performed with an antenna to EUT separation distance of 3m. The Quasi peak limits are therefore increased by 10dB (from the 10m values), to allow for the reduction in the measurement distance.

The results were maximised in orientation 0-360 degrees and height 1-4m.

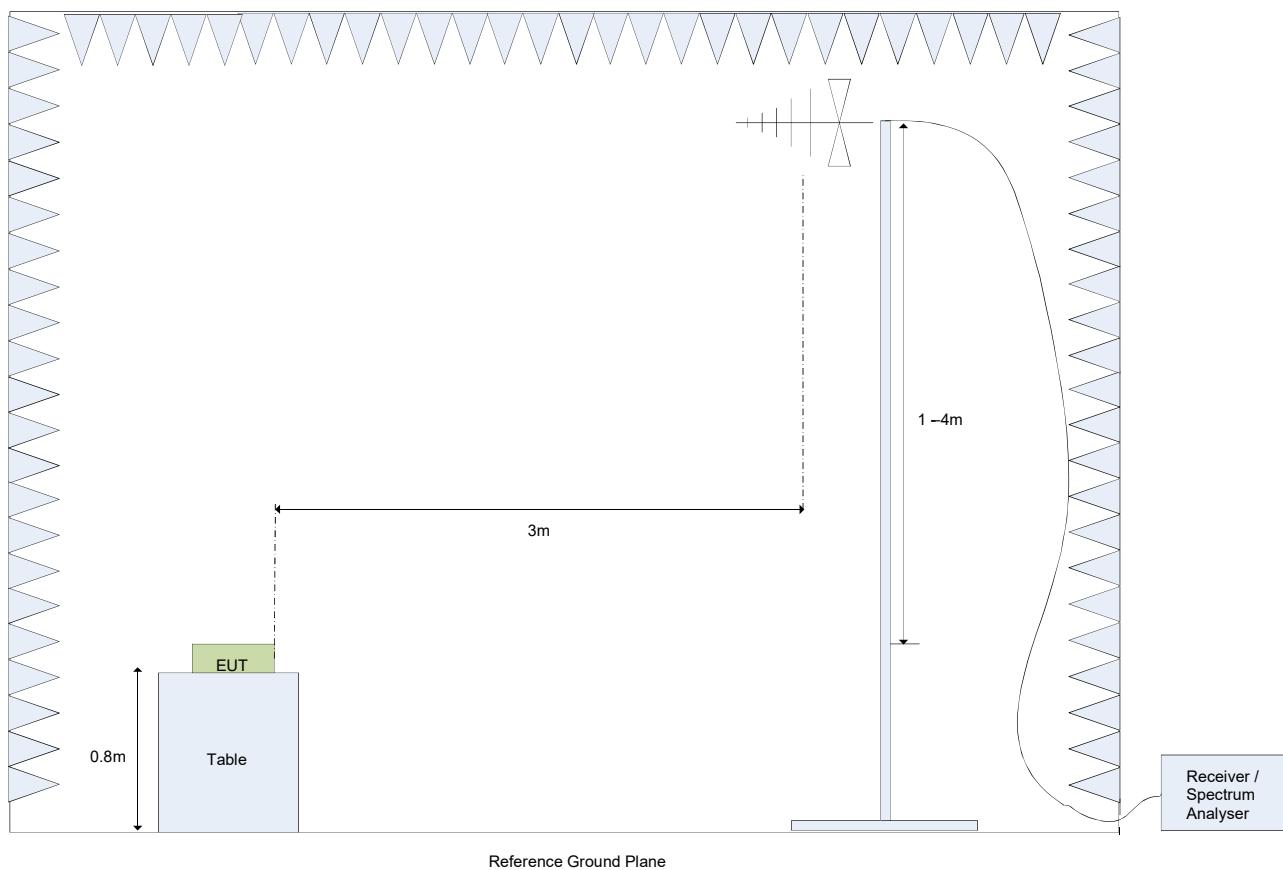

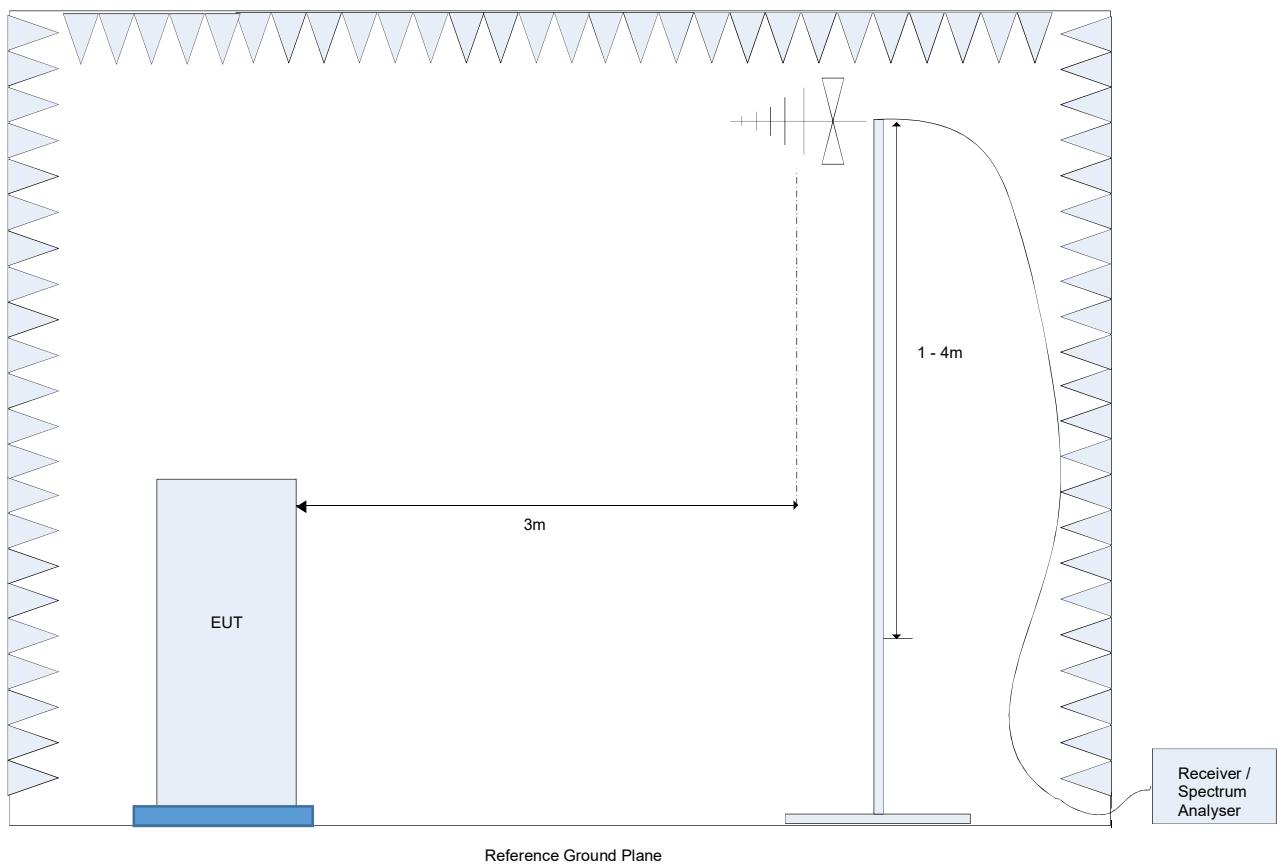


Figure 6: Test Setup for E-Field Measurements from 30MHz to 1GHz

Note 1 : With the EUT de-energized the ambient radio noise and signals met the 6dB peak detection requirement of ANSI C63.4-2014 Clause 5.1.3.

Note 2 : There were no significant environmental temperature changes during the test duration and hence it was not considered necessary to consider any variation in cable loss.

6.3.7 Electric field emissions, 30MHz to 1GHz

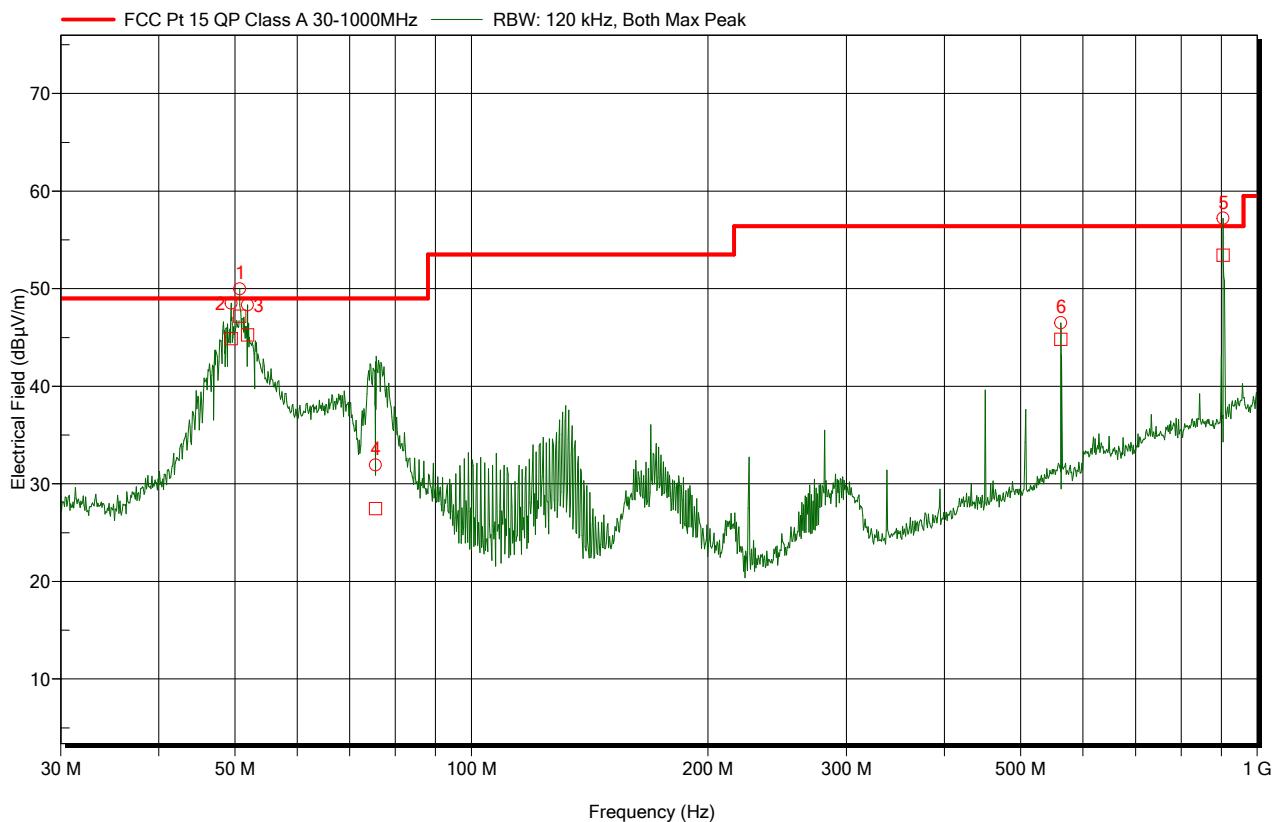


Figure 7: Electric field emissions Plot, 30MHz to 1GHz (Charging mode)

Detected Peaks:

| Frequency | Peak | Quasi-Peak | Quasi-Peak Difference | Quasi-Peak Correction | Quasi-Peak Status | Angle | Height | Polarization |
|-------------|--------------------|--------------------|-----------------------|-----------------------|-------------------|------------|--------|--------------|
| 50.706 MHz | 49.98 dB μ V/m | 47.17 dB μ V/m | -1.83 dB | 16.7 dB | Pass | 164 Degree | 1 m | Vertical |
| 49.44 MHz | 48.52 dB μ V/m | 44.9 dB μ V/m | -4.1 dB | 17.3 dB | Pass | 105 Degree | 1 m | Vertical |
| 51.9 MHz | 48.34 dB μ V/m | 45.27 dB μ V/m | -3.73 dB | 16.3 dB | Pass | 29 Degree | 1 m | Vertical |
| 75.48 MHz | 31.93 dB μ V/m | 27.47 dB μ V/m | -21.53 dB | 14.6 dB | Pass | 4 Degree | 1.1 m | Vertical |
| 904.668 MHz | 57.2 dB μ V/m | 53.45 dB μ V/m | -2.95 dB | 32 dB | Pass | 332 Degree | 3.5 m | Horizontal |
| 562.53 MHz | 46.5 dB μ V/m | 44.8 dB μ V/m | -11.6 dB | 28.1 dB | Pass | 106 Degree | 1.5 m | Horizontal |

Table 4: Electric Field Emissions Peaks, 30MHz to 1GHz (Charging mode)

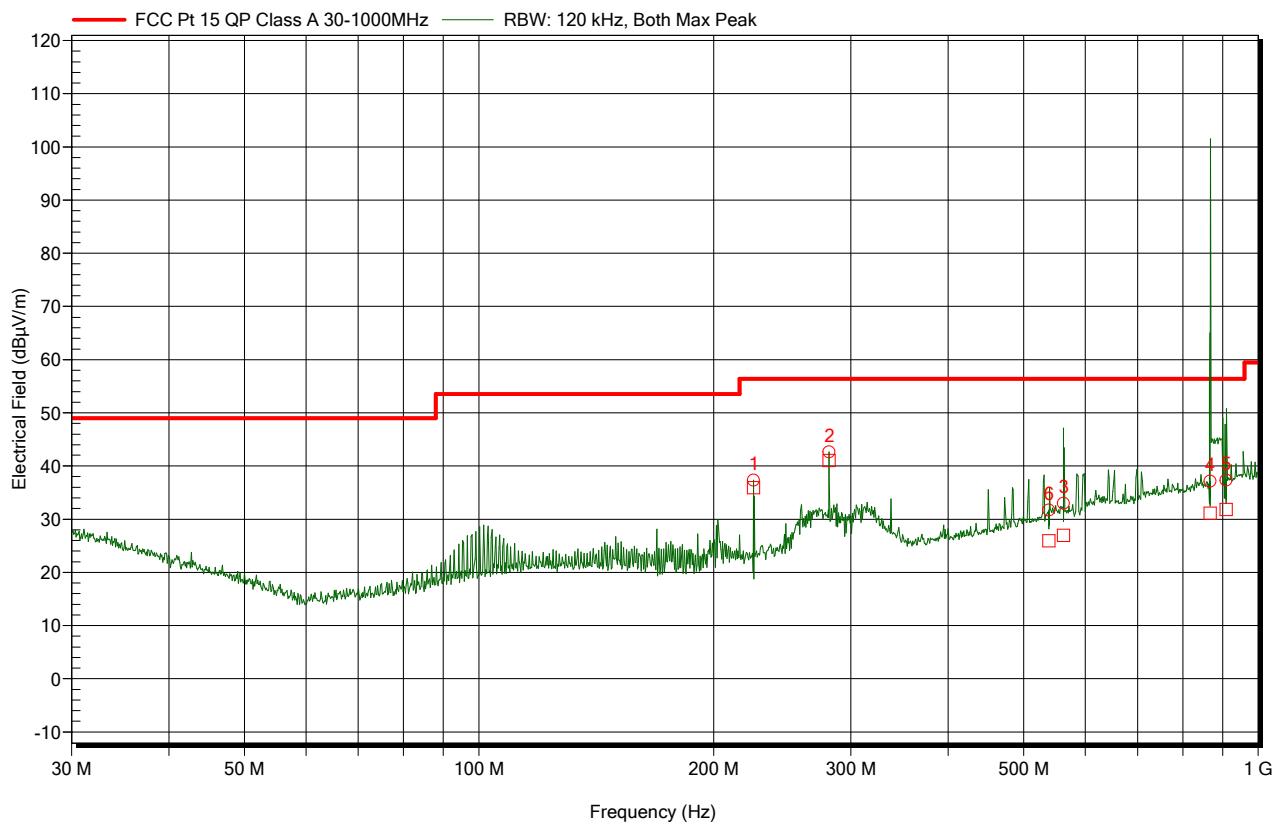


Figure 8 : Electric field emissions Plot, 30MHz to 1GHz (Trans receive mode)

Detected Peaks:

| Frequency | Peak | Quasi-Peak | Quasi-Peak Difference | Quasi-Peak Status | Angle | Height | Polarization |
|-------------|--------------|--------------|-----------------------|-------------------|------------|--------|--------------|
| 225.006 MHz | 37.32 dBμV/m | 35.94 dBμV/m | -20.46 dB | Pass | 96 Degree | 1.2 m | Horizontal |
| 281.268 MHz | 42.65 dBμV/m | 41.03 dBμV/m | -15.37 dB | Pass | 268 Degree | 1.1 m | Horizontal |
| 562.53 MHz | 32.96 dBμV/m | 26.99 dBμV/m | -29.41 dB | Pass | 91 Degree | 1.5 m | Horizontal |
| 916.28 MHz | 37.15 dBμV/m | 31.13 dBμV/m | -25.27 dB | Pass | 288 Degree | 3.9 m | Horizontal |
| 919.59 MHz | 32.93 dBμV/m | 32.83 dBμV/m | -24.54 dB | Pass | 44 Degree | 1.9 m | Horizontal |
| 538.8 MHz | 31.68 dBμV/m | 25.97 dBμV/m | -30.43 dB | Pass | 52 Degree | 1.8 m | Horizontal |
| 225.006 MHz | 37.32 dBμV/m | 35.94 dBμV/m | -20.46 dB | | 96 Degree | 1.2 m | Horizontal |

Table 5 : Electric Field Emissions Peaks, 30MHz to 1GHz (Trans receive mode)

6.4 Radiated Emissions (1GHz to 6GHz)

6.4.1 Limits

| Frequency (GHz) | Class A (dB μ V/m) | Class B (dB μ V/m) |
|--------------------|---------------------------|---------------------------|
| | Average | Average |
| 1-6 | 59.5 | 54.0 |

6.4.2 Receiver Settings

| Receiver Parameters | Setting |
|----------------------|---------|
| Detector Function | Average |
| Start Frequency | 1GHz |
| Stop Frequency | 6GHz |
| Resolution Bandwidth | 1MHz |
| Video Bandwidth | Auto |

6.4.3 Emissions measurements

6.4.4 Date of Test

18th May 2018

6.4.5 Test Area

LAB 1 (SAC)

6.4.6 Test Setup

The EUT was configured in the SAC on an 80cm high table.

Exploratory measurements on the EUT were carried out to identify suspect frequencies and worst case orientations, see Section **Error! Reference source not found..**

The measurement was then performed with an antenna to EUT separation distance of 3m.

The antenna was kept in the “cone of radiation” from the EUT and pointed at the area both in azimuth and elevation using the tilt mechanism on the antenna mast.

The results were maximised in orientation 0-360 degrees and height 1-4m.

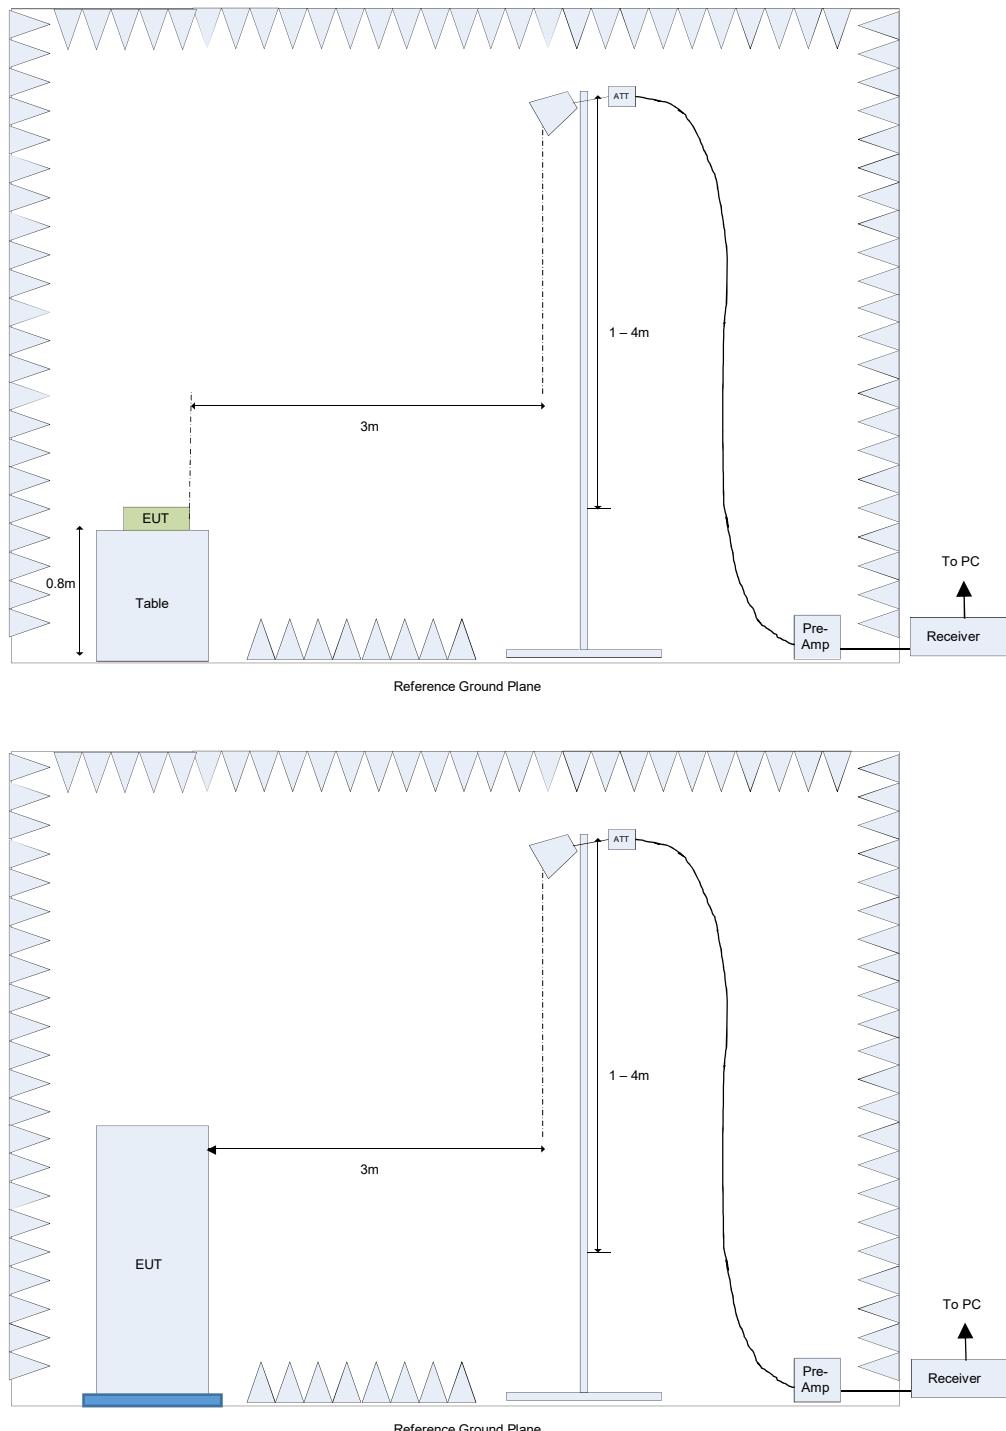


Figure 9: Test Setup for Final E-Field Measurements from 1GHz to 6GHz

Note 1 : With the EUT de-energized the ambient radio noise and signals met the 6dB peak detection requirement of ANSI C63.4-2014 Clause 5.1.3.

Note 2 : There were no significant environmental temperature changes during the test duration and hence it was not considered necessary to consider any variation in cable loss.

6.4.7 Electric field emissions, 1GHz to 6GHz

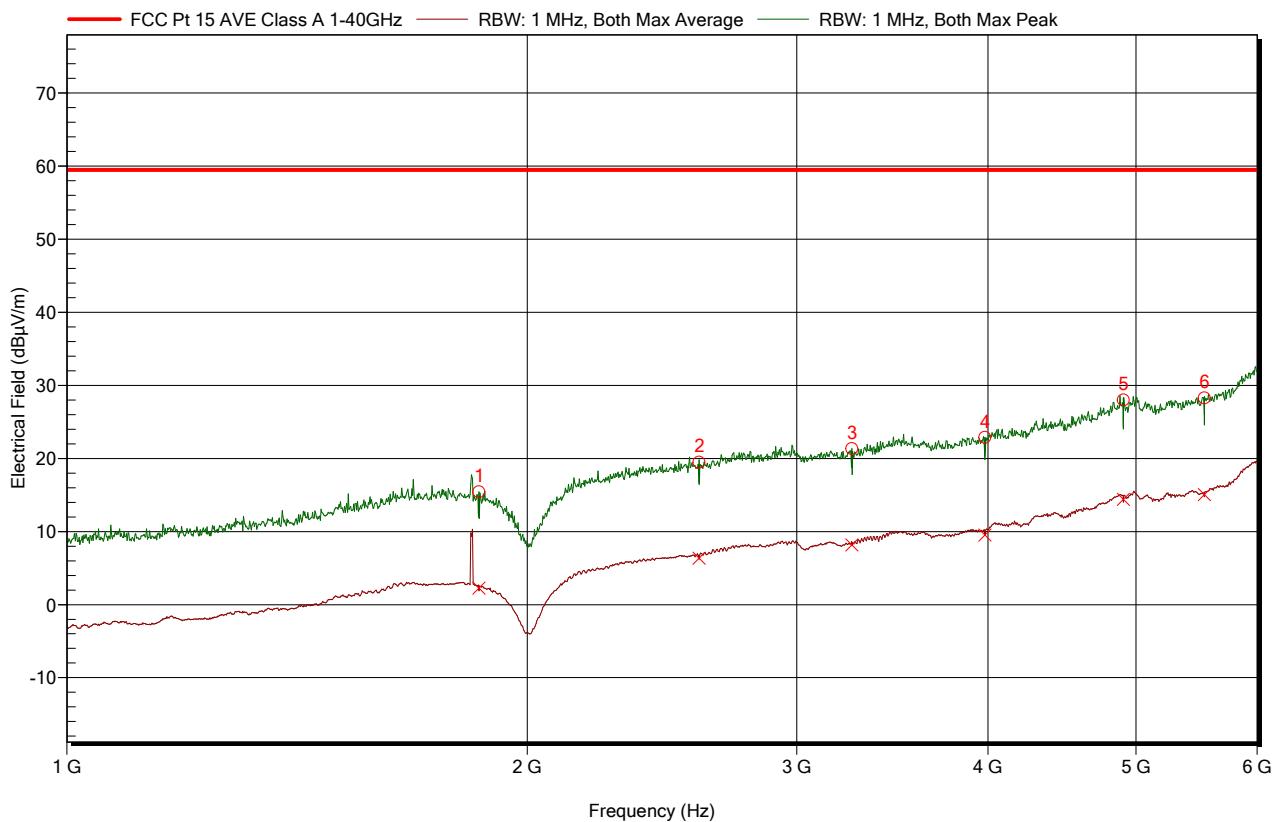


Figure 10: Electric field emissions Plot, 1GHz to 6GHz (Trans receive mode)

| Frequency | Peak | Average | Average Difference | Average Correction | Average Status | Angle | Height | Polarization |
|-----------|--------------|--------------|--------------------|--------------------|----------------|------------|--------|--------------|
| 1.86 GHz | 15.43 dBμV/m | 2.27 dBμV/m | -53.73 dB | -42.6 dB | Pass | 133 Degree | 3.1 m | Vertical |
| 2.591 GHz | 19.49 dBμV/m | 6.38 dBμV/m | -49.62 dB | -37.8 dB | Pass | 344 Degree | 1.5 m | Vertical |
| 3.259 GHz | 21.33 dBμV/m | 8.16 dBμV/m | -51.84 dB | -35.1 dB | Pass | 333 Degree | 1.8 m | Vertical |
| 3.983 GHz | 22.89 dBμV/m | 9.53 dBμV/m | -50.47 dB | -32.1 dB | Pass | 43 Degree | 2.8 m | Vertical |
| 4.905 GHz | 27.98 dBμV/m | 14.4 dBμV/m | -45.6 dB | -27.3 dB | Pass | 58 Degree | 2.5 m | Vertical |
| 5.541 GHz | 28.27 dBμV/m | 15.05 dBμV/m | -44.95 dB | -24.9 dB | Pass | 328 Degree | 2.5 m | Vertical |

Table 6: Electric Field Emissions Peaks, 1GHz to 6GHz (Trans receive mode)

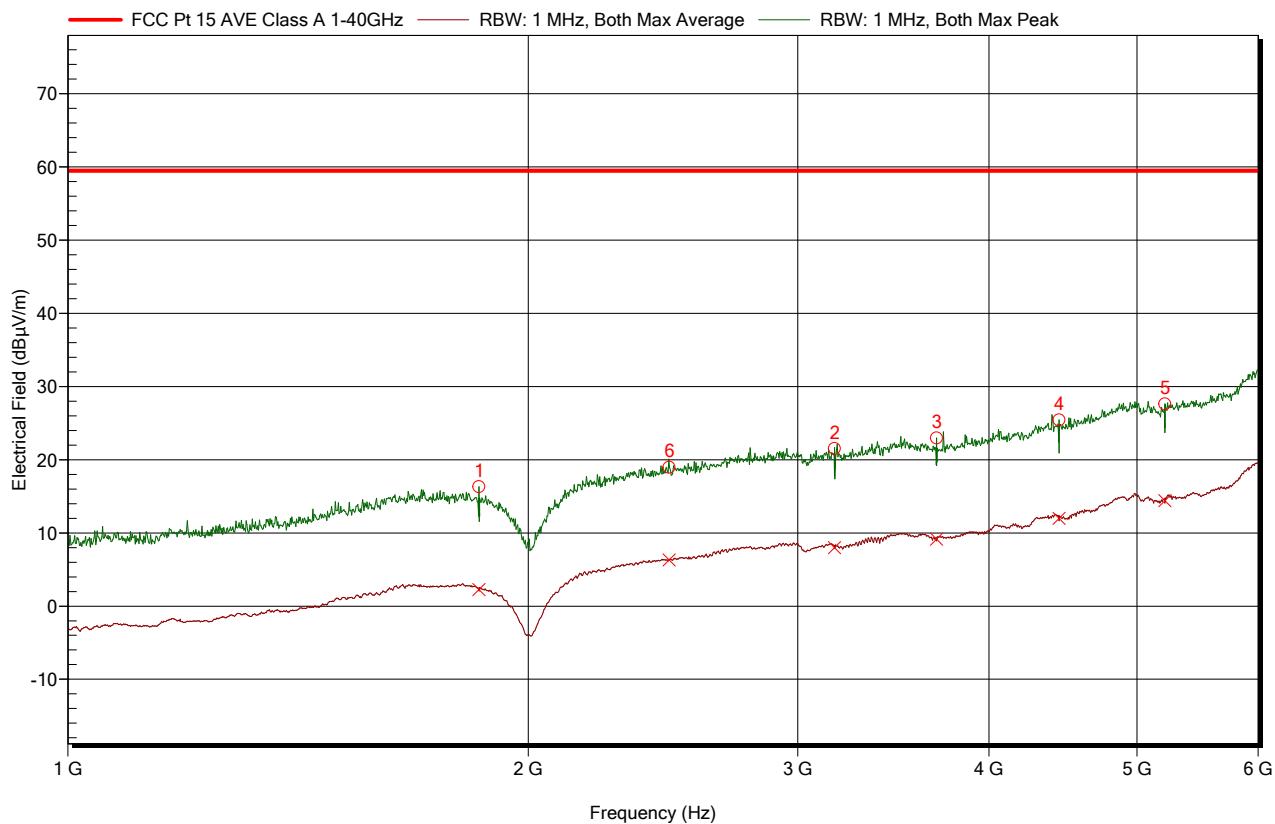


Figure 11 : Electric field emissions Plot, 1GHz to 6GHz (Charging mode)

Detected Peaks:

| Frequency | Peak | Peak Difference | Peak Correction | Average | Average Difference | Average Correction | Average Status | Angle | Height | Polarization |
|-----------|--------------|-----------------|-----------------|--------------|--------------------|--------------------|----------------|------------|--------|--------------|
| 1.857 GHz | 16.31 dBμV/m | -57.69 dB | -42.6 dB | 2.28 dBμV/m | -51.72 dB | -42.6 dB | Pass | 287 Degree | 3.8 m | Vertical |
| 3.172 GHz | 21.53 dBμV/m | -52.47 dB | -35.3 dB | 7.99 dBμV/m | -46.01 dB | -35.3 dB | Pass | 223 Degree | 2.5 m | Vertical |
| 3.697 GHz | 22.98 dBμV/m | -51.02 dB | -33.7 dB | 9.16 dBμV/m | -44.84 dB | -33.7 dB | Pass | 87 Degree | 4 m | Vertical |
| 4.445 GHz | 25.44 dBμV/m | -48.56 dB | -29.4 dB | 12.01 dBμV/m | -41.99 dB | -29.4 dB | Pass | 207 Degree | 3.1 m | Vertical |
| 5.213 GHz | 27.61 dBμV/m | -46.39 dB | -26.1 dB | 14.4 dBμV/m | -39.6 dB | -26.1 dB | Pass | 357 Degree | 3.2 m | Vertical |
| 2.472 GHz | 18.97 dBμV/m | -55.03 dB | -38.4 dB | 6.29 dBμV/m | -47.71 dB | -38.4 dB | Pass | 194 Degree | 1 m | Vertical |

Table 7: Electric Field Emissions Peaks, 1GHz to 6GHz (Charging mode)

EUT Test Photos

Conducted Emissions



Photo 1: Conducted Emissions, Power Line

Radiated Emissions



Photo 2: Radiated Emissions, close-up shot

The cable/wire placement on the test site was setup to produce the highest radiated emissions. The above photograph(s) illustrates the setup tested.



Photo 3: Radiated Emissions, 30MHz to 1GHz



Photo 4: Radiated Emission, 1GHz to 6GHz

Appendix A Test Equipment List

Conducted Emissions

| Item | Serial No. | Last Calibration Date | Calibration Interval |
|---|---------------|-----------------------|----------------------|
| Rainford Screened Room 7.0m x 4.0m x 3.0m | Lab2 | N/A | N/A |
| Rohde & Schwarz ESHS30 Measuring Receiver | B1401 | 27/02/2018 | 12 Months |
| Rohde & Schwarz ESH3-Z5 | B0816 | 11/05/2017 | 12 Months |
| 10dB Attenuator / Limiter | B0539 | 11/10/2017 | 12 Months |
| 6dB Attenuator | B0949 | 09/10/2017 | 12 Months |
| CNE V Emission Source | B0855 | N/A | N/A |
| LISN Adapter LSA02 | B0914 | N/A | N/A |
| BNC type Test cable | C07 | 11/10/2017 | 12 Months |
| N-type Test cable | B03 | 09/10/2017 | 12 Months |
| Mains cable M04 | IEC Lead 1.0m | N/A | N/A |
| Vaisala HM 34 Humidity and temperature meter | B1332 | 17/05/2017 | 36 Months |

Radiated Emissions Equipment

| Item | Serial No. | Last Calibration Date | Calibration Interval |
|--|------------|-----------------------|----------------------|
| Rainford Shielded Room Ferrite/hybrid lined semi/anechoic chamber 8.9m x 4.8m x 5.4m | LAB1 | 17/05/2018 | 36 Months |
| 60A Mains Filter DS23335C | (Fixed) | N/A | N/A |
| R&S ESU40 Measuring Receiver | B0984 | 26/01/2018 | 1 year |
| Chase Bilog Antenna, 30MHz - 1GHz CBL6111A | B0544 | 15/04/2016 | 36 Months |
| 6dB Attenuator (3GHz) | B1444 | 15/04/2016 | 36 Months |
| CNE V Emission Source | B0855 | N/A | N/A |
| R&S HL050 Log Periodic Antenna | B0936 | 10/11/2016 | 36 Months |
| 3dB Attenuator (18GHz) | B1327 | 04/10/2017 | 12 Months |
| 18GHz Bonn Preamplifier BLM0118-5A | B1333 | 05/02/2018 | 12 Months |
| YES emission reference source CGE01C | B0996 | N/A | N/A |
| 3dB Attenuator (40GHz) | B1395 | 06/09/2016 | 36 Months |
| 0.5m 40GHz IW microwave cable | B1370 | 06/09/2016 | 36 Months |
| 5m 40GHz IW microwave cable | B1449 | 06/09/2016 | 36 Months |
| Maturo Antenna Mast | B1405 | N/A | N/A |
| Clark Compressor (Mast) | B0953 | N/A | N/A |
| Vaisala HM 34 Humidity and temperature meter | B1332 | 17/05/2017 | 36 Months |
| 2m 26GHz Gigalink test cable | B0957 | 02/10/2017 | 12 Months |
| 5m 26GHz Gigalink test cable | B0959 | 02/10/2017 | 12 Months |
| 9m N Type Cable PL800-NMNM-9M | B1591 | 02/10/2017 | 12 Months |