



FCC RADIO TEST REPORT

Applicant : LIMOTEC (DongGuan) Limited

Address : No.13, Heshi Road, Shishuikou Village, Qiaotou
Town, Dongguan City, Guangdong Province, China

Equipment : Bluetooth Module

Model No. : BLE01-T6

Trade Name : LIMOTEC

FCC ID : 2ARVS-BLE01-T6

I HEREBY CERTIFY THAT :

The sample was received on Oct. 15, 2018 and the testing was carried out on Oct. 19, 2018 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Assistant Manager

Tested by:

Spree Yei / Engineer

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	6
2.3 Test Mode and Test Software	7
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
2.6 Measurement Uncertainty	8
3. Test Equipment and Ancillaries Used for Tests	9
4. Antenna Requirements	10
4.1 Standard Applicable	10
4.2 Antenna Construction and Directional Gain.....	10
5. Test of AC Power Line Conducted Emission	11
5.1 Test Limit	11
5.2 Test Procedures	11
5.3 Typical Test Setup	12
5.4 Test Result and Data	13
5.5 Test Photographs	15
6. Test of Spurious Emission (Radiated)	16
6.1 Test Limit	16
6.2 Test Procedures	16
6.3 Typical Test Setup	17
6.4 Test Result and Data (9kHz ~ 30MHz).....	18
6.5 Test Result and Data (30MHz ~ 1GHz).....	18
6.6 Test Result and Data (1GHz ~ 25GHz).....	20
6.7 Restricted Bands of Operation	32
6.8 Test Photographs (30MHz ~ 1GHz)	33
6.9 Test Photographs (1GHz ~ 25GHz)	34
7. Test of Spurious Emission (Conducted).....	35
7.1 Test Limit	35
7.2 Test Procedure	35
7.3 Test Setup Layout	35
7.4 Test Result and Data	35
8. On Time, Duty Cycle and Measurement methods	42
8.1 Test Limit	42
8.2 Test Procedure	42
8.3 Test Setup Layout	42
8.4 Test Result and Data	42
9. 6dB Bandwidth Measurement Data	44
9.1 Test Limit	44



9.2	Test Procedures	44
9.3	Test Setup Layout	44
9.4	Test Result and Data	44
10.	Maximum Peak and Average Output Power	48
10.1	Test Limit	48
10.2	Test Procedures	48
10.3	Test Setup Layout	48
10.4	Test Result and Data	48
11.	Power Spectral Density	50
11.1	Test Limit	50
11.2	Test Procedures	50
11.3	Test Setup Layout	50
11.4	Test Result and Data	50
12.	Radio Frequency Exposure	54
12.1	Applicable Standards	54
12.2	EUT Specification	54
12.3	Test Results	55
12.4	Calculation	55
12.5	Maximum Permissible Exposure	56



History of this test report

Report No.	Issue Date	Description
TEFQ1810010	Oct 25, 2018	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.4:2014

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. AC Power Line Conducted Emission	Pass
15.209 15.205	. Radiated Spurious Emission	Pass
15.247(d)	. Conducted Spurious Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(e)	. Power Spectral Density	Pass

This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report.(TEFD1810010)



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Modulation Type	GFSK- (1Mbps) GFSK- (2Mbps) GFSK- (125kbps) GFSK- (500kbps)
Frequency Range	2402 - 2480 MHz
Antenna Type/ gain	Chip Antenna / 4.97 dBi

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, " SmartRF Studio 7:v2.6.1 under win10 was executed to transmit and receive data via Bluetooth.
- d. The following test modes were performed for the test:
 - Test Mode 1. GFSK (125kbps)
 - Test Mode 2. GFSK (500kbps)
 - Test Mode 3. GFSK (1Mbps)
 - Test Mode 4. GFSK (2Mbps)

2.4 Description of Test System

Device	Manufacturer	Model No.	Description
Notebook	ASUS	P2430U	Adapter, Unshielded, 1.8m



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-4399, R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	$\pm 5.007\text{dB}$
Radiated Spurious Emission(30MHz~1GHz)	$\pm 5.157\text{dB}$
Radiated Spurious Emission(1GHz~18GHz)	$\pm 6.383\text{dB}$
Radiated Spurious Emission(18GHz~40GHz)	$\pm 6.648\text{dB}$
Conducted Spurious Emission	$\pm 1.253\text{dB}$
6dB Bandwidth	$\pm 6.89\%$
Power Spectral Density	$\pm 0.630\text{dB}$
26 dB Occupied Bandwidth	$\pm 6.10\%$
Frequency Stability	$\pm 375\text{KHz}$
Channel Frequencies Separation	$\pm 6.10\%$
20dB Bandwidth	$\pm 6.12\%$
Dwell Time	$\pm 1.34\%$
Peak Output Power(Conducted Power Meter)	$\pm 0.86\text{dB}$
Temperature	$\pm 1.20\text{C}$
Humidity	$\pm 2.7\%$
Channel Move Time	$\pm 4.53\%$
Channel Closing Transmission Time	$\pm 6.61\%$
Threshold	$\pm 0.631\text{dB}$
Non occupancy period	$\pm 1.17\%$



3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI3	100443	2018/03/15	2019/03/14
LISN	ROHDE & SCHWARZ	ENV216	102185	2018/05/17	2019/05/16
Pulse Limiter	R&S	ESH3-Z2	101934	2018/02/22	2019/02/21
Bilog Antenna	Schwarzbeck	VULB9168	275	2018/09/17	2019/09/16
Active Loop Antenna	EMCO	6507	40855	2018/05/22	2019/05/21
Horn Antenna	EMCO	3115	31601	2018/09/26	2019/09/25
Horn Antenna	EMCO	3116	31970	2018/03/23	2019/03/22
Preamplifier	EM	EM330	60660	2018/03/08	2019/03/07
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2018/09/18	2019/09/17
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2017/11/10	2018/11/09
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2018/04/10	2019/04/09
Spectrum Analyzer	R&S	FSP40	100219	2018/07/03	2019/07/02
BLUETOOTH TESTER	R&S	CBT	101133	2018/04/02	2019/04/01
Attenuator	KEYSIGHT	8491B	MY39250705	2018/09/04	2019/09/03
Rotary Attenuator	Agilent	8495B	MY42146680	2018/03/29	2019/03/28
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2018/08/30	2019/08/29
Series Power Meter	Anritsu	ML2495A	1224005	2018/03/23	2019/03/22
Power Sensor	Anritsu	MA2411B	1207295	2018/03/23	2019/03/22
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	V3.0.0.0	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Antenna Gain
Chip Antenna	4.97 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

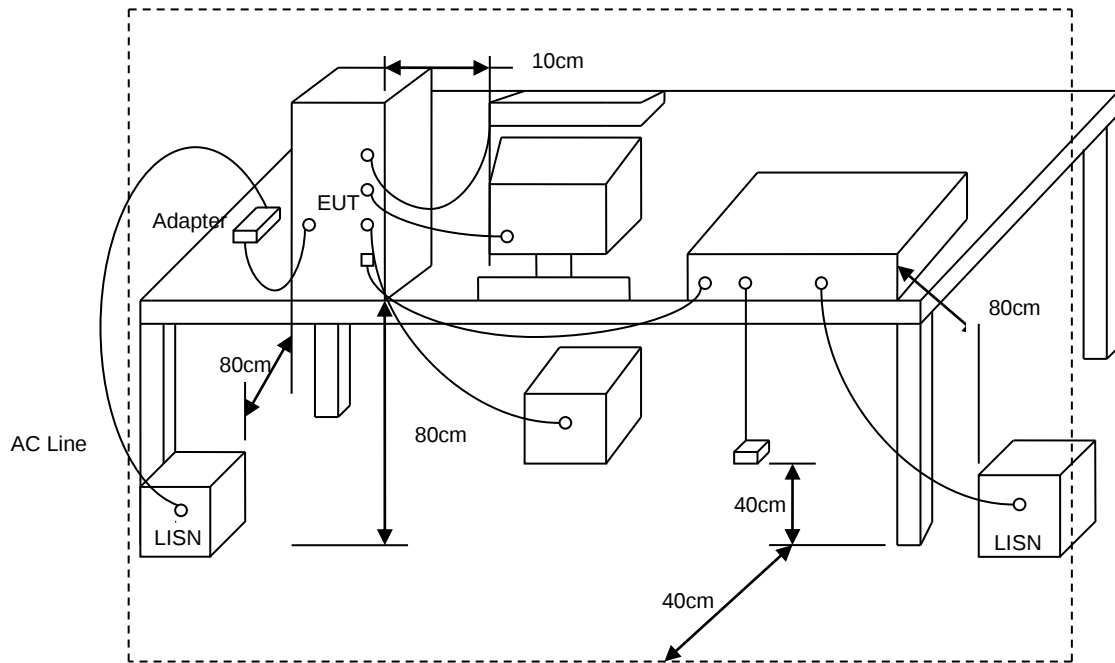



5.4 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 1	Temperature	: 20 °C
Test Date	: Oct. 19, 2018	Humidity	: 40 %

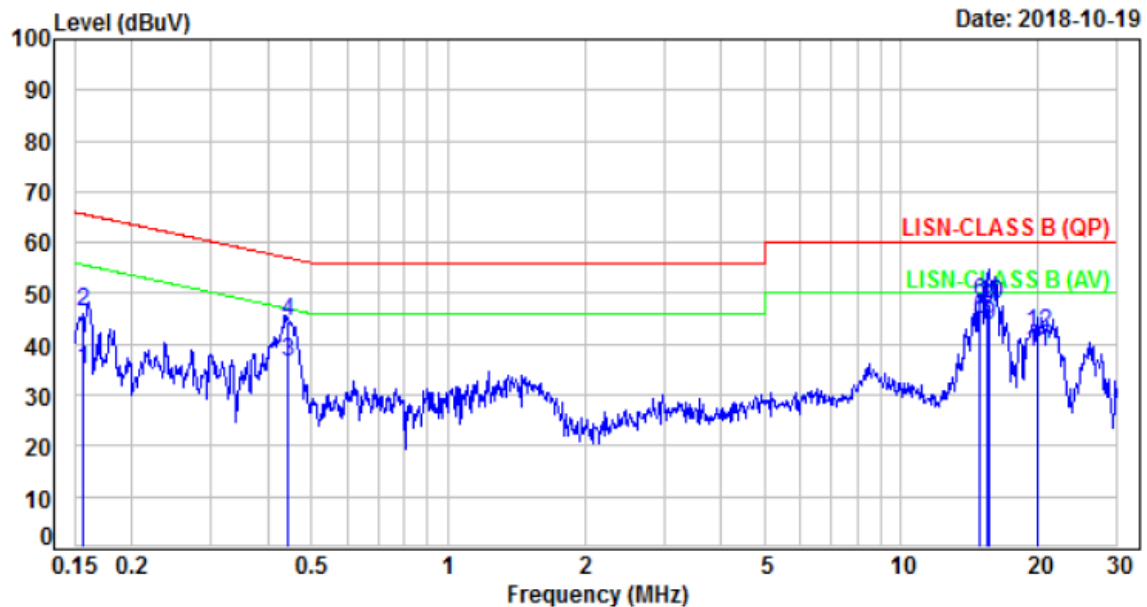

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.70	25.45	35.15	55.63	-20.48	Average	P
2	0.16	9.70	36.78	46.48	65.63	-19.15	QP	P
3	0.44	9.70	26.75	36.45	47.02	-10.57	Average	P
4	0.44	9.70	34.67	44.37	57.02	-12.65	QP	P
5	14.95	9.98	34.94	44.92	50.00	-5.08	Average	P
6	14.95	9.98	38.40	48.38	60.00	-11.62	QP	P
7	15.47	9.98	34.72	44.70	50.00	-5.30	Average	P
8	15.47	9.98	37.08	47.06	60.00	-12.94	QP	P
9	15.67	9.99	33.83	43.82	50.00	-6.18	Average	P
10	15.67	9.99	37.81	47.80	60.00	-12.20	QP	P
11	19.94	10.01	28.22	38.23	50.00	-11.77	Average	P
12	19.94	10.01	32.17	42.18	60.00	-17.82	QP	P


Note: Level = Reading + Factor

Margin = Level – Limit

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1	Temperature	: 20 °C
Test Date	: Oct. 19, 2018	Humidity	: 40 %

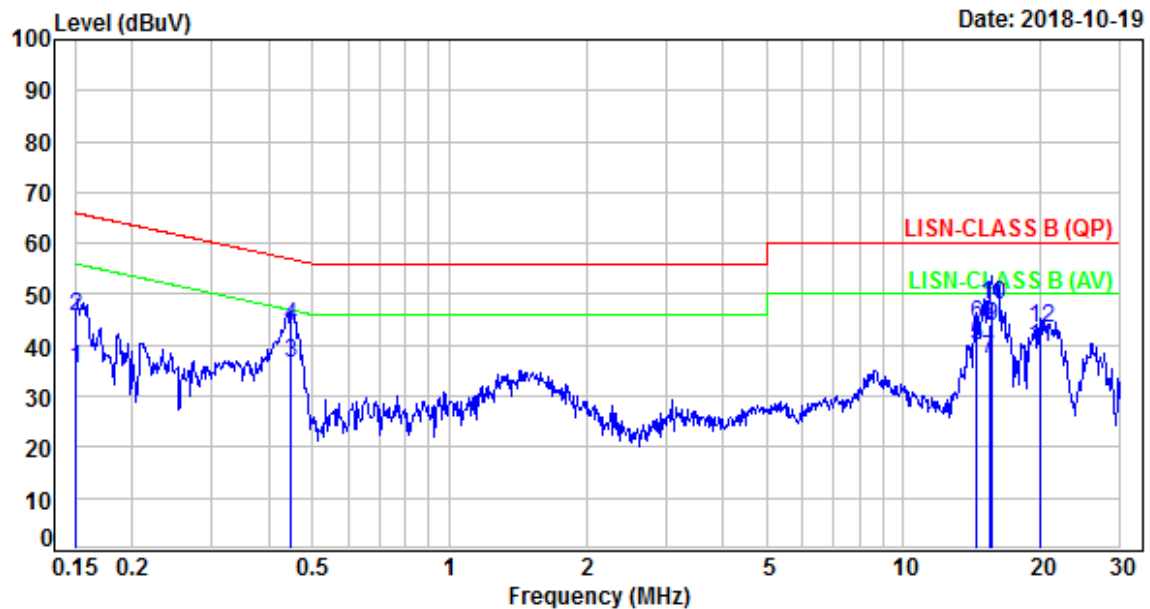

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.70	25.57	35.27	55.96	-20.69	Average	P
2	0.15	9.70	35.85	45.55	65.96	-20.41	QP	P
3	0.45	9.70	26.71	36.41	46.94	-10.53	Average	P
4	0.45	9.70	34.15	43.85	56.94	-13.09	QP	P
5	14.42	10.02	29.97	39.99	50.00	-10.01	Average	P
6	14.42	10.02	34.17	44.19	60.00	-15.81	QP	P
7	15.43	10.03	27.10	37.13	50.00	-12.87	Average	P
8	15.43	10.03	33.90	43.93	60.00	-16.07	QP	P
9	15.67	10.04	33.71	43.75	50.00	-6.25	Average	P
10	15.67	10.04	37.73	47.77	60.00	-12.23	QP	P
11	19.94	10.07	29.53	39.60	50.00	-10.40	Average	P
12	19.94	10.07	33.29	43.36	60.00	-16.64	QP	P

Note: Level = Reading + Factor

Margin = Level - Limit

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss+ Attenuator



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




6.3 Typical Test Setup


Below 30MHz test setup

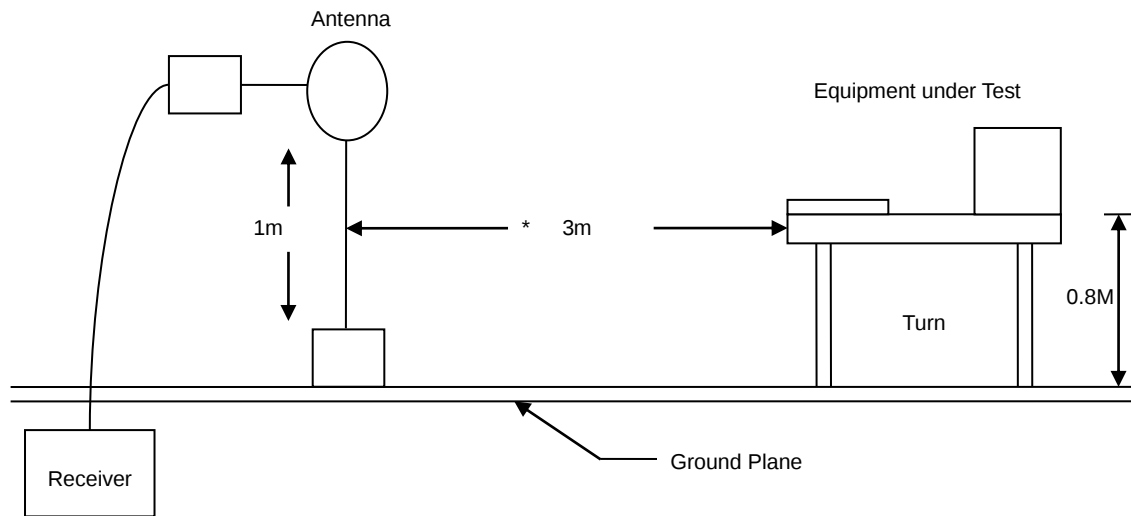

30MHz- 1GHz Test Setup

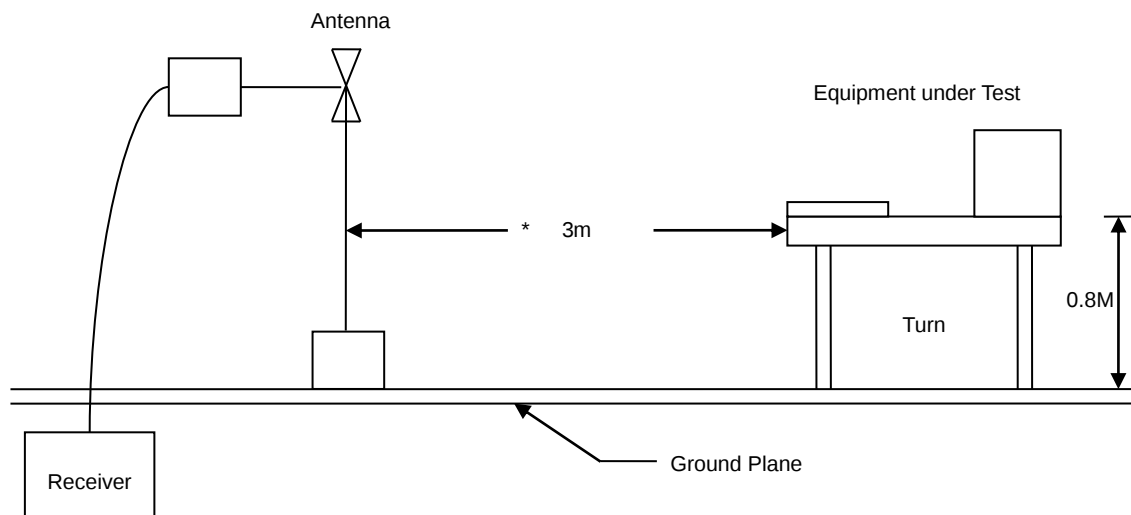

Above 1GHz Test Setup

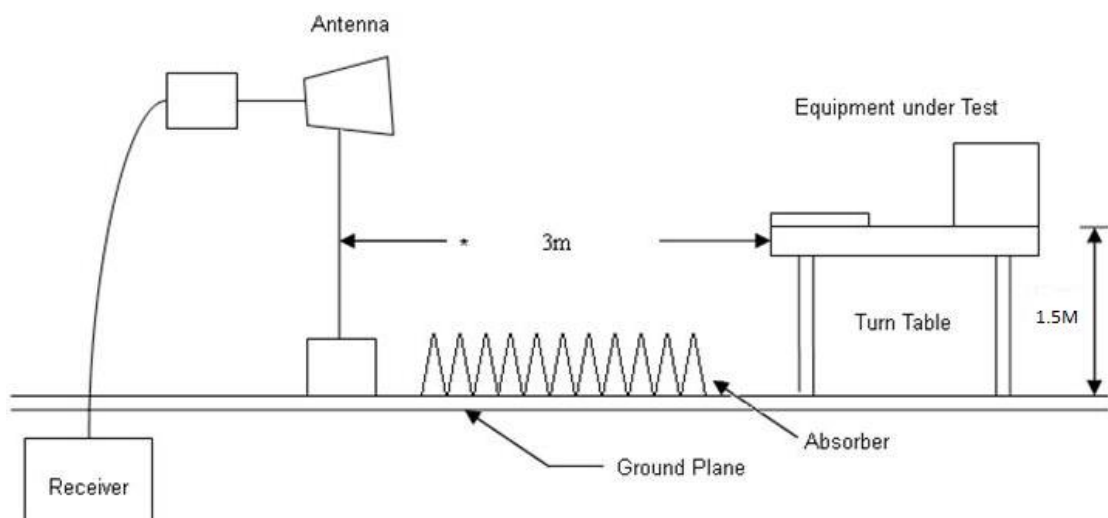




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)


Power	:	DC Source	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1	Temperature	:	23 °C
Test Date	:	Oct. 16, 2018	Humidity	:	61 %

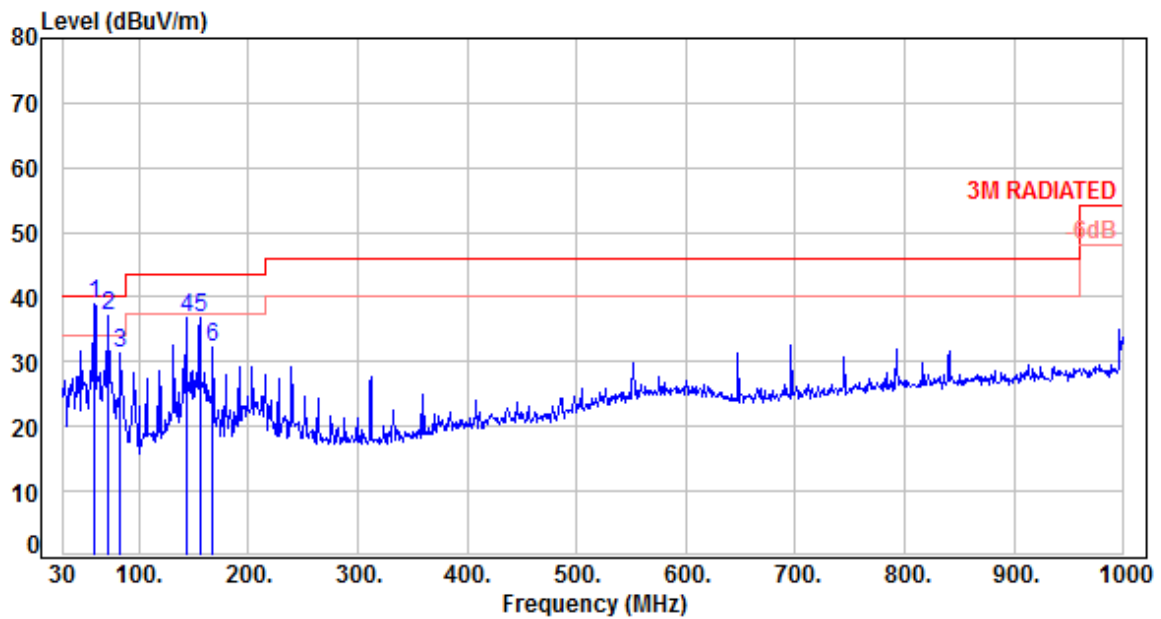

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	59.10	-9.90	48.79	38.89	40.00	-1.11	QP	100	178	P
2	71.71	-11.73	48.82	37.09	40.00	-2.91	QP	100	178	P
3	83.35	-14.38	45.85	31.47	40.00	-8.53	Peak	100	0	P
4	143.49	-9.60	46.50	36.90	43.50	-6.60	Peak	100	0	P
5	156.10	-9.37	46.14	36.77	43.50	-6.73	Peak	100	0	P
6	167.74	-9.33	41.69	32.36	43.50	-11.14	Peak	100	0	P



Power	: DC Source	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 23 °C
Test Date	: Oct. 16, 2018	Humidity	: 61 %

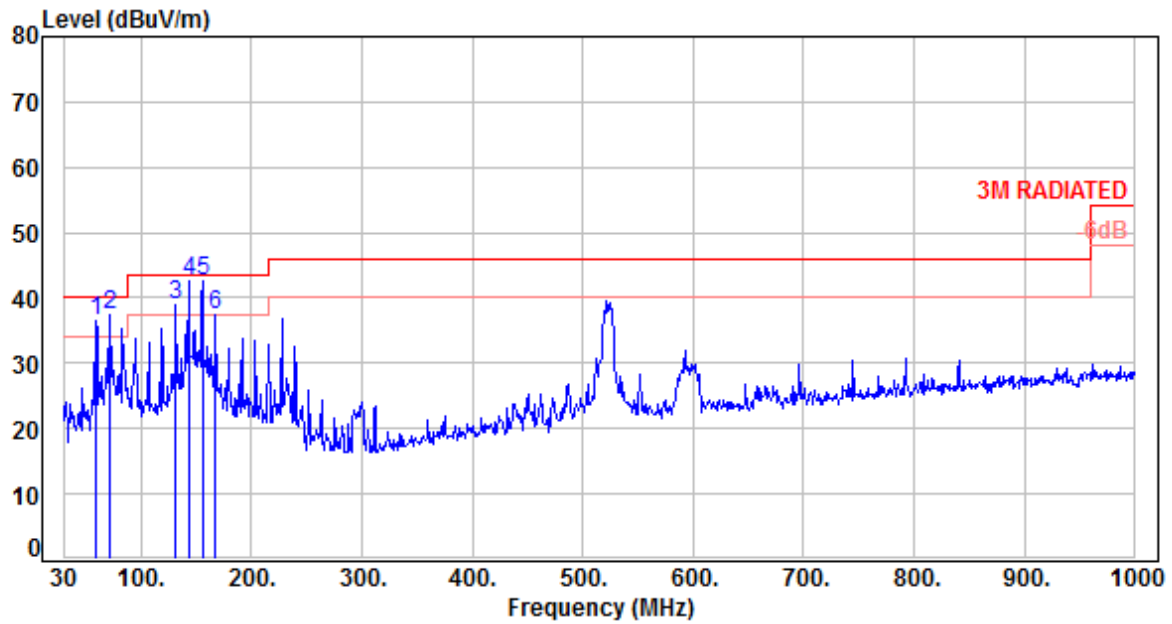


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	59.10	-9.90	46.46	36.56	40.00	-3.44	QP	200	165	P
2	71.71	-11.73	49.22	37.49	40.00	-2.51	QP	200	165	P
3	131.85	-10.55	49.53	38.98	43.50	-4.52	QP	200	238	P
4	143.49	-9.60	52.05	42.45	43.50	-1.05	QP	200	238	P
5	156.10	-9.37	52.05	42.68	43.50	-0.82	QP	200	238	P
6	167.74	-9.33	46.81	37.48	43.50	-6.02	QP	200	238	P



6.6 Test Result and Data (1GHz ~ 25GHz)


Power	:	DC Source	Pol/Phase	:	VERTICAL
Test Mode	:	CH00, 1Mbps	Temperature	:	23 °C
Test Date	:	Oct. 16, 2018	Humidity	:	61 %

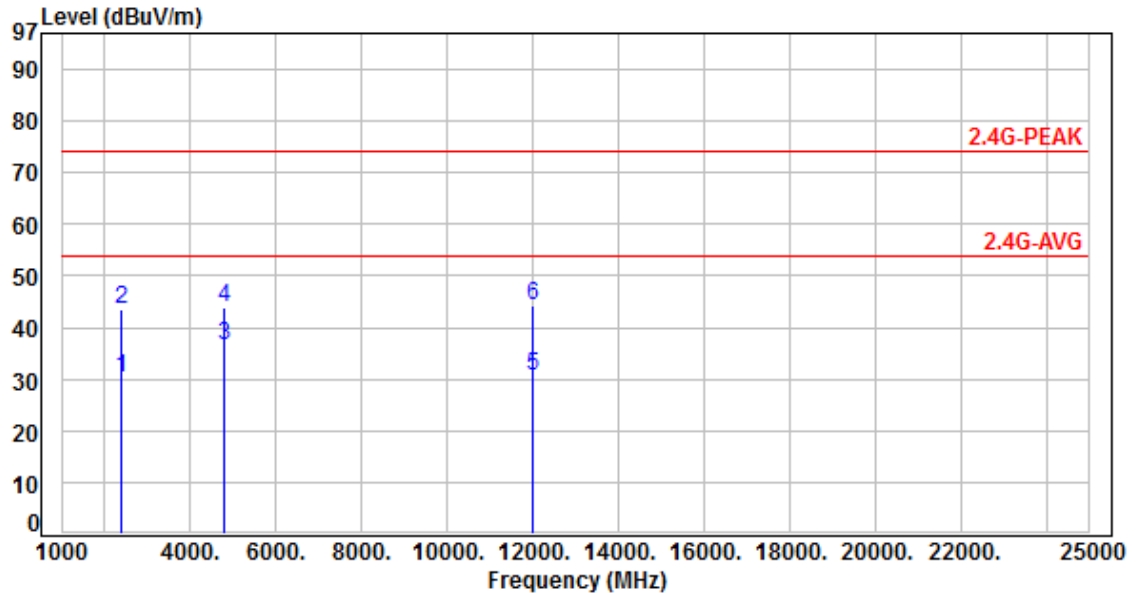

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	45.90	30.22	54.00	-23.78	Average	162	246	P
2	2390.00	-15.68	59.20	43.52	74.00	-30.48	Peak	162	246	P
3	4804.00	-8.53	45.20	36.67	54.00	-17.33	Average	100	70	P
4	4804.00	-8.53	52.30	43.77	74.00	-30.23	Peak	100	70	P
5	12010.00	1.77	28.67	30.44	54.00	-23.56	Average	100	82	P
6	12010.00	1.77	42.66	44.43	74.00	-29.57	Peak	100	82	P




Power	: DC Source	Pol/Phase	: HORIZONTAL
Test Mode	: CH00, 1Mbps	Temperature	: 23 °C
Test Date	: Oct. 16, 2018	Humidity	: 61 %

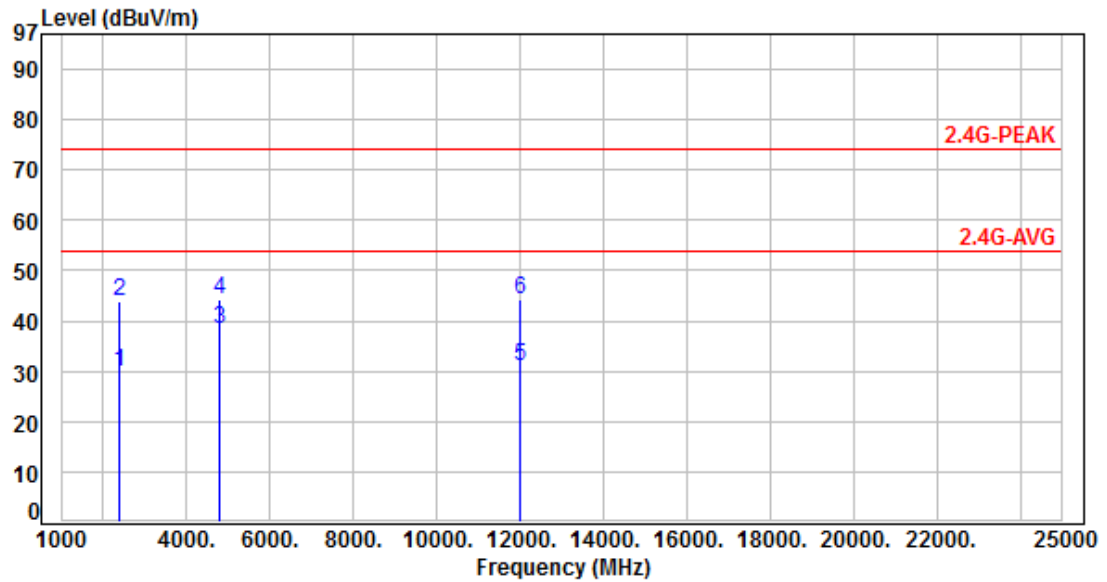

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	45.60	29.92	54.00	-24.08	Average	100	170	P
2	2390.00	-15.68	59.50	43.82	74.00	-30.18	Peak	100	170	P
3	4804.00	-8.53	47.00	38.47	54.00	-15.53	Average	100	321	P
4	4804.00	-8.53	52.90	44.37	74.00	-29.63	Peak	100	321	P
5	12010.00	1.77	29.11	30.88	54.00	-23.12	Average	100	335	P
6	12010.00	1.77	42.51	44.28	74.00	-29.72	Peak	100	335	P




Power	:	DC Source	Pol/Phase	:	VERTICAL
Test Mode	:	CH19, 1Mbps	Temperature	:	23 °C
Test Date	:	Oct. 16, 2018	Humidity	:	61 %

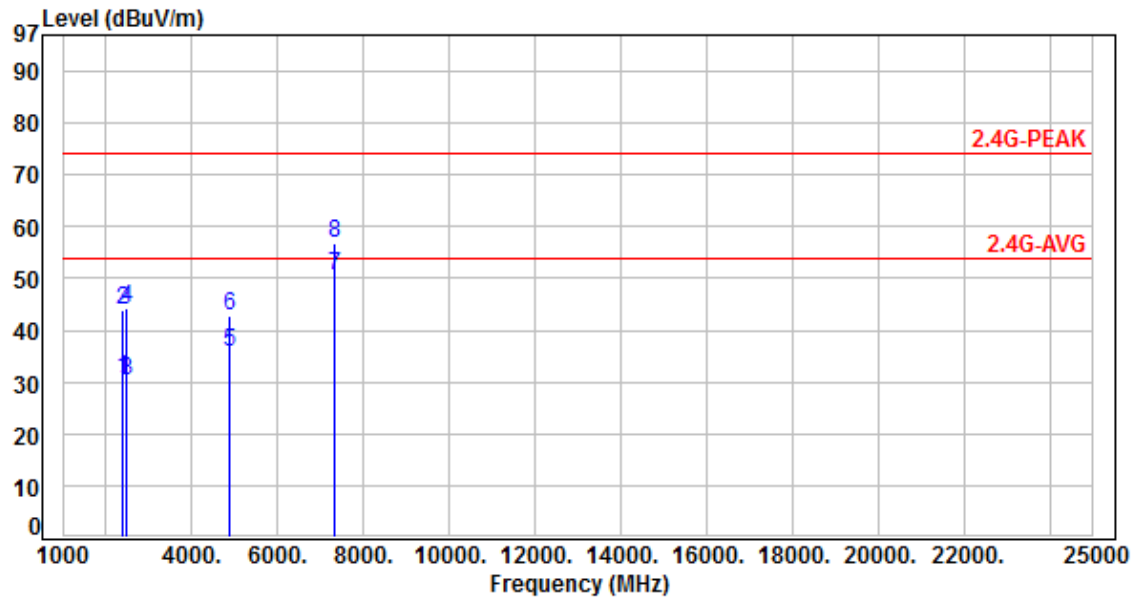

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	46.20	30.52	54.00	-23.48	Average	100	15	P
2	2390.00	-15.68	59.40	43.72	74.00	-30.28	Peak	100	15	P
3	2483.50	-15.36	45.70	30.34	54.00	-23.66	Average	100	15	P
4	2483.50	-15.36	59.60	44.24	74.00	-29.76	Peak	100	15	P
5	4880.00	-8.30	44.19	35.89	54.00	-18.11	Average	100	160	P
6	4880.00	-8.30	51.19	42.89	74.00	-31.11	Peak	100	160	P
7	7320.00	-3.83	54.39	50.56	54.00	-3.44	Average	100	246	P
8	7320.00	-3.83	60.49	56.66	74.00	-17.34	Peak	100	246	P




Power	:	DC Source	Pol/Phase	:	HORIZONTAL
Test Mode	:	CH19, 1Mbps	Temperature	:	23 °C
Test Date	:	Oct. 16, 2018	Humidity	:	61 %

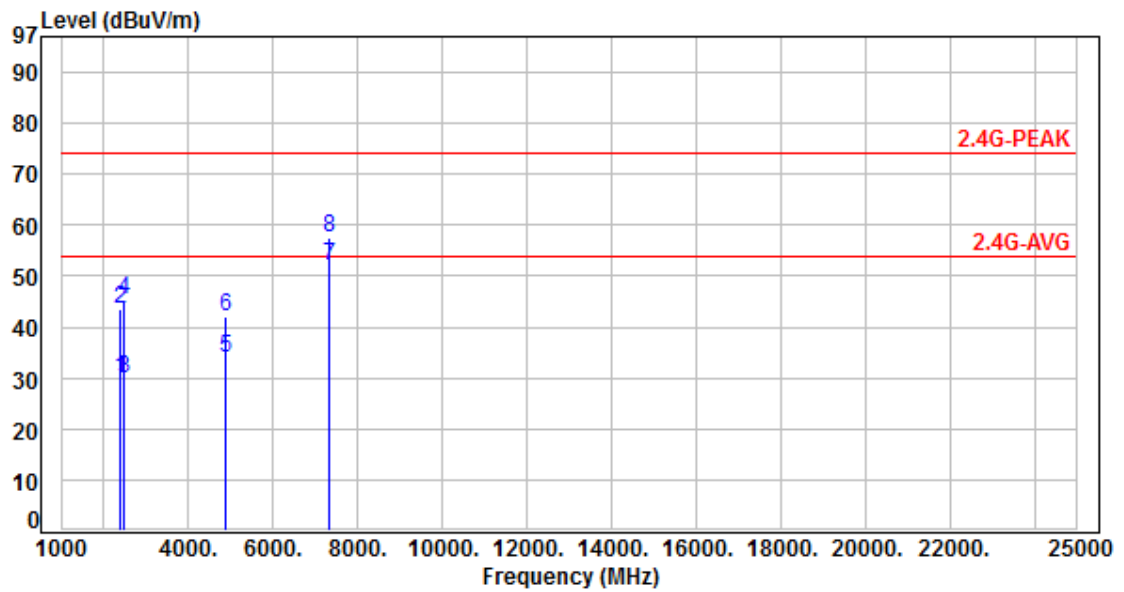

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	45.70	30.02	54.00	-23.98	Average	100	171	P
2	2390.00	-15.68	59.20	43.52	74.00	-30.48	Peak	100	171	P
3	2483.50	-15.36	45.40	30.04	54.00	-23.96	Average	100	171	P
4	2483.50	-15.36	60.90	45.54	74.00	-28.46	Peak	100	171	P
5	4880.00	-8.30	42.29	33.99	54.00	-20.01	Average	100	357	P
6	4880.00	-8.30	50.49	42.19	74.00	-31.81	Peak	100	357	P
7	7320.00	-3.83	55.69	51.86	54.00	-2.14	Average	274	36	P
8	7320.00	-3.83	61.49	57.66	74.00	-16.34	Peak	274	36	P




Power	:	DC Source	Pol/Phase	:	VERTICAL
Test Mode	:	CH39, 1Mbps	Temperature	:	23 °C
Test Date	:	Oct. 16, 2018	Humidity	:	61 %

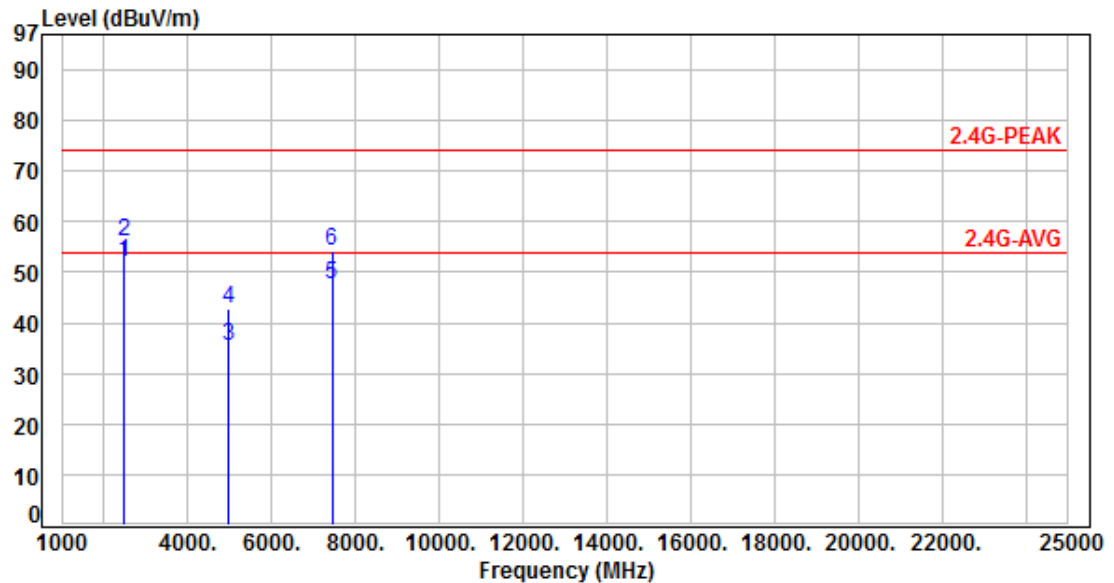

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.36	67.40	52.04	54.00	-1.96	Average	230	175	P
2	2483.50	-15.36	71.50	56.14	74.00	-17.86	Peak	230	175	P
3	4960.00	-8.07	43.49	35.42	54.00	-18.58	Average	100	337	P
4	4960.00	-8.07	50.79	42.72	74.00	-31.28	Peak	100	337	P
5	7440.00	-3.52	51.00	47.48	54.00	-6.52	Average	100	241	P
6	7440.00	-3.52	57.90	54.38	74.00	-19.62	Peak	100	241	P




Power	:	DC Source	Pol/Phase	:	HORIZONTAL
Test Mode	:	CH39, 1Mbps	Temperature	:	23 °C
Test Date	:	Oct. 16, 2018	Humidity	:	61 %

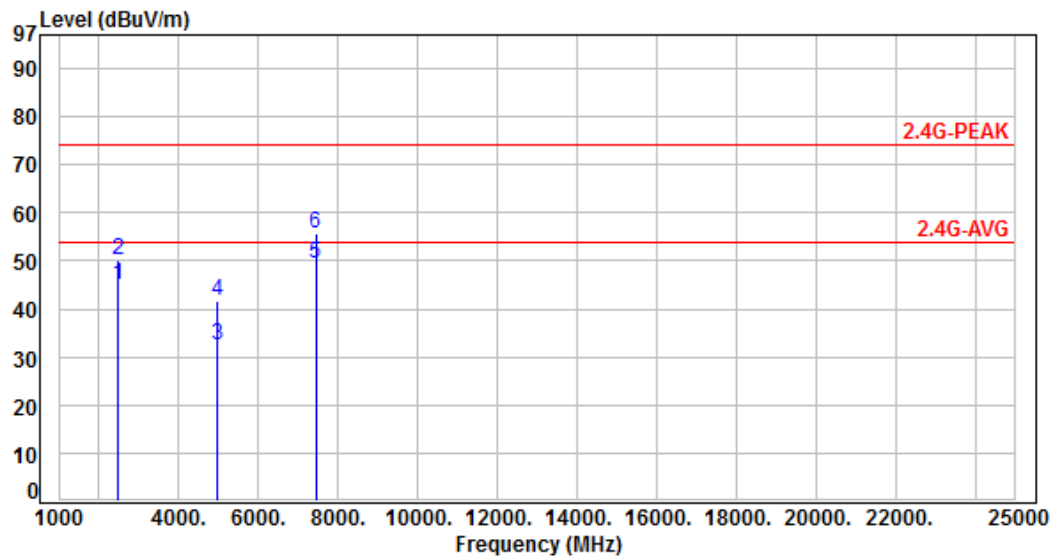

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.36	60.50	45.14	54.00	-8.86	Average	400	270	P
2	2483.50	-15.36	65.60	50.24	74.00	-23.76	Peak	400	270	P
3	4960.00	-8.07	40.59	32.52	54.00	-21.48	Average	100	170	P
4	4960.00	-8.07	49.79	41.72	74.00	-32.28	Peak	100	170	P
5	7440.00	-3.52	52.90	49.38	54.00	-4.62	Average	301	27	P
6	7440.00	-3.52	59.20	55.68	74.00	-18.32	Peak	301	27	P




Power	:	DC Source	Pol/Phase	:	VERTICAL
Test Mode	:	CH00, 2Mbps	Temperature	:	23 °C
Test Date	:	Oct. 16, 2018	Humidity	:	61 %

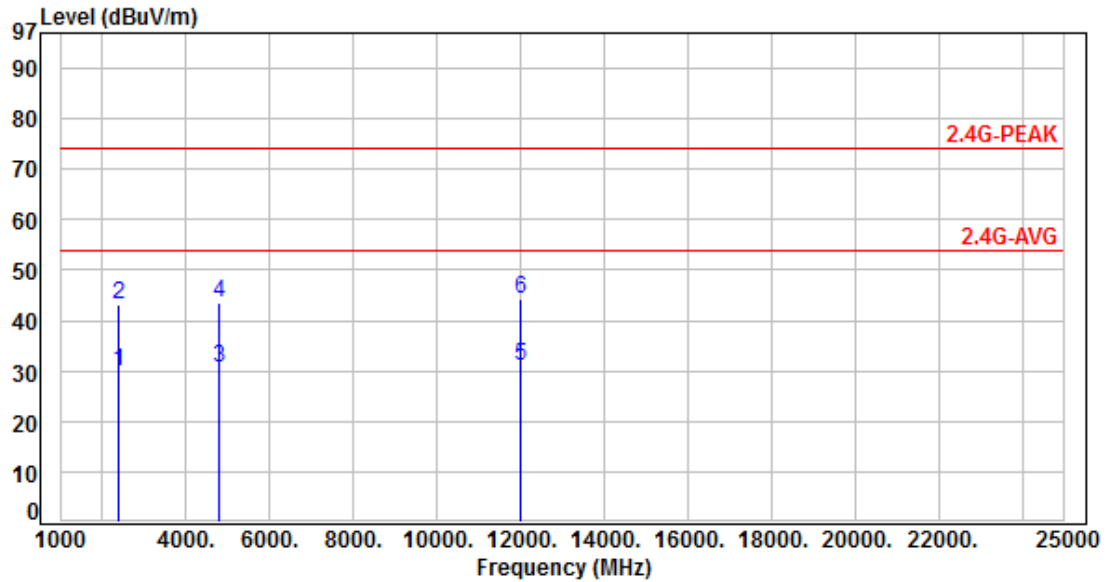

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	45.66	29.98	54.00	-24.02	Average	138	199	P
2	2390.00	-15.68	58.97	43.29	74.00	-30.71	Peak	138	199	P
3	4804.00	-8.53	39.04	30.51	54.00	-23.49	Average	206	27	P
4	4804.00	-8.53	52.21	43.68	74.00	-30.32	Peak	206	27	P
5	12010.00	1.77	29.19	30.96	54.00	-23.04	Average	238	17	P
6	12010.00	1.77	42.55	44.32	74.00	-29.68	Peak	238	17	P




Power	: DC Source	Pol/Phase	: HORIZONTAL
Test Mode	: CH00, 2Mbps	Temperature	: 23 °C
Test Date	: Oct. 16, 2018	Humidity	: 61 %

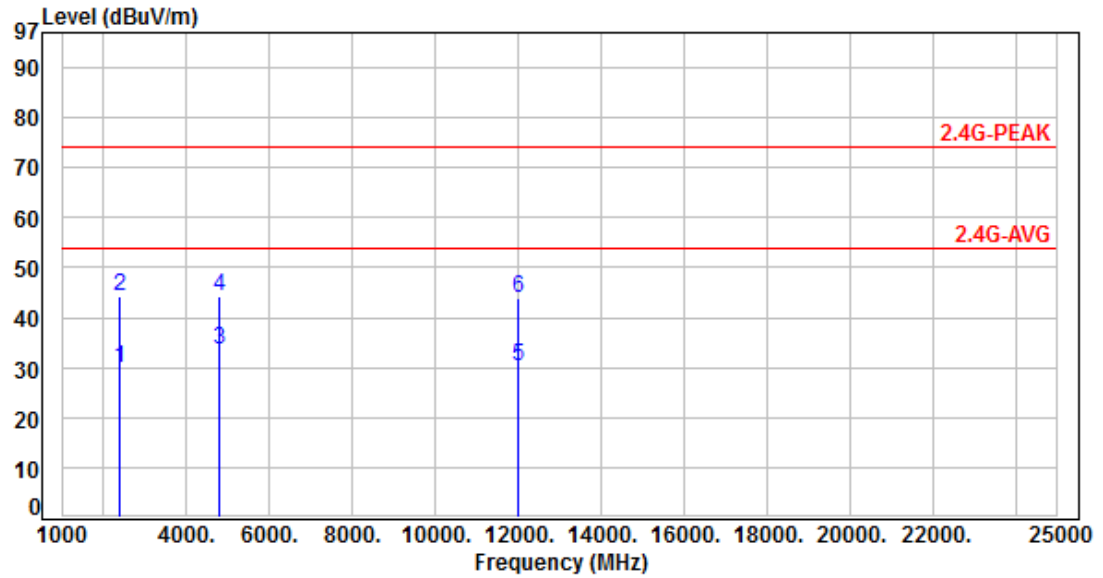

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	45.63	29.95	54.00	-24.05	Average	182	100	P
2	2390.00	-15.68	59.93	44.25	74.00	-29.75	Peak	182	100	P
3	4804.00	-8.53	42.15	33.62	54.00	-20.38	Average	121	320	P
4	4804.00	-8.53	52.64	44.11	74.00	-29.89	Peak	121	320	P
5	12010.00	1.77	28.47	30.24	54.00	-23.76	Average	163	350	P
6	12010.00	1.77	42.01	43.78	74.00	-30.22	Peak	163	350	P




Power	:	DC Source	Pol/Phase	:	VERTICAL
Test Mode	:	CH19, 2Mbps	Temperature	:	23 °C
Test Date	:	Oct. 16, 2018	Humidity	:	61 %

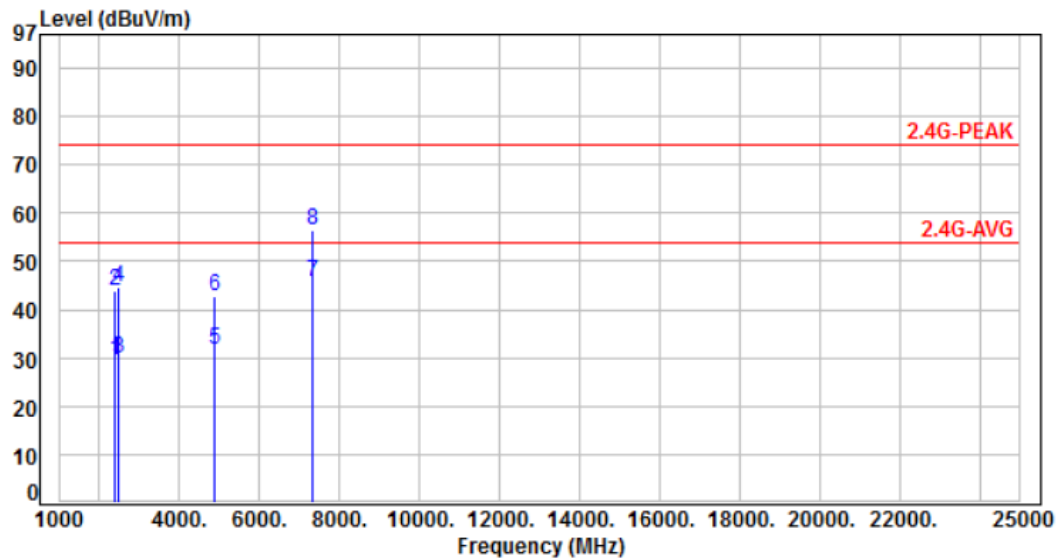

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	45.20	29.52	54.00	-24.48	Average	100	174	P
2	2390.00	-15.68	59.66	43.98	74.00	-30.02	Peak	100	174	P
3	2483.50	-15.36	45.21	29.85	54.00	-24.15	Average	200	156	P
4	2483.50	-15.36	59.87	44.51	74.00	-29.49	Peak	200	156	P
5	4880.00	-8.30	39.99	31.69	54.00	-22.31	Average	106	160	P
6	4880.00	-8.30	50.94	42.64	74.00	-31.36	Peak	106	160	P
7	7320.00	-3.83	49.57	45.74	54.00	-8.26	Average	132	239	P
8	7320.00	-3.83	60.16	56.33	74.00	-17.67	Peak	132	239	P




Power	: DC Source	Pol/Phase	: HORIZONTAL
Test Mode	: CH19, 2Mbps	Temperature	: 23 °C
Test Date	: Oct. 16, 2018	Humidity	: 61 %

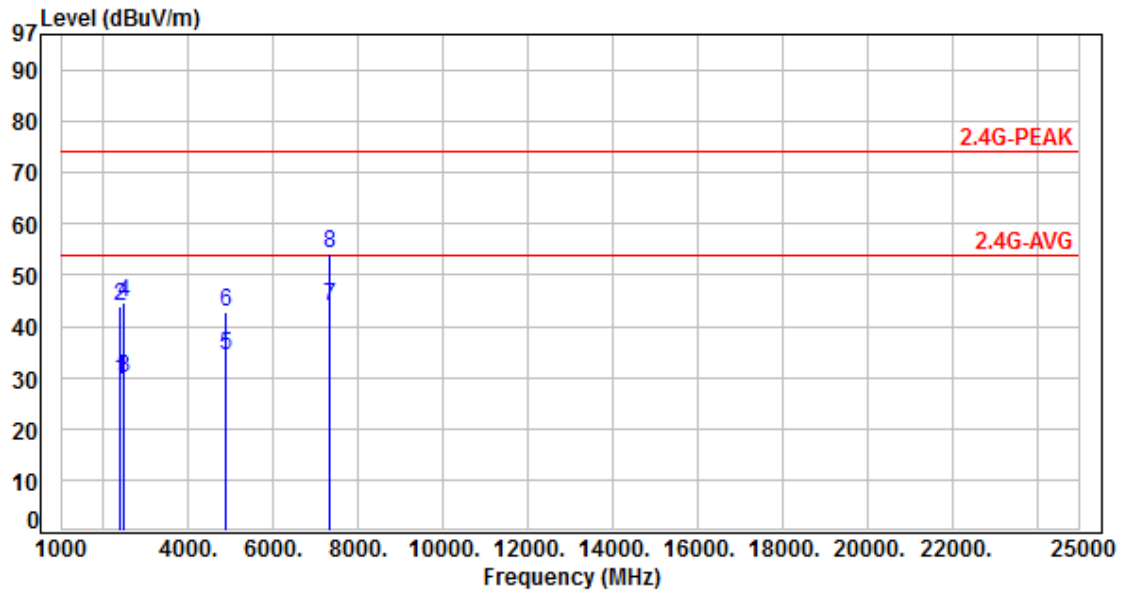

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.68	45.08	29.40	54.00	-24.60	Average	334	188	P
2	2390.00	-15.68	59.61	43.93	74.00	-30.07	Peak	334	188	P
3	2483.50	-15.36	45.41	30.05	54.00	-23.95	Average	328	165	P
4	2483.50	-15.36	59.96	44.60	74.00	-29.40	Peak	328	165	P
5	4880.00	-8.30	42.67	34.37	54.00	-19.63	Average	129	214	P
6	4880.00	-8.30	51.00	42.70	74.00	-31.30	Peak	129	214	P
7	7320.00	-3.83	47.82	43.99	54.00	-10.01	Average	223	26	P
8	7320.00	-3.83	58.19	54.36	74.00	-19.64	Peak	223	26	P




Power	: DC Source	Pol/Phase	: VERTICAL
Test Mode	: CH39, 2Mbps	Temperature	: 23 °C
Test Date	: Oct. 16, 2018	Humidity	: 61 %

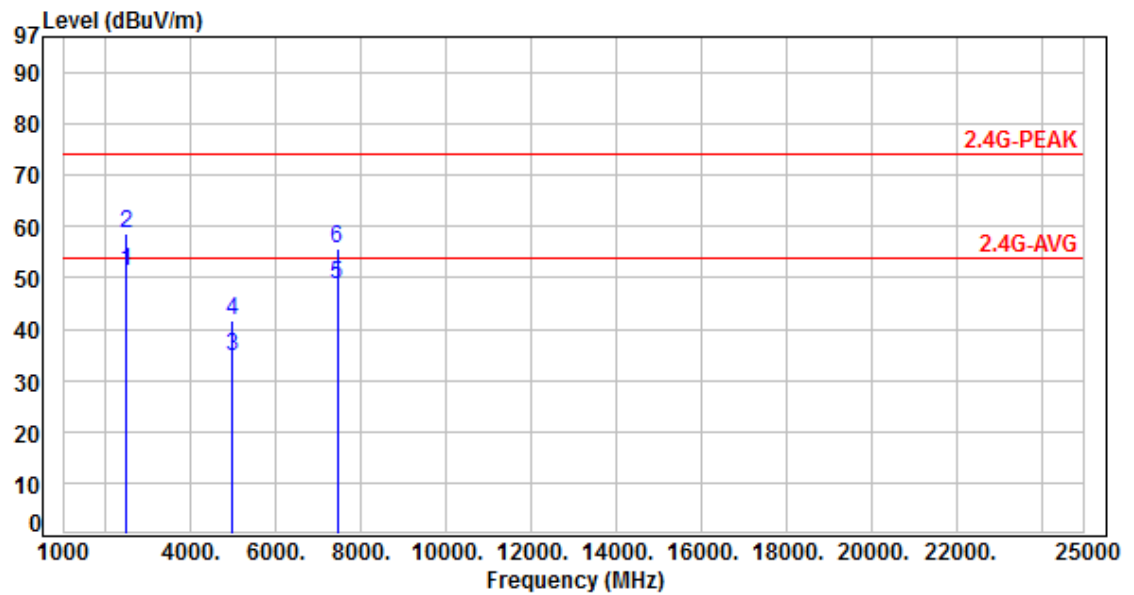

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.36	66.49	51.13	54.00	-2.87	Average	300	174	P
2	2483.50	-15.36	73.83	58.47	74.00	-15.53	Peak	300	174	P
3	4960.00	-8.07	42.87	34.80	54.00	-19.20	Average	100	339	P
4	4960.00	-8.07	49.60	41.53	74.00	-32.47	Peak	100	339	P
5	7440.00	-3.52	52.30	48.78	54.00	-5.22	Average	100	257	P
6	7440.00	-3.52	59.07	55.55	74.00	-18.45	Peak	100	257	P



Power	: DC Source	Pol/Phase	: HORIZONTAL
Test Mode	: CH39, 2Mbps	Temperature	: 23 °C
Test Date	: Oct. 16, 2018	Humidity	: 61 %

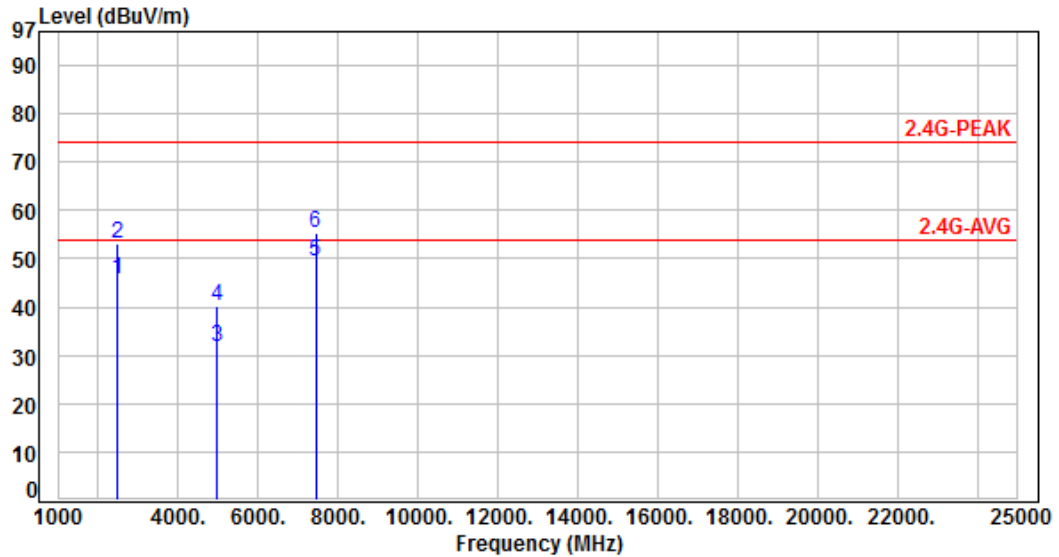

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.36	60.92	45.56	54.00	-8.44	Average	400	245	P
2	2483.50	-15.36	68.61	53.25	74.00	-20.75	Peak	400	245	P
3	4960.00	-8.07	39.68	31.61	54.00	-22.39	Average	100	28	P
4	4960.00	-8.07	48.24	40.17	74.00	-33.83	Peak	100	28	P
5	7440.00	-3.52	52.80	49.28	54.00	-4.72	Average	323	334	P
6	7440.00	-3.52	59.02	55.50	74.00	-18.50	Peak	323	334	P



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Spurious Emission (Conducted)


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data

Test Result	: PASS	Temperature	: 23°C
Test Date	: Oct. 19, 2018	Humidity	: 62%






Note: Test plots refer to the following pages.



Modulation Type: GFSK-125kbps
CH00

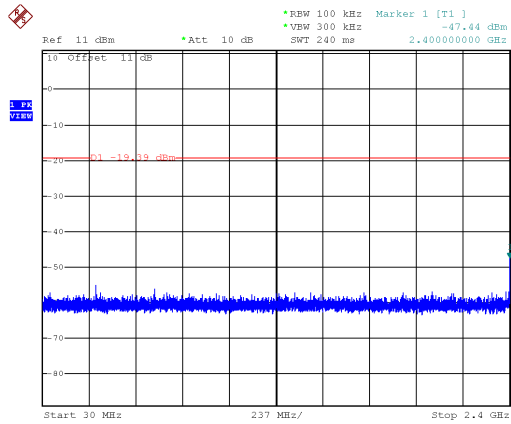


Modulation Type: GFSK-125kbps
CH19

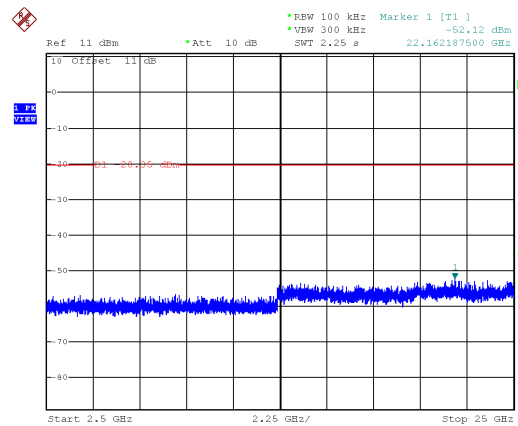
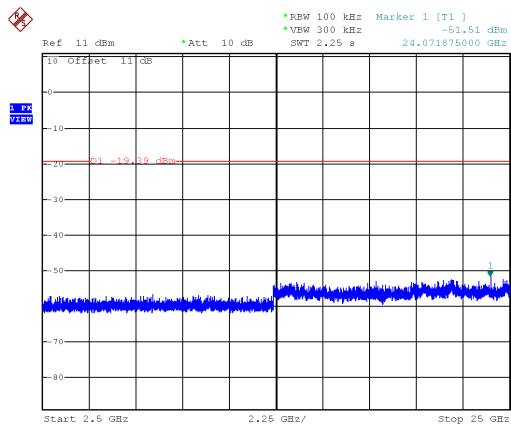
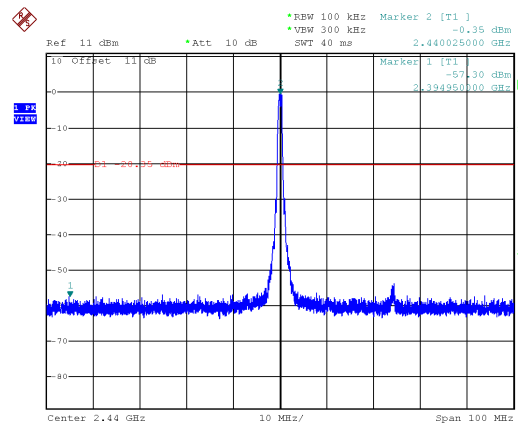
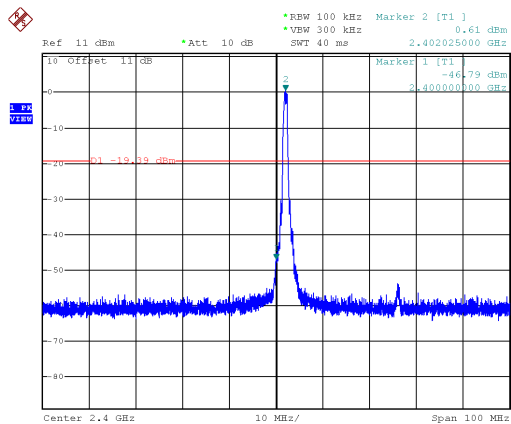
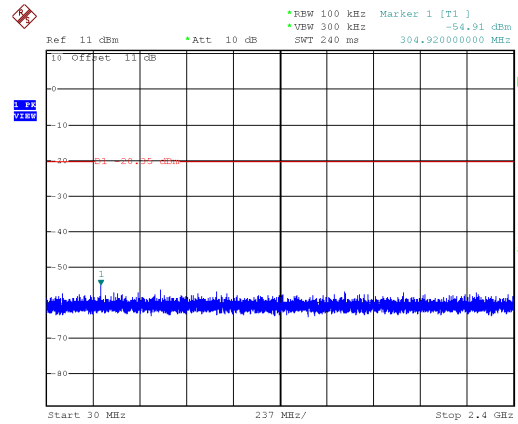




Modulation Type: GFSK-125kbps
CH39

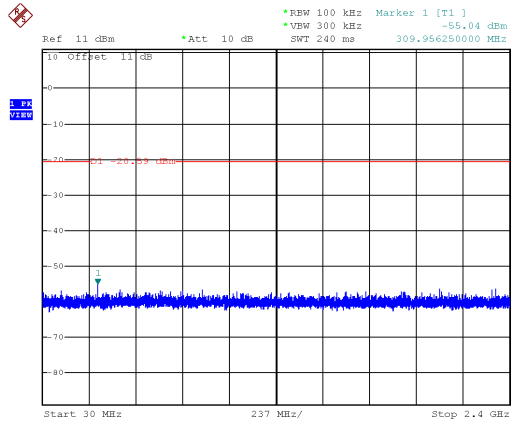


Modulation Type: GFSK-500kbps
CH00

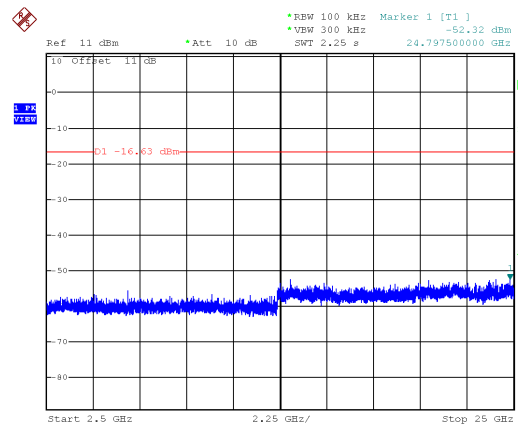
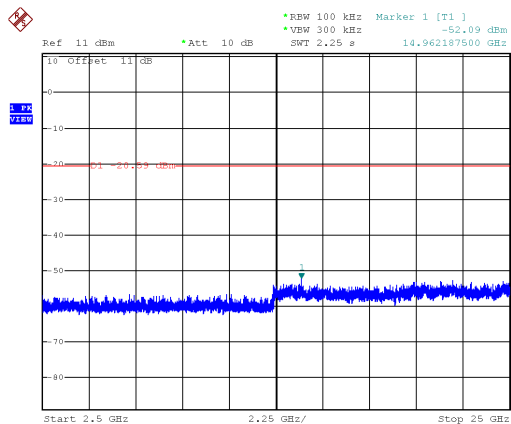
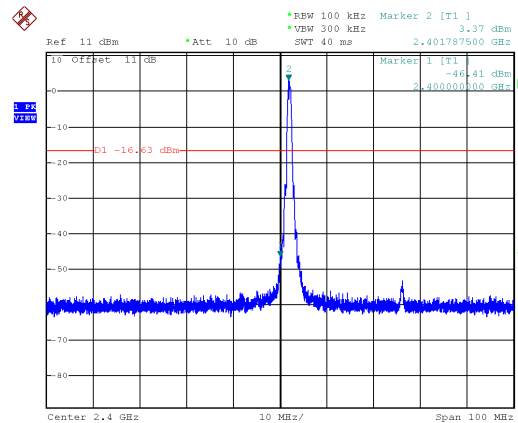
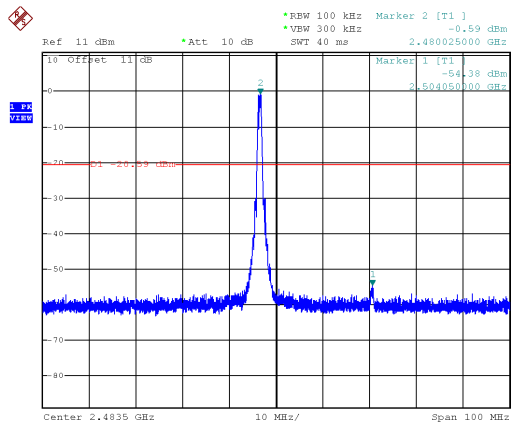
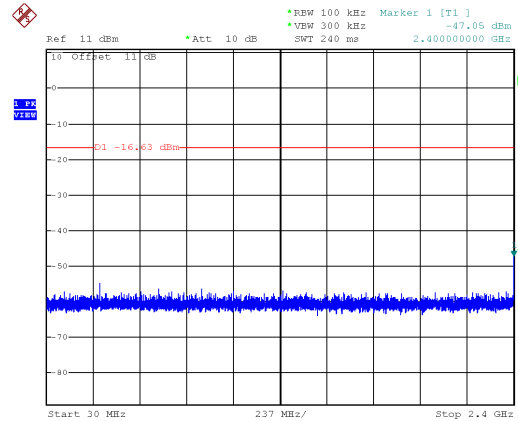




Modulation Type: GFSK-500kbps
CH19

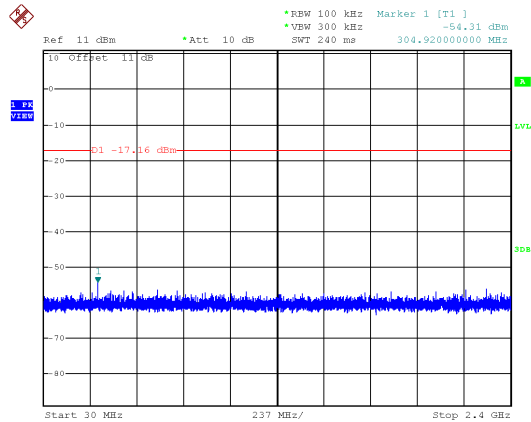


Modulation Type: GFSK-500kbps
CH39

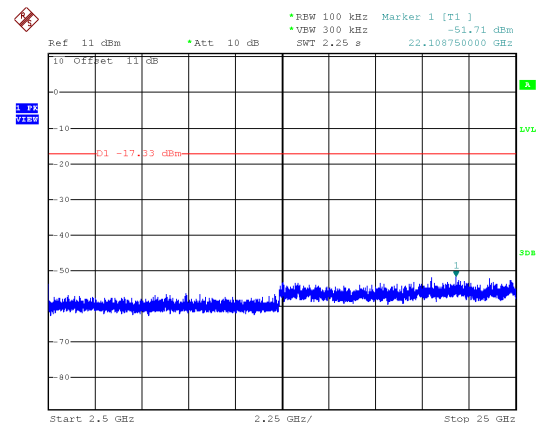
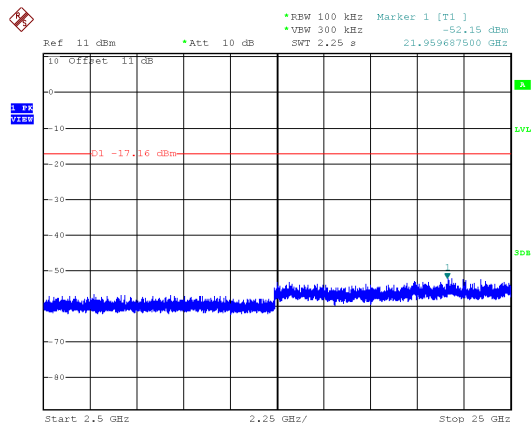
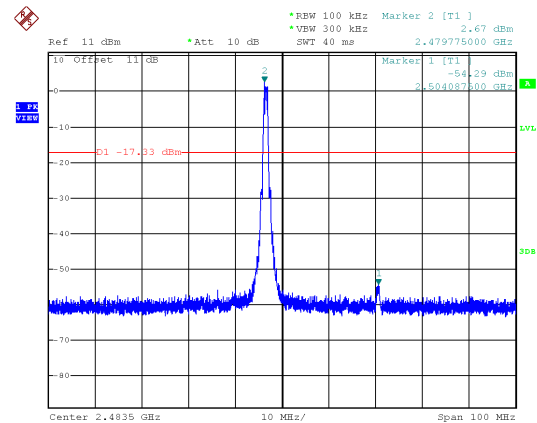
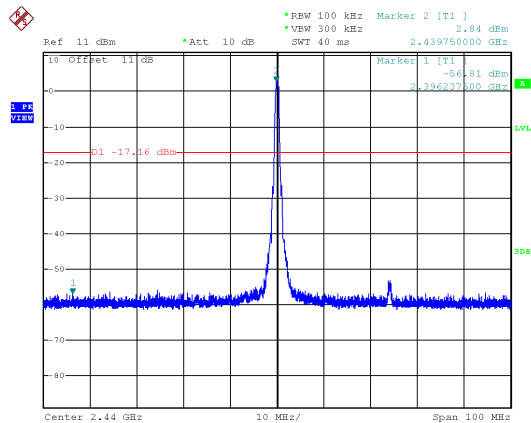
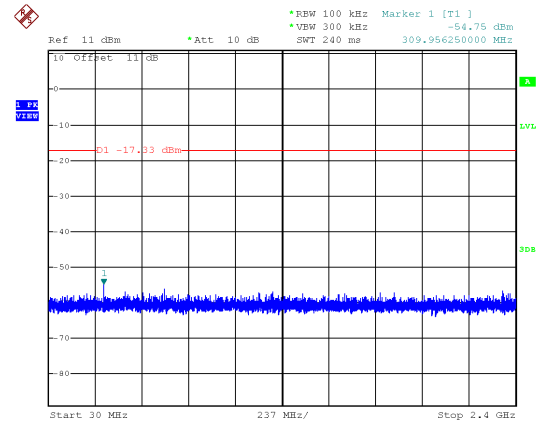




Modulation Type: GFSK-1Mbps
CH00

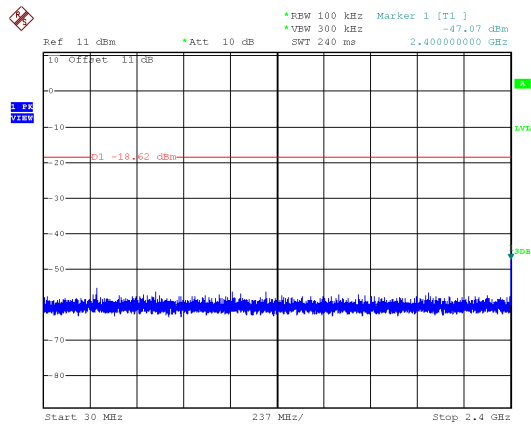


Modulation Type: GFSK-1Mbps
CH19

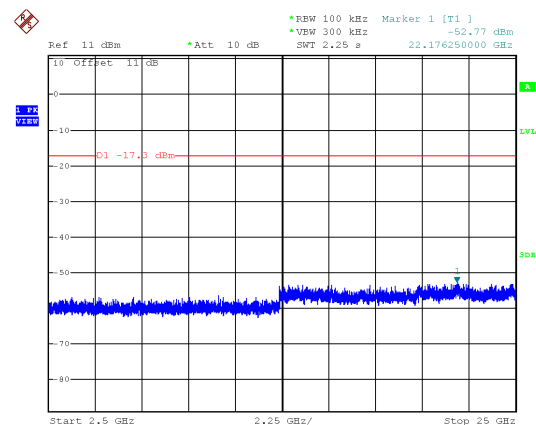
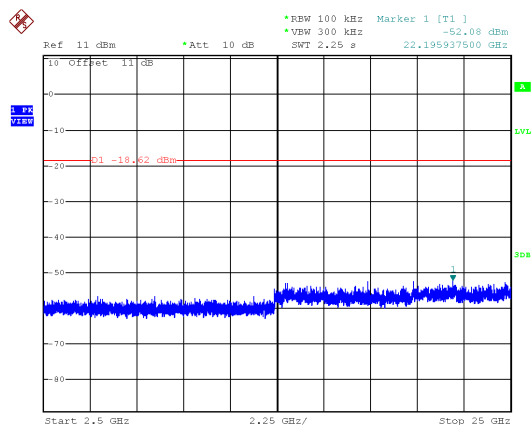
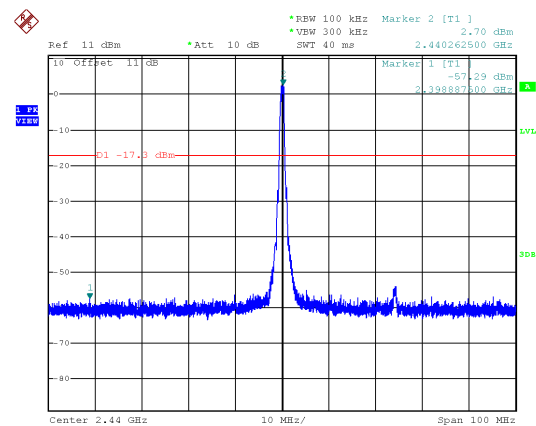
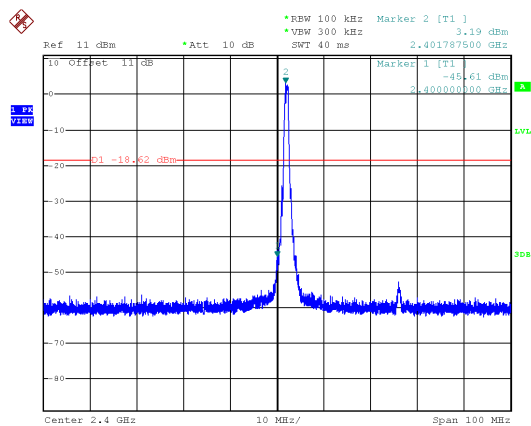
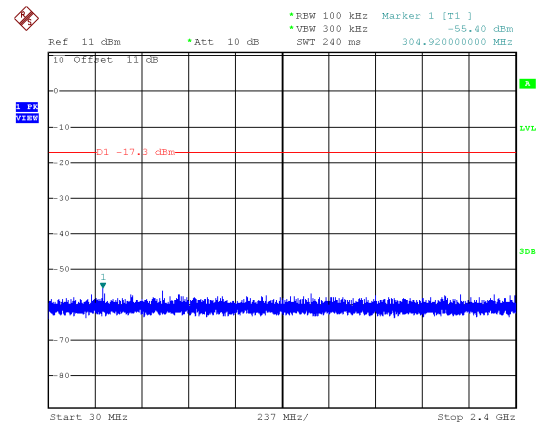




Modulation Type: GFSK-1Mbps
CH39

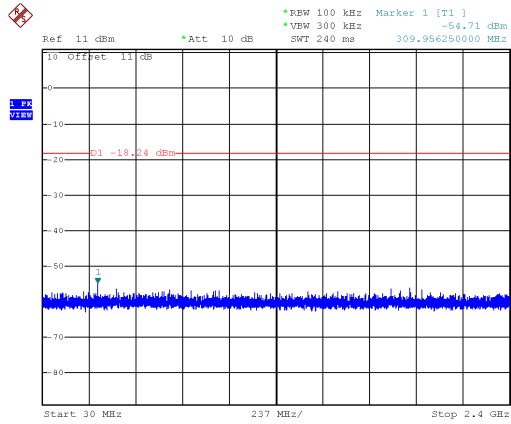


Modulation Type: GFSK-2Mbps
CH00

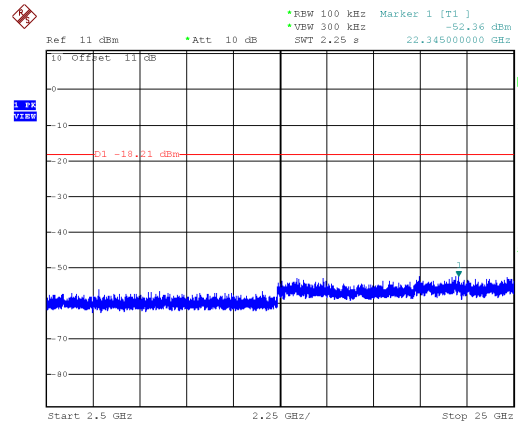
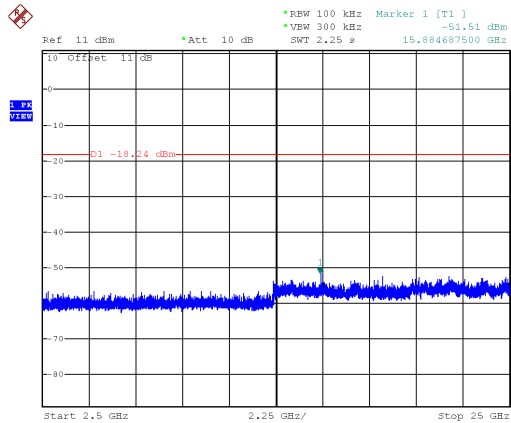
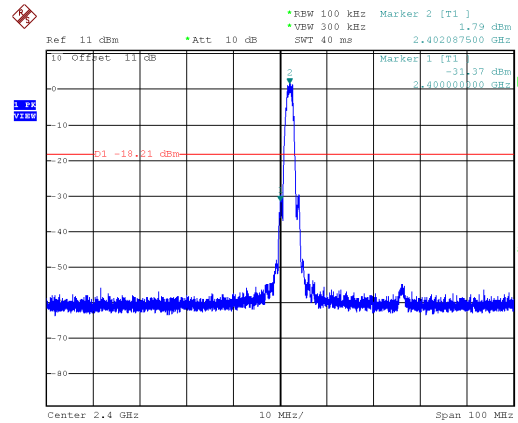
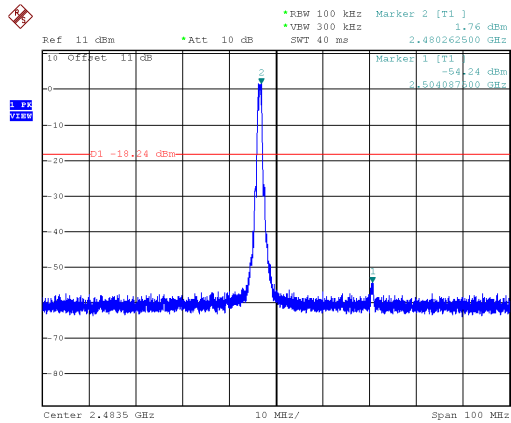
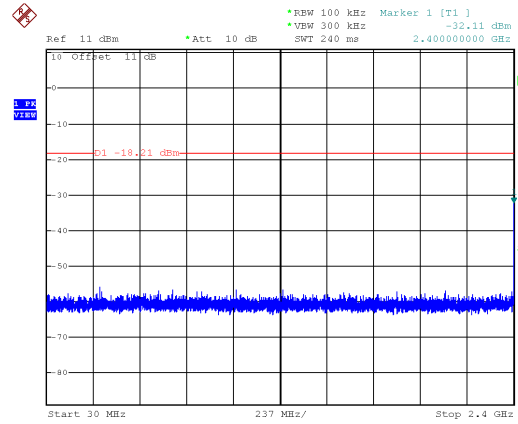




Modulation Type: GFSK-2Mbps
CH19

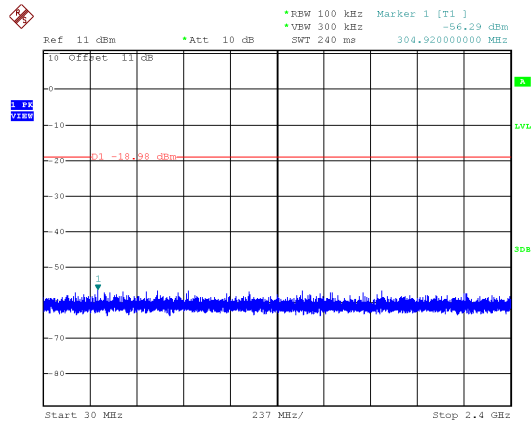

Modulation Type: GFSK-2Mbps
CH39

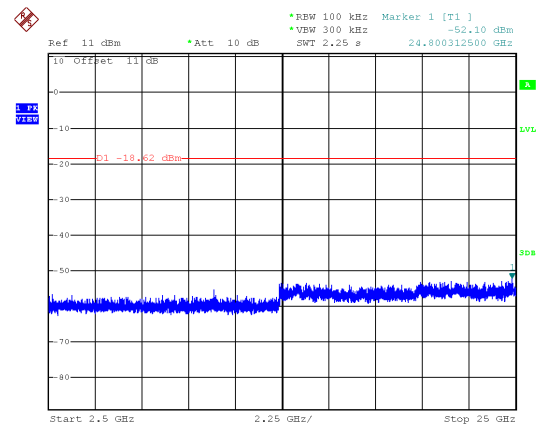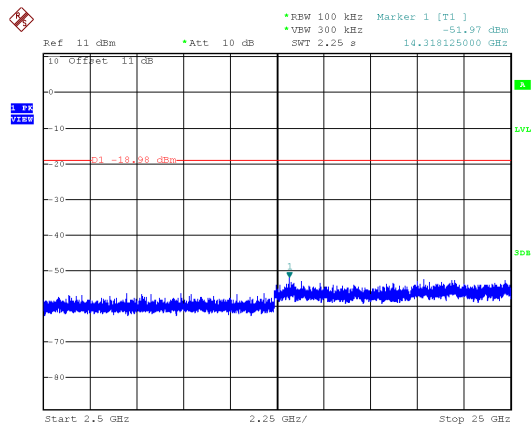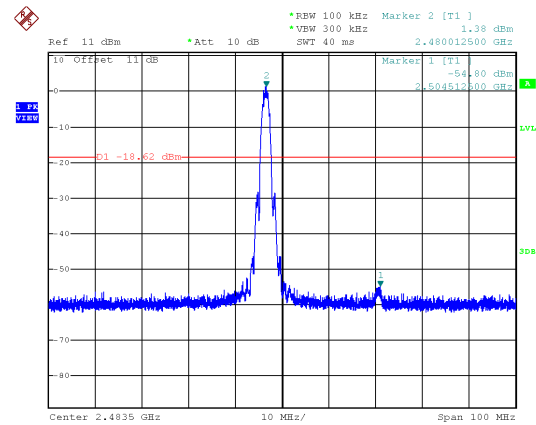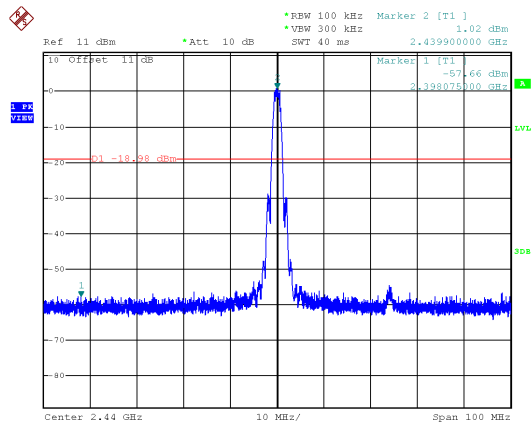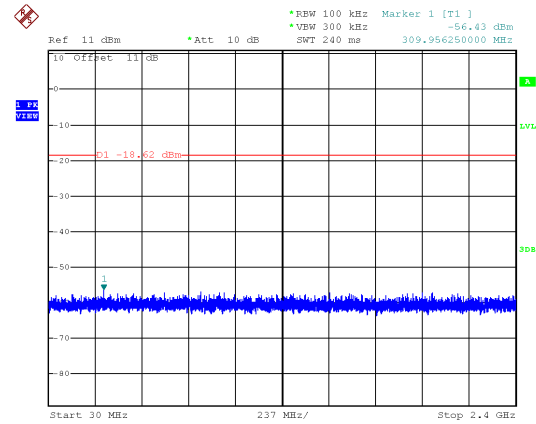



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

KDB 558074 Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout



8.4 Test Result and Data

Temperature : 23°C


Humidity : 61%

Test Date : Oct. 19, 2018


Modulation Mode	On Time (ms)	Period Time (ms)	Duty Cycle (%)	1/T Minimum VBW(Hz)	Duty Cycle correction Factor (dB)
GFSK	100.00	100.00	100.00%	10.00	0.00




Modulation Standard: GFSK-125Kbps

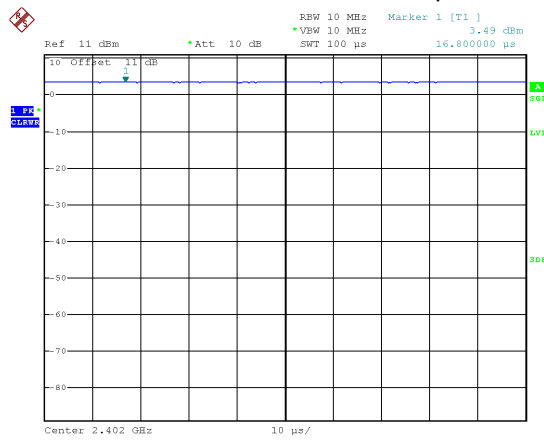


Modulation Standard: GFSK-1Mbps

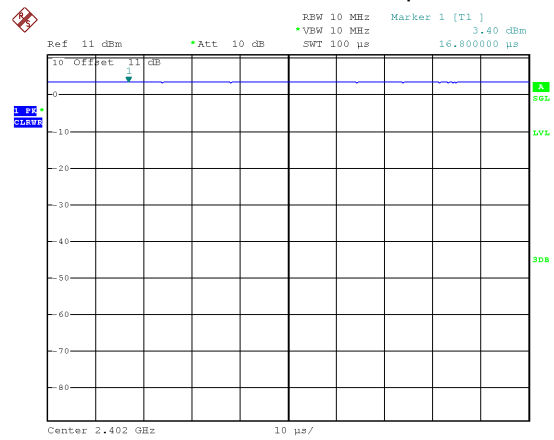

Modulation Standard: GFSK-500Kbps

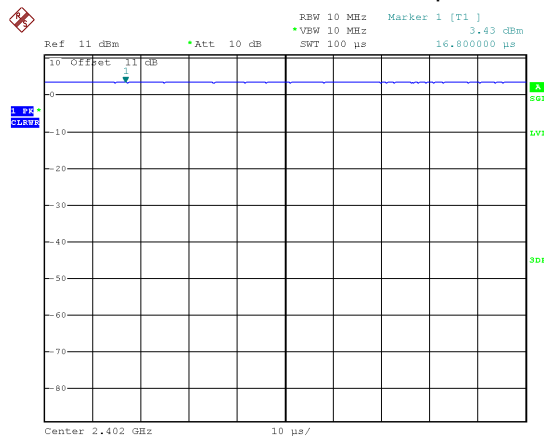

Modulation Standard: GFSK-2Mbps

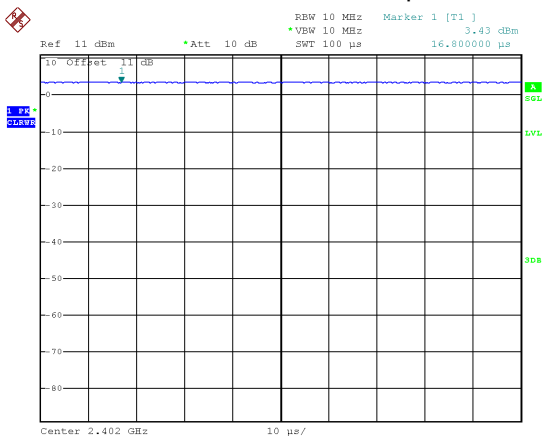



9. 6dB Bandwidth Measurement Data


9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW $\geq 3 \times$ RBW.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout



9.4 Test Result and Data

Test Result : PASS Temperature : 21°C
Test Date : Feb. 24, 2017 Humidity : 64%

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Occupied Bandwidth (KHz)	Limit (KHz)
GFSK(125Kbps)	0	2402	708.00	1070.00	500
	19	2440	720.00	1070.00	500
	39	2480	726.00	1090.00	500

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Occupied Bandwidth (KHz)	Limit (KHz)
GFSK(500Kbps)	0	2402	672.00	1020.00	500
	19	2440	678.00	1030.00	500
	39	2480	696.00	1050.00	500




Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Occupied Bandwidth (KHz)	Limit (KHz)
GFSK(1Mbps)	0	2402	672.00	1050.00	500
	19	2440	696.00	1070.00	500
	39	2480	708.00	1060.00	500


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Occupied Bandwidth (KHz)	Limit (KHz)
GFSK(2Mbps)	0	2402	1240.00	2060.00	500
	19	2440	1400.00	2070.00	500
	39	2480	1460.00	2080.00	500




Modulation Type: GFSK-125kbps
CH00

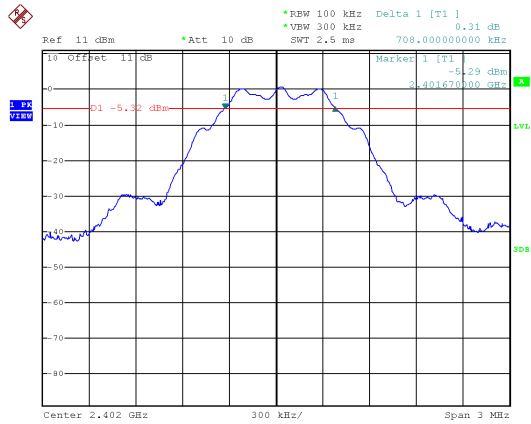


Modulation Type: GFSK-500kbps
CH00

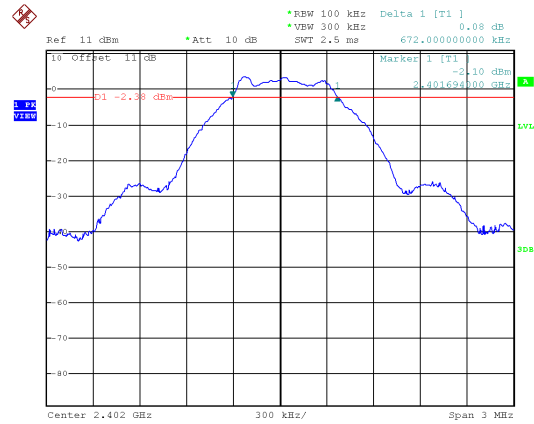


CH19

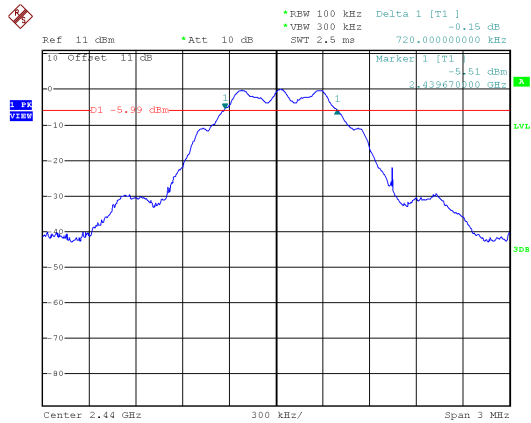


CH19

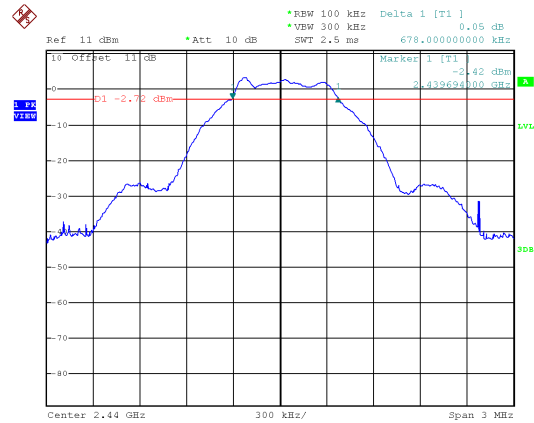

CH39

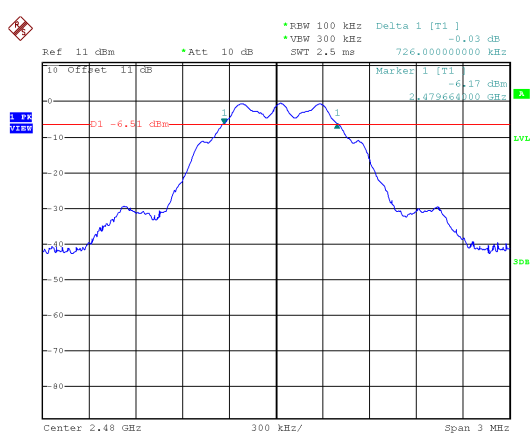


CH39

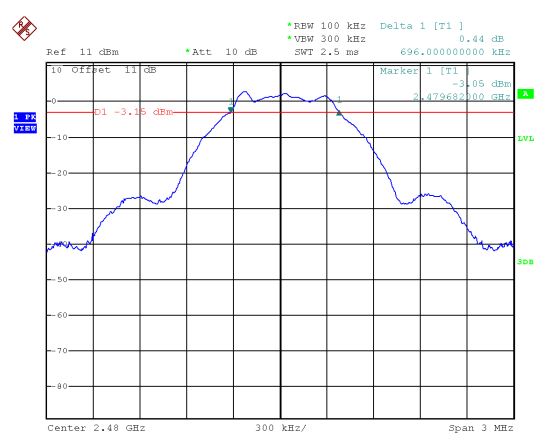





Modulation Type: GFSK-1Mbps
CH00

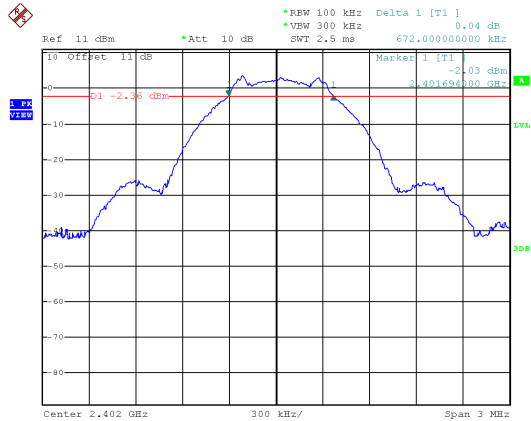


Modulation Type: GFSK-2Mbps
CH00

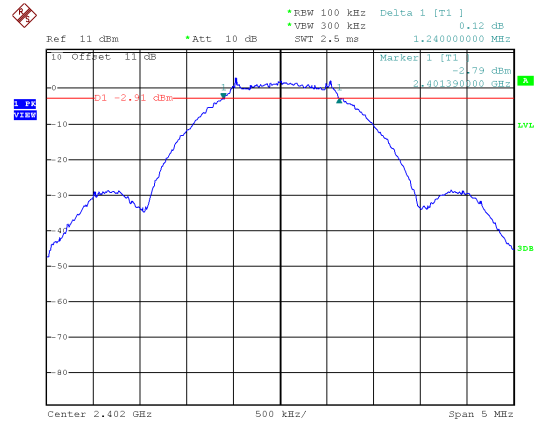


CH19

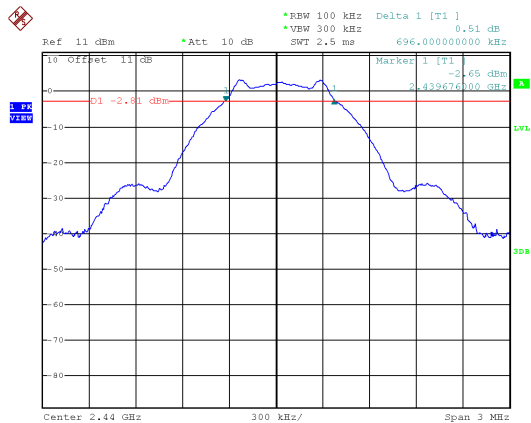


CH19

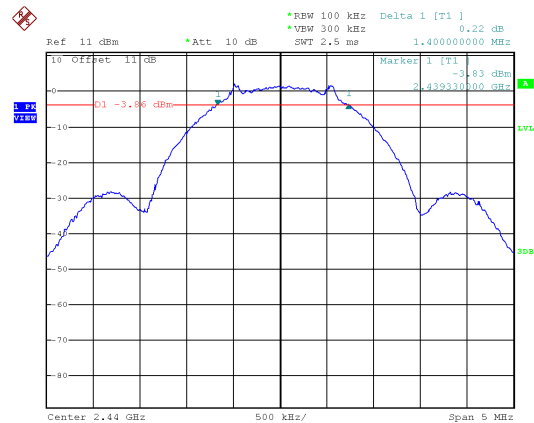

CH39

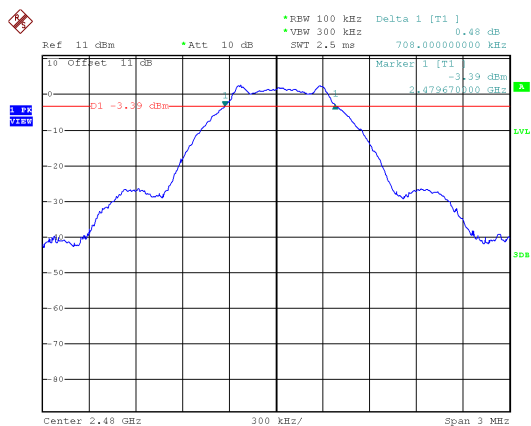

CH39

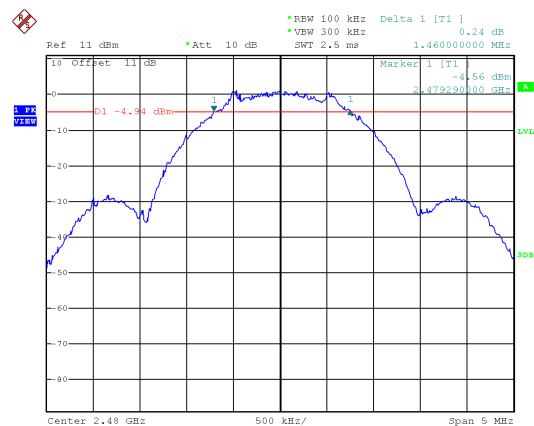



10. Maximum Peak and Average Output Power


10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



10.4 Test Result and Data

Test Result : PASS Temperature : 23°C
Test Date : Oct. 19, 2018 Humidity : 62%

BT5(125K bps)

Modulation Type	Channel	Frequency(MHz)	Power Output (dBm)		Power Output (mW)		e.i.r.p. Power (dBm)		e.i.r.p. Power (mW)	
			Peak	Average	Peak	Average	Peak	Average	Peak	Average
GFSK	0	2402	4.05	3.87	2.541	2.438	9.02	8.84	7.98	7.66
	19	2440	3.69	3.6	2.339	2.291	8.66	8.57	7.35	7.19
	39	2480	3.4	3.3	2.188	2.138	8.37	8.27	6.87	6.71

**BT5(1M bps)**

Modulation Type	Channel	Frequency(MHz)	Power Output (dBm)		Power Output (mW)		e.i.r.p. Power (dBm)		e.i.r.p. Power (mW)	
			Peak	Average	Peak	Average	Peak	Average	Peak	Average
GFSK	0	2402	3.97	3.9	2.495	2.455	8.94	8.87	7.83	7.71
	19	2440	3.69	3.6	2.339	2.291	8.66	8.57	7.35	7.19
	39	2480	3.4	3.31	2.188	2.143	8.37	8.28	6.87	6.73

BT5(1M bps)

Modulation Type	Channel	Frequency(MHz)	Power Output (dBm)		Power Output (mW)		e.i.r.p. Power (dBm)		e.i.r.p. Power (mW)	
			Peak	Average	Peak	Average	Peak	Average	Peak	Average
GFSK	0	2402	4	3.94	2.512	2.477	8.97	8.91	7.89	7.78
	19	2440	3.72	3.61	2.355	2.296	8.69	8.58	7.40	7.21
	39	2480	3.4	3.32	2.188	2.148	8.37	8.29	6.87	6.75

BT5(2M bps)

Modulation Type	Channel	Frequency(MHz)	Power Output (dBm)		Power Output (mW)		e.i.r.p. Power (dBm)		e.i.r.p. Power (mW)	
			Peak	Average	Peak	Average	Peak	Average	Peak	Average
GFSK	0	2402	3.99	3.9	2.506	2.455	8.96	8.87	7.87	7.71
	19	2440	3.69	3.6	2.339	2.291	8.66	8.57	7.35	7.19
	39	2480	3.4	3.3	2.188	2.138	8.37	8.27	6.87	6.71



11. Power Spectral Density


11.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

11.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

11.3 Test Setup Layout



11.4 Test Result and Data

Test Result : PASS Temperature : 23°C
Test Date : Oct. 19, 2018 Humidity : 62%

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit
GFSK(125Kbps)	0	2402	-2.15	8.00
	19	2440	-2.47	8.00
	39	2480	-2.78	8.00

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit
GFSK(500Kbps)	0	2402	-9.64	8.00
	19	2440	-9.03	8.00
	39	2480	-9.63	8.00




Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit
GFSK(1Mbps)	0	2402	-9.34	8.00
	19	2440	-7.49	8.00
	39	2480	-10.12	8.00


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Limit
GFSK(2Mbps)	0	2402	-11.23	8.00
	19	2440	-12.65	8.00
	39	2480	-13.43	8.00




Modulation Type: GFSK-125kbps
CH00

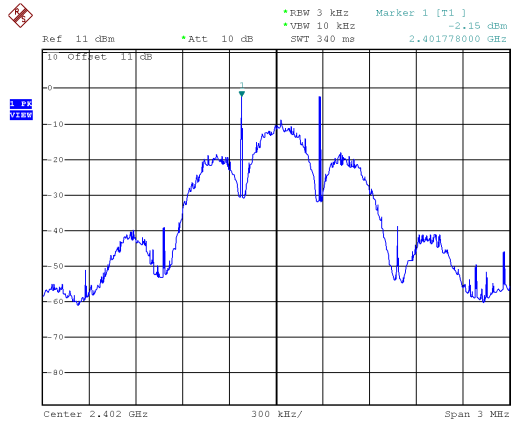


Modulation Type: GFSK-500kbps
CH00

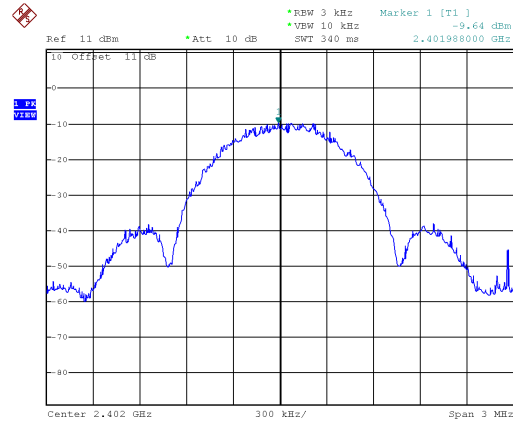


CH19

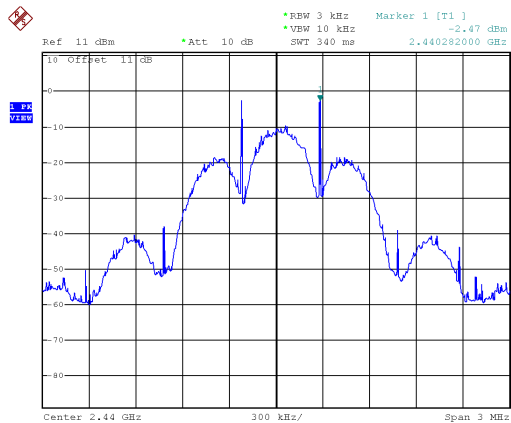


CH19

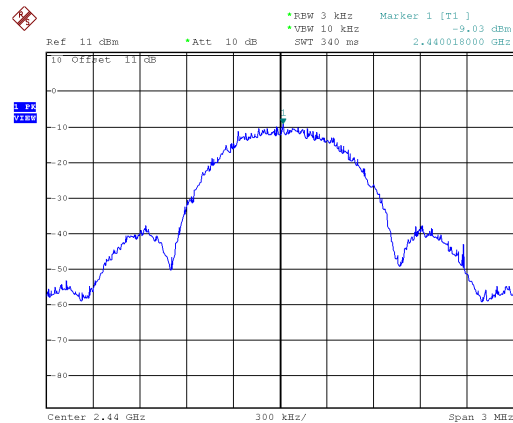

CH39

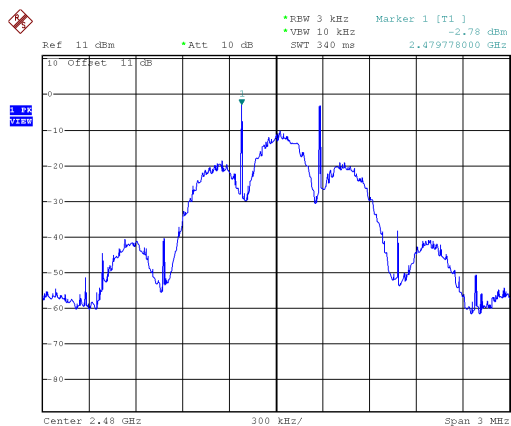


CH39

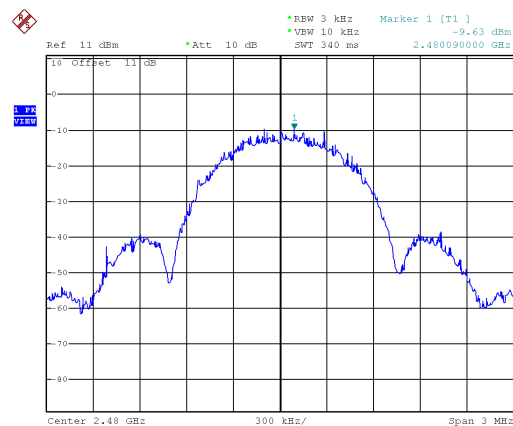





Modulation Type: GFSK-1Mbps
CH00

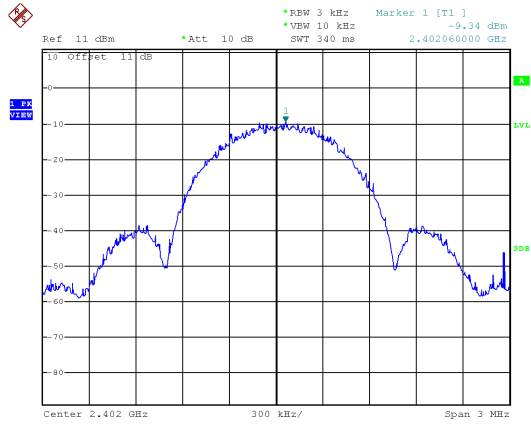


Modulation Type: GFSK-2Mbps
CH00

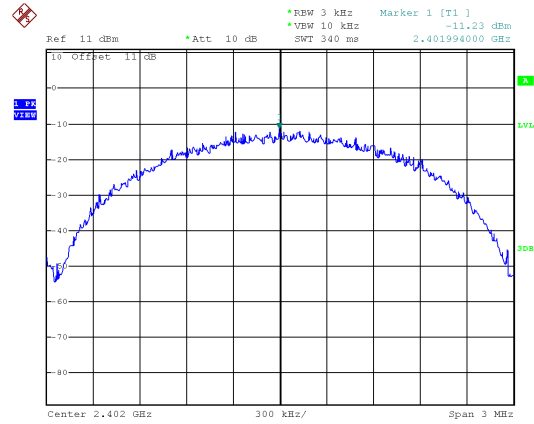


CH19

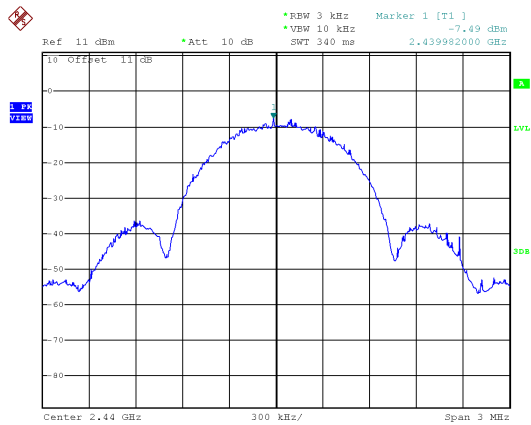

CH19

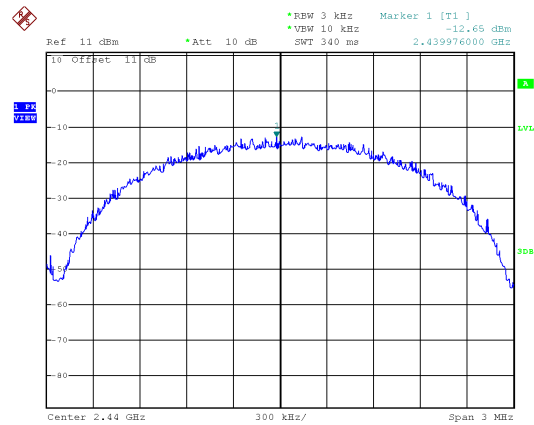

CH39

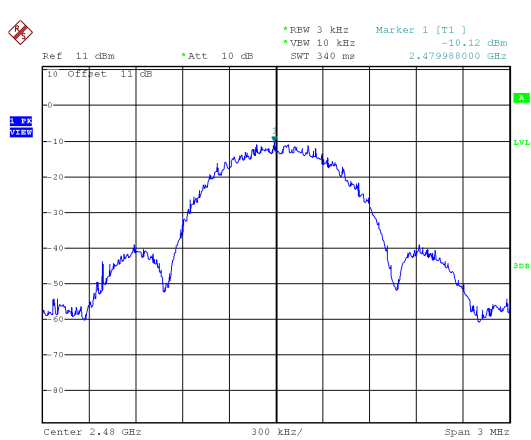

CH39

