

## MEASUREMENT REPORT FCC Part 18

**Applicant Name:**  
Gokhale Method Enterprises  
881 Tolman Drive  
Stanford, CA 95403  
United States

**Date of Testing:**  
10/30/2020-11/5/2020  
**Test Site/Location:**  
PCTEST Lab. Morgan Hill, CA, USA  
**Test Report Serial No.:**  
1C2011060079-03-R1.2ARVX


<b>FCC ID:</b>	<b>2ARVX-PT20C</b>
<b>APPLICANT:</b>	<b>Gokhale Method Enterprises</b>

<b>Model:</b>	PT20C
<b>EUT Type:</b>	Posture Tracker Wireless Charger
<b>FCC Classification:</b>	Part 18 Consumer Device
<b>FCC Rule Part(s):</b>	FCC Part 18 Subpart C
<b>Test Procedure(s):</b>	FCC/OST MP-5 (1986)

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in FCC/OST MP-5 (1986). These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2011060079-03-R1.2ARVX) supersedes and replaces the previously issued test report (S/N: 1C2011060079-03.2ARVX) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President



FCC ID: 2ARVX-PT20C	<b>PCTEST</b> Proud to be part of 		<b>MEASUREMENT REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger		Page 1 of 22

## T A B L E   O F   C O N T E N T S

---

1.0	Introduction .....	3
1.1	Scope.....	3
1.1	PCTEST Test Location .....	3
1.2	Test Facility / Accreditations .....	3
2.0	PRODUCT INFORMATION .....	4
2.1	Equipment Description.....	4
2.2	Device Capabilities .....	4
2.3	Antenna Description.....	4
2.4	Test Support Equipment .....	5
2.5	Test Configuration .....	5
2.6	Software and Firmware.....	5
2.7	EMI Suppression Device(s)/Modifications.....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure.....	6
3.2	AC Line Conducted Emissions .....	6
3.3	Radiated Emissions .....	7
3.4	Environmental Conditions .....	7
4.0	Measurement Uncertainty .....	8
5.0	TEST EQUIPMENT CALIBRATION DATA .....	9
6.0	TEST DATA .....	10
6.1	Summary .....	10
6.2	Radiated Spurious Emissions .....	11
6.3	AC Line Conducted Emissions .....	18
7.0	CONCLUSION .....	22

FCC ID: 2ARVX-PT20C	 PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger		Page 2 of 22

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

### 1.1 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.2 Test Facility / Accreditations

**Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules.
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 3 of 22

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Gokhale Posture Tracker Wireless Charger FCC ID: 2ARVX-PT20C**. The test data contained in this report pertains to emissions due to the digital circuitry of the EUT and the wireless power transfer through a continuous transmission at 917.5MHz frequency. The charger utilizes Bluetooth (Low Energy) to pair with receiving devices that receive charge when placed on the slots of EUT's surface.

**Test Device Serial No.:** 01B3, 0197, 0089

### 2.2 Device Capabilities

This device contains the following capabilities:

Bluetooth (LE) and WPT

#### Reporting Purposes Only

The transmitter antenna terminal of the EUT is connected to the input of a power meter. Measurements are made while the EUT is operating at maximum power and at the appropriate frequency.

Mode	Tx Frequency (MHz)	Avg Conducted	
		Max. Power (mW)	Max. Power (dBm)
WPT	917.5	805.378	29.06

**Table 2-1. Average Conducted Output Power Measurement (WPT)**

Per manufacturer's declaration, the nominal operating frequency is 917.5 MHz and the declared maximum RF energy generated is 1 Watt. The device is designed to operate from an external power source rated at 5 Volts DC, 2 Amps.

### 2.3 Antenna Description

Following antennas were used for the testing.

Frequency [MHz]	Antenna Gain (dBi)
917.5	-5.00

**Table 2-2. Highest Antenna Gain**

The EUT supports two identical WPT antennas with highest antenna gain of -5dBi each. Both antennas are active at the same time for all the charging mode testing.

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>			Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger		Page 4 of 22

## 2.4 Test Support Equipment

1	iPad	Model:	A1893	S/N:	DMPWKYT6JF8J
2	USB-C Cable	Model:	N/A	S/N:	N/A
	w/AC Adapter	Model:	HNEM050200UU	S/N:	N/A

Table 2-3. Test Support Equipment List

## 2.5 Test Configuration

The EUT was tested as a standalone device in charging mode of operation powered by an AC/DC adapter via USB cable with receiving devices populating EUT slots in all configurations and receiving maximum RF energy generated by the EUT at 917.5MHz. Charging mode of operation is activated using a tablet device which communicates via WattUp software. Support equipment (tablet) was only used to activate transmission signal (charging mode) and was not tested together with EUT in chamber upon charge state activation. All equipment is placed on the test tabletop and arranged in a typical configuration in accordance with FCC/OST MP-5 (1986) and manipulated to obtain worst case emissions.

All possible configurations/locations of the receiver charging devices were investigated: only one receiver device placed in the left side of EUT, only one receiver device placed in the right side of the EUT, and two receiver devices placed in both sides of the EUT. The worst-case location was reported. There are two identical WPT antennas and testing was performed with both antennas transmitting simultaneously.

For more information, please see Section 6.0 for test data and the test setup photos document for the test setup photographs.

## 2.6 Software and Firmware

The test was conducted with firmware version Gok2 TX 4.0.1.48 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2ARVX-PT20C	PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger		Page 5 of 22

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedure described in the FCC Methods of Measurements of Radio Noise Emissions from Industrial, Scientific, and Medical Equipment (FCC/OST MP-5 (1986)) was used in the measurement of the EUT.

**Deviation from measurement procedure.....**None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1-meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst-case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.3. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: 2ARVX-PT20C	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 6 of 22

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst-case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3-meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1-meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 7 of 22

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.30
Line Conducted Disturbance	2.34
Radiated Disturbance (<1GHz)	4.15
Radiated Disturbance (>1GHz)	4.43
Radiated Disturbance (>18GHz)	4.96

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 8 of 22

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2496A	Power Meter	10/29/2019	Annual	4/9/2021	2002005
Anritsu	MA2411B	Pulse Power Sensor	10/29/2019	Annual	3/10/2021	1911105
ETS-Lindgren	3142E-PA	Pre-Amplifier (30MHz - 6GHz)	9/19/2019	Annual	3/4/2021	102325
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	1/6/2020	Annual	1/6/2021	224569
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/21/2020	Annual	4/21/2021	205956
Rohde & Schwarz	HFH2-Z2	Loop Antenna	3/12/2020	Annual	3/12/2021	100546
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/2/2020	Annual	3/2/2021	101619
Rohde & Schwarz	HF907	Double Ridged Horn Antenna	10/13/2020	Annual	10/13/2021	102829
Rohde & Schwarz	ESW44	EMI Test Receiver	9/13/2019	Annual	8/7/2021	101570
Rohde & Schwarz	ENV216	Two-Line V-Network (LISN)	1/7/2019	Annual	1/6/2021	101363

**Table 5-1. Test Equipment List**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 9 of 22

## 6.0 TEST DATA

### 6.1 Summary

FCC Part 18 Section	Description	Result
18.305	Radiated Emissions	PASS
18.307	AC Line Conducted Emissions	PASS

Table 6-1. Summary of Test Results

FCC ID: 2ARVX-PT20C	PCTEST <sup>®</sup> Proud to be part of element		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 10 of 22	

## 6.2 Radiated Spurious Emissions

### §18.305

#### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

***The field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following:***

Equipment	Operating Frequency	RF Power Generated by Equipment (watts)	Field Strength Limit (uV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 25 × SQRT(power/500)	300 1300

**Table 6-2. Field Strength Limit**

<sup>1</sup>Field strength may not exceed 10  $\mu$ V/m at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.

#### Test Procedures Used

FCC/OST MP-5

#### Test Settings

##### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. Per FCC/OST MP-5, the RBW's are as follow:
  - 9kHz – 150kHz: 200Hz
  - 150kHz – 30MHz: 9kHz
  - 30MHz – 1GHz: 120kHz
  - Above 1GHz: 1MHz
3. Detector = power average (RMS)
4. Sweep time = auto
5. Trace (RMS) averaging was performed over at least 100 traces.

FCC ID: 2ARVX-PT20C	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 11 of 22	

### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. Per FCC/OST MP-5, the RBW's are as follow:
  - 9kHz – 150kHz: 200Hz
  - 150kHz – 30MHz: 9kHz
  - 30MHz – 1GHz: 120kHz
  - Above 1GHz: 1MHz
3. Detector = Peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



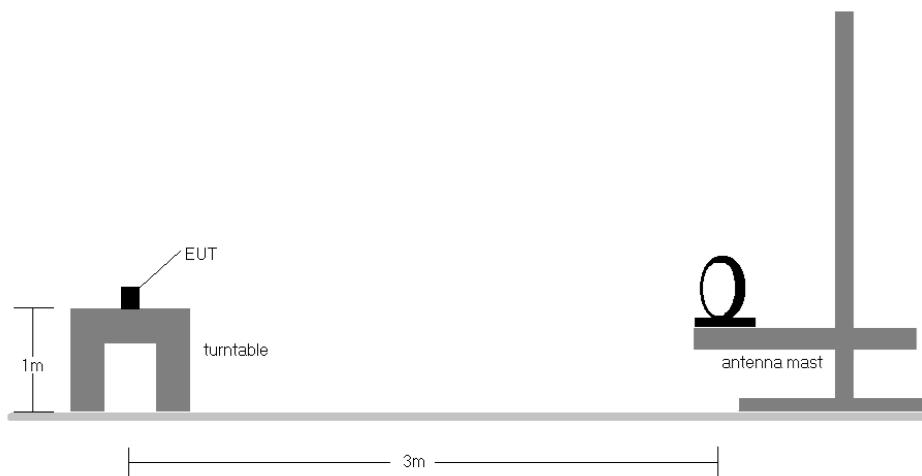


Figure 6-1. Radiated Test Setup < 30MHz

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 12 of 22

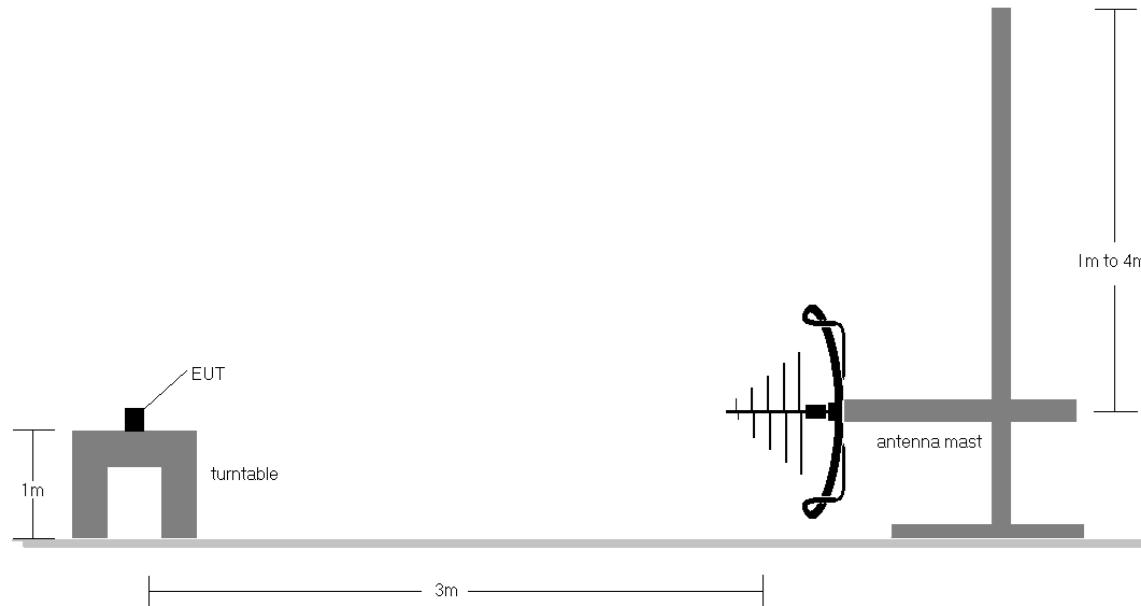

**Figure 6-2. Radiated Test Setup < 1GHz**

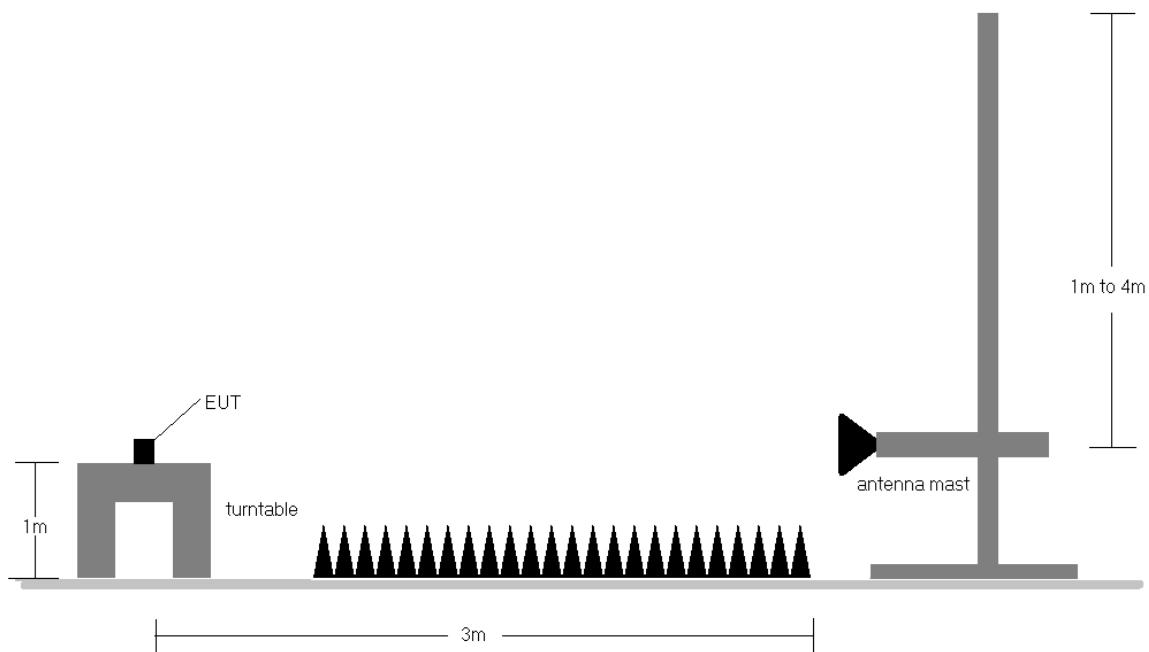

**Figure 6-3. Radiated Test Setup > 1GHz**

FCC ID: 2ARVX-PT20C	<b>PCTEST®</b> Proud to be part of 		<b>MEASUREMENT REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger		Page 13 of 22


## Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. Radiated emissions were measured from 9kHz – 10GHz.
3. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through two orthogonal planes. For below 30MHz measurements, the loop antenna was positioned in three orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst-case emissions.
4. Measurements are made using a CISPR max-peak detector with a 120kHz resolution bandwidth. Above 1GHz, peak measurements are made using a peak detector with a resolution bandwidth of 1MHz and a video bandwidth of 3MHz and average measurements are made with a RMS detector using a resolution bandwidth of 1MHz and a video bandwidth of 3MHz.
5. Calibrated linearly polarized broadband and horn antennas were used for measurements below and above 1GHz, respectively. For measurements made below 1GHz, the results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antennas was found to be less than 2:1.
6. Calibrated low-loss microwaves cables and broadband amplifiers are used.
7. The test was performed at 3-meter distance and the applicable 3m to 300m distance correction factor was applied to the field strength measurements (Distance CF=  $20\log(3/300) = -40\text{dB}$ ).
8. For 30MHz-1GHz, the emissions were investigated without a preamplifier and notch filter and no significant emissions were observed.
9. All emissions were investigated with both BLE and WPT transmitting simultaneously.
10. Notch filters were used for BLE and WPT fundamentals for all testing.

## Sample Calculations

- Field Strength Level  $[\text{dB}_{\mu\text{V/m}}] = \text{Analyzer Level } [\text{dBm}] + 107 + \text{AFCL } [\text{dB/m}] + \text{Distance CF } [\text{dB}]$
- AFCL  $[\text{dB/m}] = \text{Antenna Factor } [\text{dB/m}] + \text{Cable Loss } [\text{dB}] - \text{Preamplifier Gain } [\text{dB}]$
- Margin  $[\text{dB}] = \text{Field Strength Level } [\text{dB}_{\mu\text{V/m}}] - \text{Limit } [\text{dB}_{\mu\text{V/m}}]$

FCC ID: 2ARVX-PT20C	 <b>PCTEST<sup>®</sup></b> Proud to be part of element		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 14 of 22	

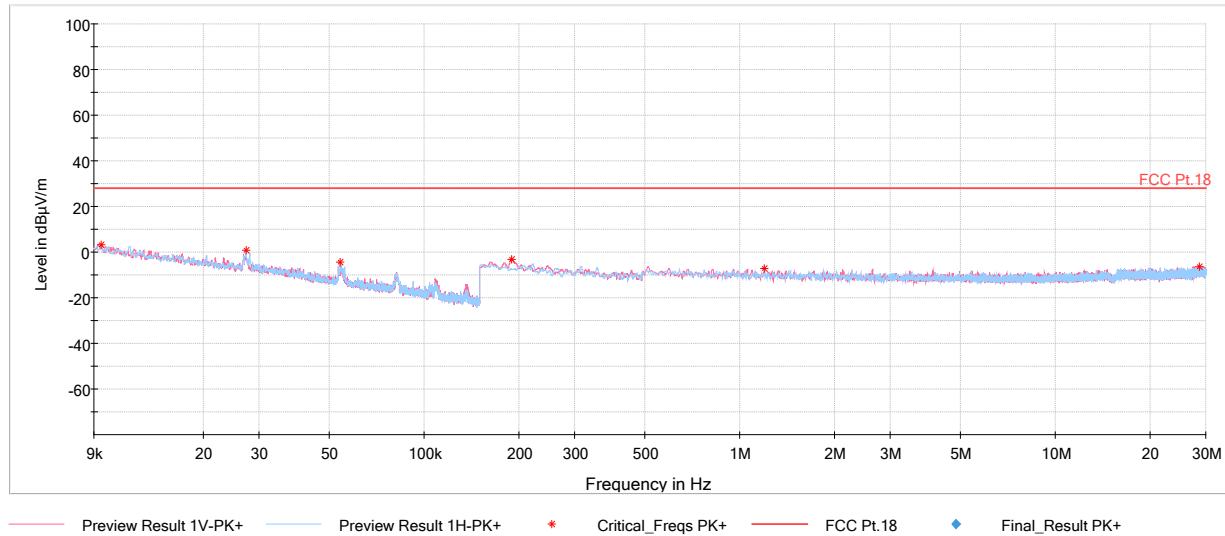


**Plot 6-1. Radiated Spurious Emissions 9kHz-30MHz**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
0.010	Max-Peak	V	200	165	-83.13	19.33	-40.00	3.20	28.00	-24.80
0.027	Max-Peak	H	200	62	-86.14	19.96	-40.00	0.82	28.00	-27.18
0.054	Max-Peak	H	200	65	-90.97	19.44	-40.00	-4.53	28.00	-32.53
0.190	Max-Peak	V	200	50	-89.41	19.19	-40.00	-3.22	28.00	-31.22
1.201	Max-Peak	H	200	168	-94.01	19.94	-40.00	-7.07	28.00	-35.07
28.690	Max-Peak	V	200	166	-96.79	23.56	-40.00	-6.23	28.00	-34.23

**Table 6-3. Radiated Spurious Emissions 9kHz-30MHz**

FCC ID: 2ARVX-PT20C	<b>PCTEST®</b> Proud to be part of 			MEASUREMENT REPORT				Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger					Page 15 of 22	

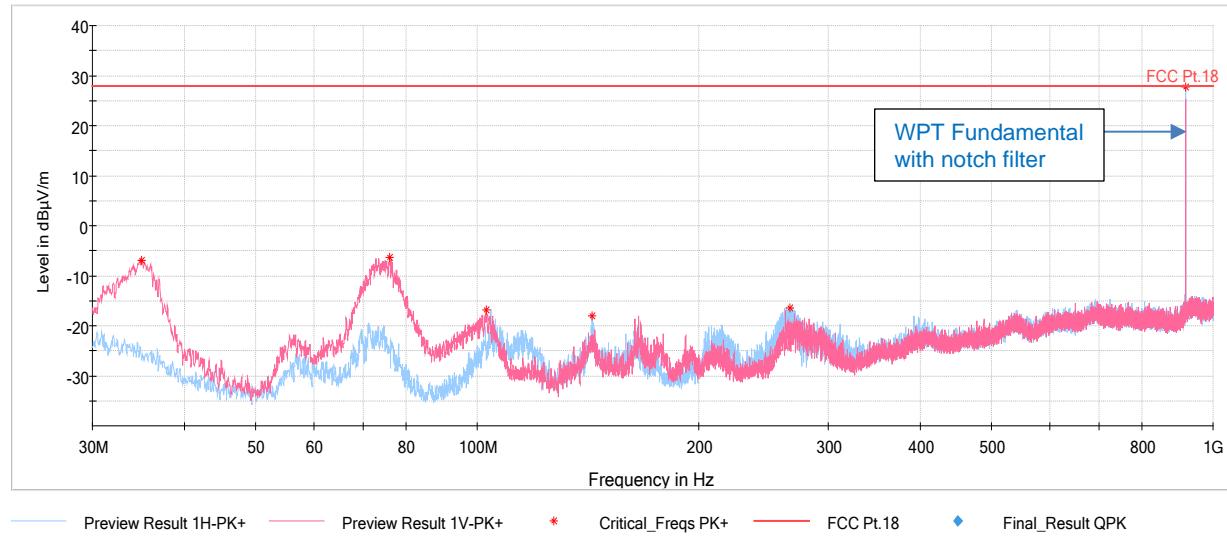


**Plot 6-2. Radiated Spurious Emissions 30MHz-1GHz**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
35.00	Max-Peak	V	100	59	-59.65	-14.30	-40.00	-6.95	28.00	-34.95
76.08	Max-Peak	V	100	278	-52.58	-20.71	-40.00	-6.29	28.00	-34.29
102.90	Max-Peak	V	100	165	-64.70	-19.13	-40.00	-16.83	28.00	-44.83
143.20	Max-Peak	H	250	165	-66.34	-18.78	-40.00	-18.12	28.00	-46.12
266.29	Max-Peak	H	100	116	-69.78	-13.68	-40.00	-16.46	28.00	-44.46
917.50	Max-Peak	H	250	36	-38.68	-0.60	-40.00	27.72	28.00	-0.28

**Table 6-4. Radiated Spurious Emissions 30MHz-1GHz**


FCC ID: 2ARVX-PT20C	<b>PCTEST®</b> Proud to be part of 			MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger			Page 16 of 22

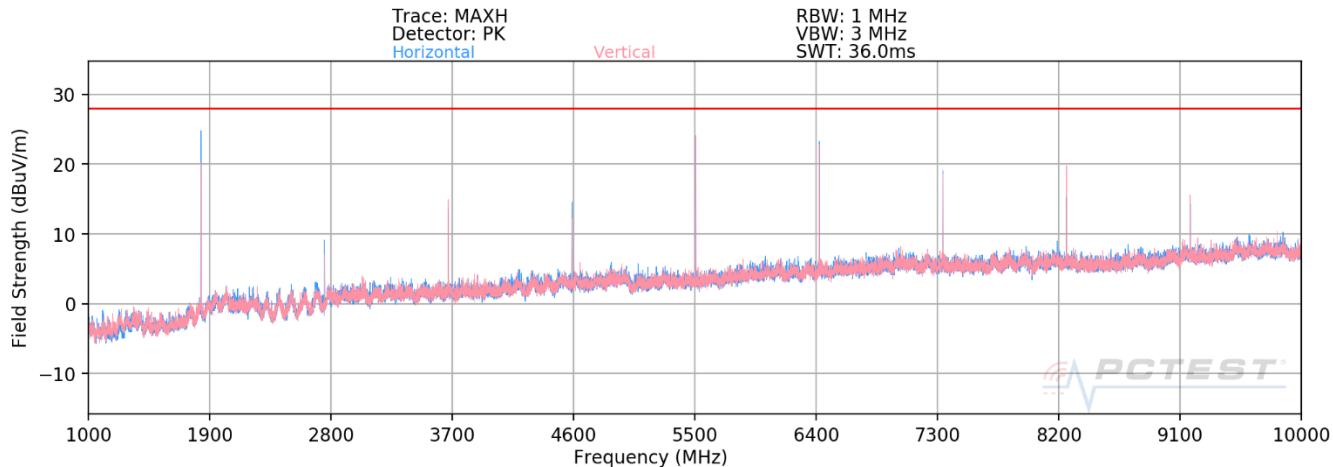

Plot 6-3. Radiated Spurious Emissions Above 1GHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
1835.00	Avg	H	215	230	-45.03	0.95	-40.00	22.92	28.00	-5.08
1835.00	Peak	H	215	230	-44.39	0.95	-40.00	23.56	28.00	-4.44
2752.50	Avg	H	386	170	-60.85	3.66	-40.00	9.81	28.00	-18.19
2752.50	Peak	H	386	170	-58.56	3.66	-40.00	12.10	28.00	-15.90
3670.00	Avg	V	374	214	-56.06	5.33	-40.00	16.27	28.00	-11.73
3670.00	Peak	V	374	214	-54.66	5.33	-40.00	17.67	28.00	-10.33
4587.50	Avg	H	146	145	-63.60	7.07	-40.00	10.47	28.00	-17.53
4587.50	Peak	H	146	145	-60.98	7.07	-40.00	13.09	28.00	-14.91
5505.00	Avg	H	170	297	-50.04	7.88	-40.00	24.84	28.00	-3.16
5505.00	Peak	H	170	297	-48.79	7.88	-40.00	26.09	28.00	-1.91
6422.50	Avg	H	374	15	-53.63	9.84	-40.00	23.21	28.00	-4.79
6422.50	Peak	H	374	15	-52.70	9.84	-40.00	24.14	28.00	-3.86
7340.00	Avg	V	195	111	-59.65	11.07	-40.00	18.42	28.00	-9.58
7340.00	Peak	V	195	111	-58.11	11.07	-40.00	19.96	28.00	-8.04
8257.50	Avg	H	102	344	-64.97	12.05	-40.00	14.08	28.00	-13.92
8257.50	Peak	H	102	344	-62.35	12.05	-40.00	16.70	28.00	-11.30
9175.00	Avg	H	203	350	-70.39	13.33	-40.00	9.94	28.00	-18.06
9175.00	Peak	H	203	350	-66.17	13.33	-40.00	14.16	28.00	-13.84

Table 6-5. Radiated Spurious Emissions Above 1GHz

FCC ID: 2ARVX-PT20C	 PCTEST <sup>®</sup> Proud to be part of 	MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 17 of 22

## 6.3 AC Line Conducted Emissions

§18.307

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. Only the conducted emissions of the configuration that produced the worst-case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 18.307(b)***

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 6-6. Conducted Emissions Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

FCC/OST MP-5

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: 2ARVX-PT20C	 PCTEST <sup>®</sup> Proud to be part of element	MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 18 of 22

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

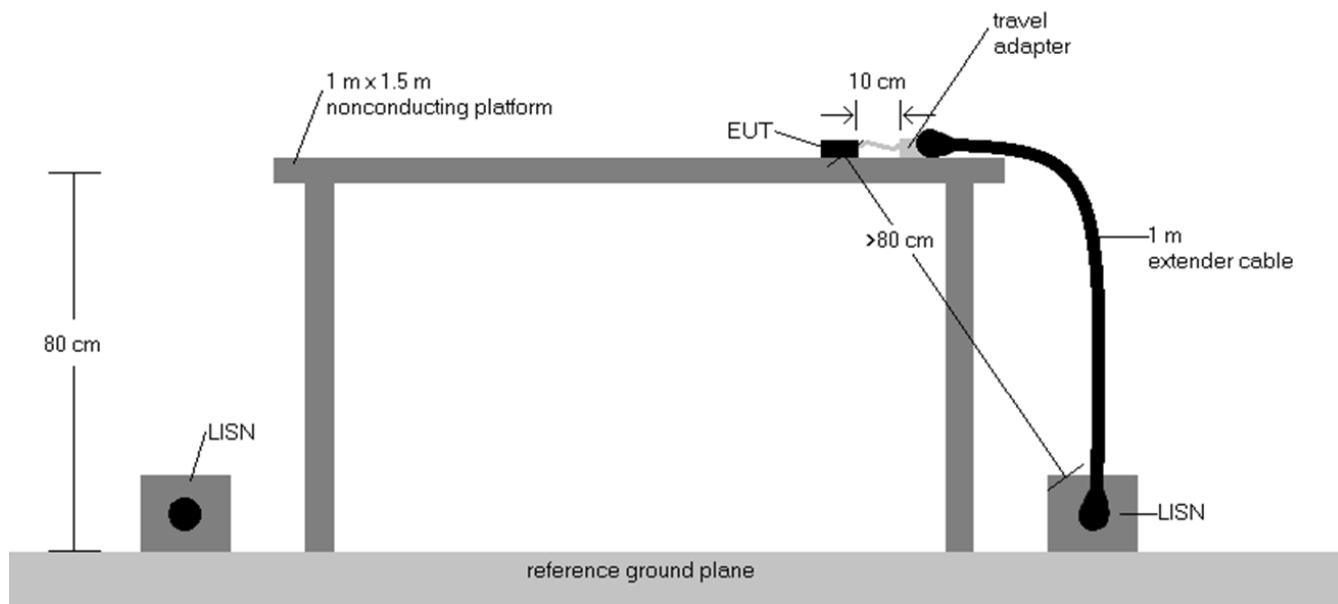


**Figure 6-4. Test Instrument & Measurement Setup**

## Test Notes

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for all other Part 18 consumer devices from 150kHz to 30MHz are specified in Section 18.307(b)
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB $\mu$ V) = QP/AV Analyzer/Receiver Level (dB $\mu$ V) + Corr. (dB)
6. Margin (dB) = QP/AV Level (dB $\mu$ V) - QP/AV Limit (dB $\mu$ V)
7. Traces shown in plots were measured using a quasi-peak and average detectors.
8. Deviations to the Specifications: None.
9. EUT powered by AC/DC adapter via USB-C cable with wire charger
10. All emissions were investigated with both BLE and WPT transmitting.

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 19 of 22

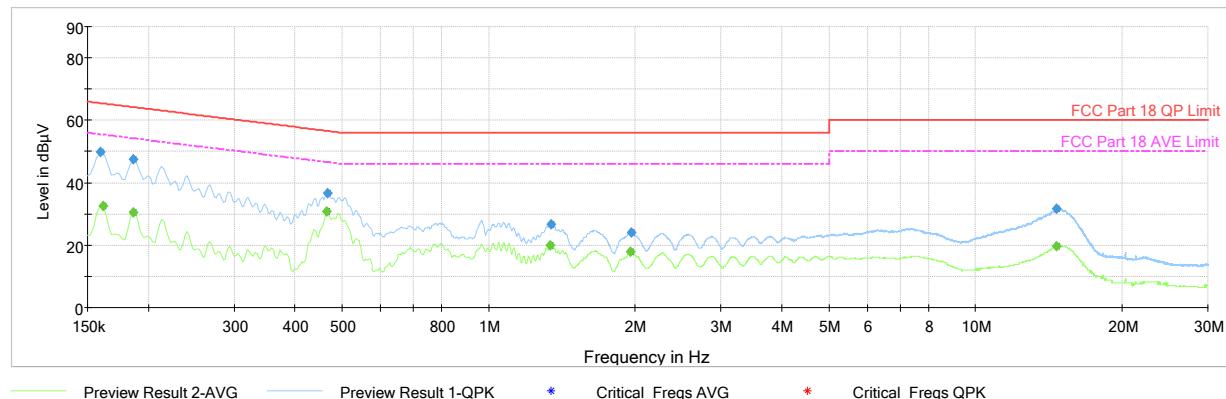


**Plot 6-4. AC Line-Conducted Plot with WPT (L1, with AC/DC adapter)**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.159	FINAL	---	31.28	55.52	-24.24	L1	GND
0.161	FINAL	47.8	---	65.40	-17.57	L1	GND
0.188	FINAL	46.0	---	64.11	-18.11	L1	GND
0.188	FINAL	---	30.62	54.11	-23.49	L1	GND
0.470	FINAL	42.4	---	56.52	-14.13	L1	GND
0.470	FINAL	---	33.70	46.52	-12.83	L1	GND
0.800	FINAL	30.1	---	56.00	-25.91	L1	GND
0.803	FINAL	---	20.83	46.00	-25.17	L1	GND
7.193	FINAL	---	20.52	50.00	-29.48	L1	GND
7.213	FINAL	33.0	---	60.00	-26.96	L1	GND
14.192	FINAL	31.6	---	60.00	-28.39	L1	GND
14.192	FINAL	---	16.77	50.00	-33.23	L1	GND

**Table 6-7. AC Line-Conducted Data with WPT (L1, with AC/DC adapter)**

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>			Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 20 of 22	

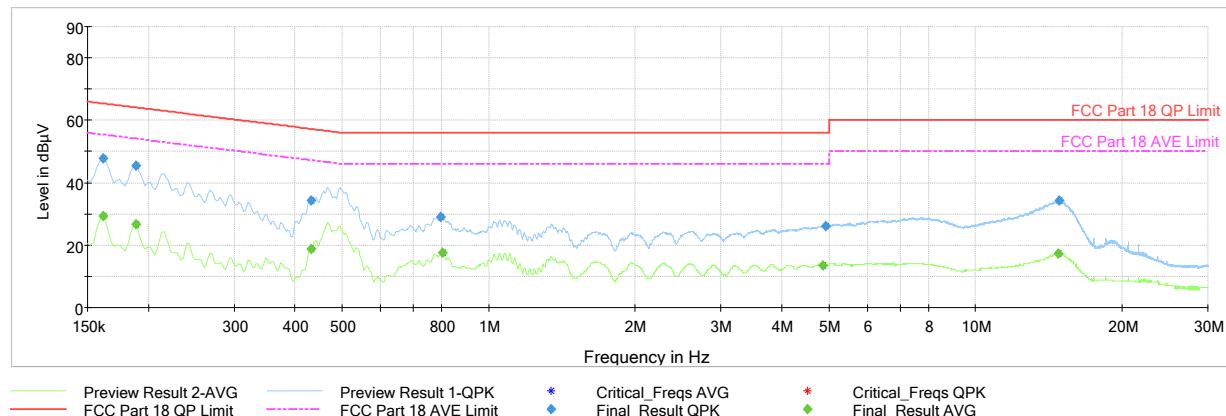

**Plot 6-5. AC Line-Conducted Plot with WPT (N, with AC/DC adapter)**

Frequency [MHz]	Process State	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Line	PE
0.161	FINAL	---	29.73	55.40	-25.67	N	GND
0.164	FINAL	44.3	---	65.28	-20.97	N	GND
0.472	FINAL	39.8	---	56.48	-16.71	N	GND
0.472	FINAL	---	33.44	46.48	-13.04	N	GND
0.803	FINAL	28.4	---	56.00	-27.65	N	GND
0.809	FINAL	---	20.77	46.00	-25.23	N	GND
1.354	FINAL	---	20.00	46.00	-26.00	N	GND
1.367	FINAL	27.1	---	56.00	-28.87	N	GND
7.208	FINAL	---	21.45	50.00	-28.55	N	GND
7.211	FINAL	31.5	---	60.00	-28.48	N	GND
14.073	FINAL	29.7	---	60.00	-30.35	N	GND
14.226	FINAL	---	18.02	50.00	-31.98	N	GND

**Table 6-8. AC Line-Conducted Data with WPT (N, with AC/DC adapter)**

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>			Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 21 of 22	

## 7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Gokhale Posture Tracker Wireless Charger FCC ID: 2ARVX-PT20C** has been tested to comply with the requirements specified in §18 Subpart C of the FCC rules.

FCC ID: 2ARVX-PT20C	 <b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2011060079-03-R1.2ARVX	Test Dates: 10/30/2020-11/5/2020	EUT Type: Posture Tracker Wireless Charger	Page 22 of 22