



FCC RF Test Report

APPLICANT : Barking Labs Corp.
EQUIPMENT : Fi Smart Collar Series 3+
BRAND NAME : Fi
MODEL NAME : FC3B
FCC ID : 2ARXN-FC3B
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Apr. 24, 2025 ~ May 08, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 LIST OF MEASURING EQUIPMENT	22
5 MEASUREMENT UNCERTAINTY	23
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR540712B	Rev. 01	Initial issue of report	May 15, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.16 dB at 4874.00 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.54 dB at 0.502 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Barking Labs Corp.
419 Lafayette St., Floor 2, New York, NY 10003

1.2 Manufacturer

Barking Labs Corp.
419 Lafayette St., Floor 2, New York, NY 10003

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Fi Smart Collar Series 3+
Brand Name	Fi
Model Name	FC3B
FCC ID	2ARXN-FC3B
SN Code	Conducted: FC35D002019 Conduction: BL06-D1-009(A) Radiation: AB12530MBJ000N
HW Version	1
SW Version	v4.18
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 15.26 dBm (0.0336 W) 802.11g : 20.34 dBm (0.1081 W) 802.11n HT20 : 20.63 dBm (0.1156 W)
99% Occupied Bandwidth	802.11b : 13.347MHz 802.11g : 17.183MHz 802.11n HT20 : 18.102MHz
Antenna Type / Gain	Inverted-F Antenna (LDS) with gain 3.68 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WLAN Link(2.4G) + WPC(Charging from cradle with adaptor)

2.3 Connection Diagram of Test System

<Radiated Emission >

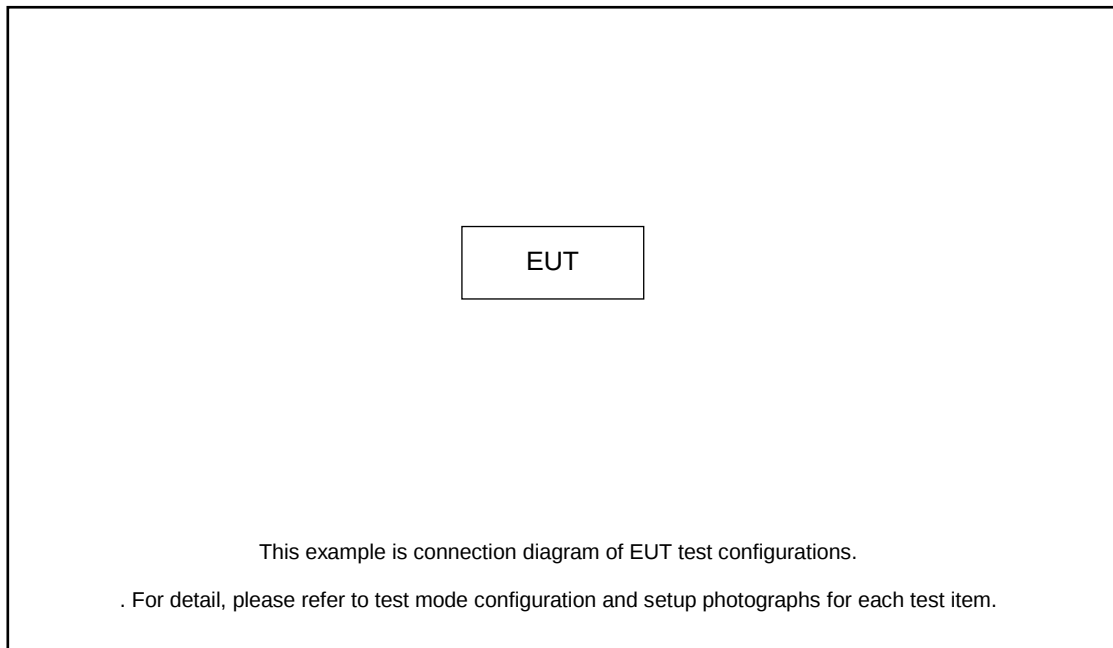

< AC Conducted Emission >

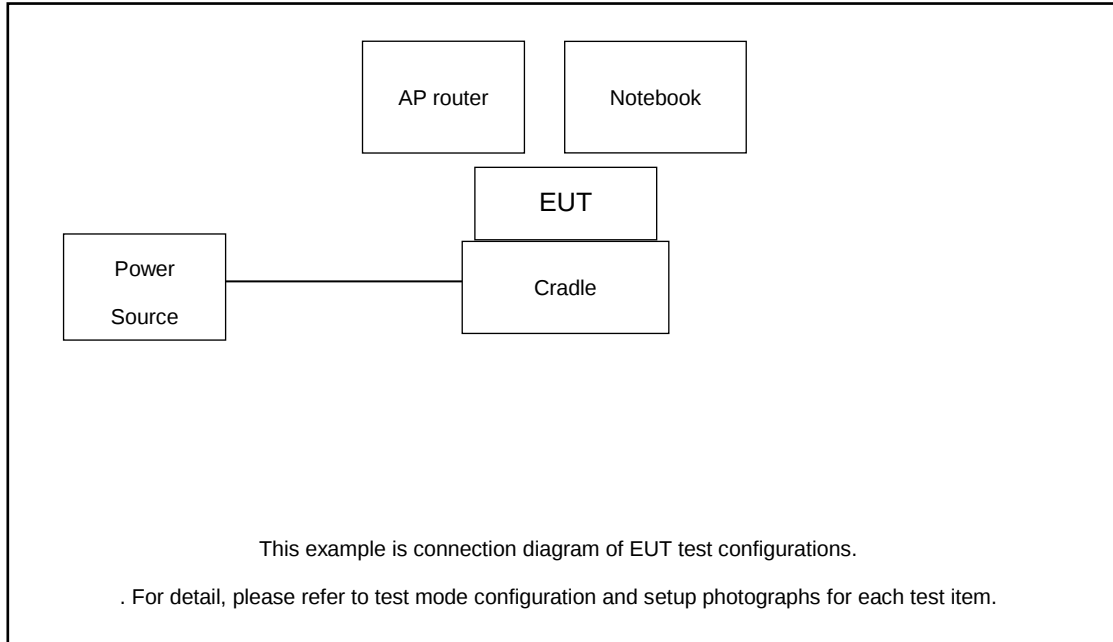

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 12.95 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 12.95 + 10 = 22.95 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

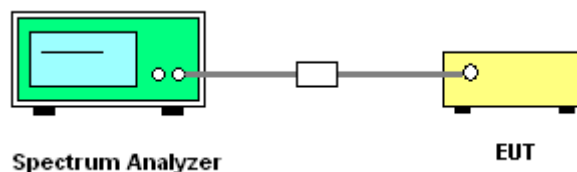

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

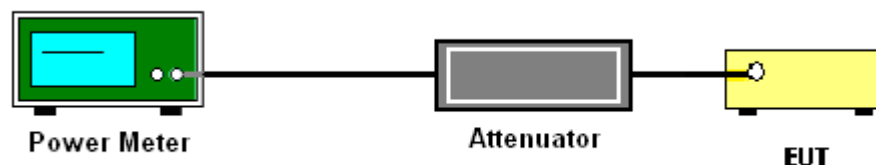



3.2.5 Test Result of Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant1	Ant1				
11b	1Mbps	1	1	2412	15.26	30.00	3.68	18.94	36.00	Pass
11b	1Mbps	1	6	2437	15.42	30.00	3.68	19.10	36.00	Pass
11b	1Mbps	1	11	2462	12.78	30.00	3.68	16.46	36.00	Pass
11g	6Mbps	1	1	2412	20.34	30.00	3.68	24.02	36.00	Pass
11g	6Mbps	1	6	2437	19.71	30.00	3.68	23.39	36.00	Pass
11g	6Mbps	1	11	2462	19.92	30.00	3.68	23.60	36.00	Pass
HT20	MCS0	1	1	2412	20.63	30.00	3.68	24.31	36.00	Pass
HT20	MCS0	1	6	2437	19.86	30.00	3.68	23.54	36.00	Pass
HT20	MCS0	1	11	2462	18.09	30.00	3.68	21.77	36.00	Pass

3.2.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant1	Ant1				
11b	1Mbps	1	1	2412	0.03	13.25	30.00	3.68	16.93	36.00	Pass
11b	1Mbps	1	6	2437	0.03	13.41	30.00	3.68	17.09	36.00	Pass
11b	1Mbps	1	11	2462	0.03	10.75	30.00	3.68	14.43	36.00	Pass
11g	6Mbps	1	1	2412	0.37	13.49	30.00	3.68	17.17	36.00	Pass
11g	6Mbps	1	6	2437	0.37	13.20	30.00	3.68	16.88	36.00	Pass
11g	6Mbps	1	11	2462	0.37	12.96	30.00	3.68	16.64	36.00	Pass
HT20	MCS0	1	1	2412	0.39	13.15	30.00	3.68	16.83	36.00	Pass
HT20	MCS0	1	6	2437	0.39	13.03	30.00	3.68	16.71	36.00	Pass
HT20	MCS0	1	11	2462	0.39	10.58	30.00	3.68	14.26	36.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

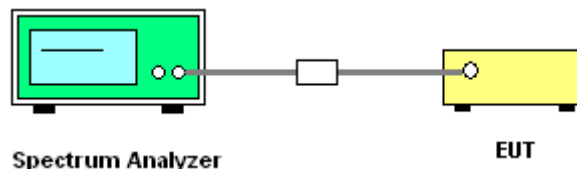

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

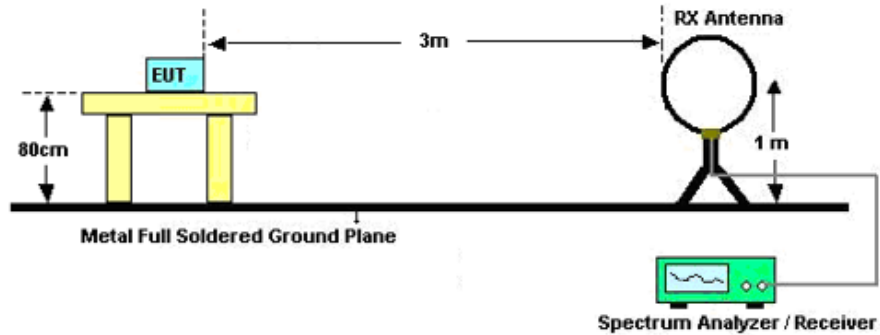

For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz

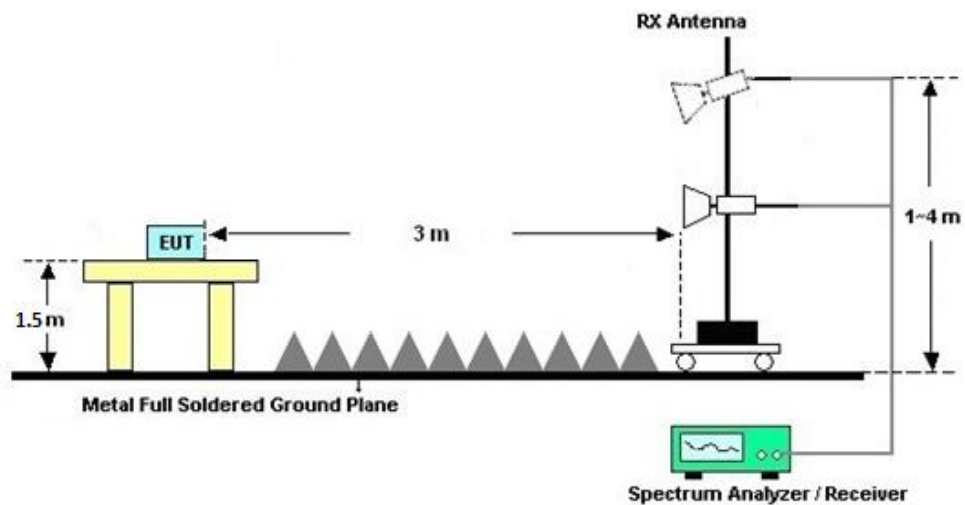

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

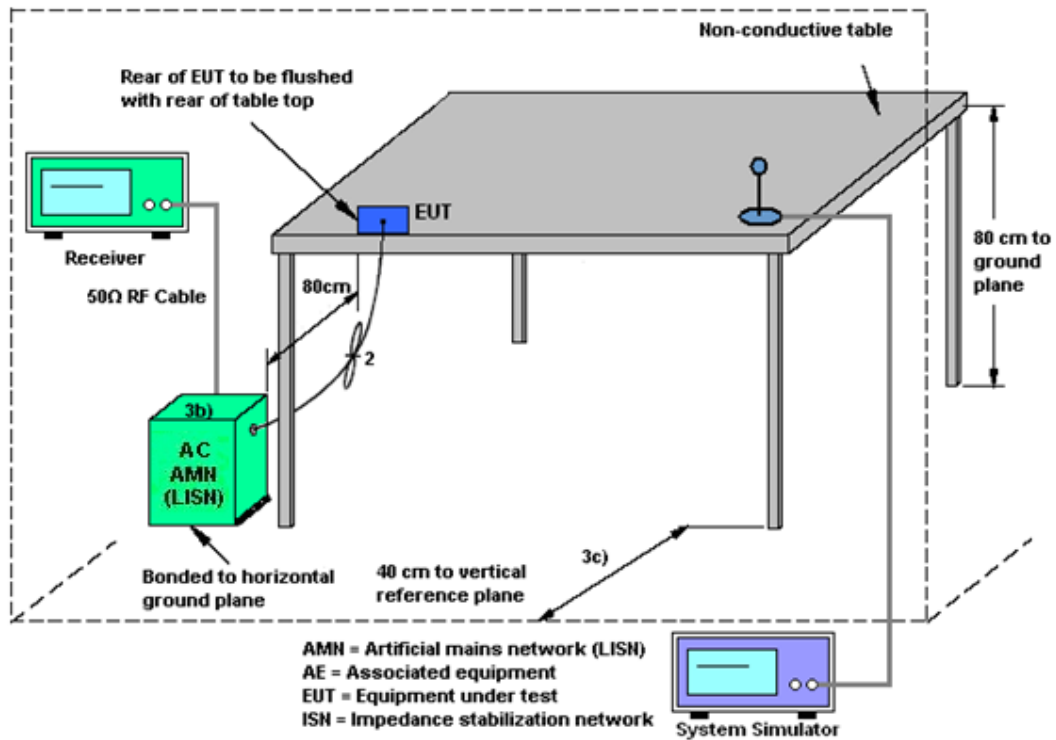

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz;Max 30dBm	Feb. 22, 2025	Apr. 27, 2025	Feb. 21, 2026	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Apr. 27, 2025	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Apr. 27, 2025	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Apr. 27, 2025	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2025	Apr. 27, 2025	Apr. 10, 2026	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Apr. 27, 2025	Oct. 21, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 04, 2024	Apr. 27, 2025	Jul. 03, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 03, 2025	Apr. 27, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz~18Ghz	Jan. 03, 2025	Apr. 27, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Apr. 27, 2025	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 27, 2025	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 27, 2025	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 27, 2025	NCR	Radiation (03CH06-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 24, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Apr. 24, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Apr. 24, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2025	May 08, 2025	Apr. 17, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	May 08, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2025	May 08, 2025	Apr. 17, 2026	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	May 08, 2025	Oct. 08, 2025	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

Ambient Condition: 25 °C, 45 %RH

According Standard: ■Part15C

Test Date: 2025.4.24Test Engineer: Gene Wang


DTS Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.04	2408.00	2416.04	0.5	PASS
		2437	10.00	2432.00	2442.00	0.5	PASS
		2462	9.04	2457.00	2466.04	0.5	PASS
11G	Ant1	2412	15.12	2404.44	2419.56	0.5	PASS
		2437	15.36	2429.44	2444.80	0.5	PASS
		2462	15.48	2454.08	2469.56	0.5	PASS
11N20SISO	Ant1	2412	15.12	2404.44	2419.56	0.5	PASS
		2437	15.44	2429.44	2444.88	0.5	PASS
		2462	15.36	2454.20	2469.56	0.5	PASS





Test Graphs

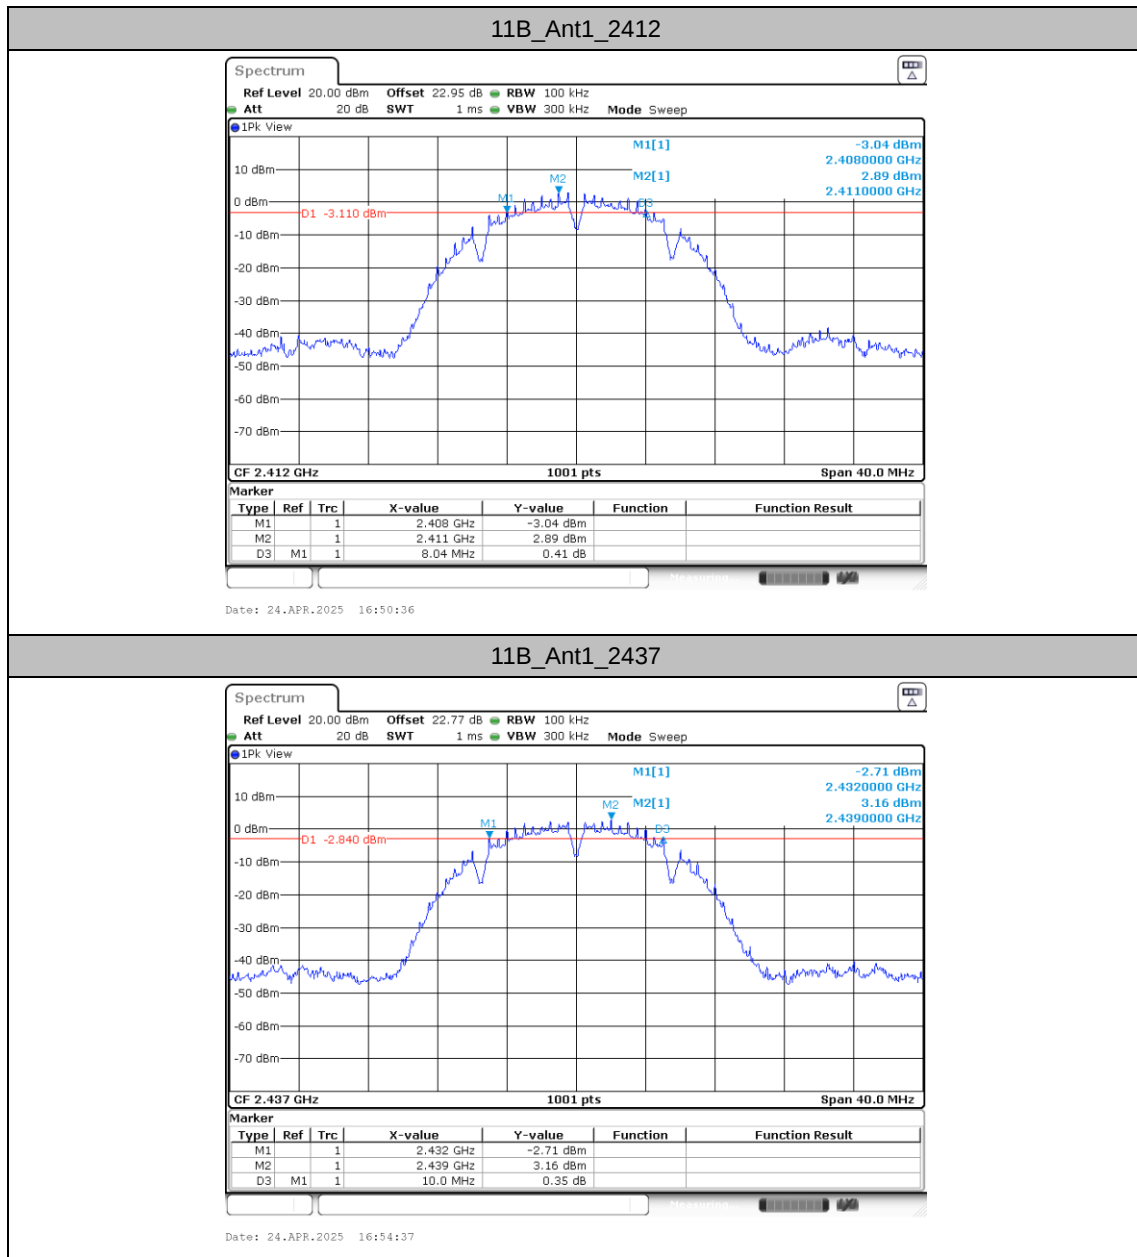

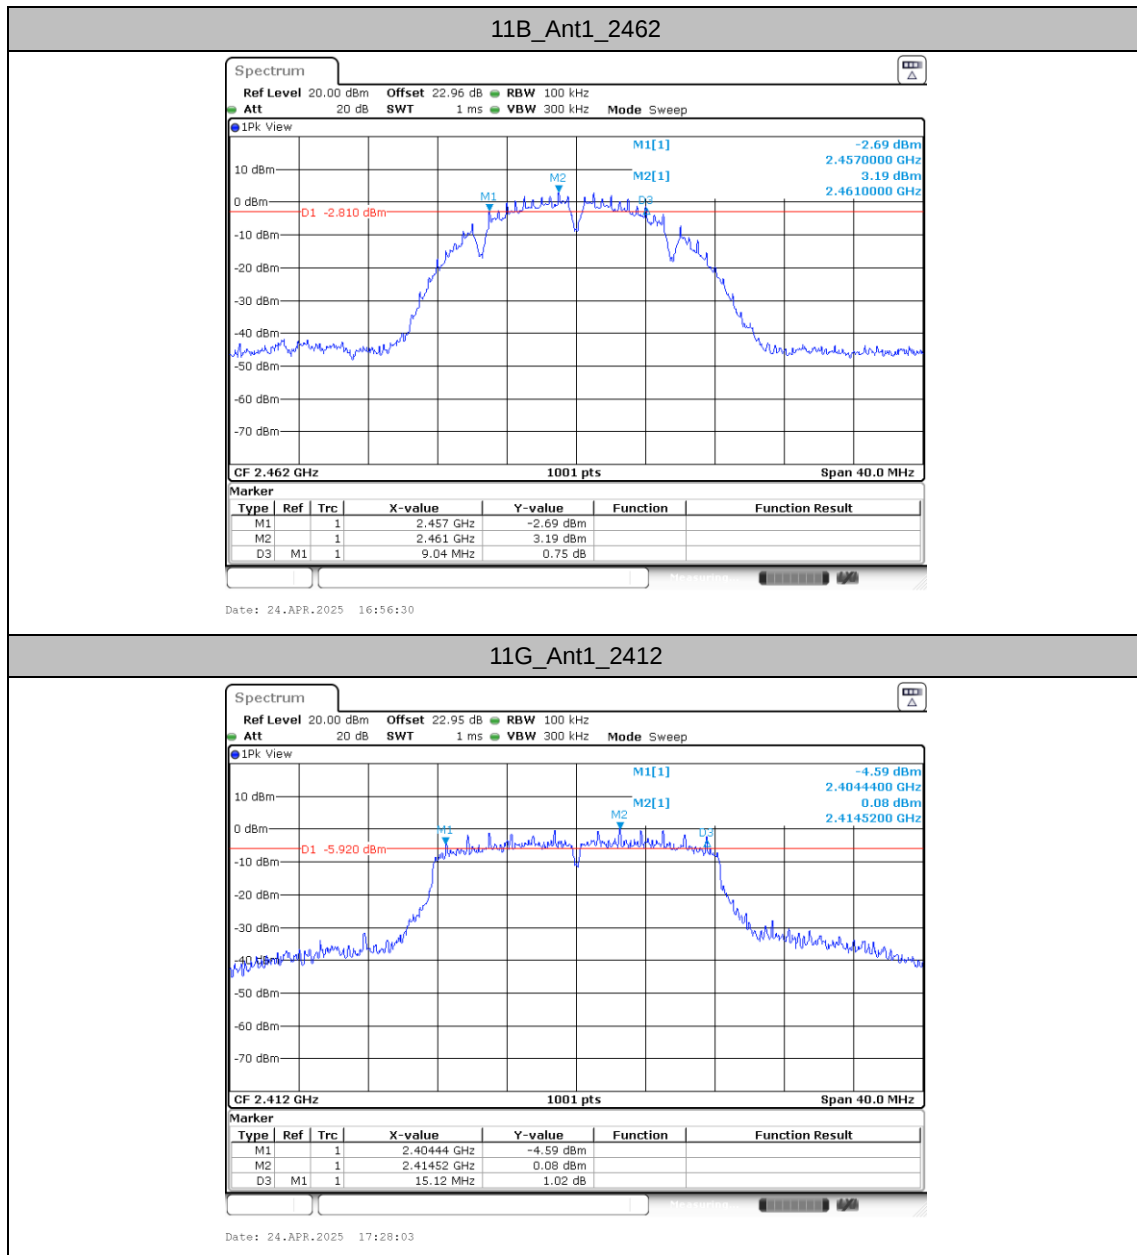

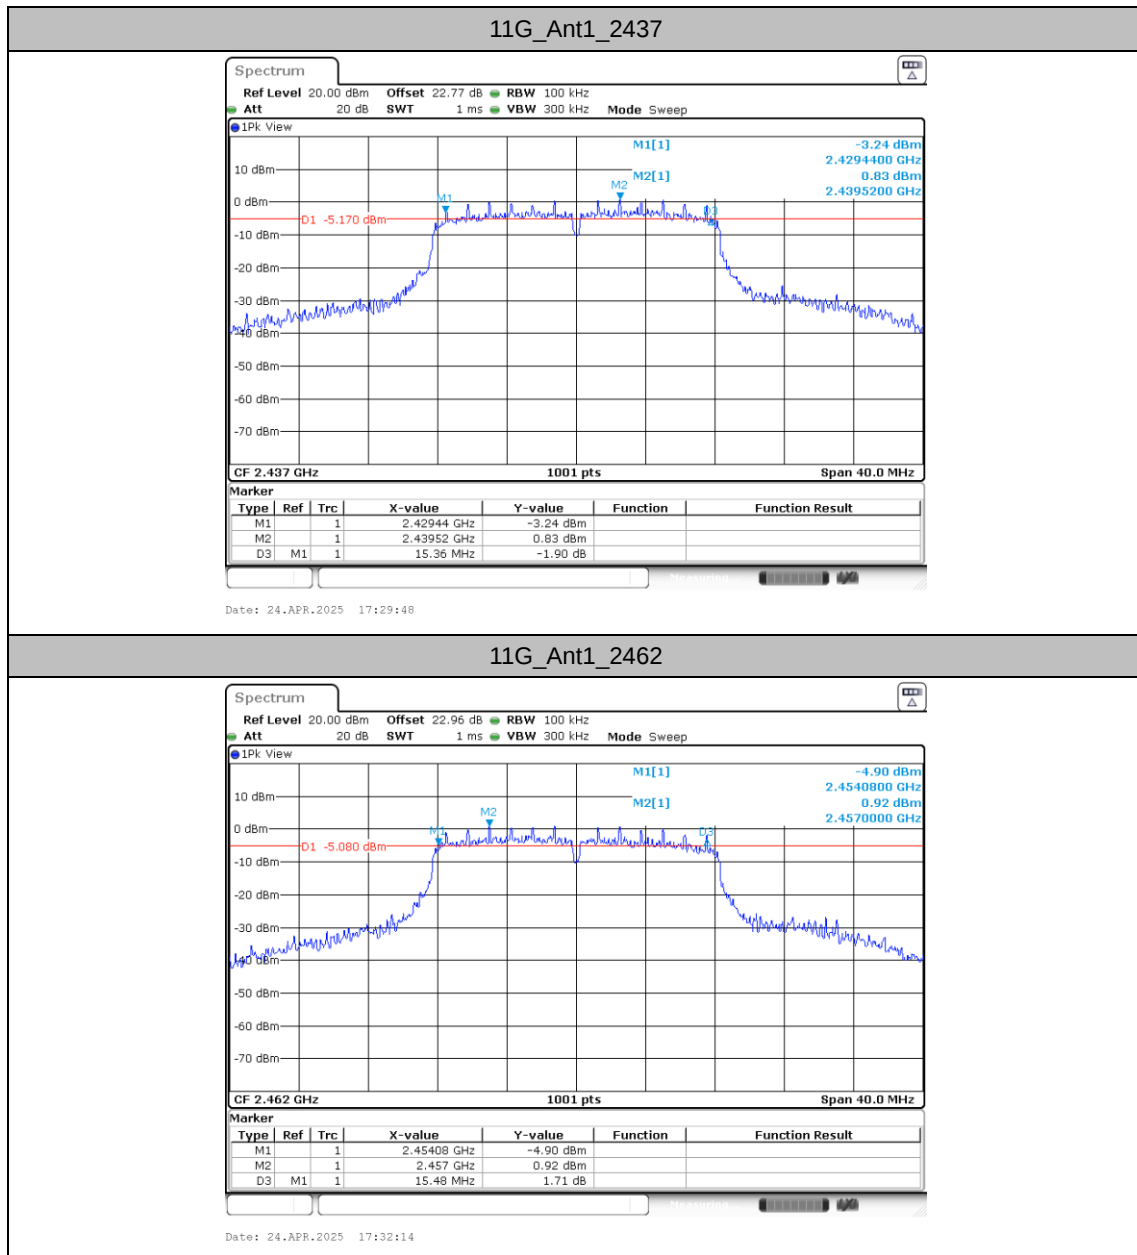

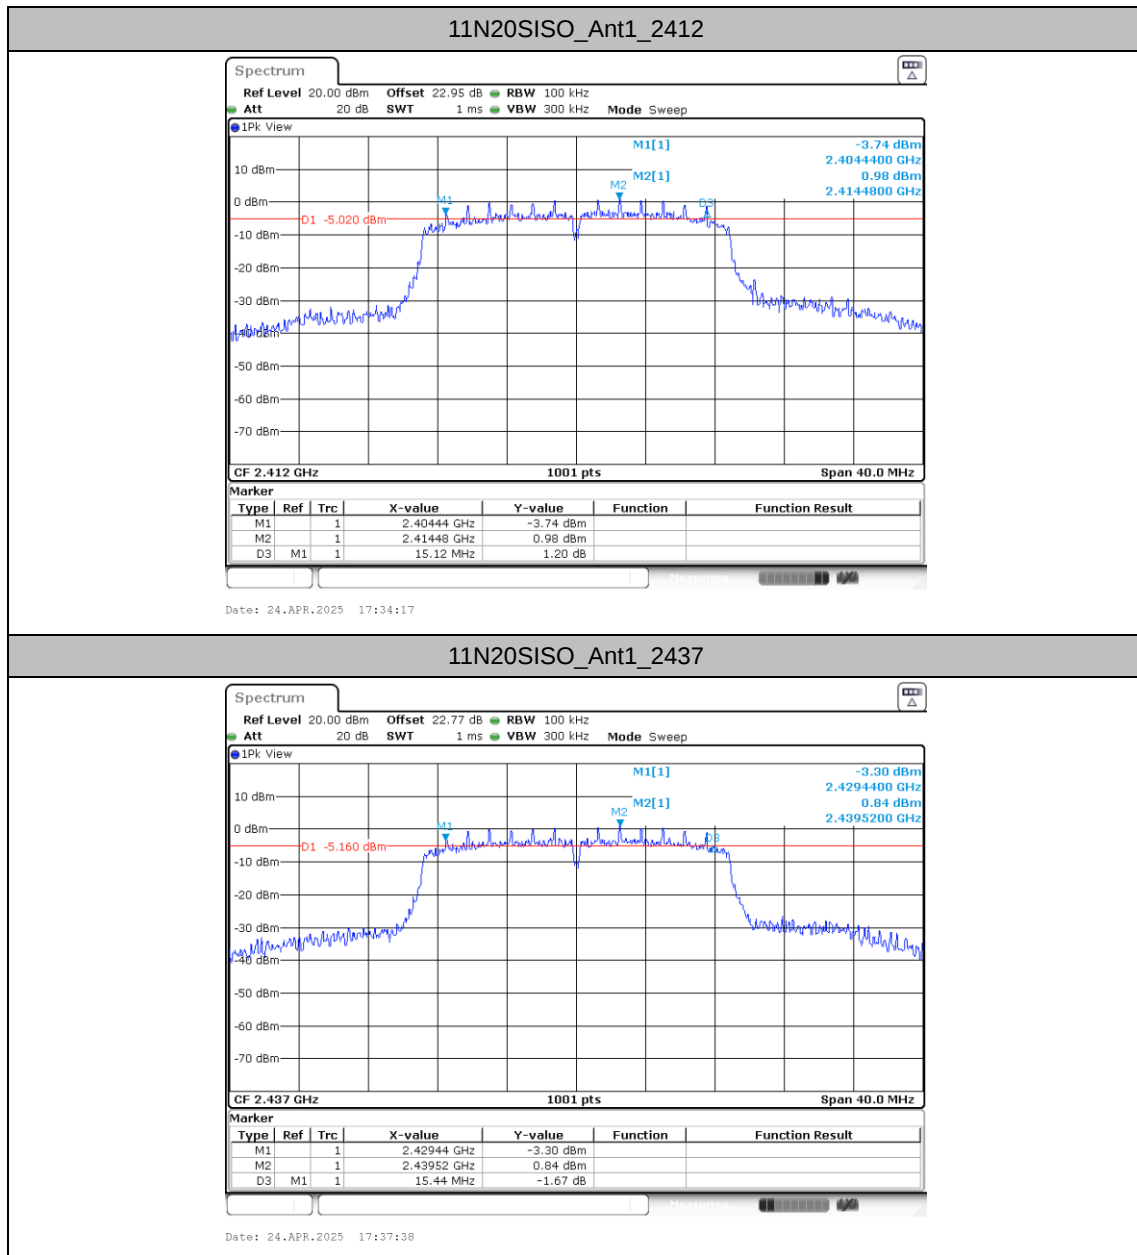

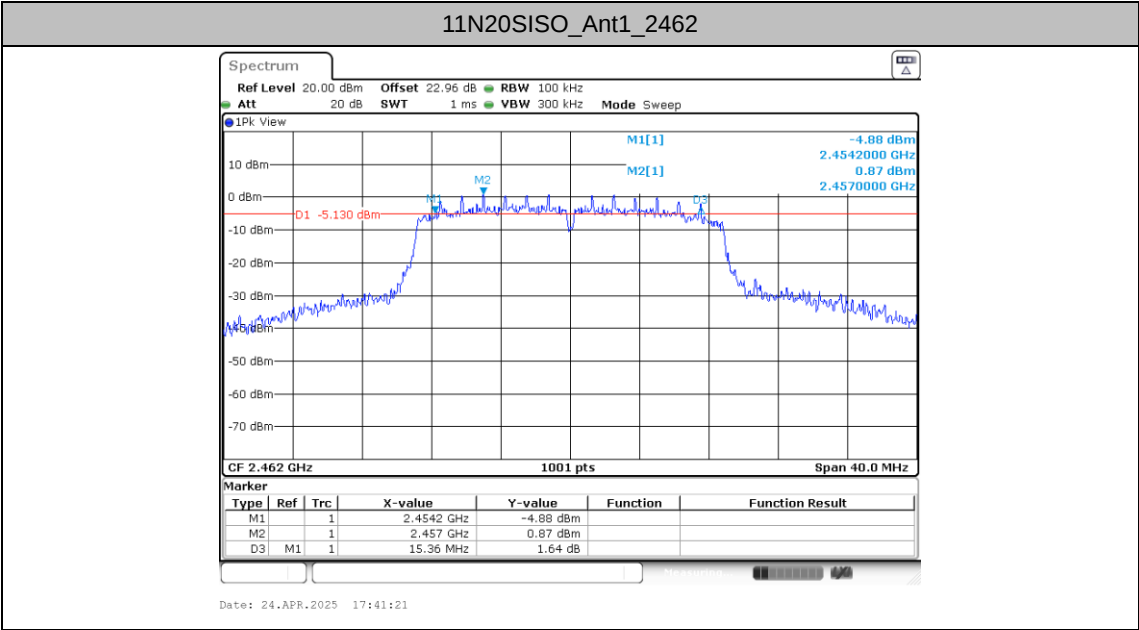




Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.107	2405.4865	2418.5934	---	---
		2437	13.307	2430.3666	2443.6733	---	---
		2462	13.347	2455.2068	2468.5534	---	---
11G	Ant1	2412	16.943	2403.5684	2420.5115	---	---
		2437	17.183	2428.4486	2445.6314	---	---
		2462	17.143	2453.3686	2470.5115	---	---
11N20SISO	Ant1	2412	17.862	2403.1688	2421.0310	---	---
		2437	18.102	2428.0090	2446.1109	---	---
		2462	18.022	2452.9690	2470.9910	---	---





Test Graphs

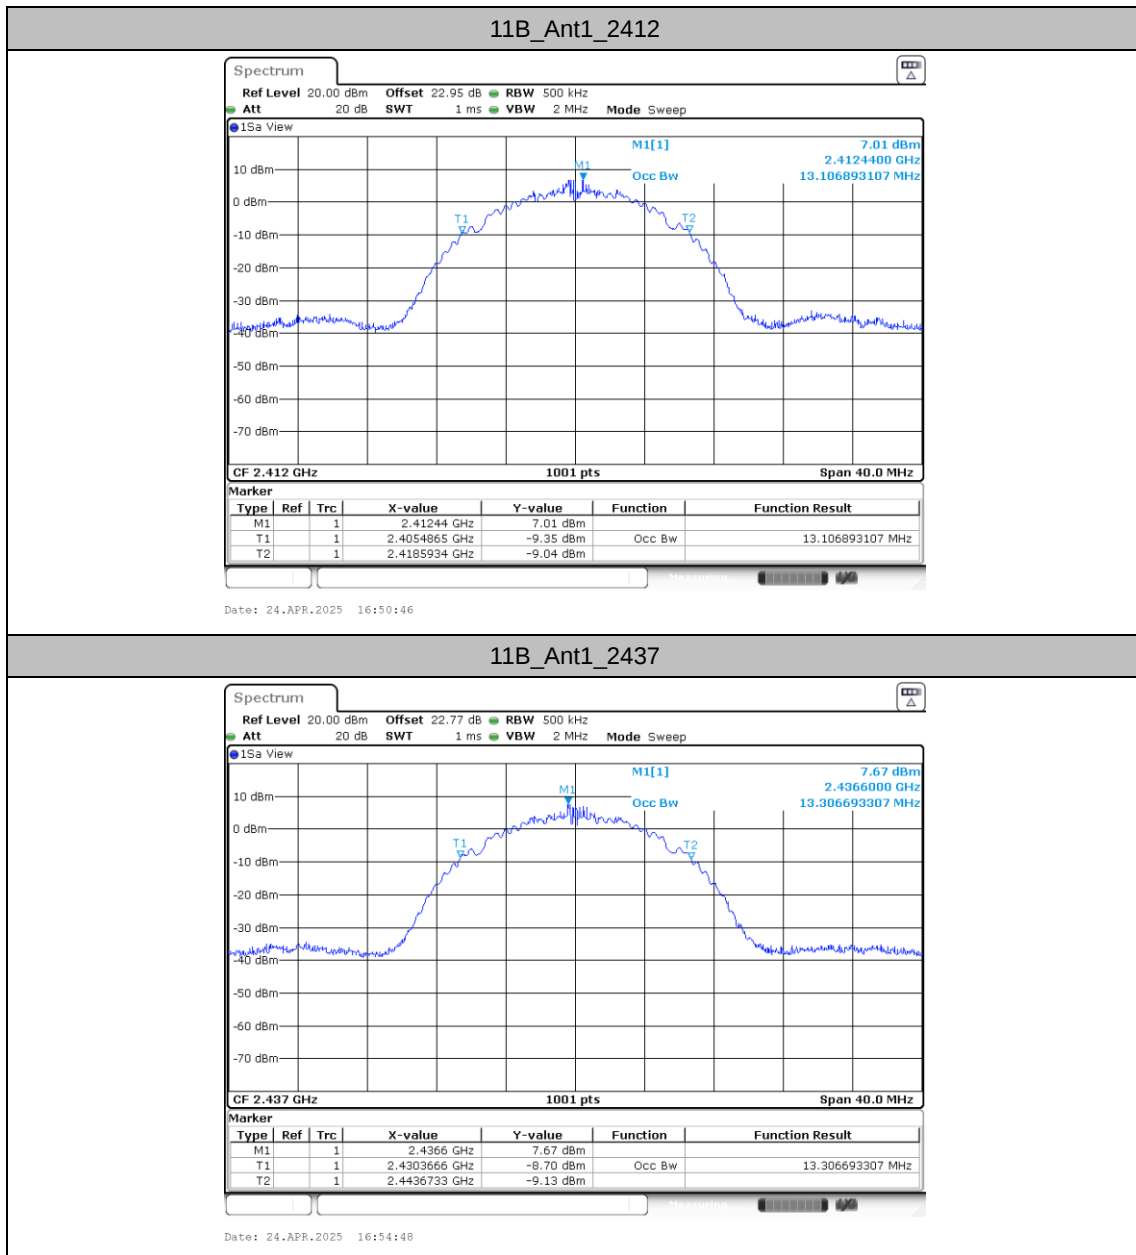

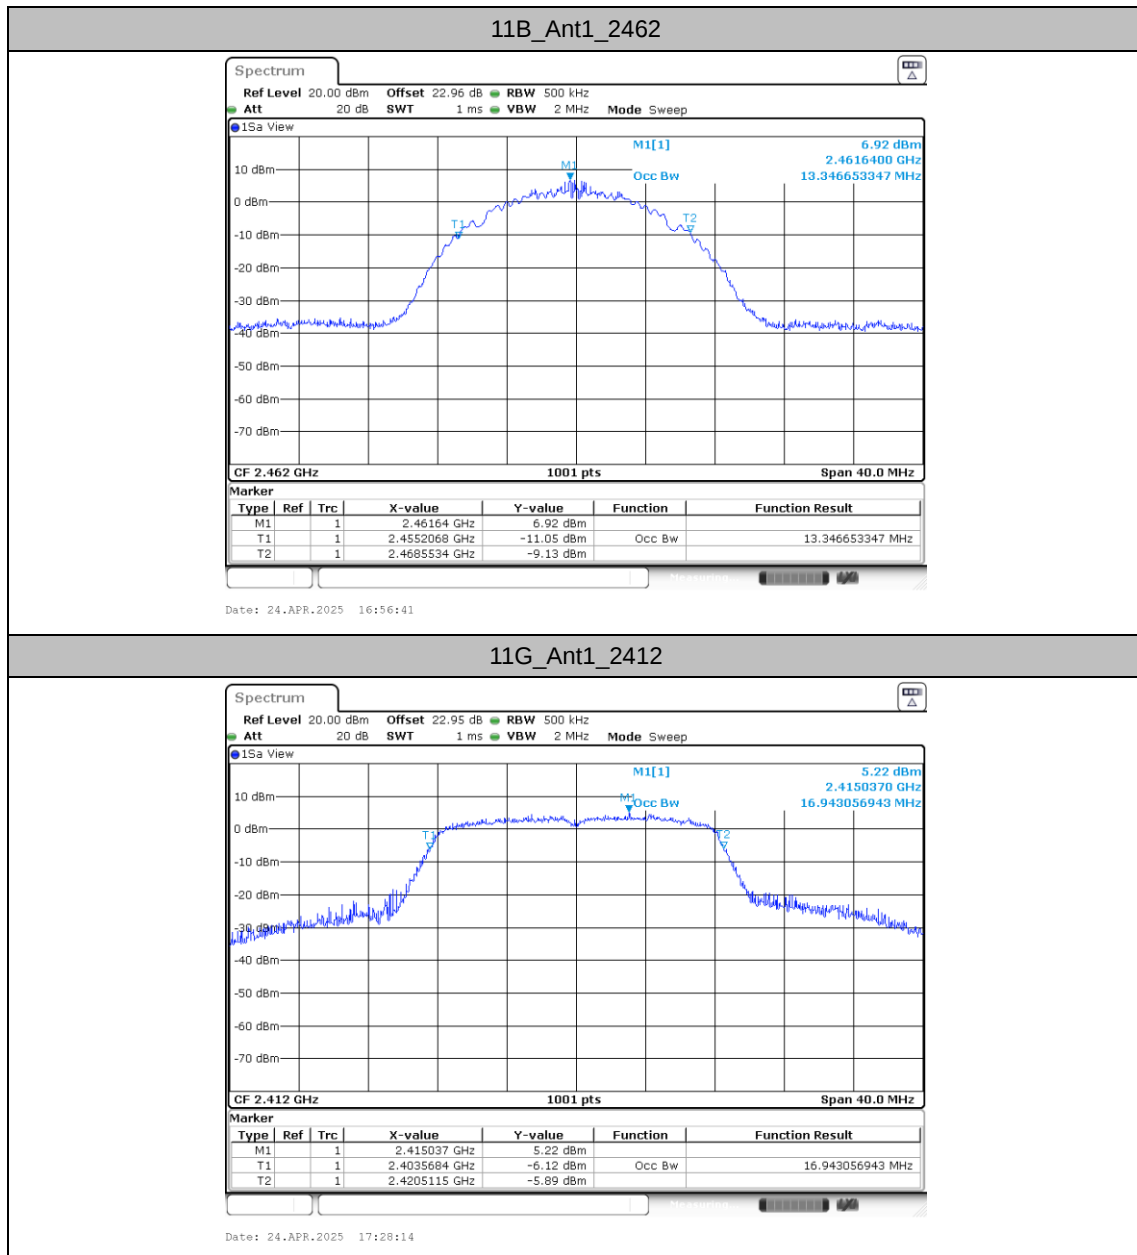

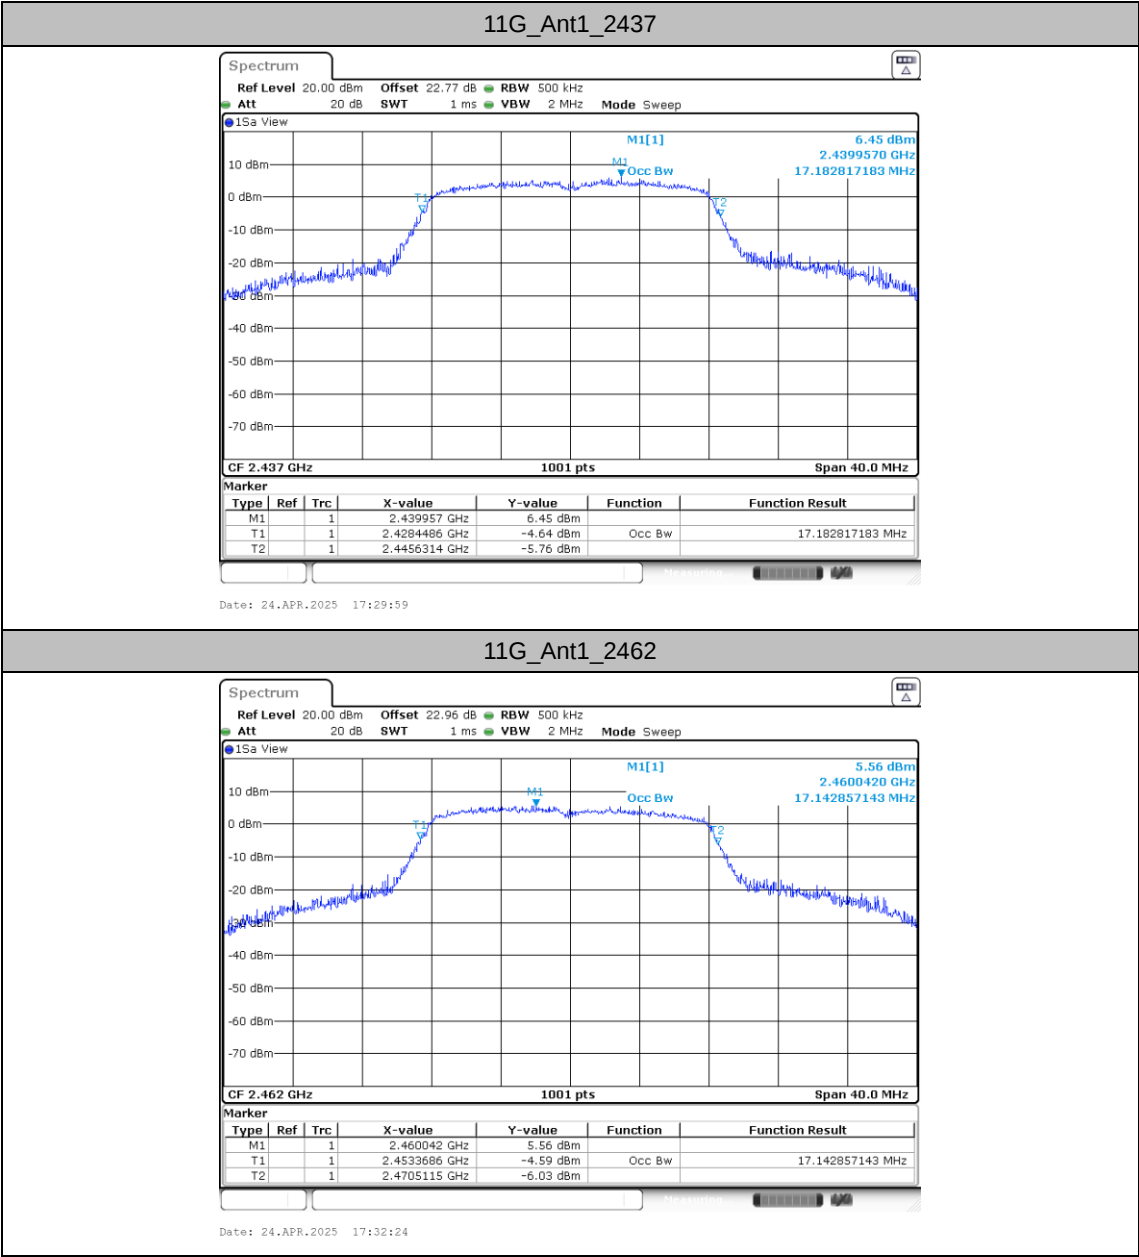

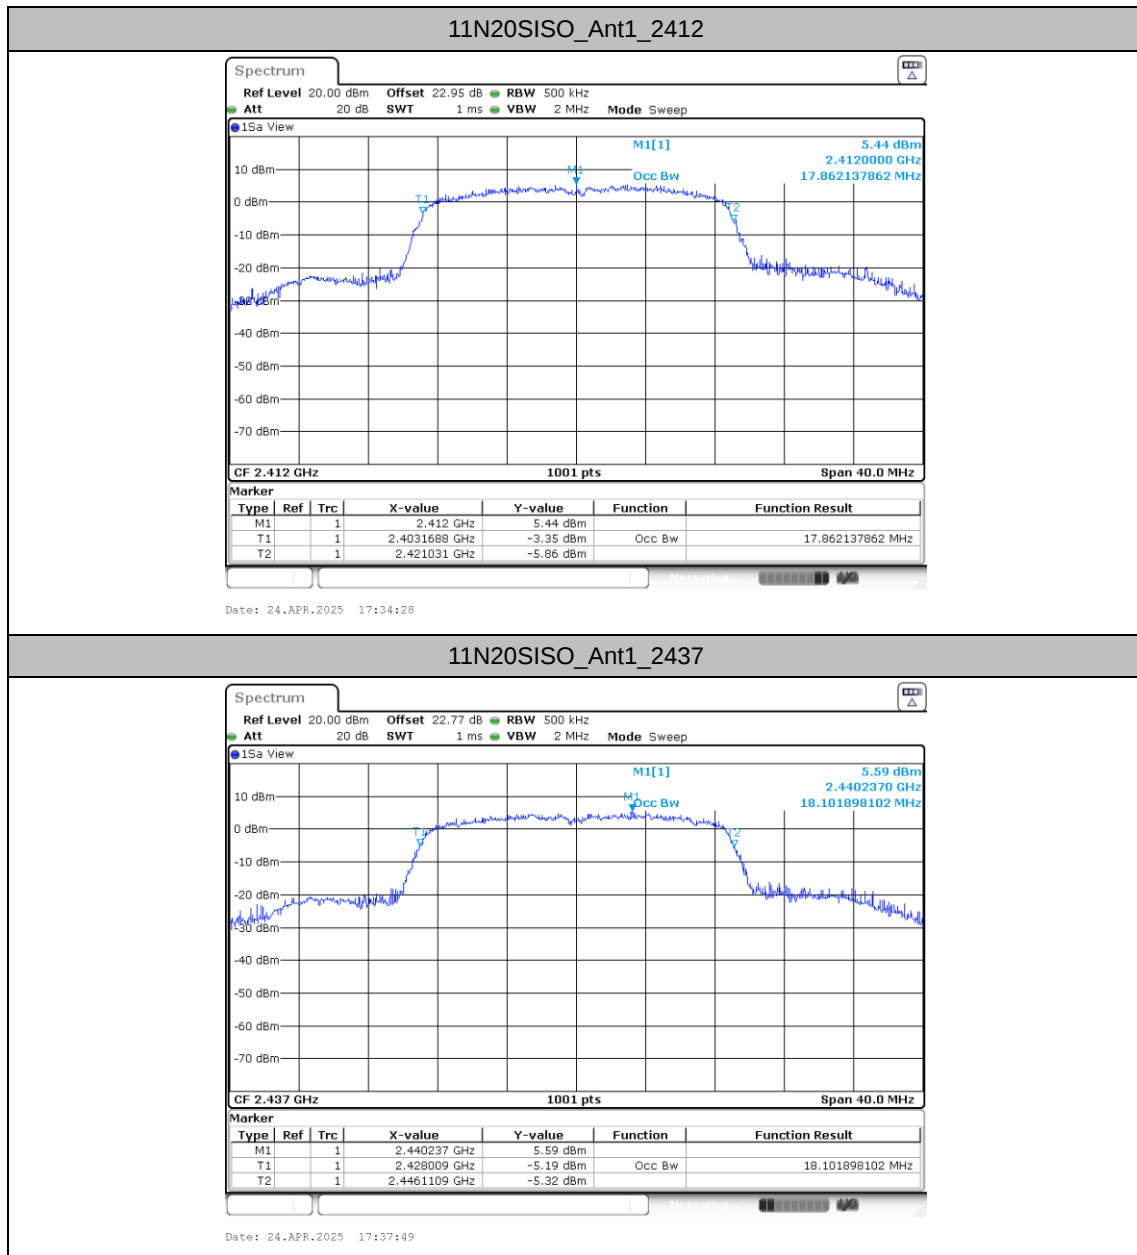

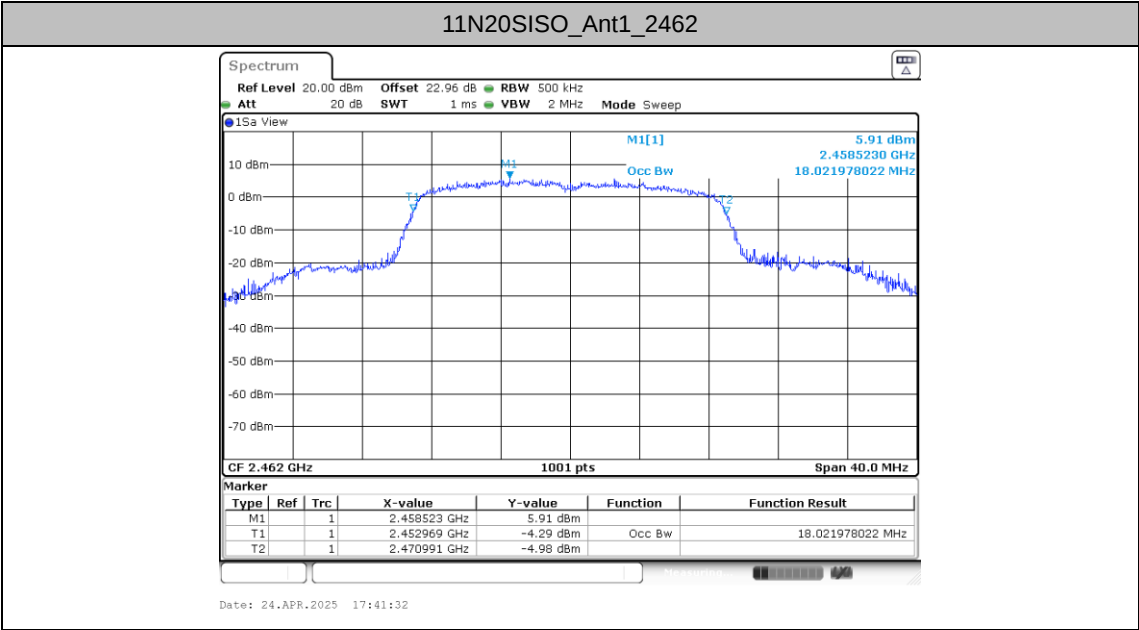




Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-11.38	≤8.00	PASS
		2437	-11.10	≤8.00	PASS
		2462	-11.32	≤8.00	PASS
11G	Ant1	2412	-14.42	≤8.00	PASS
		2437	-13.08	≤8.00	PASS
		2462	-12.48	≤8.00	PASS
11N20SISO	Ant1	2412	-12.90	≤8.00	PASS
		2437	-13.40	≤8.00	PASS
		2462	-13.52	≤8.00	PASS





Test Graphs

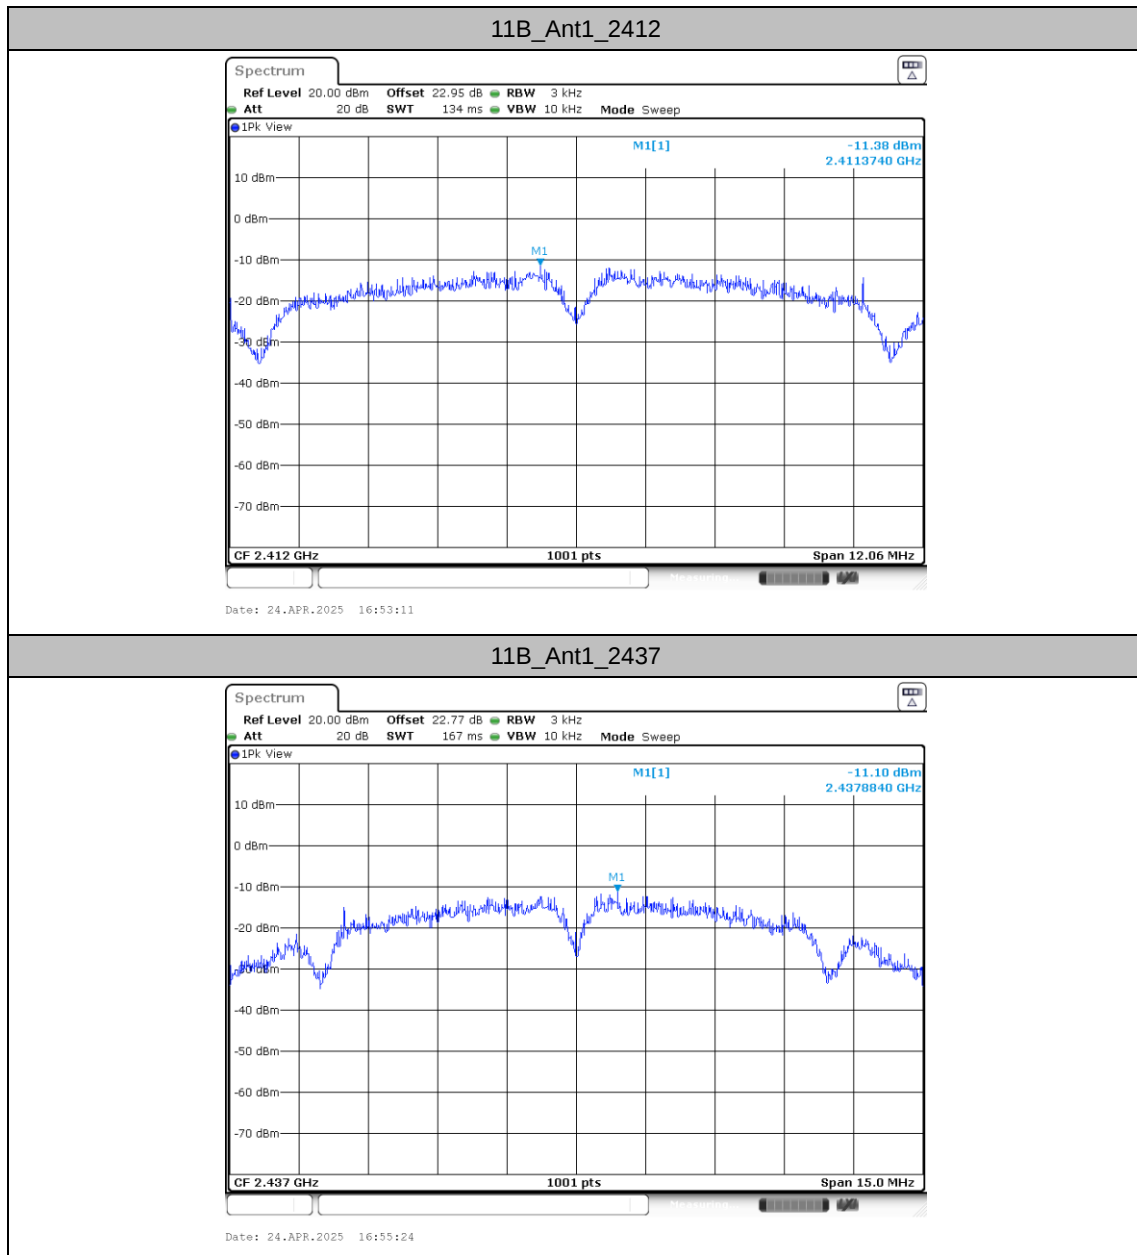

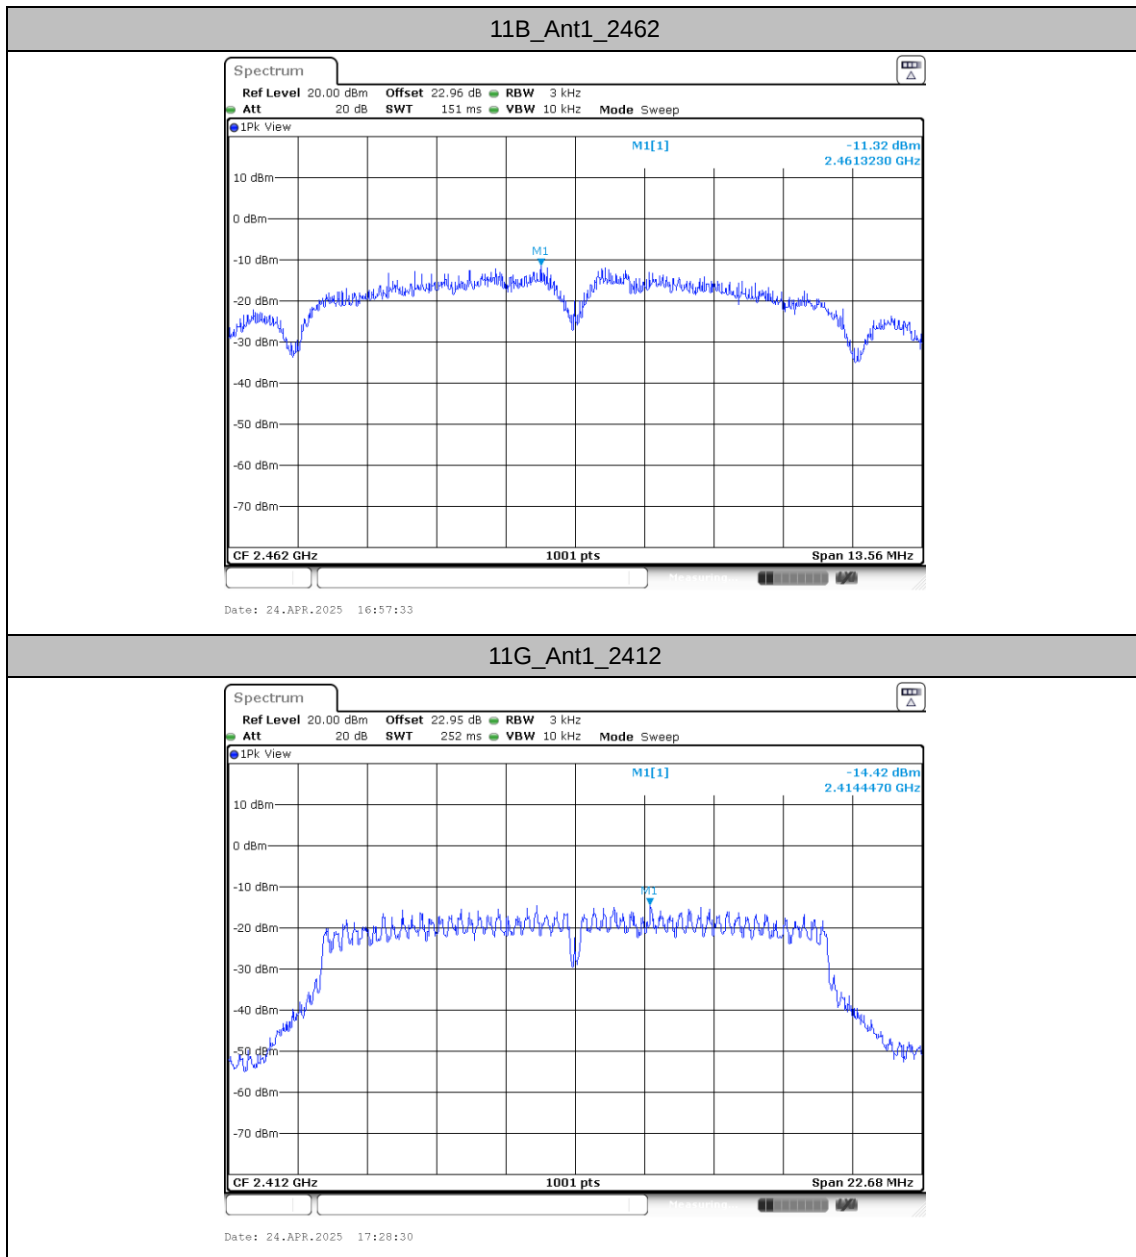

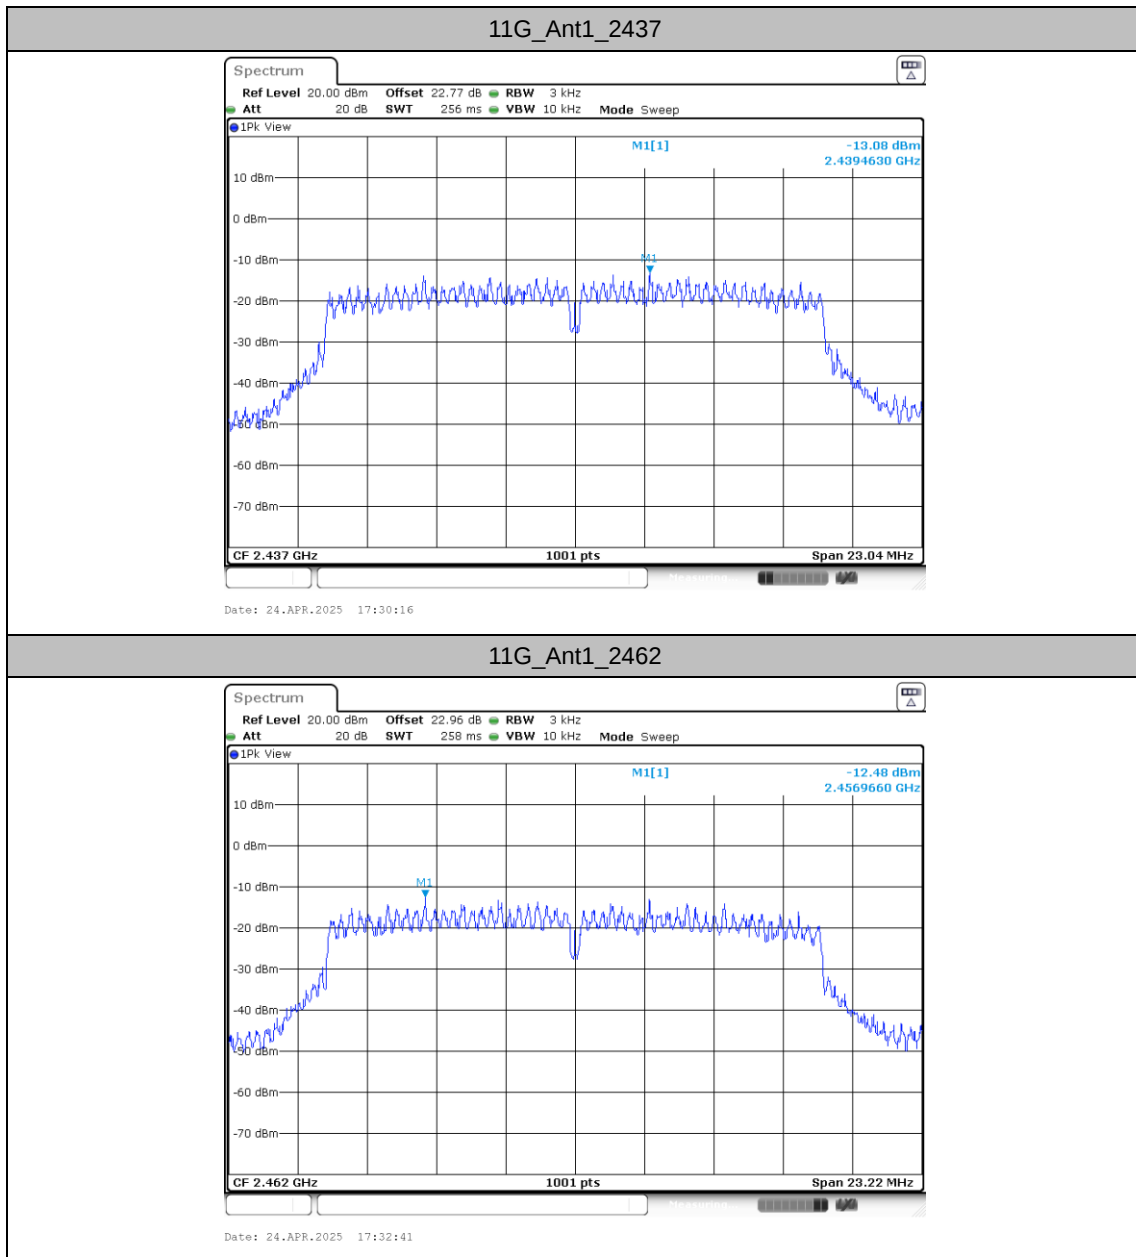

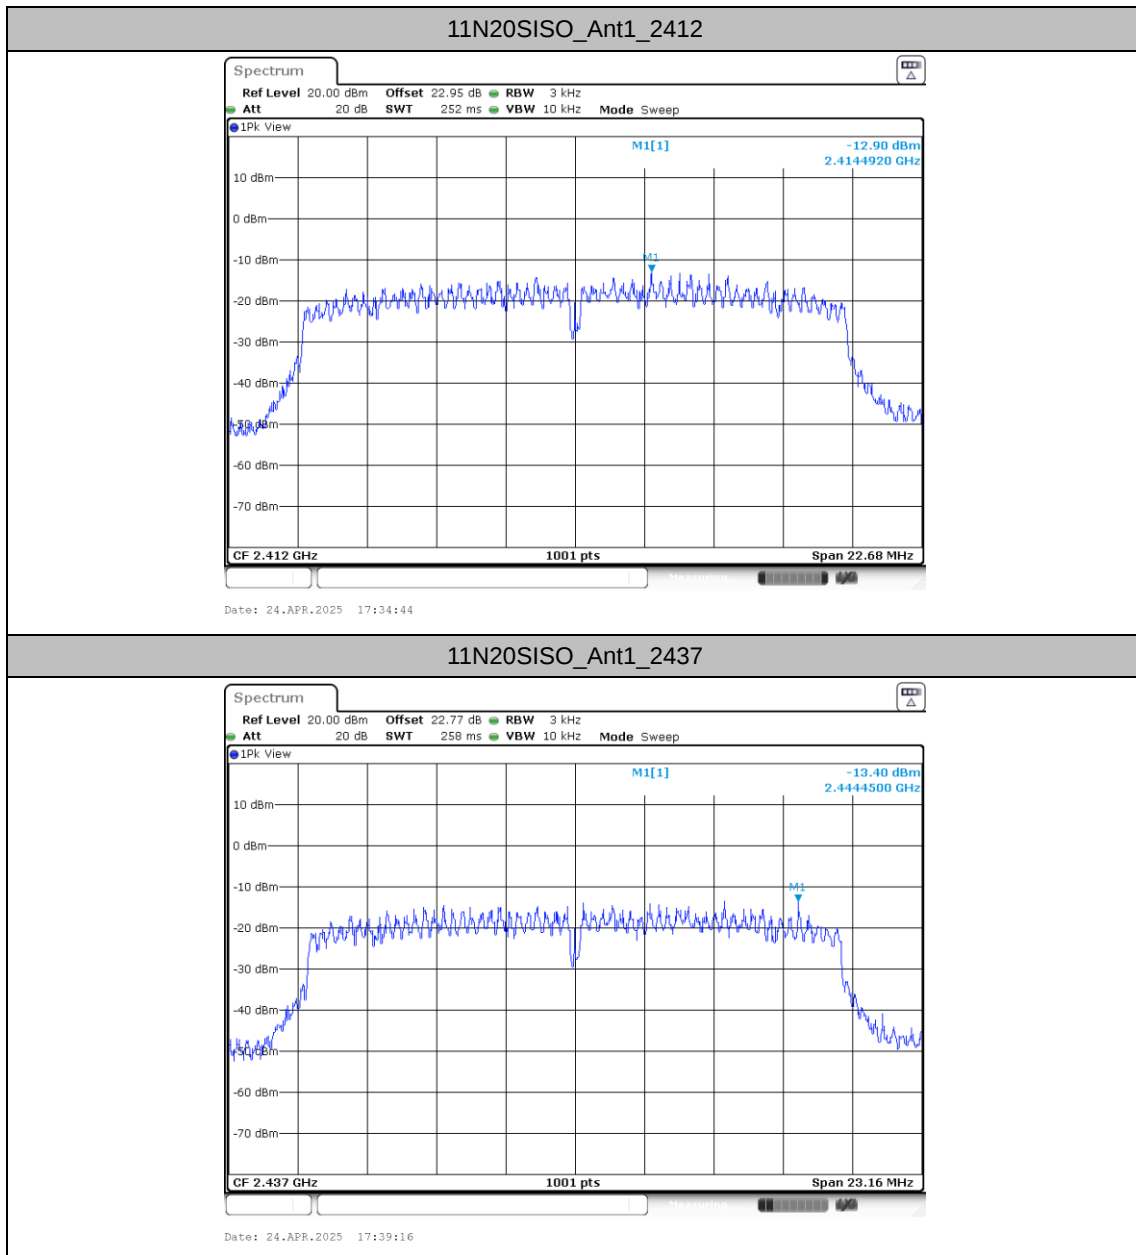

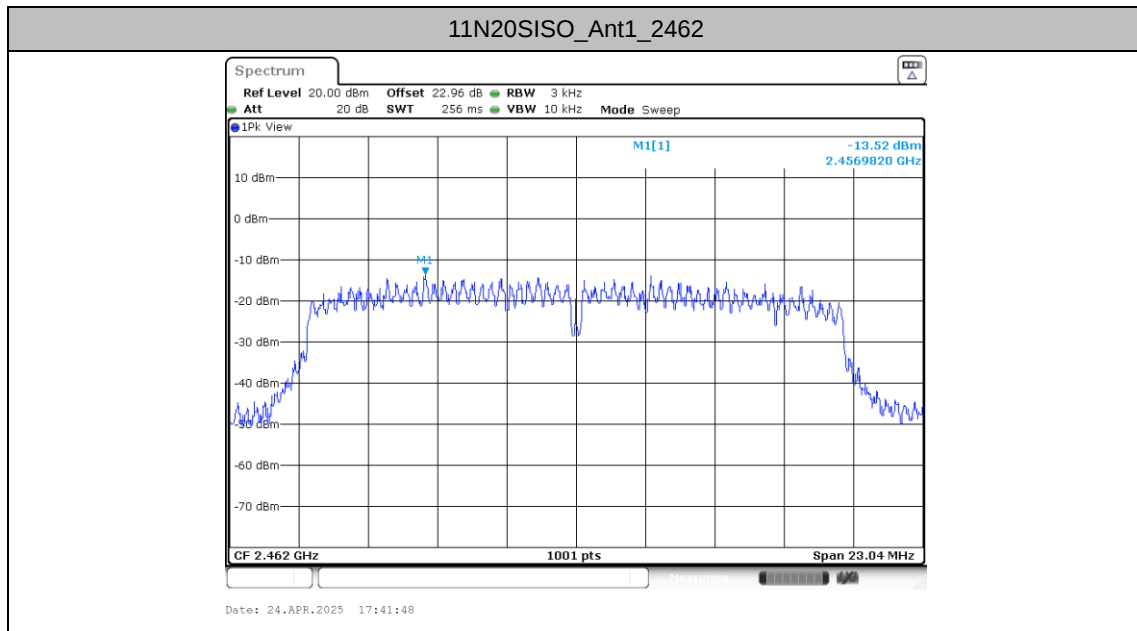




Reference level measurement


Test Result


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
11B	Ant1	2412	2412.98	2.92
		2437	2437.98	3.50
		2462	2460.98	3.10
11G	Ant1	2412	2414.49	-0.01
		2437	2439.47	0.67
		2462	2456.99	0.82
11N20SISO	Ant1	2412	2414.49	0.89
		2437	2439.48	0.70
		2462	2457.00	0.82





Test Graphs

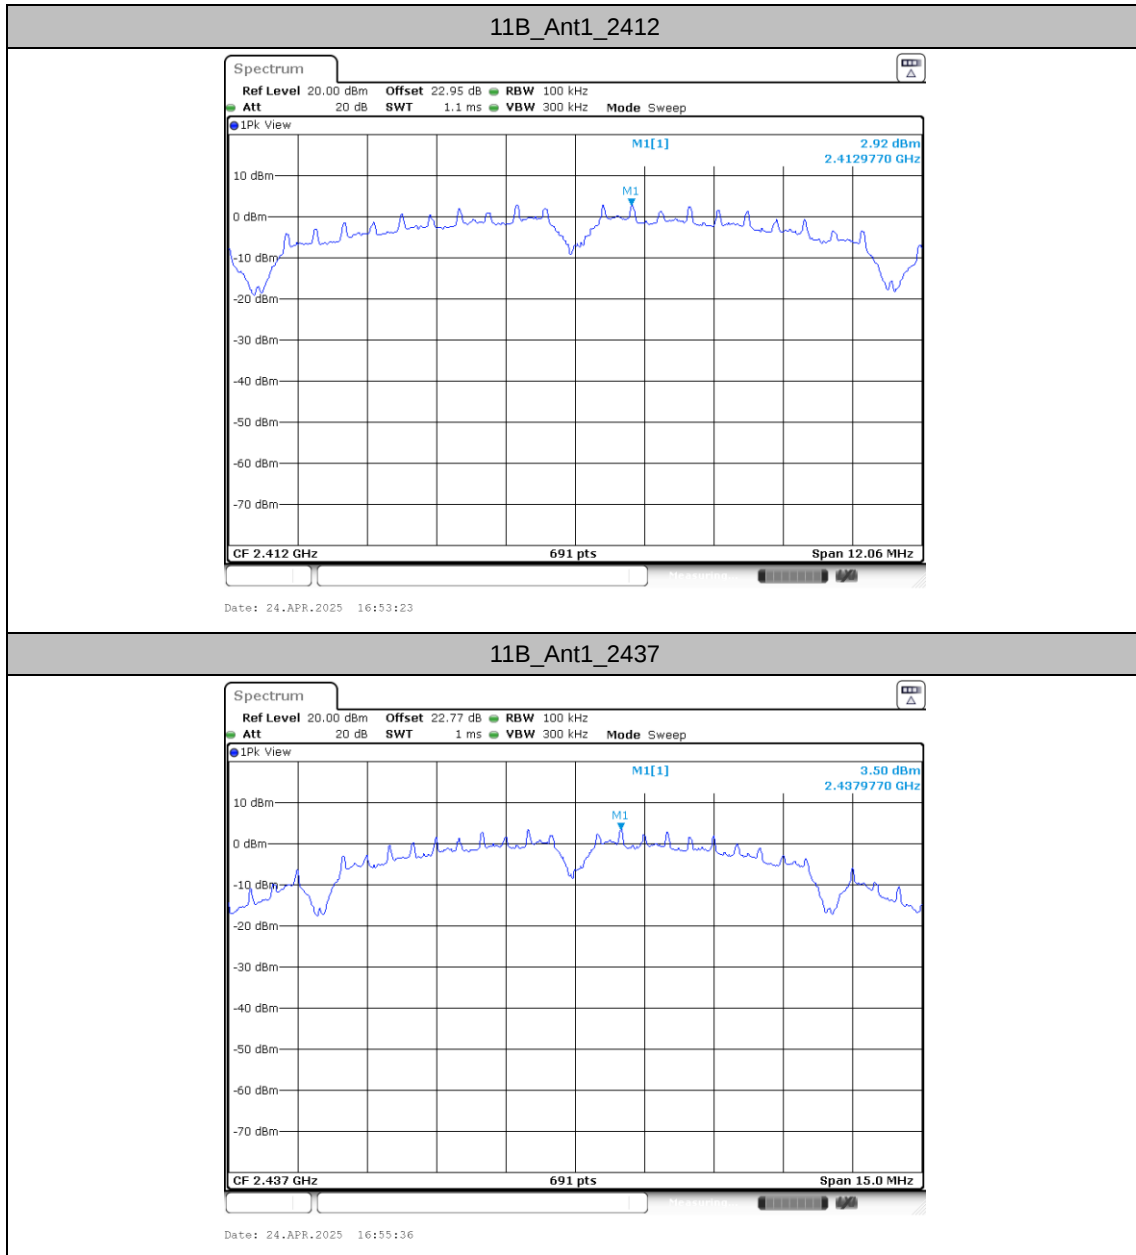

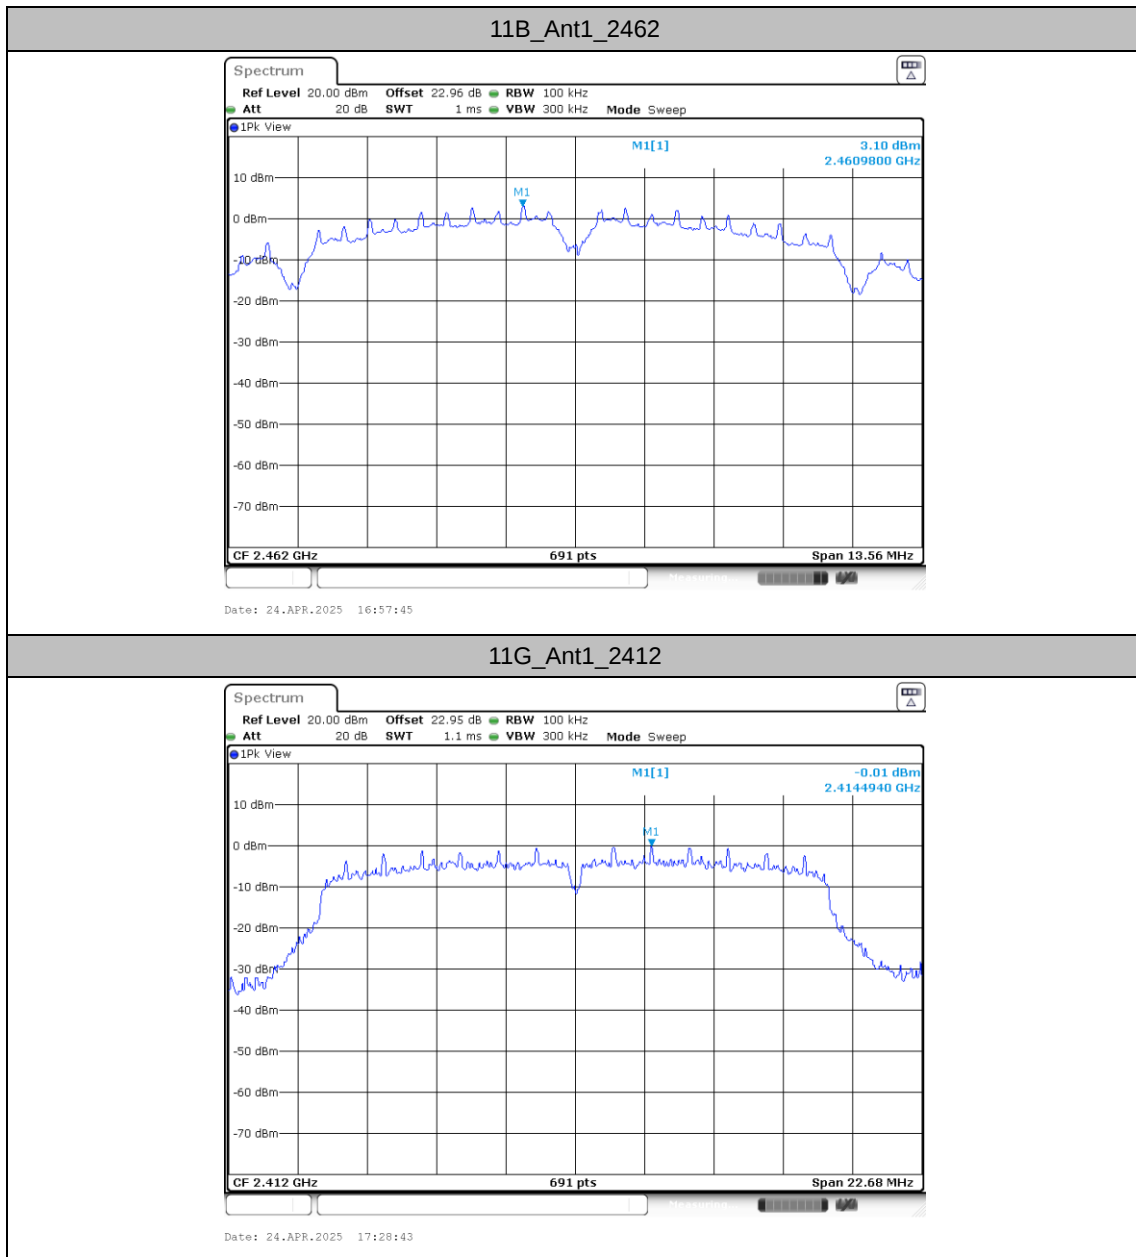

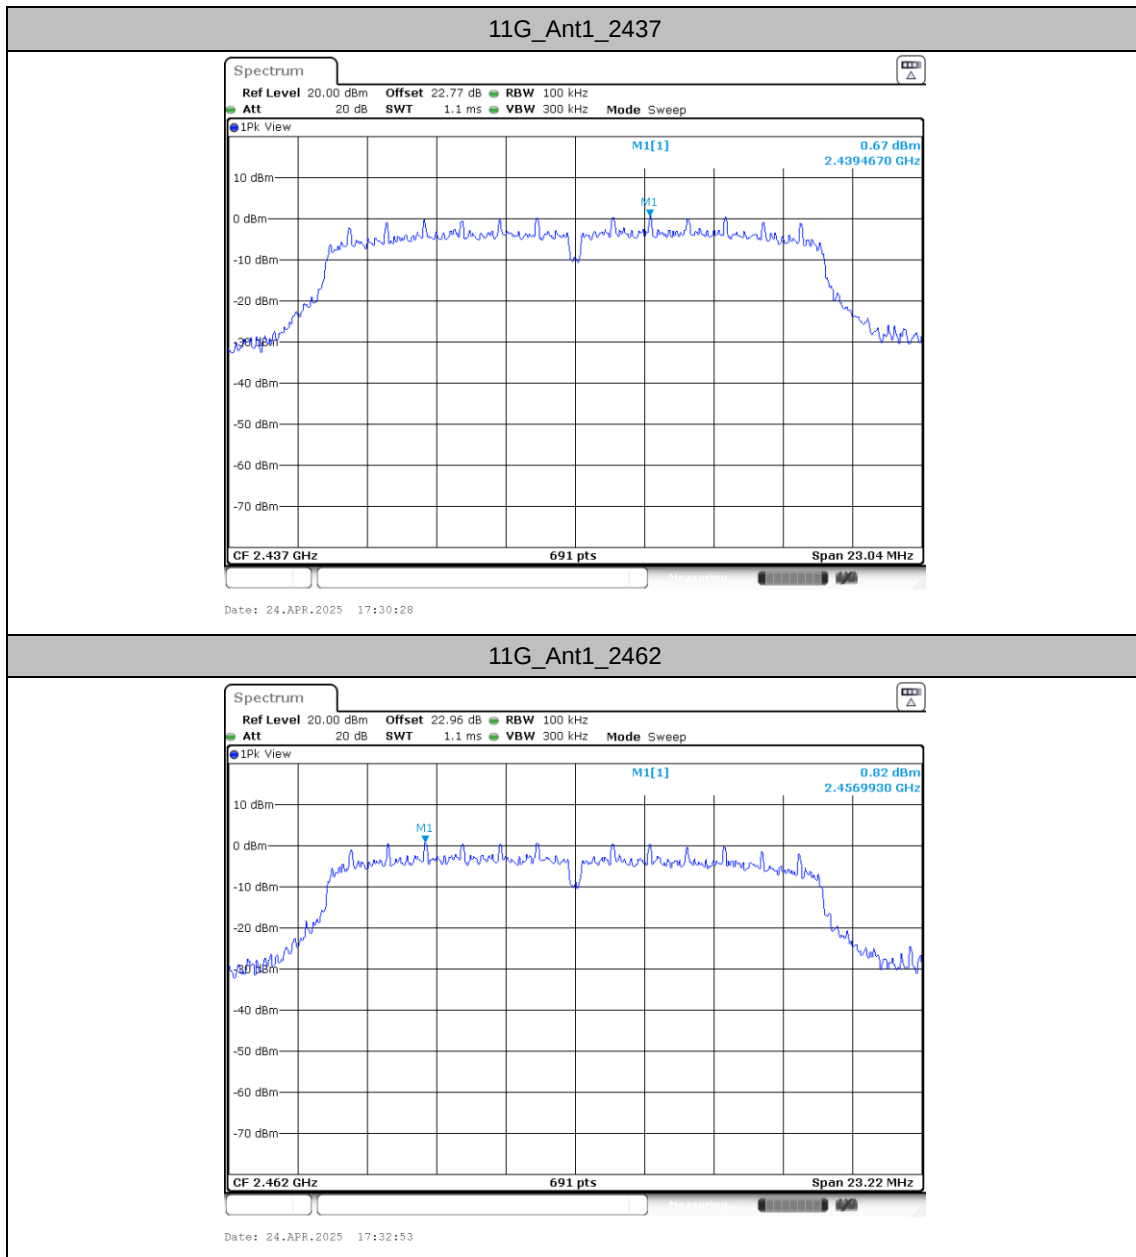

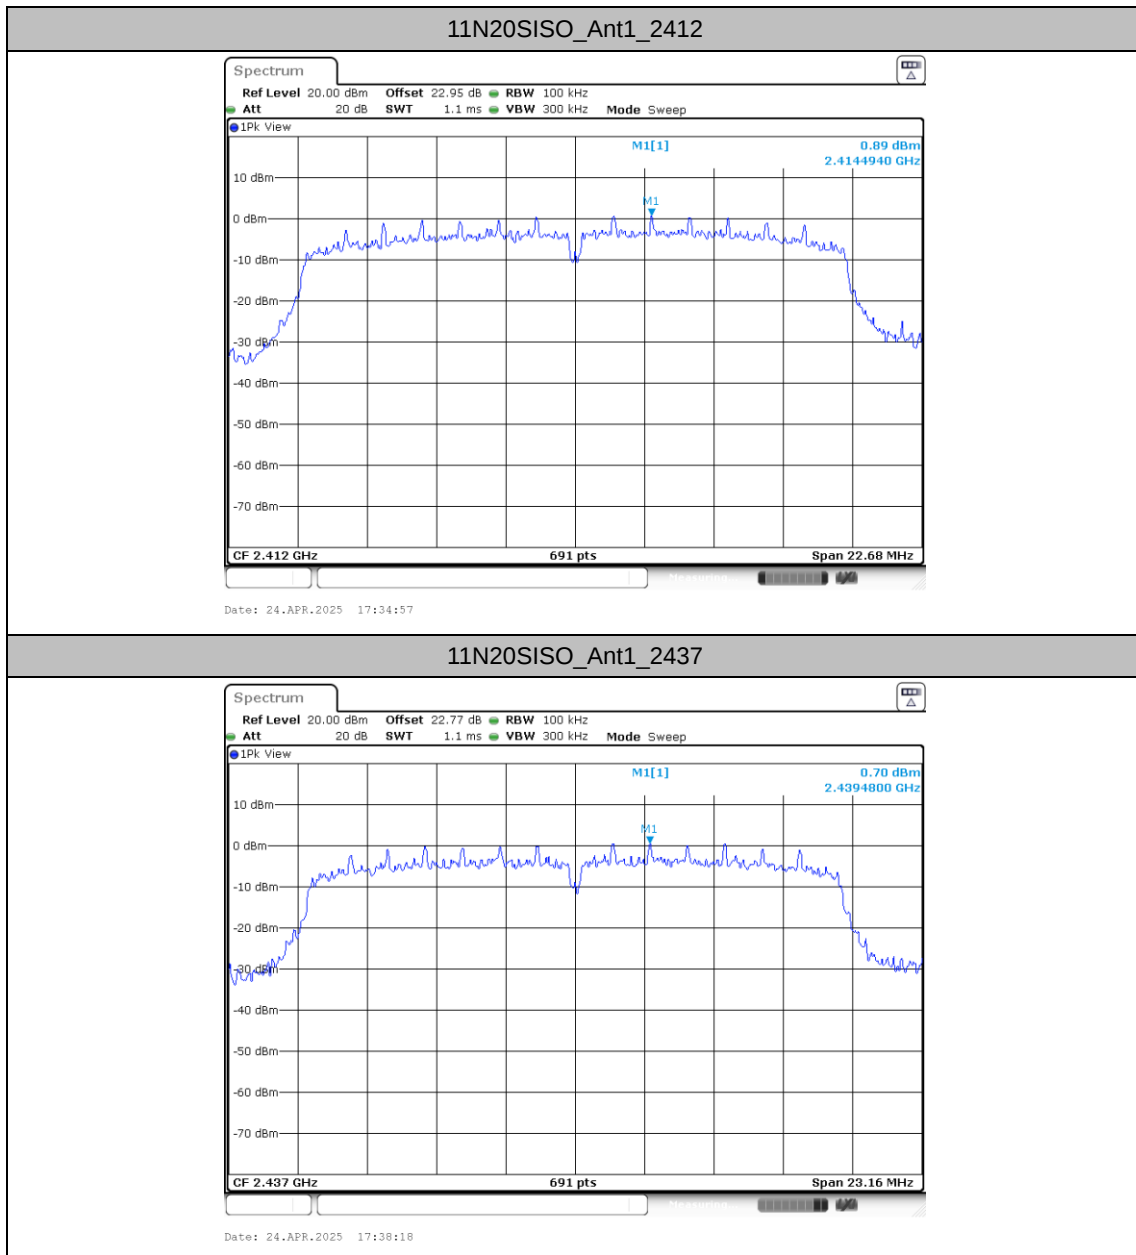

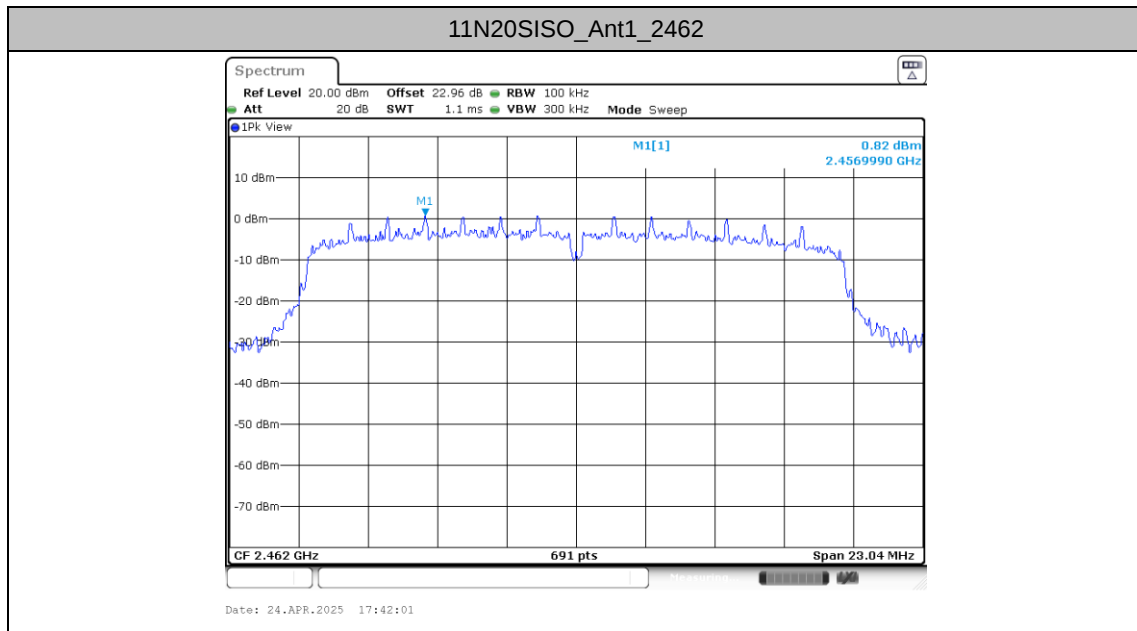




Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
11B	Ant1	Low	2412	2.92	-39.74	≤-17.08	PASS
		High	2462	3.10	-42.47	≤-16.9	PASS
11G	Ant1	Low	2412	-0.01	-33.12	≤-20.01	PASS
		High	2462	0.82	-39.42	≤-19.18	PASS
11N20SISO	Ant1	Low	2412	0.89	-31.49	≤-19.11	PASS
		High	2462	0.82	-39.37	≤-19.18	PASS




Test Graphs

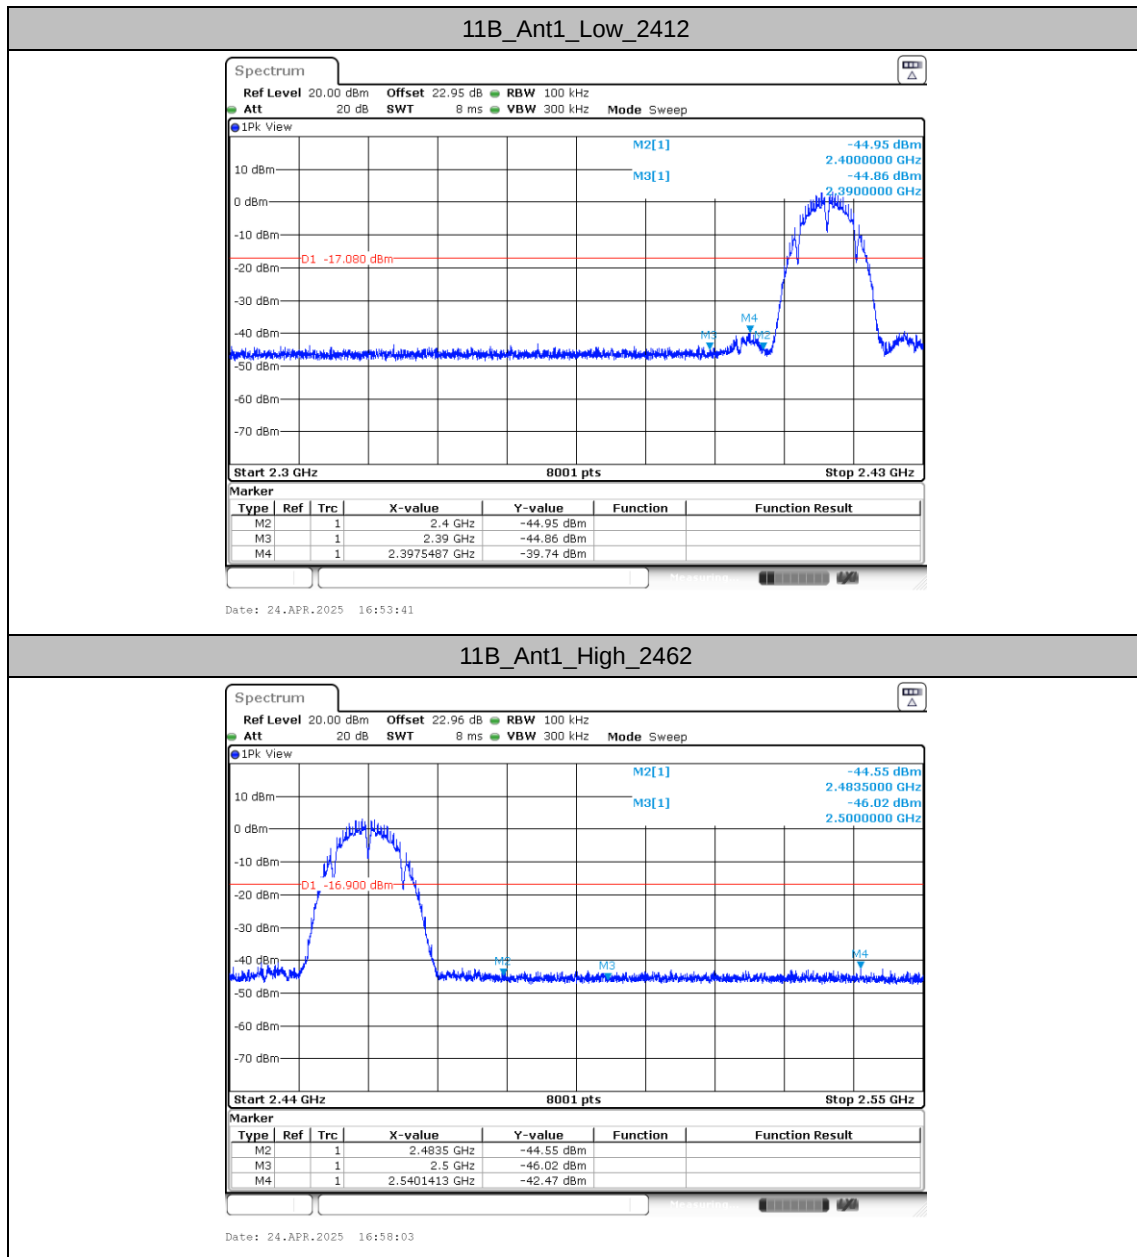




11G_Ant1_Low_2412

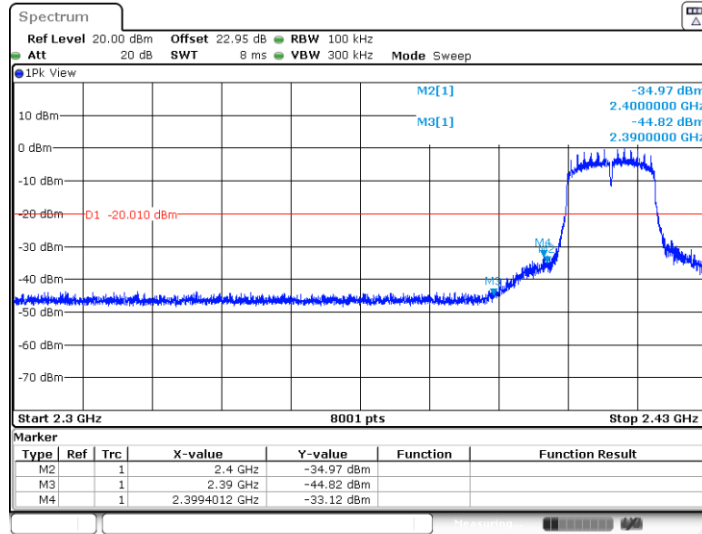


Date: 24.APR.2025 17:29:01

11G_Ant1_High_2462

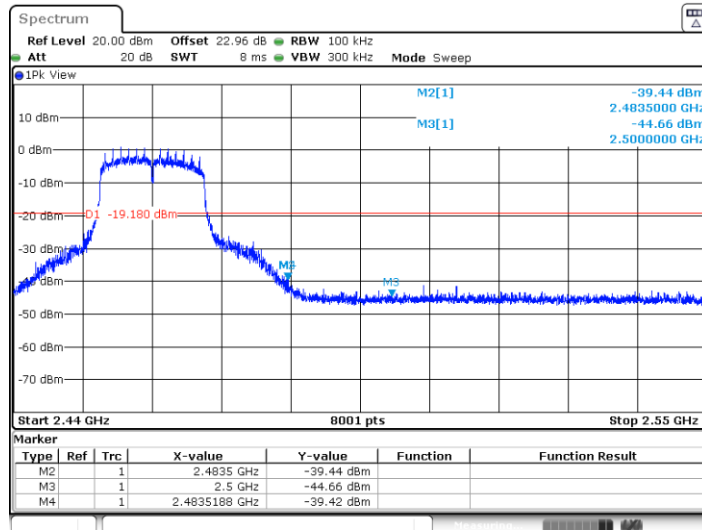

Date: 24.APR.2025 17:33:11

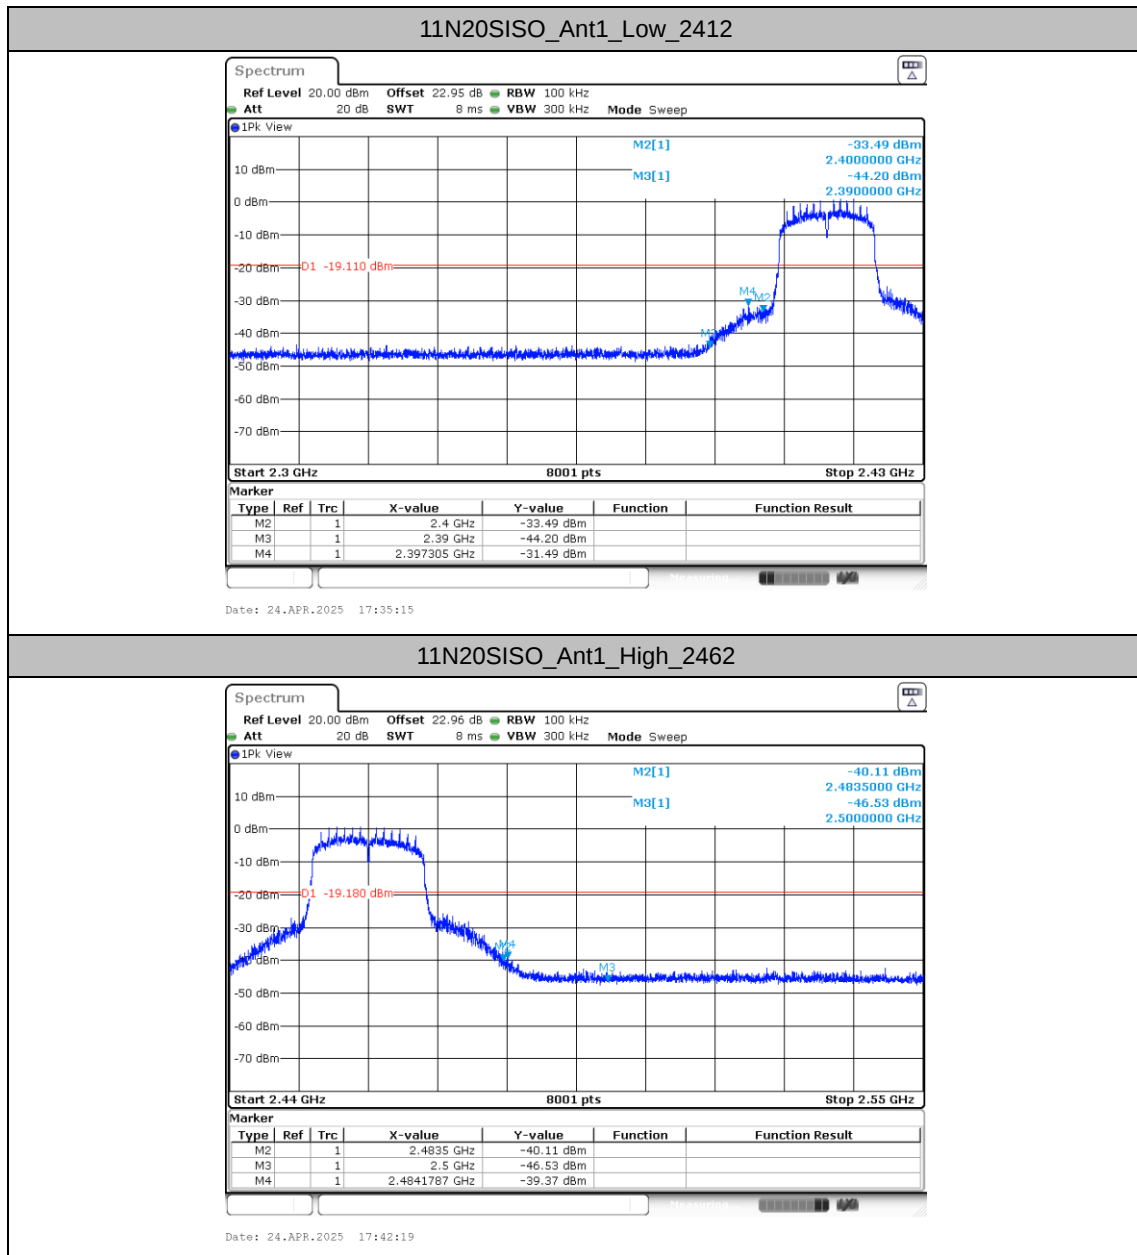




Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [Mhz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B	Ant1	2412	30~1000	2.92	-43.58	≤-17.08	PASS
			1000~26500	2.92	-35.73	≤-17.08	PASS
		2437	30~1000	3.50	-43.69	≤-16.5	PASS
			1000~26500	3.50	-36.2	≤-16.5	PASS
		2462	30~1000	3.10	-44.34	≤-16.9	PASS
			1000~26500	3.10	-35.01	≤-16.9	PASS
11G	Ant1	2412	30~1000	-0.01	-44.13	≤-20.01	PASS
			1000~26500	-0.01	-35.42	≤-20.01	PASS
		2437	30~1000	0.67	-44.71	≤-19.33	PASS
			1000~26500	0.67	-34.85	≤-19.33	PASS
		2462	30~1000	0.82	-43.74	≤-19.18	PASS
			1000~26500	0.82	-35.53	≤-19.18	PASS
11N20SISO	Ant1	2412	30~1000	0.89	-43.86	≤-19.11	PASS
			1000~26500	0.89	-35.73	≤-19.11	PASS
		2437	30~1000	0.70	-44.61	≤-19.3	PASS
			1000~26500	0.70	-35.8	≤-19.3	PASS
		2462	30~1000	0.82	-44.05	≤-19.18	PASS
			1000~26500	0.82	-35.52	≤-19.18	PASS





Test Graphs

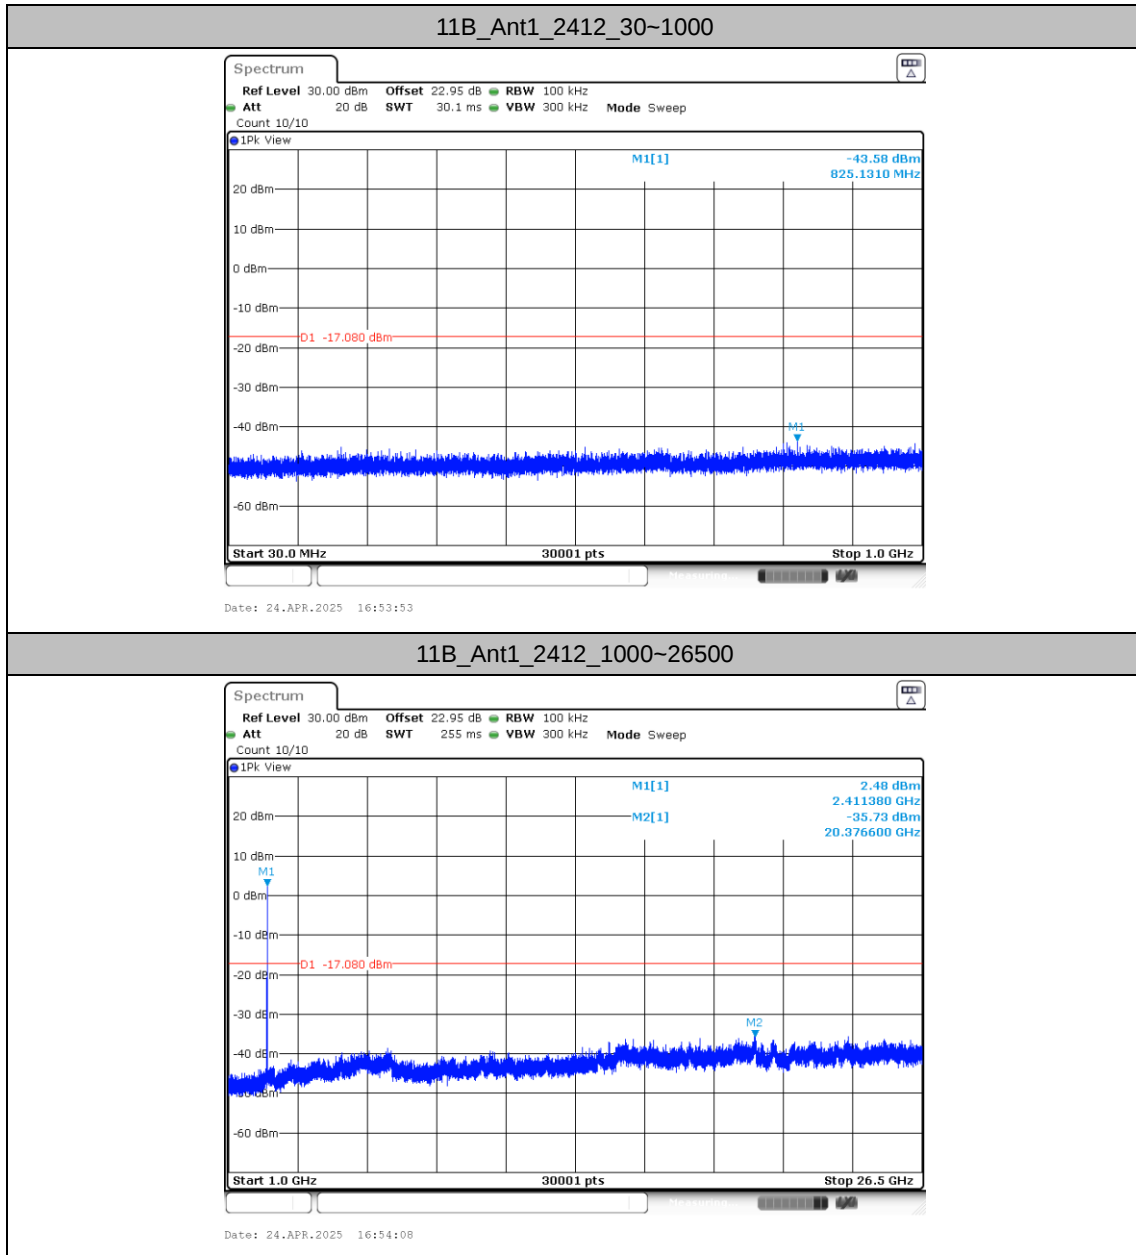


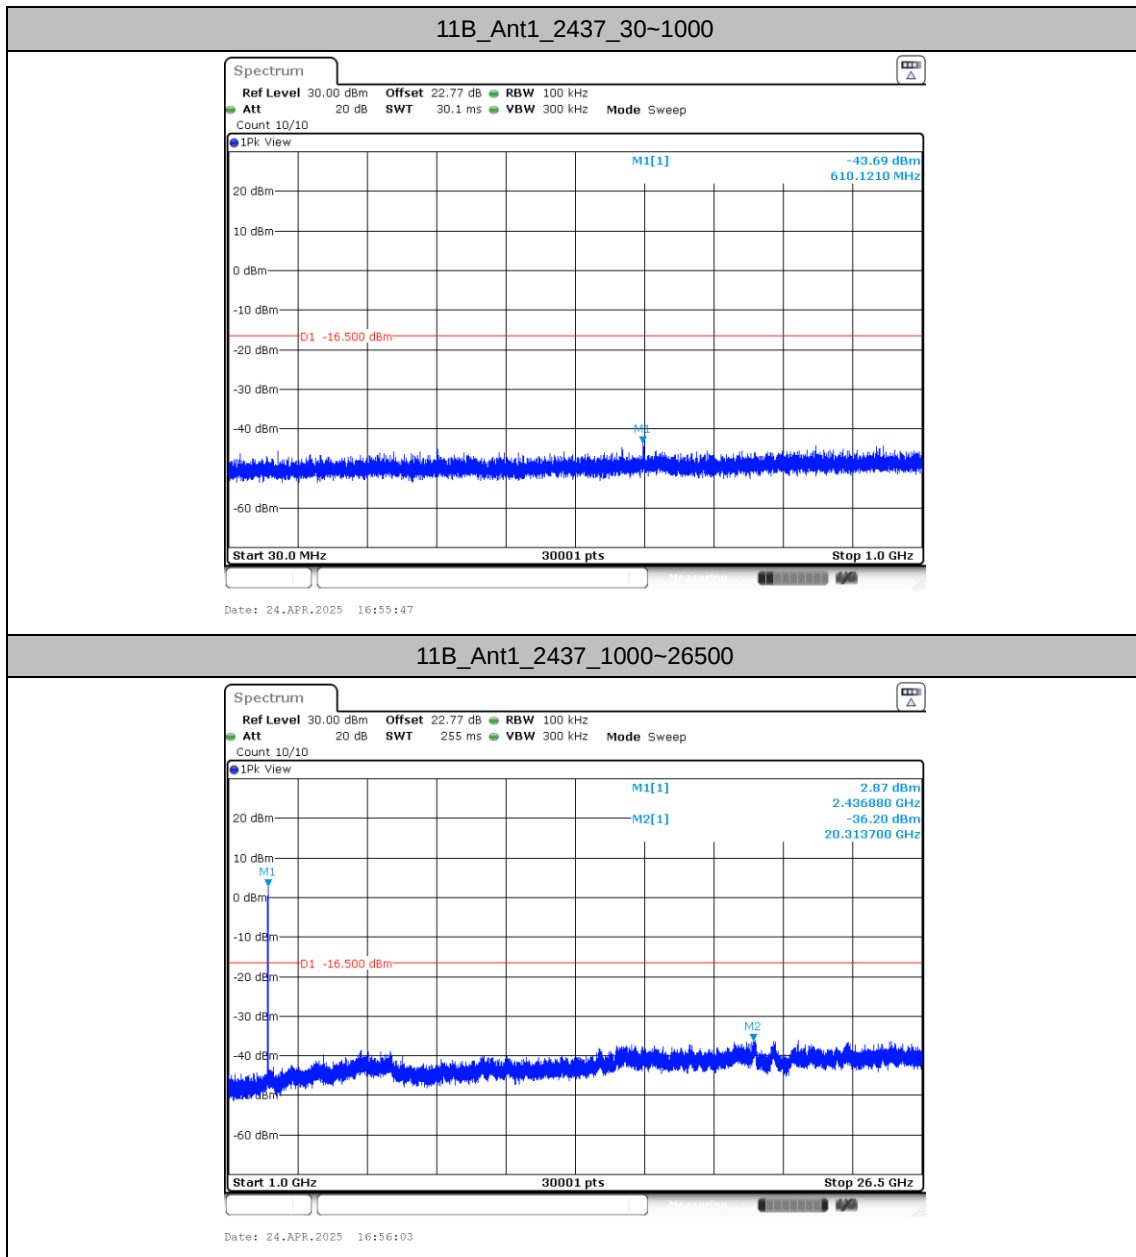


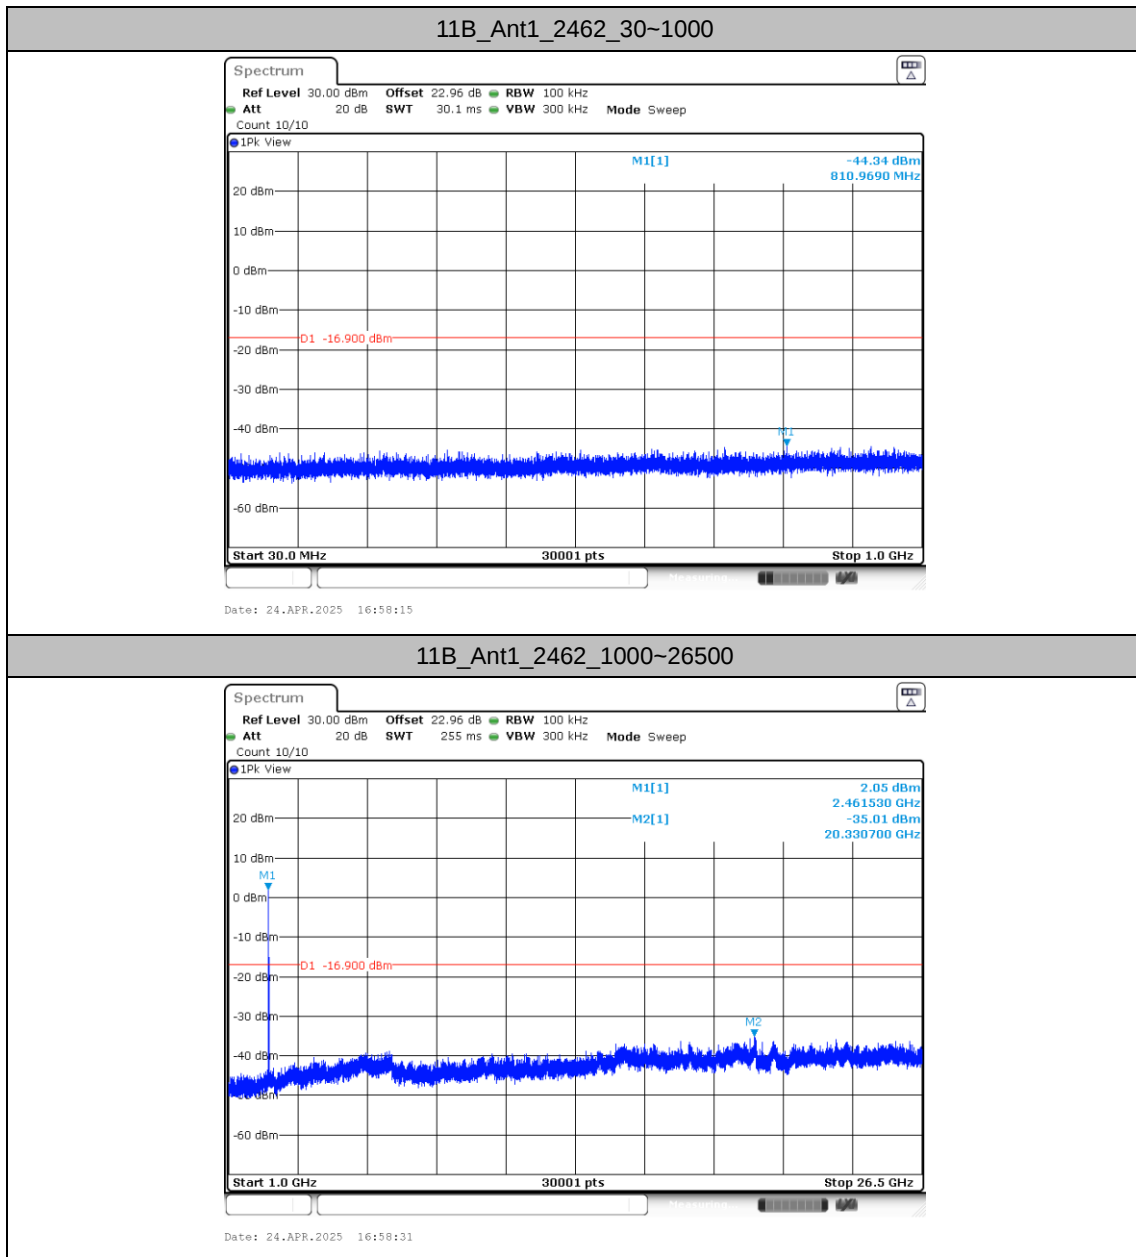


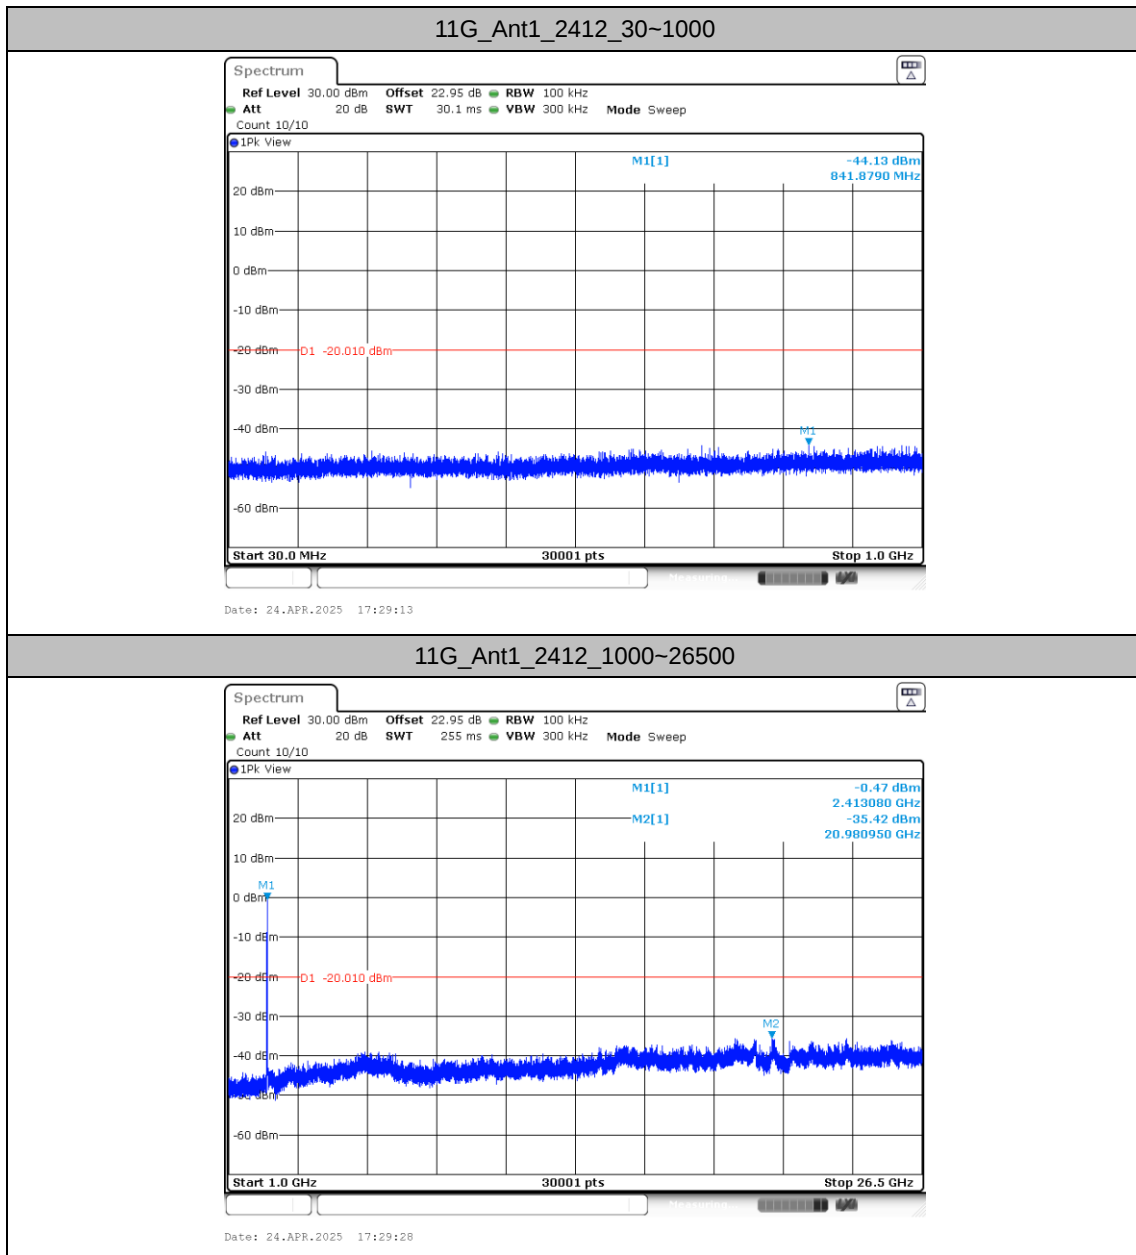


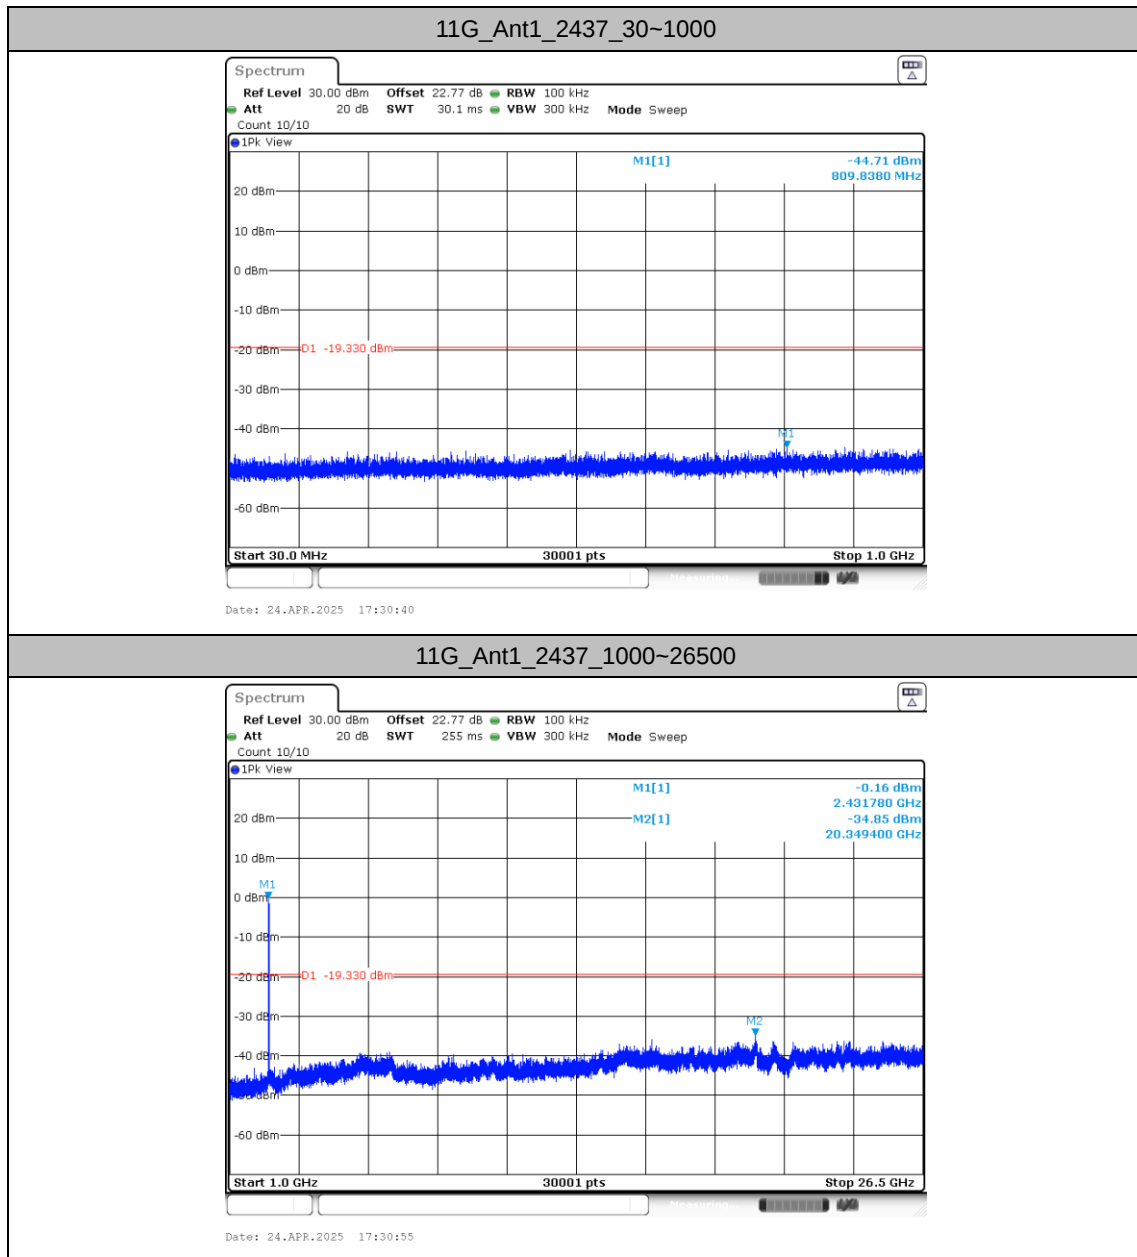

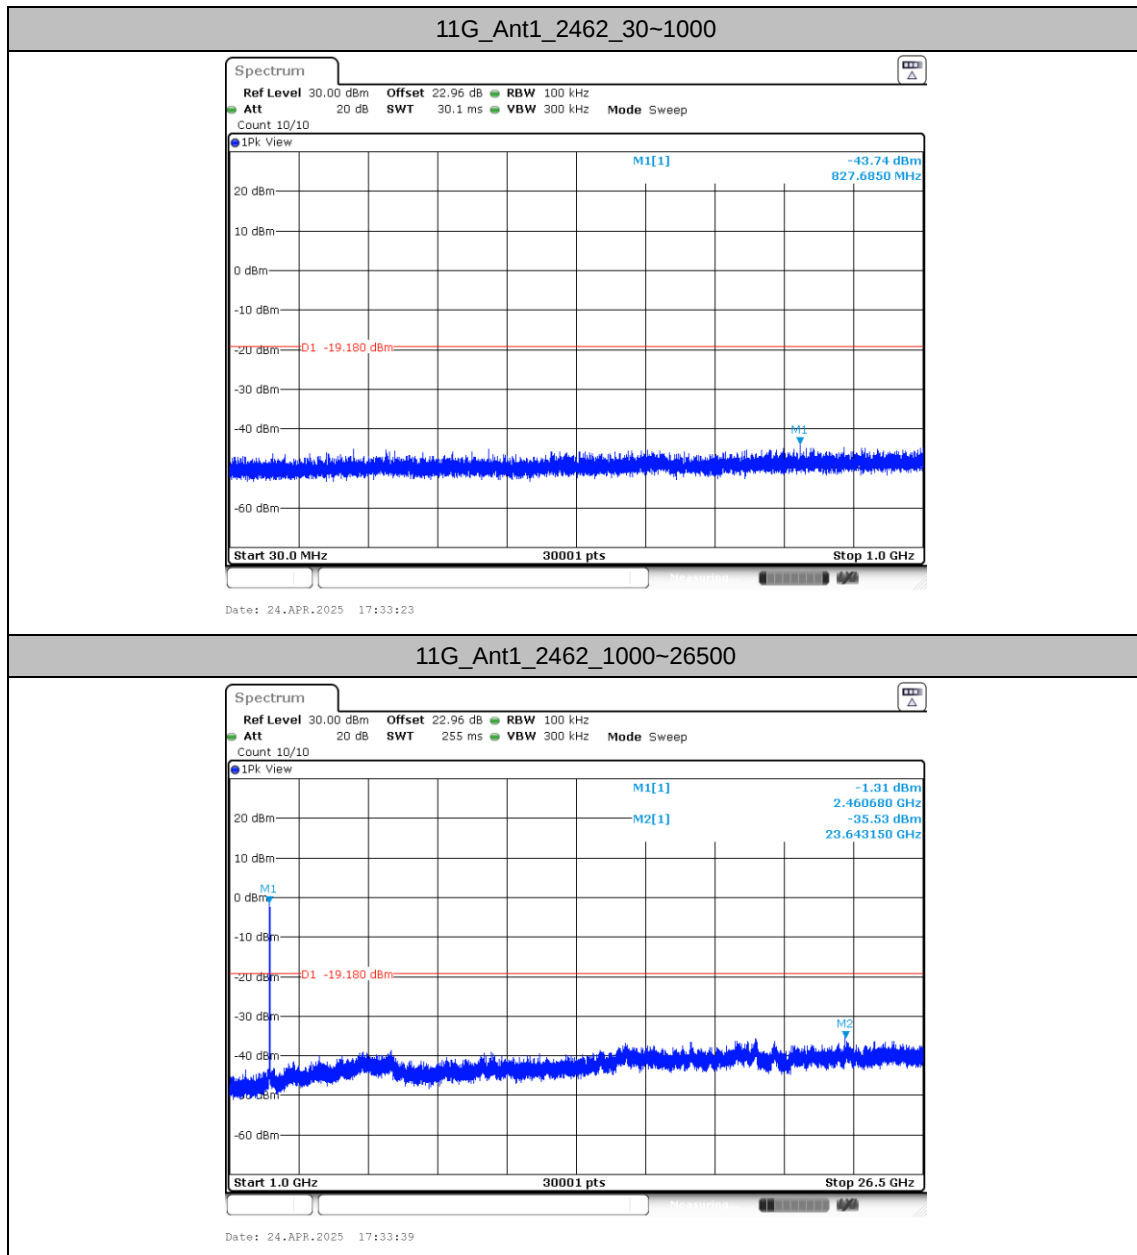

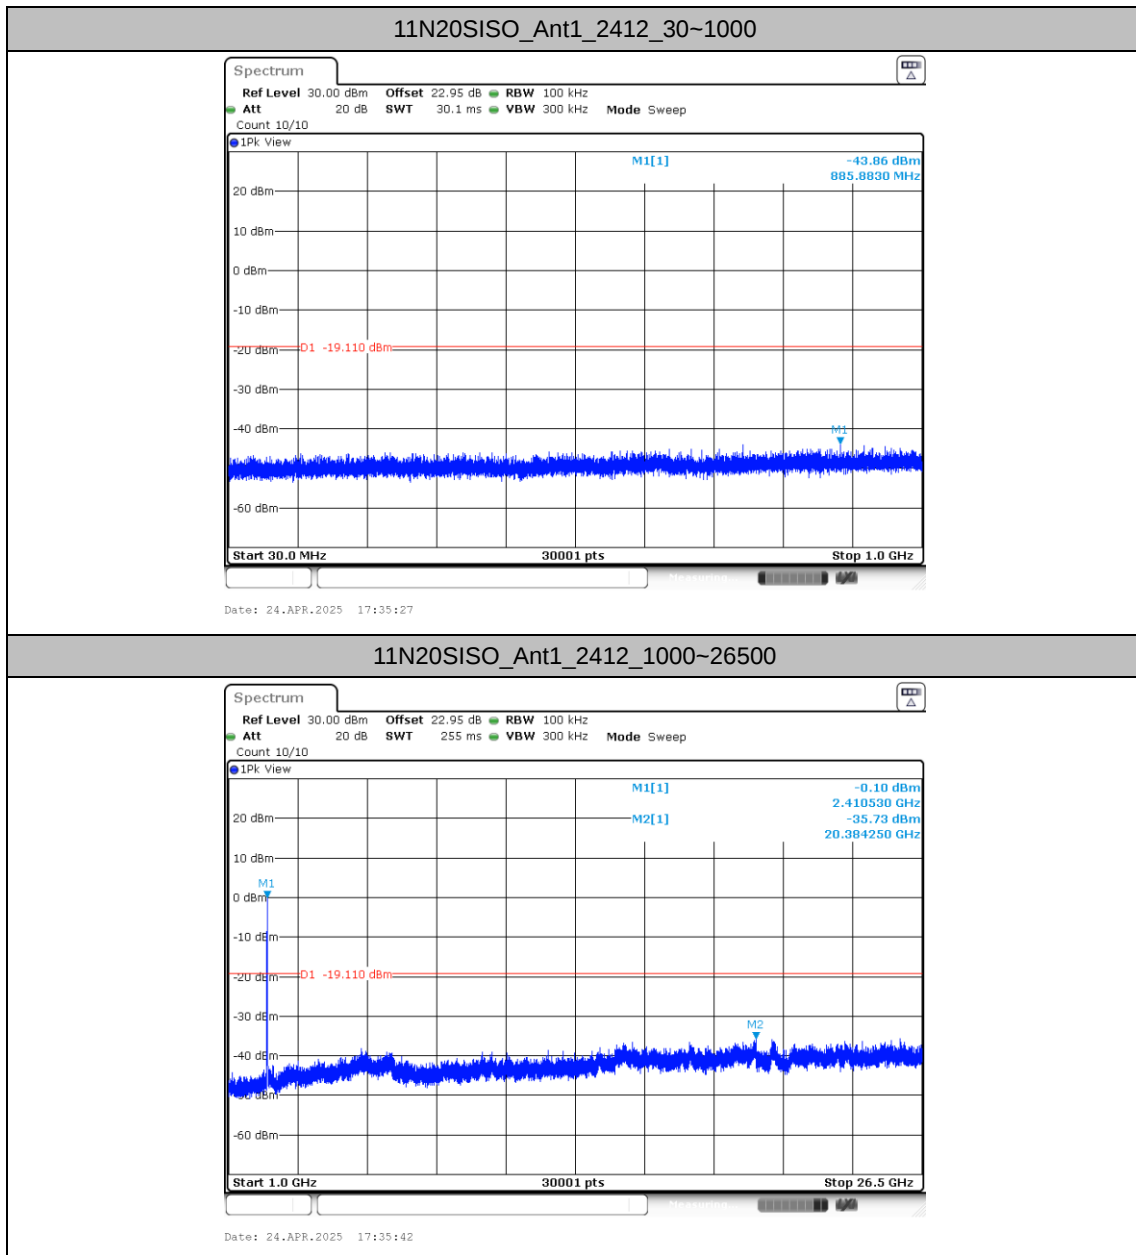

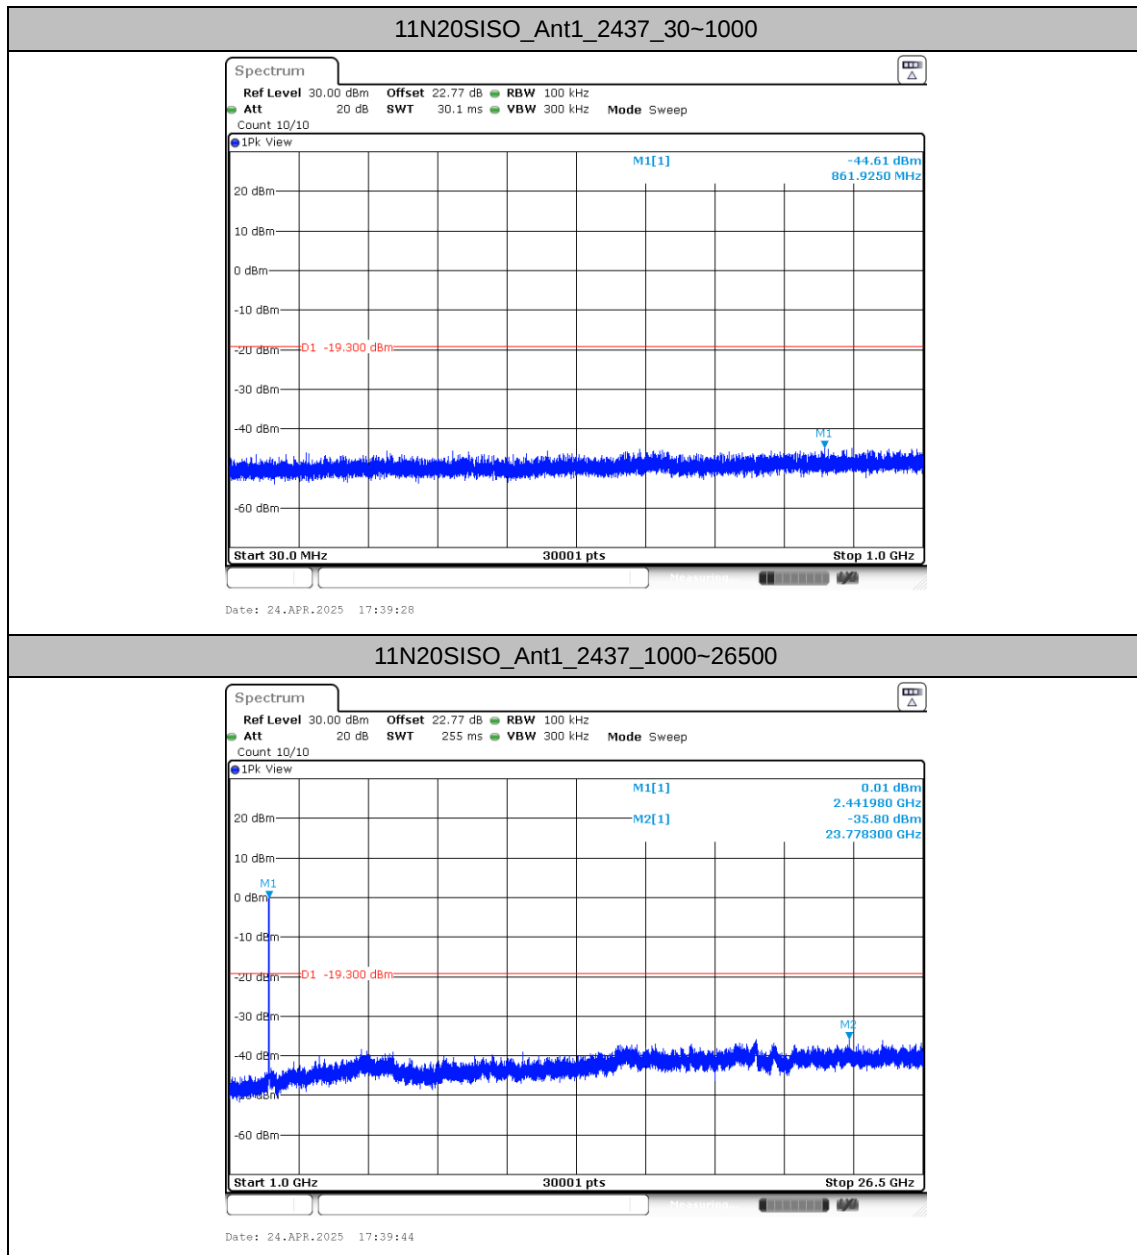


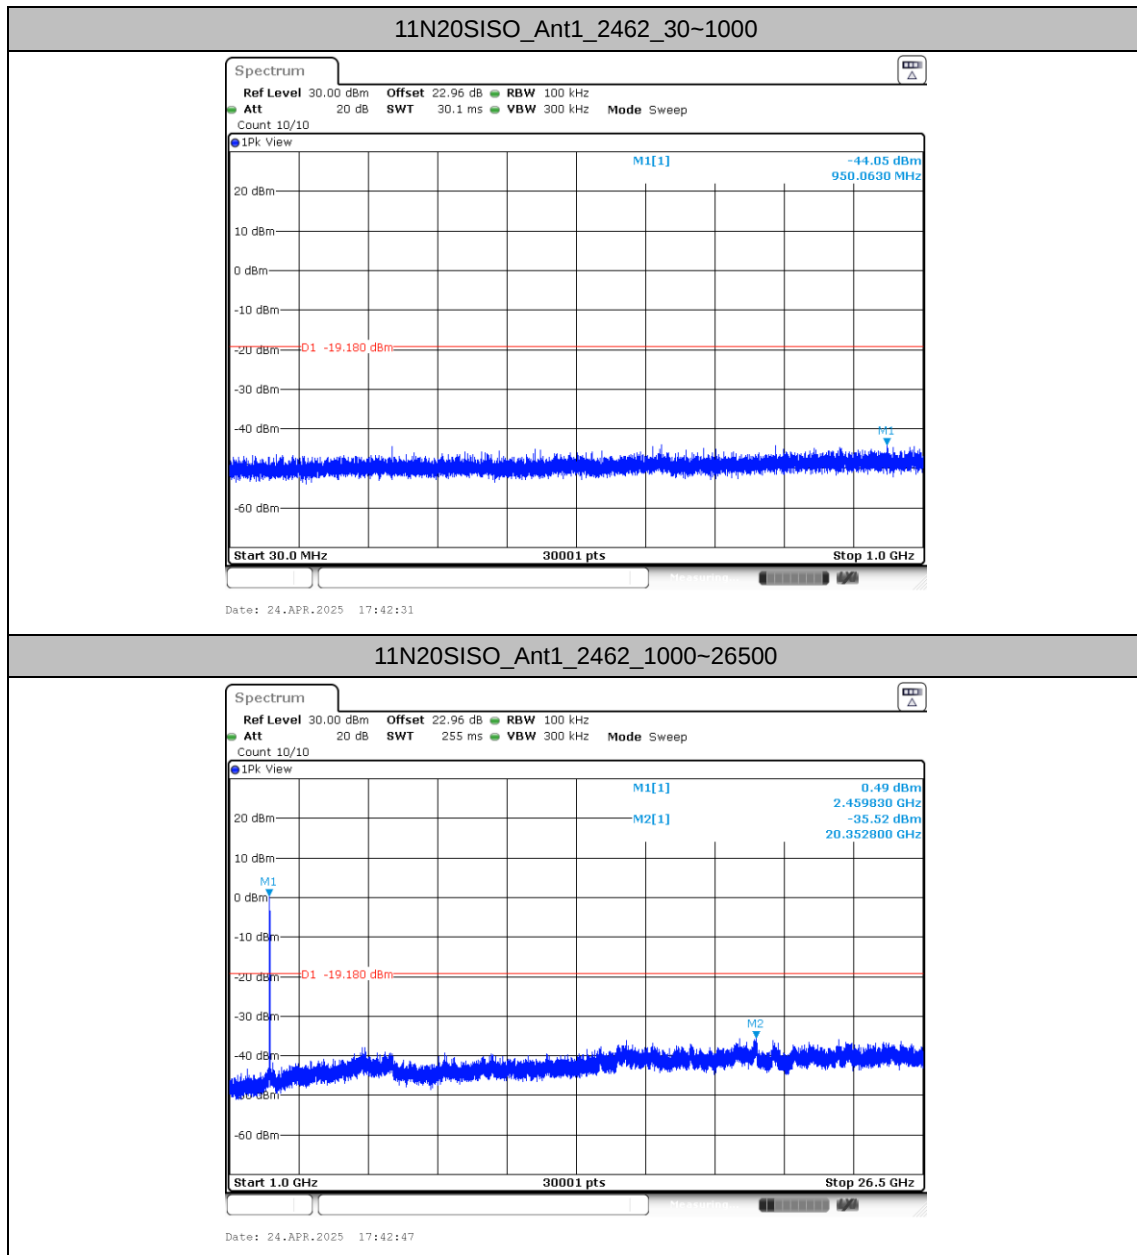



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

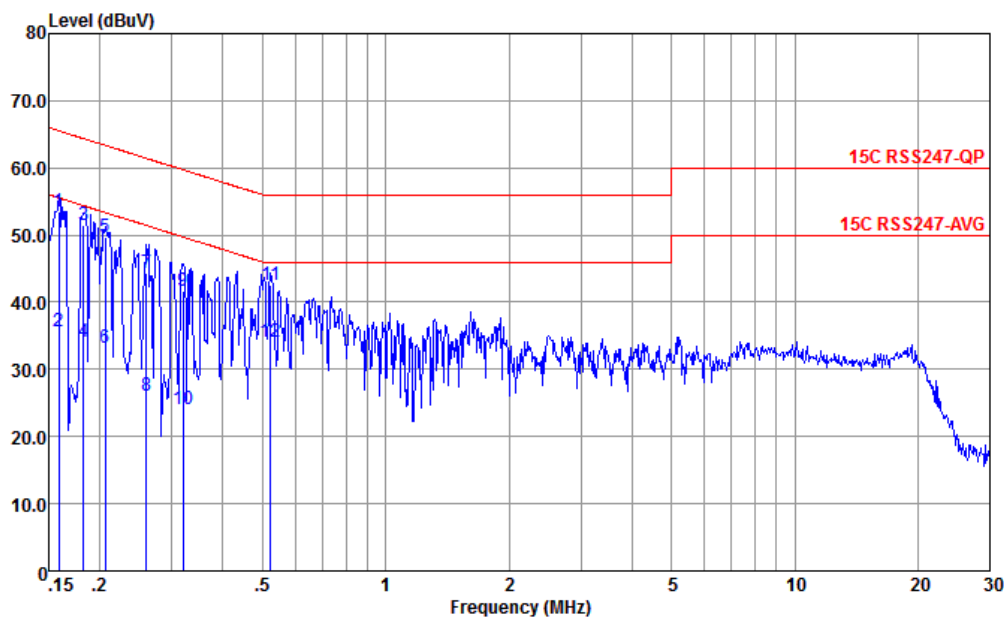


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.159	53.46	-12.06	65.52	42.90	0.11	10.45	QP
2	0.159	35.76	-19.76	55.52	25.20	0.11	10.45	Average
3	0.182	51.45	-12.92	64.37	40.90	0.09	10.46	QP
4	0.182	34.15	-20.22	54.37	23.60	0.09	10.46	Average
5	0.206	49.74	-13.62	63.36	39.20	0.08	10.46	QP
6	0.206	33.14	-20.22	53.36	22.60	0.08	10.46	Average
7	0.260	44.36	-17.06	61.42	33.80	0.09	10.47	QP
8	0.260	26.08	-25.34	51.42	15.52	0.09	10.47	Average
9	0.320	41.74	-17.97	59.71	31.20	0.06	10.48	QP
10	0.320	24.14	-25.57	49.71	13.60	0.06	10.48	Average
11	0.524	42.48	-13.52	56.00	32.20	-0.12	10.40	QP
12 *	0.524	34.18	-11.82	46.00	23.90	-0.12	10.40	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

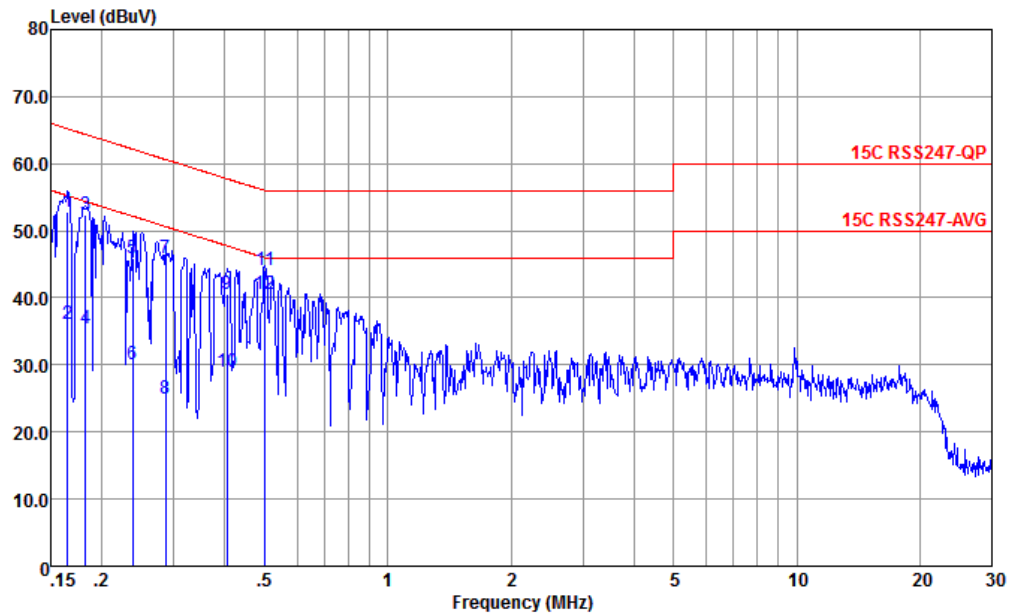

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.165	52.78	-12.43	65.21	42.21	0.12	10.45	QP
2	0.165	36.18	-19.03	55.21	25.61	0.12	10.45	Average
3	0.182	52.38	-11.99	64.37	41.79	0.13	10.46	QP
4	0.182	35.38	-18.99	54.37	24.79	0.13	10.46	Average
5	0.238	45.99	-16.18	62.17	35.50	0.02	10.47	QP
6	0.238	30.09	-22.08	52.17	19.60	0.02	10.47	Average
7	0.286	45.88	-14.75	60.63	35.49	-0.09	10.48	QP
8	0.286	24.98	-25.65	50.63	14.59	-0.09	10.48	Average
9	0.404	40.55	-17.22	57.77	30.20	-0.14	10.49	QP
10	0.404	28.95	-18.82	47.77	18.60	-0.14	10.49	Average
11	0.502	44.06	-11.94	56.00	33.80	-0.15	10.41	QP
12 *	0.502	40.46	-5.54	46.00	30.20	-0.15	10.41	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	41~42%
		Temperature :	22~23℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	SISO	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	SISO	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	SISO	802.11n HT20	11	2462	MCS0	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2389.95	39.36	54.00	-14.64	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	53.46	54.00	-0.54	V	Average	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	53.84	54.00	-0.16	V	AVERAGE	Pass	Harmonic
3	802.11b	11	2483.50	41.26	54.00	-12.74	H	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	53.80	54.00	-0.20	V	AVERAGE	Pass	Harmonic
4	802.11g	01	2389.95	49.36	54.00	-4.64	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	42.73	54.00	-11.27	V	AVERAGE	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	4875.00	48.81	74.00	-25.19	V	Peak	Pass	Harmonic
6	802.11g	11	2483.74	53.34	54.00	-0.66	H	AVERAGE	Pass	Band Edge
6	802.11g	11	4924.00	44.98	54.00	-9.02	V	AVERAGE	Pass	Harmonic
7	802.11n HT20	01	2389.69	53.50	54.00	-0.50	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	42.71	54.00	-11.29	V	AVERAGE	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	9748.50	45.26	70.47	-25.21	V	Peak	Pass	Harmonic
9	802.11n HT20	11	2483.50	53.33	54.00	-0.67	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	4924.00	43.21	54.00	-10.79	V	AVERAGE	Pass	Harmonic

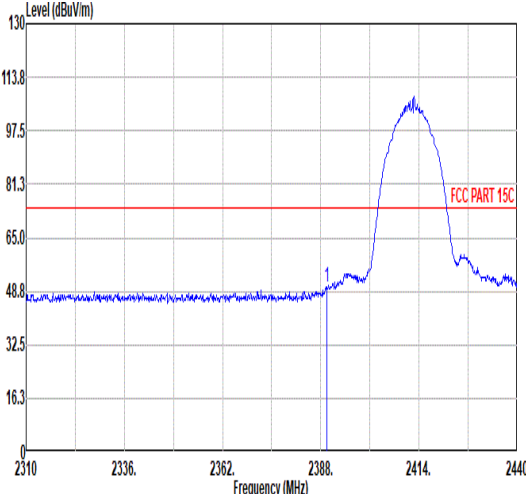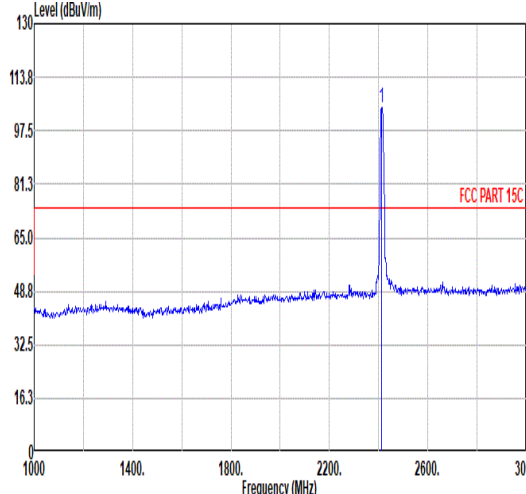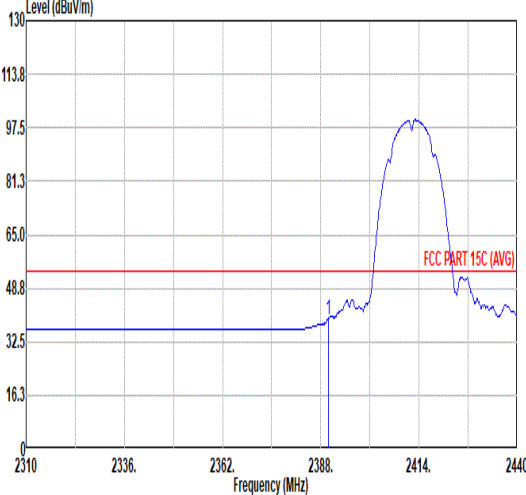
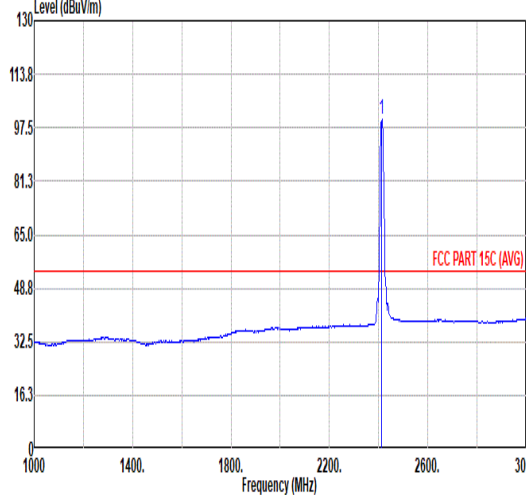


Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>50.13</td><td>74.00</td><td>-23.87</td><td>42.26</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>212 360 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	50.13	74.00	-23.87	42.26	31.94	7.16	37.23	6.00	212 360 PEAK	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.45</td><td>-----</td><td>-----</td><td>96.29</td><td>32.17</td><td>7.21</td><td>37.22</td><td>6.00</td><td>212 360 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.45	-----	-----	96.29	32.17	7.21	37.22	6.00	212 360 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.56	50.13	74.00	-23.87	42.26	31.94	7.16	37.23	6.00	212 360 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	104.45	-----	-----	96.29	32.17	7.21	37.22	6.00	212 360 PEAK																																																																																
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>39.36</td><td>54.00</td><td>-14.64</td><td>31.49</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>212 360 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	39.36	54.00	-14.64	31.49	31.94	7.16	37.23	6.00	212 360 AVERAGE	 <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.03</td><td>-----</td><td>-----</td><td>91.87</td><td>32.17</td><td>7.21</td><td>37.22</td><td>6.00</td><td>212 360 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.03	-----	-----	91.87	32.17	7.21	37.22	6.00	212 360 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	39.36	54.00	-14.64	31.49	31.94	7.16	37.23	6.00	212 360 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	100.03	-----	-----	91.87	32.17	7.21	37.22	6.00	212 360 AVERAGE																																																																																





Mode	1																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																		
ANT	SISO																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>49.80</td><td>74.00</td><td>-24.20</td><td>41.93</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>311 236 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.80	74.00	-24.20	41.93	31.94	7.16	37.23	6.00	311 236 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.45</td><td>-----</td><td>-----</td><td>92.29</td><td>32.17</td><td>7.21</td><td>37.22</td><td>6.00</td><td>311 236 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.45	-----	-----	92.29	32.17	7.21	37.22	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	49.80	74.00	-24.20	41.93	31.94	7.16	37.23	6.00	311 236 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	100.45	-----	-----	92.29	32.17	7.21	37.22	6.00	311 236 PEAK																																																																																									
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>38.15</td><td>54.00</td><td>-15.85</td><td>30.28</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>311 236 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	38.15	54.00	-15.85	30.28	31.94	7.16	37.23	6.00	311 236 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>95.59</td><td>-----</td><td>-----</td><td>87.47</td><td>32.14</td><td>7.20</td><td>37.22</td><td>6.00</td><td>311 236 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.59	-----	-----	87.47	32.14	7.20	37.22	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	38.15	54.00	-15.85	30.28	31.94	7.16	37.23	6.00	311 236 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	95.59	-----	-----	87.47	32.14	7.20	37.22	6.00	311 236 AVERAGE																																																																																									

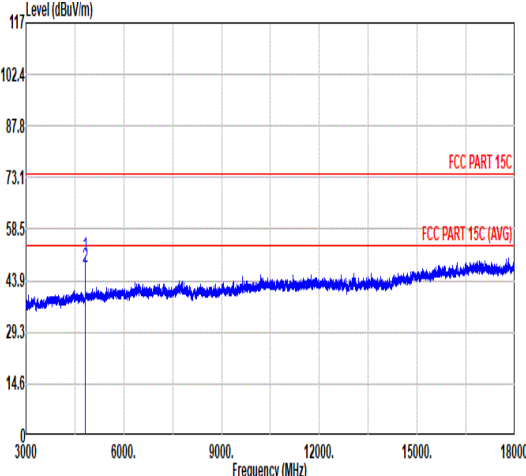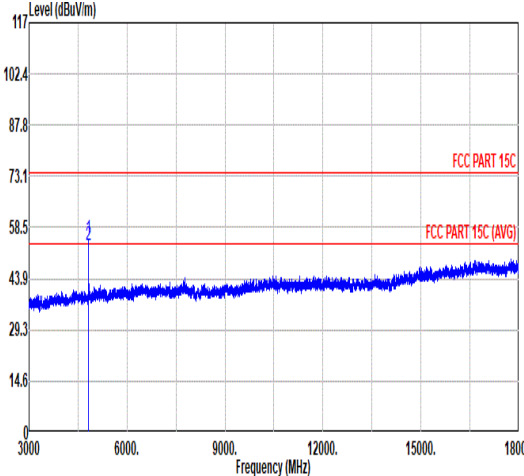

Mode	1																																																																			
	Harmonic																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																			
ANT	SISO																																																																			
Pol.	Horizontal						Vertical																																																													
Peak Avg																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>50.63</td><td>74.00</td><td>-23.37</td><td>70.04</td><td>34.40</td><td>10.29</td><td>64.10</td><td>0.00</td><td>367</td><td>6 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>47.59</td><td>54.00</td><td>-6.41</td><td>67.00</td><td>34.40</td><td>10.29</td><td>64.10</td><td>0.00</td><td>367</td><td>6 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	50.63	74.00	-23.37	70.04	34.40	10.29	64.10	0.00	367	6 PEAK	2	4824.00	47.59	54.00	-6.41	67.00	34.40	10.29	64.10	0.00	367	6 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4824.00	50.63	74.00	-23.37	70.04	34.40	10.29	64.10	0.00	367	6 PEAK																																																									
2	4824.00	47.59	54.00	-6.41	67.00	34.40	10.29	64.10	0.00	367	6 AVERAGE																																																									
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>74.65</td><td>34.40</td><td>10.29</td><td>64.10</td><td>0.00</td><td>304</td><td>214 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>53.46</td><td>54.00</td><td>-0.54</td><td>72.87</td><td>34.40</td><td>10.29</td><td>64.10</td><td>0.00</td><td>304</td><td>214 Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	55.24	74.00	-18.76	74.65	34.40	10.29	64.10	0.00	304	214 Peak	2	4824.00	53.46	54.00	-0.54	72.87	34.40	10.29	64.10	0.00	304	214 Average	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4824.00	55.24	74.00	-18.76	74.65	34.40	10.29	64.10	0.00	304	214 Peak																																																									
2	4824.00	53.46	54.00	-0.54	72.87	34.40	10.29	64.10	0.00	304	214 Average																																																									

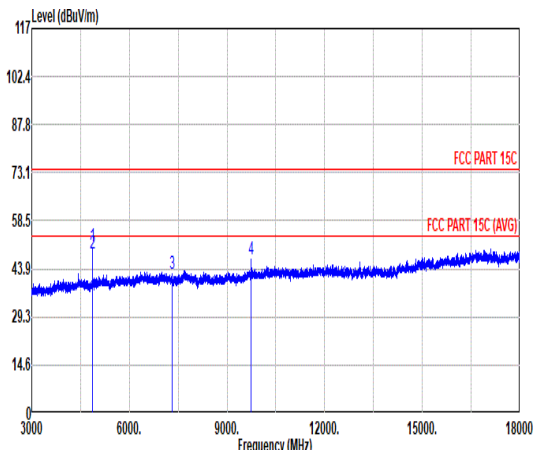
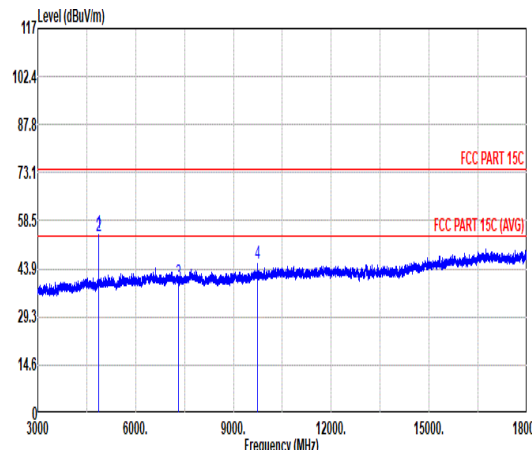


Mode	2																																																																																																																																																																																
	Harmonic																																																																																																																																																																																
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																
ANT	SISO																																																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																																																										
Peak Avg																																																																																																																																																																																	
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>50.85</td><td>74.00</td><td>-23.15</td><td>70.01</td><td>34.60</td><td>10.34</td><td>64.10</td><td>0.00</td><td>300</td><td>345 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>48.66</td><td>54.00</td><td>-5.34</td><td>67.82</td><td>34.60</td><td>10.34</td><td>64.10</td><td>0.00</td><td>300</td><td>345 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>42.23</td><td>74.00</td><td>-31.77</td><td>57.05</td><td>35.81</td><td>12.78</td><td>63.41</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>4</td><td>9748.50</td><td>46.75</td><td>71.31</td><td>-24.56</td><td>57.20</td><td>37.00</td><td>14.86</td><td>62.31</td><td>0.00</td><td>---</td><td>--- Peak</td></tr></table>								Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	50.85	74.00	-23.15	70.01	34.60	10.34	64.10	0.00	300	345 PEAK	2	4874.00	48.66	54.00	-5.34	67.82	34.60	10.34	64.10	0.00	300	345 AVERAGE	3	7311.00	42.23	74.00	-31.77	57.05	35.81	12.78	63.41	0.00	---	--- Peak	4	9748.50	46.75	71.31	-24.56	57.20	37.00	14.86	62.31	0.00	---	--- Peak	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>73.98</td><td>34.60</td><td>10.34</td><td>64.10</td><td>0.00</td><td>122</td><td>156 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>53.84</td><td>54.00</td><td>-0.16</td><td>73.00</td><td>34.60</td><td>10.34</td><td>64.10</td><td>0.00</td><td>122</td><td>156 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>39.59</td><td>74.00</td><td>-34.41</td><td>54.41</td><td>35.81</td><td>12.78</td><td>63.41</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>4</td><td>9748.50</td><td>45.68</td><td>81.98</td><td>-36.30</td><td>56.13</td><td>37.00</td><td>14.86</td><td>62.31</td><td>0.00</td><td>---</td><td>--- Peak</td></tr></table>								Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	54.82	74.00	-19.18	73.98	34.60	10.34	64.10	0.00	122	156 PEAK	2	4874.00	53.84	54.00	-0.16	73.00	34.60	10.34	64.10	0.00	122	156 AVERAGE	3	7311.00	39.59	74.00	-34.41	54.41	35.81	12.78	63.41	0.00	---	--- Peak	4	9748.50	45.68	81.98	-36.30	56.13	37.00	14.86	62.31	0.00	---
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	4874.00	50.85	74.00	-23.15	70.01	34.60	10.34	64.10	0.00	300	345 PEAK																																																																																																																																																																						
2	4874.00	48.66	54.00	-5.34	67.82	34.60	10.34	64.10	0.00	300	345 AVERAGE																																																																																																																																																																						
3	7311.00	42.23	74.00	-31.77	57.05	35.81	12.78	63.41	0.00	---	--- Peak																																																																																																																																																																						
4	9748.50	46.75	71.31	-24.56	57.20	37.00	14.86	62.31	0.00	---	--- Peak																																																																																																																																																																						
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	4874.00	54.82	74.00	-19.18	73.98	34.60	10.34	64.10	0.00	122	156 PEAK																																																																																																																																																																						
2	4874.00	53.84	54.00	-0.16	73.00	34.60	10.34	64.10	0.00	122	156 AVERAGE																																																																																																																																																																						
3	7311.00	39.59	74.00	-34.41	54.41	35.81	12.78	63.41	0.00	---	--- Peak																																																																																																																																																																						
4	9748.50	45.68	81.98	-36.30	56.13	37.00	14.86	62.31	0.00	---	--- Peak																																																																																																																																																																						







Mode	2	
	18G-25G	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	Level (dBuV/m) Frequency (MHz) FCC PART 15C FCC PART 15C (AVG) The plot shows a blue line representing the average signal level across the frequency range from 18000 to 25000 MHz. The y-axis ranges from 0 to 130 dBuV/m. Two red horizontal lines indicate the FCC Part 15C limits: one at approximately 75 dBuV/m and another at approximately 55 dBuV/m. The signal level is consistently below the lower limit.	Level (dBuV/m) Frequency (MHz) FCC PART 15C FCC PART 15C (AVG) The plot shows a blue line representing the average signal level across the frequency range from 18000 to 25000 MHz. The y-axis ranges from 0 to 130 dBuV/m. Two red horizontal lines indicate the FCC Part 15C limits: one at approximately 75 dBuV/m and another at approximately 55 dBuV/m. The signal level is consistently below the lower limit.



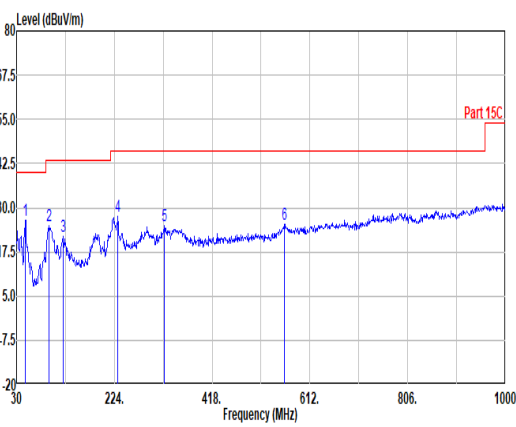
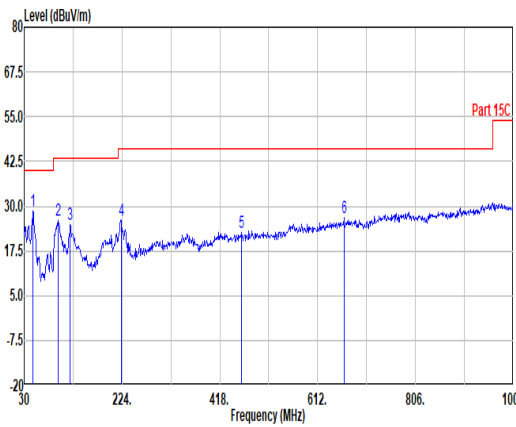


Mode	2																																																																																																																																																																																																																			
	30-1G																																																																																																																																																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																																																																			
ANT	SISO																																																																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																																																																		
Peak	 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal line with several peaks labeled 1 through 6. A red line labeled 'Part 15C' is also shown. The y-axis ranges from -20 to 80 dBuV/m, and the x-axis ranges from 30 to 1000 MHz. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>47.46</td><td>26.59</td><td>40.00</td><td>-13.41</td><td>42.91</td><td>15.77</td><td>0.82</td><td>32.91</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>94.99</td><td>24.80</td><td>43.50</td><td>-18.70</td><td>40.60</td><td>15.54</td><td>1.57</td><td>32.91</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>122.15</td><td>22.03</td><td>43.50</td><td>-21.47</td><td>35.45</td><td>17.69</td><td>1.79</td><td>32.90</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>230.79</td><td>27.69</td><td>46.00</td><td>-18.31</td><td>41.62</td><td>16.47</td><td>2.48</td><td>32.88</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>322.94</td><td>24.80</td><td>46.00</td><td>-21.20</td><td>35.06</td><td>19.73</td><td>2.96</td><td>32.95</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>560.59</td><td>25.34</td><td>46.00</td><td>-20.66</td><td>27.76</td><td>26.79</td><td>3.89</td><td>33.10</td><td>0.00</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	47.46	26.59	40.00	-13.41	42.91	15.77	0.82	32.91	0.00	---	Peak	2	94.99	24.80	43.50	-18.70	40.60	15.54	1.57	32.91	0.00	---	Peak	3	122.15	22.03	43.50	-21.47	35.45	17.69	1.79	32.90	0.00	---	Peak	4	230.79	27.69	46.00	-18.31	41.62	16.47	2.48	32.88	0.00	---	Peak	5	322.94	24.80	46.00	-21.20	35.06	19.73	2.96	32.95	0.00	---	Peak	6	560.59	25.34	46.00	-20.66	27.76	26.79	3.89	33.10	0.00	---	Peak	 Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal line with several peaks labeled 1 through 6. A red line labeled 'Part 15C' is also shown. The y-axis ranges from -20 to 80 dBuV/m, and the x-axis ranges from 30 to 1000 MHz. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>47.46</td><td>28.76</td><td>40.00</td><td>-11.24</td><td>45.08</td><td>15.77</td><td>0.82</td><td>32.91</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>96.93</td><td>25.86</td><td>43.50</td><td>-17.64</td><td>41.45</td><td>15.72</td><td>1.60</td><td>32.91</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>121.18</td><td>24.81</td><td>43.50</td><td>-18.69</td><td>38.29</td><td>17.63</td><td>1.79</td><td>32.90</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>222.06</td><td>26.03</td><td>46.00</td><td>-19.97</td><td>40.76</td><td>15.72</td><td>2.44</td><td>32.89</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>461.65</td><td>22.69</td><td>46.00</td><td>-23.31</td><td>28.59</td><td>23.58</td><td>3.54</td><td>33.02</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>664.38</td><td>26.71</td><td>46.00</td><td>-19.29</td><td>28.53</td><td>27.02</td><td>4.23</td><td>33.07</td><td>0.00</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	47.46	28.76	40.00	-11.24	45.08	15.77	0.82	32.91	0.00	---	Peak	2	96.93	25.86	43.50	-17.64	41.45	15.72	1.60	32.91	0.00	---	Peak	3	121.18	24.81	43.50	-18.69	38.29	17.63	1.79	32.90	0.00	---	Peak	4	222.06	26.03	46.00	-19.97	40.76	15.72	2.44	32.89	0.00	---	Peak	5	461.65	22.69	46.00	-23.31	28.59	23.58	3.54	33.02	0.00	---	Peak	6	664.38	26.71	46.00	-19.29	28.53	27.02	4.23	33.07	0.00	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																										
1	47.46	26.59	40.00	-13.41	42.91	15.77	0.82	32.91	0.00	---	Peak																																																																																																																																																																																																									
2	94.99	24.80	43.50	-18.70	40.60	15.54	1.57	32.91	0.00	---	Peak																																																																																																																																																																																																									
3	122.15	22.03	43.50	-21.47	35.45	17.69	1.79	32.90	0.00	---	Peak																																																																																																																																																																																																									
4	230.79	27.69	46.00	-18.31	41.62	16.47	2.48	32.88	0.00	---	Peak																																																																																																																																																																																																									
5	322.94	24.80	46.00	-21.20	35.06	19.73	2.96	32.95	0.00	---	Peak																																																																																																																																																																																																									
6	560.59	25.34	46.00	-20.66	27.76	26.79	3.89	33.10	0.00	---	Peak																																																																																																																																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																										
1	47.46	28.76	40.00	-11.24	45.08	15.77	0.82	32.91	0.00	---	Peak																																																																																																																																																																																																									
2	96.93	25.86	43.50	-17.64	41.45	15.72	1.60	32.91	0.00	---	Peak																																																																																																																																																																																																									
3	121.18	24.81	43.50	-18.69	38.29	17.63	1.79	32.90	0.00	---	Peak																																																																																																																																																																																																									
4	222.06	26.03	46.00	-19.97	40.76	15.72	2.44	32.89	0.00	---	Peak																																																																																																																																																																																																									
5	461.65	22.69	46.00	-23.31	28.59	23.58	3.54	33.02	0.00	---	Peak																																																																																																																																																																																																									
6	664.38	26.71	46.00	-19.29	28.53	27.02	4.23	33.07	0.00	---	Peak																																																																																																																																																																																																									

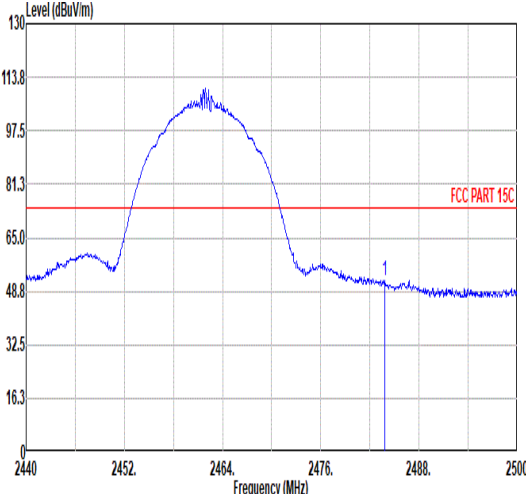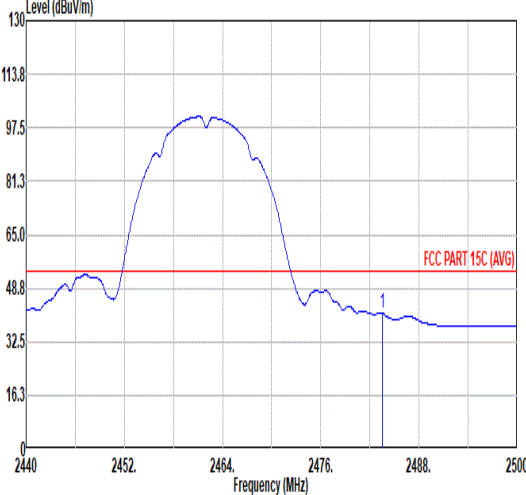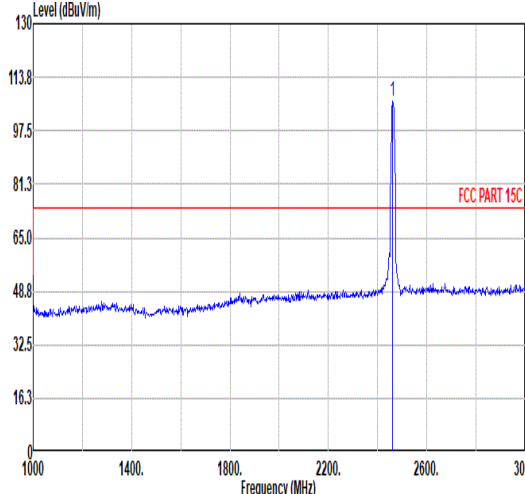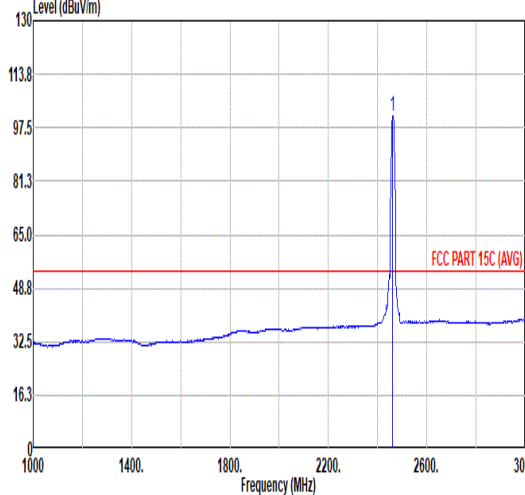

Mode	3																																																							
	Band Edge																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																							
ANT	SISO																																																							
Pol.	Horizontal																																																							
Peak	Fundamental																																																							
																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.86</td><td>52.11</td><td>74.00</td><td>-21.89</td><td>43.38</td><td>32.60</td><td>7.33</td><td>37.20</td><td>6.00</td><td>175</td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.86	52.11	74.00	-21.89	43.38	32.60	7.33	37.20	6.00	175	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.86	52.11	74.00	-21.89	43.38	32.60	7.33	37.20	6.00	175	0 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>32.53</td><td>32.60</td><td>7.33</td><td>37.20</td><td>6.00</td><td>175</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	41.26	54.00	-12.74	32.53	32.60	7.33	37.20	6.00	175	0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.50	41.26	54.00	-12.74	32.53	32.60	7.33	37.20	6.00	175	0 AVERAGE																																													
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.42</td><td>-----</td><td>-----</td><td>97.74</td><td>32.60</td><td>7.29</td><td>37.21</td><td>6.00</td><td>175</td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.42	-----	-----	97.74	32.60	7.29	37.21	6.00	175	0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2462.00	106.42	-----	-----	97.74	32.60	7.29	37.21	6.00	175	0 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.07</td><td>-----</td><td>-----</td><td>92.39</td><td>32.60</td><td>7.29</td><td>37.21</td><td>6.00</td><td>175</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.07	-----	-----	92.39	32.60	7.29	37.21	6.00	175	0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2462.00	101.07	-----	-----	92.39	32.60	7.29	37.21	6.00	175	0 AVERAGE																																													

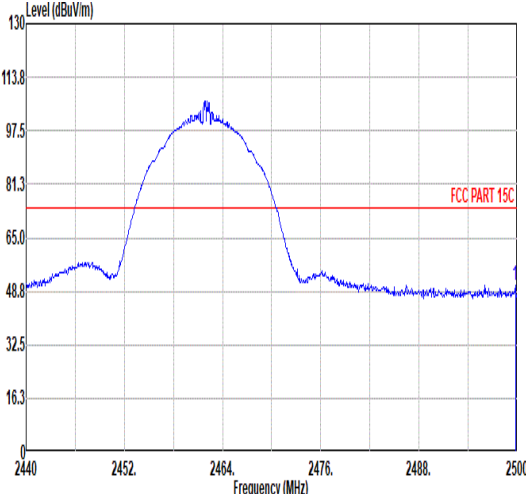
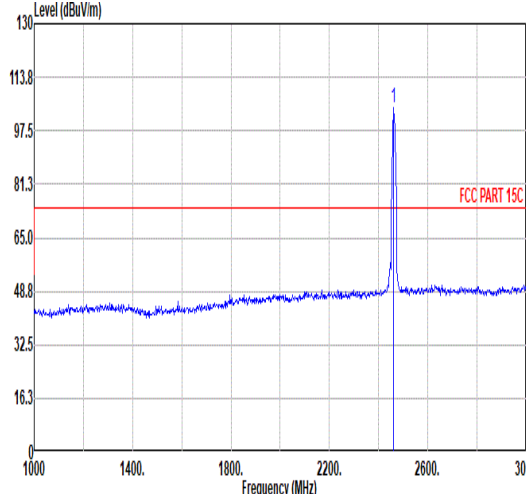
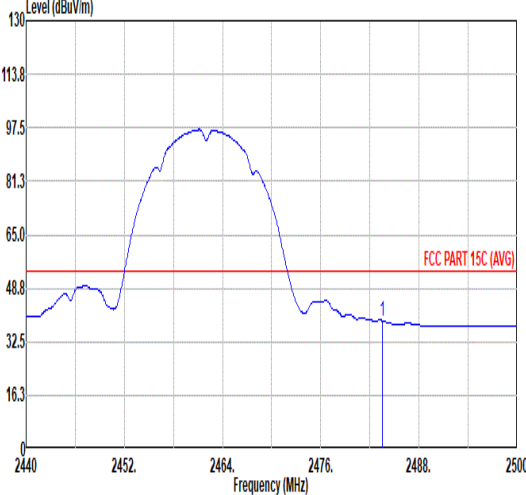
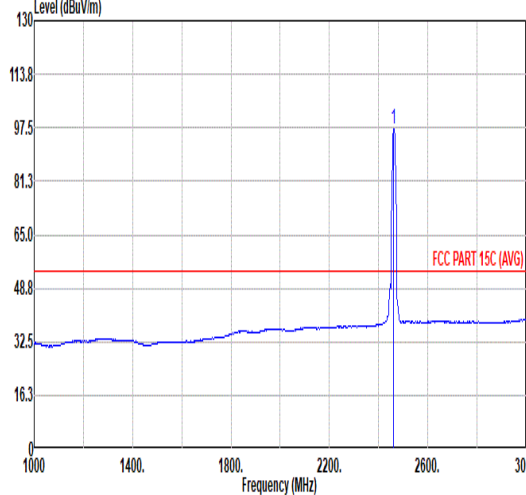


Mode	3																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.76</td><td>50.72</td><td>74.00</td><td>-23.28</td><td>41.96</td><td>32.60</td><td>7.36</td><td>37.20</td><td>6.00</td><td>343 258 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.76	50.72	74.00	-23.28	41.96	32.60	7.36	37.20	6.00	343 258 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.33</td><td>-----</td><td>-----</td><td>95.65</td><td>32.60</td><td>7.29</td><td>37.21</td><td>6.00</td><td>343 258 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.33	-----	-----	95.65	32.60	7.29	37.21	6.00	343 258 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2499.76	50.72	74.00	-23.28	41.96	32.60	7.36	37.20	6.00	343 258 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	104.33	-----	-----	95.65	32.60	7.29	37.21	6.00	343 258 PEAK																																																																																										
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>38.94</td><td>54.00</td><td>-15.06</td><td>30.21</td><td>32.60</td><td>7.33</td><td>37.20</td><td>6.00</td><td>343 258 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	38.94	54.00	-15.06	30.21	32.60	7.33	37.20	6.00	343 258 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.01</td><td>-----</td><td>-----</td><td>88.32</td><td>32.60</td><td>7.30</td><td>37.21</td><td>6.00</td><td>343 258 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.01	-----	-----	88.32	32.60	7.30	37.21	6.00	343 258 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.50	38.94	54.00	-15.06	30.21	32.60	7.33	37.20	6.00	343 258 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	97.01	-----	-----	88.32	32.60	7.30	37.21	6.00	343 258 AVERAGE																																																																																										







Mode	3																																																																																																																						
	Harmonic																																																																																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																						
ANT	SISO																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																
Peak Avg																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.53</td><td>74.00</td><td>-31.47</td><td>63.83</td><td>33.90</td><td>10.35</td><td>65.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	42.53	74.00	-31.47	63.83	33.90	10.35	65.55	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>53.80</td><td>54.00</td><td>-0.20</td><td>75.10</td><td>33.90</td><td>10.35</td><td>65.55</td><td>0.00</td><td>294</td><td>208</td><td>AVERAGE</td></tr><tr><td>3</td><td>13666.00</td><td>48.52</td><td>80.44</td><td>-31.92</td><td>56.93</td><td>38.83</td><td>17.81</td><td>65.05</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	53.80	54.00	-0.20	75.10	33.90	10.35	65.55	0.00	294	208	AVERAGE	3	13666.00	48.52	80.44	-31.92	56.93	38.83	17.81	65.05	0.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	4924.00	42.53	74.00	-31.47	63.83	33.90	10.35	65.55	0.00	---	---	PEAK																																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	4924.00	53.80	54.00	-0.20	75.10	33.90	10.35	65.55	0.00	294	208	AVERAGE																																																																																																											
3	13666.00	48.52	80.44	-31.92	56.93	38.83	17.81	65.05	0.00	---	---	Peak																																																																																																											

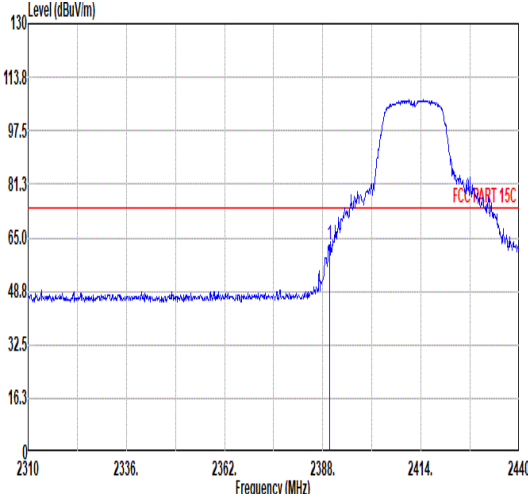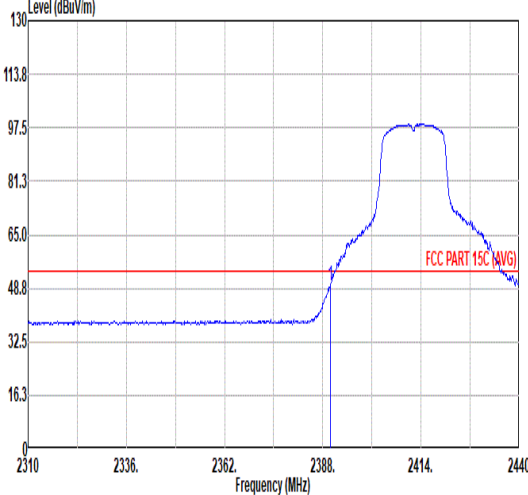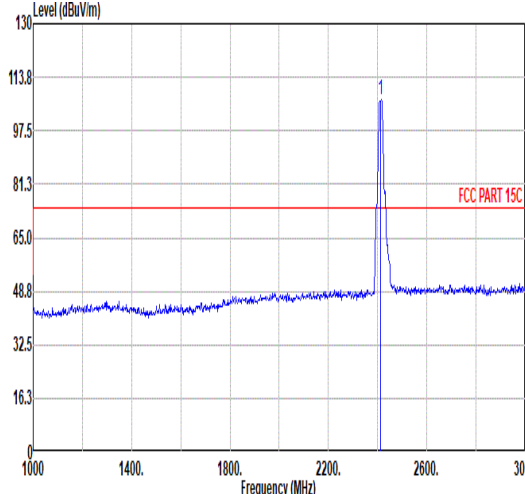
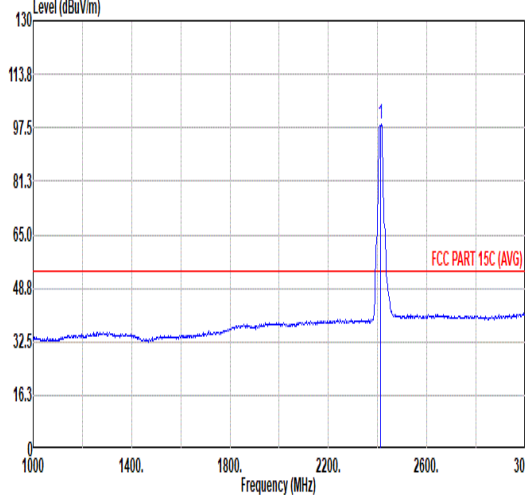


Mode	4																																																							
	Band Edge																																																							
	2400-2483.5_802.11g_CH01_2412MHz																																																							
ANT	SISO																																																							
Pol.	Horizontal																																																							
Peak	Fundamental																																																							
																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>62.78</td><td>74.00</td><td>-11.22</td><td>54.91</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>183</td><td>182 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	62.78	74.00	-11.22	54.91	31.94	7.16	37.23	6.00	183	182 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.82	62.78	74.00	-11.22	54.91	31.94	7.16	37.23	6.00	183	182 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>49.36</td><td>54.00</td><td>-4.64</td><td>41.49</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>183</td><td>182 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.36	54.00	-4.64	41.49	31.94	7.16	37.23	6.00	183	182 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.95	49.36	54.00	-4.64	41.49	31.94	7.16	37.23	6.00	183	182 AVERAGE																																													
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>107.07</td><td>-----</td><td>-----</td><td>98.91</td><td>32.17</td><td>7.21</td><td>37.22</td><td>6.00</td><td>183</td><td>182 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.07	-----	-----	98.91	32.17	7.21	37.22	6.00	183	182 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2412.00	107.07	-----	-----	98.91	32.17	7.21	37.22	6.00	183	182 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.37</td><td>-----</td><td>-----</td><td>90.21</td><td>32.17</td><td>7.21</td><td>37.22</td><td>6.00</td><td>183</td><td>182 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.37	-----	-----	90.21	32.17	7.21	37.22	6.00	183	182 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2412.00	98.37	-----	-----	90.21	32.17	7.21	37.22	6.00	183	182 AVERAGE																																													

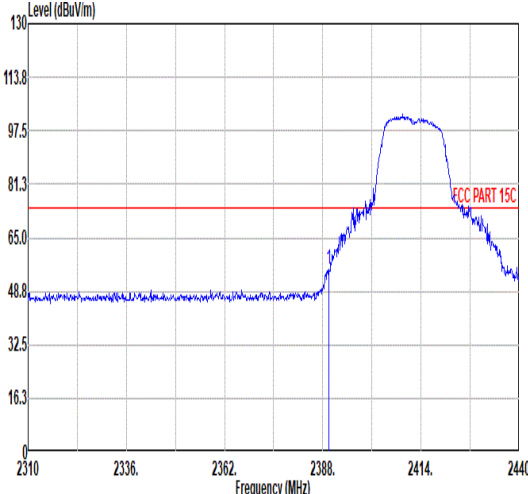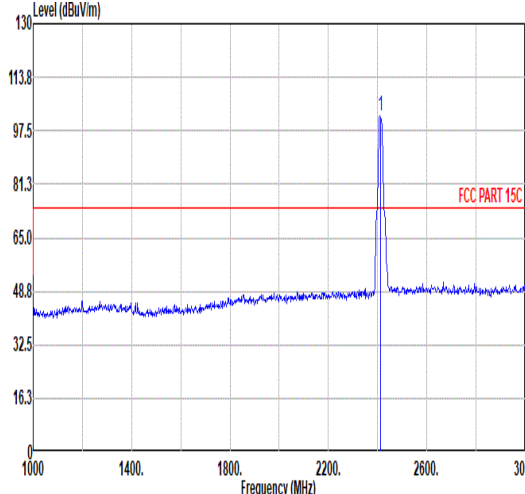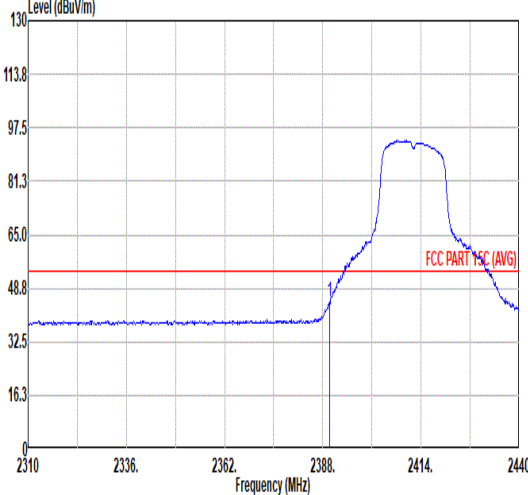
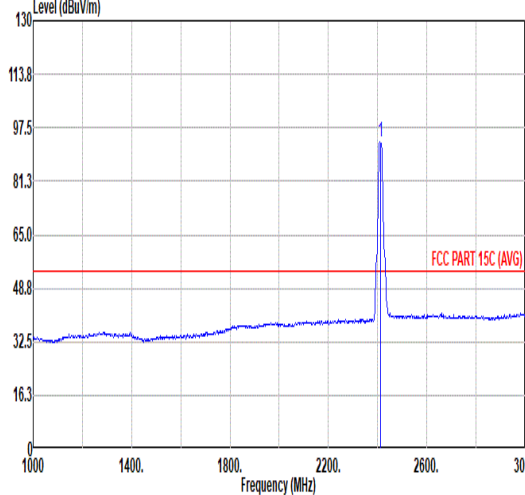


Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>47.77</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>310</td><td>254 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	55.64	74.00	-18.36	47.77	31.94	7.16	37.23	6.00	310	254 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.88</td><td>-----</td><td>-----</td><td>93.81</td><td>32.10</td><td>7.19</td><td>37.22</td><td>6.00</td><td>310</td><td>254 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.88	-----	-----	93.81	32.10	7.19	37.22	6.00	310
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.69	55.64	74.00	-18.36	47.77	31.94	7.16	37.23	6.00	310	254 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	101.88	-----	-----	93.81	32.10	7.19	37.22	6.00	310	254 PEAK																																																																																									
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>44.62</td><td>54.00</td><td>-9.38</td><td>36.75</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>310</td><td>254 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	44.62	54.00	-9.38	36.75	31.94	7.16	37.23	6.00	310	254 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.44</td><td>-----</td><td>-----</td><td>85.37</td><td>32.10</td><td>7.19</td><td>37.22</td><td>6.00</td><td>310</td><td>254 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.44	-----	-----	85.37	32.10	7.19	37.22	6.00	310
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.82	44.62	54.00	-9.38	36.75	31.94	7.16	37.23	6.00	310	254 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	93.44	-----	-----	85.37	32.10	7.19	37.22	6.00	310	254 AVERAGE																																																																																									



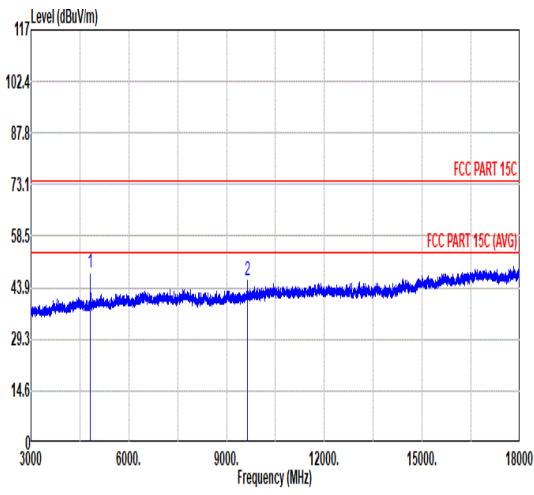
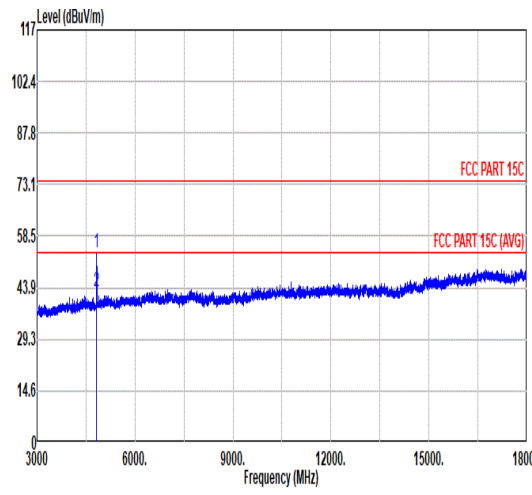


Mode	4																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																													
ANT	SISO																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>47.96</td><td>74.00</td><td>-26.04</td><td>67.37</td><td>34.40</td><td>10.29</td><td>64.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>9648.00</td><td>46.07</td><td>79.74</td><td>-33.67</td><td>56.96</td><td>36.70</td><td>14.81</td><td>62.40</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	47.96	74.00	-26.04	67.37	34.40	10.29	64.10	0.00	---	---	PEAK	2	9648.00	46.07	79.74	-33.67	56.96	36.70	14.81	62.40	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>53.90</td><td>74.00</td><td>-20.10</td><td>73.31</td><td>34.40</td><td>10.29</td><td>64.10</td><td>0.00</td><td>100</td><td>238</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>42.73</td><td>54.00</td><td>-11.27</td><td>62.15</td><td>34.39</td><td>10.29</td><td>64.10</td><td>0.00</td><td>100</td><td>238</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	53.90	74.00	-20.10	73.31	34.40	10.29	64.10	0.00	100	238	PEAK	2	4824.00	42.73	54.00	-11.27	62.15	34.39	10.29	64.10	0.00	100	238	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4824.00	47.96	74.00	-26.04	67.37	34.40	10.29	64.10	0.00	---	---	PEAK																																																																																																																		
2	9648.00	46.07	79.74	-33.67	56.96	36.70	14.81	62.40	0.00	---	---	Peak																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4824.00	53.90	74.00	-20.10	73.31	34.40	10.29	64.10	0.00	100	238	PEAK																																																																																																																		
2	4824.00	42.73	54.00	-11.27	62.15	34.39	10.29	64.10	0.00	100	238	AVERAGE																																																																																																																		



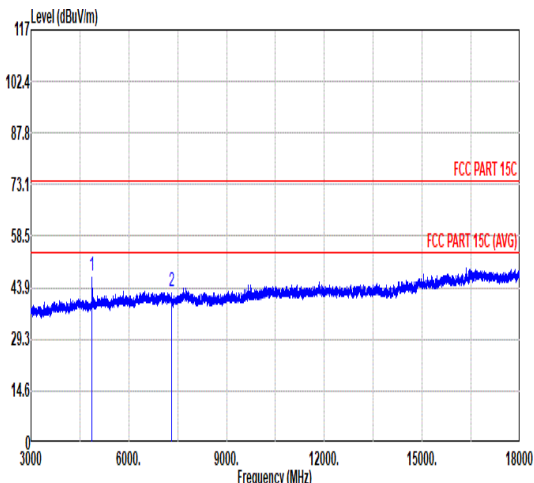
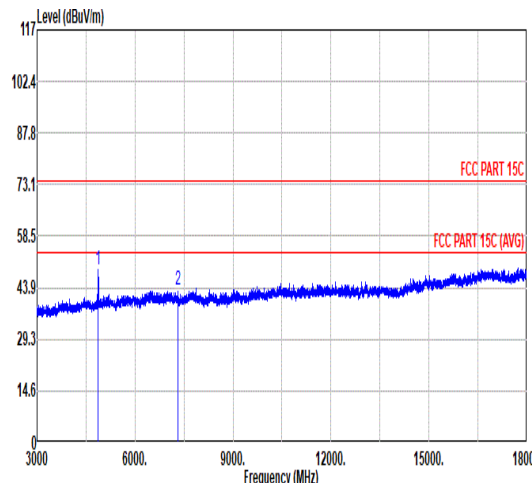


Mode	5																																																																	
	Harmonic																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																	
ANT	SISO																																																																	
Pol.	Horizontal																																																																	
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>47.40</td><td>74.00</td><td>-26.60</td><td>66.56</td><td>34.60</td><td>10.34</td><td>64.10</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.04</td><td>74.00</td><td>-30.96</td><td>57.86</td><td>35.81</td><td>12.78</td><td>63.41</td><td>0.00</td><td>--- PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	47.40	74.00	-26.60	66.56	34.60	10.34	64.10	0.00	--- PEAK	2	7311.00	43.04	74.00	-30.96	57.86	35.81	12.78	63.41	0.00	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																								
1	4874.00	47.40	74.00	-26.60	66.56	34.60	10.34	64.10	0.00	--- PEAK																																																								
2	7311.00	43.04	74.00	-30.96	57.86	35.81	12.78	63.41	0.00	--- PEAK																																																								
	Vertical																																																																	
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4875.00</td><td>48.81</td><td>74.00</td><td>-25.19</td><td>67.96</td><td>34.60</td><td>10.35</td><td>64.10</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>43.08</td><td>74.00</td><td>-30.92</td><td>57.90</td><td>35.81</td><td>12.78</td><td>63.41</td><td>0.00</td><td>--- PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4875.00	48.81	74.00	-25.19	67.96	34.60	10.35	64.10	0.00	--- Peak	2	7311.00	43.08	74.00	-30.92	57.90	35.81	12.78	63.41	0.00	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																								
1	4875.00	48.81	74.00	-25.19	67.96	34.60	10.35	64.10	0.00	--- Peak																																																								
2	7311.00	43.08	74.00	-30.92	57.90	35.81	12.78	63.41	0.00	--- PEAK																																																								

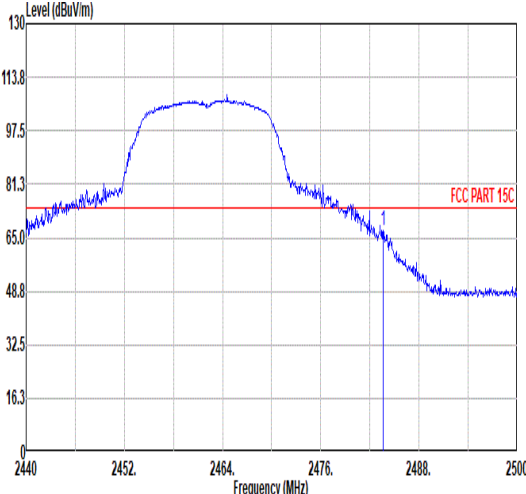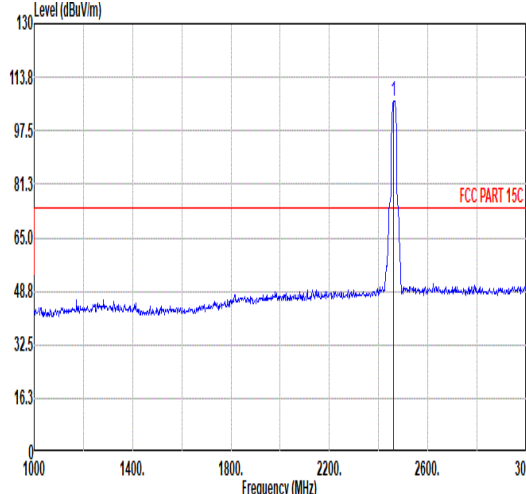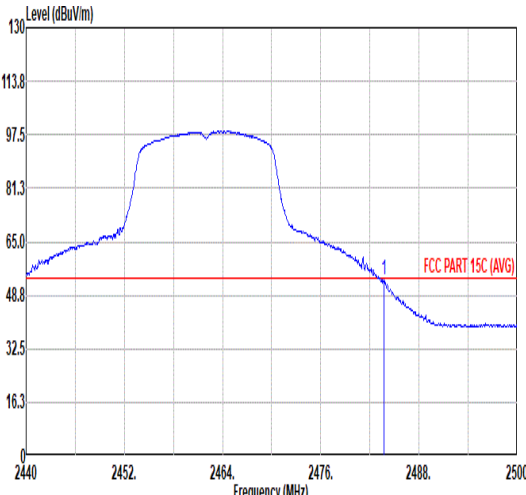
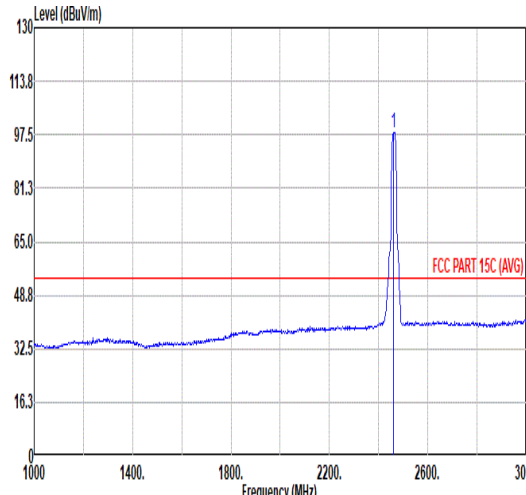


Mode	6																																																																	
	Band Edge																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																	
ANT	SISO																																																																	
Pol.	Horizontal																																																																	
Peak																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>67.20</td><td>74.00</td><td>-6.80</td><td>58.47</td><td>32.60</td><td>7.33</td><td>37.20</td><td>6.00</td><td>177</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	67.20	74.00	-6.80	58.47	32.60	7.33	37.20	6.00	177											0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2483.62	67.20	74.00	-6.80	58.47	32.60	7.33	37.20	6.00	177																																																								
										0 PEAK																																																								
Fundamental																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.69</td><td>-----</td><td>-----</td><td>98.01</td><td>32.60</td><td>7.29</td><td>37.21</td><td>6.00</td><td>177</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.69	-----	-----	98.01	32.60	7.29	37.21	6.00	177											0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2462.00	106.69	-----	-----	98.01	32.60	7.29	37.21	6.00	177																																																								
										0 PEAK																																																								
Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>53.34</td><td>54.00</td><td>-0.66</td><td>44.61</td><td>32.60</td><td>7.33</td><td>37.20</td><td>6.00</td><td>177</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	53.34	54.00	-0.66	44.61	32.60	7.33	37.20	6.00	177											0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2483.74	53.34	54.00	-0.66	44.61	32.60	7.33	37.20	6.00	177																																																								
										0 AVERAGE																																																								
Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.33</td><td>-----</td><td>-----</td><td>89.64</td><td>32.60</td><td>7.30</td><td>37.21</td><td>6.00</td><td>177</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.33	-----	-----	89.64	32.60	7.30	37.21	6.00	177											0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2462.00	98.33	-----	-----	89.64	32.60	7.30	37.21	6.00	177																																																								
										0 AVERAGE																																																								

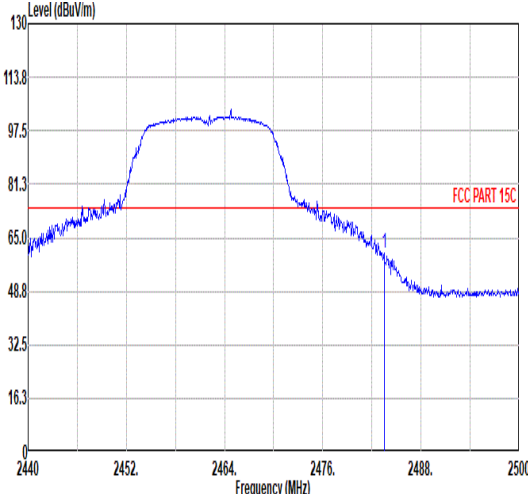
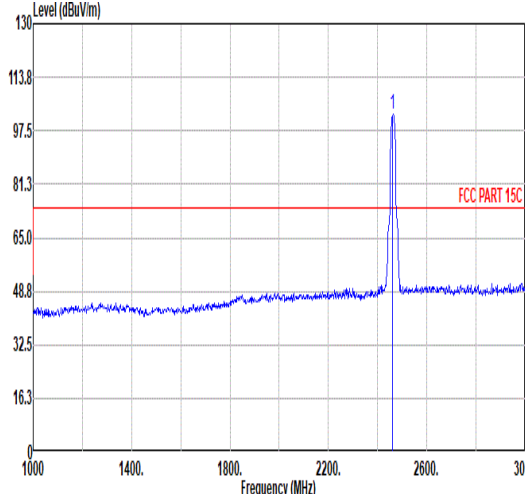
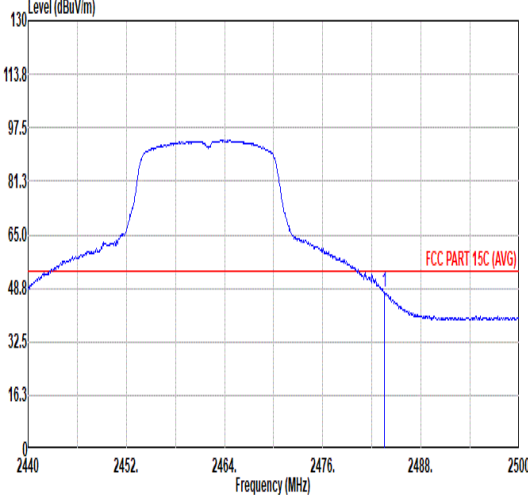
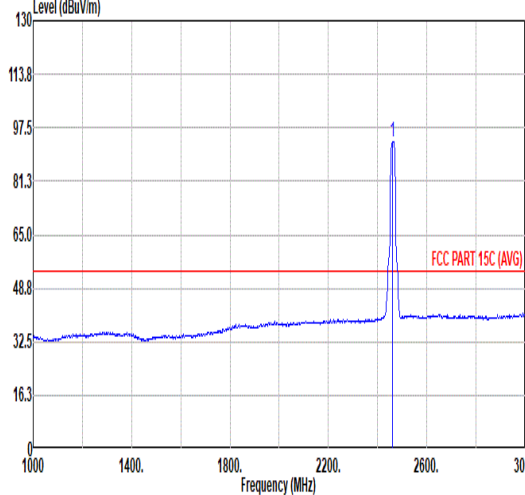


Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>60.33</td><td>74.00</td><td>-13.67</td><td>51.60</td><td>32.60</td><td>7.33</td><td>37.20</td><td>6.00</td><td>336</td><td>226 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	60.33	74.00	-13.67	51.60	32.60	7.33	37.20	6.00	336	226 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.36</td><td>-----</td><td>-----</td><td>93.67</td><td>32.60</td><td>7.30</td><td>37.21</td><td>6.00</td><td>336</td><td>226 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.36	-----	-----	93.67	32.60	7.30	37.21	6.00	336
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.50	60.33	74.00	-13.67	51.60	32.60	7.33	37.20	6.00	336	226 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	102.36	-----	-----	93.67	32.60	7.30	37.21	6.00	336	226 PEAK																																																																																									
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>47.45</td><td>54.00</td><td>-6.55</td><td>38.72</td><td>32.60</td><td>7.33</td><td>37.20</td><td>6.00</td><td>336</td><td>226 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.45	54.00	-6.55	38.72	32.60	7.33	37.20	6.00	336	226 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>93.39</td><td>-----</td><td>-----</td><td>84.70</td><td>32.60</td><td>7.30</td><td>37.21</td><td>6.00</td><td>336</td><td>226 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	93.39	-----	-----	84.70	32.60	7.30	37.21	6.00	336
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.50	47.45	54.00	-6.55	38.72	32.60	7.33	37.20	6.00	336	226 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	93.39	-----	-----	84.70	32.60	7.30	37.21	6.00	336	226 AVERAGE																																																																																									



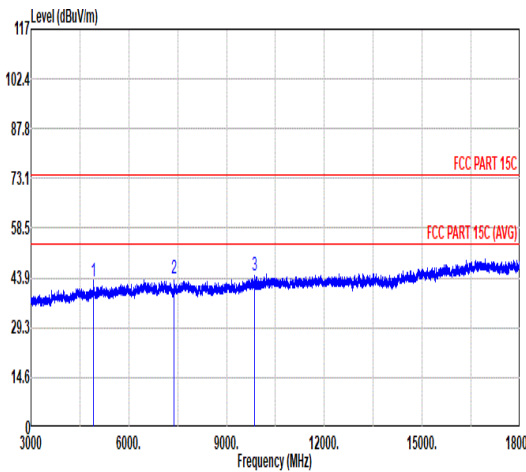
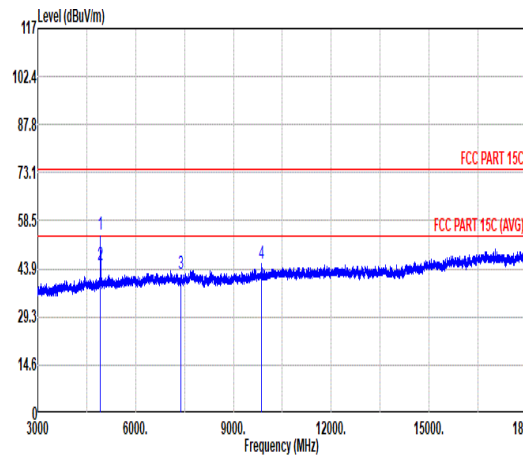


		6																																																																																											
Mode		Harmonic																																																																																											
		2400-2483.5_802.11g_CH11_2462MHz																																																																																											
ANT		SISO																																																																																											
Pol.		Horizontal																																																																																											
Peak Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.80</td><td>74.00</td><td>-31.20</td><td>61.89</td><td>34.65</td><td>10.40</td><td>64.14</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.54</td><td>74.00</td><td>-30.46</td><td>58.25</td><td>35.79</td><td>12.88</td><td>63.38</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>9847.50</td><td>44.81</td><td>78.71</td><td>-33.90</td><td>55.01</td><td>37.09</td><td>14.92</td><td>62.21</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	42.80	74.00	-31.20	61.89	34.65	10.40	64.14	0.00	---	PEAK	2	7386.00	43.54	74.00	-30.46	58.25	35.79	12.88	63.38	0.00	---	PEAK	3	9847.50	44.81	78.71	-33.90	55.01	37.09	14.92	62.21	0.00	---	Peak												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	4924.00	42.80	74.00	-31.20	61.89	34.65	10.40	64.14	0.00	---	PEAK																																																																																		
2	7386.00	43.54	74.00	-30.46	58.25	35.79	12.88	63.38	0.00	---	PEAK																																																																																		
3	9847.50	44.81	78.71	-33.90	55.01	37.09	14.92	62.21	0.00	---	Peak																																																																																		
		Vertical																																																																																											
																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>54.25</td><td>74.00</td><td>-19.75</td><td>73.34</td><td>34.65</td><td>10.40</td><td>64.14</td><td>0.00</td><td>328</td><td>219 PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>64.07</td><td>34.65</td><td>10.40</td><td>64.14</td><td>0.00</td><td>328</td><td>219 AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>57.28</td><td>35.79</td><td>12.88</td><td>63.38</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>4</td><td>9847.50</td><td>45.59</td><td>78.71</td><td>-25.12</td><td>55.79</td><td>37.09</td><td>14.92</td><td>62.21</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	54.25	74.00	-19.75	73.34	34.65	10.40	64.14	0.00	328	219 PEAK	2	4924.00	44.98	54.00	-9.02	64.07	34.65	10.40	64.14	0.00	328	219 AVERAGE	3	7386.00	42.57	74.00	-31.43	57.28	35.79	12.88	63.38	0.00	---	PEAK	4	9847.50	45.59	78.71	-25.12	55.79	37.09	14.92	62.21	0.00	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	4924.00	54.25	74.00	-19.75	73.34	34.65	10.40	64.14	0.00	328	219 PEAK																																																																																		
2	4924.00	44.98	54.00	-9.02	64.07	34.65	10.40	64.14	0.00	328	219 AVERAGE																																																																																		
3	7386.00	42.57	74.00	-31.43	57.28	35.79	12.88	63.38	0.00	---	PEAK																																																																																		
4	9847.50	45.59	78.71	-25.12	55.79	37.09	14.92	62.21	0.00	---	Peak																																																																																		

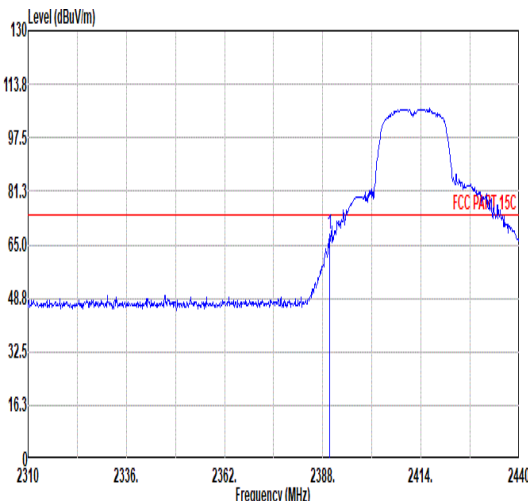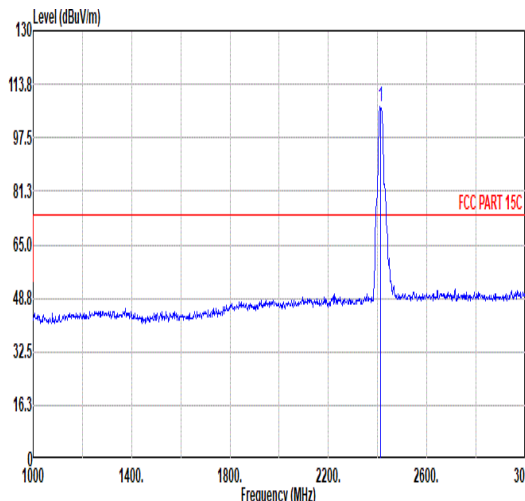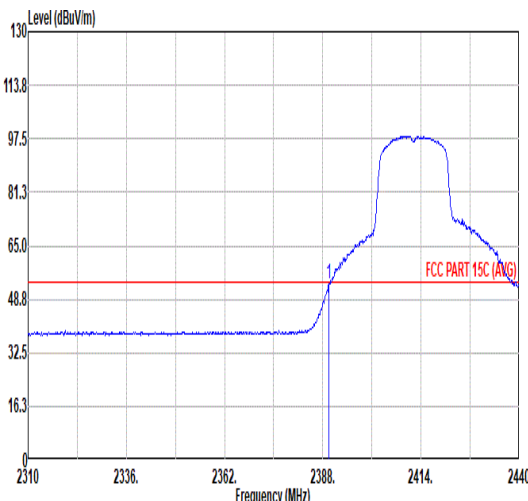
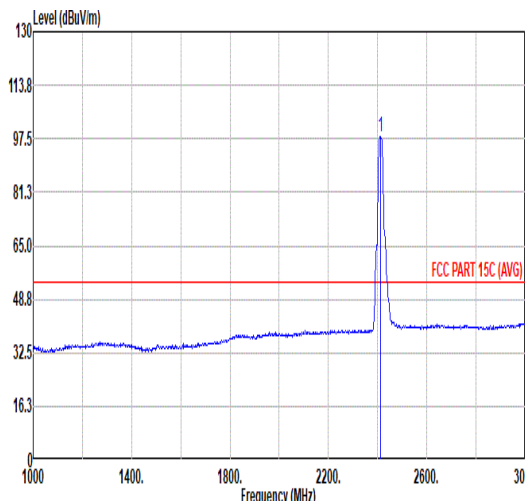


Mode	7																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>68.21</td><td>74.00</td><td>-5.79</td><td>60.34</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>156</td><td>0 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	68.21	74.00	-5.79	60.34	31.94	7.16	37.23	6.00	156	0 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.92</td><td>-----</td><td>-----</td><td>98.82</td><td>32.12</td><td>7.20</td><td>37.22</td><td>6.00</td><td>156</td><td>0 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.92	-----	-----	98.82	32.12	7.20	37.22	6.00	156	0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.82	68.21	74.00	-5.79	60.34	31.94	7.16	37.23	6.00	156	0 PEAK																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	106.92	-----	-----	98.82	32.12	7.20	37.22	6.00	156	0 PEAK																																																																																	
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>53.50</td><td>54.00</td><td>-0.50</td><td>45.63</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>156</td><td>0 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	53.50	54.00	-0.50	45.63	31.94	7.16	37.23	6.00	156	0 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.02</td><td>-----</td><td>-----</td><td>89.92</td><td>32.12</td><td>7.20</td><td>37.22</td><td>6.00</td><td>156</td><td>0 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.02	-----	-----	89.92	32.12	7.20	37.22	6.00	156	0 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.69	53.50	54.00	-0.50	45.63	31.94	7.16	37.23	6.00	156	0 AVERAGE																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	98.02	-----	-----	89.92	32.12	7.20	37.22	6.00	156	0 AVERAGE																																																																																	

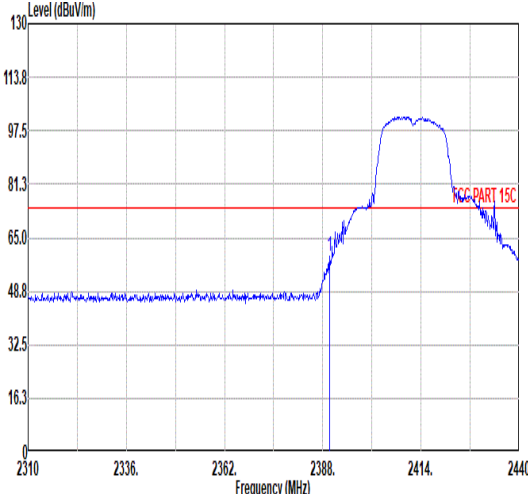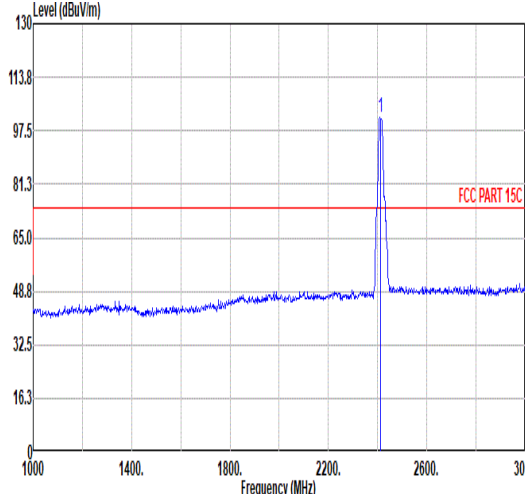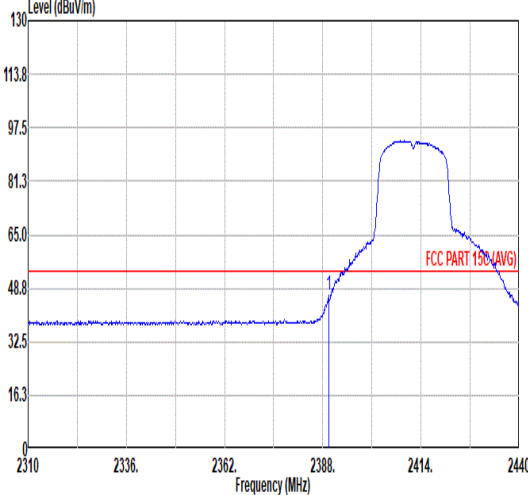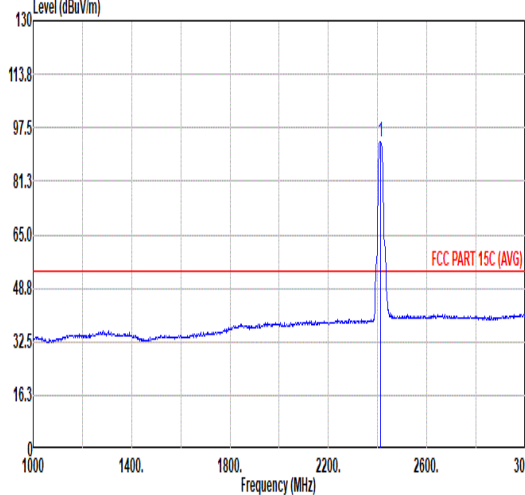

		7																																																																																									
Mode		Band Edge																																																																																									
		2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																									
ANT		SISO																																																																																									
Pol.		Fundamental																																																																																									
Peak	Vertical	Fundamental																																																																																									
	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>59.39</td><td>74.00</td><td>-14.61</td><td>51.52</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>312</td><td>253 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	59.39	74.00	-14.61	51.52	31.94	7.16	37.23	6.00	312	253 PEAK	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.69</td><td>-----</td><td>-----</td><td>93.59</td><td>32.12</td><td>7.20</td><td>37.22</td><td>6.00</td><td>312</td><td>253 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.69	-----	-----	93.59	32.12	7.20	37.22	6.00	312
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.82	59.39	74.00	-14.61	51.52	31.94	7.16	37.23	6.00	312	253 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	101.69	-----	-----	93.59	32.12	7.20	37.22	6.00	312	253 PEAK																																																																																
Avg	Vertical	Fundamental																																																																																									
	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>46.58</td><td>54.00</td><td>-7.42</td><td>38.71</td><td>31.94</td><td>7.16</td><td>37.23</td><td>6.00</td><td>312</td><td>253 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	46.58	54.00	-7.42	38.71	31.94	7.16	37.23	6.00	312	253 AVERAGE	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.32</td><td>-----</td><td>-----</td><td>85.25</td><td>32.10</td><td>7.19</td><td>37.22</td><td>6.00</td><td>312</td><td>253 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.32	-----	-----	85.25	32.10	7.19	37.22	6.00	312
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.56	46.58	54.00	-7.42	38.71	31.94	7.16	37.23	6.00	312	253 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	93.32	-----	-----	85.25	32.10	7.19	37.22	6.00	312	253 AVERAGE																																																																																

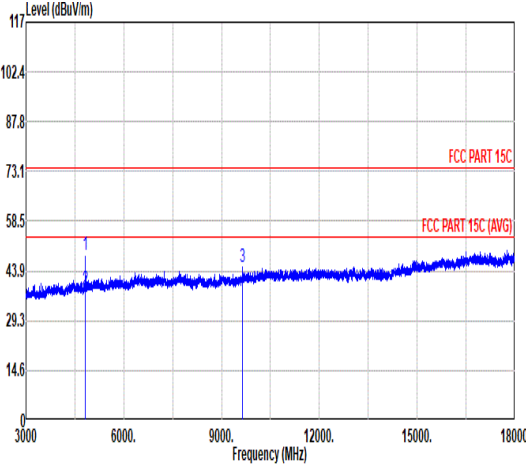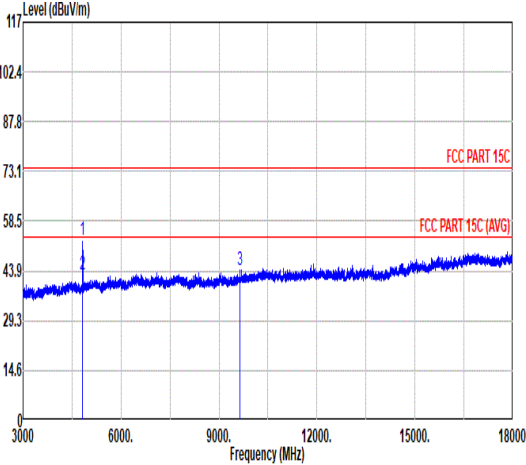

Mode	7																																																																																																																																																												
	Harmonic																																																																																																																																																												
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																																																																																												
ANT	SISO																																																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																																																						
Peak Avg																																																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>48.78</td><td>74.00</td><td>-25.22</td><td>68.19</td><td>34.40</td><td>10.29</td><td>64.10</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>38.41</td><td>54.00</td><td>-15.59</td><td>57.83</td><td>34.39</td><td>10.29</td><td>64.10</td><td>0.00</td><td>300</td><td>360</td><td>AVERAGE</td></tr><tr><td>3</td><td>9648.00</td><td>45.22</td><td>79.40</td><td>-34.18</td><td>56.11</td><td>36.70</td><td>14.81</td><td>62.40</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	48.78	74.00	-25.22	68.19	34.40	10.29	64.10	0.00	300	360	PEAK	2	4824.00	38.41	54.00	-15.59	57.83	34.39	10.29	64.10	0.00	300	360	AVERAGE	3	9648.00	45.22	79.40	-34.18	56.11	36.70	14.81	62.40	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>53.01</td><td>74.00</td><td>-20.99</td><td>72.42</td><td>34.40</td><td>10.29</td><td>64.10</td><td>0.00</td><td>300</td><td>228</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>42.71</td><td>54.00</td><td>-11.29</td><td>62.12</td><td>34.40</td><td>10.29</td><td>64.10</td><td>0.00</td><td>300</td><td>228</td><td>AVERAGE</td></tr><tr><td>3</td><td>9648.00</td><td>44.33</td><td>70.59</td><td>-26.26</td><td>55.22</td><td>36.70</td><td>14.81</td><td>62.40</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	53.01	74.00	-20.99	72.42	34.40	10.29	64.10	0.00	300	228	PEAK	2	4824.00	42.71	54.00	-11.29	62.12	34.40	10.29	64.10	0.00	300	228	AVERAGE	3	9648.00	44.33	70.59	-26.26	55.22	36.70	14.81	62.40	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4824.00	48.78	74.00	-25.22	68.19	34.40	10.29	64.10	0.00	300	360	PEAK																																																																																																																																																	
2	4824.00	38.41	54.00	-15.59	57.83	34.39	10.29	64.10	0.00	300	360	AVERAGE																																																																																																																																																	
3	9648.00	45.22	79.40	-34.18	56.11	36.70	14.81	62.40	0.00	---	---	Peak																																																																																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4824.00	53.01	74.00	-20.99	72.42	34.40	10.29	64.10	0.00	300	228	PEAK																																																																																																																																																	
2	4824.00	42.71	54.00	-11.29	62.12	34.40	10.29	64.10	0.00	300	228	AVERAGE																																																																																																																																																	
3	9648.00	44.33	70.59	-26.26	55.22	36.70	14.81	62.40	0.00	---	---	Peak																																																																																																																																																	