

FCC RF Test Report

APPLICANT : Barking Labs Corp.
EQUIPMENT : Fi Mini
BRAND NAME : Fi
MODEL NAME : M1
FCC ID : 2ARXN-M1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Aug. 04, 2025 ~ Aug. 08, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	25
3.6 AC Conducted Emission Measurement.....	29
3.7 Antenna Requirements.....	31
4 LIST OF MEASURING EQUIPMENT	32
5 MEASUREMENT UNCERTAINTY	33
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR572104B	Rev. 01	Initial issue of report	Aug. 15, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.91 dB at 2483.50 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 26.20 dB at 4.848 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Barking Labs Corp.
419 Lafayette St., Floor 2, New York, NY 10003

1.2 Manufacturer

Barking Labs Corp.
419 Lafayette St., Floor 2, New York, NY 10003

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Fi Mini
Brand Name	Fi
Model Name	M1
FCC ID	2ARXN-M1
IMEI Code	Conducted: 359404233894436 Conduction: 359404233893289 Radiation: 359404233894907
HW Version	1.0
SW Version	v4.18
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 18.06 dBm (0.0640 W) 802.11g : 22.26 dBm (0.1683 W) 802.11n HT20 : 22.04 dBm (0.1600 W)
99% Occupied Bandwidth	802.11b : 13.34MHz 802.11g : 18.00MHz 802.11n HT20 : 18.69MHz
Antenna Type / Gain	Inverted-F Antenna (FPC)with gain 1.20 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH03-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH03-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of ICES-003, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-


2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :WLAN Link(2.4G) + USB Cable (Charing form adaptor)
Remark: For Radiated Test Cases, the tests were performance with USB Cable, Adaptor.	

2.3 Connection Diagram of Test System

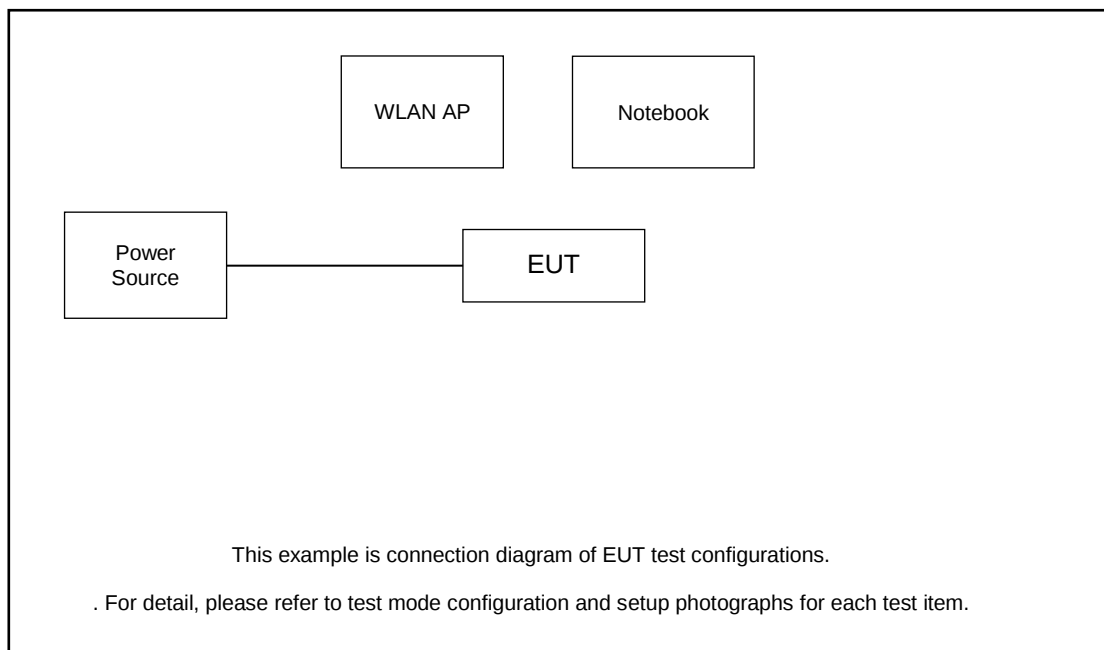

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	Adaptor	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.3 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.3 + 10 = 12.3 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

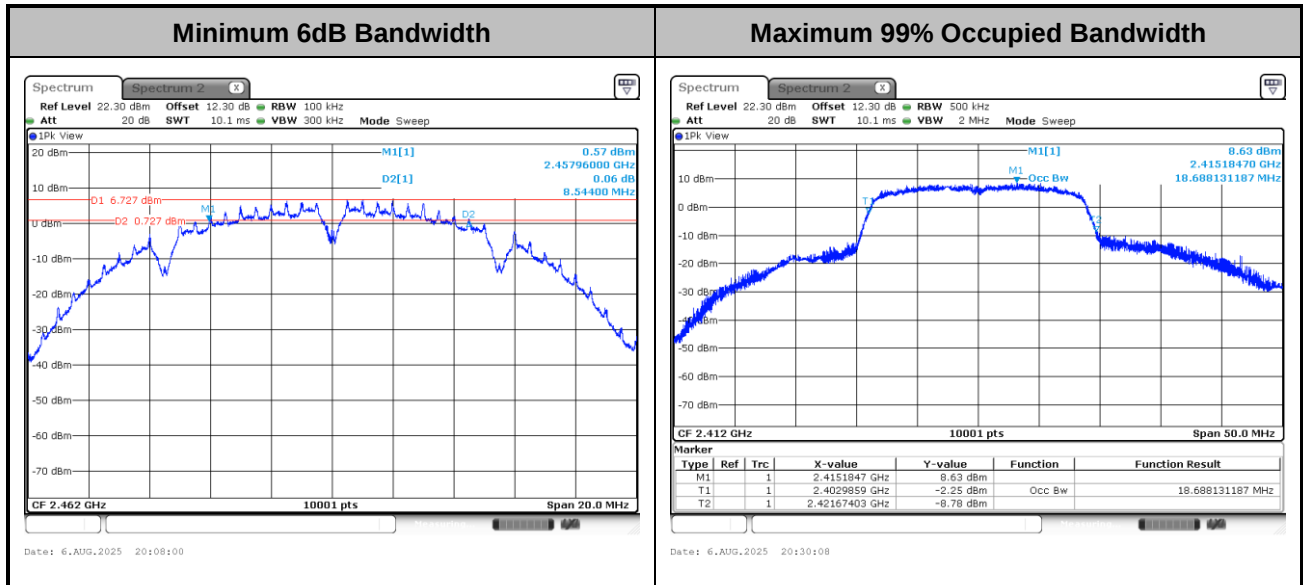

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

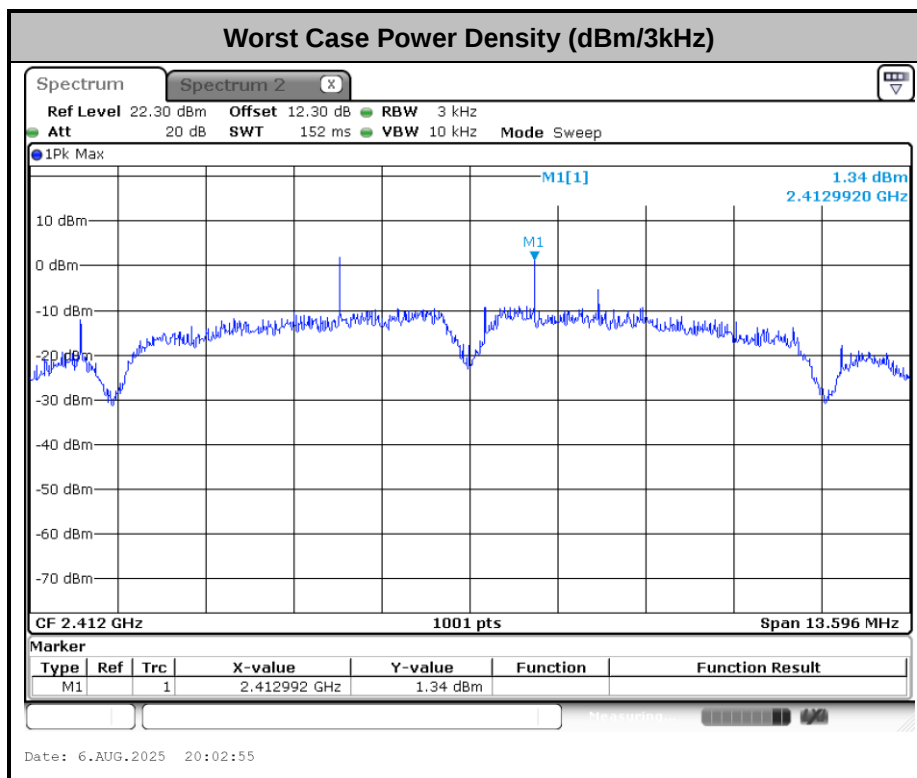

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

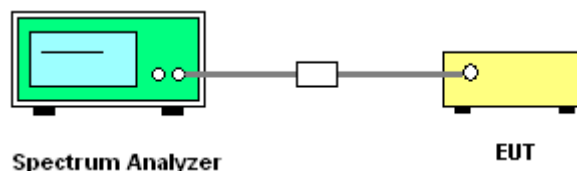




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Smile Wang	Temperature :	21~25°C
		Relative Humidity :	51~54%


Number of TX = 1, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

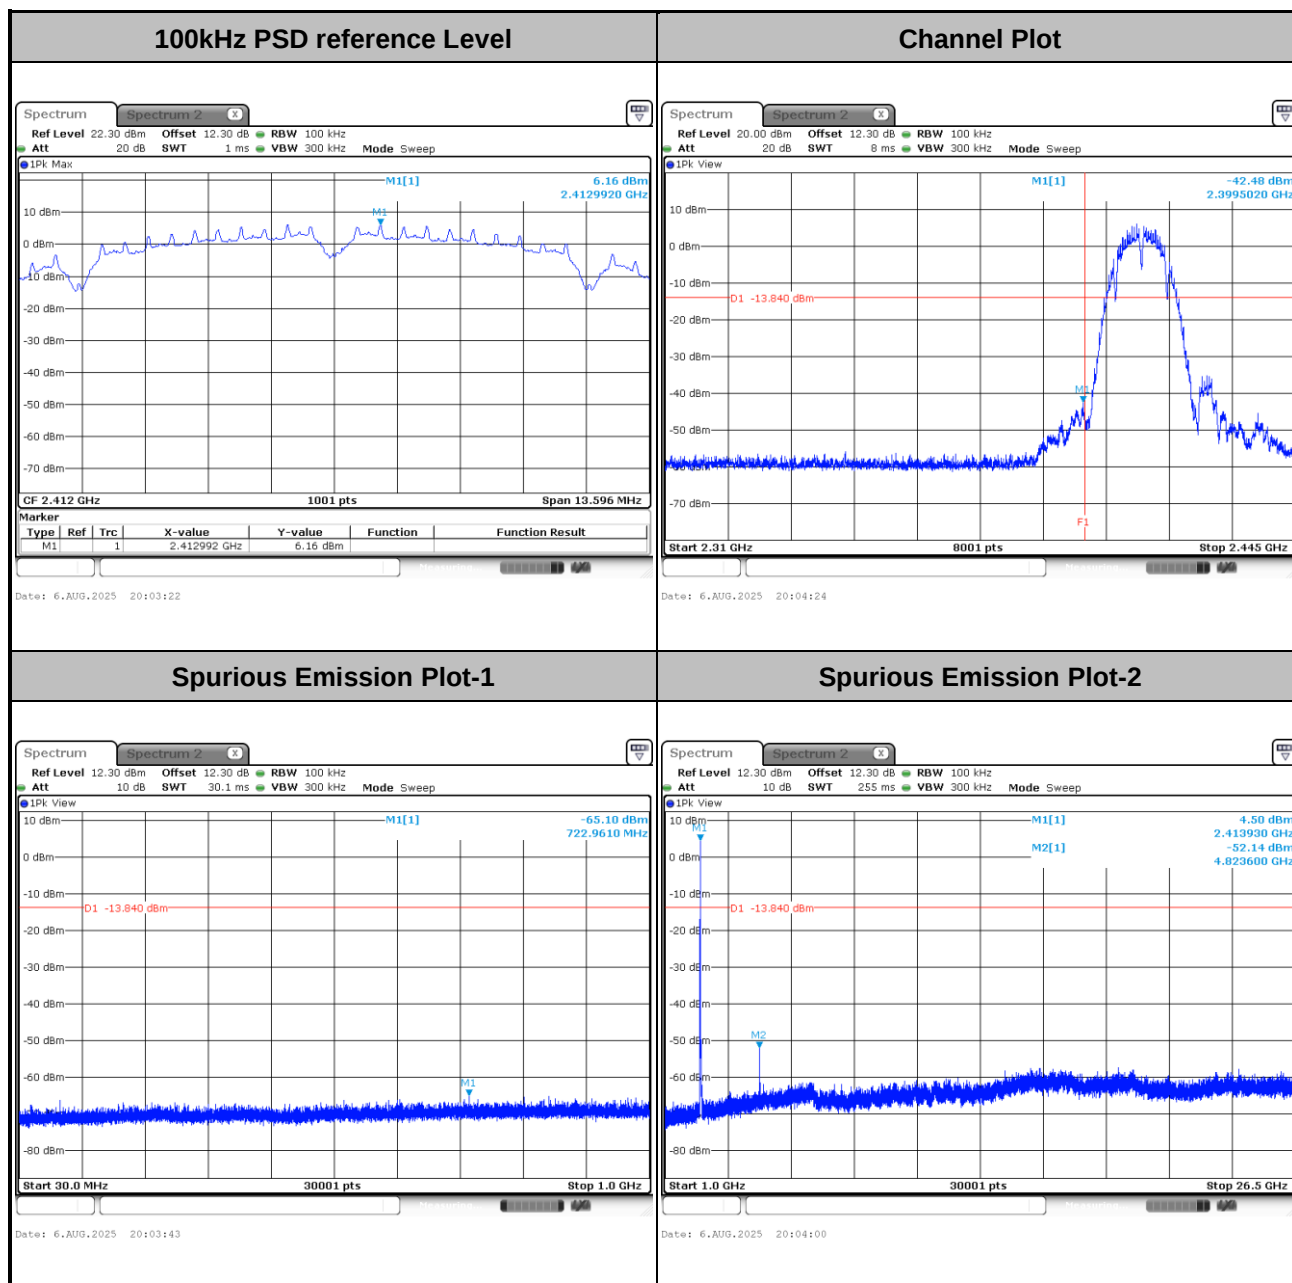




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

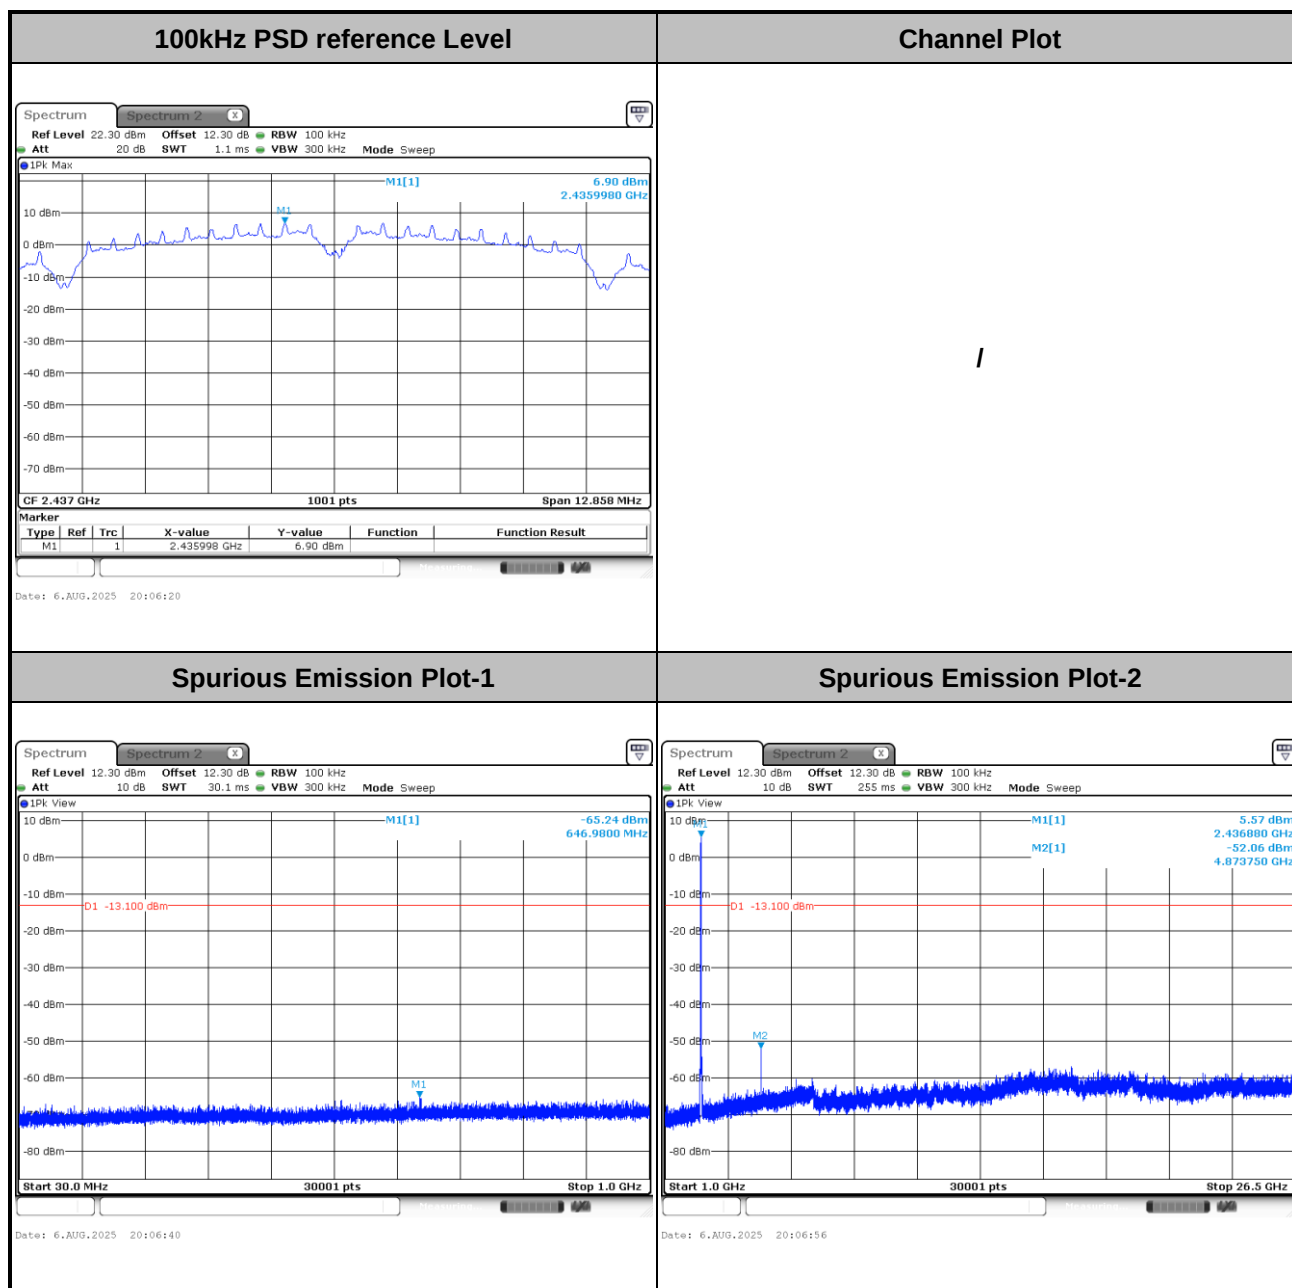




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

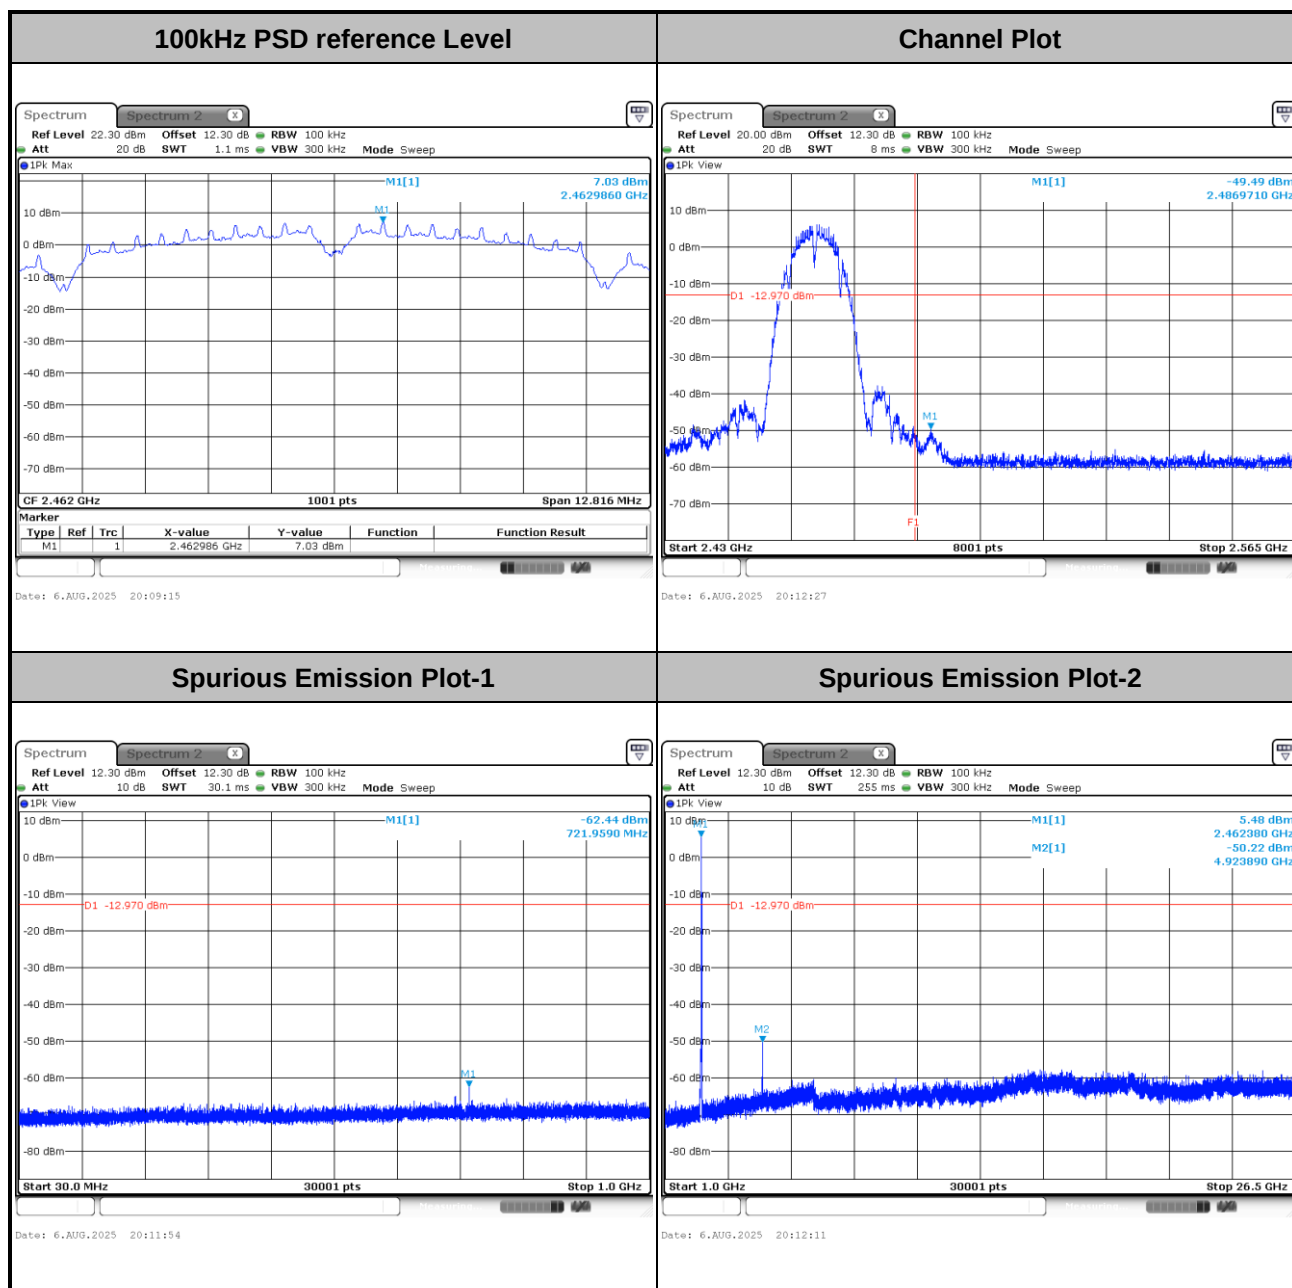




Test Mode : 802.11g Test Channel : 01


100kHz PSD reference Level

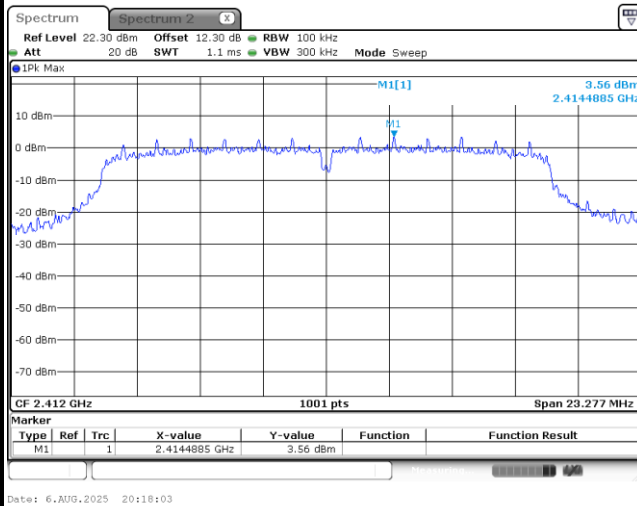


Channel Plot

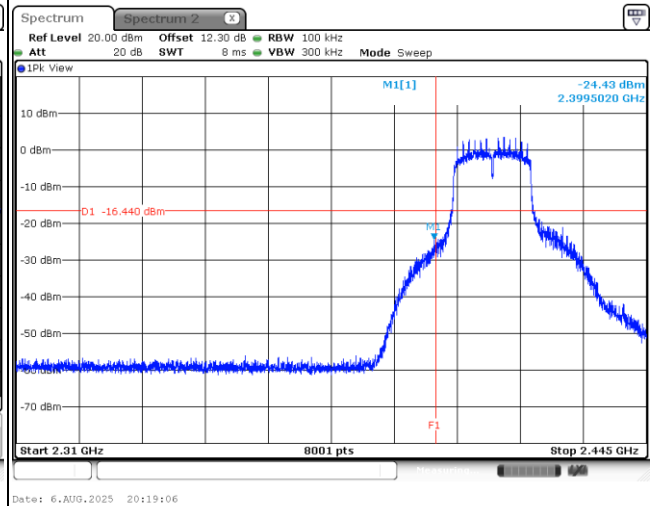

Spurious Emission Plot-1

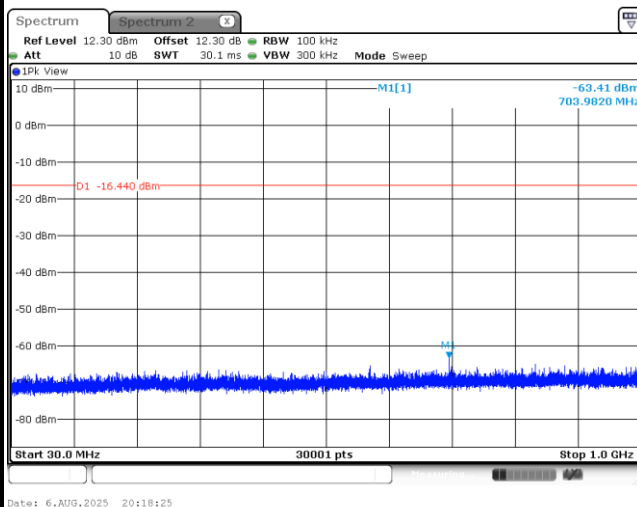


Spurious Emission Plot-2

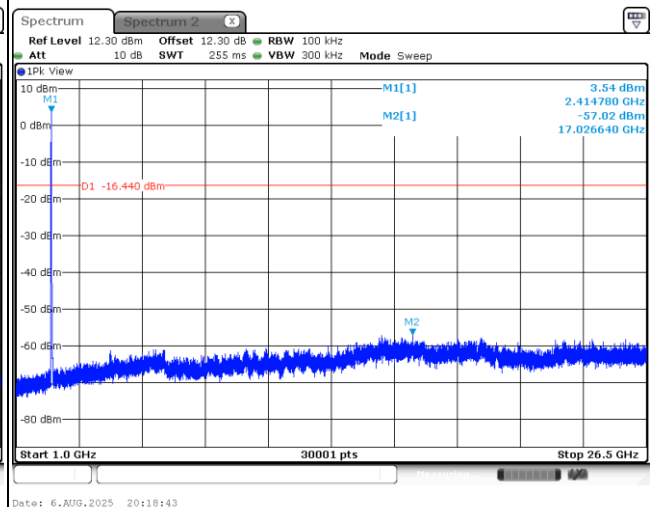




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

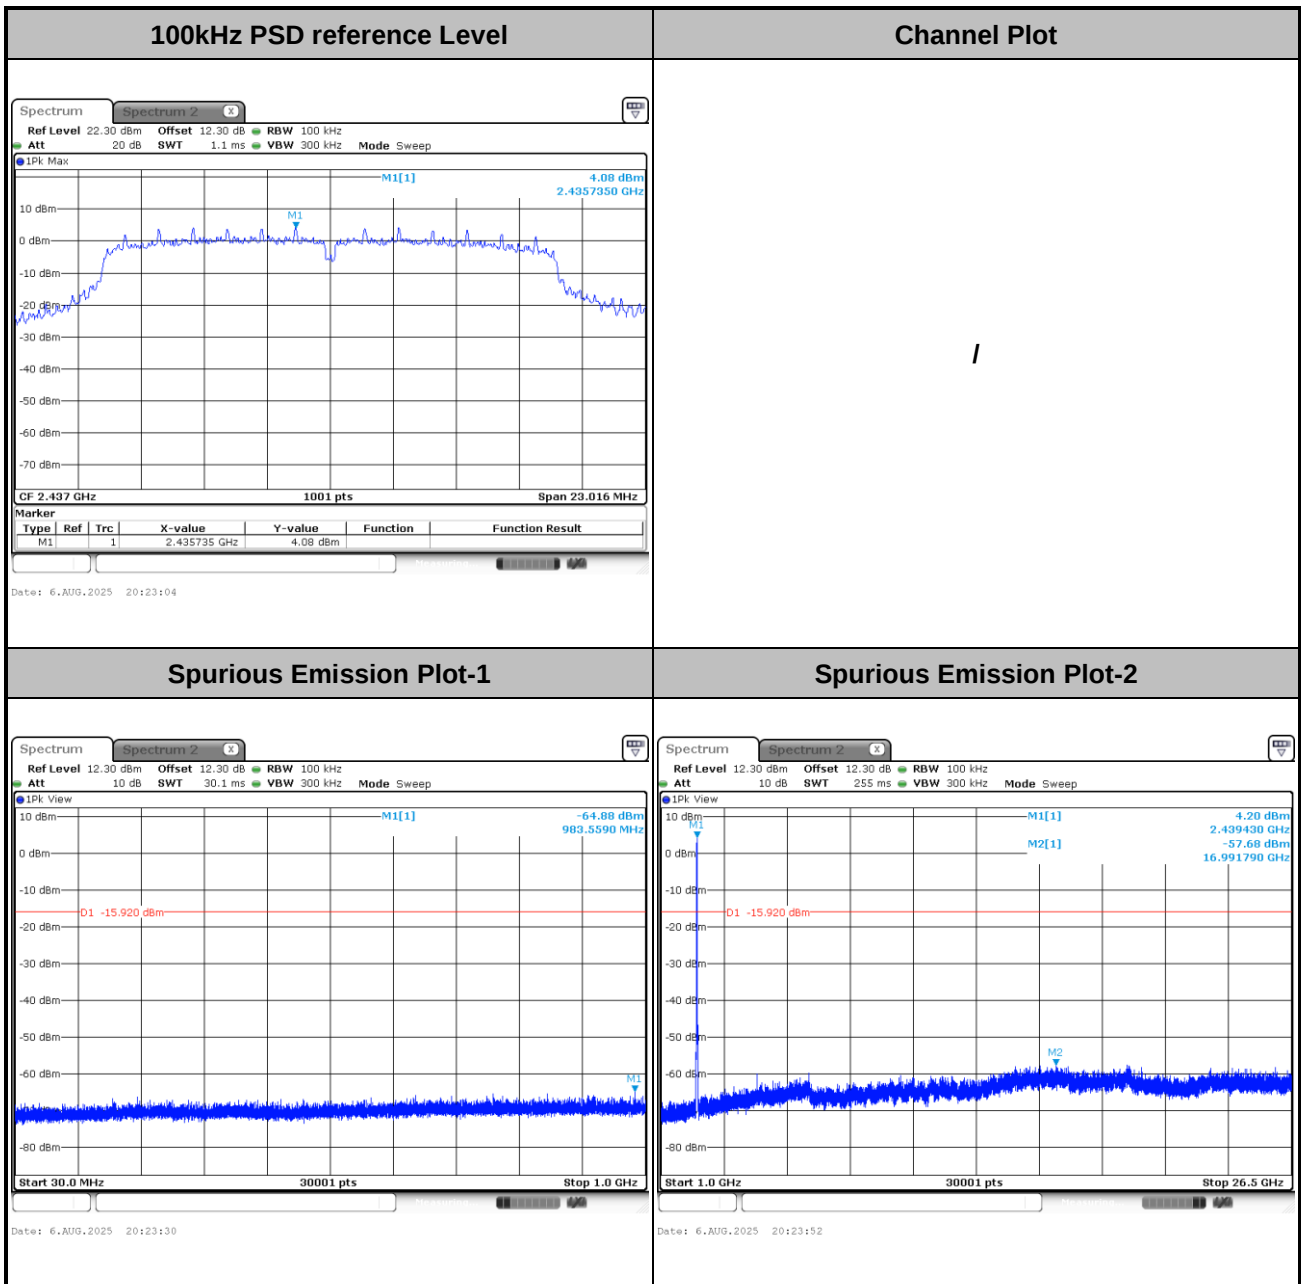



Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

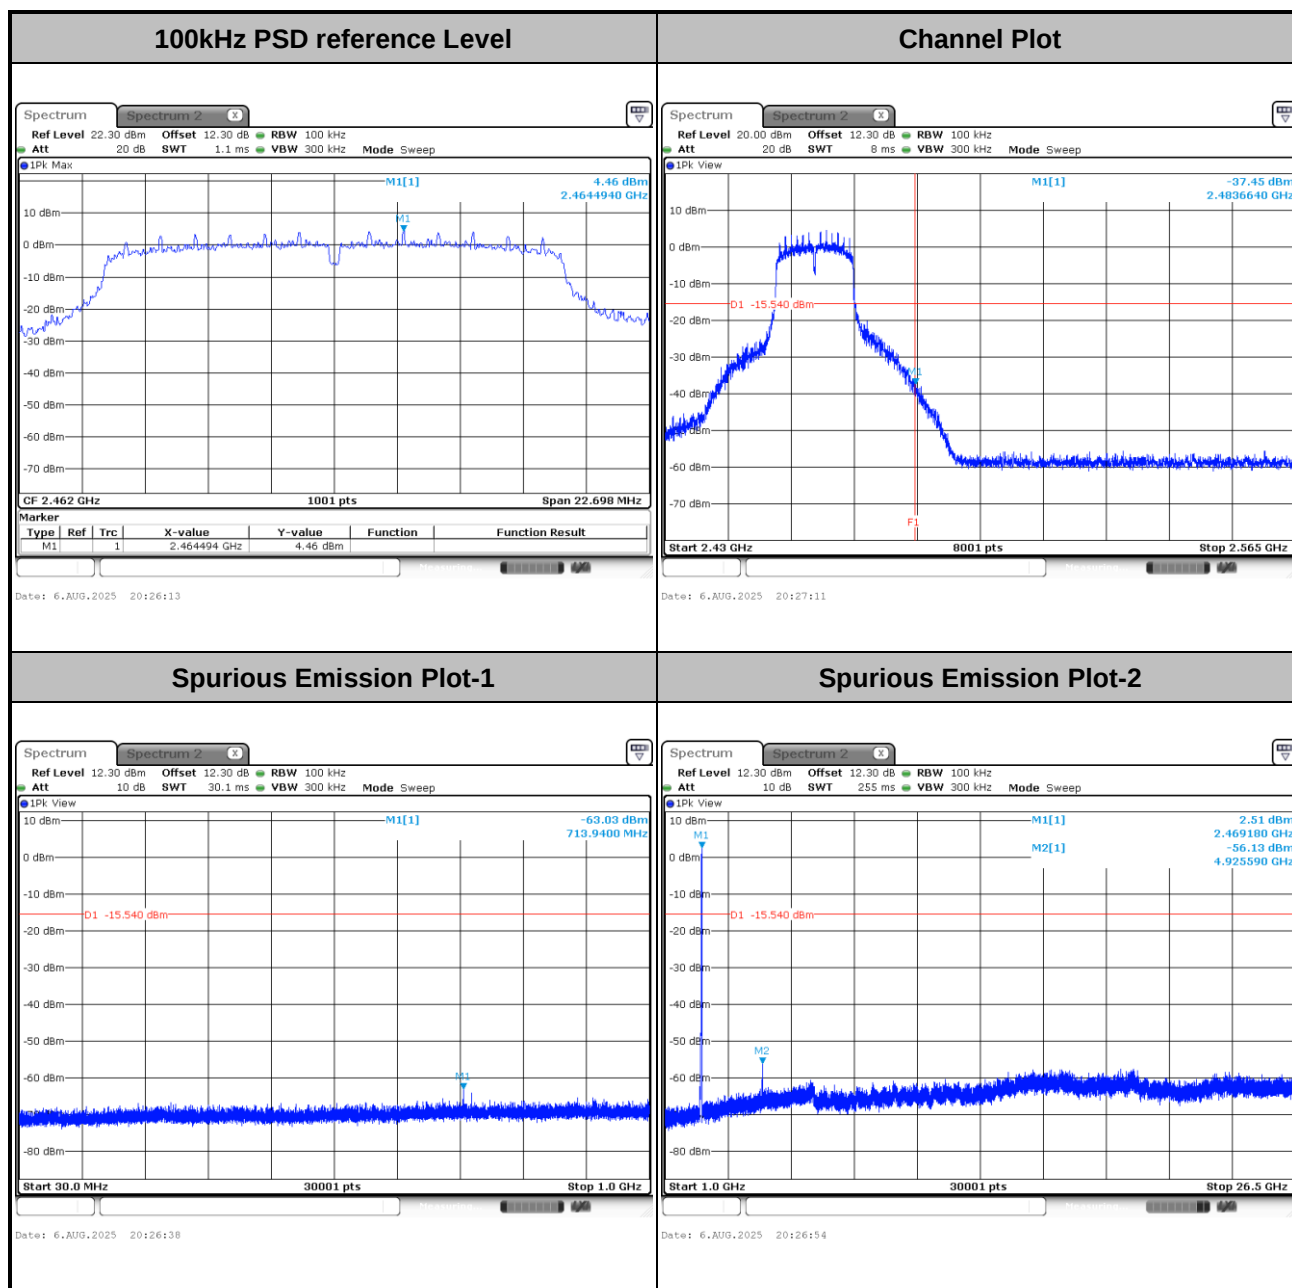





Test Mode : 802.11n HT20

Test Channel : 01


100kHz PSD reference Level

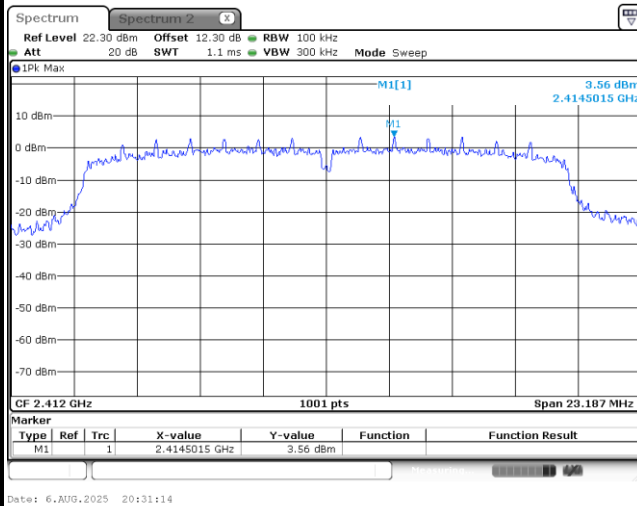


Channel Plot

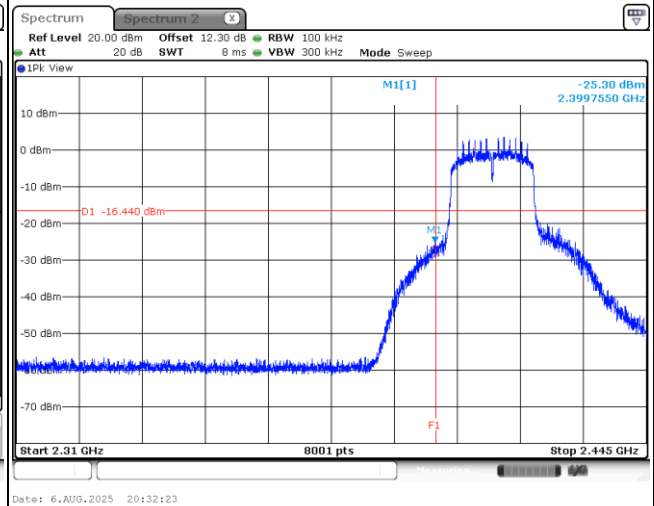

Spurious Emission Plot-1

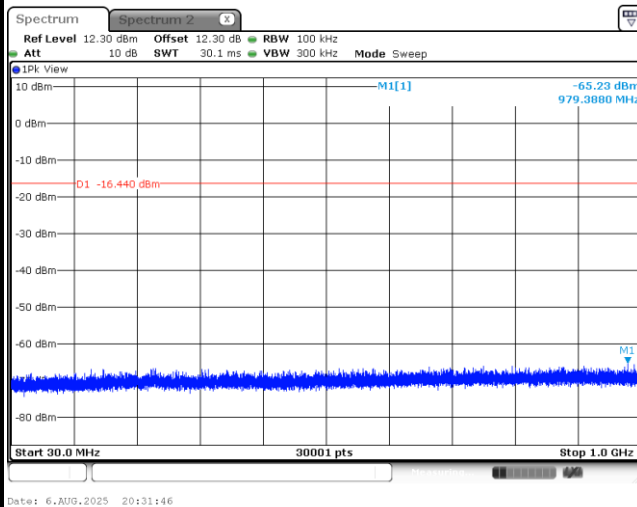


Spurious Emission Plot-2

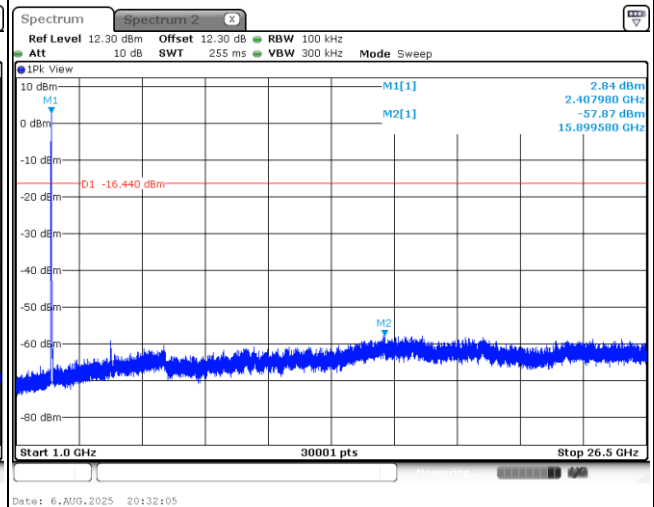




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

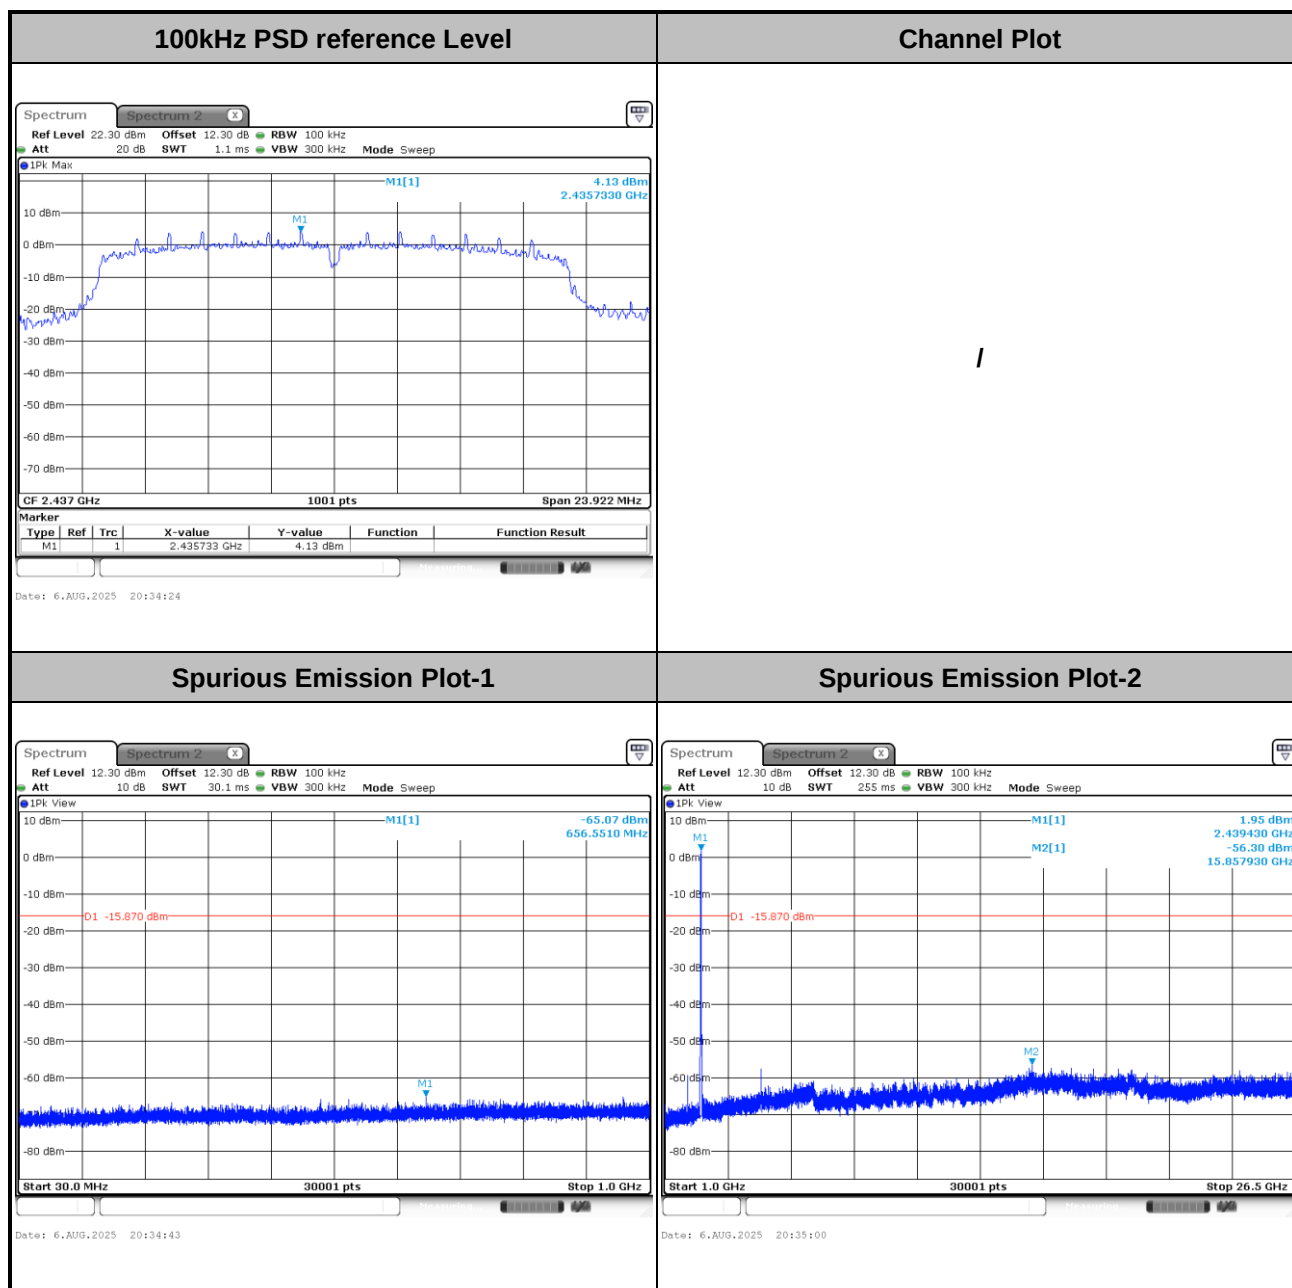



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

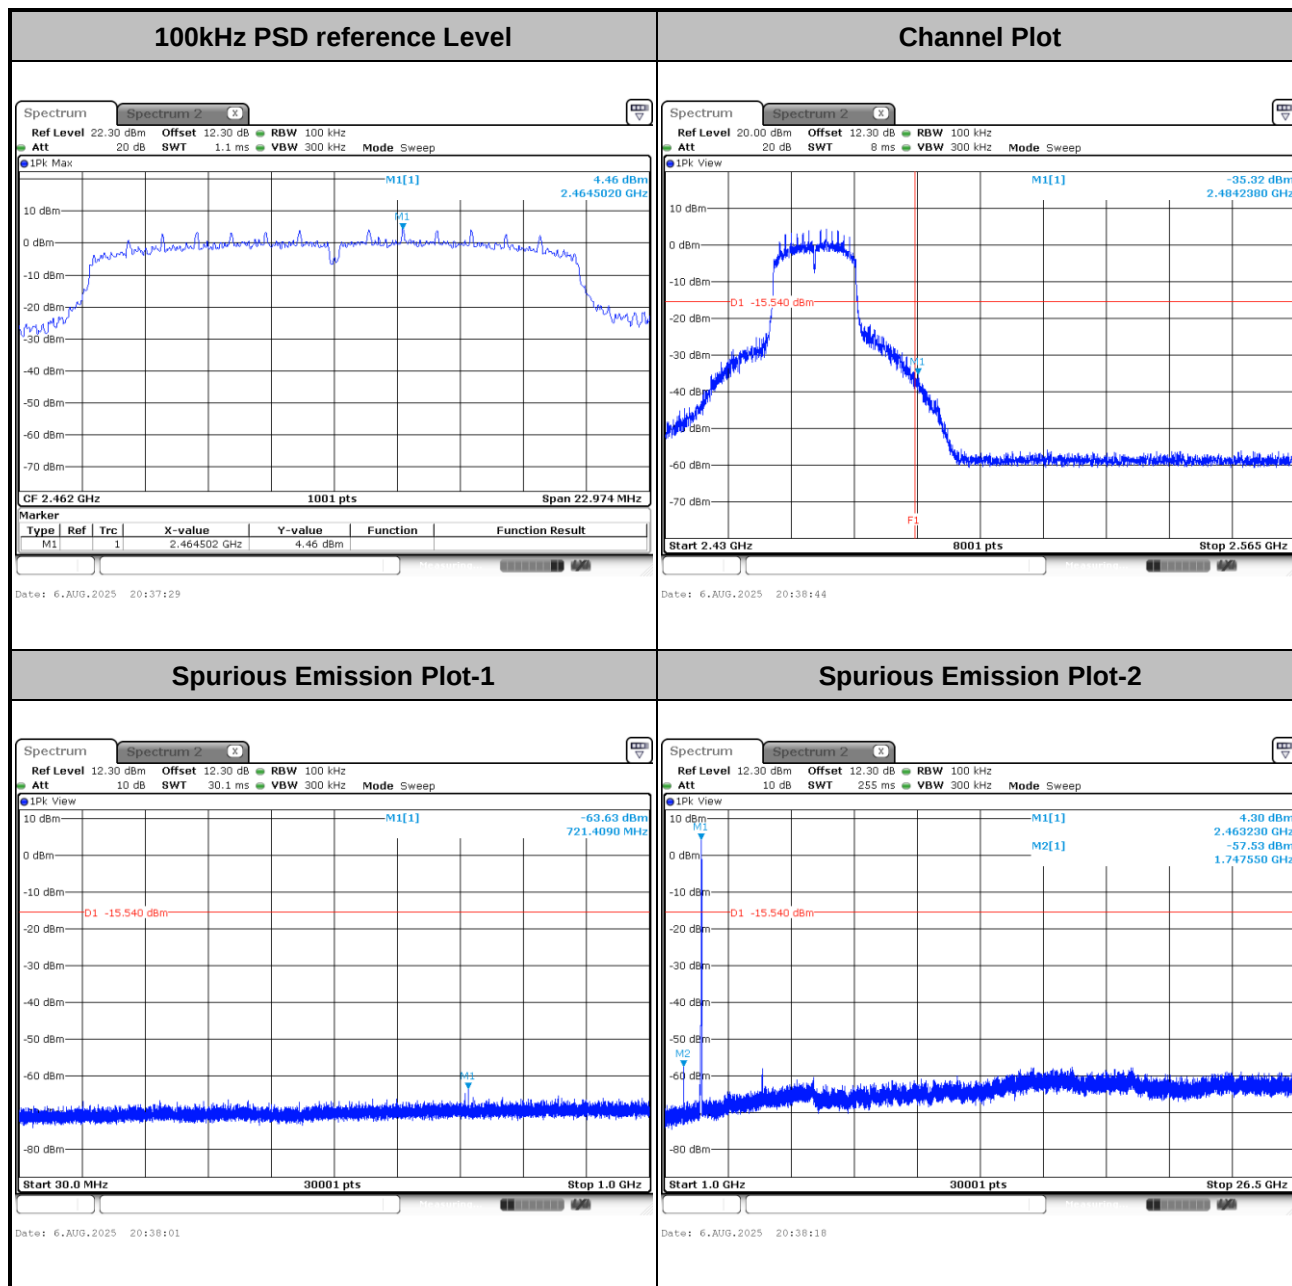

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW > RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f > 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

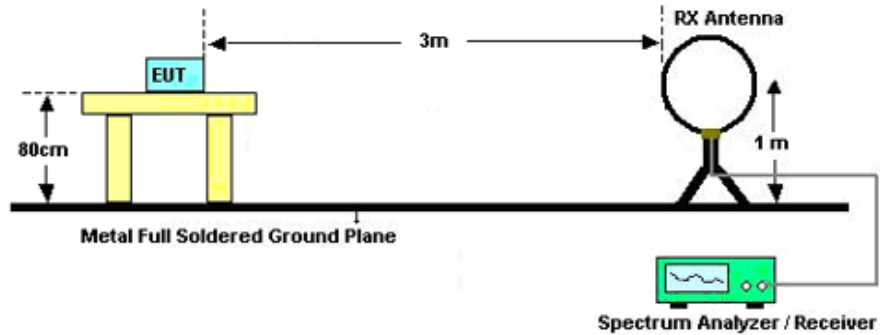

For radiated emissions from 30MHz to 1GHz

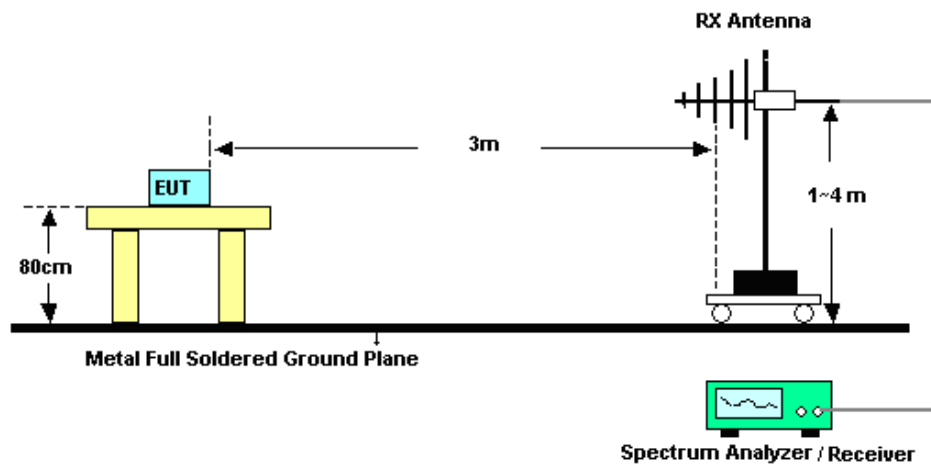

For radiated emissions above 1GHz

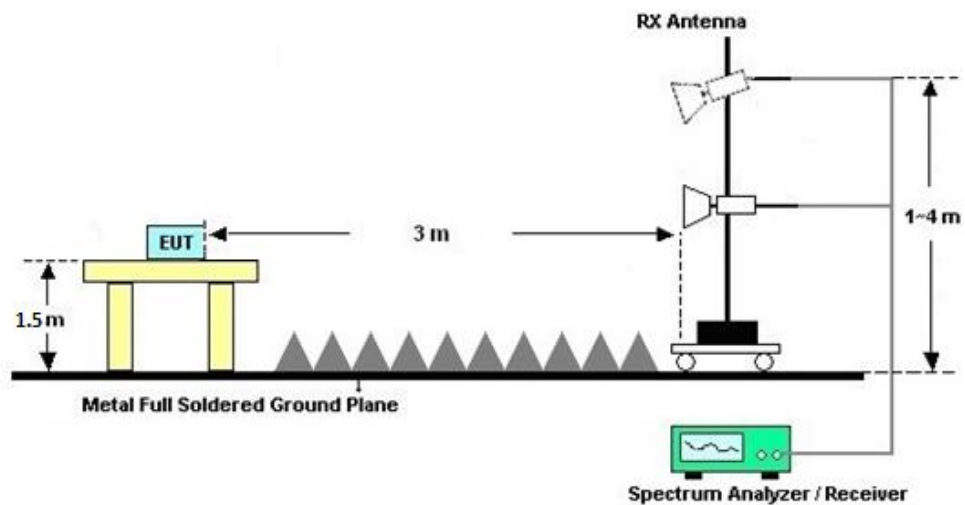

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

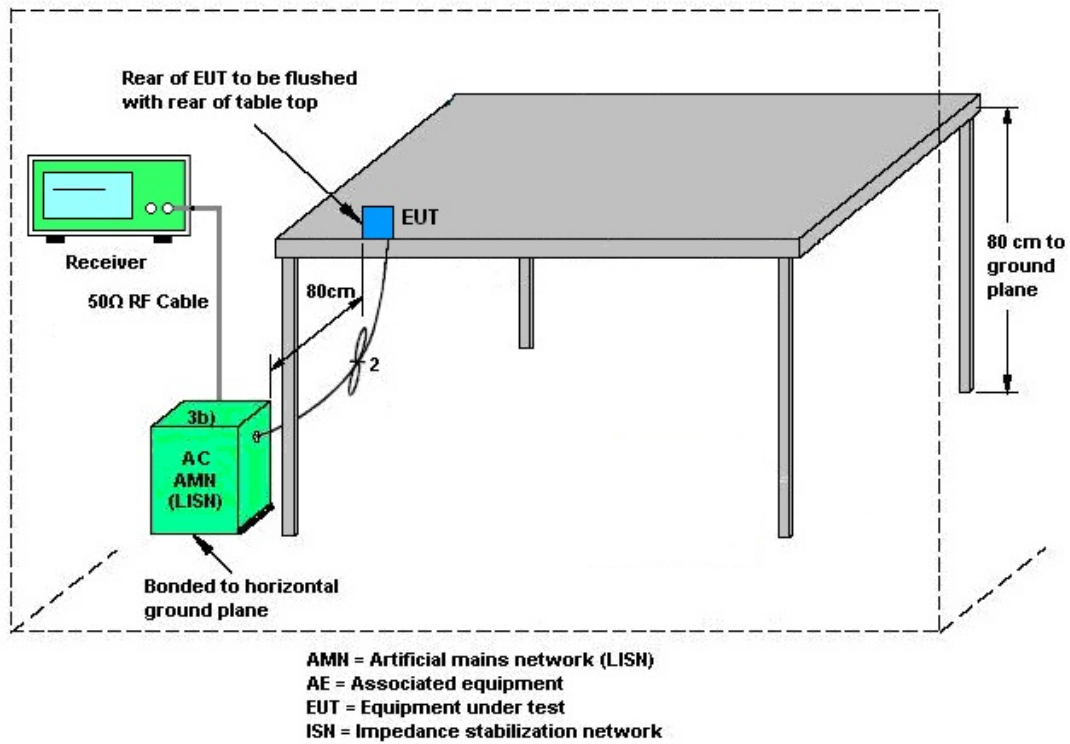

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2024	Aug. 04, 2025~Aug. 05, 2025	Oct. 10, 2025	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2025	Aug. 04, 2025~Aug. 05, 2025	Apr. 17, 2026	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Aug. 04, 2025~Aug. 05, 2025	Sep. 07, 2025	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Nov. 23, 2024	Aug. 04, 2025~Aug. 05, 2025	Nov. 22, 2025	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251982	1GHz~18GHz	Aug. 16, 2024	Aug. 04, 2025~Aug. 05, 2025	Aug. 15, 2025	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Aug. 04, 2025~Aug. 05, 2025	Oct. 21, 2025	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 02, 2025	Aug. 04, 2025~Aug. 05, 2025	Jul. 01, 2026	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 02, 2025	Aug. 04, 2025~Aug. 05, 2025	Jan. 01, 2026	Radiation (03CH03-KS)
high gain Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Dec. 02, 2024	Aug. 04, 2025~Aug. 05, 2025	Dec. 01, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM01G18GA	EM	1GHz~26.5GHz	Oct. 09, 2024	Aug. 04, 2025~Aug. 05, 2025	Oct. 08, 2025	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 04, 2025~Aug. 05, 2025	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 04, 2025~Aug. 05, 2025	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 04, 2025~Aug. 05, 2025	NCR	Radiation (03CH03-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Aug. 06, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Aug. 06, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Aug. 06, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2025	Aug. 08, 2025	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Aug. 08, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Aug. 08, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Aug. 08, 2025	Oct. 08, 2025	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.38ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.32 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Smile Wang	Temperature:	21~25	°C
Test Date:	2025/8/6	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.30	9.06	0.50	Pass
11b	1Mbps	1	6	2437	13.34	8.57	0.50	Pass
11b	1Mbps	1	11	2462	13.11	8.54	0.50	Pass
11g	6Mbps	1	1	2412	18.00	15.52	0.50	Pass
11g	6Mbps	1	6	2437	17.78	15.34	0.50	Pass
11g	6Mbps	1	11	2462	17.26	15.13	0.50	Pass
HT20	MCS0	1	1	2412	18.69	15.46	0.50	Pass
HT20	MCS0	1	6	2437	18.51	15.95	0.50	Pass
HT20	MCS0	1	11	2462	18.12	15.32	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	17.24	30.00	1.20	18.44	36.00	Pass
11b	1Mbps	1	6	2437	17.98	30.00	1.20	19.18	36.00	Pass
11b	1Mbps	1	11	2462	18.06	30.00	1.20	19.26	36.00	Pass
11g	6Mbps	1	1	2412	21.33	30.00	1.20	22.53	36.00	Pass
11g	6Mbps	1	6	2437	21.81	30.00	1.20	23.01	36.00	Pass
11g	6Mbps	1	11	2462	22.26	30.00	1.20	23.46	36.00	Pass
HT20	MCS0	1	1	2412	21.51	30.00	1.20	22.71	36.00	Pass
HT20	MCS0	1	6	2437	22.04	30.00	1.20	23.24	36.00	Pass
HT20	MCS0	1	11	2462	21.16	30.00	1.20	22.36	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.01	15.07
11b	1Mbps	1	6	2437	0.01	15.92
11b	1Mbps	1	11	2462	0.01	15.89
11g	6Mbps	1	1	2412	0.41	14.72
11g	6Mbps	1	6	2437	0.41	15.28
11g	6Mbps	1	11	2462	0.41	15.27
HT20	MCS0	1	1	2412	0.37	14.58
HT20	MCS0	1	6	2437	0.37	15.22
HT20	MCS0	1	11	2462	0.37	13.93


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	1.34	1.20	8.00	Pass
11b	1Mbps	1	6	2437	0.43	1.20	8.00	Pass
11b	1Mbps	1	11	2462	-0.67	1.20	8.00	Pass
11g	6Mbps	1	1	2412	-9.91	1.20	8.00	Pass
11g	6Mbps	1	6	2437	-9.54	1.20	8.00	Pass
11g	6Mbps	1	11	2462	-9.97	1.20	8.00	Pass
HT20	MCS0	1	1	2412	-10.50	1.20	8.00	Pass
HT20	MCS0	1	6	2437	-10.24	1.20	8.00	Pass
HT20	MCS0	1	11	2462	-9.96	1.20	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3 ~ 26.2℃
		Relative Humidity :	38 ~ 42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

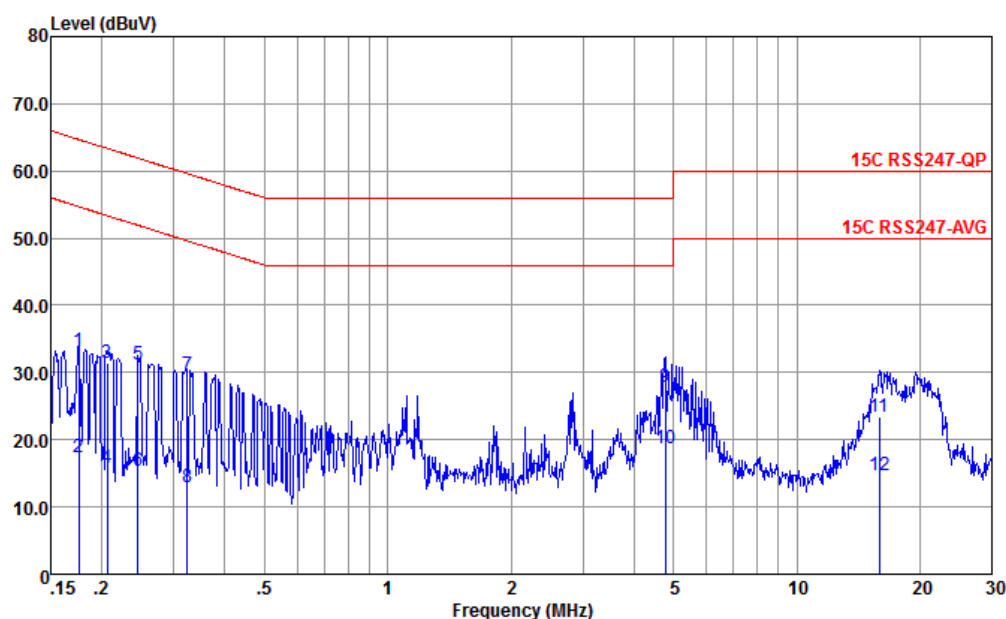


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 24+80 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.176	33.21	-31.47	64.68	22.50	0.25	10.46	QP
2	0.176	17.31	-37.37	54.68	6.60	0.25	10.46	Average
3	0.206	31.52	-31.84	63.36	20.81	0.25	10.46	QP
4	0.206	15.92	-37.44	53.36	5.21	0.25	10.46	Average
5	0.246	31.25	-30.66	61.91	20.50	0.28	10.47	QP
6	0.246	15.35	-36.56	51.91	4.60	0.28	10.47	Average
7	0.323	29.61	-30.01	59.62	18.80	0.33	10.48	QP
8	0.323	13.01	-36.61	49.62	2.20	0.33	10.48	Average
9	4.772	27.81	-28.19	56.00	17.20	0.41	10.20	QP
10 *	4.772	18.81	-27.19	46.00	8.20	0.41	10.20	Average
11	15.885	23.39	-36.61	60.00	12.20	0.91	10.28	QP
12	15.885	14.79	-35.21	50.00	3.60	0.91	10.28	Average



Test Engineer :	Amos Zhang	Temperature :	25.3 ~ 26.2℃
		Relative Humidity :	38 ~ 42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

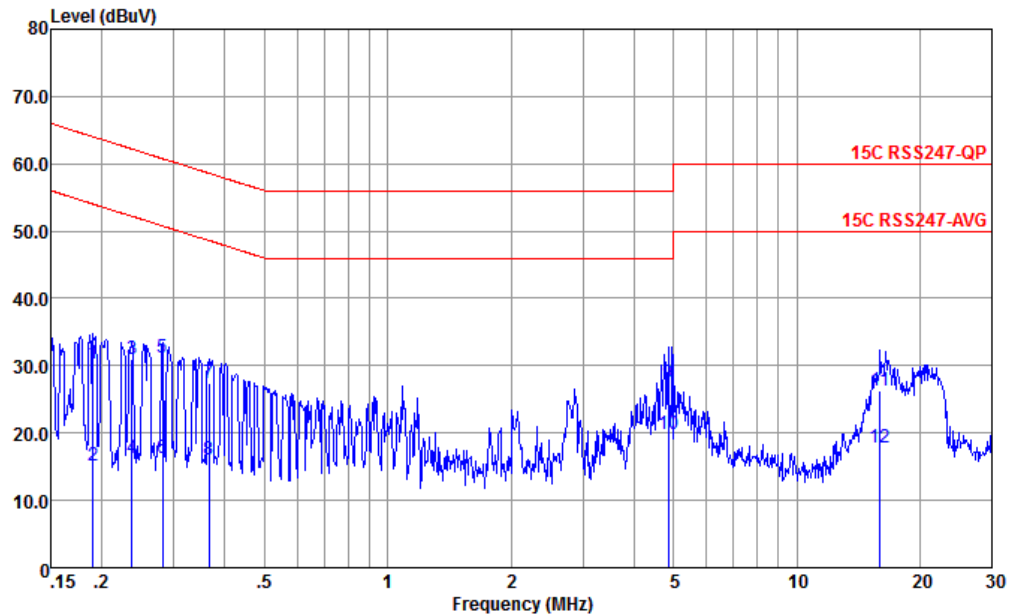

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 24+80 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.190	30.30	-33.72	64.02	19.60	0.24	10.46	QP
2	0.190	15.20	-38.82	54.02	4.50	0.24	10.46	Average
3	0.237	30.93	-31.29	62.22	20.20	0.26	10.47	QP
4	0.237	16.33	-35.89	52.22	5.60	0.26	10.47	Average
5	0.282	31.26	-29.50	60.76	20.51	0.28	10.47	QP
6	0.282	16.36	-34.40	50.76	5.61	0.28	10.47	Average
7	0.365	27.41	-31.20	58.61	16.60	0.32	10.49	QP
8	0.365	16.01	-32.60	48.61	5.20	0.32	10.49	Average
9	4.848	27.40	-28.60	56.00	16.80	0.40	10.20	QP
10 *	4.848	19.80	-26.20	46.00	9.20	0.40	10.20	Average
11	15.970	26.28	-33.72	60.00	15.10	0.90	10.28	QP
12	15.970	17.78	-32.22	50.00	6.60	0.90	10.28	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Jake Zhou	Relative Humidity :	52 ~ 56 %
		Temperature :	22 ~ 25 °C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	-
Mode 5	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-	-
Mode 6	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-	-
Mode 7	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-	-
Mode 8	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-	-
Mode 9	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-	-
Mode 10	2400-2483.5	SISO	802.11n HT20	01	2412	MCS0	-	-
Mode 11	2400-2483.5	SISO	802.11n HT20	06	2437	MCS0	-	-
Mode 12	2400-2483.5	SISO	802.11n HT20	11	2462	MCS0	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
4	802.11b	01	2389.95	41.29	54.00	-12.71	H	AVERAGE	Pass	Band Edge
4	802.11b	01	4824.00	51.84	54.00	-2.16	H	AVERAGE	Pass	Harmonic
5	802.11b	06	-	-	-	-	-	-	-	Band Edge
5	802.11b	06	4874.00	52.55	54.00	-1.45	H	AVERAGE	Pass	Harmonic
6	802.11b	11	2483.50	40.81	54.00	-13.19	H	AVERAGE	Pass	Band Edge
6	802.11b	11	4924.00	51.70	54.00	-2.30	V	AVERAGE	Pass	Harmonic
7	802.11g	01	2389.95	50.89	54.00	-3.11	H	AVERAGE	Pass	Band Edge
7	802.11g	01	4824.00	42.44	54.00	-11.56	H	AVERAGE	Pass	Harmonic
8	802.11g	06	-	-	-	-	-	-	-	Band Edge
8	802.11g	06	4874.00	43.86	54.00	-10.14	H	AVERAGE	Pass	Harmonic
9	802.11g	11	2483.50	53.09	54.00	-0.91	H	AVERAGE	Pass	Band Edge
9	802.11g	11	4924.00	43.16	54.00	-10.84	H	AVERAGE	Pass	Harmonic
10	802.11n HT20	01	2389.95	50.19	54.00	-3.81	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	01	4824.00	38.93	54.00	-15.07	H	AVERAGE	Pass	Harmonic
11	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
11	802.11n HT20	06	4874.00	43.36	54.00	-10.64	H	AVERAGE	Pass	Harmonic
12	802.11n HT20	11	2483.50	53.02	54.00	-0.98	H	AVERAGE	Pass	Band Edge
12	802.11n HT20	11	4924.00	40.64	54.00	-13.36	H	AVERAGE	Pass	Harmonic

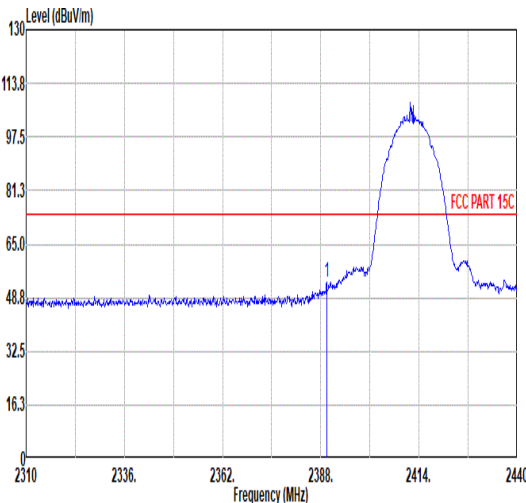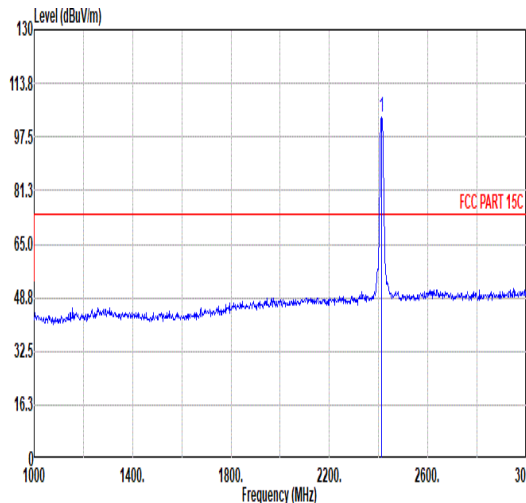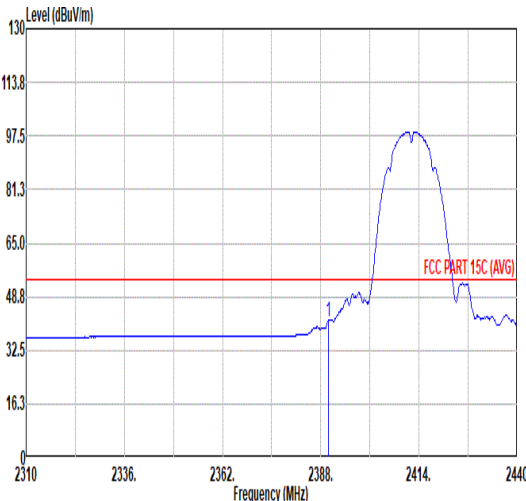
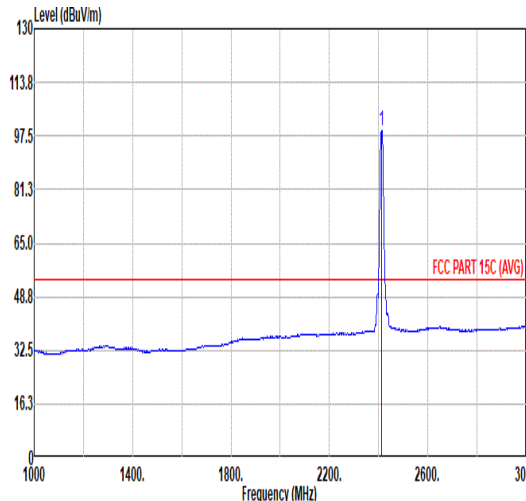


Mode	4																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>45.14</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100 120 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	53.55	74.00	-20.45	45.14	32.48	7.16	37.23	6.00	100 120 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>103.45</td><td>-----</td><td>-----</td><td>95.02</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>100 120 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.45	-----	-----	95.02	32.45	7.20	37.22	6.00	100 120 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.56	53.55	74.00	-20.45	45.14	32.48	7.16	37.23	6.00	100 120 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	103.45	-----	-----	95.02	32.45	7.20	37.22	6.00	100 120 PEAK																																																																																
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>32.88</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100 120 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	41.29	54.00	-12.71	32.88	32.48	7.16	37.23	6.00	100 120 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>98.91</td><td>-----</td><td>-----</td><td>90.48</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>100 120 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.91	-----	-----	90.48	32.45	7.20	37.22	6.00	100 120 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	41.29	54.00	-12.71	32.88	32.48	7.16	37.23	6.00	100 120 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	98.91	-----	-----	90.48	32.45	7.20	37.22	6.00	100 120 AVERAGE																																																																																

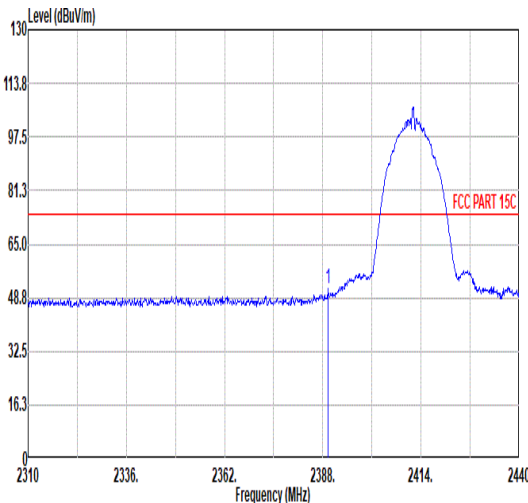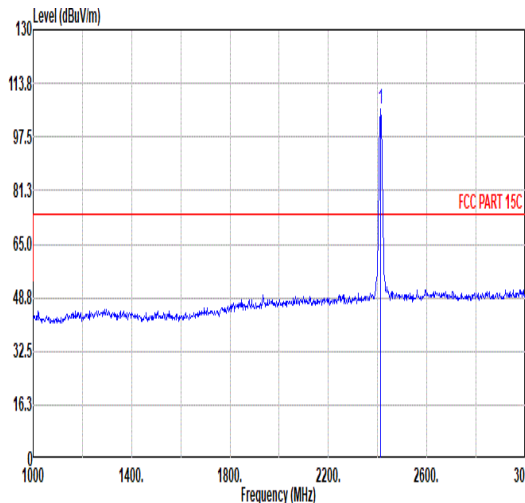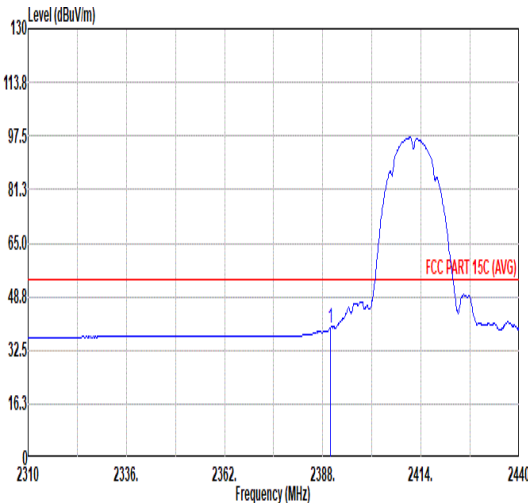
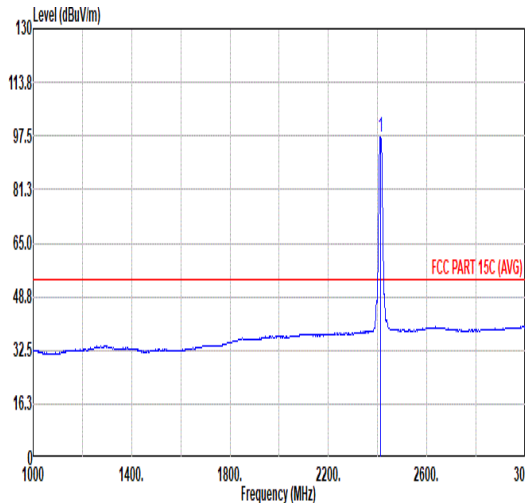


Mode	4																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11b_CH01_2412MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>51.57</td><td>74.00</td><td>-22.43</td><td>43.16</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100</td><td>22 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	51.57	74.00	-22.43	43.16	32.48	7.16	37.23	6.00	100	22 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>105.78</td><td>-----</td><td>-----</td><td>97.35</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>100</td><td>22 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.78	-----	-----	97.35	32.45	7.20	37.22	6.00	100	22 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.43	51.57	74.00	-22.43	43.16	32.48	7.16	37.23	6.00	100	22 PEAK																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	105.78	-----	-----	97.35	32.45	7.20	37.22	6.00	100	22 PEAK																																																																																	
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>39.36</td><td>54.00</td><td>-14.64</td><td>30.95</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100</td><td>22 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	39.36	54.00	-14.64	30.95	32.48	7.16	37.23	6.00	100	22 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>97.09</td><td>-----</td><td>-----</td><td>88.66</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>100</td><td>22 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.09	-----	-----	88.66	32.45	7.20	37.22	6.00	100	22 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.95	39.36	54.00	-14.64	30.95	32.48	7.16	37.23	6.00	100	22 AVERAGE																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	97.09	-----	-----	88.66	32.45	7.20	37.22	6.00	100	22 AVERAGE																																																																																	



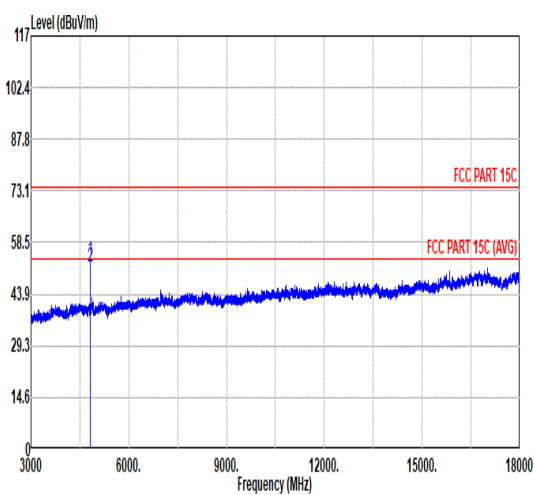
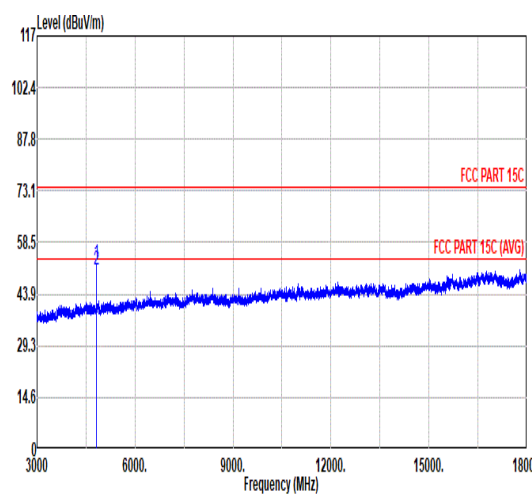


Mode	4																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																													
ANT	SISO																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>74.42</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>104</td><td>207 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>51.84</td><td>54.00</td><td>-2.16</td><td>72.65</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>104</td><td>207 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	53.61	74.00	-20.39	74.42	34.85	10.29	65.95	0.00	104	207 PEAK	2	4824.00	51.84	54.00	-2.16	72.65	34.85	10.29	65.95	0.00	104	207 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>52.53</td><td>74.00</td><td>-21.47</td><td>73.34</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>172</td><td>96 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>50.83</td><td>54.00</td><td>-3.17</td><td>71.64</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>172</td><td>96 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	52.53	74.00	-21.47	73.34	34.85	10.29	65.95	0.00	172	96 PEAK	2	4824.00	50.83	54.00	-3.17	71.64	34.85	10.29	65.95	0.00	172	96 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4824.00	53.61	74.00	-20.39	74.42	34.85	10.29	65.95	0.00	104	207 PEAK																																																																																																																			
2	4824.00	51.84	54.00	-2.16	72.65	34.85	10.29	65.95	0.00	104	207 AVERAGE																																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4824.00	52.53	74.00	-21.47	73.34	34.85	10.29	65.95	0.00	172	96 PEAK																																																																																																																			
2	4824.00	50.83	54.00	-3.17	71.64	34.85	10.29	65.95	0.00	172	96 AVERAGE																																																																																																																			

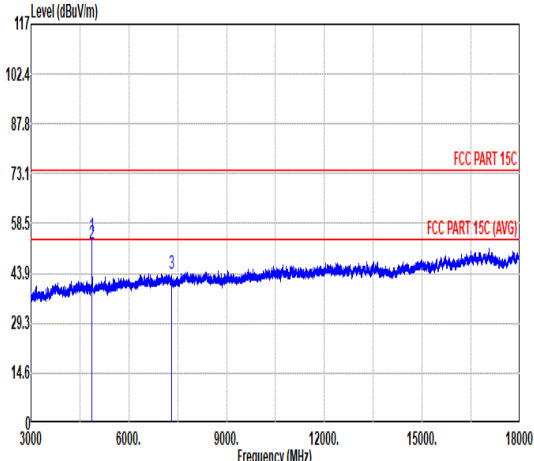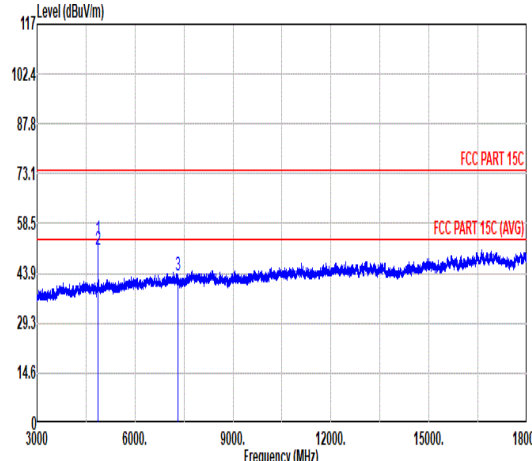

Mode	5																																																																																																																																																															
	Harmonic																																																																																																																																																															
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																															
ANT	SISO																																																																																																																																																															
Pol.	Horizontal										Vertical																																																																																																																																																					
Peak Avg																																																																																																																																																																
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>54.92</td><td>74.00</td><td>-19.08</td><td>75.68</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>105</td><td>205 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>52.55</td><td>54.00</td><td>-1.45</td><td>73.31</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>105</td><td>205 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>43.69</td><td>74.00</td><td>-30.31</td><td>62.04</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	54.92	74.00	-19.08	75.68	34.90	10.34	66.00	0.00	105	205 PEAK	2	4874.00	52.55	54.00	-1.45	73.31	34.90	10.34	66.00	0.00	105	205 AVERAGE	3	7311.00	43.69	74.00	-30.31	62.04	36.42	12.78	67.55	0.00	---	---	PEAK	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>53.70</td><td>74.00</td><td>-20.30</td><td>74.46</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>100</td><td>65 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>50.70</td><td>54.00</td><td>-3.30</td><td>71.46</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>100</td><td>65 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>43.22</td><td>74.00</td><td>-30.78</td><td>61.57</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	53.70	74.00	-20.30	74.46	34.90	10.34	66.00	0.00	100	65 PEAK	2	4874.00	50.70	54.00	-3.30	71.46	34.90	10.34	66.00	0.00	100	65 AVERAGE	3	7311.00	43.22	74.00	-30.78	61.57	36.42	12.78	67.55	0.00	---	---	PEAK
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																				
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																						
1	4874.00	54.92	74.00	-19.08	75.68	34.90	10.34	66.00	0.00	105	205 PEAK																																																																																																																																																					
2	4874.00	52.55	54.00	-1.45	73.31	34.90	10.34	66.00	0.00	105	205 AVERAGE																																																																																																																																																					
3	7311.00	43.69	74.00	-30.31	62.04	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																																				
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																						
1	4874.00	53.70	74.00	-20.30	74.46	34.90	10.34	66.00	0.00	100	65 PEAK																																																																																																																																																					
2	4874.00	50.70	54.00	-3.30	71.46	34.90	10.34	66.00	0.00	100	65 AVERAGE																																																																																																																																																					
3	7311.00	43.22	74.00	-30.78	61.57	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																																				

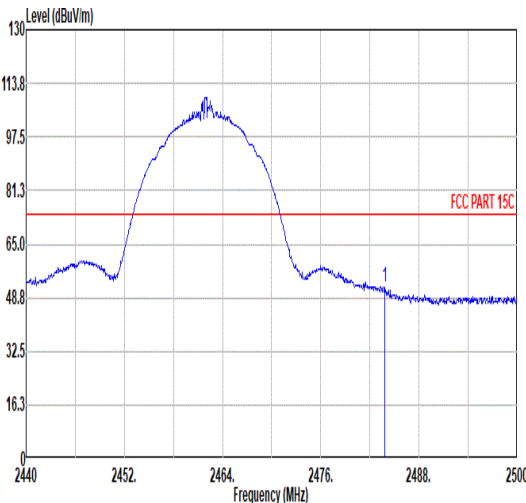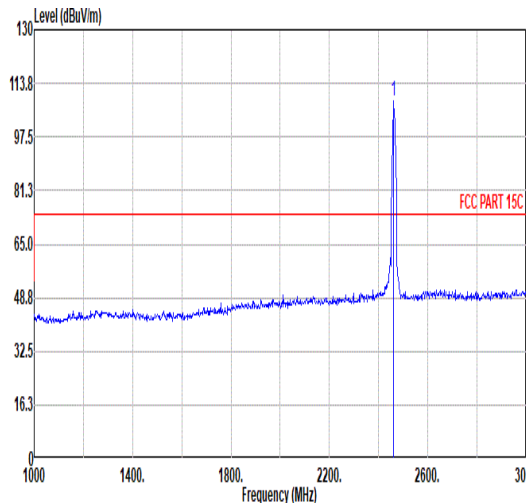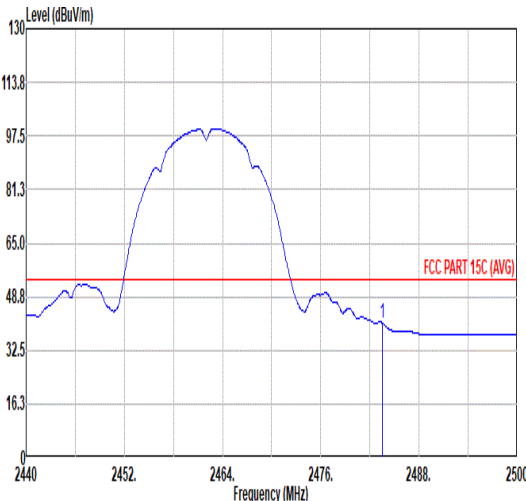
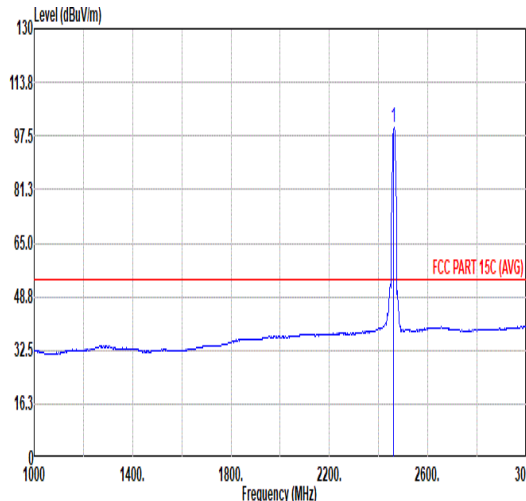


Mode	6																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																
ANT	SISO																																																																																																
Pol.	Horizontal					Fundamental																																																																																											
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.86</td><td>52.86</td><td>74.00</td><td>-21.94</td><td>43.49</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>100 117 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.86	52.86	74.00	-21.94	43.49	32.44	7.33	37.20	6.00	100 117 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.60</td><td>-----</td><td>-----</td><td>100.17</td><td>32.35</td><td>7.29</td><td>37.21</td><td>6.00</td><td>100 117 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.60	-----	-----	100.17	32.35	7.29	37.21	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.86	52.86	74.00	-21.94	43.49	32.44	7.33	37.20	6.00	100 117 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	108.60	-----	-----	100.17	32.35	7.29	37.21	6.00	100 117 PEAK																																																																																							
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>40.81</td><td>54.00</td><td>-13.19</td><td>32.25</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>100 117 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	40.81	54.00	-13.19	32.25	32.43	7.33	37.20	6.00	100 117 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.94</td><td>-----</td><td>-----</td><td>91.49</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>100 117 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.94	-----	-----	91.49	32.36	7.30	37.21	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.50	40.81	54.00	-13.19	32.25	32.43	7.33	37.20	6.00	100 117 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	99.94	-----	-----	91.49	32.36	7.30	37.21	6.00	100 117 AVERAGE																																																																																							



Mode	6																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																						
ANT	SISO																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>49.84</td><td>74.00</td><td>-24.16</td><td>41.28</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>221 270 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	49.84	74.00	-24.16	41.28	32.43	7.33	37.20	6.00	221 270 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.56	49.84	74.00	-24.16	41.28	32.43	7.33	37.20	6.00	221 270 PEAK																																													
Fundamental																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>103.31</td><td>-----</td><td>-----</td><td>94.88</td><td>32.35</td><td>7.29</td><td>37.21</td><td>6.00</td><td>221 270 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.31	-----	-----	94.88	32.35	7.29	37.21	6.00	221 270 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	103.31	-----	-----	94.88	32.35	7.29	37.21	6.00	221 270 PEAK																																													
Avg																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>38.75</td><td>54.00</td><td>-15.25</td><td>30.19</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>221 270 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	38.75	54.00	-15.25	30.19	32.43	7.33	37.20	6.00	221 270 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	38.75	54.00	-15.25	30.19	32.43	7.33	37.20	6.00	221 270 AVERAGE																																													
Fundamental																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>96.51</td><td>-----</td><td>-----</td><td>88.06</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>221 270 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.51	-----	-----	88.06	32.36	7.30	37.21	6.00	221 270 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	96.51	-----	-----	88.06	32.36	7.30	37.21	6.00	221 270 AVERAGE																																													



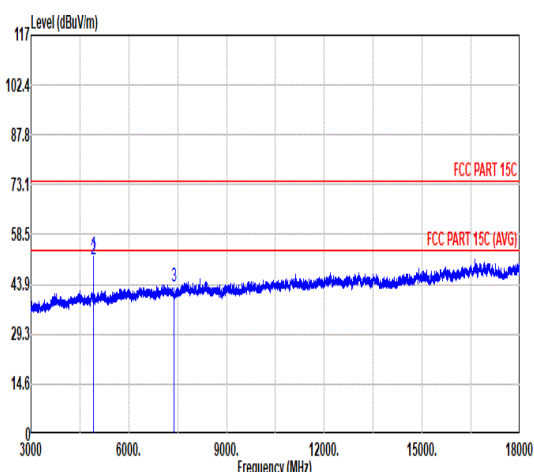
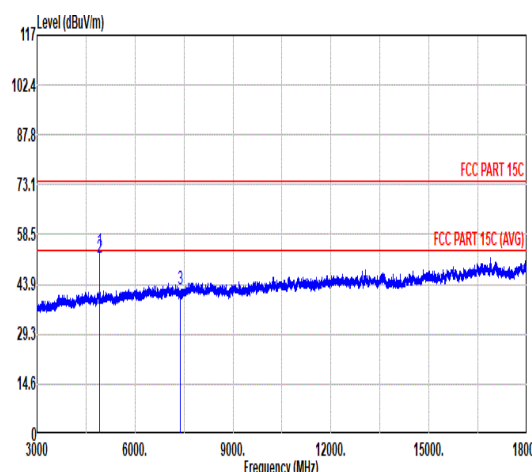


Mode	6																																																																																																																																																											
	Harmonic																																																																																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																											
ANT	SISO																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																					
Peak Avg																																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>52.35</td><td>74.00</td><td>-21.65</td><td>73.18</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>135</td><td>200</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>51.03</td><td>54.00</td><td>-2.97</td><td>71.86</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>135</td><td>200</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>43.06</td><td>74.00</td><td>-30.94</td><td>61.51</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	52.35	74.00	-21.65	73.18	34.85	10.40	66.08	0.00	135	200	PEAK	2	4924.00	51.03	54.00	-2.97	71.86	34.85	10.40	66.08	0.00	135	200	AVERAGE	3	7386.00	43.06	74.00	-30.94	61.51	36.28	12.88	67.61	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>53.34</td><td>74.00</td><td>-20.66</td><td>74.17</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>127</td><td>164</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>51.70</td><td>54.00</td><td>-2.30</td><td>72.53</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>127</td><td>164</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>42.21</td><td>74.00</td><td>-31.79</td><td>60.66</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	53.34	74.00	-20.66	74.17	34.85	10.40	66.08	0.00	127	164	PEAK	2	4924.00	51.70	54.00	-2.30	72.53	34.85	10.40	66.08	0.00	127	164	AVERAGE	3	7386.00	42.21	74.00	-31.79	60.66	36.28	12.88	67.61	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																		
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4924.00	52.35	74.00	-21.65	73.18	34.85	10.40	66.08	0.00	135	200	PEAK																																																																																																																																																
2	4924.00	51.03	54.00	-2.97	71.86	34.85	10.40	66.08	0.00	135	200	AVERAGE																																																																																																																																																
3	7386.00	43.06	74.00	-30.94	61.51	36.28	12.88	67.61	0.00	---	---	PEAK																																																																																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4924.00	53.34	74.00	-20.66	74.17	34.85	10.40	66.08	0.00	127	164	PEAK																																																																																																																																																
2	4924.00	51.70	54.00	-2.30	72.53	34.85	10.40	66.08	0.00	127	164	AVERAGE																																																																																																																																																
3	7386.00	42.21	74.00	-31.79	60.66	36.28	12.88	67.61	0.00	---	---	PEAK																																																																																																																																																



Mode	7																																																								
	Band Edge																																																								
	2400-2483.5_802.11g_CH01_2412MHz																																																								
ANT	SISO																																																								
Pol.	Horizontal						Fundamental																																																		
Peak																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>64.35</td><td>74.00</td><td>-9.65</td><td>55.94</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100</td><td>119 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	64.35	74.00	-9.65	55.94	32.48	7.16	37.23	6.00	100	119 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2389.82	64.35	74.00	-9.65	55.94	32.48	7.16	37.23	6.00	100	119 PEAK																																														
Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.89</td><td>54.00</td><td>-3.11</td><td>42.48</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100</td><td>119 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.89	54.00	-3.11	42.48	32.48	7.16	37.23	6.00	100	119 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2389.95	50.89	54.00	-3.11	42.48	32.48	7.16	37.23	6.00	100	119 AVERAGE																																														
Peak																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.33</td><td>-----</td><td>-----</td><td>96.89</td><td>32.47</td><td>7.19</td><td>37.22</td><td>6.00</td><td>100</td><td>119 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.33	-----	-----	96.89	32.47	7.19	37.22	6.00	100	119 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2412.00	105.33	-----	-----	96.89	32.47	7.19	37.22	6.00	100	119 PEAK																																														
Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>96.47</td><td>-----</td><td>-----</td><td>88.04</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>100</td><td>119 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.47	-----	-----	88.04	32.45	7.20	37.22	6.00	100	119 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2412.00	96.47	-----	-----	88.04	32.45	7.20	37.22	6.00	100	119 AVERAGE																																														

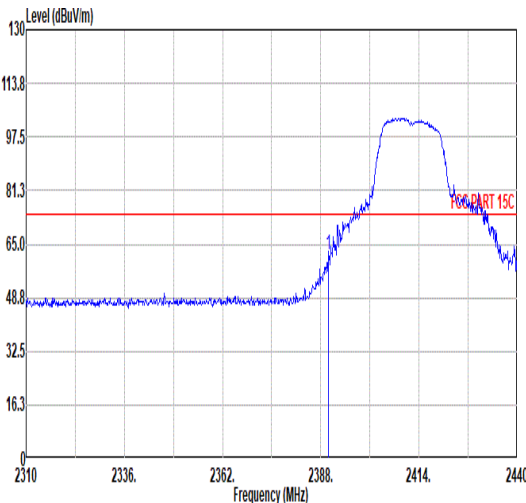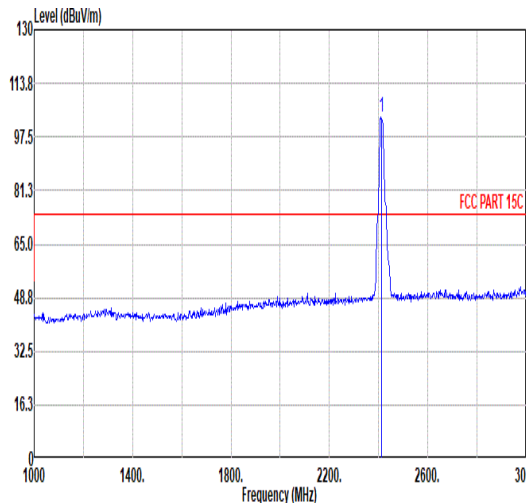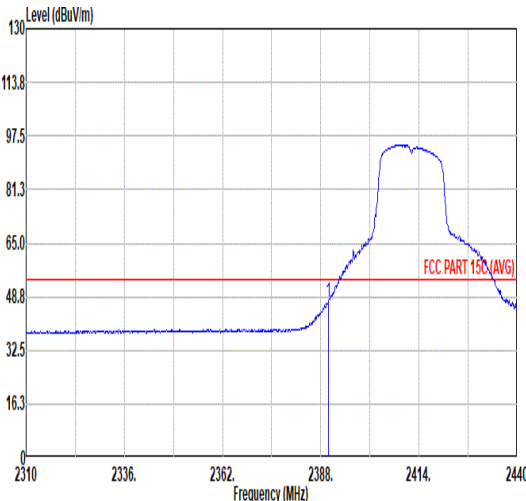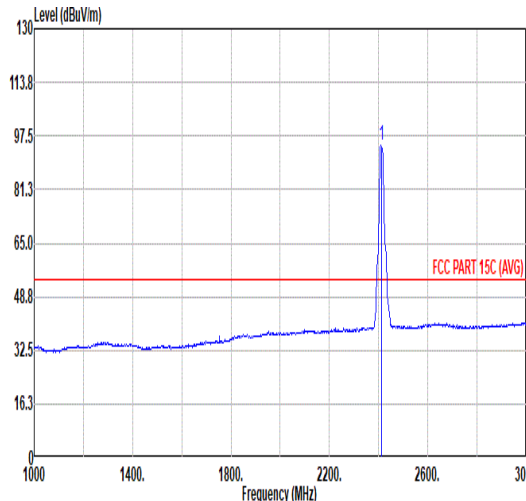

Mode	7																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																				
ANT	SISO																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>61.80</td><td>74.00</td><td>-12.20</td><td>53.39</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100</td><td>23 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	61.80	74.00	-12.20	53.39	32.48	7.16	37.23	6.00	100	23 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.31</td><td>-----</td><td>-----</td><td>94.87</td><td>32.47</td><td>7.19</td><td>37.22</td><td>6.00</td><td>100</td><td>23 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.31	-----	-----	94.87	32.47	7.19	37.22	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.95	61.80	74.00	-12.20	53.39	32.48	7.16	37.23	6.00	100	23 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	103.31	-----	-----	94.87	32.47	7.19	37.22	6.00	100	23 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>46.99</td><td>54.00</td><td>-7.01</td><td>38.58</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100</td><td>23 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.99	54.00	-7.01	38.58	32.48	7.16	37.23	6.00	100	23 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>94.53</td><td>-----</td><td>-----</td><td>86.09</td><td>32.47</td><td>7.19</td><td>37.22</td><td>6.00</td><td>100</td><td>23 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.53	-----	-----	86.09	32.47	7.19	37.22	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.95	46.99	54.00	-7.01	38.58	32.48	7.16	37.23	6.00	100	23 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	94.53	-----	-----	86.09	32.47	7.19	37.22	6.00	100	23 AVERAGE																																																																																										







Mode	7																																																																				
	Harmonic																																																																				
	2400-2483.5_802.11g_CH01_2412MHz																																																																				
ANT	SISO																																																																				
Pol.	Horizontal						Vertical																																																														
Peak Avg																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>50.25</td><td>74.00</td><td>-23.75</td><td>71.06</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>104</td><td>190 PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>63.25</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>104</td><td>190 AVERAGE</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	50.25	74.00	-23.75	71.06	34.85	10.29	65.95	0.00	104	190 PEAK	2	4824.00	42.44	54.00	-11.56	63.25	34.85	10.29	65.95	0.00	104	190 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4824.00	50.25	74.00	-23.75	71.06	34.85	10.29	65.95	0.00	104	190 PEAK																																																										
2	4824.00	42.44	54.00	-11.56	63.25	34.85	10.29	65.95	0.00	104	190 AVERAGE																																																										
<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>45.27</td><td>74.00</td><td>-28.73</td><td>66.08</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.27	74.00	-28.73	66.08	34.85	10.29	65.95	0.00	---	---	PEAK												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4824.00	45.27	74.00	-28.73	66.08	34.85	10.29	65.95	0.00	---	---	PEAK																																																									







Mode	8																																																																																																																																																
	Harmonic																																																																																																																																																
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																
ANT	SISO																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																										
Peak Avg																																																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>52.52</td><td>74.00</td><td>-21.48</td><td>73.28</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>100</td><td>216</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>43.86</td><td>54.00</td><td>-10.14</td><td>64.62</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>100</td><td>216</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>43.09</td><td>74.00</td><td>-30.91</td><td>61.44</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	52.52	74.00	-21.48	73.28	34.90	10.34	66.00	0.00	100	216	PEAK	2	4874.00	43.86	54.00	-10.14	64.62	34.90	10.34	66.00	0.00	100	216	AVERAGE	3	7311.00	43.09	74.00	-30.91	61.44	36.42	12.78	67.55	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>45.82</td><td>74.00</td><td>-28.18</td><td>66.58</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.20</td><td>74.00</td><td>-30.80</td><td>61.55</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	45.82	74.00	-28.18	66.58	34.90	10.34	66.00	0.00	---	---	PEAK	2	7311.00	43.20	74.00	-30.80	61.55	36.42	12.78	67.55	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																							
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	4874.00	52.52	74.00	-21.48	73.28	34.90	10.34	66.00	0.00	100	216	PEAK																																																																																																																																					
2	4874.00	43.86	54.00	-10.14	64.62	34.90	10.34	66.00	0.00	100	216	AVERAGE																																																																																																																																					
3	7311.00	43.09	74.00	-30.91	61.44	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																						
1	4874.00	45.82	74.00	-28.18	66.58	34.90	10.34	66.00	0.00	---	---	PEAK																																																																																																																																					
2	7311.00	43.20	74.00	-30.80	61.55	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																					

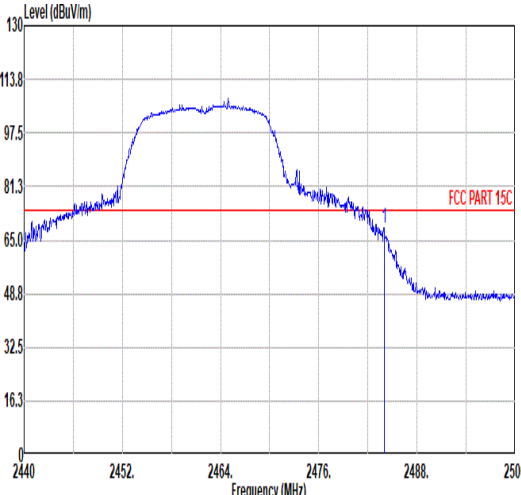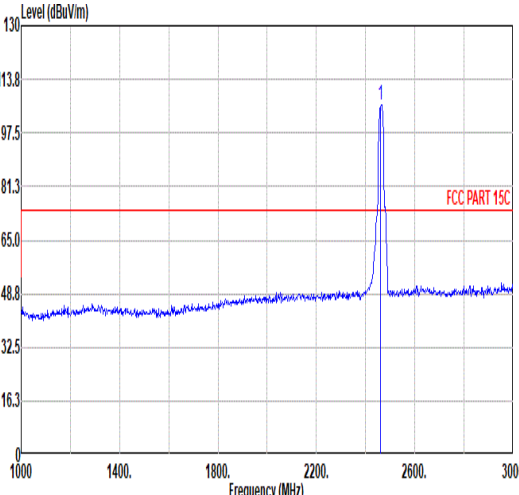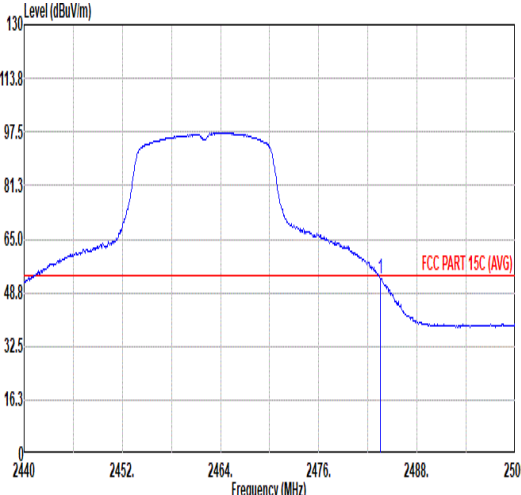
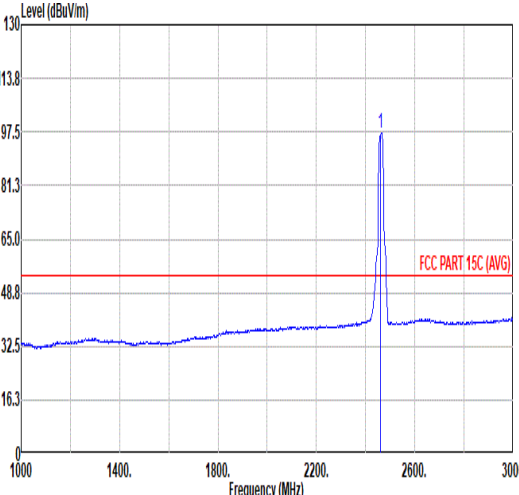


		9																																																																																																												
Mode		Band Edge																																																																																																												
		2400-2483.5_802.11g_CH11_2462MHz																																																																																																												
ANT		SISO																																																																																																												
Pol.	Horizontal										Fundamental																																																																																																			
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.98</td><td>68.79</td><td>74.00</td><td>-5.21</td><td>60.22</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>100</td><td>116 PEAK</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.98	68.79	74.00	-5.21	60.22	32.44	7.33	37.20	6.00	100	116 PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>105.99</td><td>-----</td><td>-----</td><td>97.54</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>100</td><td>116 PEAK</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.99	-----	-----	97.54	32.36	7.30	37.21	6.00	100	116 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.98	68.79	74.00	-5.21	60.22	32.44	7.33	37.20	6.00	100	116 PEAK																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2462.00	105.99	-----	-----	97.54	32.36	7.30	37.21	6.00	100	116 PEAK																																																																																																			
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>53.09</td><td>54.00</td><td>-0.91</td><td>44.53</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>100</td><td>116 AVERAGE</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	53.09	54.00	-0.91	44.53	32.43	7.33	37.20	6.00	100	116 AVERAGE	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>97.08</td><td>-----</td><td>-----</td><td>88.63</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>100</td><td>116 AVERAGE</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.08	-----	-----	88.63	32.36	7.30	37.21	6.00	100	116 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.50	53.09	54.00	-0.91	44.53	32.43	7.33	37.20	6.00	100	116 AVERAGE																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2462.00	97.08	-----	-----	88.63	32.36	7.30	37.21	6.00	100	116 AVERAGE																																																																																																			

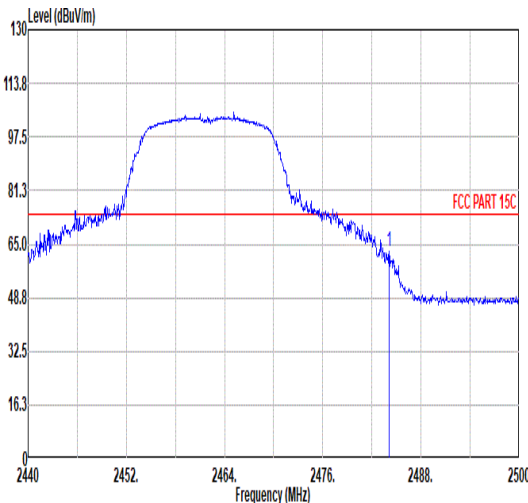
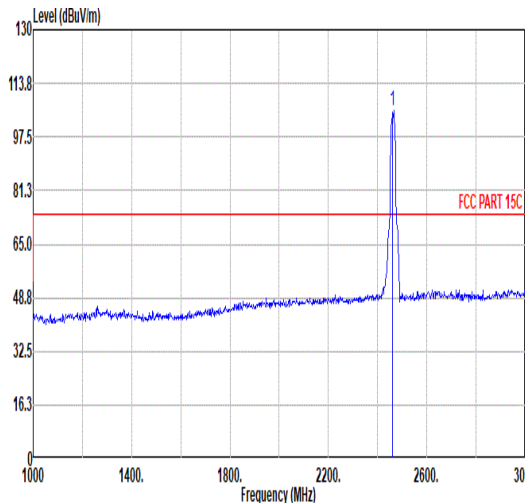
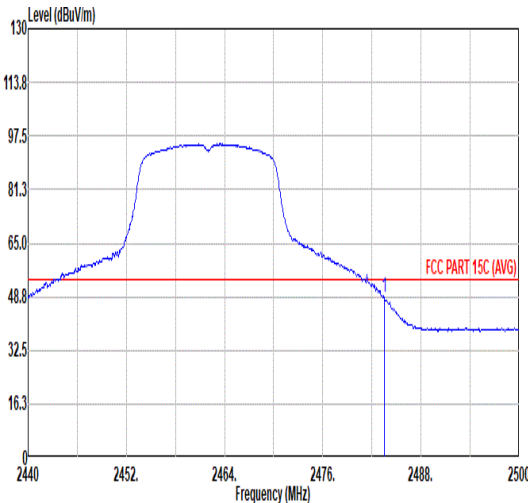
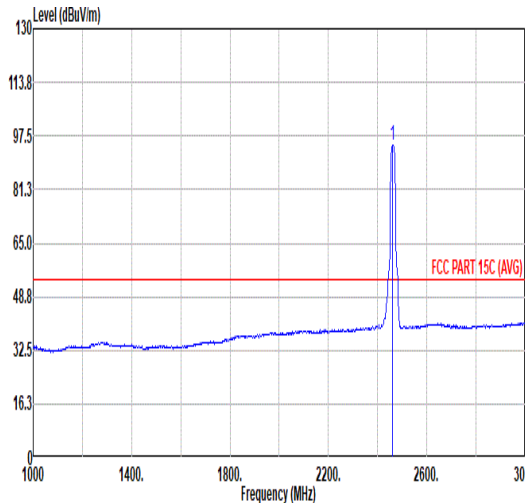


		9																																																																																								
Mode		Band Edge																																																																																								
		2400-2483.5_802.11g_CH11_2462MHz																																																																																								
ANT		SISO																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak																																																																																										
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.10	62.58	74.00	-11.42	54.01	32.44	7.33	37.20	6.00	129	140 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>105.41</td><td>-----</td><td>-----</td><td>96.96</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>129</td><td>140 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	105.41	-----	-----	96.96	32.36	7.30	37.21	6.00	129
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2484.10	62.58	74.00	-11.42	54.01	32.44	7.33	37.20	6.00	129	140 PEAK																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2462.00	105.41	-----	-----	96.96	32.36	7.30	37.21	6.00	129	140 PEAK																																																																															
Avg																																																																																										
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	48.38	54.00	-5.62	39.82	32.43	7.33	37.20	6.00	129	140 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>94.86</td><td>-----</td><td>-----</td><td>86.41</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>129</td><td>140 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	94.86	-----	-----	86.41	32.36	7.30	37.21	6.00	129
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2483.50	48.38	54.00	-5.62	39.82	32.43	7.33	37.20	6.00	129	140 AVERAGE																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2462.00	94.86	-----	-----	86.41	32.36	7.30	37.21	6.00	129	140 AVERAGE																																																																															



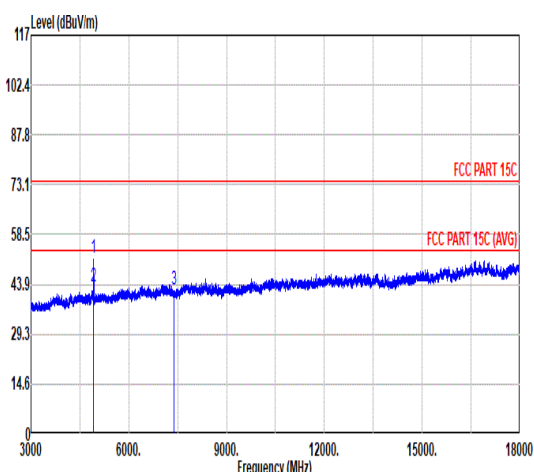
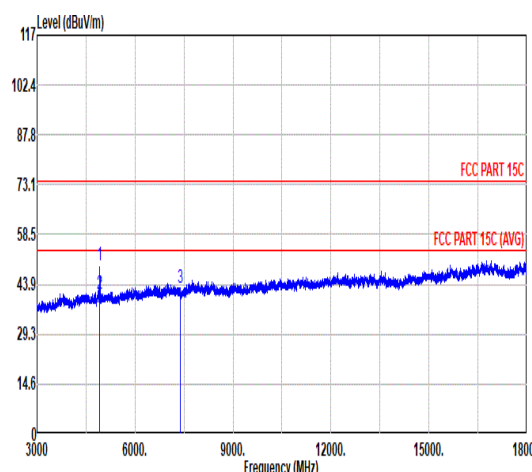


Mode	9																																																																																																																																																											
	Harmonic																																																																																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																											
ANT	SISO																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																					
Peak Avg																																																																																																																																																												
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>51.62</td><td>74.00</td><td>-22.38</td><td>72.45</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>144</td><td>199 PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>43.16</td><td>54.00</td><td>-10.84</td><td>63.99</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>144</td><td>199 AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>42.34</td><td>74.00</td><td>-31.66</td><td>60.79</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	51.62	74.00	-22.38	72.45	34.85	10.40	66.08	0.00	144	199 PEAK	2	4924.00	43.16	54.00	-10.84	63.99	34.85	10.40	66.08	0.00	144	199 AVERAGE	3	7386.00	42.34	74.00	-31.66	60.79	36.28	12.88	67.61	0.00	---	---	PEAK	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>70.46</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>300</td><td>360 PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>62.01</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>300</td><td>360 AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>42.85</td><td>74.00</td><td>-31.15</td><td>61.30</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>								Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	49.63	74.00	-24.37	70.46	34.85	10.40	66.08	0.00	300	360 PEAK	2	4924.00	41.18	54.00	-12.82	62.01	34.85	10.40	66.08	0.00	300	360 AVERAGE	3	7386.00	42.85	74.00	-31.15	61.30	36.28	12.88	67.61	0.00	---	---	PEAK
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4924.00	51.62	74.00	-22.38	72.45	34.85	10.40	66.08	0.00	144	199 PEAK																																																																																																																																																	
2	4924.00	43.16	54.00	-10.84	63.99	34.85	10.40	66.08	0.00	144	199 AVERAGE																																																																																																																																																	
3	7386.00	42.34	74.00	-31.66	60.79	36.28	12.88	67.61	0.00	---	---	PEAK																																																																																																																																																
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4924.00	49.63	74.00	-24.37	70.46	34.85	10.40	66.08	0.00	300	360 PEAK																																																																																																																																																	
2	4924.00	41.18	54.00	-12.82	62.01	34.85	10.40	66.08	0.00	300	360 AVERAGE																																																																																																																																																	
3	7386.00	42.85	74.00	-31.15	61.30	36.28	12.88	67.61	0.00	---	---	PEAK																																																																																																																																																

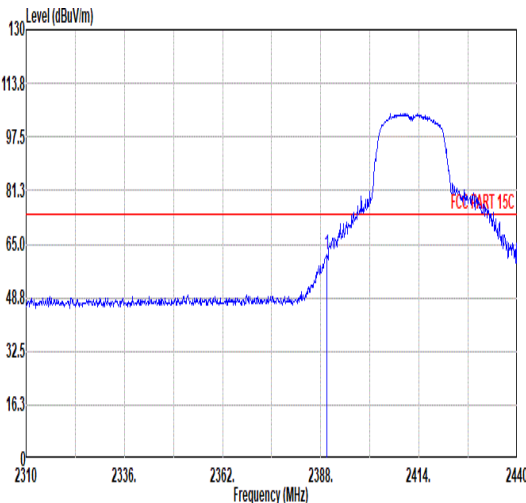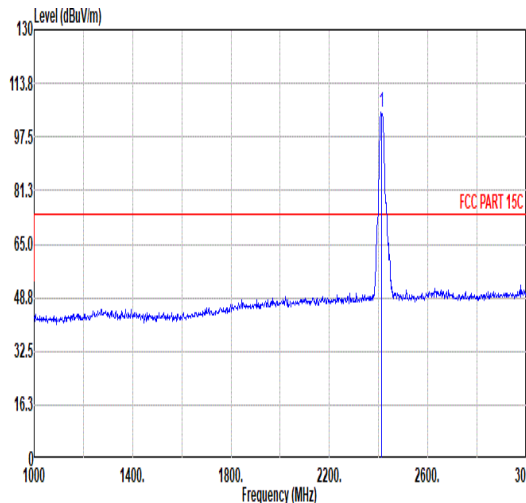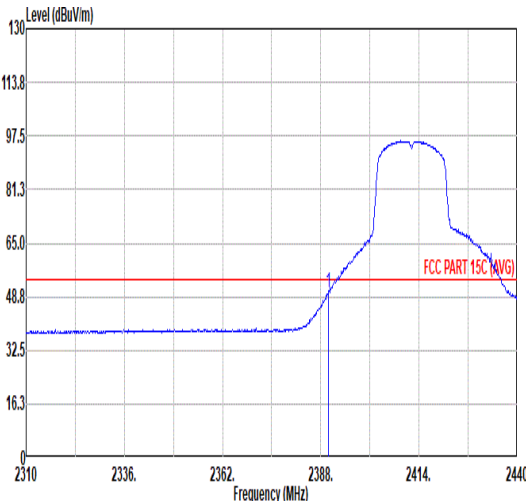
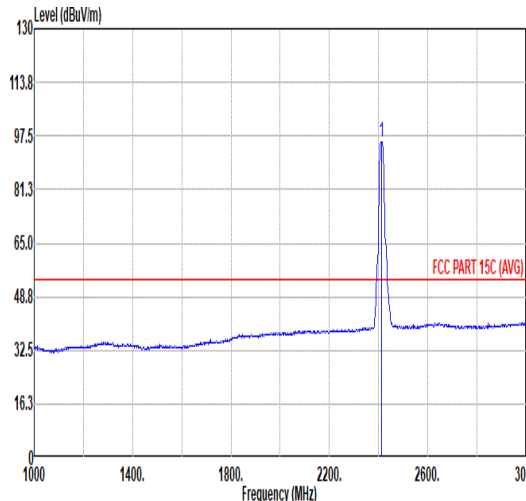


Mode	10																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																
ANT	SISO																																																																																																
Pol.	Horizontal					Fundamental																																																																																											
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>61.87</td><td>74.00</td><td>-12.13</td><td>53.46</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>126 349 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	61.87	74.00	-12.13	53.46	32.48	7.16	37.23	6.00	126 349 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.00</td><td>-----</td><td>-----</td><td>96.64</td><td>32.46</td><td>7.20</td><td>37.22</td><td>6.00</td><td>126 349 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.00	-----	-----	96.64	32.46	7.20	37.22	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.56	61.87	74.00	-12.13	53.46	32.48	7.16	37.23	6.00	126 349 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	105.00	-----	-----	96.64	32.46	7.20	37.22	6.00	126 349 PEAK																																																																																							
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.19</td><td>54.00</td><td>-3.81</td><td>41.78</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>126 349 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.19	54.00	-3.81	41.78	32.48	7.16	37.23	6.00	126 349 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.79</td><td>-----</td><td>-----</td><td>87.35</td><td>32.46</td><td>7.20</td><td>37.22</td><td>6.00</td><td>126 349 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.79	-----	-----	87.35	32.46	7.20	37.22	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.95	50.19	54.00	-3.81	41.78	32.48	7.16	37.23	6.00	126 349 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	95.79	-----	-----	87.35	32.46	7.20	37.22	6.00	126 349 AVERAGE																																																																																							

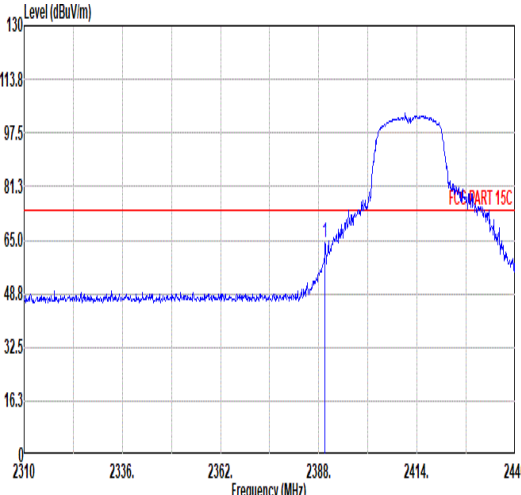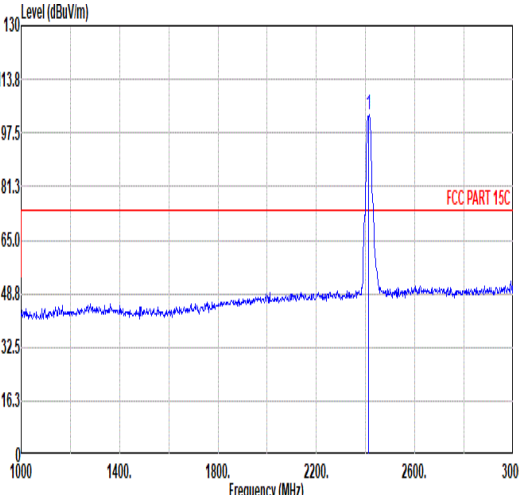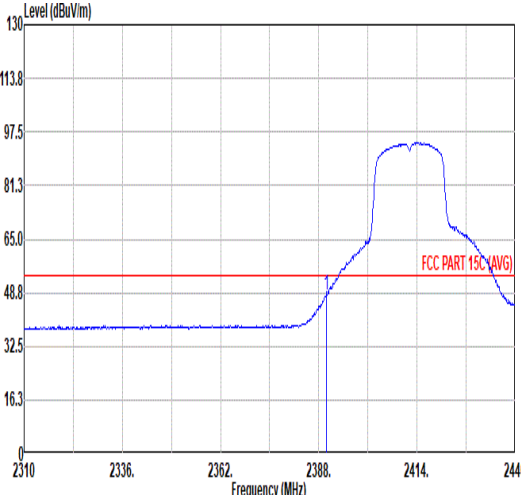
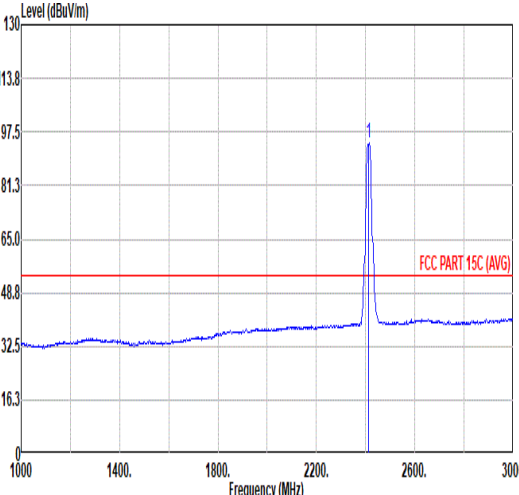


Mode	10																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																				
ANT	SISO																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>64.08</td><td>74.00</td><td>-9.92</td><td>55.67</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>339</td><td>65 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	64.08	74.00	-9.92	55.67	32.48	7.16	37.23	6.00	339	65 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>103.03</td><td>-----</td><td>-----</td><td>94.60</td><td>32.44</td><td>7.21</td><td>37.22</td><td>6.00</td><td>339</td><td>65 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.03	-----	-----	94.60	32.44	7.21	37.22	6.00	339
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.69	64.08	74.00	-9.92	55.67	32.48	7.16	37.23	6.00	339	65 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	103.03	-----	-----	94.60	32.44	7.21	37.22	6.00	339	65 PEAK																																																																																										
Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>48.09</td><td>54.00</td><td>-5.91</td><td>39.68</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>339</td><td>65 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.09	54.00	-5.91	39.68	32.48	7.16	37.23	6.00	339	65 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>94.11</td><td>-----</td><td>-----</td><td>85.68</td><td>32.44</td><td>7.21</td><td>37.22</td><td>6.00</td><td>339</td><td>65 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.11	-----	-----	85.68	32.44	7.21	37.22	6.00	339
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.95	48.09	54.00	-5.91	39.68	32.48	7.16	37.23	6.00	339	65 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	94.11	-----	-----	85.68	32.44	7.21	37.22	6.00	339	65 AVERAGE																																																																																										



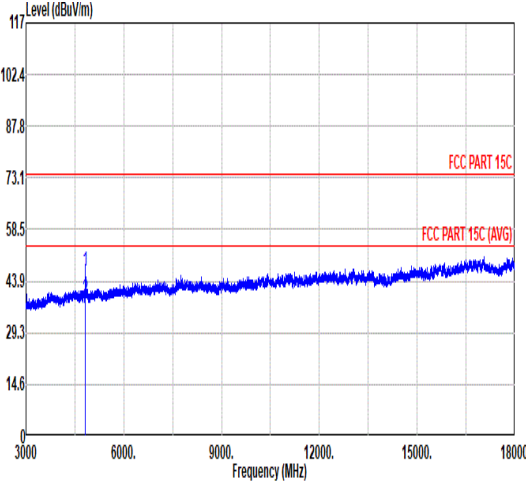
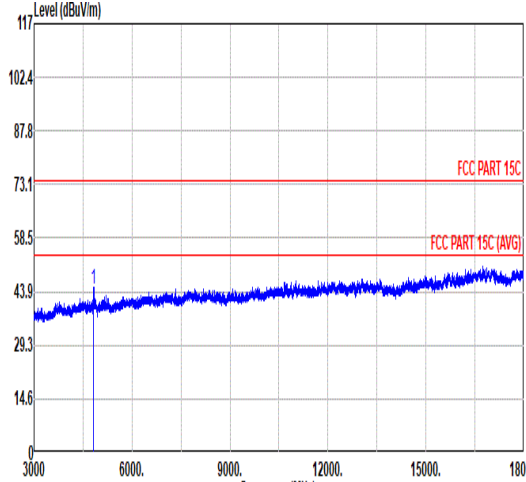


		10																																																																																																																																			
Mode		Harmonic																																																																																																																																			
		2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																																			
ANT		SISO																																																																																																																																			
Pol.		Horizontal						Vertical																																																																																																																													
Peak Avg																																																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>46.97</td><td>74.00</td><td>-27.03</td><td>67.78</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>100</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>38.93</td><td>54.00</td><td>-15.07</td><td>59.74</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>100</td><td>360</td><td>AVERAGE</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	46.97	74.00	-27.03	67.78	34.85	10.29	65.95	0.00	100	360	PEAK	2	4824.00	38.93	54.00	-15.07	59.74	34.85	10.29	65.95	0.00	100	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.73</td><td>74.00</td><td>-29.27</td><td>65.54</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.73	74.00	-29.27	65.54	34.85	10.29	65.95	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	4824.00	46.97	74.00	-27.03	67.78	34.85	10.29	65.95	0.00	100	360	PEAK																																																																																																																									
2	4824.00	38.93	54.00	-15.07	59.74	34.85	10.29	65.95	0.00	100	360	AVERAGE																																																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	4824.00	44.73	74.00	-29.27	65.54	34.85	10.29	65.95	0.00	---	---	PEAK																																																																																																																									



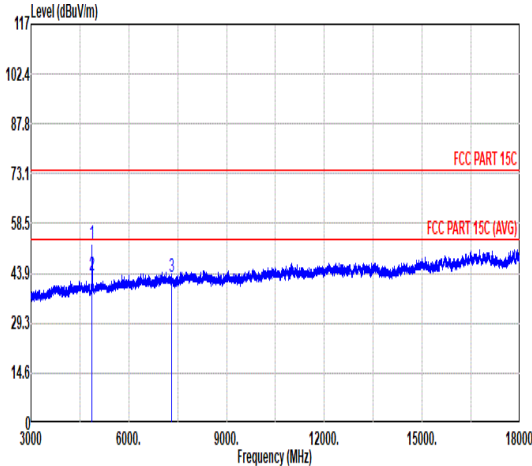
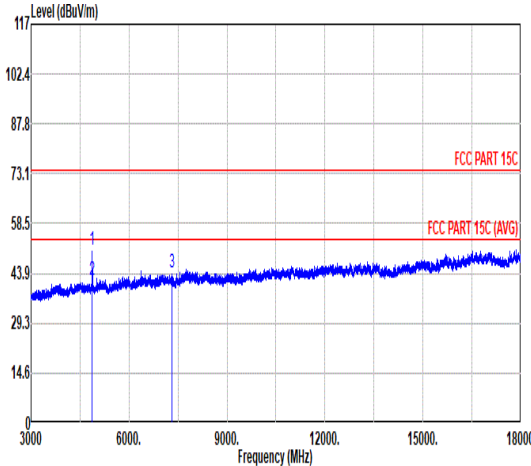


Mode	11																																																																																																																																																									
	Harmonic																																																																																																																																																									
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																									
ANT	SISO																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																			
Peak Avg																																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>4874.00</td><td>52.62</td><td>74.00</td><td>-21.38</td><td>73.38</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>112</td><td>202 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>43.36</td><td>54.00</td><td>-10.64</td><td>64.12</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>112</td><td>202 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>42.87</td><td>74.00</td><td>-31.13</td><td>61.22</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	52.62	74.00	-21.38	73.38	34.90	10.34	66.00	0.00	112	202 PEAK	2	4874.00	43.36	54.00	-10.64	64.12	34.90	10.34	66.00	0.00	112	202 AVERAGE	3	7311.00	42.87	74.00	-31.13	61.22	36.42	12.78	67.55	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>4874.00</td><td>50.67</td><td>74.00</td><td>-23.33</td><td>71.43</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>104</td><td>140 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>41.79</td><td>54.00</td><td>-12.21</td><td>62.55</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>104</td><td>140 AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>44.09</td><td>74.00</td><td>-29.91</td><td>62.44</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	50.67	74.00	-23.33	71.43	34.90	10.34	66.00	0.00	104	140 PEAK	2	4874.00	41.79	54.00	-12.21	62.55	34.90	10.34	66.00	0.00	104	140 AVERAGE	3	7311.00	44.09	74.00	-29.91	62.44	36.42	12.78	67.55	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																															
1	4874.00	52.62	74.00	-21.38	73.38	34.90	10.34	66.00	0.00	112	202 PEAK																																																																																																																																															
2	4874.00	43.36	54.00	-10.64	64.12	34.90	10.34	66.00	0.00	112	202 AVERAGE																																																																																																																																															
3	7311.00	42.87	74.00	-31.13	61.22	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																															
1	4874.00	50.67	74.00	-23.33	71.43	34.90	10.34	66.00	0.00	104	140 PEAK																																																																																																																																															
2	4874.00	41.79	54.00	-12.21	62.55	34.90	10.34	66.00	0.00	104	140 AVERAGE																																																																																																																																															
3	7311.00	44.09	74.00	-29.91	62.44	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																														

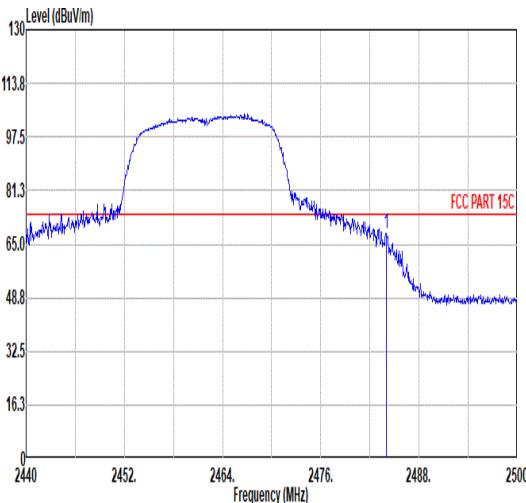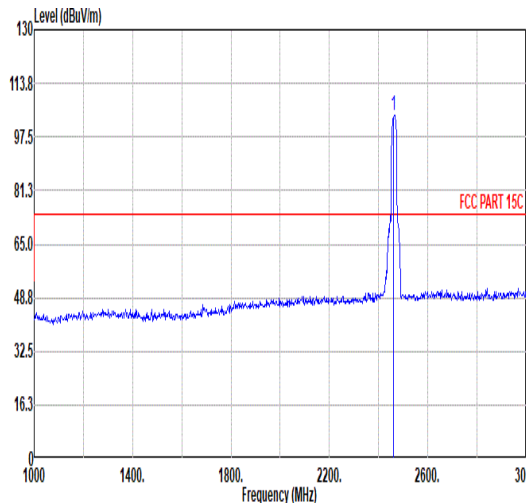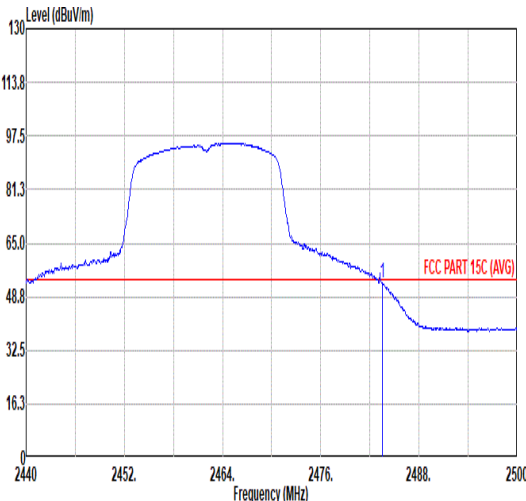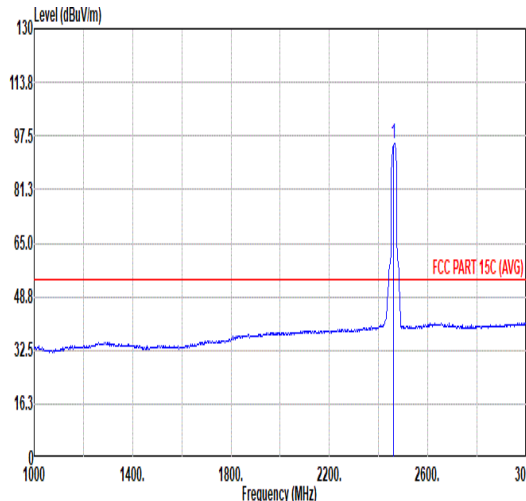

Mode	12																																																							
	Band Edge																																																							
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																							
ANT	SISO																																																							
Pol.	Horizontal																																																							
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.98</td><td>68.30</td><td>74.00</td><td>-5.70</td><td>59.73</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>121</td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.98	68.30	74.00	-5.70	59.73	32.44	7.33	37.20	6.00	121	0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.98	68.30	74.00	-5.70	59.73	32.44	7.33	37.20	6.00	121	0 PEAK																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.04</td><td>-----</td><td>95.59</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>121</td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.04	-----	95.59	32.36	7.30	37.21	6.00	121	0 PEAK	
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2462.00	104.04	-----	95.59	32.36	7.30	37.21	6.00	121	0 PEAK																																														
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>53.02</td><td>54.00</td><td>-0.98</td><td>44.46</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>121</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	53.02	54.00	-0.98	44.46	32.43	7.33	37.20	6.00	121	0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.50	53.02	54.00	-0.98	44.46	32.43	7.33	37.20	6.00	121	0 AVERAGE																																													
Fundamental																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>95.28</td><td>-----</td><td>86.83</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>121</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.28	-----	86.83	32.36	7.30	37.21	6.00	121	0 AVERAGE	
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2462.00	95.28	-----	86.83	32.36	7.30	37.21	6.00	121	0 AVERAGE																																														

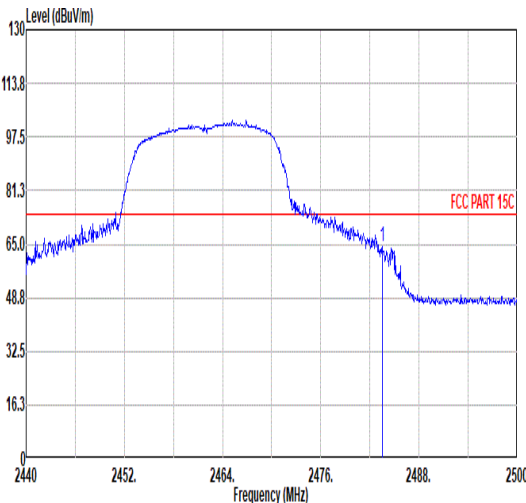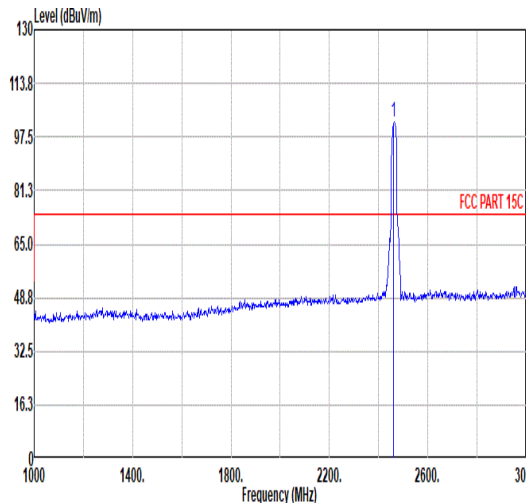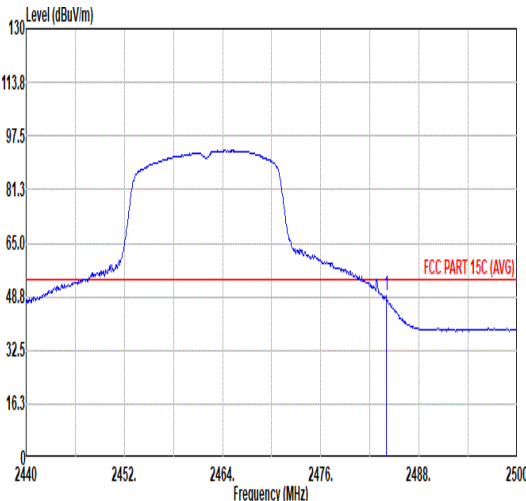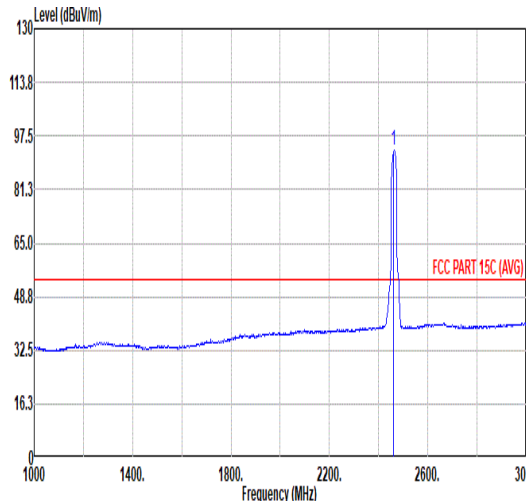

		12																																																																																																													
Mode		Band Edge																																																																																																													
		2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																													
ANT		SISO																																																																																																													
Pol.		Fundamental																																																																																																													
Peak	Vertical											Fundamental																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>64.07</td><td>74.00</td><td>-9.93</td><td>55.51</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>291</td><td>53 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	64.07	74.00	-9.93	55.51	32.43	7.33	37.20	6.00	291	53 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.87</td><td>-----</td><td>-----</td><td>93.42</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>291</td><td>53 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.87	-----	-----	93.42	32.36	7.30	37.21	6.00	291
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.50	64.07	74.00	-9.93	55.51	32.43	7.33	37.20	6.00	291	53 PEAK																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	101.87	-----	-----	93.42	32.36	7.30	37.21	6.00	291	53 PEAK																																																																																																				
Avg	Vertical											Fundamental																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.98</td><td>49.10</td><td>54.00</td><td>-4.90</td><td>40.53</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>291</td><td>53 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.98	49.10	54.00	-4.90	40.53	32.44	7.33	37.20	6.00	291	53 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.97</td><td>-----</td><td>-----</td><td>84.52</td><td>32.36</td><td>7.30</td><td>37.21</td><td>6.00</td><td>291</td><td>53 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.97	-----	-----	84.52	32.36	7.30	37.21	6.00	291
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.98	49.10	54.00	-4.90	40.53	32.44	7.33	37.20	6.00	291	53 AVERAGE																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	92.97	-----	-----	84.52	32.36	7.30	37.21	6.00	291	53 AVERAGE																																																																																																				





		12																																																																																						
Mode		Harmonic																																																																																						
		2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																						
ANT		SISO																																																																																						
Pol.		Horizontal						Vertical																																																																																
Peak Avg																																																																																								
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>50.65</td><td>74.00</td><td>-23.35</td><td>71.48</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>159</td><td>209</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>40.64</td><td>54.00</td><td>-13.36</td><td>61.47</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>159</td><td>209</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>42.10</td><td>74.00</td><td>-31.90</td><td>60.55</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>																Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	50.65	74.00	-23.35	71.48	34.85	10.40	66.08	0.00	159	209	PEAK	2	4924.00	40.64	54.00	-13.36	61.47	34.85	10.40	66.08	0.00	159	209	AVERAGE	3	7386.00	42.10	74.00	-31.90	60.55	36.28	12.88	67.61	0.00	---	---	PEAK
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	4924.00	50.65	74.00	-23.35	71.48	34.85	10.40	66.08	0.00	159	209	PEAK																																																																												
2	4924.00	40.64	54.00	-13.36	61.47	34.85	10.40	66.08	0.00	159	209	AVERAGE																																																																												
3	7386.00	42.10	74.00	-31.90	60.55	36.28	12.88	67.61	0.00	---	---	PEAK																																																																												
<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>46.36</td><td>74.00</td><td>-27.64</td><td>67.19</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>36.62</td><td>54.00</td><td>-17.38</td><td>57.45</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>300</td><td>360</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>42.73</td><td>74.00</td><td>-31.27</td><td>61.18</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>																Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	46.36	74.00	-27.64	67.19	34.85	10.40	66.08	0.00	300	360	PEAK	2	4924.00	36.62	54.00	-17.38	57.45	34.85	10.40	66.08	0.00	300	360	AVERAGE	3	7386.00	42.73	74.00	-31.27	61.18	36.28	12.88	67.61	0.00	---	---	PEAK	
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	4924.00	46.36	74.00	-27.64	67.19	34.85	10.40	66.08	0.00	300	360	PEAK																																																																												
2	4924.00	36.62	54.00	-17.38	57.45	34.85	10.40	66.08	0.00	300	360	AVERAGE																																																																												
3	7386.00	42.73	74.00	-31.27	61.18	36.28	12.88	67.61	0.00	---	---	PEAK																																																																												



Mode	9	
	18G-25G	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg	Level (dBuV/m) Frequency (MHz) FCC PART 15C -50dB FCC PART 15C (AVG) -50dB	Level (dBuV/m) Frequency (MHz) FCC PART 15C -50dB FCC PART 15C (AVG) -50dB

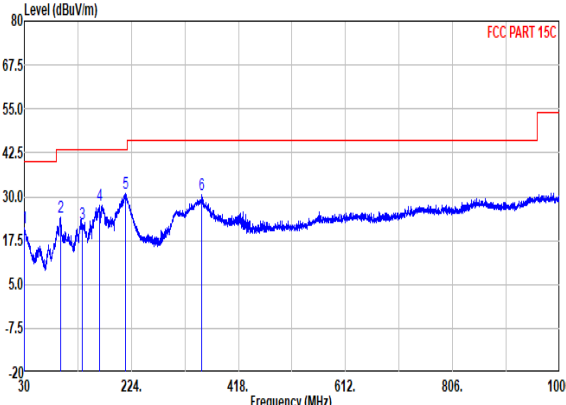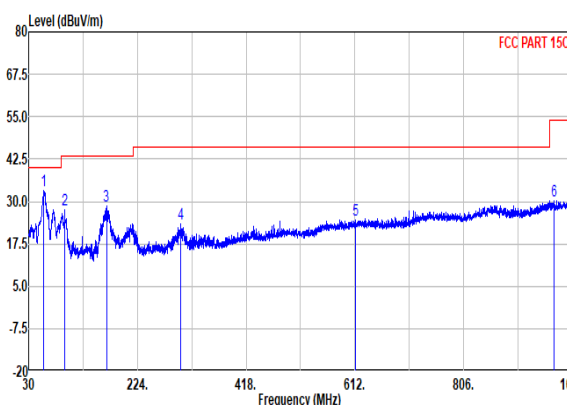


Mode	9																																																																																																																																																																																																																																									
	LF																																																																																																																																																																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																																																																																									
ANT	SISO																																																																																																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																																																																																																			
QP																																																																																																																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.24</td><td>21.16</td><td>40.00</td><td>-18.84</td><td>27.52</td><td>25.02</td><td>0.83</td><td>32.21</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>96.20</td><td>24.05</td><td>43.50</td><td>-19.45</td><td>39.14</td><td>15.43</td><td>1.50</td><td>32.02</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>134.76</td><td>22.11</td><td>43.50</td><td>-21.39</td><td>34.91</td><td>17.50</td><td>1.76</td><td>32.06</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>166.29</td><td>27.45</td><td>43.50</td><td>-16.05</td><td>41.85</td><td>15.71</td><td>1.96</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>213.82</td><td>30.95</td><td>43.50</td><td>-12.55</td><td>45.77</td><td>14.98</td><td>2.22</td><td>32.02</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>351.07</td><td>30.41</td><td>46.00</td><td>-15.59</td><td>39.29</td><td>20.25</td><td>2.85</td><td>31.98</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.24	21.16	40.00	-18.84	27.52	25.02	0.83	32.21	0.00	---	---	Peak	2	96.20	24.05	43.50	-19.45	39.14	15.43	1.50	32.02	0.00	---	---	Peak	3	134.76	22.11	43.50	-21.39	34.91	17.50	1.76	32.06	0.00	---	---	Peak	4	166.29	27.45	43.50	-16.05	41.85	15.71	1.96	32.07	0.00	---	---	Peak	5	213.82	30.95	43.50	-12.55	45.77	14.98	2.22	32.02	0.00	---	---	Peak	6	351.07	30.41	46.00	-15.59	39.29	20.25	2.85	31.98	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>56.43</td><td>33.29</td><td>40.00</td><td>-6.71</td><td>52.06</td><td>12.16</td><td>1.14</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>94.75</td><td>27.46</td><td>43.50</td><td>-16.04</td><td>42.74</td><td>15.24</td><td>1.49</td><td>32.01</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>168.71</td><td>28.85</td><td>43.50</td><td>-14.65</td><td>43.44</td><td>15.51</td><td>1.97</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>301.36</td><td>23.32</td><td>46.00</td><td>-22.68</td><td>33.79</td><td>19.15</td><td>2.67</td><td>32.29</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>613.46</td><td>24.58</td><td>46.00</td><td>-21.42</td><td>26.92</td><td>25.87</td><td>3.78</td><td>31.99</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>967.02</td><td>30.31</td><td>54.00</td><td>-23.69</td><td>25.31</td><td>30.79</td><td>4.72</td><td>30.51</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	56.43	33.29	40.00	-6.71	52.06	12.16	1.14	32.07	0.00	---	---	Peak	2	94.75	27.46	43.50	-16.04	42.74	15.24	1.49	32.01	0.00	---	---	Peak	3	168.71	28.85	43.50	-14.65	43.44	15.51	1.97	32.07	0.00	---	---	Peak	4	301.36	23.32	46.00	-22.68	33.79	19.15	2.67	32.29	0.00	---	---	Peak	5	613.46	24.58	46.00	-21.42	26.92	25.87	3.78	31.99	0.00	---	---	Peak	6	967.02	30.31	54.00	-23.69	25.31	30.79	4.72	30.51	0.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																																
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																															
	1	30.24	21.16	40.00	-18.84	27.52	25.02	0.83	32.21	0.00	---	---	Peak																																																																																																																																																																																																																													
	2	96.20	24.05	43.50	-19.45	39.14	15.43	1.50	32.02	0.00	---	---	Peak																																																																																																																																																																																																																													
	3	134.76	22.11	43.50	-21.39	34.91	17.50	1.76	32.06	0.00	---	---	Peak																																																																																																																																																																																																																													
	4	166.29	27.45	43.50	-16.05	41.85	15.71	1.96	32.07	0.00	---	---	Peak																																																																																																																																																																																																																													
	5	213.82	30.95	43.50	-12.55	45.77	14.98	2.22	32.02	0.00	---	---	Peak																																																																																																																																																																																																																													
6	351.07	30.41	46.00	-15.59	39.29	20.25	2.85	31.98	0.00	---	---	Peak																																																																																																																																																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																
1	56.43	33.29	40.00	-6.71	52.06	12.16	1.14	32.07	0.00	---	---	Peak																																																																																																																																																																																																																														
2	94.75	27.46	43.50	-16.04	42.74	15.24	1.49	32.01	0.00	---	---	Peak																																																																																																																																																																																																																														
3	168.71	28.85	43.50	-14.65	43.44	15.51	1.97	32.07	0.00	---	---	Peak																																																																																																																																																																																																																														
4	301.36	23.32	46.00	-22.68	33.79	19.15	2.67	32.29	0.00	---	---	Peak																																																																																																																																																																																																																														
5	613.46	24.58	46.00	-21.42	26.92	25.87	3.78	31.99	0.00	---	---	Peak																																																																																																																																																																																																																														
6	967.02	30.31	54.00	-23.69	25.31	30.79	4.72	30.51	0.00	---	---	Peak																																																																																																																																																																																																																														

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.92	-	-	10Hz
802.11g	91.93	0.296	3.378	3.6KHz
802.11n HT20	91.22	0.291	3.436	3.6KHz

802.11b

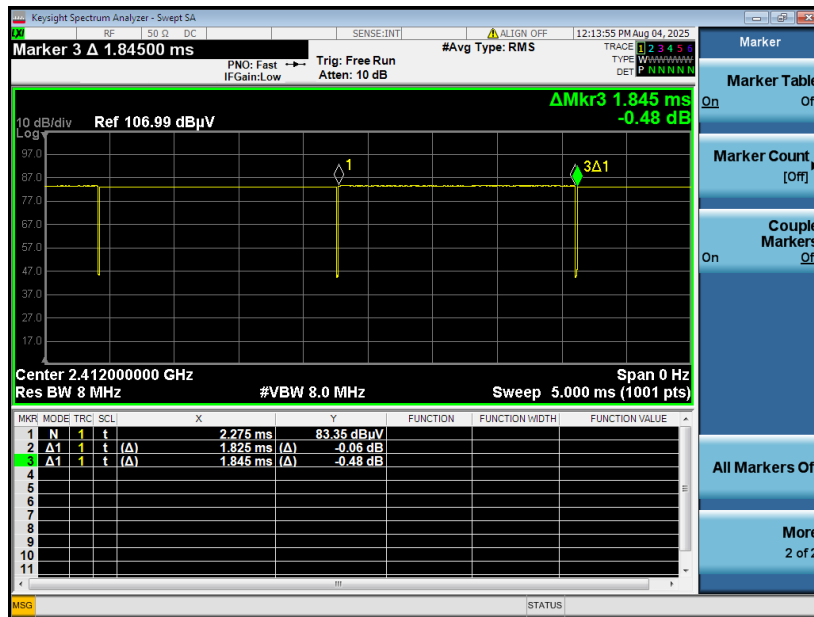



802.11g

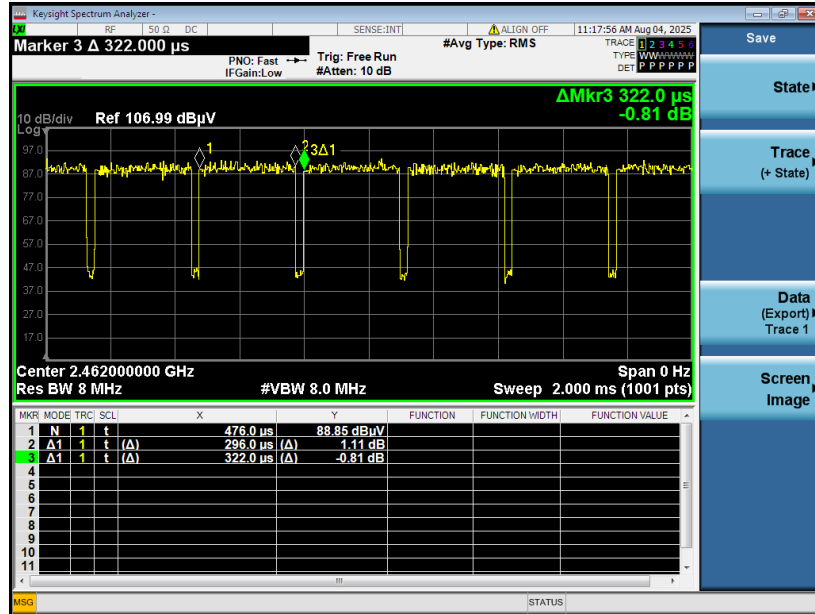

802.11n HT20

