

FCC PART 15.247 TEST REPORT

For

Fametech Inc.

2F, No.167, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

FCC ID: 2ARXO-GC596511

Report Type: Original Report	Product Type: Mobile Point of System
Report Number: RSZ181102003-00B	
Report Date: 2019-08-28	
Jacob Kong 	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE	12
APPLICABLE STANDARD	12
FCC §15.203 – ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CORRECTED FACTOR & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
CORRECTED AMPLITUDE & MARGIN CALCULATION	23
TEST RESULTS SUMMARY	23
TEST DATA	23
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	64
APPLICABLE STANDARD	64
TEST PROCEDURE	64
TEST DATA	64
FCC §15.247(d) - BAND EDGES TESTING	65
APPLICABLE STANDARD	65
TEST PROCEDURE	65
TEST DATA	65

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Mobile Point of System
Tested Model	MP-1311
Frequency Range	Bluetooth: 2402~2480MHz
Conducted Peak Power	Bluetooth: 3.93dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification	1.9 dBi
Voltage Range	DC 3.8V from battery or DC 5V from adapter
Date of Test	2018-11-28~2019-08-07
Sample serial number	MP1913100101(Assigned by the client)
Received date	2018-11-02
Sample/EUT Status	Good condition
Adapter information	Model: PA1015-050IB300 Input: AC 100-240V, 50/60Hz, 0.4A Output: DC 5V, 3.0A

Objective

This test report is prepared on behalf of *Fametech Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submissions with FCC ID: 2ARXO-GC596511.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“MP Tool” Software was used for test, the power level is 5.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
BULL	Receptacle	GN-415K	5503290068073
PHILIPS	Earphone	SBCHP250	N/A
N/A	USB flash disk	N/A	N/A
DELL	HDMI Monitor	ST2420Lb	CN-0X0K27-74261-2AF-090U
SASUNG	HDMI Monitor	225MS	CR22HVZP401073M
Microsoft	Keyboard	1406	0200706128743
DELL	Mouse	MOC5UO	G1900NKD
SAST	Modem	AEM-2100	0293


External I/O Cable



Cable Description	Length (m)	From/Port	To
Un-shielding Un-detachable AC cable	1.0	Receptacle	LISN
Un-Shielding Un-Detachable DC Cable	1.2	EUT	Adapter
Un-Shielding Un-Detachable DC Cable	1.2	Base	Adapter
Un-Shielding Un-Detachable USB Cable	1.2	Base	Mouse
Un-Shielding Un-Detachable USB Cable	1.2	Base	Keyboard
Shielding Detachable Serial Cable	1.2	Host PC	Modem
Un-shielding Detachable Earphone Cable	1.2	EUT	Earphone
Shielding Detachable HDMI Cable	1.0	EUT	HDMI Monitor
Un-shielding Detachable AC cable	1.5	HDMI Monitor	LISN 2

Block Diagram of Test Setup

For conducted emission:

EUT Operation Mode 1:

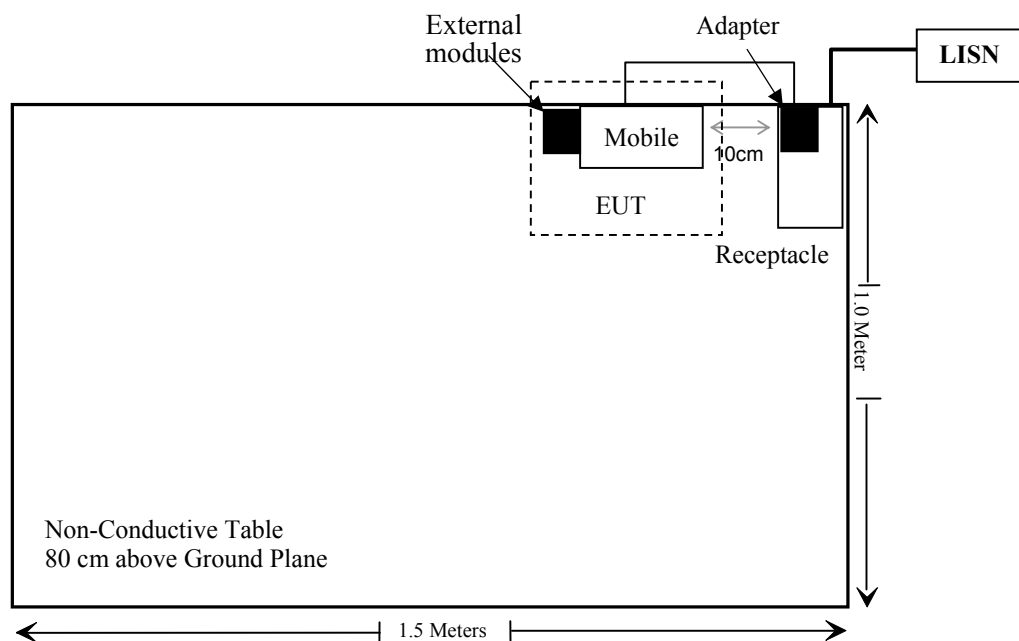

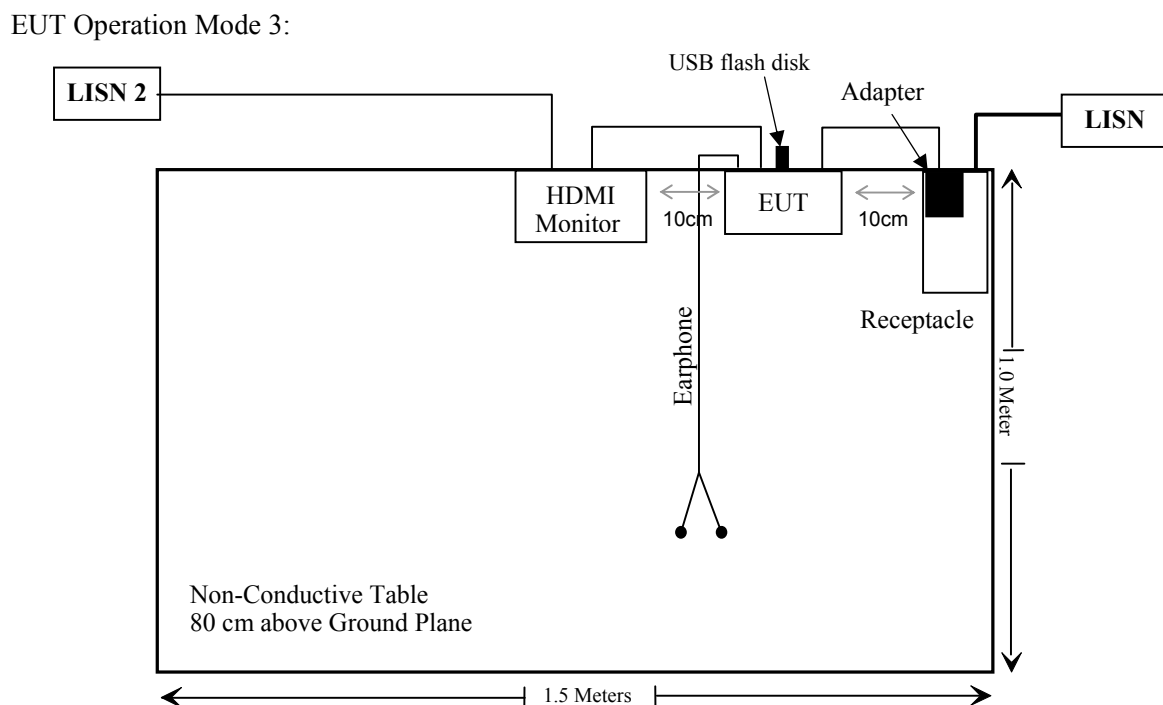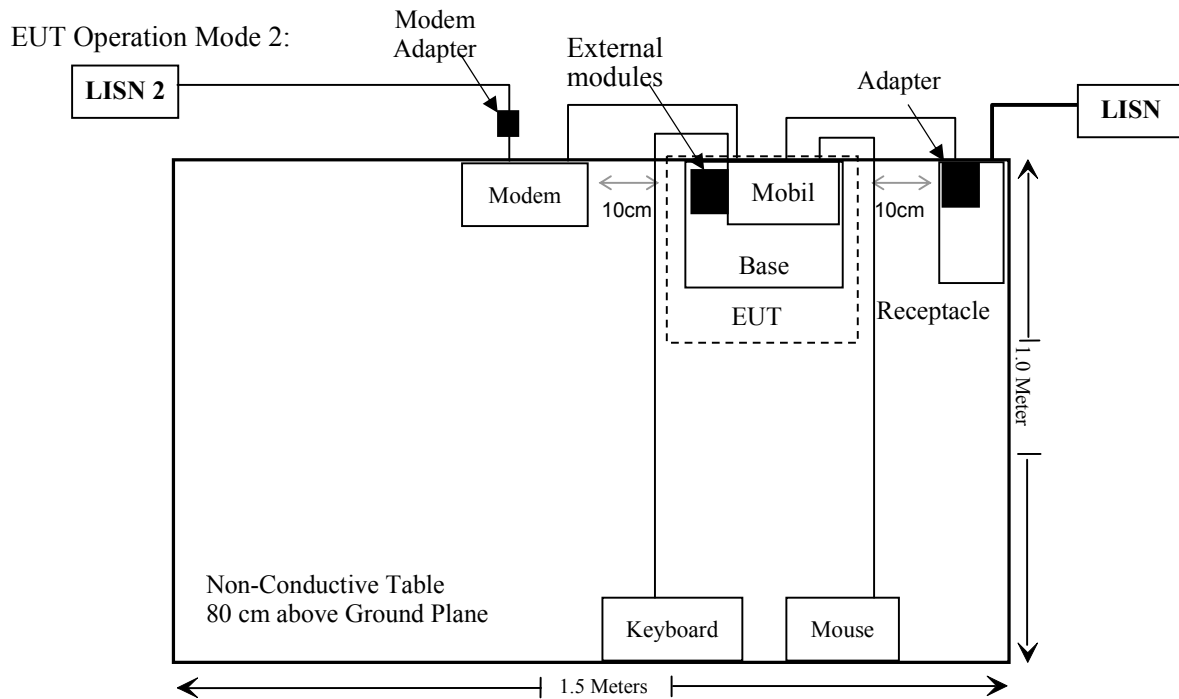

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2018-07-11	2019-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2019-01-25	2020-01-25
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-01
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Unknown	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2018-11-12	2019-11-12
Radiated Emission Test					
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2018-07-22	2019-07-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma Instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2018-07-11	2019-07-11
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-11
UTiFLEX MICRO-C0AX	RF Cable	UFA147A-2362-100100	MFR64639231029-003	2018-11-12	2019-11-12
Ducommun Technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun Technologies	RF Cable	RG-214	1	2018-11-19	2019-05-21
Ducommun Technologies	RF Cable	RG-214	1	2019-05-21	2019-11-19
Ducommun Technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-11-12	2019-11-12
Sinoscite	Band Reject Filter	BSF2402-2480MN-0898-001	99632	2018-11-12	2019-11-12
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Agilent	USB wideband power meter	U2021XA	MY54250003	2018-07-10	2019-07-09
WEINSCHTEL	10dB Attenuator	5324	AU 3842	Each Time	
Rohde & Schwarz	Spectrum Analyzer	FSU26	200120	2018-03-02	2019-03-01
Ducommun Technologies	RF Cable	RG-214	3	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2480	4.0	2.51	5	0.8	3.0	Yes

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one integrated antenna arrangement, which was permanently attached and the antenna gain is 1.9 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

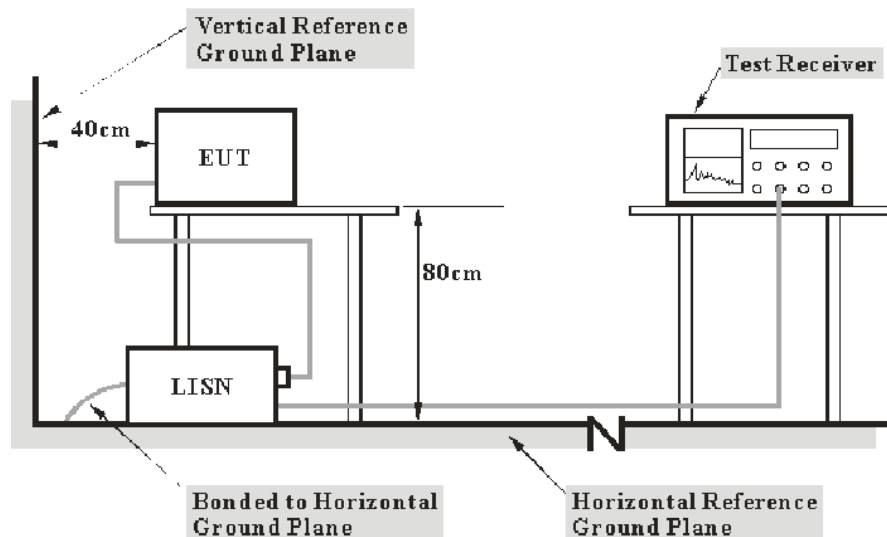

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Haiguo Li on 2019-04-24.

EUT Operation Mode: Transmitting& charging by adapter (with external modules)

AC 120V/60 Hz, Line

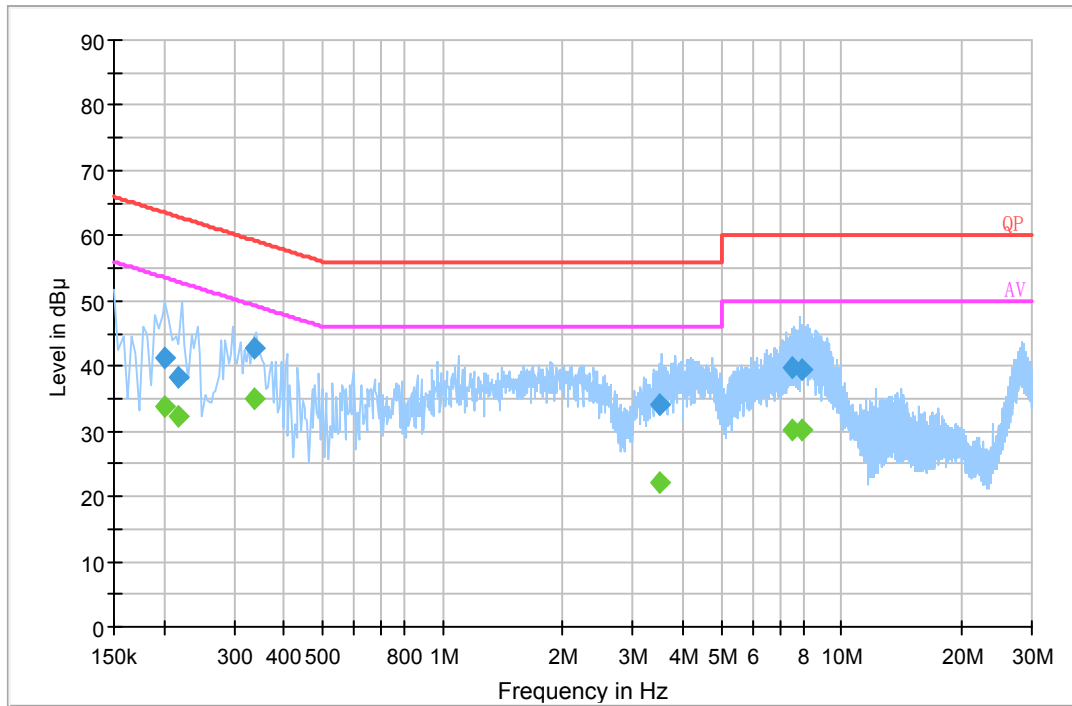


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.201500	41.2	19.8	63.5	22.3	QP
0.217500	38.2	19.8	62.9	24.7	QP
0.336870	42.6	19.8	59.3	16.7	QP
3.500690	34.0	19.9	56.0	22.0	QP
7.488810	39.7	19.9	60.0	20.3	QP
7.955830	39.6	19.9	60.0	20.4	QP
0.201500	33.8	19.8	53.5	19.7	Ave.
0.217500	32.4	19.8	52.9	20.5	Ave.
0.336870	34.8	19.8	49.3	14.5	Ave.
3.500690	22.1	19.9	46.0	23.9	Ave.
7.488810	30.1	19.9	50.0	19.9	Ave.
7.955830	30.2	19.9	50.0	19.8	Ave.

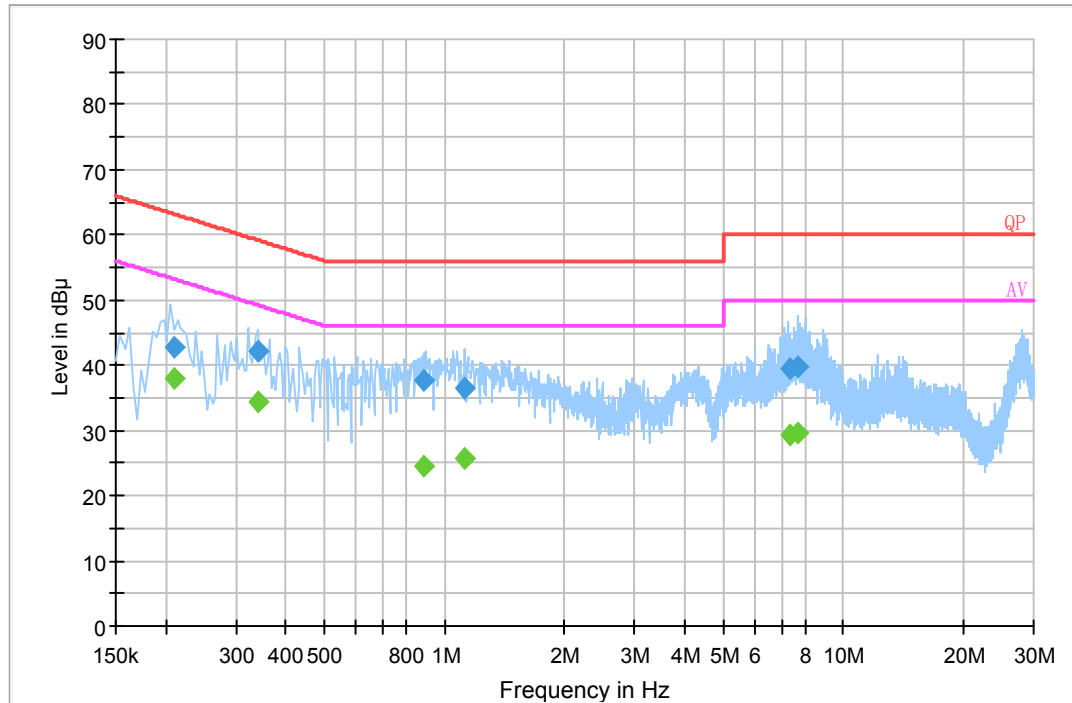AC 120V/60 Hz, Neutral


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.210500	42.8	19.8	63.2	20.4	QP
0.340870	42.3	19.8	59.2	16.9	QP
0.888470	37.7	19.7	56.0	18.3	QP
1.121170	36.5	19.8	56.0	19.5	QP
7.321430	39.3	19.9	60.0	20.7	QP
7.687070	39.7	19.9	60.0	20.3	QP
0.210500	37.8	19.8	53.2	15.4	Ave.
0.340870	34.2	19.8	49.2	15.0	Ave.
0.888470	24.4	19.7	46.0	21.6	Ave.
1.121170	25.6	19.8	46.0	20.4	Ave.
7.321430	29.4	19.9	50.0	20.6	Ave.
7.687070	29.7	19.9	50.0	20.3	Ave.

EUT Operation Mode: Transmitting& charging by base (with external modules)

AC 120V/60 Hz, Line

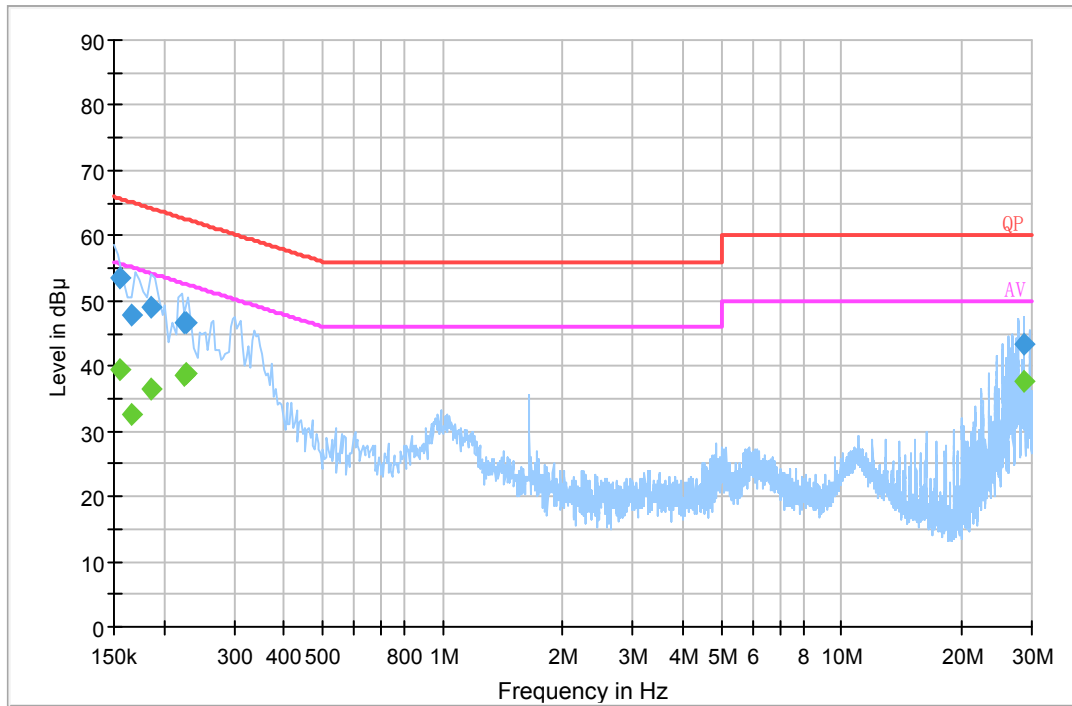


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.154500	53.6	19.8	65.8	12.2	QP
0.165500	47.9	19.9	65.2	17.3	QP
0.185500	49.2	19.8	64.2	15.0	QP
0.225500	46.8	19.8	62.6	15.8	QP
0.228500	46.7	19.8	62.6	15.9	QP
28.643410	43.4	20.2	60.0	16.6	QP
0.154500	39.3	19.8	55.8	16.5	Ave.
0.165500	32.4	19.9	55.2	22.8	Ave.
0.185500	36.5	19.8	54.2	17.7	Ave.
0.225500	38.5	19.8	52.6	14.1	Ave.
0.228500	38.9	19.8	52.6	13.7	Ave.
28.643410	37.7	20.2	50.0	12.3	Ave.

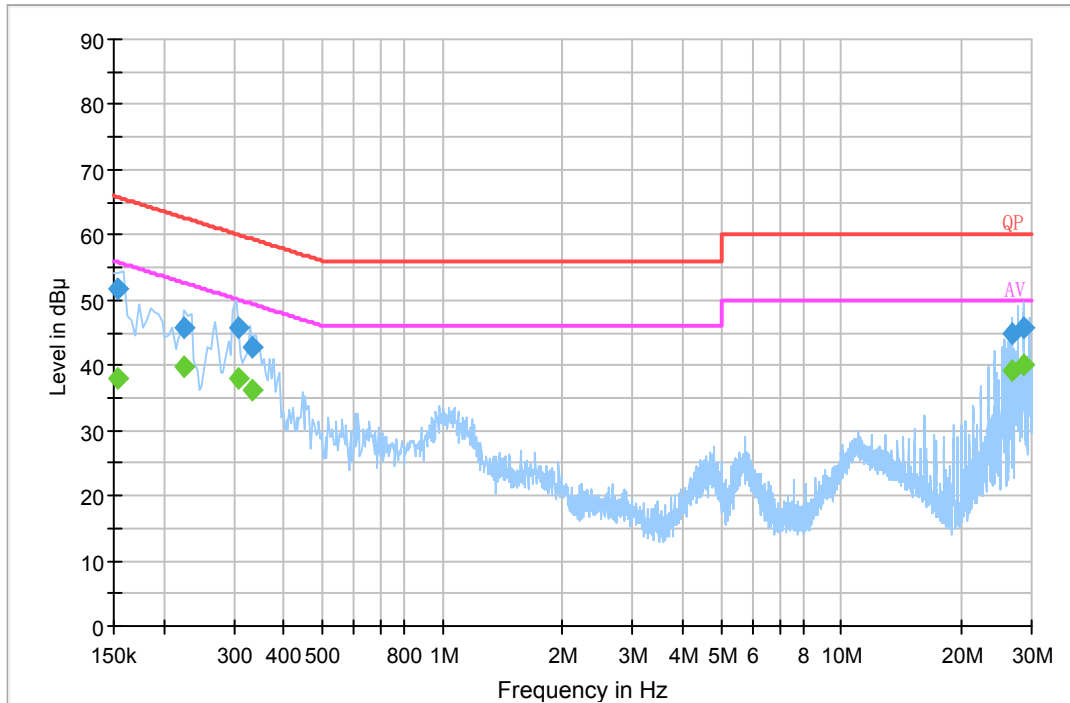AC 120V/60 Hz, Neutral


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.153500	51.7	19.8	65.8	14.1	QP
0.225500	45.6	19.8	62.6	17.0	QP
0.309410	45.7	19.7	60.0	14.3	QP
0.334950	42.9	19.8	59.3	16.4	QP
26.717230	44.9	20.2	60.0	15.1	QP
28.624610	45.7	20.2	60.0	14.3	QP
0.153500	37.9	19.8	55.8	17.9	Ave.
0.225500	39.7	19.8	52.6	12.9	Ave.
0.309410	37.9	19.7	50.0	12.1	Ave.
0.334950	36.2	19.8	49.3	13.1	Ave.
26.717230	39.2	20.2	50.0	10.8	Ave.
28.624610	40.1	20.2	50.0	9.9	Ave.

EUT Operation Mode: Transmitting& charging by adapter& HDMI out (only tablet)

AC 120V/60 Hz, Line

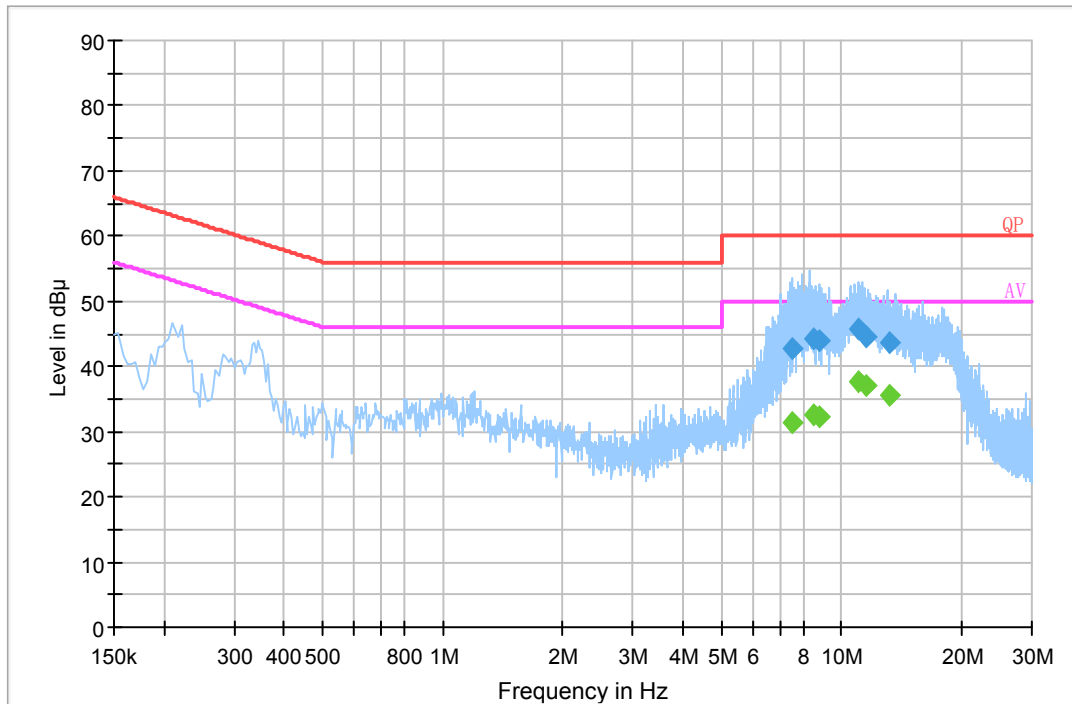

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
7.552750	42.7	19.9	60.0	17.3	QP
8.479310	44.2	20.0	60.0	15.8	QP
8.754690	44.0	20.0	60.0	16.0	QP
11.036730	45.8	20.0	60.0	14.2	QP
11.586650	44.4	20.0	60.0	15.6	QP
13.167330	43.7	20.0	60.0	16.3	QP
7.552750	31.5	19.9	50.0	18.5	Ave.
8.479310	32.7	20.0	50.0	17.3	Ave.
8.754690	32.3	20.0	50.0	17.7	Ave.
11.036730	37.7	20.0	50.0	12.3	Ave.
11.586650	37.1	20.0	50.0	12.9	Ave.
13.167330	35.6	20.0	50.0	14.4	Ave.

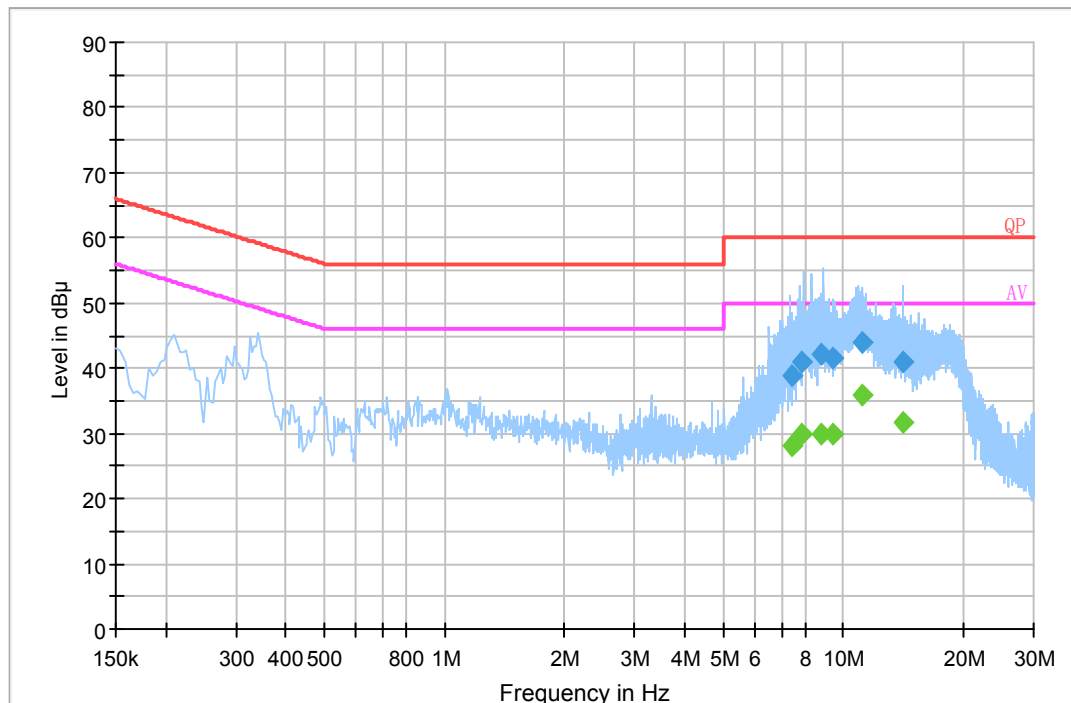AC 120V/60 Hz, Neutral



Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
7.400110	39.0	19.9	60.0	21.0	QP
7.879170	41.1	19.9	60.0	18.9	QP
8.801070	42.0	19.9	60.0	18.0	QP
9.401330	41.5	19.9	60.0	18.5	QP
11.105630	43.9	20.0	60.0	16.1	QP
14.087130	41.0	19.9	60.0	19.0	QP
7.400110	28.2	19.9	50.0	21.8	Ave.
7.879170	29.9	19.9	50.0	20.1	Ave.
8.801070	30.0	19.9	50.0	20.0	Ave.
9.401330	30.0	19.9	50.0	20.0	Ave.
11.105630	36.0	20.0	50.0	14.0	Ave.
14.087130	31.6	19.9	50.0	18.4	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

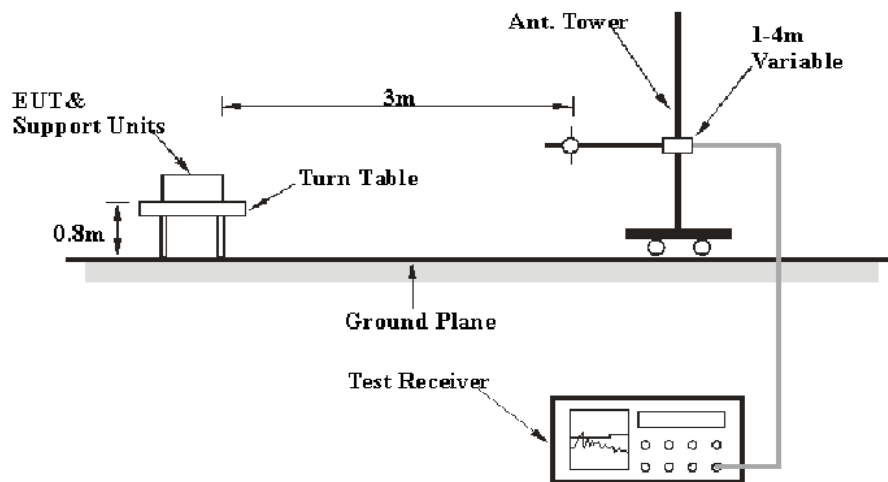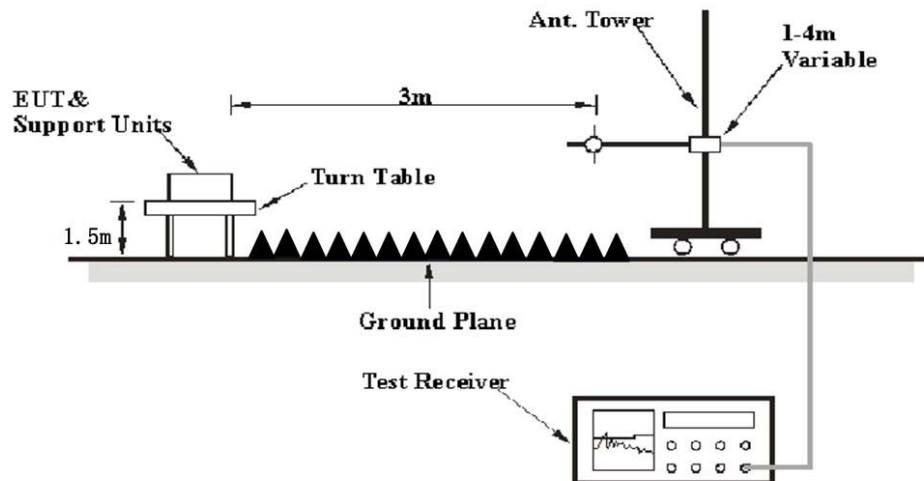EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data


Environmental Conditions

Temperature:	23~25 °C
Relative Humidity:	49~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Leo Huang and Curry Xiang from 2019-04-20 to 2019-08-07.


30 MHz~1 GHz:

EUT Operation Mode: Transmitting& charging by adapter (with external modules)

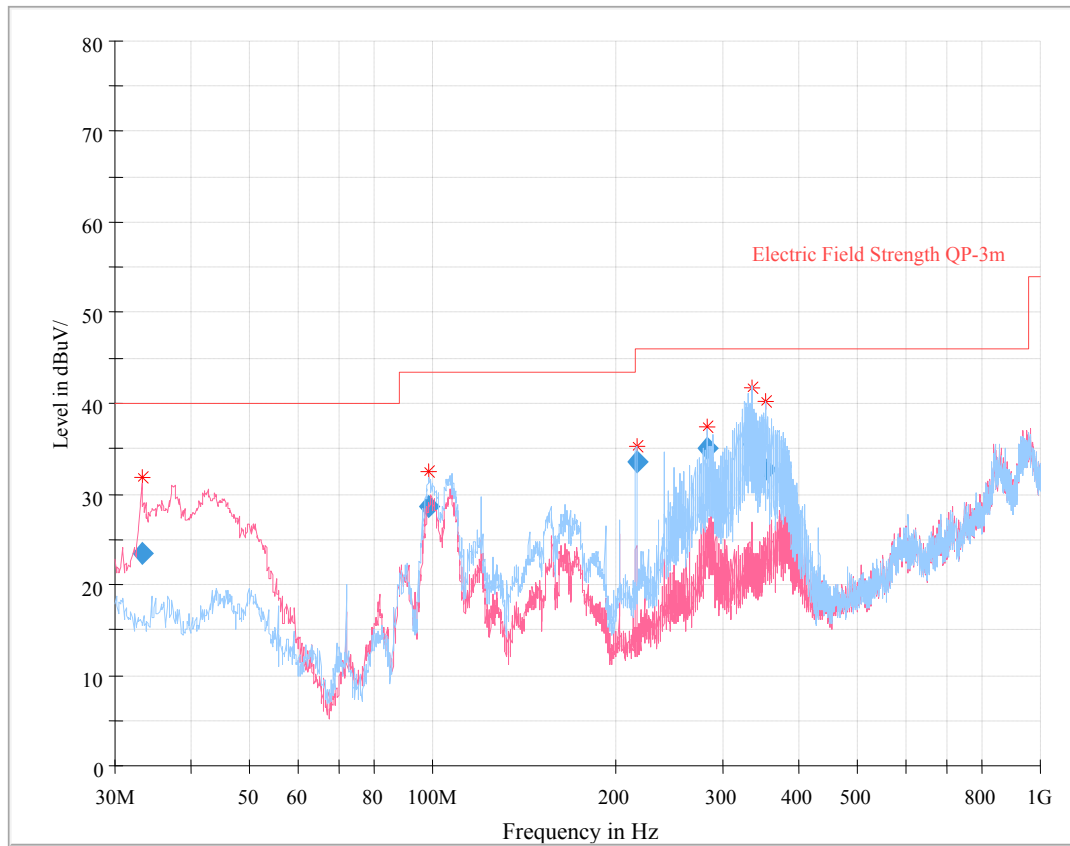


Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
33.228750	23.51	105.0	V	145.0	-9.5	40.00	16.49
98.712000	28.58	220.0	H	74.0	-17.4	43.50	14.92
216.320375	33.55	146.0	H	21.0	-13.9	46.00	12.45
282.550375	35.05	108.0	H	123.0	-11.8	46.00	10.95
335.750125	35.43	103.0	H	186.0	-10.8	46.00	10.57
353.571375	32.76	102.0	H	188.0	-10.8	46.00	13.24

EUT Operation Mode: Transmitting& charging by base (with external modules)

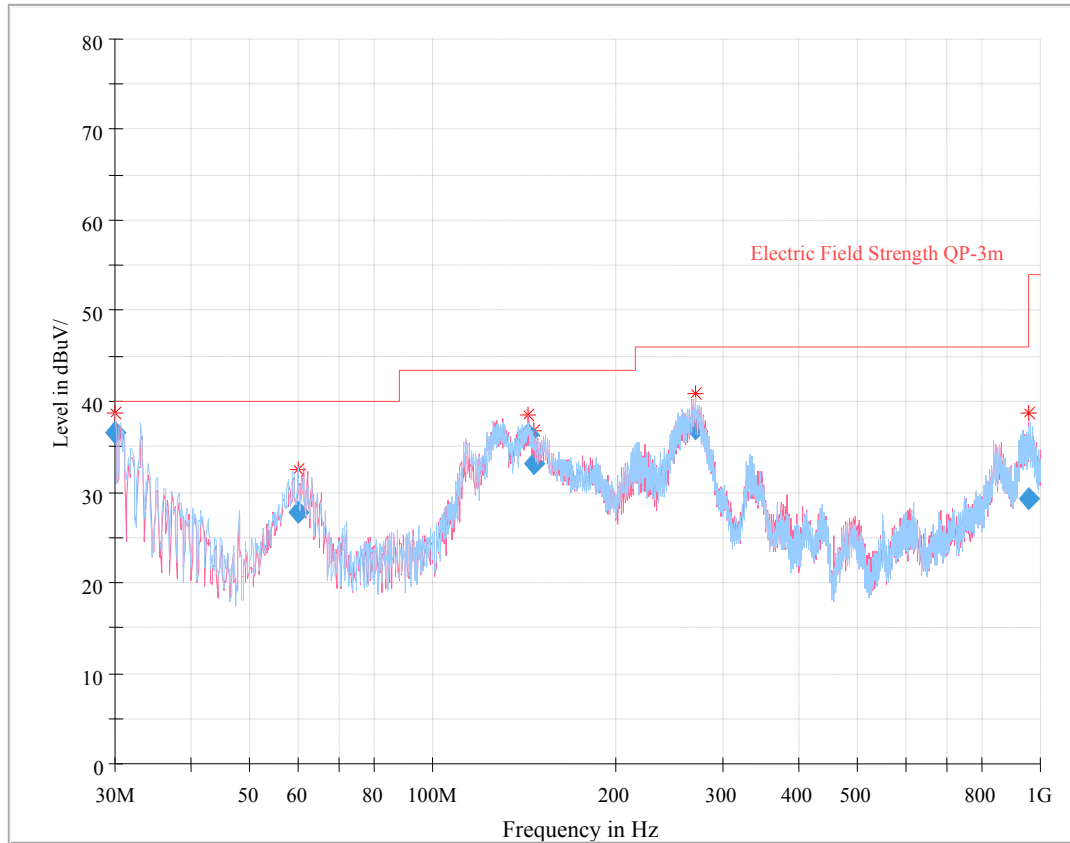

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
30.037562	36.63	108.0	H	254.0	-7.7	40.00	3.37
60.055375	27.68	115.0	H	0.0	-20.2	40.00	12.32
143.992500	36.42	209.0	V	0.0	-14.2	43.50	7.08
146.275625	33.18	301.0	V	31.0	-14.2	43.50	10.32
270.934250	37.07	110.0	H	0.0	-12.6	46.00	8.93
956.912125	29.22	325.0	V	36.0	9.4	46.00	16.78

EUT Operation Mode: Transmitting& charging by adapter& HDMI out (only tablet)

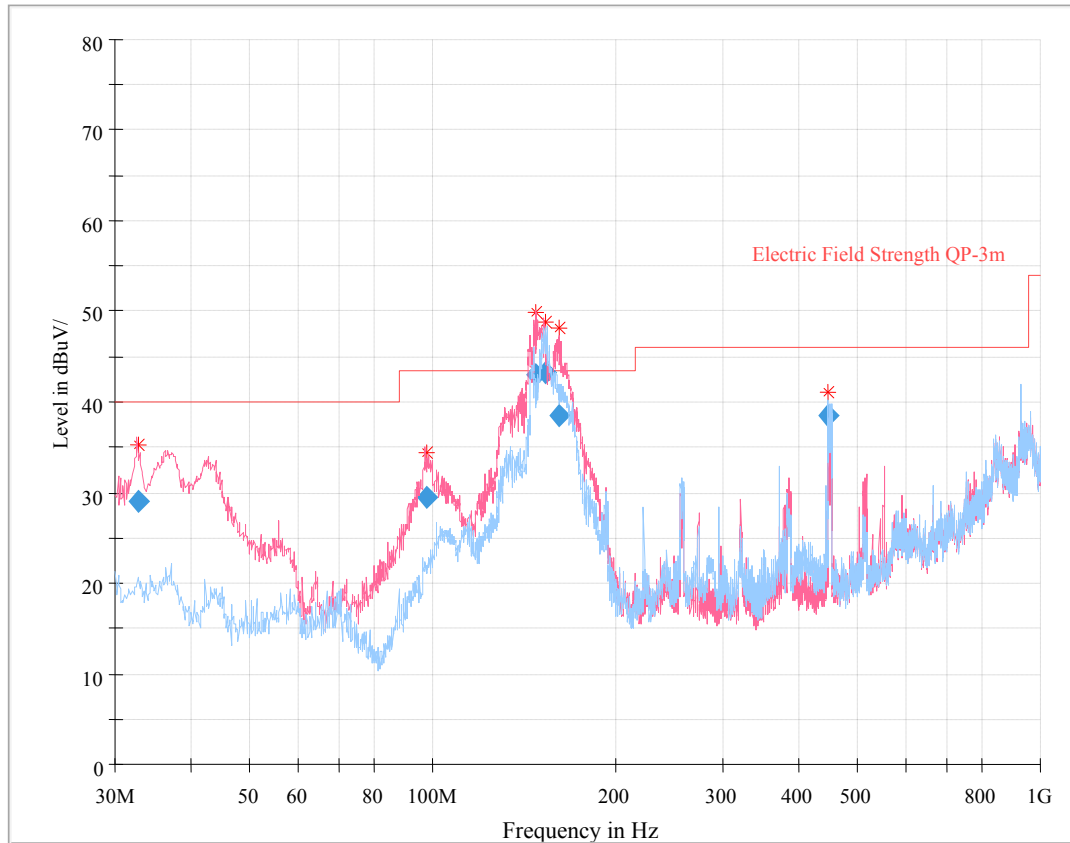

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
32.783375	29.12	145.0	V	252.0	-9.3	40.00	10.88
97.616125	29.55	109.0	V	0.0	-17.6	43.50	13.95
147.627375	43.07	118.0	V	279.0	-14.2	43.50	0.43
153.620000	43.27	214.0	H	48.0	-14.3	43.50	0.23
161.857625	38.47	108.0	V	268.0	-14.5	43.50	5.03
448.189125	38.49	170.0	H	14.0	-8.3	46.00	7.51

1 GHz - 25 GHz: (worst case)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2390.00	27.84	PK	226	1.6	H	33.00	60.84	74	13.16
2390.00	13.56	AV	226	1.6	H	33.00	46.56	54	7.44
2483.60	27.41	PK	112	1.3	H	33.20	60.61	74	13.39
2483.60	13.54	AV	112	1.3	H	33.20	46.74	54	7.26
4804.00	43.35	PK	345	2.0	H	7.88	51.23	74	22.77
4804.00	28.90	AV	345	2.0	H	7.88	36.78	54	17.22
Middle Channel (2441 MHz)									
4882.00	42.35	PK	89	2.1	H	9.21	51.56	74	22.44
4882.00	28.21	AV	89	2.1	H	9.21	37.42	54	16.58
High Channel (2480 MHz)									
2399.00	27.40	PK	184	1.9	H	33.00	60.40	74	13.60
2399.00	13.84	AV	184	1.9	H	33.00	46.84	54	7.16
2483.50	28.91	PK	249	1.8	H	33.20	62.11	74	11.89
2483.50	19.98	AV	249	1.8	H	33.20	53.18	54	0.82
4960.00	42.77	PK	334	1.5	H	9.07	51.84	74	22.16
4960.00	28.76	AV	334	1.5	H	9.07	37.83	54	16.17

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude



The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.



Pre-scan with High channel Peak Horizontal

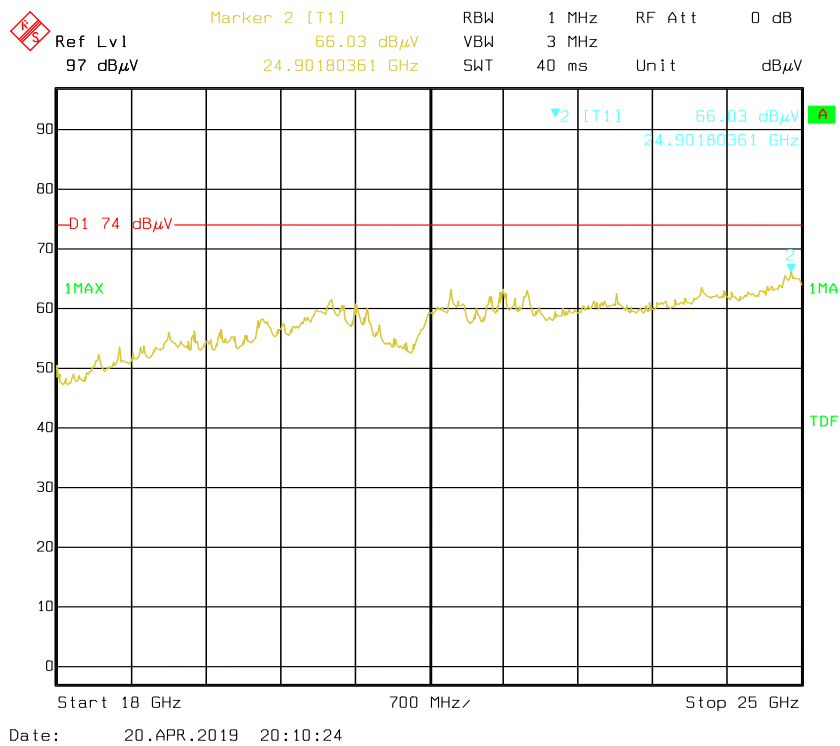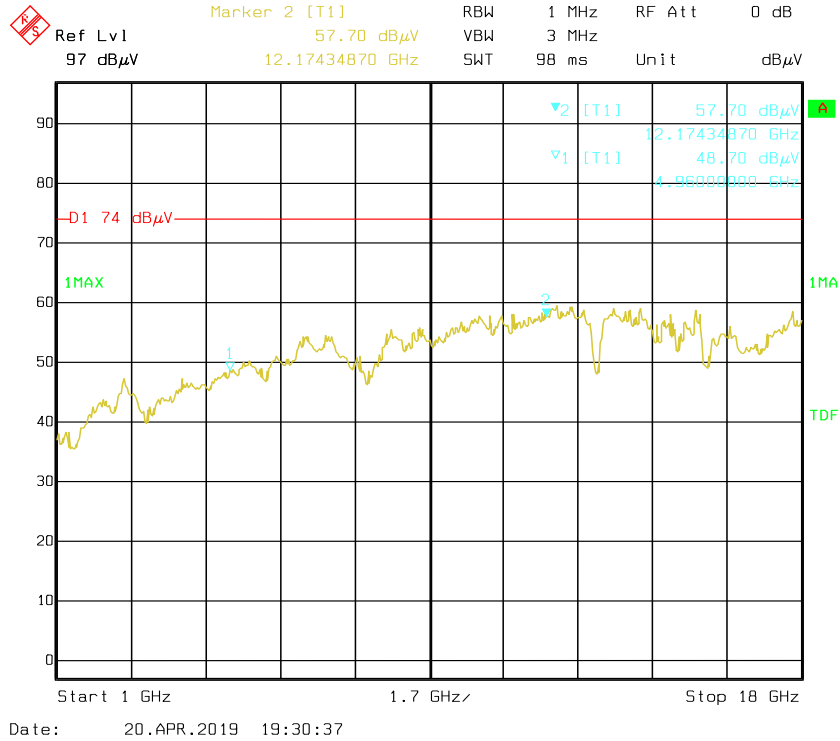



Vertical

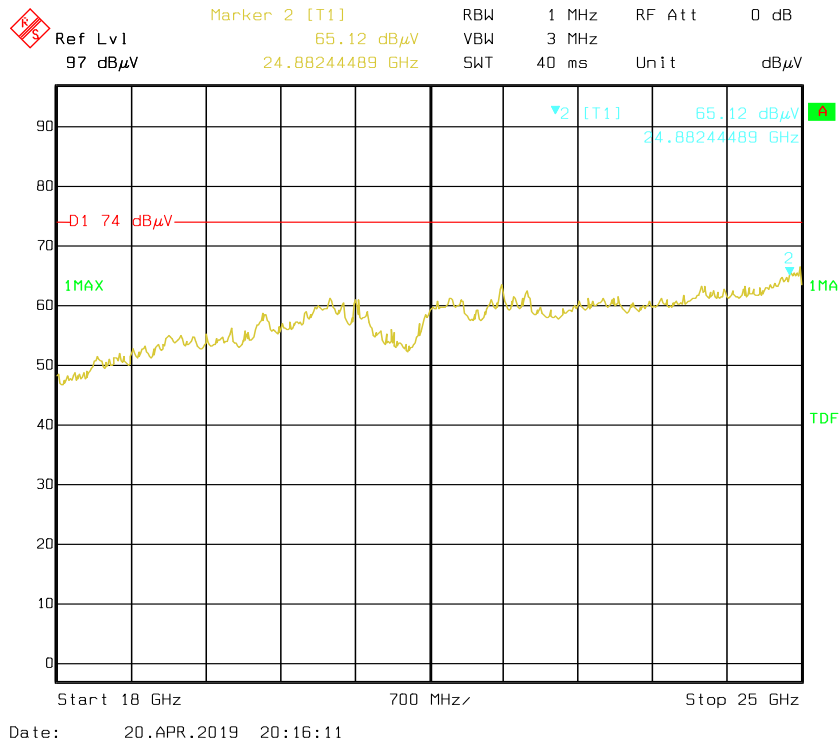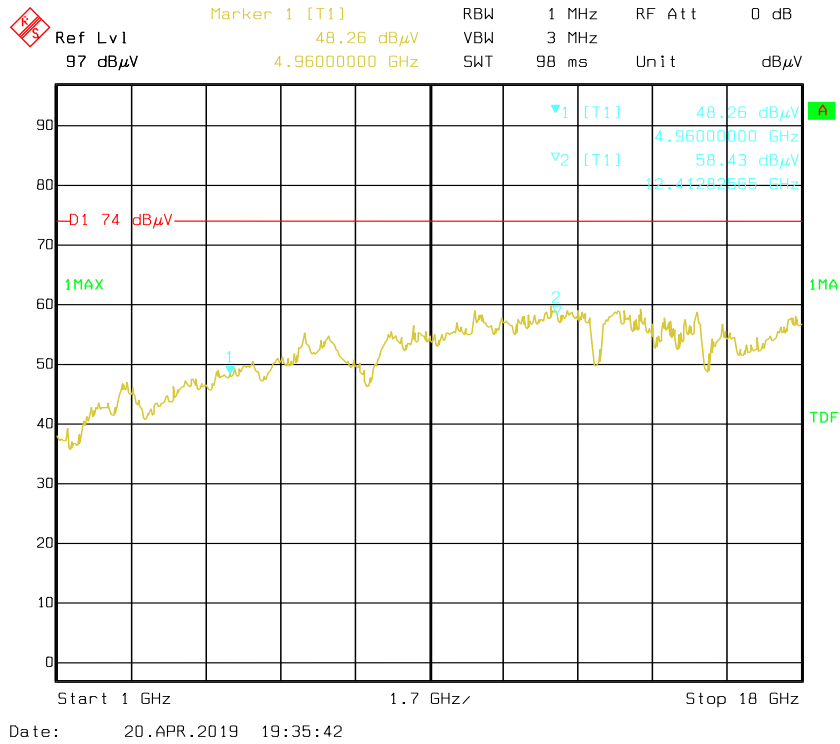

Pre-scan for Average Horizontal

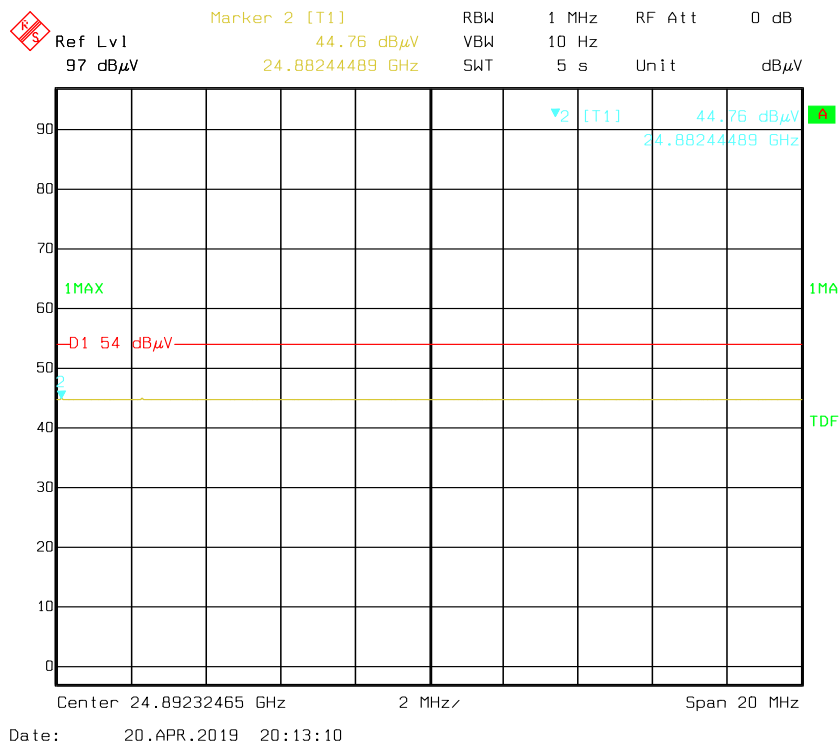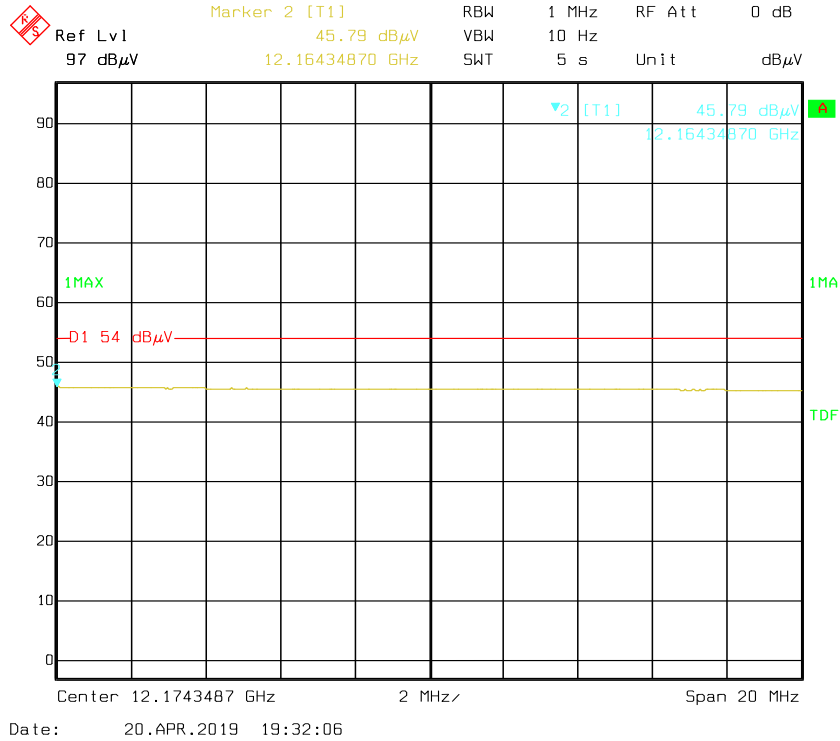

Vertical

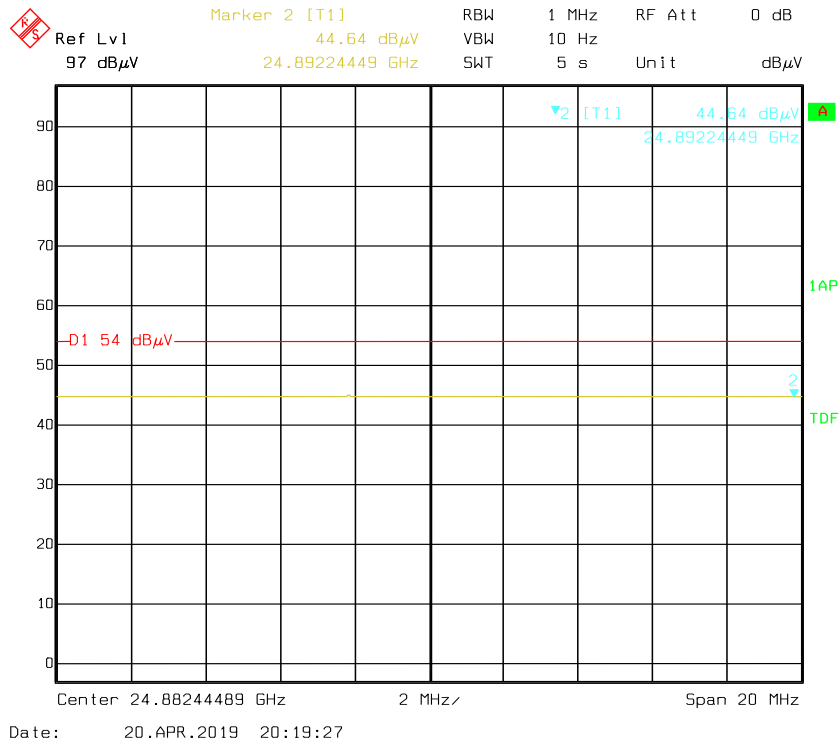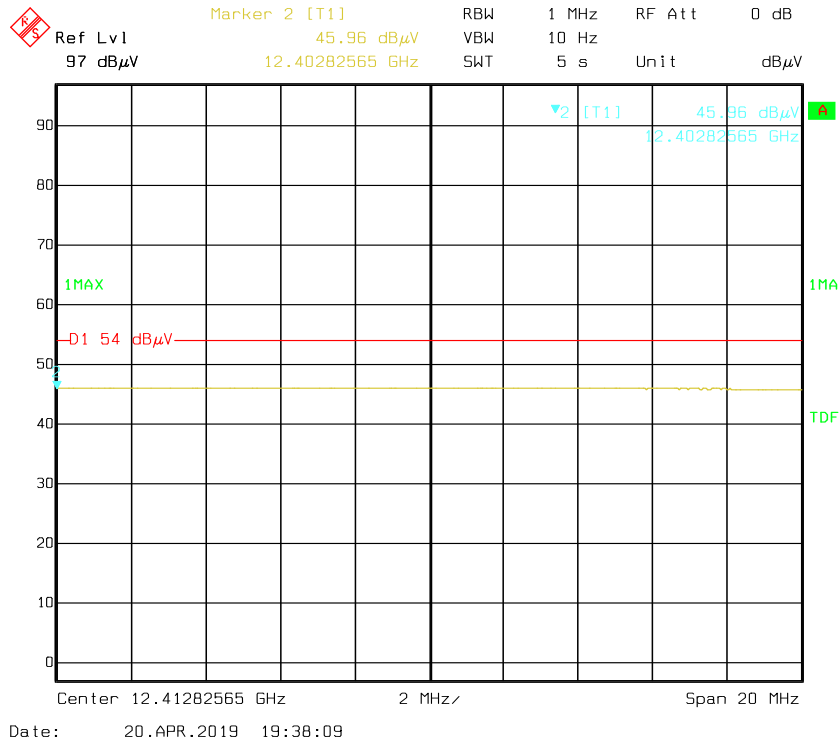

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by James fu on 2018-11-28.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
BDR(GFSK)					
Low	1.006	1.04	0.693	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.006	1.05	0.700	> two-thirds of the 20 dB bandwidth	Compliance
High	1.006	1.05	0.700	> two-thirds of the 20 dB bandwidth	Compliance
EDR($\pi/4$ -DQPSK)					
Low	1.003	1.37	0.913	> two-thirds of the 20 dB bandwidth	Compliance
Middle	1.003	1.37	0.913	> two-thirds of the 20 dB bandwidth	Compliance
High	1.006	1.37	0.913	> two-thirds of the 20 dB bandwidth	Compliance
EDR(8DPSK)					
Low	1.006	1.30	0.867	> two-thirds of the 20 dB bandwidth	Compliance
Middle	0.997	1.30	0.867	> two-thirds of the 20 dB bandwidth	Compliance
High	1.003	1.30	0.867	> two-thirds of the 20 dB bandwidth	Compliance


Please refer to the following plots.

BDR (GFSK): Low Channel

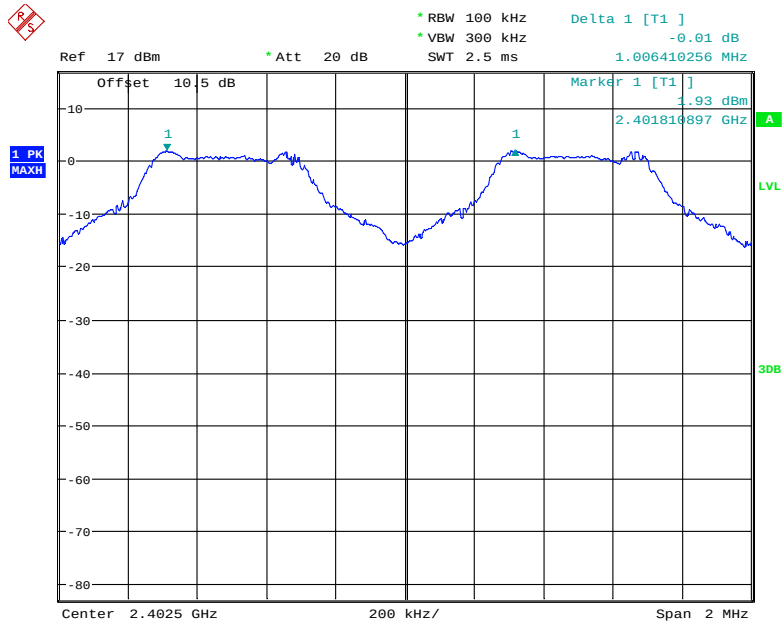


Date: 28.NOV.2018 15:31:03

BDR (GFSK): Middle Channel

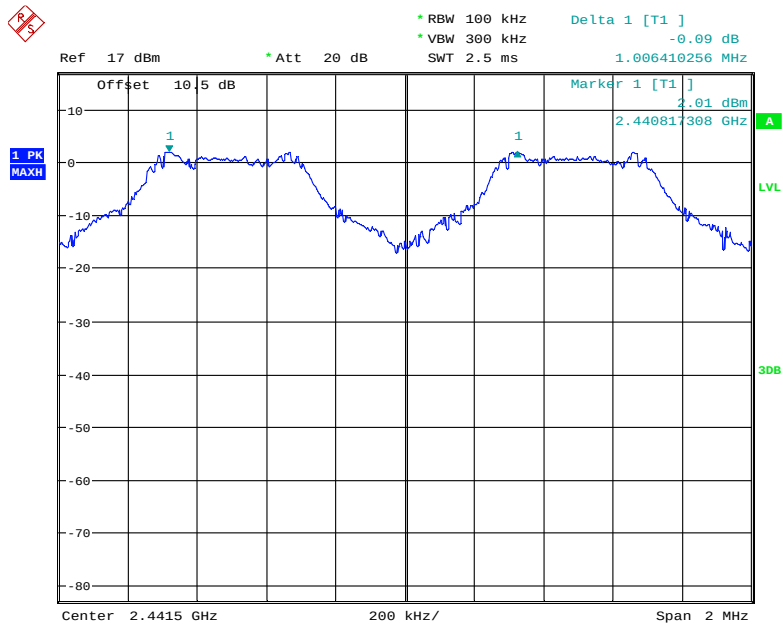


Date: 28.NOV.2018 15:33:04

BDR (GFSK): High Channel

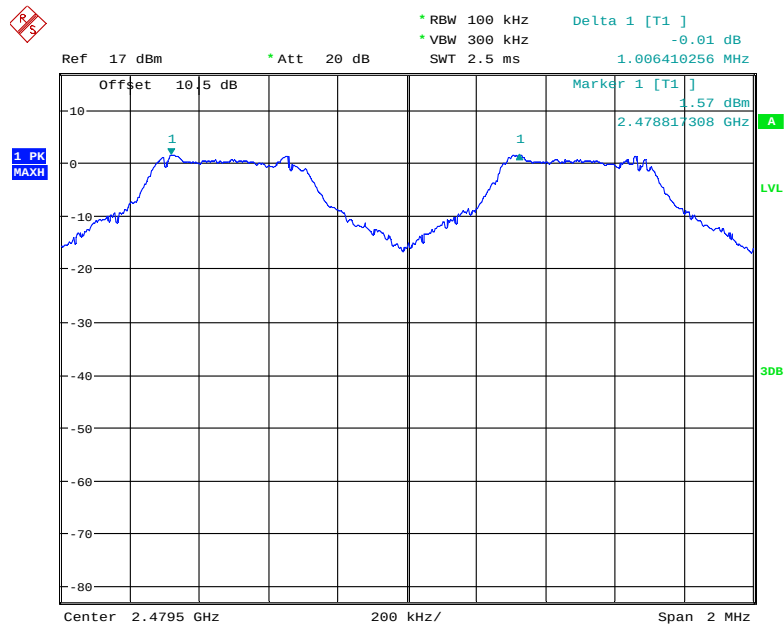


Date: 28.NOV.2018 15:37:06

EDR ($\pi/4$ -DQPSK): Low Channel

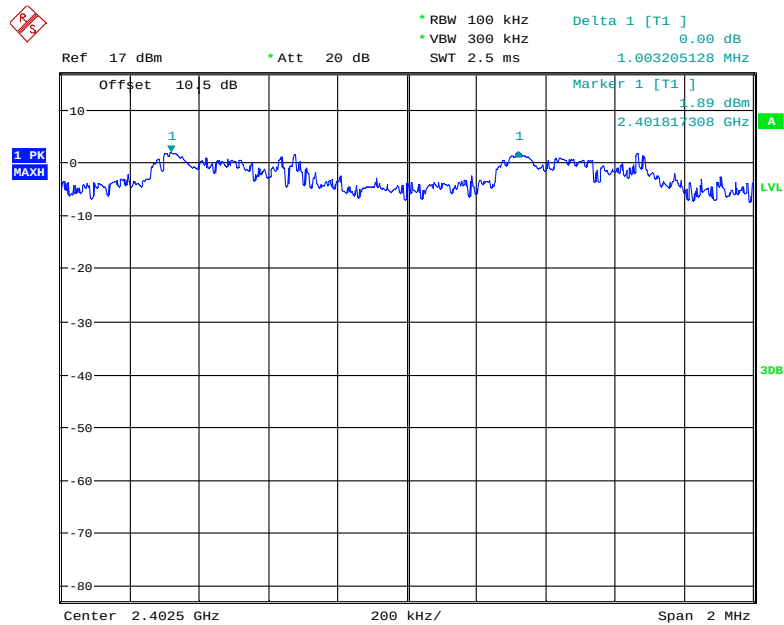


Date: 28.NOV.2018 15:48:14

EDR ($\pi/4$ -DQPSK): Middle Channel

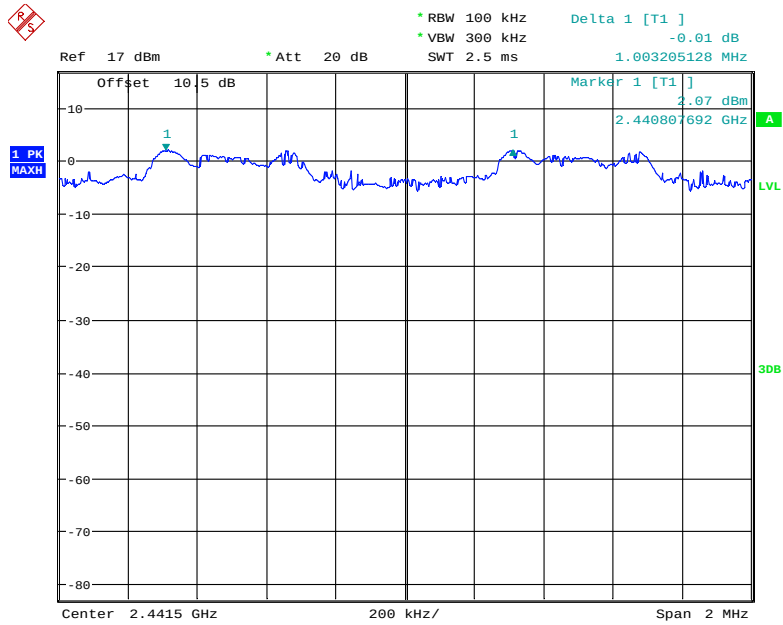


Date: 28.NOV.2018 15:46:25

EDR ($\pi/4$ -DQPSK): High Channel

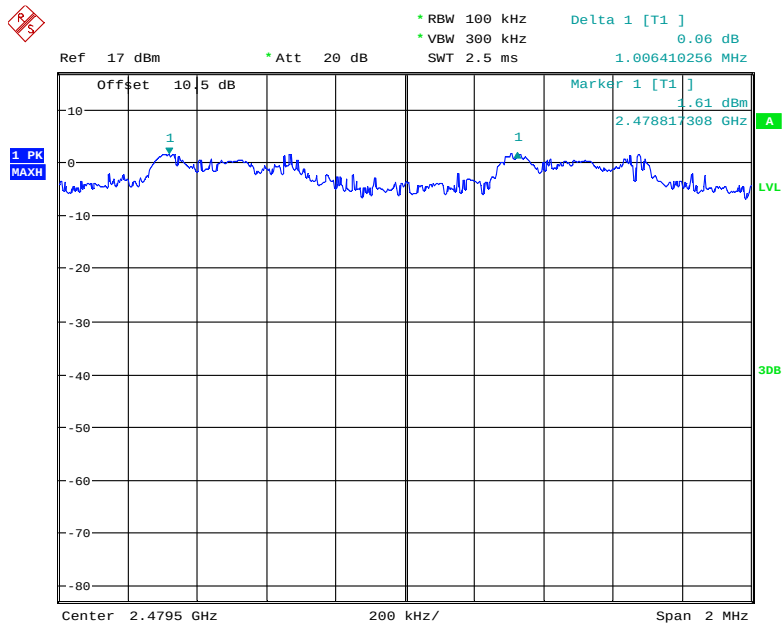


Date: 28.NOV.2018 15:41:41

EDR (8DPSK): Low Channel

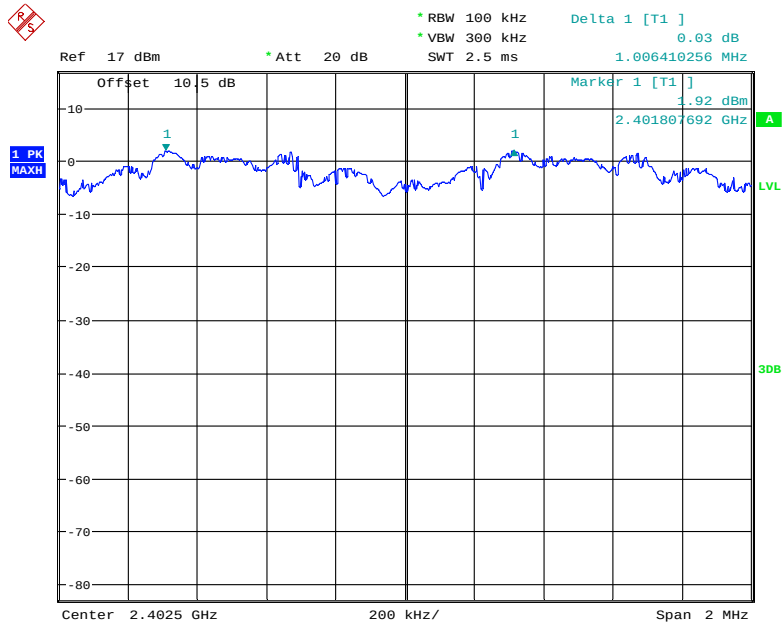


Date: 28.NOV.2018 15:51:29

EDR (8DPSK): Middle Channel

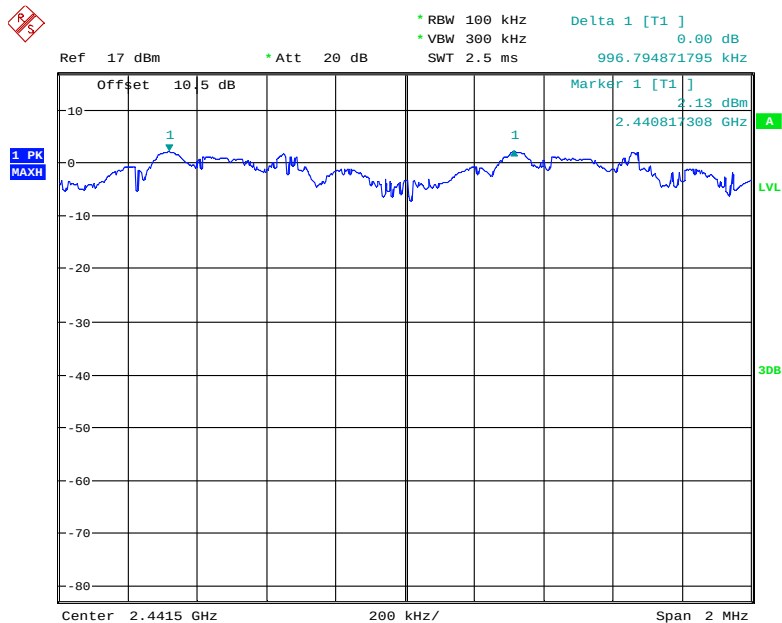

Date: 28.NOV.2018 15:54:53

EDR (8DPSK): High Channel

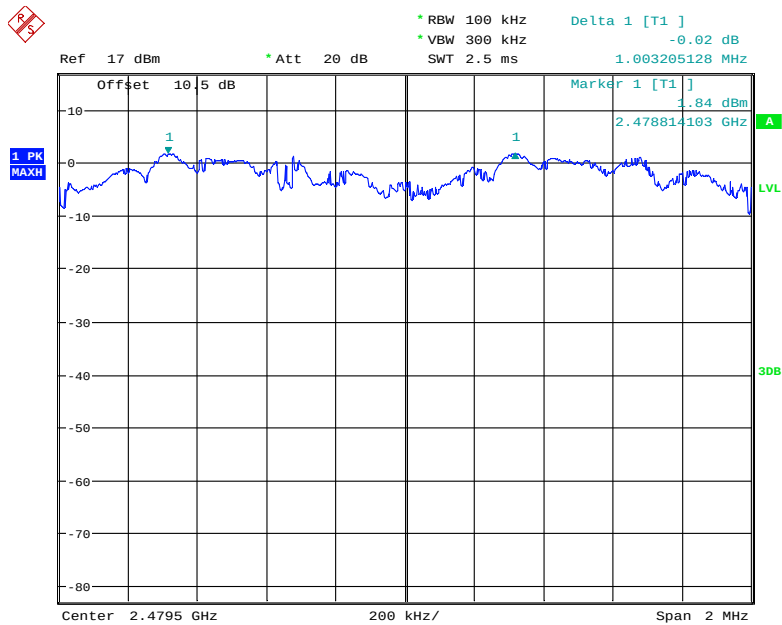

Date: 28.NOV.2018 15:57:35

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by James fu on 2018-12-28.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	1.04
	Middle	2441	1.05
	High	2480	1.05
EDR ($\pi/4$-DQPSK)	Low	2402	1.37
	Middle	2441	1.37
	High	2480	1.37
EDR (8DPSK)	Low	2402	1.30
	Middle	2441	1.30
	High	2480	1.30

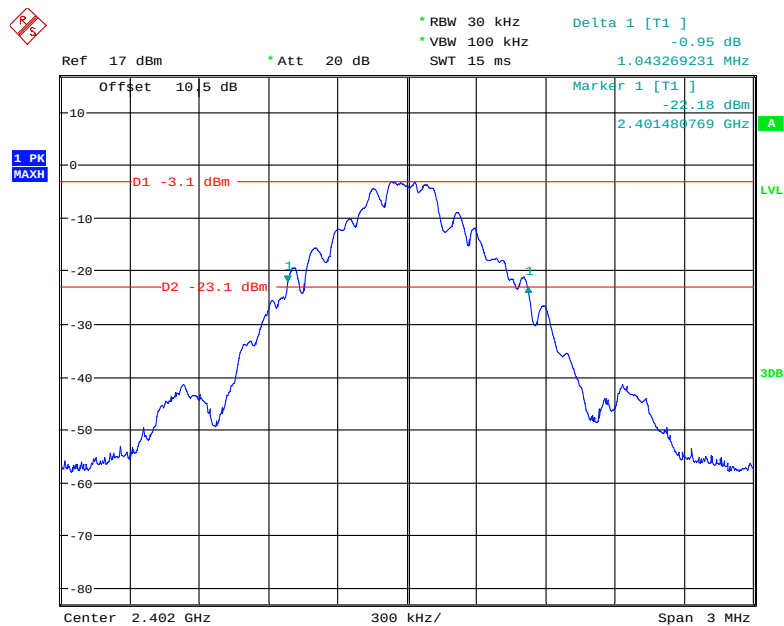BDR (GFSK): Low Channel


Date: 28.NOV.2018 15:21:22

BDR (GFSK): Middle Channel

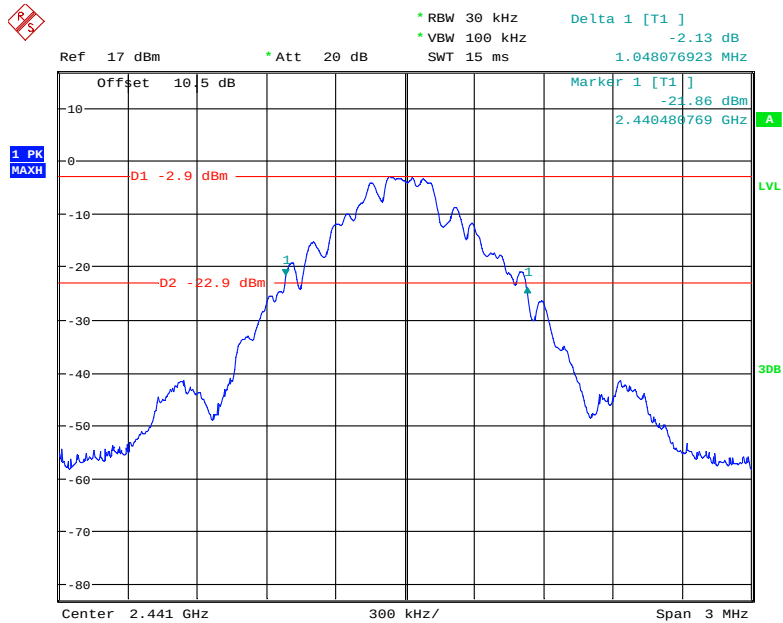


Date: 28.NOV.2018 15:20:21

BDR (GFSK): High Channel

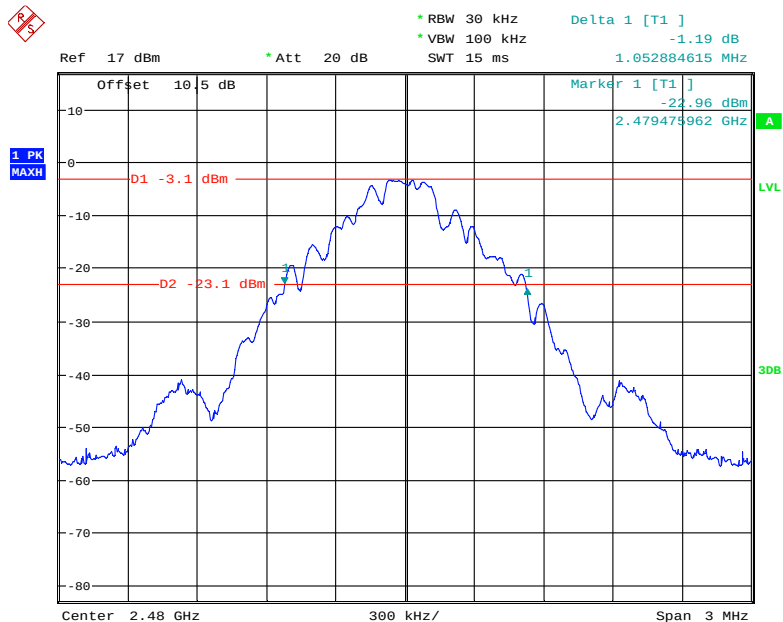


Date: 28.NOV.2018 15:19:26

EDR ($\pi/4$ -DQPSK): Low Channel

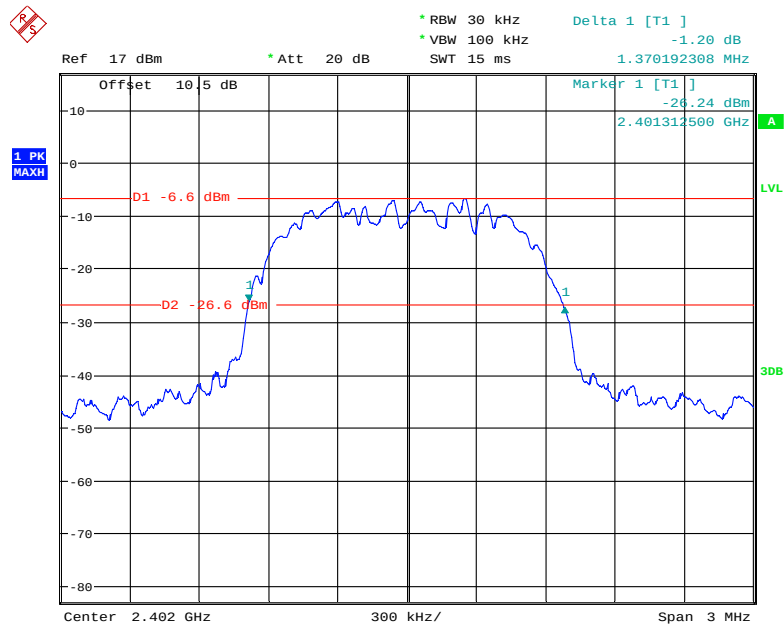


Date: 28.NOV.2018 15:12:54

EDR ($\pi/4$ -DQPSK): Middle Channel

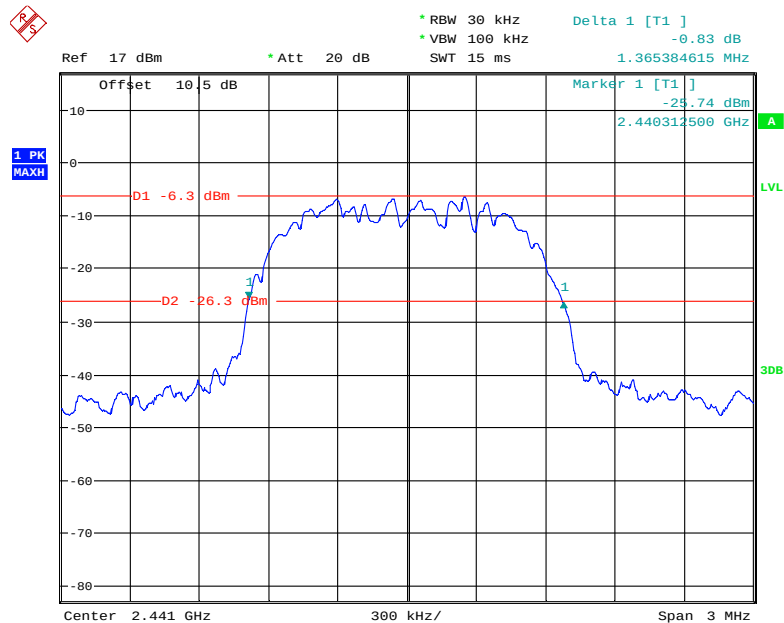


Date: 28.NOV.2018 15:14:47

EDR ($\pi/4$ -DQPSK): High Channel

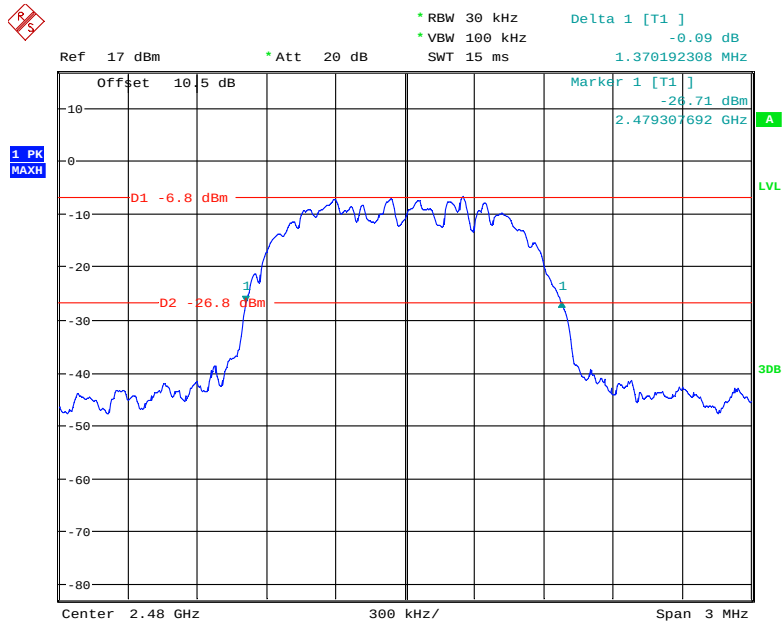


Date: 28.NOV.2018 15:16:11

EDR (8DPSK): Low Channel

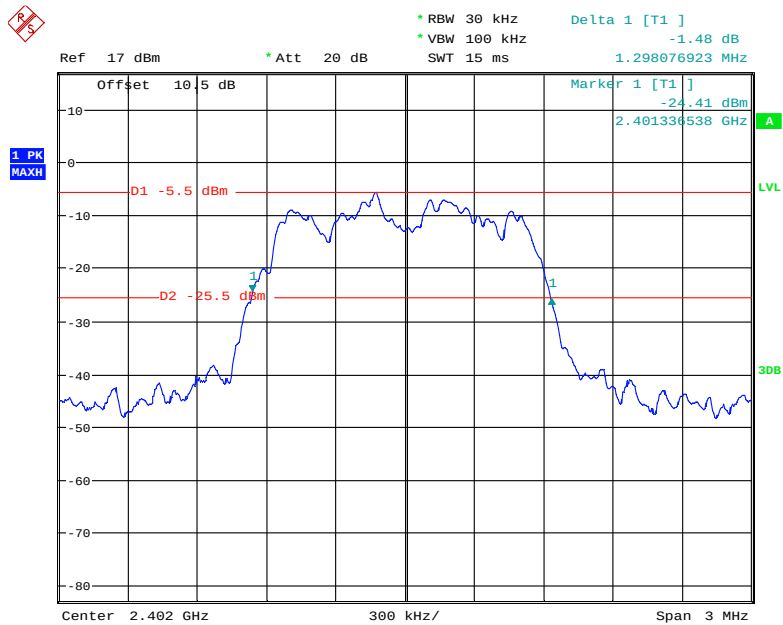


Date: 28.NOV.2018 15:11:35

EDR (8DPSK): Middle Channel

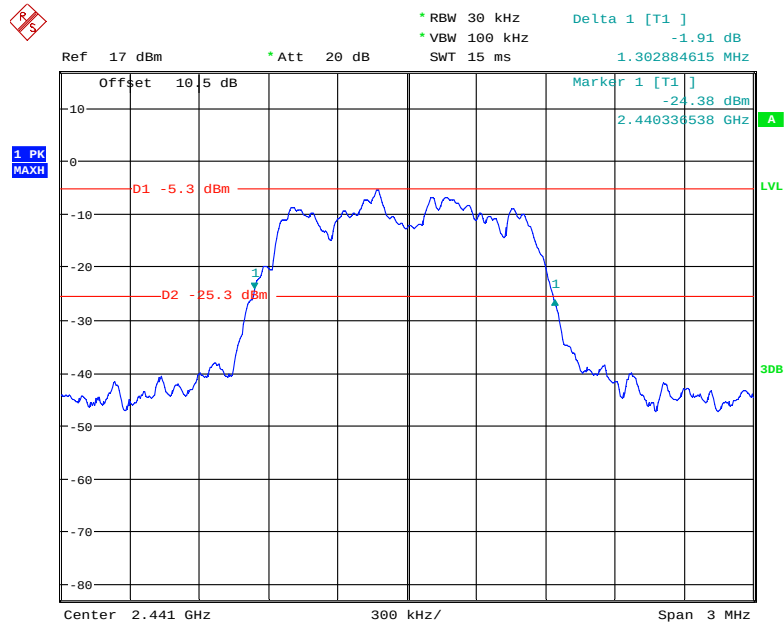

Date: 28.NOV.2018 15:10:42

EDR (8DPSK): High Channel

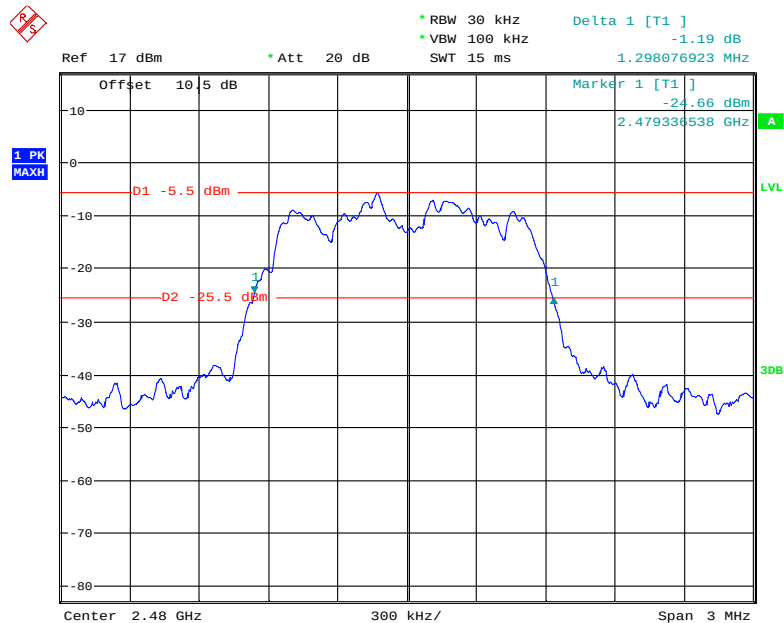

Date: 28.NOV.2018 15:07:11

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by James fu on 2018-11-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR (8DPSK)	2400-2483.5	79	≥ 15

BDR (GFSK): Number of Hopping Channels

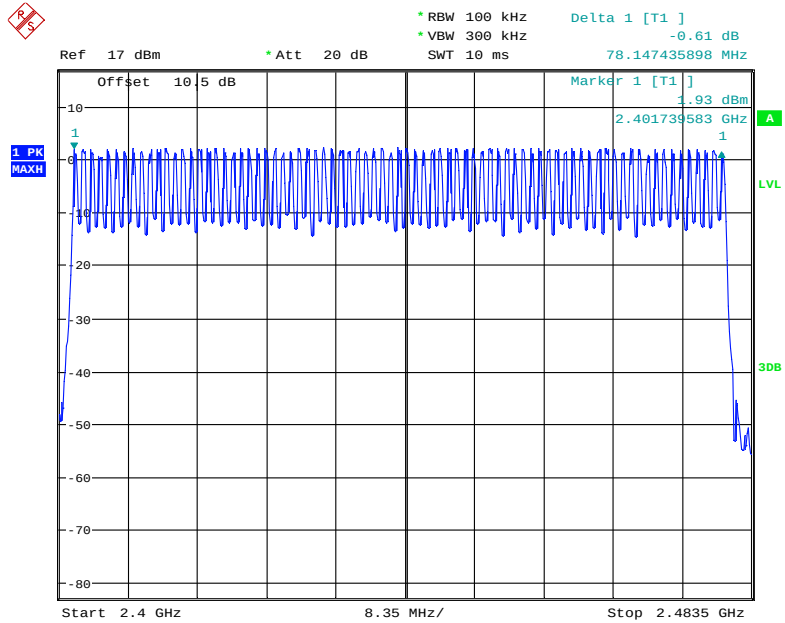


Date: 28.NOV.2018 16:20:39

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

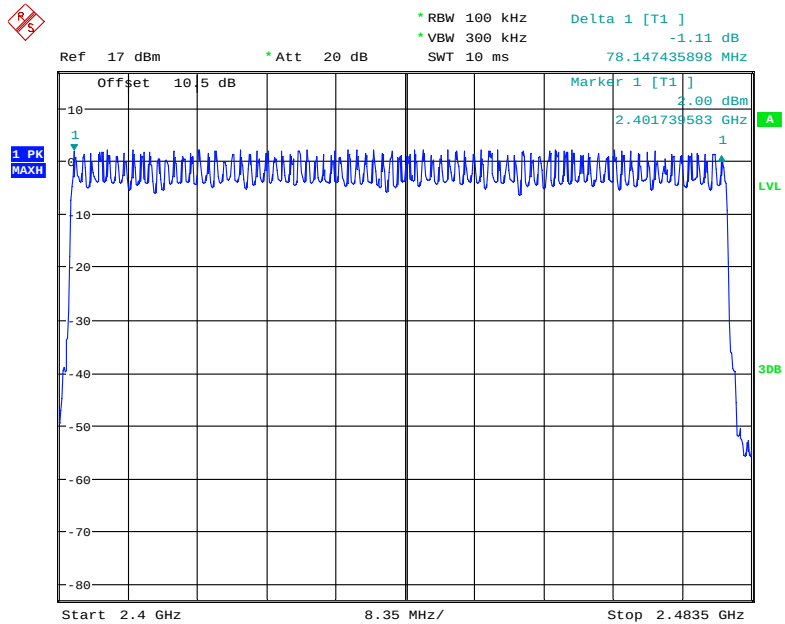

Date: 28.NOV.2018 16:17:08

EDR (8DPSK): Number of Hopping Channels

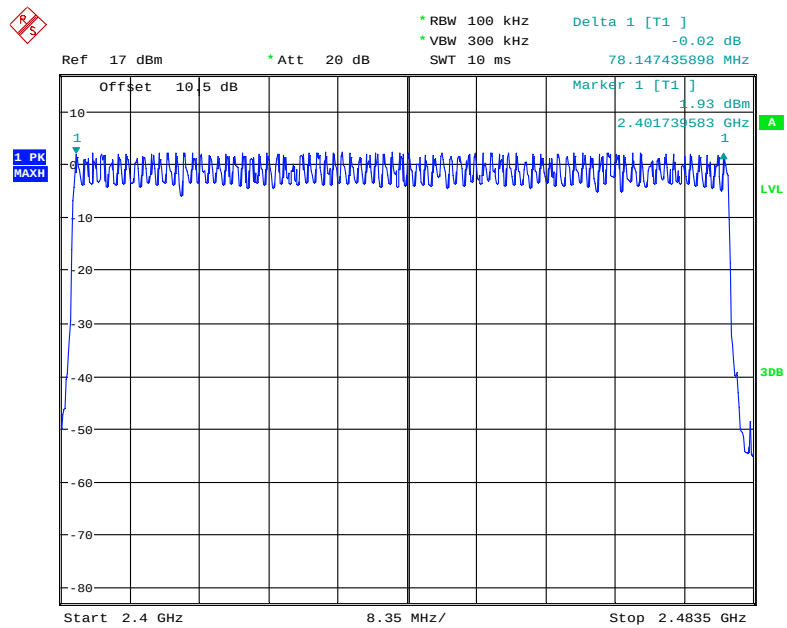

Date: 28.NOV.2018 16:14:37

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWEELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by James fu on 2018-12-03.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.413	0.132	0.4	Pass
		Middle	0.413	0.132	0.4	Pass
		High	0.413	0.132	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.691	0.271	0.4	Pass
		Middle	1.691	0.271	0.4	Pass
		High	1.691	0.271	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.933	0.313	0.4	Pass
		Middle	2.933	0.313	0.4	Pass
		High	2.933	0.313	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.423	0.135	0.4	Pass
		Middle	0.423	0.135	0.4	Pass
		High	0.423	0.135	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.691	0.271	0.4	Pass
		Middle	1.691	0.271	0.4	Pass
		High	1.691	0.271	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.933	0.313	0.4	Pass
		Middle	2.933	0.313	0.4	Pass
		High	2.933	0.313	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.423	0.135	0.4	Pass
		Middle	0.423	0.135	0.4	Pass
		High	0.423	0.135	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.691	0.271	0.4	Pass
		Middle	1.691	0.271	0.4	Pass
		High	1.691	0.271	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.944	0.314	0.4	Pass
		Middle	2.944	0.314	0.4	Pass
		High	2.944	0.314	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK):

Pulse time, Low Channel, DH1

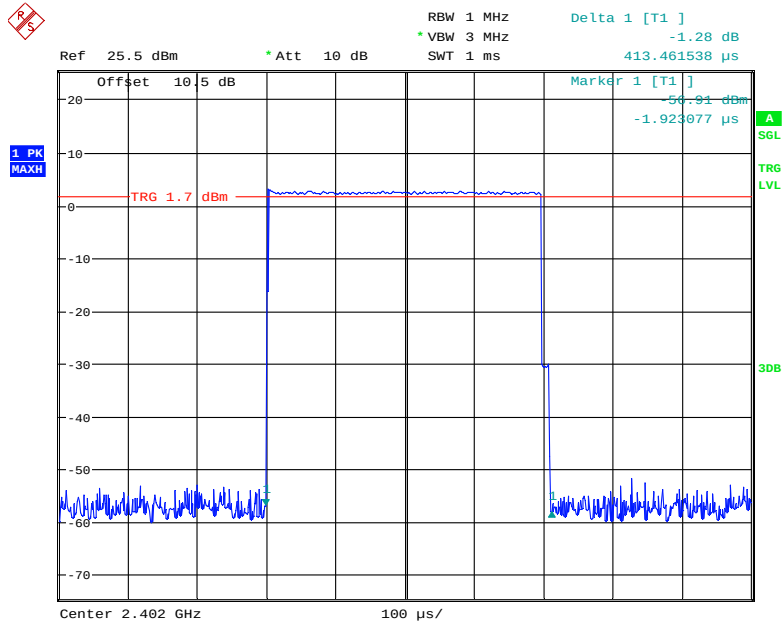


Date: 3.DEC.2018 09:22:04

Pulse time, Middle Channel, DH1

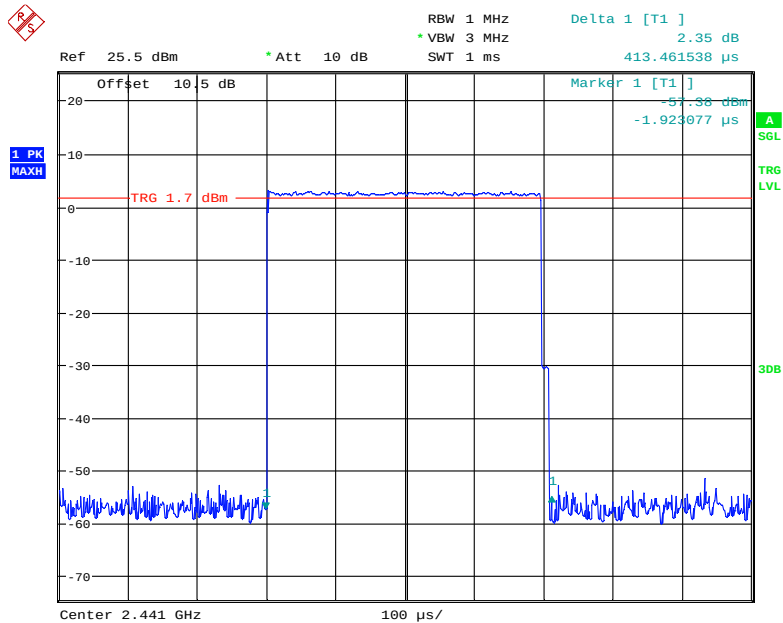


Date: 3.DEC.2018 09:23:34

Pulse time, High Channel, DH1

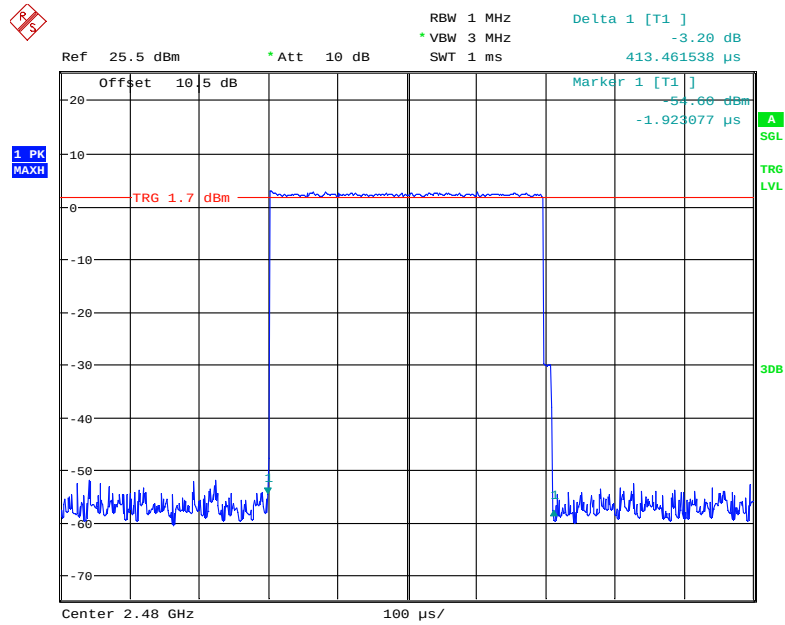


Date: 3.DEC.2018 09:23:50

Pulse time, Low Channel, DH3

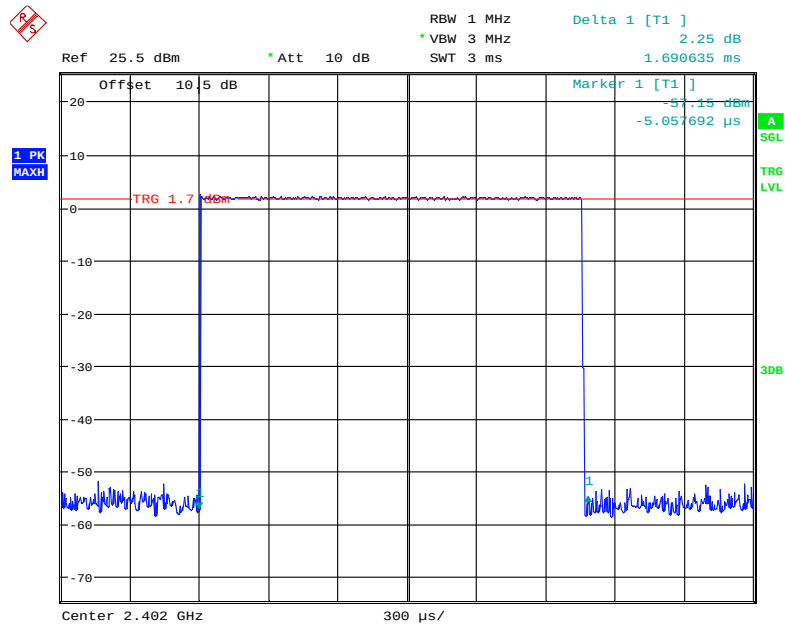


Date: 3.DEC.2018 09:34:32

Pulse time, Middle Channel, DH3

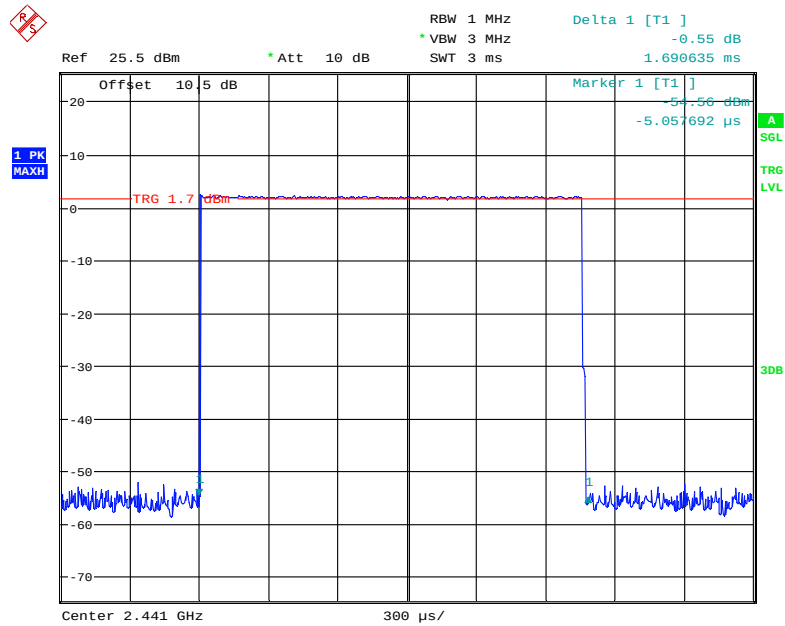


Date: 3.DEC.2018 09:34:45

Pulse time, High Channel, DH3

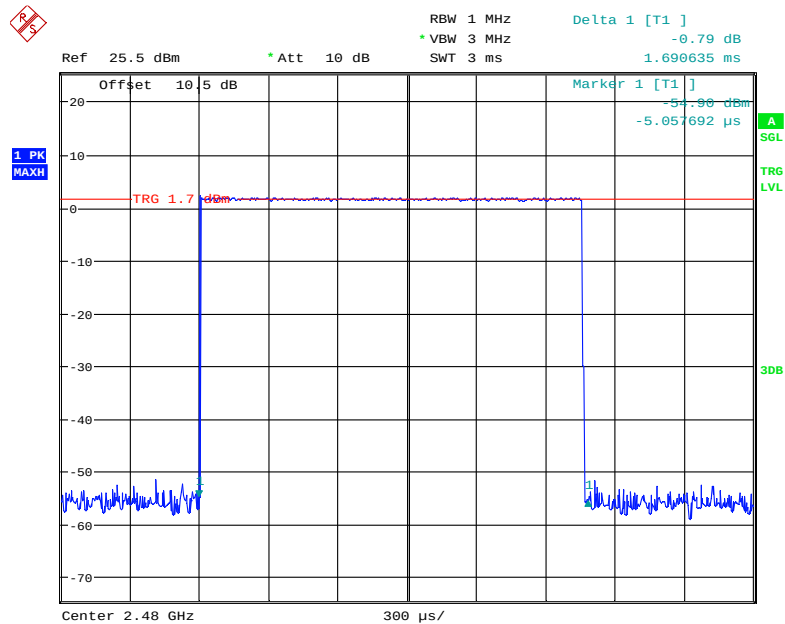


Date: 3.DEC.2018 09:35:00

Pulse time, Low Channel, DH5

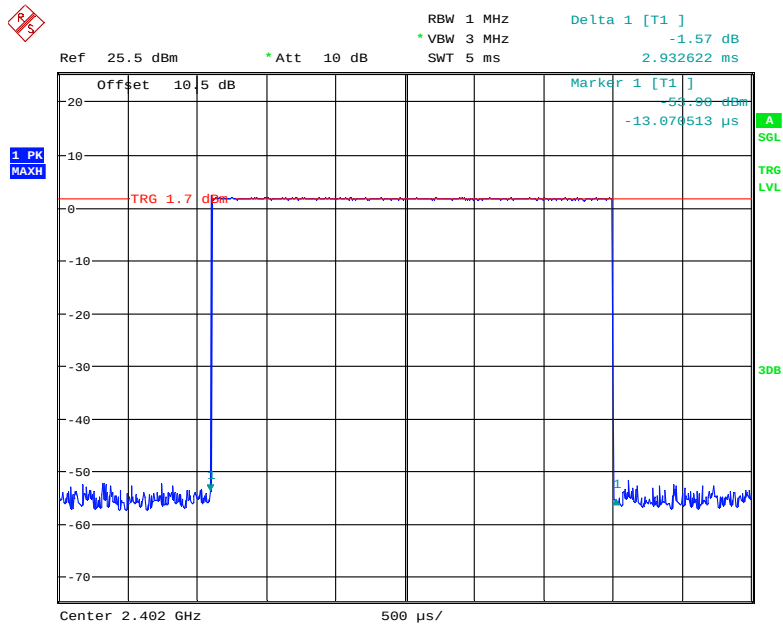

Date: 3.DEC.2018 09:38:28

Pulse time, Middle Channel, DH5

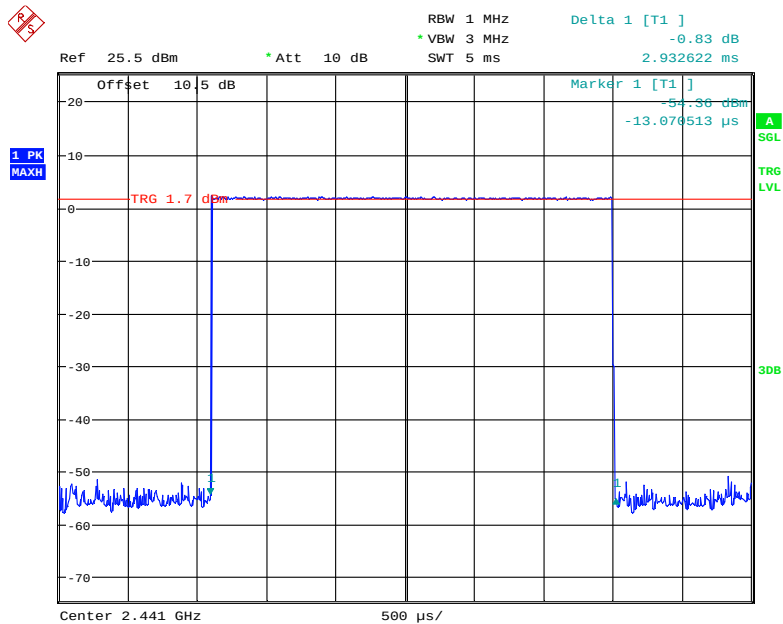

Date: 3.DEC.2018 09:38:15


Ref 25.5 dBm * Att 10 dB RBW 1 MHz Delta 1 [T1] 0.28 dB
 * VBW 3 MHz SWT 5 ms 2.932622 ms

Offset 10.5 dB Marker 1 [T1] -13.07 dBm
 -13.070513 μs


1 PK MAXH TRG 1.7 dBm A SGL TRG LVL 3dB

Center 2.48 GHz 500 μs/

Pulse time, Low Channel, 2DH1




Pulse time, Middle Channel, 2DH1

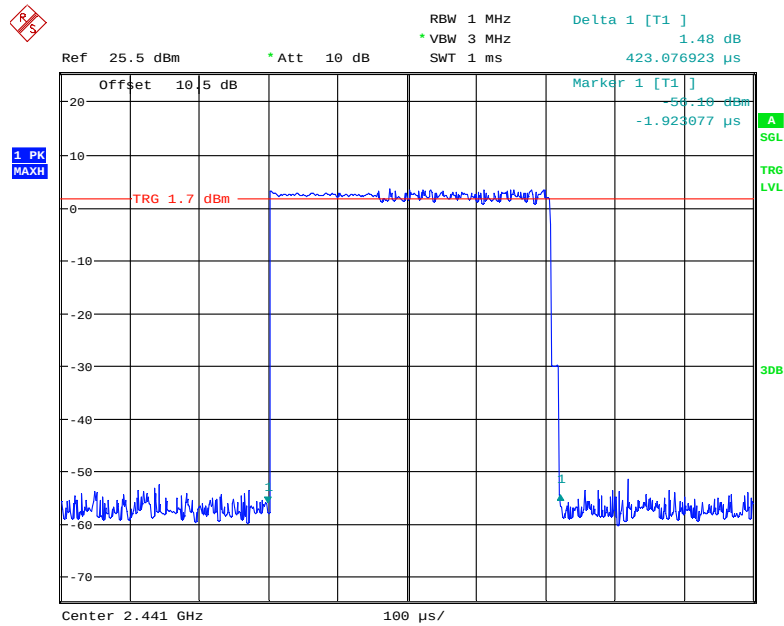


Date: 3.DEC.2018 09:24:52

Pulse time, High Channel, 2DH1

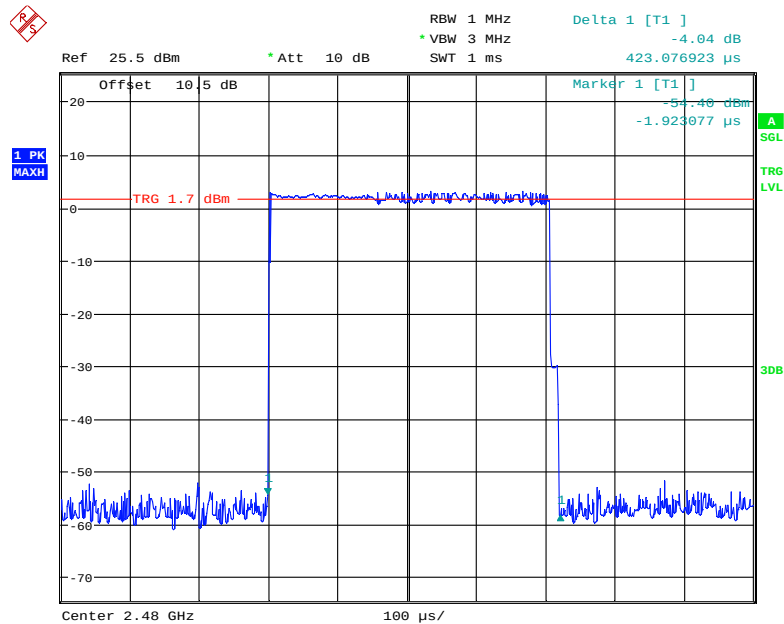


Date: 3.DEC.2018 09:24:29

Pulse time, Low Channel, 2DH3

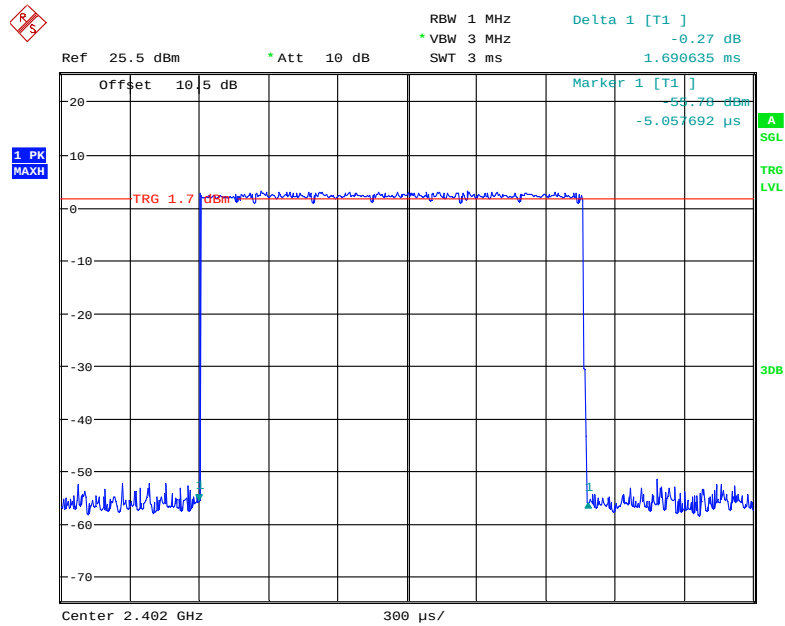


Date: 3.DEC.2018 09:33:14

Pulse time, Middle Channel, 2DH3

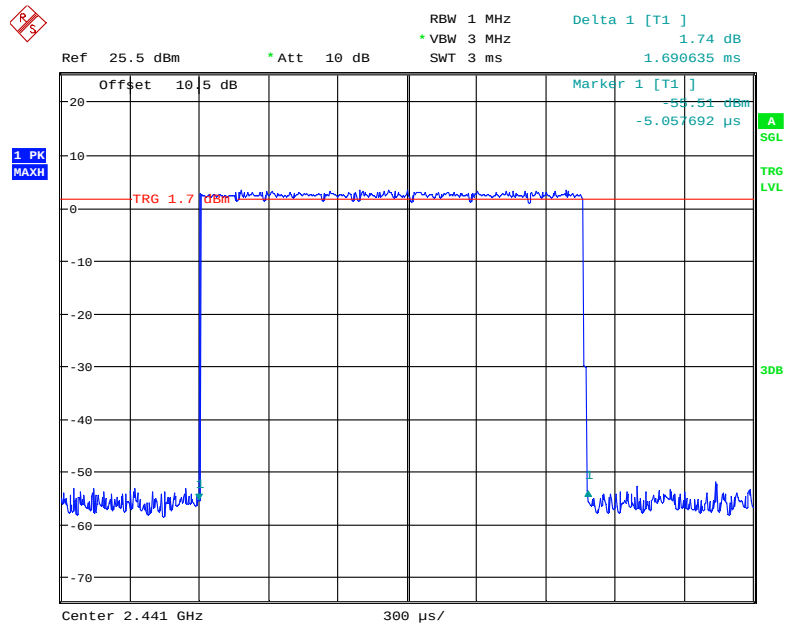


Date: 3.DEC.2018 09:30:02

Pulse time, High Channel, 2DH3

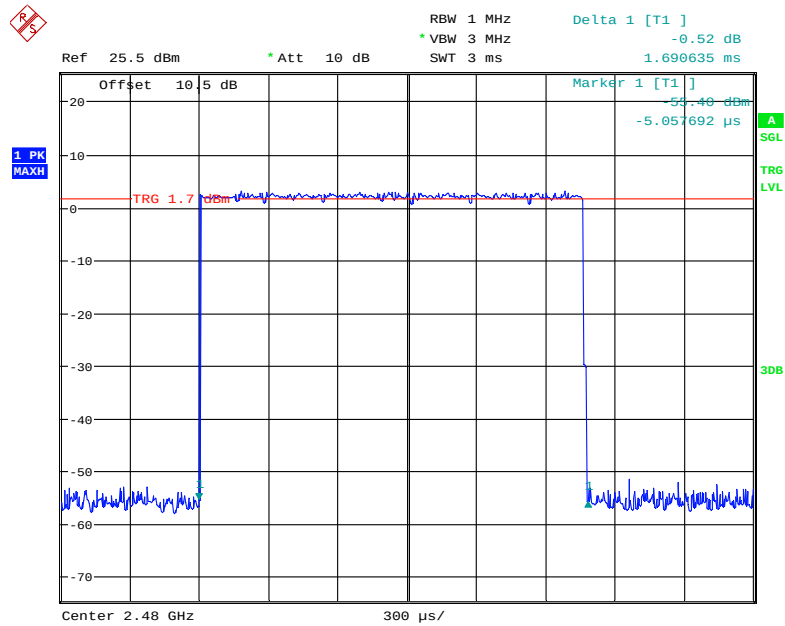


Date: 3.DEC.2018 09:30:40

Pulse time, Low Channel, 2DH5

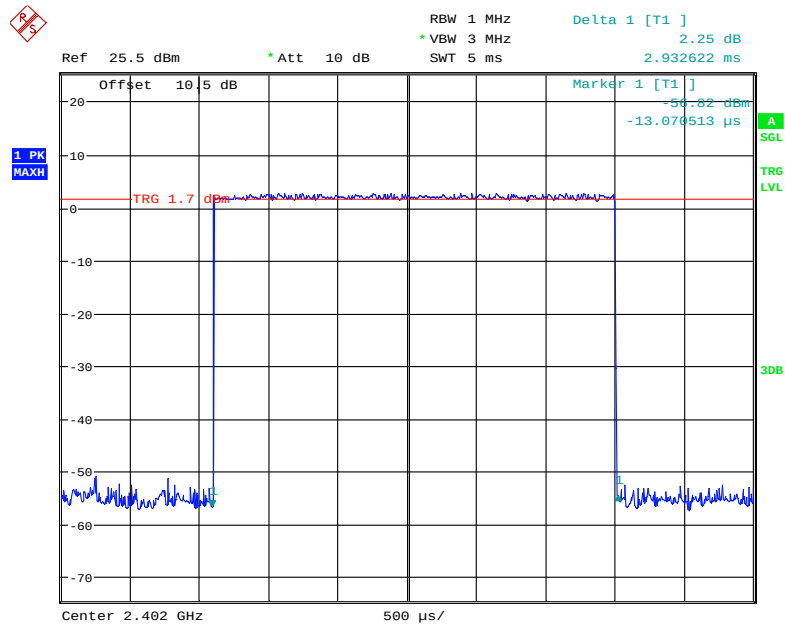


Date: 3.DEC.2018 09:38:51

Pulse time, Middle Channel, 2DH5

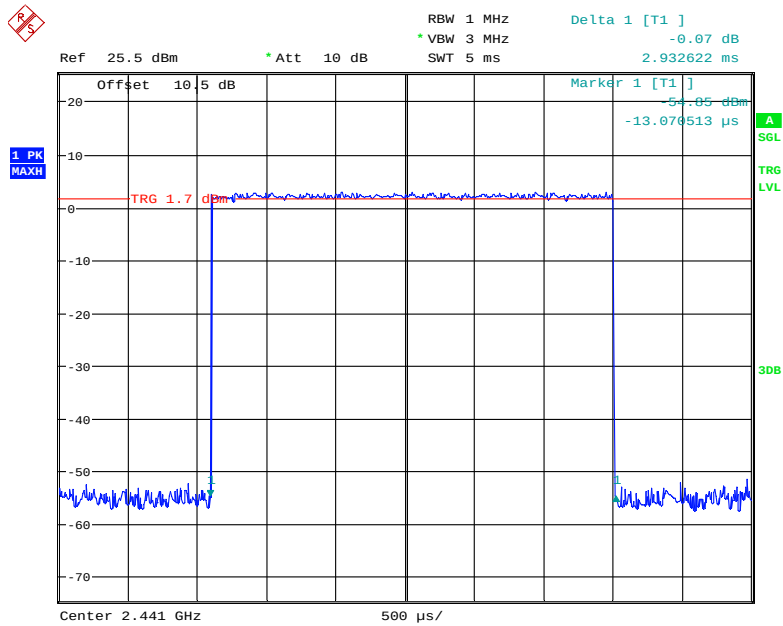


Date: 3.DEC.2018 09:39:04

Pulse time, High Channel, 2DH5

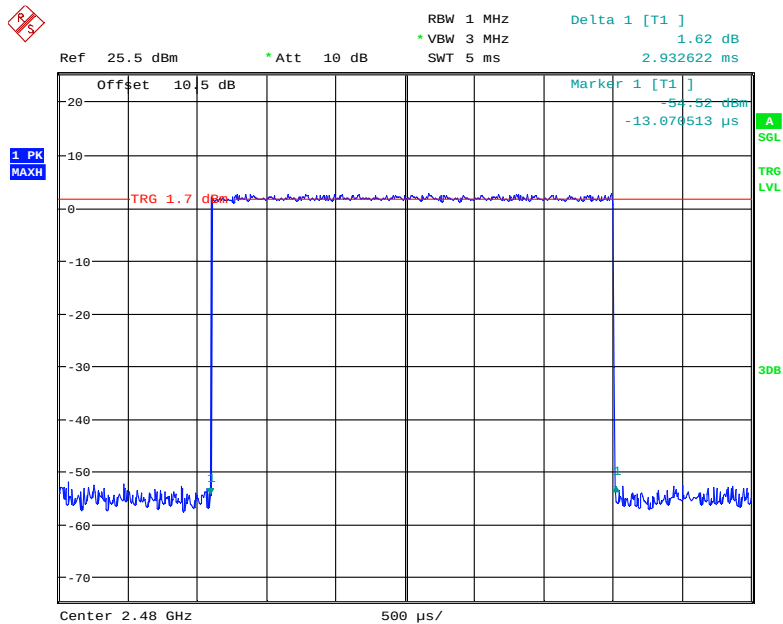


Date: 3.DEC.2018 09:39:21

EDR (8DPSK): Pulse time, Low Channel, 3DH1

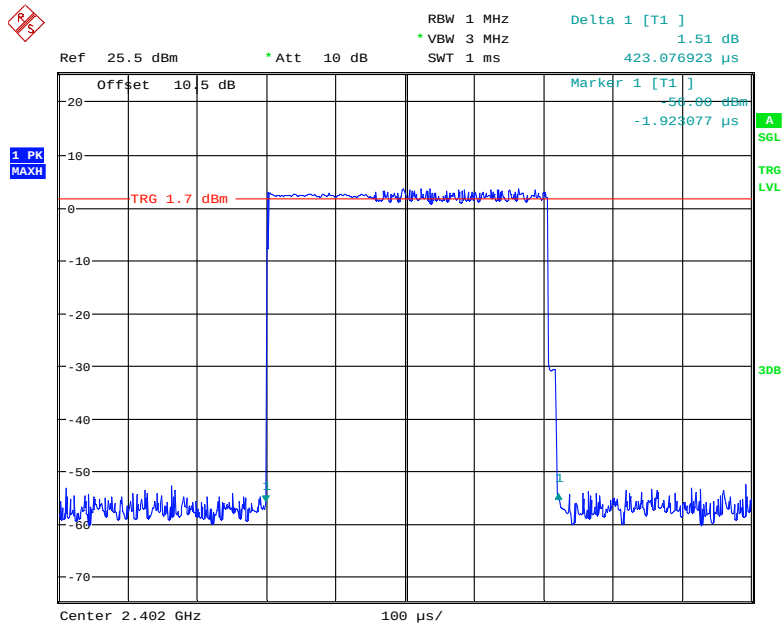


Date: 3.DEC.2018 09:25:34

Pulse time, Middle Channel, 3DH1

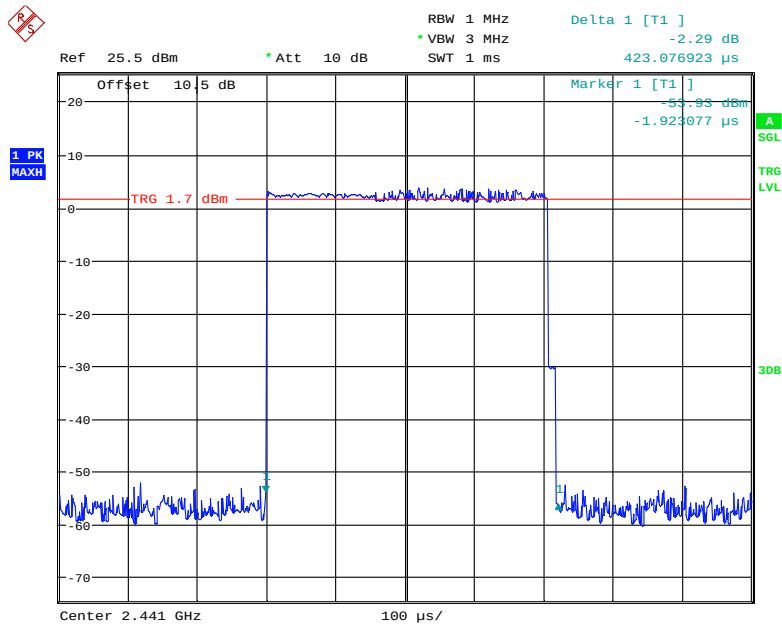


Date: 3.DEC.2018 09:25:54

Pulse time, High Channel, 3DH1

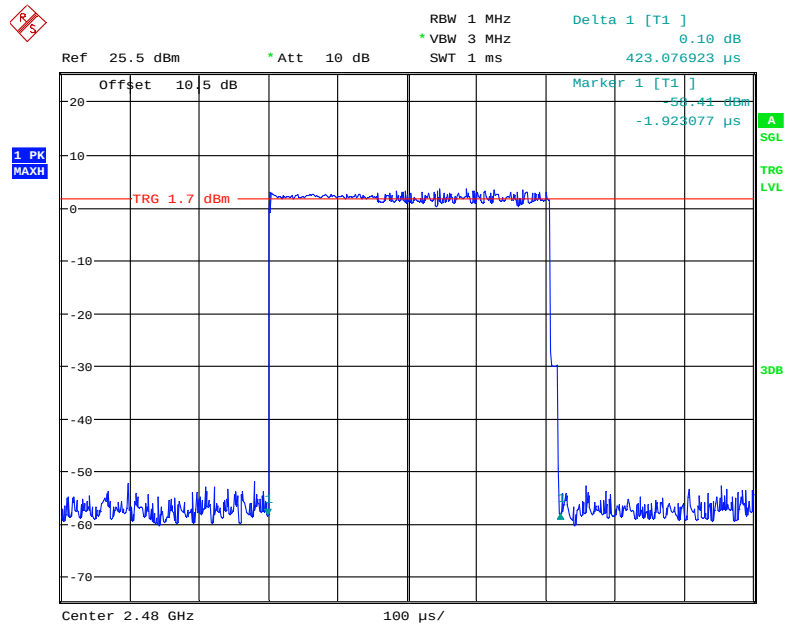


Date: 3.DEC.2018 09:26:07

Pulse time, Low Channel, 3DH3

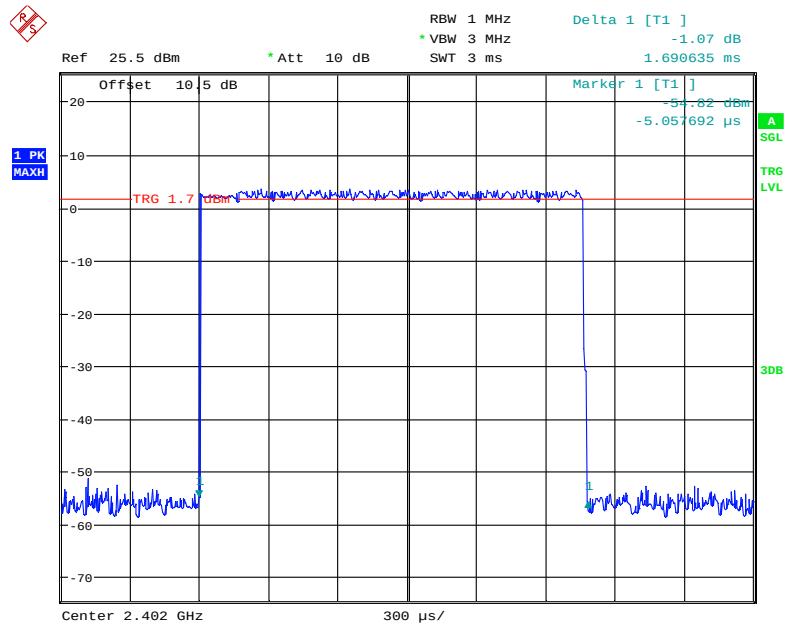


Date: 3.DEC.2018 09:29:27

Pulse time, Middle Channel, 3DH3

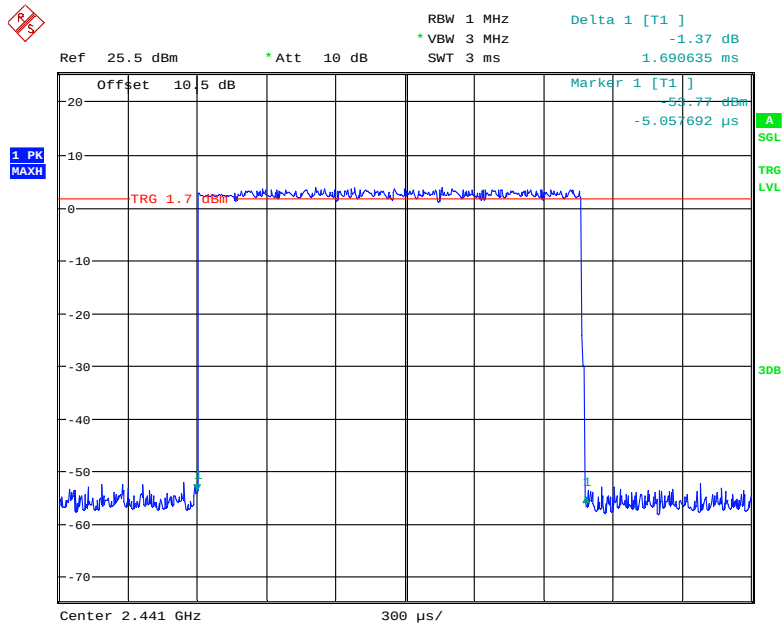


Date: 3.DEC.2018 09:29:15

Pulse time, High Channel, 3DH3

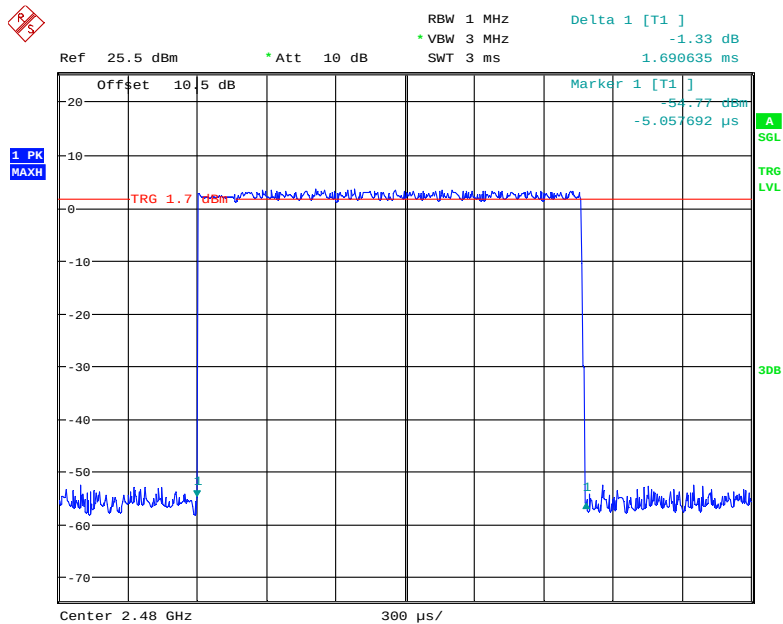


Date: 3.DEC.2018 09:28:47

Pulse time, Low Channel, 3DH5

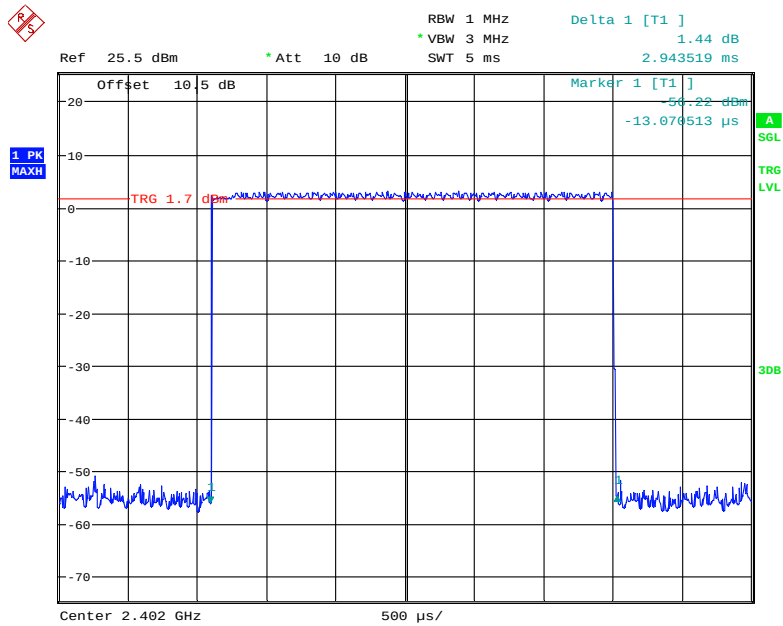


Date: 3.DEC.2018 09:40:49

Pulse time, Middle Channel, 3DH5

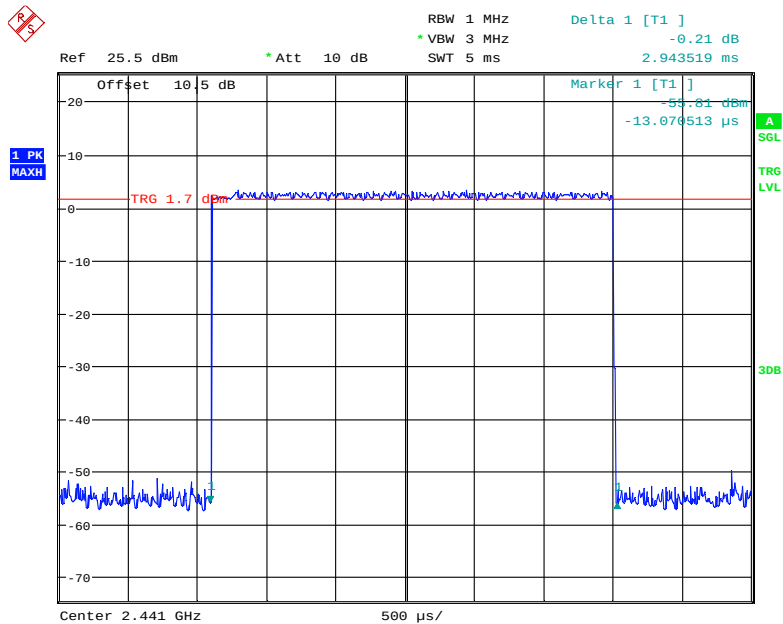

Date: 3.DEC.2018 09:40:37

Pulse time, High Channel, 3DH5

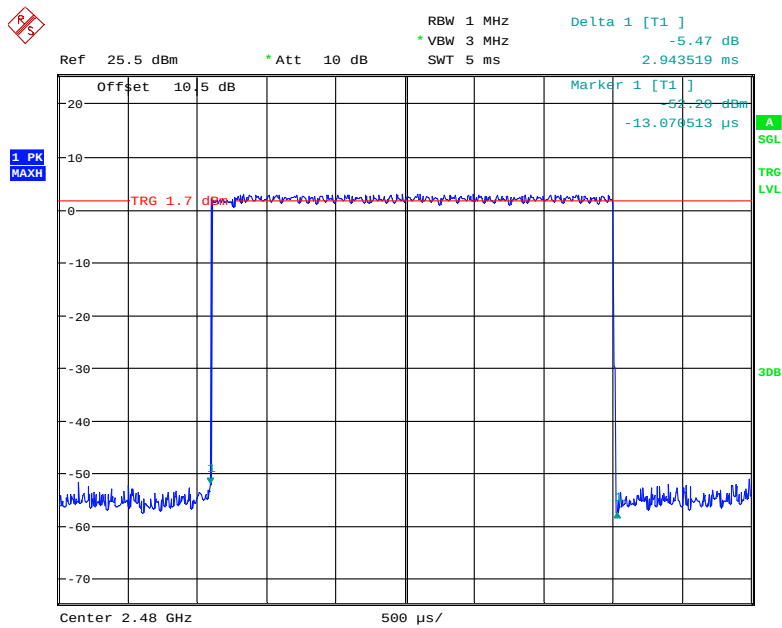

Date: 3.DEC.2018 09:40:01

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by James fu on 2018-11-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	2.46	1.762	125
	Middle	2441	2.38	1.730	125
	High	2480	2.24	1.675	125
EDR ($\pi/4$-DQPSK)	Low	2402	3.44	2.208	125
	Middle	2441	3.67	2.328	125
	High	2480	3.61	2.296	125
EDR (8DPSK)	Low	2402	3.61	2.296	125
	Middle	2441	3.93	2.472	125
	High	2480	3.74	2.366	125

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by James fu on 2018-11-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


BDR (GFSK): Band Edge-Left Side

Hopping

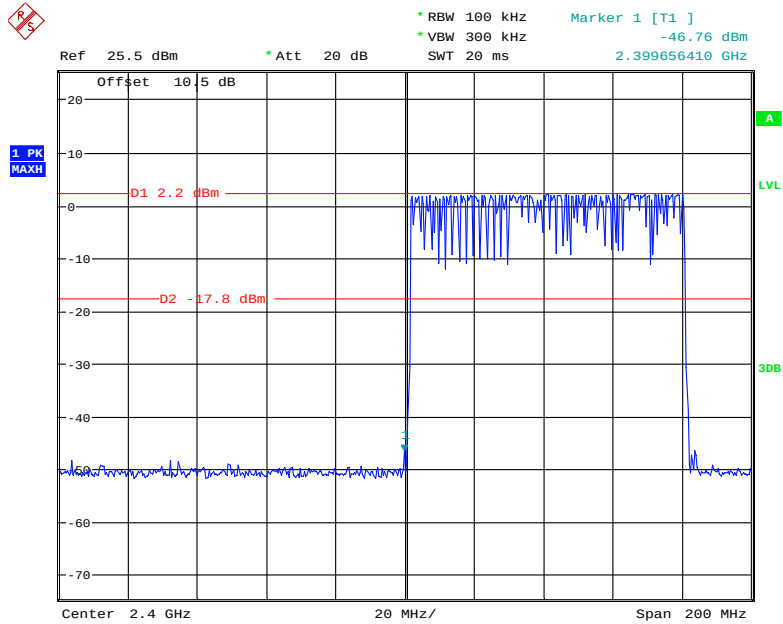


Date: 28.NOV.2018 10:16:24

Single

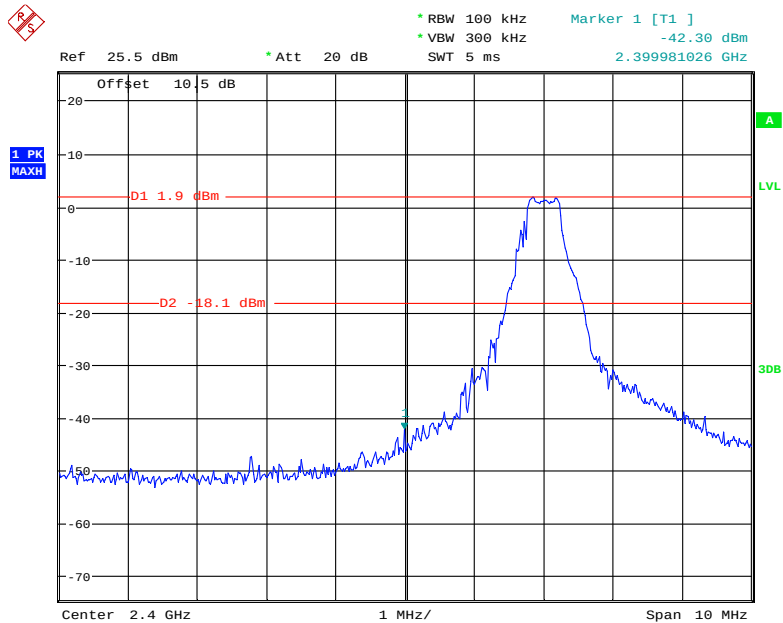


Date: 28.NOV.2018 09:58:14

BDR (GFSK): Band Edge-Right Side Hopping

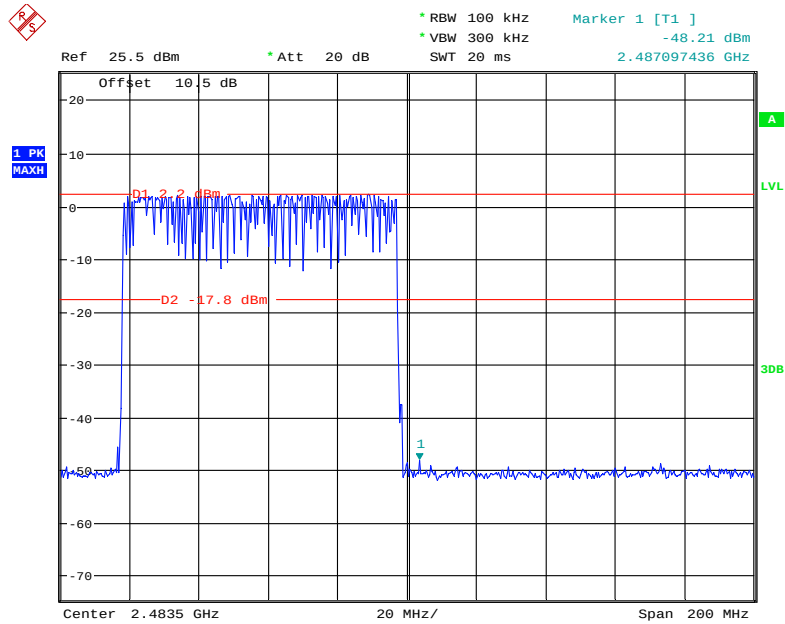


Date: 28.NOV.2018 10:15:01

Single

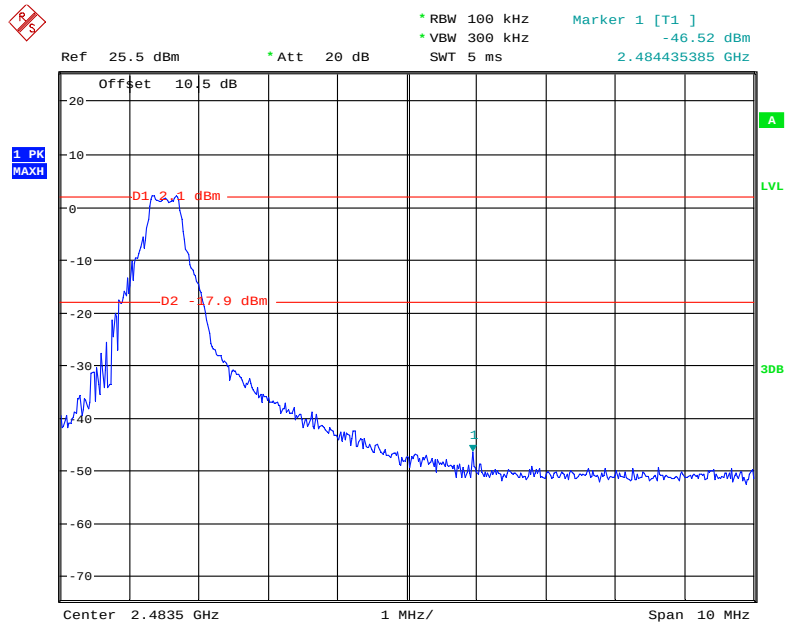


Date: 28.NOV.2018 09:57:20

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side Hopping

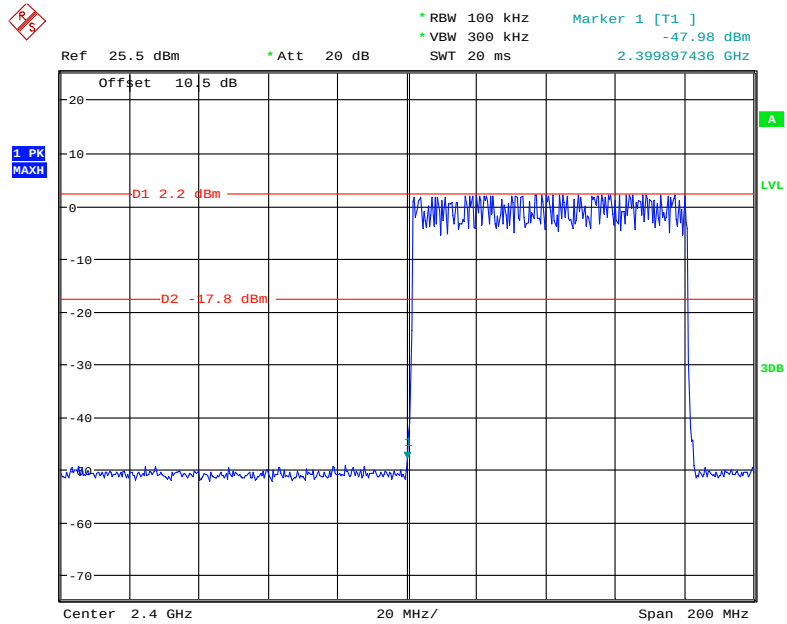


Date: 28.NOV.2018 10:03:51

Single

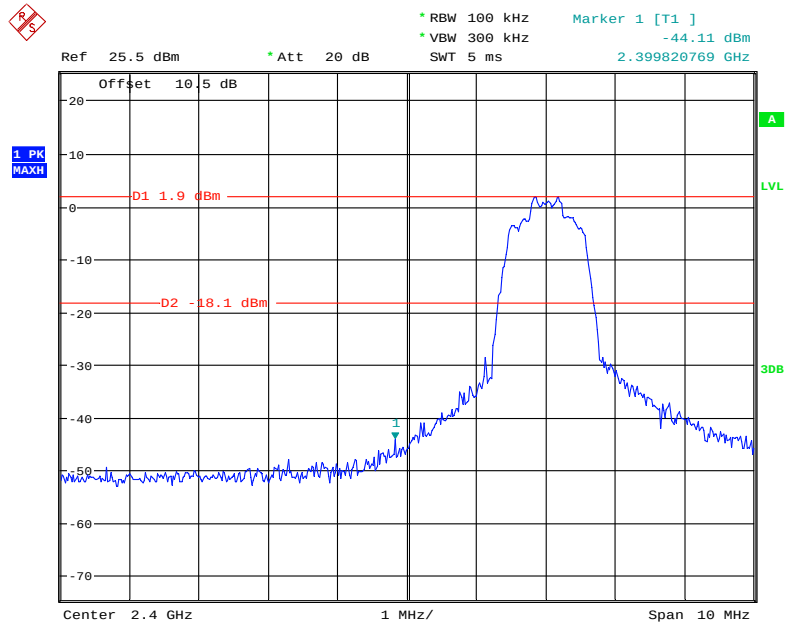


Date: 28.NOV.2018 10:00:34

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side Hopping

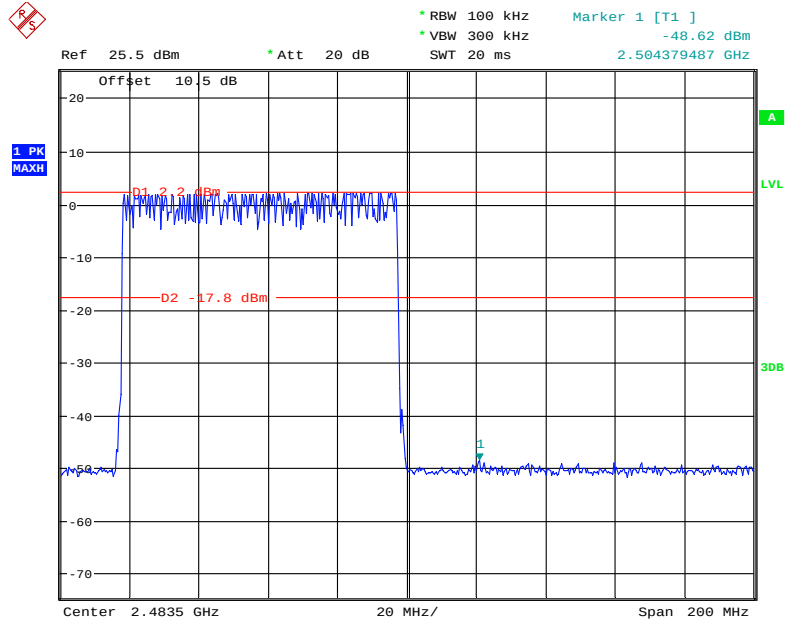


Date: 28.NOV.2018 10:05:22

Single

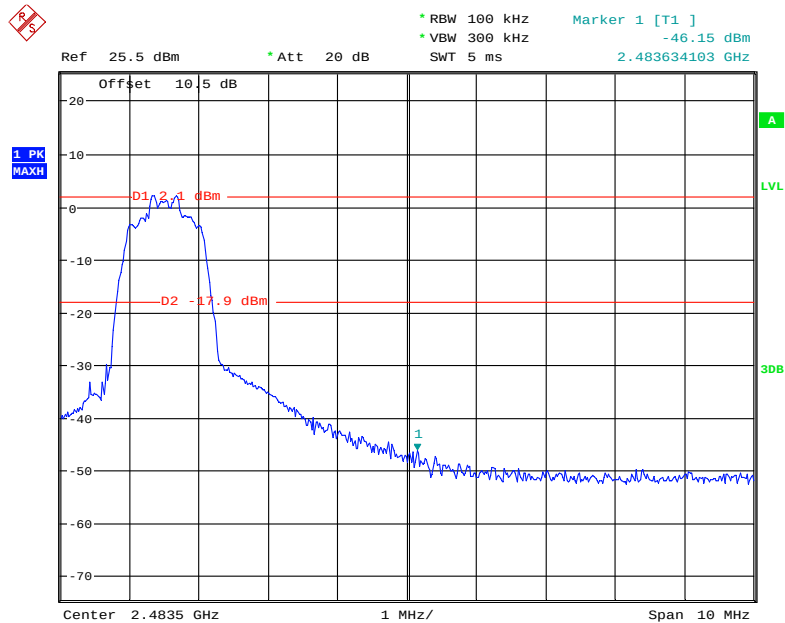


Date: 28.NOV.2018 10:01:37

EDR (8DPSK): Band Edge-Left Side Hopping

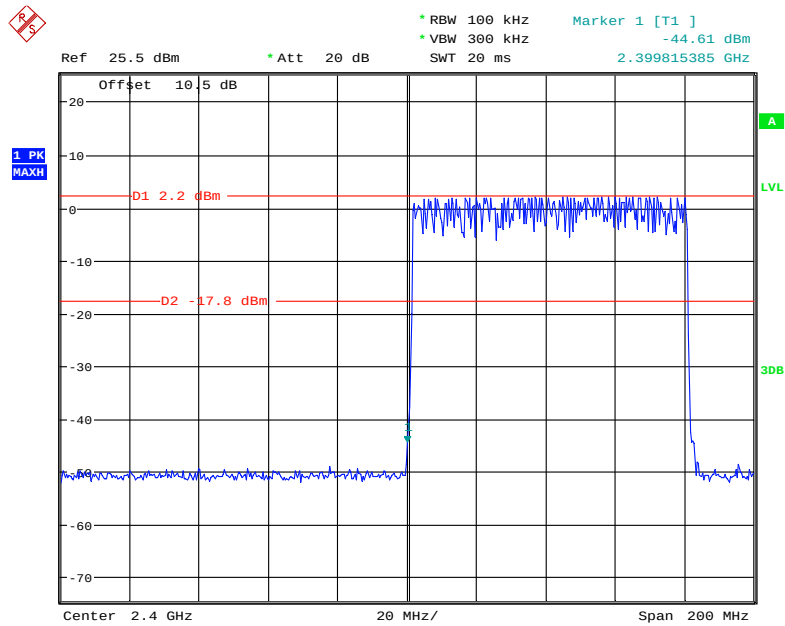


Date: 28.NOV.2018 10:09:56

Single

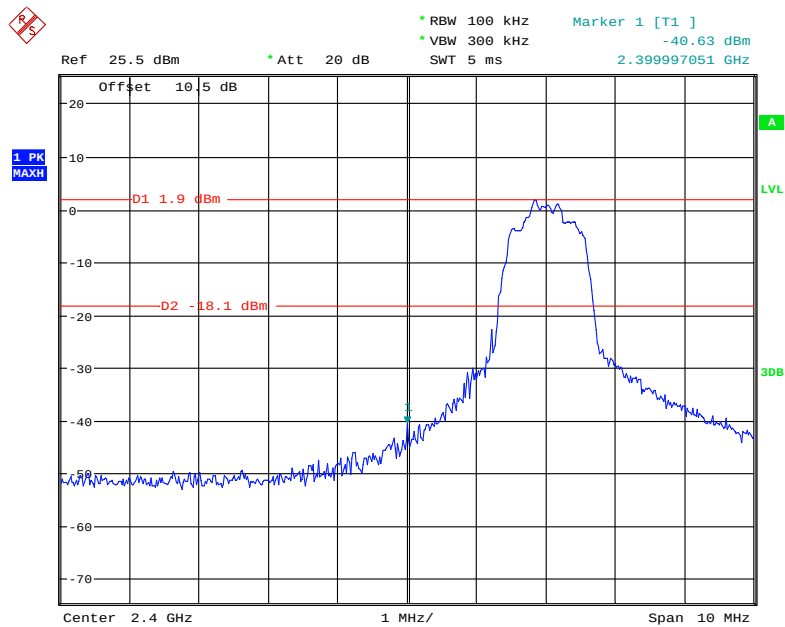


Date: 28.NOV.2018 10:10:51

EDR (8DPSK): Band Edge-Right Side Hopping

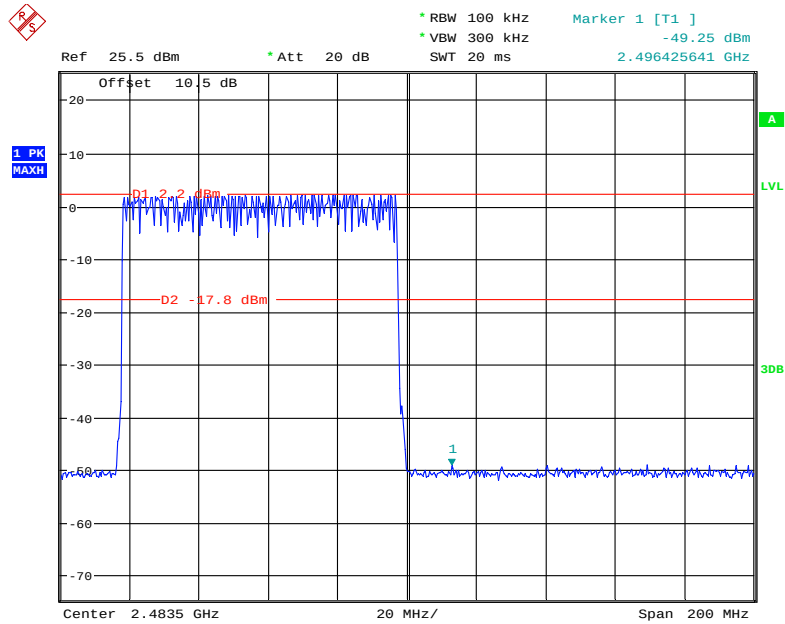

Date: 28.NOV.2018 10:08:43

Single

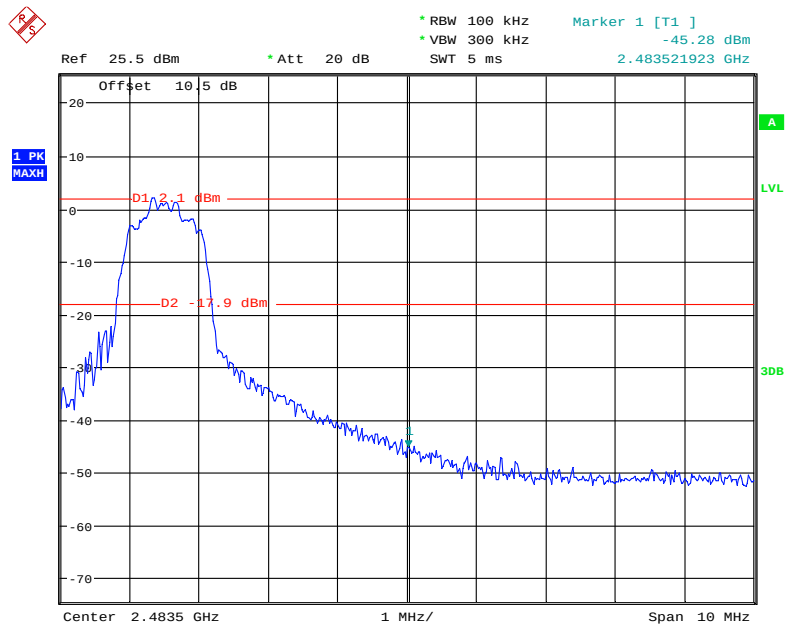

Date: 28.NOV.2018 10:12:56

***** END OF REPORT *****