

TEST REPORT

Product Name : PANOX V2
Brand Mark : Labpano
Model No. : PIP223
Extension model : PIP223+
FCC ID : 2ARZ2-PIP223
Report Number : BLA-EMC-202306-A5105
Date of Sample Receipt : 2023/6/14
Date of Test : 2023/6/15 to 2023/7/5
Date of Issue : 2023/7/6
Test Standard : 47 CFR Part 15, Subpart E 15.407
Test Result : Pass

Prepared for:

Labpano Technology (Changzhou) Co., Ltd.
Building 4D, No.160 Xihu West Road, Wujin National Hi-tech Industrial
Zone, Changzhou, Jiangsu, China.

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

charlie

Approved by:

Blue Zheng

Review by:

Sueels

Date:

2023/7/6



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/7/6	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY	6
2 GENERAL INFORMATION	7
3 GENERAL DESCRIPTION OF E.U.T.....	7
4 TEST ENVIRONMENT	8
5 TEST MODE	8
6 MEASUREMENT UNCERTAINTY	8
7 DESCRIPTION OF SUPPORT UNIT	9
8 LABORATORY LOCATION	9
9 TEST INSTRUMENTS LIST	10
10 FREQUENCY STABILITY	12
10.1 LIMITS	12
10.2 BLOCK DIAGRAM OF TEST SETUP	12
10.3 TEST DATA	12
11 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	13
11.1 LIMITS	13
11.2 BLOCK DIAGRAM OF TEST SETUP	14
11.3 PROCEDURE	14
11.4 TEST DATA	16
12 RADIATED EMISSIONS	24
12.1 BLOCK DIAGRAM OF TEST SETUP	24
12.2 PROCEDURE	24
12.3 TEST DATA	26
13 DFS: CHANNEL CLOSING TRANSMISSION TIME	40
13.1 LIMITS	40
13.2 BLOCK DIAGRAM OF TEST SETUP	40
13.3 PROCEDURE	40
13.4 TEST DATA	42
14 DFS: NON-OCCUPANCY PERIOD	43
14.1 LIMITS	43
14.2 BLOCK DIAGRAM OF TEST SETUP	43

14.3 PROCEDURE	43
14.4 TEST DATA	45
15 PEAK POWER SPECTRUM DENSITY	46
15.1 LIMITS	46
15.2 BLOCK DIAGRAM OF TEST SETUP	46
15.3 TEST DATA	47
16 MAXIMUM CONDUCTED OUTPUT POWER	48
16.1 LIMITS	48
16.2 BLOCK DIAGRAM OF TEST SETUP	48
16.3 TEST DATA	49
17 MINIMUM 6 DB BANDWIDTH (5.725-5.85 GHZ BAND)	50
17.1 LIMITS	50
17.2 BLOCK DIAGRAM OF TEST SETUP	50
17.3 TEST DATA	50
18 26DB EMISSION BANDWIDTH	51
18.1 BLOCK DIAGRAM OF TEST SETUP	51
18.2 TEST DATA	51
19 99% BANDWIDTH	52
19.1 BLOCK DIAGRAM OF TEST SETUP	52
19.2 TEST DATA	52
20 DUTY CYCLE	53
20.1 BLOCK DIAGRAM OF TEST SETUP	53
20.2 TEST DATA	53
21 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	54
21.1 LIMITS	54
21.2 BLOCK DIAGRAM OF TEST SETUP	54
21.3 PROCEDURE	54
21.4 TEST DATA	56
22 ANTENNA REQUIREMENT	58
22.1 CONCLUSION	58
23 APPENDIX	60

23.1 BAND1:	60
23.2 MAXIMUM CONDUCTED OUTPUT POWER	60
23.3 -26dB BANDWIDTH	75
23.4 OCCUPIED CHANNEL BANDWIDTH	90
23.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL	105
23.6 BAND EDGE	120
23.7 FREQUENCY STABILITY	132
23.8 CONDUCTED RF SPURIOUS EMISSION	141
23.9 BAND4:	156
23.10 MAXIMUM CONDUCTED OUTPUT POWER	156
23.11 -6dB BANDWIDTH	171
23.12 OCCUPIED CHANNEL BANDWIDTH	186
23.13 MAXIMUM POWER SPECTRAL DENSITY LEVEL	201
23.14 BAND EDGE	216
23.15 FREQUENCY STABILITY	228
23.16 CONDUCTED RF SPURIOUS EMISSION	237
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	252
APPENDIX B: PHOTOGRAPHS OF EUT	254

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Frequency Stability	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.8	47 CFR Part 15, Subpart C 15.407 (g)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
DFS: Channel Closing Transmission Time	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	N/A
DFS: Non-occupancy period	47 CFR Part 15, Subpart E 15.407	KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	N/A
Peak Power spectrum density	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II F	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Transmitter Power Control	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (h)(1)	N/A
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II E	47 CFR Part 15, Subpart C 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 2	47 CFR Part 15, Subpart C 15.407 (e)	Pass
26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 D02 II C 1	47 CFR Part 15, Subpart C 15.407 (a)	Pass
99% Bandwidth	47 CFR Part 15, Subpart E 15.407	KDB 789033 II D	N/A	Pass
Duty Cycle	47 CFR Part 15, Subpart E 15.407	KDB 789033 II B 1	KDB 789033 D02 II B 1	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)	Pass
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Remark:

N/A: Not Applicable

2 GENERAL INFORMATION

Applicant	Labpano Technology (Changzhou) Co., Ltd.
Address	Building 4D, No.160 Xihu West Road, Wujin National Hi-tech Industrial Zone, Changzhou, Jiangsu, China.
Manufacturer	Labpano Technology (Changzhou) Co., Ltd.
Address	Building 4D, No.160 Xihu West Road, Wujin National Hi-tech Industrial Zone, Changzhou, Jiangsu, China.
Factory	Labpano Technology (Changzhou) Co., Ltd.
Address	Building 4D, No.160 Xihu West Road, Wujin National Hi-tech Industrial Zone, Changzhou, Jiangsu, China.
Product Name	PANOX V2
Test Model No.	PIP223
Extension model	PIP223+
Remark	All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are model name for commercial purpose.

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.1
Software Version	N/A
Operation Frequency:	Band 1 : 5180MHz-5240MHz; Band 4 : 5745MHz-5825MHz
Channel numbers:	Band 1: 802.11a/802.11n(HT20)/802.11ac(HT20): 4, 802.11n(HT40)/802.11ac(HT40):2 802.11ac(HT80): 1
Channel separation:	802.11a/n/ac(HT20): 20MHz, 802.11n/ac(HT40): 40MHz, 802.11ac(HT80): 80MHz
Modulation technology: (IEEE 802.11a/n/ac/ax)	BPSK, QPSK, 16-QAM, 64-QAM, 256QAM, OFDMA
Data speed(IEEE 802.11a)	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n/ac):	Up to 866.7Mbps
Antenna Type:	FPC Antenna
Antenna Gain:	ANT1(L):1.89dBi ANT2(R):0.94dBi (Provided by the applicant)
Antenna information:	Antenna number: 2 SISO mode: 802.11a/802.11n(HT20)/ 802.11n(HT40)/ 802.11ac(HT20)/ 802.11ac(HT40)/ 802.11ac(HT80) MIMO mode: 802.11n(HT20)/ 802.11n(HT40)/ 802.11ac(HT20)/ 802.11ac(HT40)/ 802.11ac(HT80) Directional gain = $10 \log[(10^{ANT1/20} + 10^{ANT2/20})^2 / N_{ANT}]$ dBi = $10 \log[(10^{1.89/20} + 10^{0.94/20})^2 / 2]$ = 4.44dBi
Remark: The Antenna Gain is supplied by the customer. BlueAsia is not responsible for this data	

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.8V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation.
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	From lab
PC	lenovo	E46OC	N/A	From lab (No.BLA-ZC-BS-2022005)
Mobile	iPhone	iPhone 6	N/A	From lab (No.BLA-ZC-BS-2022065)

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2024/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2024/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2024/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2024/08/16

Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2024/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2024/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2024/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2024/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2024/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
Audio Analyzer	Audioprecision	N/A	ATSI-41094	2022/7/1	2024/6/30
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A


10 FREQUENCY STABILITY

Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	ANSI C63.10 (2013) Section 6.8
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

10.1 LIMITS

Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
---------------	---

10.2 BLOCK DIAGRAM OF TEST SETUP

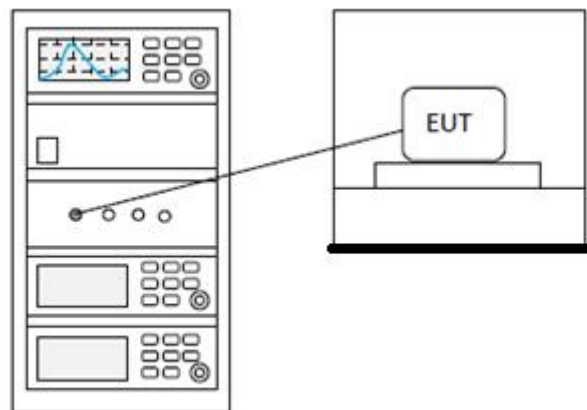

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

11 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart E 15.407
Test Method	KDB 789033 D02 II G
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

11.2 BLOCK DIAGRAM OF TEST SETUP

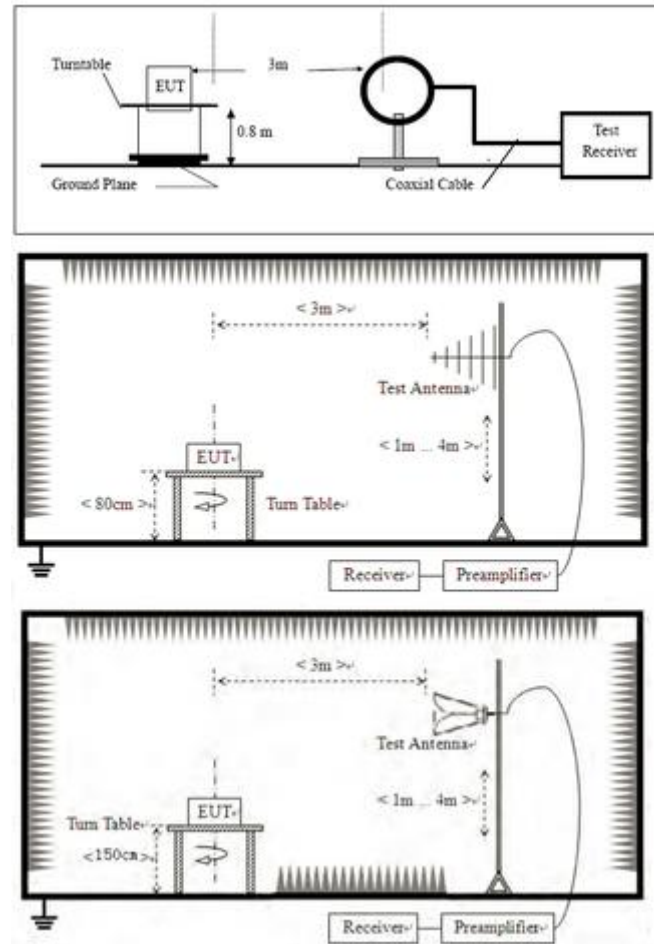

11.3 PROCEDURE


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

11.4 TEST DATA

Remark: During the test, pre-scan the 802.11a/n/ac mode, and found the 802.11a mode which it is worse case.

[TestMode: TX band 1 a 5180 channel]; [Polarity: Horizontal]

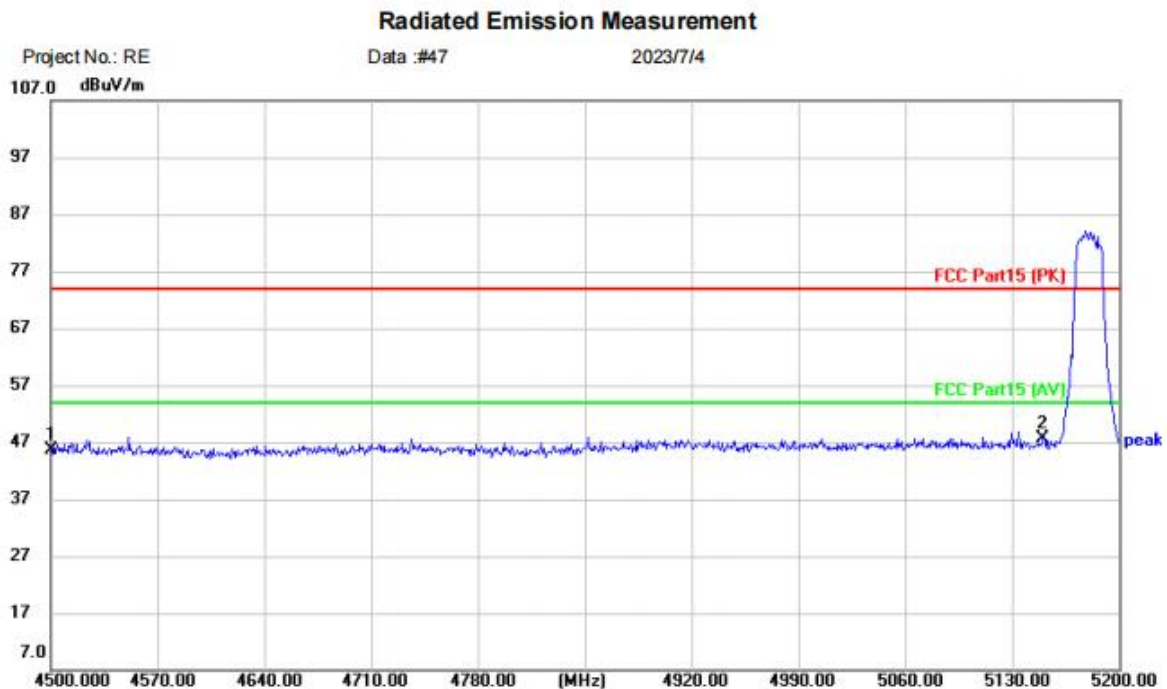


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: PANOX V2		
M/N: PIP223		
Mode: 5G Band1 A TX-L		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4500.000	44.18	1.39	45.57	74.00	-28.43	peak	
2	*	5150.000	44.39	3.20	47.59	74.00	-26.41	peak	

Test Result: Pass

[TestMode: TX band 1 a 5180 channel]; [Polarity: Vertical]

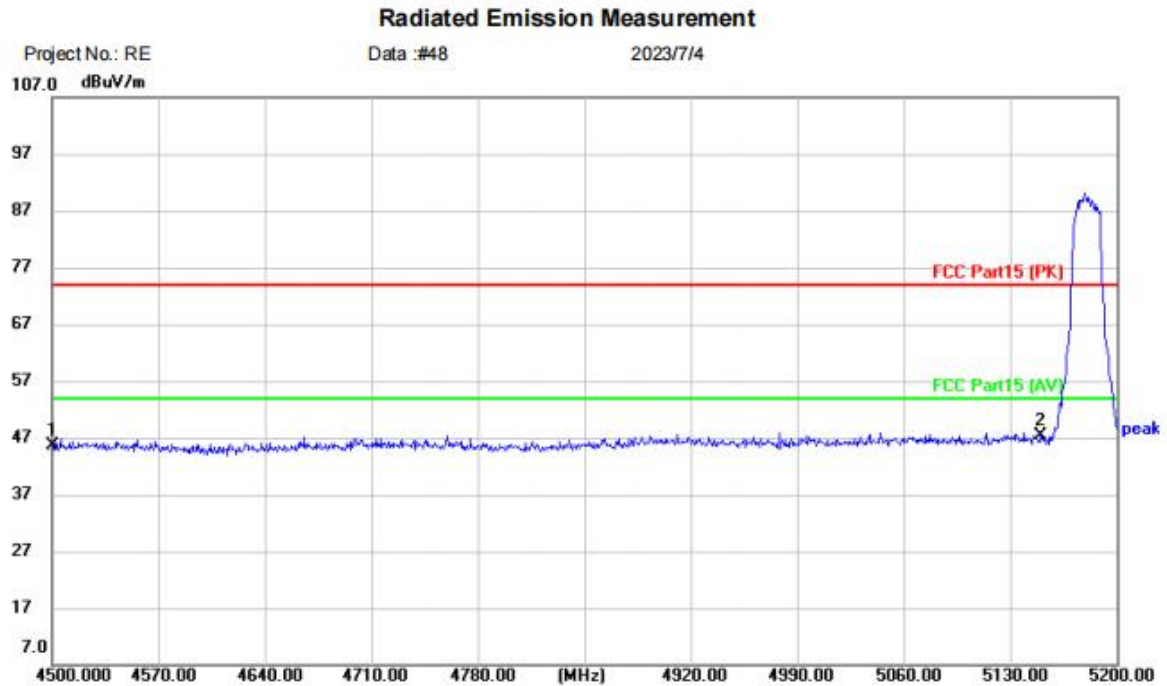


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: PANOX V2		
M/N: PIP223		
Mode: 5G Band1 A TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4500.000	44.12	1.39	45.51	74.00	-28.49	peak	
2	*	5150.000	44.20	3.20	47.40	74.00	-26.60	peak	

Test Result: Pass

[TestMode: TX band1 a 5240 channel]; [Polarity: Horizontal]

Radiated Emission Measurement

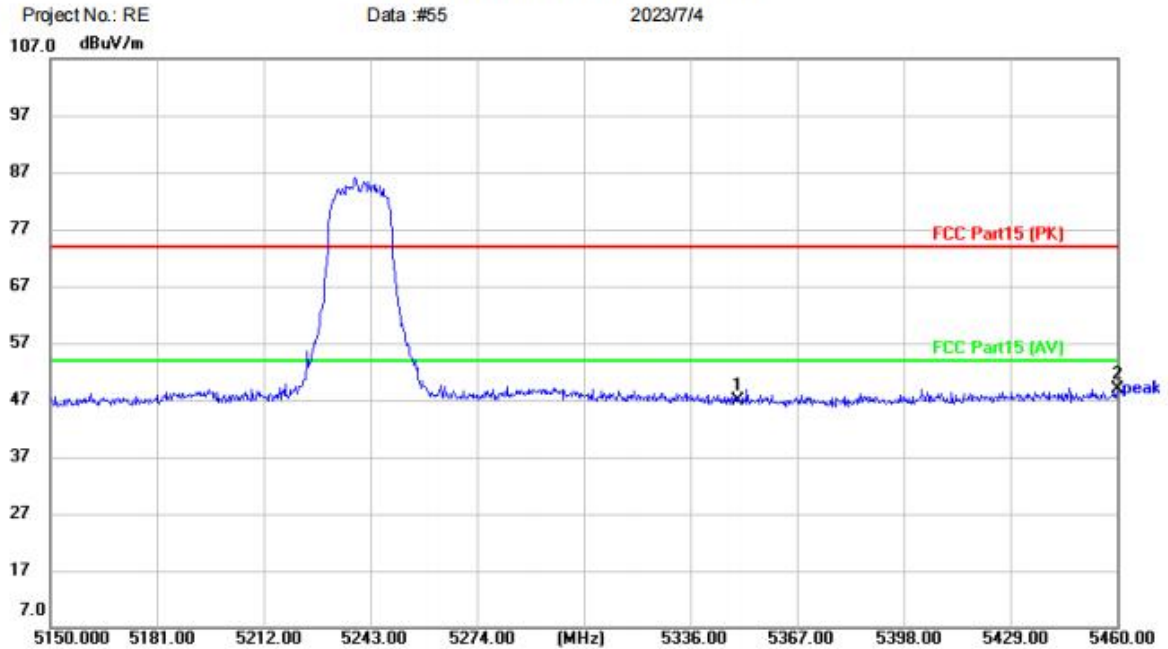


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: PANOX V2
M/N: PIP223
Mode: 5G Band1 A TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	43.21	3.58	46.79	74.00	-27.21	peak	
2	*	5460.000	44.92	3.84	48.76	74.00	-25.24	peak	

Test Result: Pass


[TestMode: TX band1 a 5240 channel]; [Polarity: Vertical]

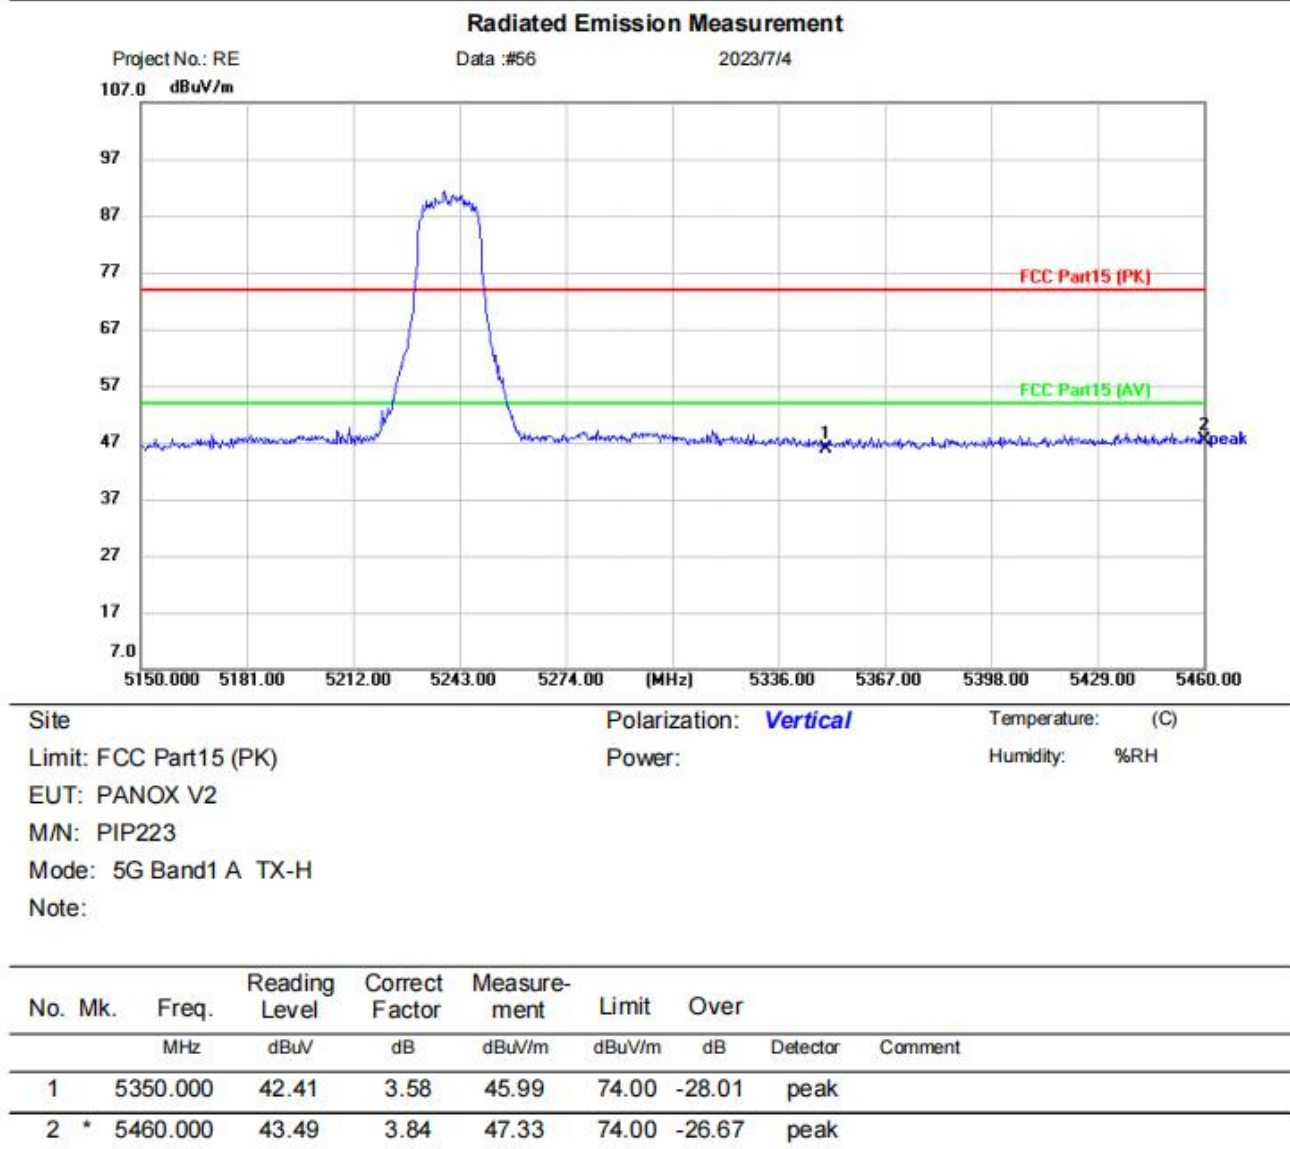

Test Result: Pass

[TestMode: TX band4 a 5745 channel]; [Polarity: Horizontal]

Radiated Emission Measurement

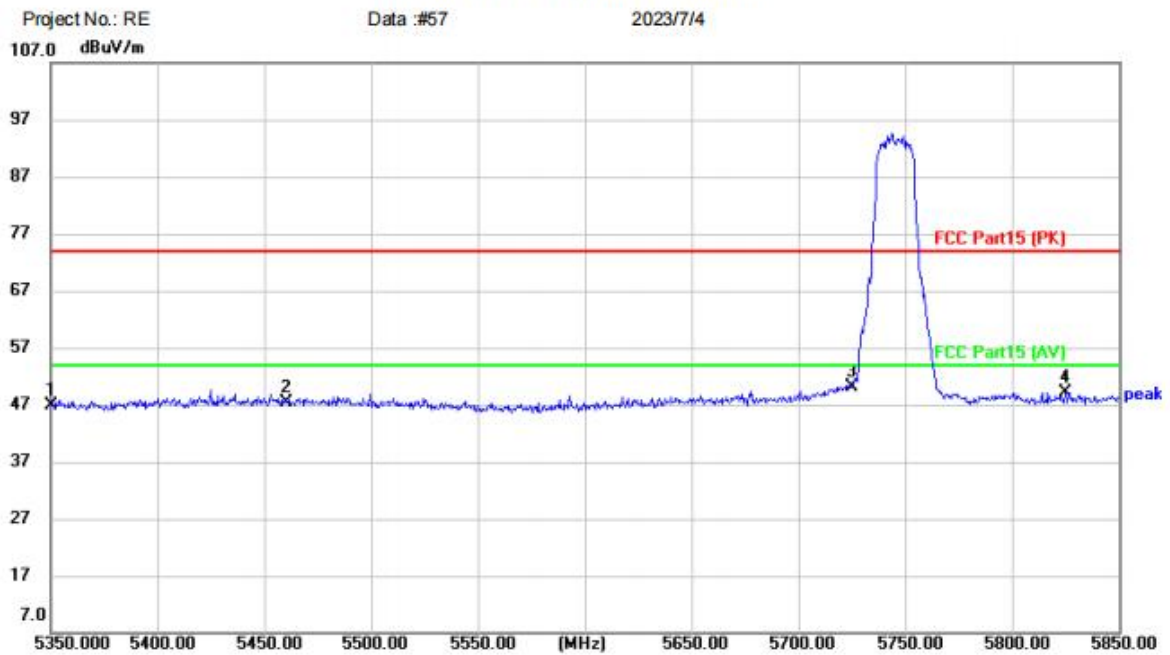

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: PANOX V2
M/N: PIP223
Mode: 5G Band4 A TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	43.38	3.58	46.96	74.00	-27.04	peak	
2		5460.000	43.49	3.84	47.33	74.00	-26.67	peak	
3	*	5725.000	45.89	4.29	50.18	74.00	-23.82	peak	
4		5825.000	44.79	4.27	49.06	74.00	-24.94	peak	

Test Result: Pass