

EMC Test Report***Application for FCC Grant of Equipment Authorization
Canada Certification******Innovation, Science and Economic Development Canada
RSS-Gen Issue 5 / RSS-247 Issue 2
FCC Part 15 Subpart C******Model: DS***

FCC ID: 2AS24DOSE

APPLICANT: DoseSmart
5814 Macarthur Blvd NW
Washington DC 20016TEST SITE(S): National Technical Systems
41039 Boyce Road.
Fremont, CA. 94538-2435

PROJECT NUMBER: PR087942

REPORT DATE: June 3, 2019

FINAL TEST DATES: December 6, 18 and 19, 2018 and January 18,
2019

TOTAL NUMBER OF PAGES: 45



This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

VALIDATING SIGNATORIES

PROGRAM MGR



David W. Bare
Chief Engineer

TECHNICAL REVIEWER:



David W. Bare
Chief Engineer

FINAL REPORT PREPARER:



David Guidotti
Senior Technical Writer

QUALITY ASSURANCE DELEGATE



Gary Izard
Technical Writer



REVISION HISTORY

Rev#	Date	Comments	Modified By
-	June 3, 2019	First release	

TABLE OF CONTENTS

COVER PAGE	1
VALIDATING SIGNATORIES	2
REVISION HISTORY	3
TABLE OF CONTENTS	4
SCOPE	5
OBJECTIVE	5
STATEMENT OF COMPLIANCE	6
DEVIATIONS FROM THE STANDARDS	6
TEST RESULTS SUMMARY	7
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHZ)	7
MEASUREMENT UNCERTAINTIES.....	8
EQUIPMENT UNDER TEST (EUT) DETAILS	9
GENERAL.....	9
OTHER EUT DETAILS	9
ANTENNA SYSTEM	9
ENCLOSURE.....	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT.....	9
EUT INTERFACE PORTS	10
EUT OPERATION	10
TEST SITE	11
GENERAL INFORMATION	11
CONDUCTED EMISSIONS CONSIDERATIONS	11
RADIATED EMISSIONS CONSIDERATIONS	11
MEASUREMENT INSTRUMENTATION	12
RECEIVER SYSTEM	12
INSTRUMENT CONTROL COMPUTER	12
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	12
FILTERS/ATTENUATORS	13
ANTENNAS.....	13
ANTENNA MAST AND EQUIPMENT TURNTABLE	13
INSTRUMENT CALIBRATION.....	13
TEST PROCEDURES	14
EUT AND CABLE PLACEMENT	14
CONDUCTED EMISSIONS.....	14
RADIATED EMISSIONS	14
CONDUCTED EMISSIONS FROM ANTENNA PORT	18
BANDWIDTH MEASUREMENTS	18
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	19
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN	19
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	19
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS	20
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	20
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	21
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	21
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	22
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	23
APPENDIX B TEST DATA	25
END OF REPORT	45

SCOPE

An electromagnetic emissions test has been performed on the DoseSmart model DS, pursuant to the following rules:

RSS-Gen Issue 5 "General Requirements for Compliance of Radio Apparatus"
RSS 247 Issue 2 "Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices"
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in National Technical Systems test procedures:

ANSI C63.10-2013
FCC DTS Measurement Guidance KDB558074

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

National Technical Systems is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of DoseSmart model DS complied with the requirements of the following regulations:

RSS-Gen Issue 5 "General Requirements for Compliance of Radio Apparatus"
RSS 247 Issue 2 "Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices"
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of DoseSmart model DS and therefore apply only to the tested samples. The samples were selected and prepared by David MacVittie of DoseSmart.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

**TEST RESULTS SUMMARY****DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 247 5.2	Digital Modulation	Systems uses GFSK digital modulation	System must utilize a digital transmission technology	Complies
15.247 (a) (2)	RSS 247 5.2 (1)	6dB Bandwidth	488 kHz	>500kHz	Complies
15.247 (b) (3)	RSS 247 5.4 (4)	Output Power (multipoint systems)	-4.3 dBm (0.00037 Watts) EIRP = 0.00042 W ^{Note 1}	1Watt, EIRP limited to 4 Watts.	Complies
15.247(e)	RSS 247 5.2 (2)	Power Spectral Density	-4.3 dBm/1MHz	8dBm/3kHz	Complies
15.247(d)	RSS 247 5.5	Antenna Port Spurious Emissions 30MHz – 25 GHz	All emission below limit	< -20dBc	Complies
15.247(d) / 15.209	RSS 247 5.5	Radiated Spurious Emissions 30MHz – 25 GHz	52.9 dB μ V/m @ 4804.0 MHz (-1.1 dB)	Refer to the limits section (p19) for restricted bands, all others < -20dBc	Complies

Note 1: EIRP calculated using antenna gains of 0.5 dBi for the highest EIRP system.

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Integral antenna	Unique or integral antenna required	Complies
15.407 (b) (6)	RSS-Gen Table 4	AC Conducted Emissions	41.0 dB μ V @ 0.63 MHz (-5.0 dB)	Refer to page 19	Complies
15.247 (i) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to SAR exclusion calculations in separate exhibit	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	RSS-Gen 8.4	User Manual		Statement for all products	Complies
-	RSP-100 RSS-Gen 6.7	Occupied Bandwidth	0.924 MHz	Information only	N/A

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The DoseSmart model DS is a smart pill bottle cap that is designed to help manage medication usage. Since the EUT could be placed in any position during operation, the EUT was treated as tabletop equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 3.7 VDC, supplied from a rechargeable Li-Ion battery.

The sample was received on December 6, 2018 and tested on December 6, 18 and 19, 2018 and January 18, 2019. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
DoesSmart	DS	Smart Pill Bottle Cap	None	2AS24DOSE
DoesSmart	DS	Smart Pill Bottle Cap	None	2AS24DOSE

OTHER EUT DETAILS

The following EUT details should be noted: The EUT is sold with a 14 cm USB charging cable (no data).

ANTENNA SYSTEM

The antenna system consists of an integral chip antenna.

ENCLOSURE

The EUT enclosure is primarily constructed of plastic. It measures approximately 4 cm wide by 2.4 cm high.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at NTS Silicon Valley.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Apple	A1265	Power Adapter	1X2342RDF18QZ	-
HP	ProBook 6570b	Laptop	5CB2480TRQ	-

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
Charge	Charger	Multiwire	Unshielded	0.14
Temporary	Laptop	Multiwire	Shielded	1.8

During radiated and “Antenna” port testing, the EUT was connected to a laptop using a temporary serial connection not available on the end product to allow control of the BLE radio.

During AC power port conducted testing, the EUT was connected to the charger.

EUT OPERATION

During emissions testing the EUT was commanded to transmit continuously on the selected channel and power setting.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Designation / Registration Numbers FCC	Designation / Registration Numbers Canada	Location
Chamber 7	US0027	2845B-7	41039 Boyce Road Fremont, CA 94538-2435

ANSI C63.4 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Results from testing performed in this chamber have been correlated with results from an open area test site. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.10. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is non-continuous in which case the average (or video) bandwidth of the measuring instrument is adjusted as required for the duty cycle.

INSTRUMENT CONTROL COMPUTER

Software is used to view and convert receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers. The software used for radiated and conducted emissions measurements is NTS EMI Test Software (rev 2.10)

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.10 specifies that the test height above ground for table mounted devices shall be 80 centimeters for testing below 1 GHz and 1.5m for testing above 1 GHz. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor as specified in ANSI C63.4. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.10, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

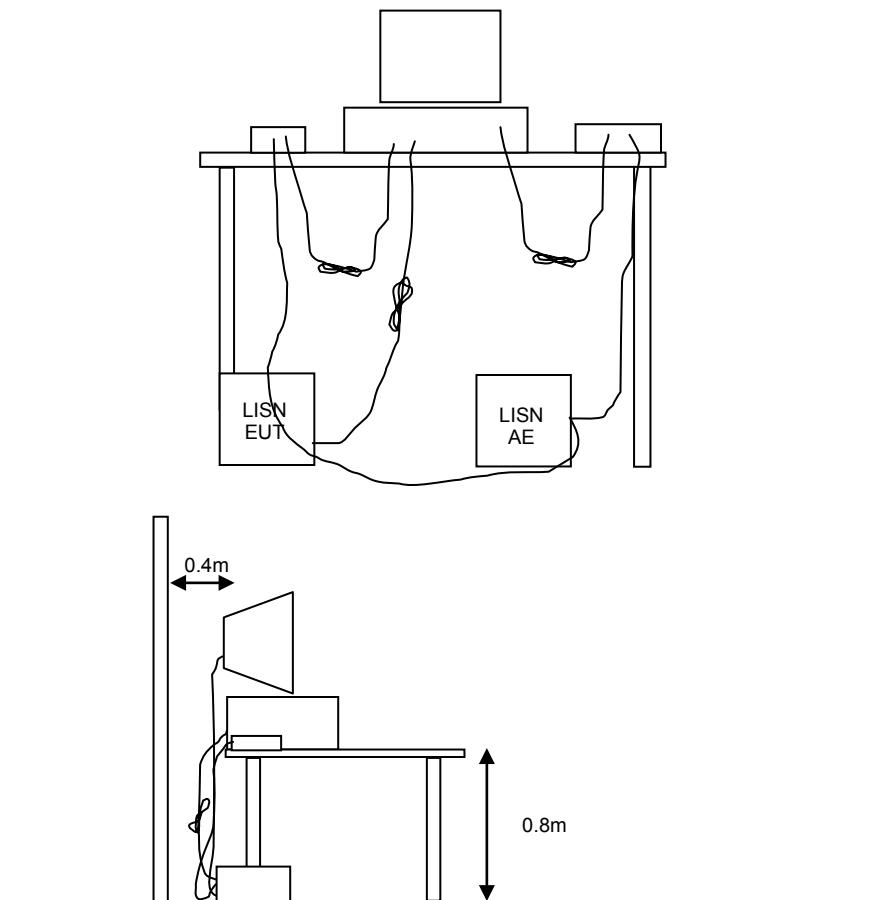


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

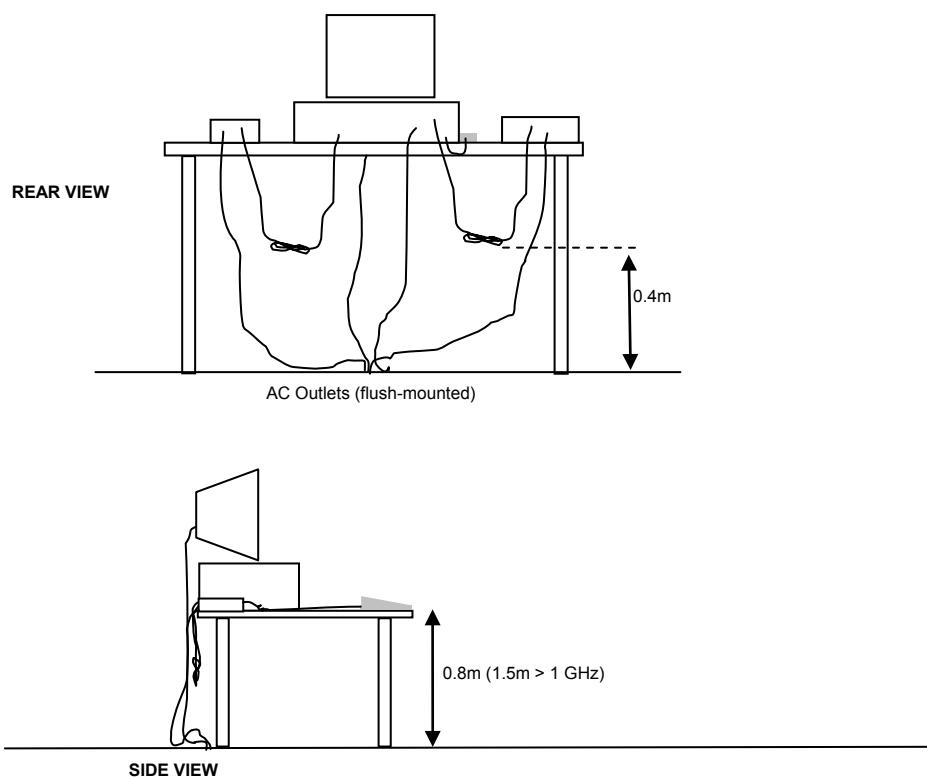


Typical Test Configuration for Radiated Field Strength Measurements

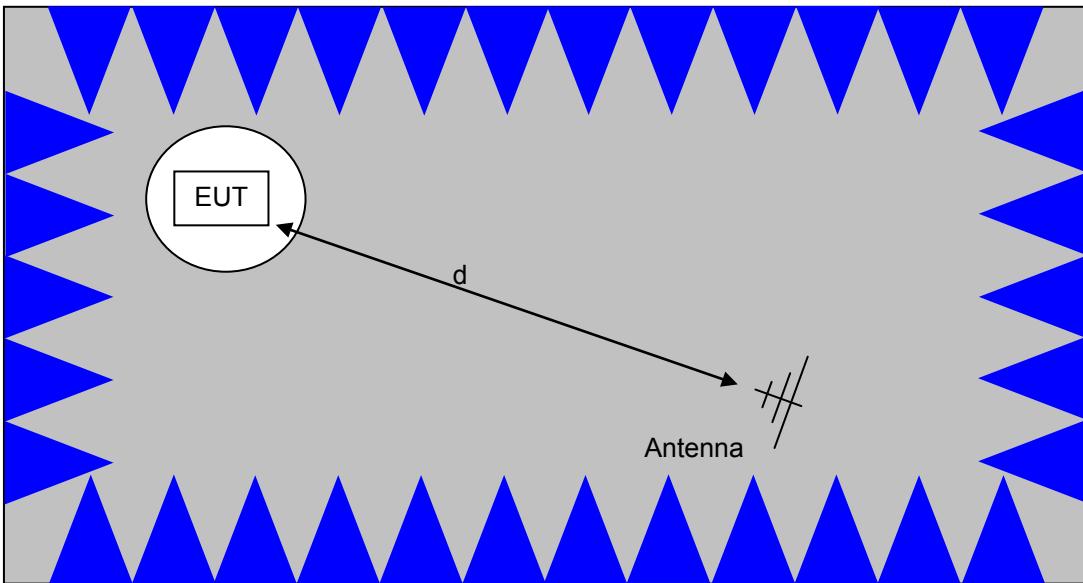

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

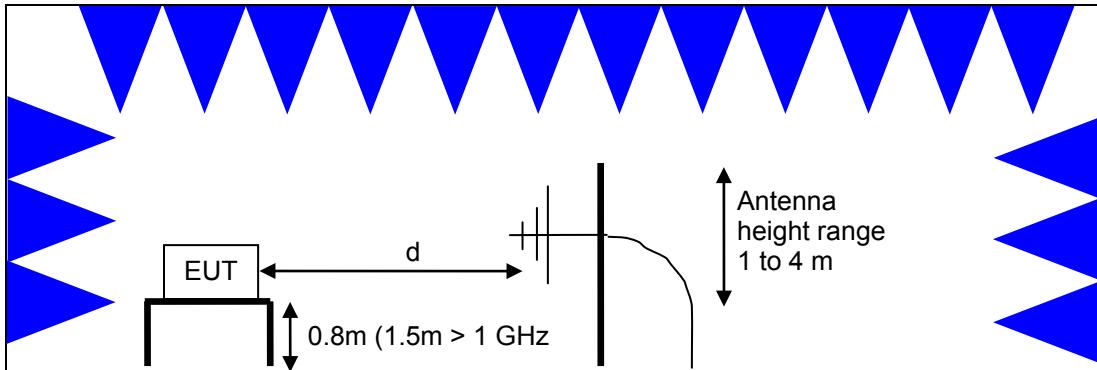

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

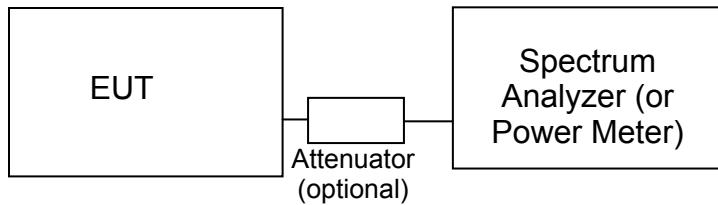**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and NTS Silicon Valley's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB, 26dB and/or 99% signal bandwidth are measured using the bandwidths recommended by ANSI C63.10 and RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	$2400/F_{\text{KHz}}$ @ 300m	$67.6-20*\log_{10}(F_{\text{KHz}})$ @ 300m
0.490-1.705	$24000/F_{\text{KHz}}$ @ 30m	$87.6-20*\log_{10}(F_{\text{KHz}})$ @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

¹ The restricted bands are detailed in FCC 15.205 and RSS-Gen Table 7

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_f - S = M$$

where:

R_f = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG10} (D_m / D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG10} (D_m / D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_f + F_d$$

and

$$M = R_c - L_s$$

where:

R_f = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30} P}{d} \text{ microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radio Antenna Port (Power and Spurious Emissions), 06-Dec-18					
Rohde & Schwarz	Power Meter, Dual Channel	NRVD	1071	4/4/2018	4/4/2019
Rohde & Schwarz	Peak Power Sensor 100 uW - 2 Watts (w/ 20 dB pad, SN BJ5155)	NRV-Z32	1536	6/21/2018	6/21/2019
Agilent Technologies	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	7/27/2018	7/27/2019
Radiated Emissions, 30 - 25,000 MHz, 06-Dec-18					
Rohde & Schwarz	EMI Test Receiver, 20 Hz – 40 GHz	ESI 40	2493	3/22/2018	3/22/2019
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	2237	7/3/2018	7/3/2020
Hewlett Packard	9KHz-1300MHz pre-amp	8447F	2777	12/27/2017	12/27/2018
EMCO	Antenna, Horn, 1-18 GHz	3115	1242	4/11/2017	4/19/2019
Hewlett Packard	Spectrum Analyzer (SA40) Blue 9 kHz - 40 GHz	8564E (84125C)	1393	12/8/2017	12/8/2018
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	1780	8/30/2018	8/30/2019
Rohde & Schwarz	EMI Test Receiver, 20 Hz-40 GHz	ESI 40	2493	3/22/2018	3/22/2019
Radiated Emissions, 1,000 - 25,000 MHz, 06-Dec-18					
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	9/5/2018	9/5/2019
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	9/18/2018	9/18/2020
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	9/27/2018	9/27/2019
Hewlett Packard	High Pass filter, 3.5 GHz	P/N 84300-80038	1157	5/16/2018	5/16/2019
A. H. Systems	Spare System Horn, 18-40GHz	SAS-574, p/n: 2581	2162	8/4/2017	8/4/2019
Radiated Emissions, 30 - 25,000 MHz, 18-Dec-18					
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	9/5/2018	9/5/2019
Hewlett Packard	Spectrum Analyzer (SA40) Red 30 Hz -40 GHz	8564E (84125C)	1148	9/27/2018	9/27/2019
EMCO	Antenna, Horn, 1-18 GHz (SA40-Blu)	3115	1386	10/8/2018	10/8/2020
Hewlett Packard	High Pass filter, 1.5 GHz (Purple System)	P/N 84300-80037	1769	8/18/2018	8/18/2019
A. H. Systems	Spare System Horn, 18-40GHz	SAS-574, p/n: 2581	2162	8/4/2017	8/4/2019
Rohde & Schwarz	EMI Test Receiver, 20 Hz – 40 GHz	ESI 40	2493	3/22/2018	3/22/2019
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	2237	7/3/2018	7/3/2020
Hewlett Packard	9KHz-1300MHz pre-amp	8447F	2777	12/27/2017	12/27/2018



<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radiated Emissions, 30 - 1,000 MHz, 19-Dec-18					
Rohde & Schwarz	EMI Test Receiver, 20 Hz – 40 GHz	ESI 40	2493	3/22/2018	3/22/2019
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	2237	7/3/2018	7/3/2020
Hewlett Packard	9KHz-1300MHz pre-amp	8447F	2777	12/27/2017	12/27/2018
Conducted Emissions, 18-Jan-19					
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	372	12/26/2018	12/26/2019
Rohde & Schwarz	EMI Test Receiver, 20 Hz-40 GHz	ESI 40	2493	5/22/2018	5/22/2019
Com-Power	9KHz-30MHz, 50uH, 15Aac, 10Adc, max CISPR 15	LI-215A	2672	8/29/2018	8/29/2019



National Technical Systems

Project number PR087942

Report Date: June 3, 2019

Appendix B Test Data

TL087942-FCC Pages 26 – 44



EMC Test Data

Client:	DoesSmart	PR Number:	PR087942
Product	DS	T-Log Number:	TL087942-RA-FCC
System Configuration:		Project Manager:	Deepa Shetty
Contact:	David MacVittie	Project Engineer:	David bare
Emissions Standard(s):	FCC Part 15	Class:	B
Immunity Standard(s):		Environment:	

EMC Test Data

For The

DoesSmart

Product

DS

Date of Last Test: 1/18/2019



EMC Test Data

Client:	DoesSmart	PR Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
		Project Manager:	Deepa Shetty
Contact:	David MacVittie	Project Engineer:	David bare
Standard:	FCC Part 15	Class:	B

Conducted Emissions

(NTS Silicon Valley, Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/18/2019
Test Engineer: M. Birgani
Test Location: Fremont Chamber #7

Config. Used: 1
Config Change: Cell Phone as local support equipment
EUT Voltage: 120V/60Hz

General Test Configuration

The EUT was located on a table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN.

Ambient Conditions: Temperature: 18-19 °C
Rel. Humidity: 34-36 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power,120V/60Hz	Class B	Pass	41.0 dB μ V @ 0.63 MHz (-5.0 dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	DoesSmart	PR Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
		Project Manager:	Deepa Shetty
Contact:	David MacVittie	Project Engineer:	David bare
Standard:	FCC Part 15	Class:	B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

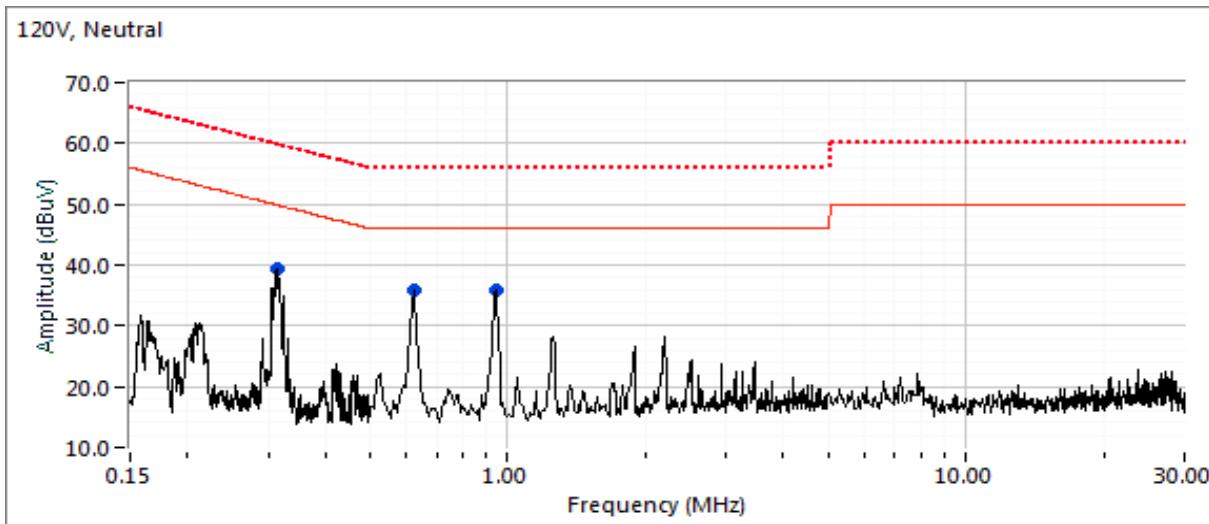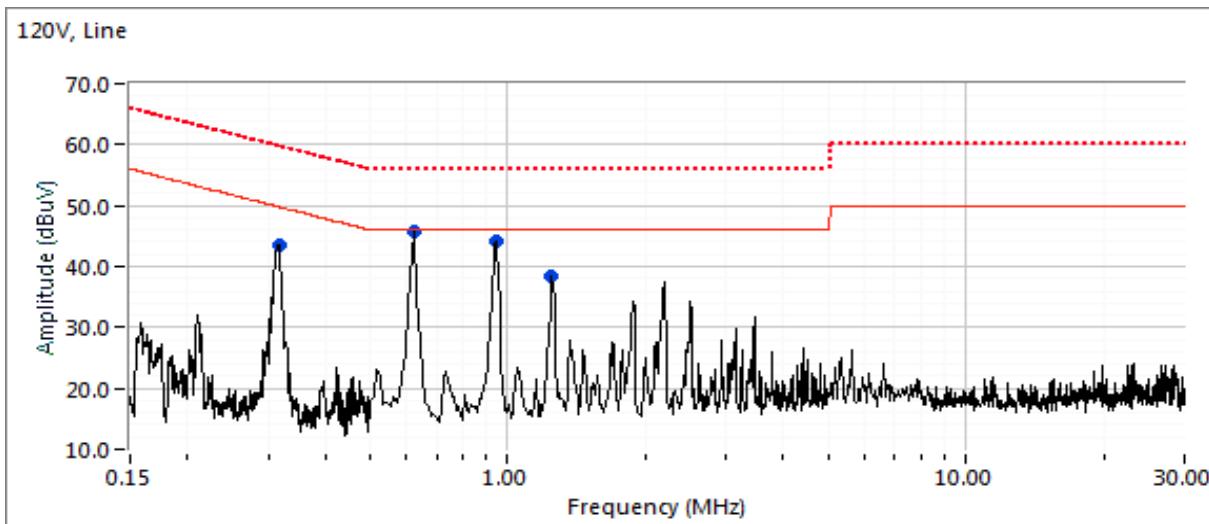



EMC Test Data

Client:	DoesSmart	PR Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Engineer:	David bare

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.626	45.9	Line	46.0	-0.1	Peak	
0.941	44.3	Line	46.0	-1.7	Peak	
0.316	43.4	Line	49.8	-6.4	Peak	
1.252	38.3	Line	46.0	-7.7	Peak	
0.940	36.0	Neutral	46.0	-10.0	Peak	
0.627	35.9	Neutral	46.0	-10.1	Peak	
0.314	39.5	Neutral	49.9	-10.4	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.626	41.0	Line	46.0	-5.0	AVG	AVG (0.10s)
0.941	37.5	Line	46.0	-8.5	AVG	AVG (0.10s)
0.626	44.8	Line	56.0	-11.2	QP	QP (1.00s)
0.316	37.6	Line	49.8	-12.2	AVG	AVG (0.10s)
1.252	33.6	Line	46.0	-12.4	AVG	AVG (0.10s)
0.627	32.8	Neutral	46.0	-13.2	AVG	AVG (0.10s)
0.941	41.4	Line	56.0	-14.6	QP	QP (1.00s)
0.940	31.0	Neutral	46.0	-15.0	AVG	AVG (0.10s)
0.314	32.7	Neutral	49.9	-17.2	AVG	AVG (0.10s)
0.316	41.5	Line	59.8	-18.3	QP	QP (1.00s)
1.252	37.6	Line	56.0	-18.4	QP	QP (1.00s)
0.627	36.0	Neutral	56.0	-20.0	QP	QP (1.00s)
0.940	34.4	Neutral	56.0	-21.6	QP	QP (1.00s)
0.314	38.0	Neutral	59.9	-21.9	QP	QP (1.00s)



EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare
		Class:	N/A

RSS-247 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 12/6/2018
Test Engineer: M. Birgani
Test Location: Fremont Lab 4b

Config. Used: 1
Config Change: -
EUT Voltage: Battery

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions: Temperature: 21-22 °C
Rel. Humidity: 43-45 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1			Output Power	15.247(b)	Pass	-4.3 dBm
2			Power spectral Density (PSD)	15.247(d)	Pass	-1.3 dBm/10kHz
3			Minimum 6dB Bandwidth	15.247(a)	Pass	0.711 MHz
3			99% Bandwidth	RSS GEN	-	0.924 MHz
4			Spurious emissions	15.247(b)	Pass	All emission below limit

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
BLE	1 Mbps	89.9%	Yes	1.062	0.46	0.92	942

Run #1: Output Power

Power Setting ²	Frequency (MHz)	Output Power (dBm) ¹		Antenna Gain (dBi)	Result	EIRP		Output Power (dBm) ³	
		mW	dBm			dBm	W	mW	
2	2402	-6.1	0.25	0.5	Pass	-5.6	0.00028		
2	2440	-5.0	0.32	0.5	Pass	-4.5	0.00035		
2	2480	-4.3	0.37	0.5	Pass	-3.8	0.00042		

Note 1: Output power measured using a peak power meter, spurious limit is -20dBc.

Note 2: Power setting - the software power setting used during testing, included for reference only.

Note 3: Power measured using average power meter (non-gated) and is included for reference only.

Run #2: Power spectral Density

Since power is less than 8 dBm, the device meets the PSD requirement.

Run #3: Signal Bandwidth



Power Setting	Frequency (MHz)	Bandwidth (kHz)		RBW Setting (kHz)	
		6dB	99%	6dB	99%
0	2402	782	918	100	30
0	2440	772	906	100	30
0	2480	711	924	100	30

Note 1: DTS BW: RBW=100kHz, VBW \geq 3*RBW, peak detector, max hold, auto sweep time, Span 2-5 times measured BW.
99% BW: RBW=1-5% of 99%BW, VBW \geq 3*RBW, peak detector, max hold, auto sweep time. Span 1.5-5 times OBW.



EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare
		Class:	N/A

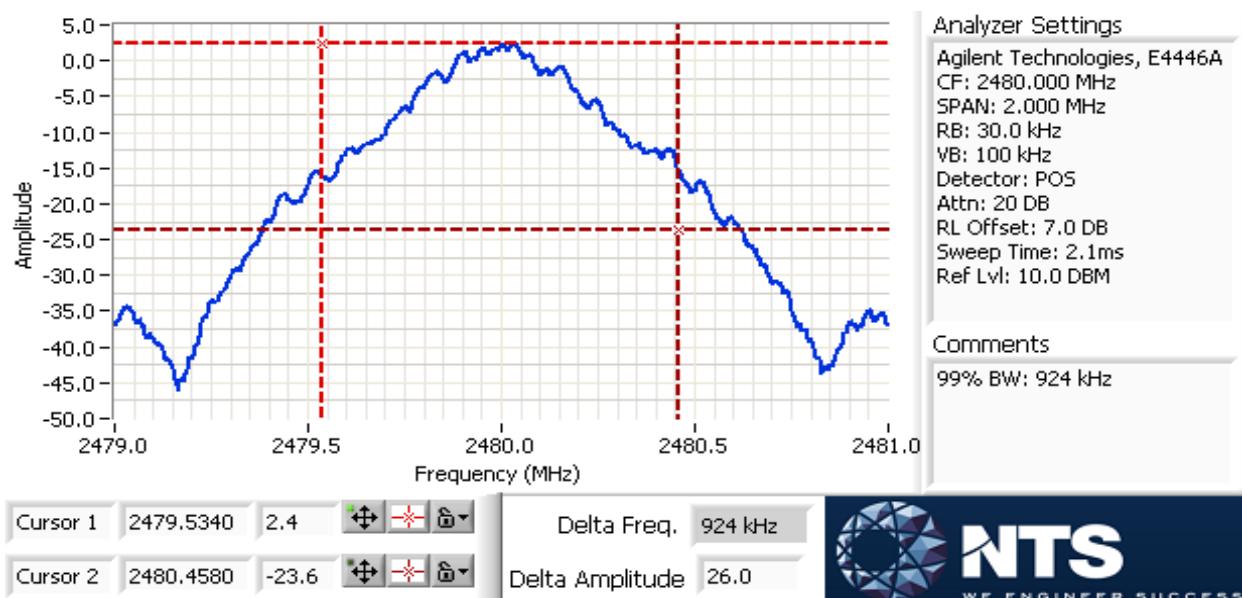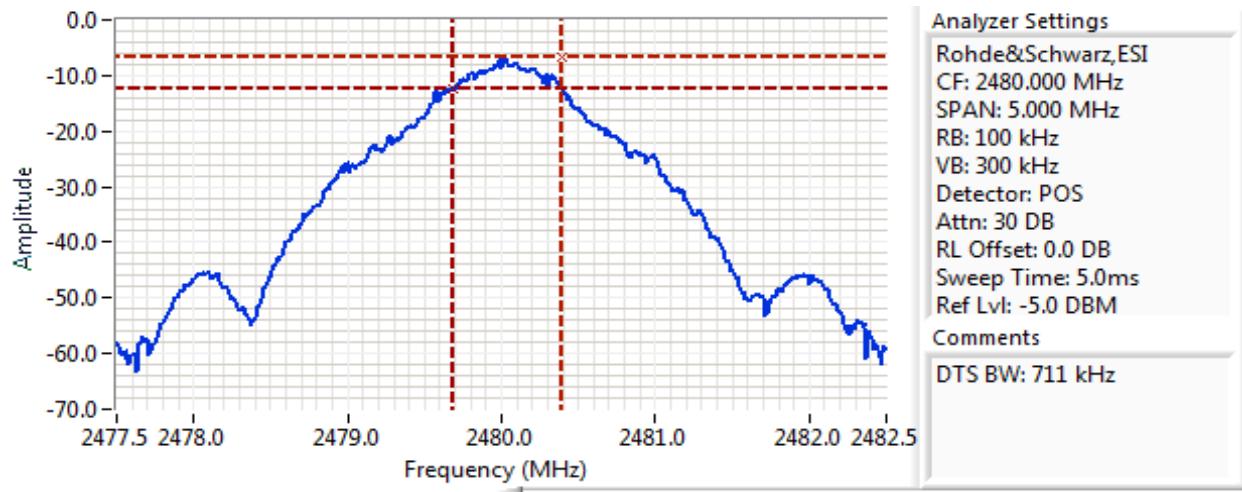

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
		Project Manager:	Deepa Shetty
Contact:	David MacVittie	Project Coordinator:	David bare
Standard:	FCC Part 15	Class:	N/A

Run #4a: Out of Band Spurious Emissions



Frequency (MHz)	Power Setting	Mode	Limit	Result
2402	0	BLE	-20dBc	Pass
2440	0	BLE	-20dBc	Pass
2480	0	BLE	-20dBc	Pass

RBW = 100 kHz and VBW = 300 kHz for all plots.



Plots for low channel

Additional plot showing compliance with -20dBc limit from 2390 MHz to 2400 MHz.

Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

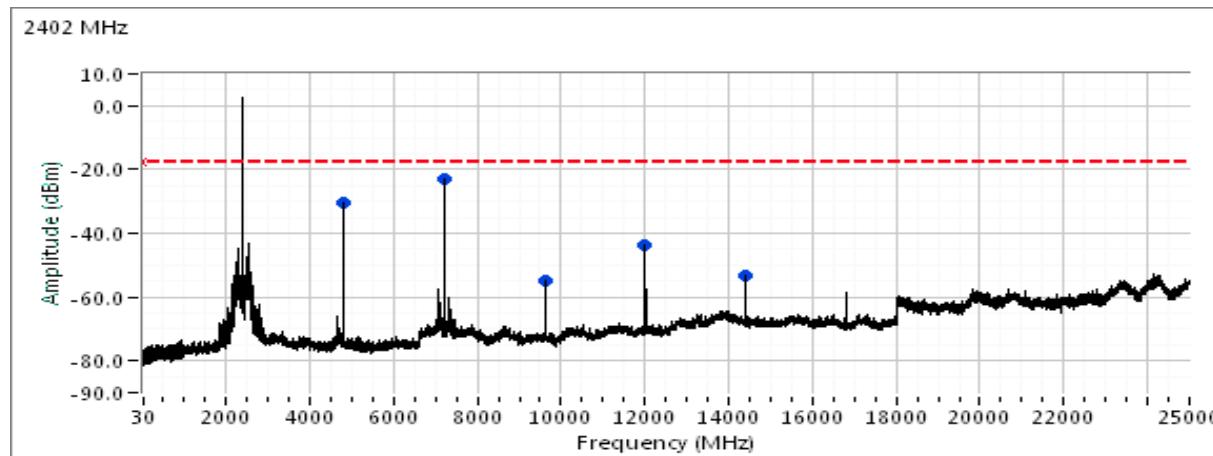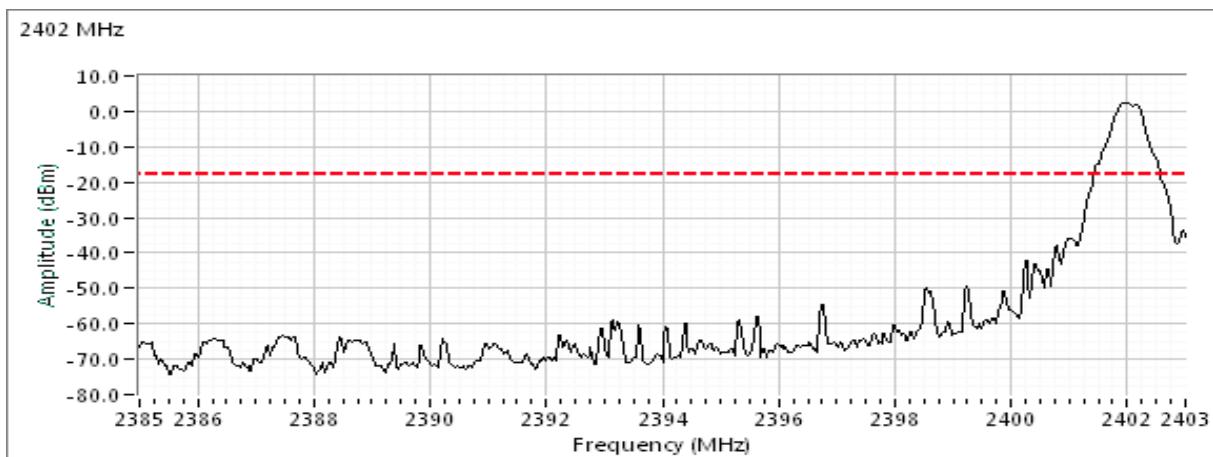

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare

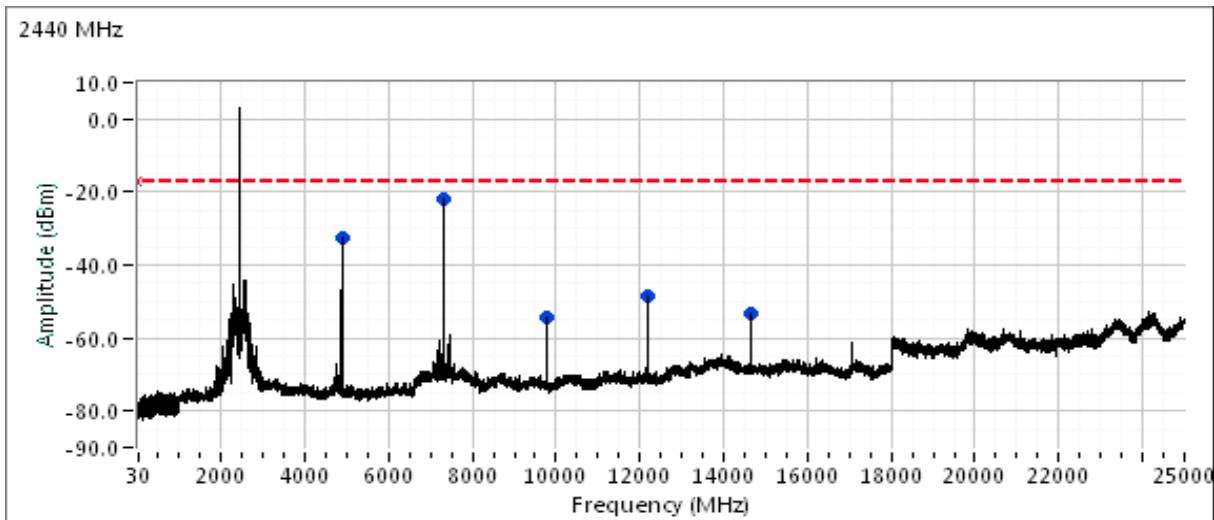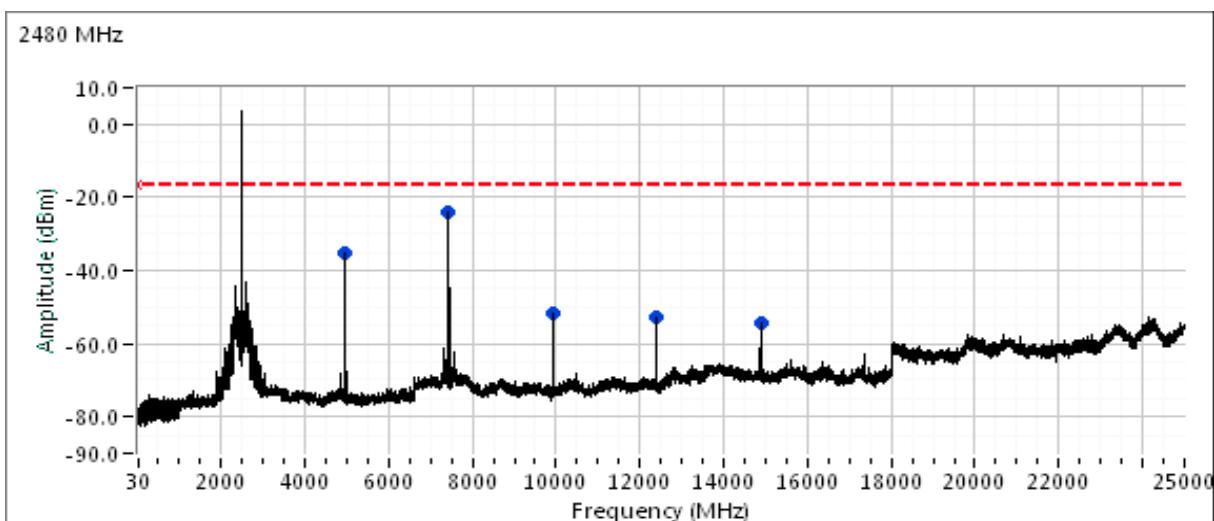Plots for center channel

Plots for high channel




EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare

RSS-247 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 19-21 °C
Rel. Humidity: 42-45 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1a	BLE	Low	0		Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	35.3 dB μ V/m @ 2377.8 MHz (-18.7 dB)
			2		Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	52.9 dB μ V/m @ 4804.0 MHz (-1.1 dB)
1b	BLE	Center	2		Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	52.8 dB μ V/m @ 4880.1 MHz (-1.2 dB)
1c	BLE	High	0		Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	35.7 dB μ V/m @ 2487.0 MHz (-18.3 dB)
			2		Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	48.7 dB μ V/m @ 4960.1 MHz (-5.3 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare
		Class:	N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle \geq 98% and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
BLE	1 Mbps	89.9%	Yes	1.062	0.46	0.92	942

Measurement Specific Notes:

Note 1: Emission in non-restricted band, but limit of 15.209 used.

Note 2: Emission in non-restricted band, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Note 4: Emission has constant duty cycle $<$ 98%, average measurement performed: RBW=1MHz, VBW>1/T but not less than 10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear voltage correction factor



EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare
		Class:	N/A

Run #0: Radiated Spurious Emissions, 2402 MHz. Operating Mode: BLE

Date of Test: 12/06/18

Config. Used: 1

Test Engineer: M. Birgani

Setting: 0

Test Location: Chamber 7

EUT Voltage: Battery

Orientation Evaluation @ 2402 MHz of Bandedge

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
2362.340	33.5	V	54.0	-20.5	AVG	233	1.8
2369.880	45.0	V	74.0	-29.0	PK	233	1.8
2355.690	34.0	H	54.0	-20.0	AVG	175	1.8
2373.810	45.4	H	74.0	-28.6	PK	175	1.8
2374.050	33.8	V	54.0	-20.2	AVG	291	1.4
2350.800	45.3	V	74.0	-28.7	PK	291	1.4
2377.820	34.4	H	54.0	-19.6	AVG	355	1.9
2364.350	45.9	H	74.0	-28.1	PK	355	1.9

Test Engineer: M. Birgani

Setting: 2

Orientation Evaluation for Spurious Emission at 2nd harmonic

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
4804.000	52.9	H	54.0	-1.1	VAVG	300	1.9
4803.850	55.7	H	74.0	-18.3	PK	300	1.9
4804.300	46.9	V	54.0	-7.1	VAVG	30	1.0
4804.330	51.8	V	74.0	-22.2	PK	30	1.0
4804.270	51.1	H	54.0	-2.9	VAVG	185	1.5
4804.350	54.7	H	74.0	-19.3	PK	185	1.5



EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare

Run #1a: Radiated Spurious Emissions, 1,000 - 25000 MHz. Operating Mode: BLE

Date of Test: 12/06/18

Config. Used: 1

Test Engineer: M. Birgani

Setting: 0, Flat


Test Location: Chamber 7

EUT Voltage: Battery

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
2377.820	35.3	H	54.0	-18.7	VAVG	355	1.9
2364.350	45.9	H	74.0	-28.1	PK	355	1.9



RB 1 MHz; VB 1 kHz; Average (Black trace); RB 1 MHz; VB 3 MHz; Peak (Blue trace)

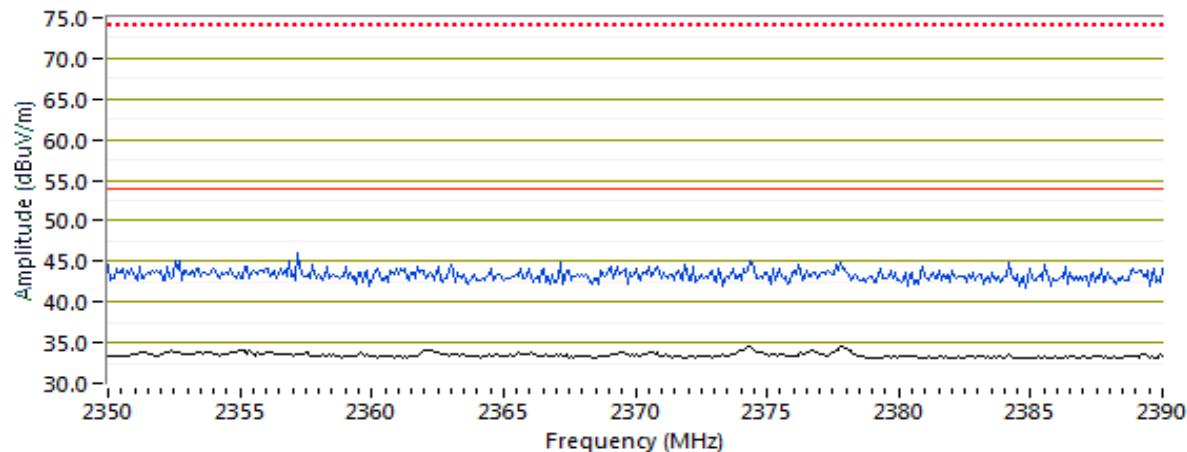

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare

Date of Test: 12/18/18
 Test Engineer: M. Birgani
 Test Location: Chamber 7

Config. Used: 1
 Setting: 2, Flat
 EUT Voltage: Battery

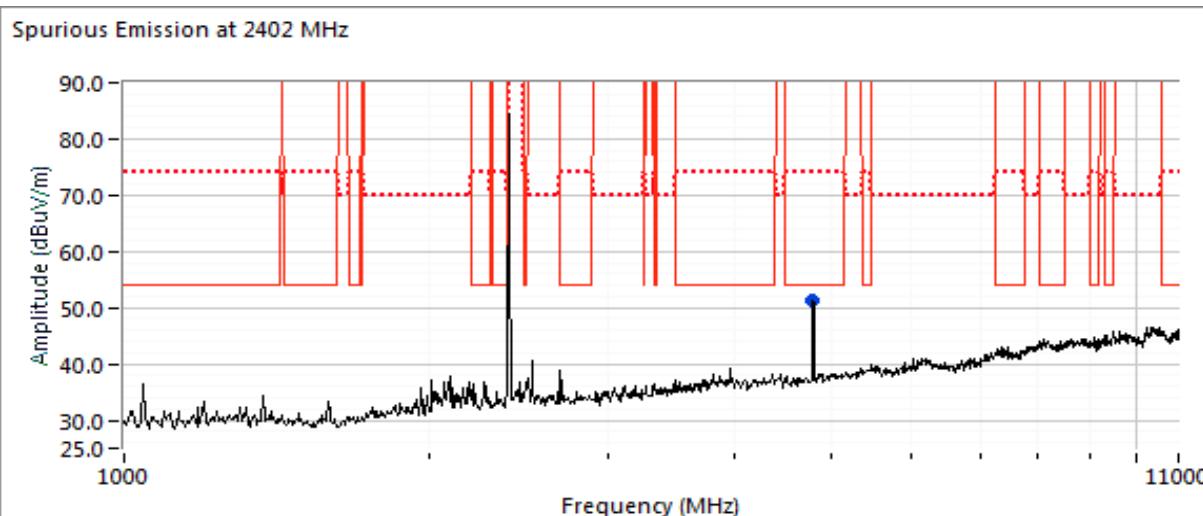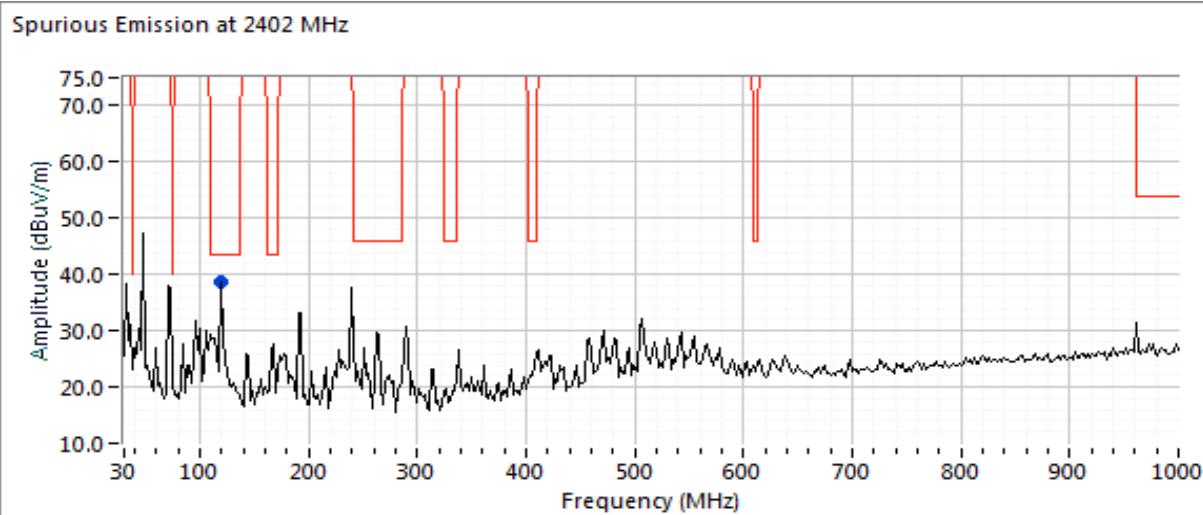



EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare
Class:		Class:	N/A

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4804.000	52.9	H	54.0	-1.1	VAVG	300	1.9	Note 4: RB 1MHz; VB: 1kHz (Flat)
4803.850	55.7	H	74.0	-18.3	PK	300	1.9	RB 1 MHz; VB: 3 MHz (Flat)
119.419	21.6	V	43.5	-21.9	QP	171	3.0	QP (1.00s)

Note: From 11-25GHz was tested with antenna 30cm away from EUT. No significant emission was detected.

Note: Emissions observed below 300 MHz are emanating from the serial cable needed for the test mode used to enable continuous transmit ability. This cable is not sold or used with the product.

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare
		Class:	N/A

Run #1b: Center Channel @ 2440 MHz

Date of Test: 12/18/18

Test Engineer: M. Birgani


Test Location: Chamber 7

Config. Used: 1


Setting: 2, Flat

EUT Voltage: Battery

Spurious Emission at 2440 MHz

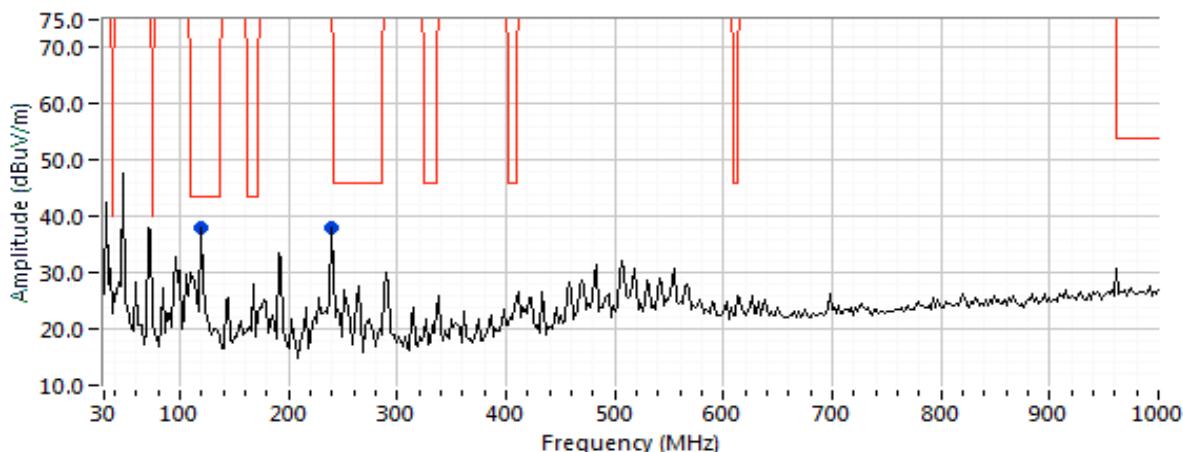

Spurious Emission at 2440 MHz

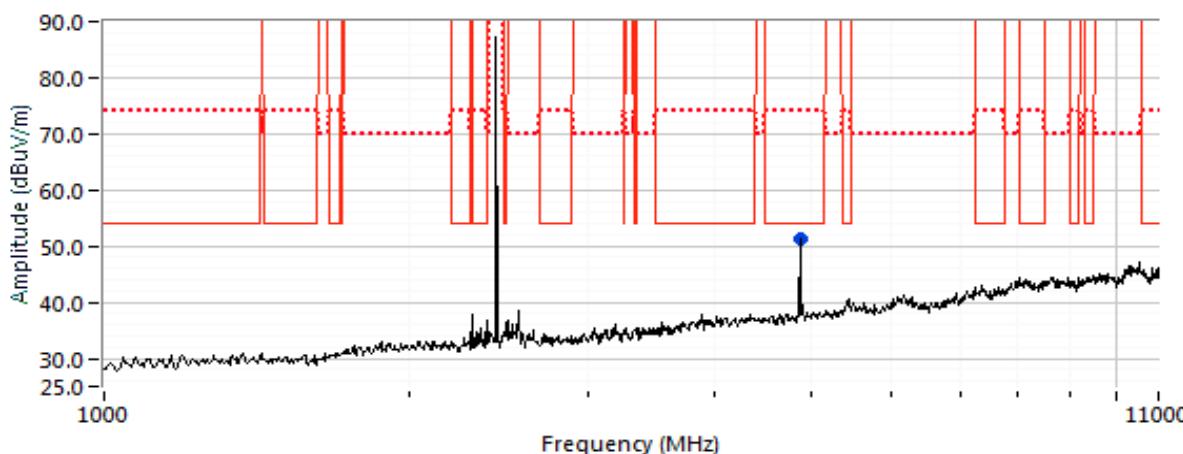



EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
		Project Manager:	Deepa Shetty
Contact:	David MacVittie	Project Coordinator:	David bare
Standard:	FCC Part 15	Class:	N/A

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4880.090	52.8	H	54.0	-1.2	VAVG	293	1.9	Note 4: RB 1 MHz; VB: 1 kHz, Flat
4879.690	55.9	H	74.0	-18.1	PK	293	1.9	RB 1 MHz; VB: 3 MHz
119.419	19.2	V	43.5	-24.3	QP	267	2.0	QP (1.00s)

Note: From 11-25GHz was tested with antenna 30cm away from EUT. No significant emission was detected.

Run #1c: High Channel @ 2480 MHz

Date of Test: 12/06/18

Test Engineer: M. Birgani

Test Location: Chamber 7

Config. Used: 1


Setting: 0, Flat

EUT Voltage: Battery

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2487.040	35.7	H	54.0	-18.3	AVG	183	2.4	POS; RB 1 MHz; VB: 1 kHz, Flat
2490.440	47.3	H	74.0	-26.7	PK	183	2.4	POS; RB 1 MHz; VB: 3 MHz, Flat

RB 1 MHz; VB 1 kHz; Average (Black trace); RB 1 MHz; VB 3 MHz; Peak (Blue trace)

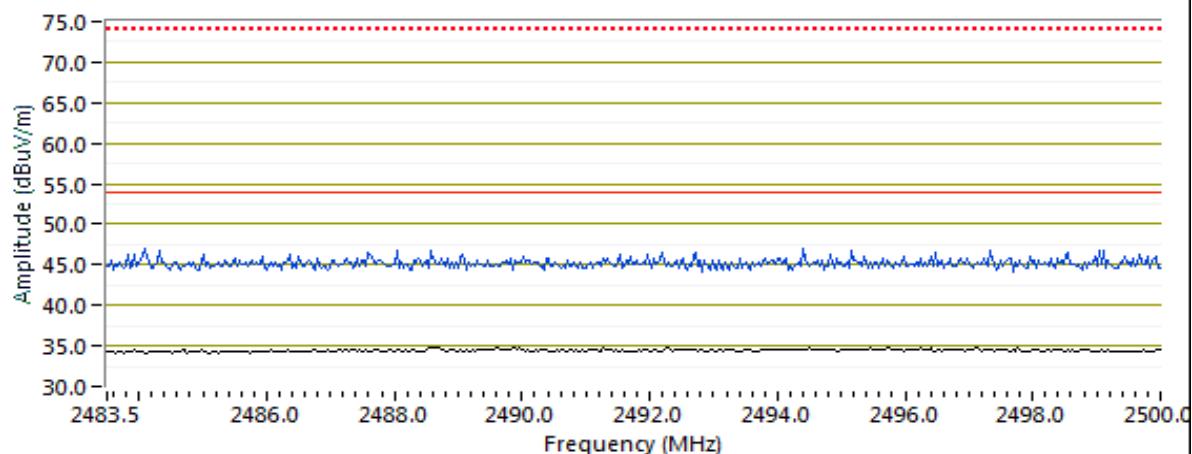


Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare


Date of Test: 12/06/18
 Test Engineer: M. Birgani
 Test Location: Chamber 7

Config. Used: 1
 Setting: 2, Flat
 EUT Voltage: Battery

Spurious Emission at 2480 MHz

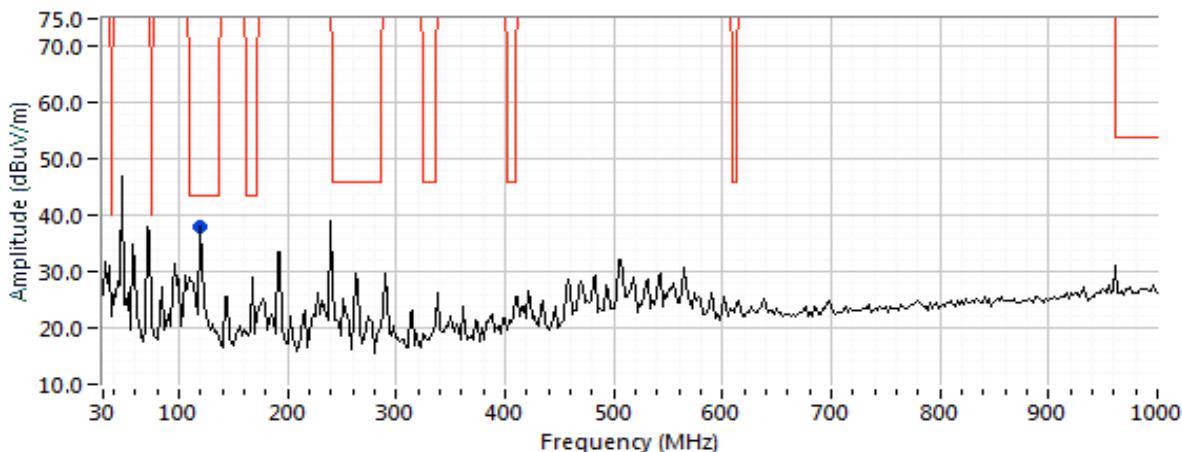

Spurious Emission at 2480 MHz

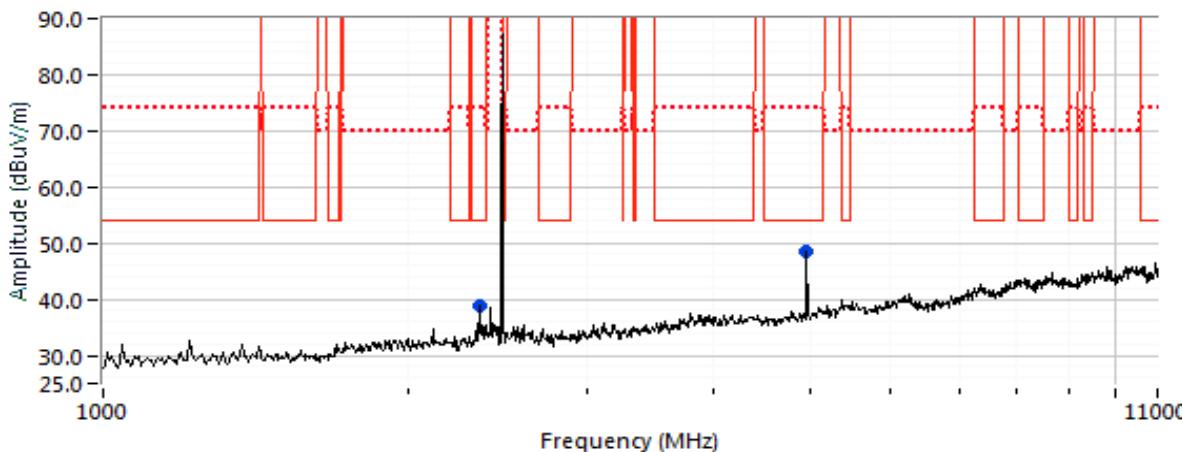



EMC Test Data

Client:	DoesSmart	Job Number:	PR087942
Model:	DS	T-Log Number:	TL087942-RA-FCC
Contact:	David MacVittie	Project Manager:	Deepa Shetty
Standard:	FCC Part 15	Project Coordinator:	David bare

Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247 Limit	Margin	Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
4960.050	48.7	H	54.0	-5.3	VAVG	282	2.1	Note 4: RB 1 MHz; VB: 1 kHz, Flat
2352.090	39.2	H	54.0	-14.8	VAVG	206	1.9	Note 4: RB 1 MHz; VB: 1 kHz, Flat
4959.970	53.4	H	74.0	-20.6	PK	282	2.1	RB 1 MHz; VB: 3 MHz, Flat
119.412	20.2	V	43.5	-23.3	QP	267	2.0	QP (1.00s)
2352.370	45.7	H	74.0	-28.3	PK	206	1.9	RB 1 MHz; VB: 3 MHz, Flat

Note: From 11-25GHz was tested with antenna 30cm away from EUT. No significant emission was detected.



End of Report

This page is intentionally blank and
marks the last page of this test report.