

Test report

412895-1TRFWL

Date of issue: May 12, 2021

Applicant:

GE Current, a Daintree Company

Product:

Radio receiver

Model:

A1028250


FCC ID: 2AS3F-A1028250

IC: 25008-A1028250

Specifications:

- ◆ **FCC 47 CFR Part 15, Subpart C – §15.247**
Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, 5727 – 5850 MHz
- ◆ **Industry Canada RSS-247, Issue 2**
Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Lab and test locations

Company name	Nemko USA Inc.
Address	2210 Faraday Ave, Suite 150
City	Carlsbad
State	California
Postal code	92008
Country	USA
Telephone	+1 760 444 3500
Website	www.nemko.com
FCC Site Number	Test Firm Registration Number: 392943 Designation Number: US5058
ISED Test Site	2040B-3
Tested by	David Hewitt, EMC Specialist
Reviewed by	James Cunningham, EMC/MIL/WL Supervisor
Review date	May 12, 2021
Reviewer signature	

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko USA's ISO/IEC 17025 accreditation.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Copyright notification

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.
© Nemko USA Inc.

Table of Contents

Table of Contents	3
Section 1 Report summary	4
1.1 Applicant	4
1.2 Manufacturer	4
1.3 Test specifications	4
1.4 Test methods	4
1.5 Exclusions	4
1.6 Statement of compliance	4
1.7 Test report revision history	4
Section 2 Summary of test results	5
2.1 FCC Part 15 Subpart C, general requirements	5
2.2 FCC Part 15.247	5
2.3 IC RSS-247, Issue 2	5
2.4 IC RSS-GEN, Issue 5	5
Section 3 Equipment under test (EUT) details	6
3.1 Sample information	6
3.2 EUT information	6
3.3 Technical information	6
3.4 EUT exercise and monitoring details	7
3.5 EUT setup diagram	8
Section 4 Engineering considerations	9
4.1 Modifications incorporated in the EUT	9
4.2 Technical judgment	9
4.3 Deviations from laboratory tests procedures	9
Section 5 Test conditions	10
5.1 Atmospheric conditions	10
5.2 Power supply range	10
Section 6 Measurement uncertainty	11
6.1 Uncertainty of measurement	11
Section 7 Test Equipment	12
Section 8 Testing data	13
8.1 FCC 15.207(a) and IC RSS-GEN, Issue 5 8.8 AC power line conducted emissions	13
8.2 FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques References	20
8.3 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements	23
8.4 FCC Part 15.247(d) and RSS-247 5.5 Conducted band-edge spurious emissions	26
8.5 FCC 15.247(d) and RSS-247 5.5 Conducted spurious emissions	28
8.6 FCC 15.247(d) and RSS-247 5.5 Radiated restricted band-edges and spurious emission	31
8.7 FCC 15.247(e) and RSS-247 5.2(b) Power spectral density of digital transmission system	44
8.8 RSS-GEN 6.7 Occupied bandwidth (or 99% emission bandwidth)	47
Section 9 Block diagrams of test set-ups	50
9.1 Radiated emissions set-up	50
9.2 Conducted emissions set-up	51

Section 1 Report summary

1.1 Applicant

Company name	GE Current, a Daintree Company
Address	1975 Noble Road Bldg 335
City	East Cleveland
Province/State	OH
Postal/Zip code	44112
Country	USA

1.2 Manufacturer

Company name	GE Current, a Daintree Company
Address	1975 Noble Road Bldg 335
City	East Cleveland
Province/State	OH
Postal/Zip code	44112
Country	USA

1.3 Test specifications

FCC 47 CFR Part 15, Subpart C – §15.247	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
IC RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

1.4 Test methods

ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
558074 D01 DTS Measurement Guidance v03r02 (June 5, 2014)	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.5 Exclusions

None

1.6 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.7 Test report revision history

Table 1.7-1: Test report revision history

Revision #	Details of changes made to test report
412895-1TRFWL	Original report issued

Notes:

Section 2 Summary of test results

2.1 FCC Part 15 Subpart C, general requirements

Part	Test description	Verdict
§15.207(a)	Conducted limits	Pass
§15.31(e)	Variation of power source	Pass
§15.203	Antenna requirement	Pass

Notes: EUT is USB powered via support laptop
The antenna is located within the protective cover of EUT on PCB

2.2 FCC Part 15.247

Part	Test description	Verdict
§15.247(a)(1)(i)	Frequency hopping systems operating in the 902–928 MHz band	Not applicable
§15.247(a)(1)(ii)	Frequency hopping systems operating in the 5725–5850 MHz band	Not applicable
§15.247(a)(1)(iii)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Not applicable
§15.247(a)(2)	Minimum 6 dB bandwidth for systems using digital modulation techniques	Pass
§15.247(b)(1)	Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band	Not applicable
§15.247(b)(2)	Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band	Not applicable
§15.247(b)(3)	Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands	Pass
§15.247(b)(4)	Transmitting antennas of directional gain greater than 6 dBi	Not applicable
§15.247(c)(1)	Fixed point-to-point operation with directional antenna gains greater than 6 dBi	Not applicable
§15.247(c)(2)	Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams	Not applicable
§15.247(d)	Spurious emissions	Pass
§15.247(e)	Power spectral density for digitally modulated devices	Pass
§15.247(f)	Time of occupancy for hybrid systems	Not applicable

2.3 IC RSS-247, Issue 2

Part	Test description	Verdict
5.1 (a)	Bandwidth of a frequency hopping channel	Not applicable
5.1 (b)	Minimum channel spacing for frequency hopping systems	Not applicable
5.1 (c)	Frequency hopping systems operating in the 902–928 MHz band	Not applicable
5.1 (d)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Not applicable
5.1 (e)	Frequency hopping systems operating in the 5725–5850 MHz band	Not applicable
5.2 (a)	Minimum 6 dB bandwidth	Pass
5.2 (b)	Maximum power spectral density	Pass
5.3 (a)	Digital modulation turned off	Not applicable
5.3 (b)	Frequency hopping turned off	Not applicable
5.4 (a)	Frequency hopping systems operating in the 902–928 MHz band	Not applicable
5.4 (b)	Frequency hopping systems operating in the 2400–2483.5 MHz band	Not applicable
5.4 (c)	Frequency hopping systems operating in the 5725–5850 MHz	Not applicable
5.4 (d)	Systems employing digital modulation techniques	Pass
5.4 (e)	Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band	Not applicable
5.4 (f)	Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams	Not applicable
5.5	Out-of-band emissions	Pass

2.4 IC RSS-GEN, Issue 5

Part	Test description	Verdict
7.3	Receiver radiated emission limits	Not applicable
7.4	Receiver conducted emission limits	Not applicable
8.8	Power Line Conducted Emissions Limits for License-Exempt Radio Apparatus	Pass

Section 3 Equipment under test (EUT) details

3.1 Sample information

Receipt date	March 18, 2021
Nemko sample ID number	NEx: 412895

3.2 EUT information

Product name	Radio receiver
Model	A1028250
Serial number	Sample 1 (U.FL antenna port): 5C0272FFFE09BBB9 Sample 2 (U.FL antenna port): 5C0272FFFE09BC48 Sample 3 (Chip Antenna): 5C0272FFFE09BC18
Part number	A-1025577-01-Rev2

3.3 Technical information

Used IC test site(s) reg. number	2040A
RSS number and issue	RSS-247 issue 2 (February 2017)
Frequency band	2400 – 2483.5 MHz
Minimum frequency (MHz)	2402
Maximum frequency (MHz)	2480
Minimum output power (dBm)	3.75 (e.i.r.p.)
Maximum output power (dBm)	3.89 (e.i.r.p.)
Measured 6 dB bandwidth	2402 MHz: 599.40 kHz 2440 MHz: 599.40 kHz 2480 MHz: 596.40 kHz
Type of modulation	GFSK
Emission classification	F1D
Power requirements	3.3 V _{DC} ; 0.2 A
Antenna information	2.5 dBi gain antenna on PCB

3.4 EUT exercise and monitoring details

EUT was exercised using RAILTEST Firmware and debug board and monitored by U.FL connector and pigtail to the spectrum analyzer. Sample was tested in both BLE and Zigbee transmit formats.

Table 3.4-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number	Rev.
Radio receiver	Silicon Labs	A-1017508	Sample 1 (U.FL antenna port): 5C0272FFFE09BBB9 Sample 2 (U.FL antenna port): 5C0272FFFE09BC48 Sample 3 (Chip Antenna): 5C0272FFFE09BC18	--

Table 3.4-2: EUT interface ports

Description	Qty.
U.FL	1

Table 3.4-3: Support equipment

Description	Brand name	Model/Part number	Serial number	Rev.
Support Laptop	Dell	Latitude E7470	18326692370	--
STK/WSTK Debug Board	Silicon Labs	PCB4001	164623105	A03
STK/WSTK Debug Adapter	Silicon Labs	PCB8010	180409668	A02

Table 3.4-4: Inter-connection cables

Cable description	From	To	Length (m)
10-pin ribbon cable	EUT	STK/WSTK Debug Adapter	0.2

3.5 EUT setup diagram

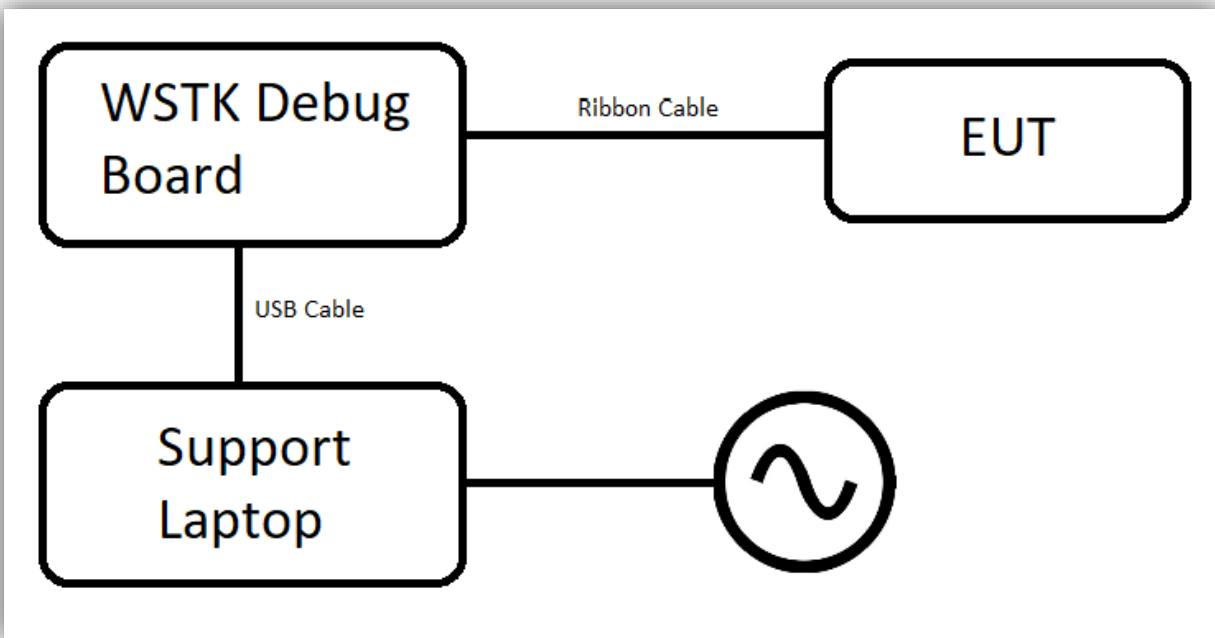


Figure 3.5-1: Setup diagram

Section 4 Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5 Test conditions

5.1 Atmospheric conditions

Temperature	15-30 °C
Relative humidity	20-75 %
Air pressure	86–106 kPa

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6 Measurement uncertainty

6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Test name	Measurement uncertainty, dB
Radiated spurious emissions	3.78
Powerline conducted emissions	1.38
All antenna port measurements	0.55
Conducted spurious emissions	1.13

Section 7 Test Equipment

Table 6.1-1: Test Equipment List

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI Test Receiver	Rohde & Schwarz	ESCI 7	E1026	1 yr	24 Feb 2022
Transient Limiter	Hewlett-Packard	11947A	684	1 yr	20 Apr 2021
Two Line V-Network	Rohde & Schwarz	ENV216	E1019	1 yr	4 Aug 2021
Signal and spectrum analyzer	Rohde & Schwarz	FSW43	E1302	1 yr	18 Sep 2021
Power sensor	ETS Lindgren	7002-006	E1062	1 yr	14 Oct 2021
EMI Test Receiver	Rohde & Schwarz	ESU40	E1121	1 yr	1 Dec 2021
System Controller	Sunol Sciences	SC104V	E1129	NCR	NCR
Bilog Antenna (30-1000MHz)	Schaffner	CBL6111D	1763	2 yr	18 Feb 2022
DRG Horn Antenna (1-18GHz)	ETS-Lindgren	3117-PA	E1160	1 yr	2 Dec 2021
Rectangular Horn Antenna (18-26GHz)	Sage Millimeter, Inc.	SAR-2309-42-S2	E1143	2 yr	13 Nov 2022
Low Noise Amplifier	Sage Millimeter, Inc.	SBL-1834034030-KFKF	E1228	1 yr	8 Apr 2022

Notes: NCR - no calibration required

Table 6.1-2: Test Software

Manufacturer of Software	Details
Rohde & Schwarz	EMC 32 V10.60.10 (AC conducted emissions)
Rohde & Schwarz	EMC 32 V10.60.15 (Radiated emissions)

Notes: None

Section 8 Testing data

8.1 FCC 15.207(a) and IC RSS-GEN, Issue 5 8.8 AC power line conducted emissions

8.1.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.207(a)
RSS-Gen → §8.8

For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.

Table 8.1-1: Conducted emissions limit

Frequency of emission, MHz	Conducted limit, dB μ V	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

Note: * - Decreases with the logarithm of the frequency.

8.1.2 Test summary

Verdict	Pass		
Test date	April 5, 2021	Temperature	23 °C
Test engineer	David Hewitt, EMC Specialist	Air pressure	1006 mbar
Test location	Ground Plane	Relative humidity	51 %

8.1.3 Notes

Testing was performed with the BLE transmitter operating on a fixed channel at client-specified full power. Low, middle, and high channels were tested.

Testing was performed according to ANSI C63.10 §6.2.

8.1.4 Setup details

Port under test	AC mains of host support equipment
EUT setup configuration	Table top
Measurement details	A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.

Receiver settings:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	– Peak and Average (Preview measurement) – Quasi-peak and CAverage (Final measurement)
Trace mode	Max Hold
Measurement time	– 100 ms (Peak and Average preview measurement) – 5000 ms (Quasi-peak final measurement) – 5000 ms (CAverage final measurement)

8.1.5 Test data

Full Spectrum

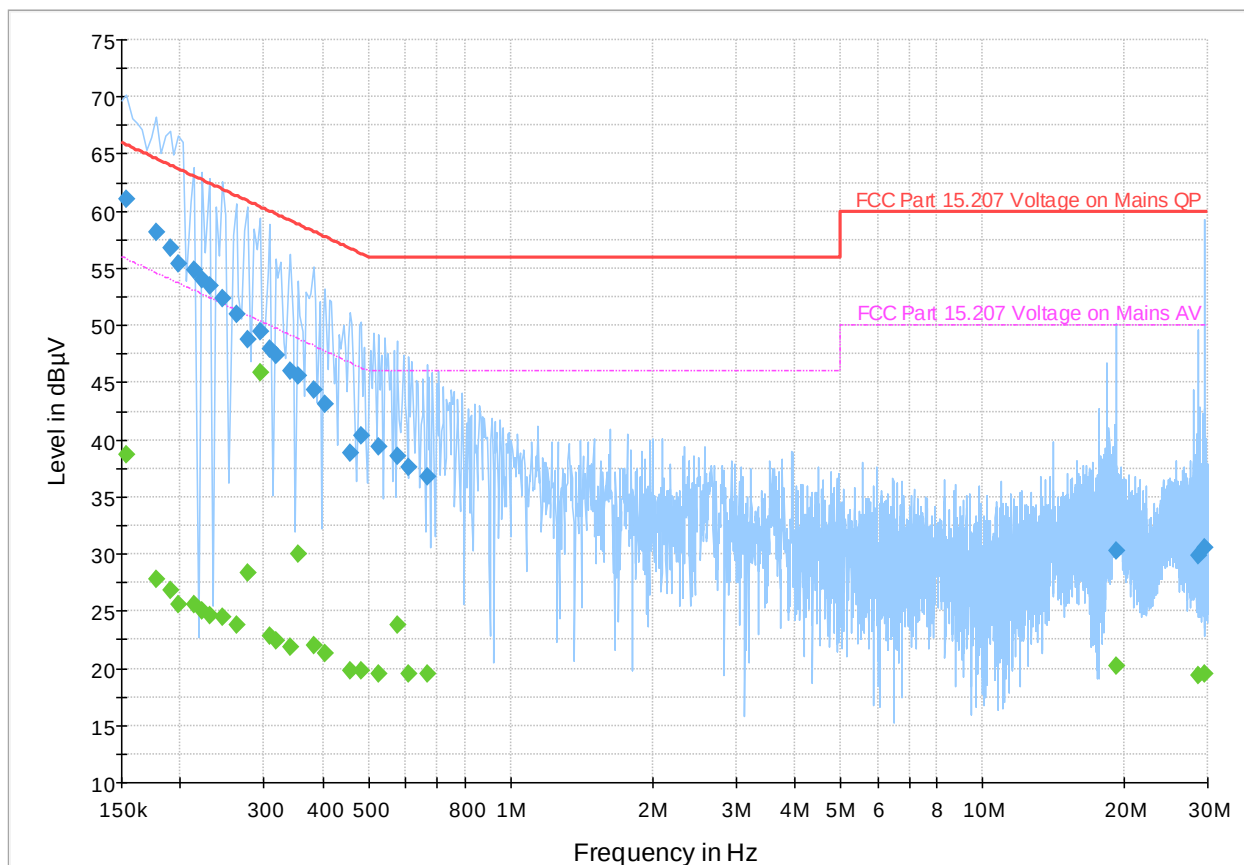
**Figure 8.1-1:** AC conducted emissions spectral plot, BLE 2402 MHz

Table 8.1-2: AC conducted emissions results, BLE 2402 MHz

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154000	---	38.70	55.78	17.08	5000.0	9.000	L1	ON	19.6
0.154000	61.01	---	65.78	4.77	5000.0	9.000	L1	ON	19.6
0.178000	---	27.82	54.58	26.76	5000.0	9.000	L1	ON	19.6
0.178000	58.19	---	64.58	6.38	5000.0	9.000	L1	ON	19.6
0.190000	---	26.84	54.04	27.19	5000.0	9.000	L1	ON	19.6
0.190000	56.82	---	64.04	7.22	5000.0	9.000	L1	ON	19.6
0.198000	55.46	---	63.69	8.23	5000.0	9.000	N	ON	19.5
0.198000	---	25.57	53.69	28.12	5000.0	9.000	N	ON	19.5
0.214000	54.86	---	63.05	8.19	5000.0	9.000	L1	ON	19.5
0.214000	---	25.66	53.05	27.39	5000.0	9.000	L1	ON	19.5
0.222000	54.02	---	62.74	8.72	5000.0	9.000	L1	ON	19.5
0.222000	---	24.98	52.74	27.76	5000.0	9.000	L1	ON	19.5
0.230000	---	24.67	52.45	27.78	5000.0	9.000	L1	ON	19.5
0.230000	53.44	---	62.45	9.01	5000.0	9.000	L1	ON	19.5
0.246000	52.32	---	61.89	9.57	5000.0	9.000	L1	ON	19.5
0.246000	---	24.55	51.89	27.34	5000.0	9.000	L1	ON	19.5
0.262000	51.02	---	61.37	10.35	5000.0	9.000	L1	ON	19.5
0.262000	---	23.86	51.37	27.51	5000.0	9.000	L1	ON	19.5
0.278000	48.74	---	60.88	12.13	5000.0	9.000	N	ON	19.4
0.278000	---	28.42	50.88	22.46	5000.0	9.000	N	ON	19.4
0.294000	---	45.91	50.41	4.50	5000.0	9.000	N	ON	19.4
0.294000	49.50	---	60.41	10.91	5000.0	9.000	N	ON	19.4
0.310000	48.01	---	59.97	11.96	5000.0	9.000	L1	ON	19.5
0.310000	---	22.90	49.97	27.08	5000.0	9.000	L1	ON	19.5
0.318000	---	22.37	49.76	27.39	5000.0	9.000	L1	ON	19.5
0.318000	47.34	---	59.76	12.42	5000.0	9.000	L1	ON	19.5
0.342000	46.06	---	59.16	13.10	5000.0	9.000	L1	ON	19.5
0.342000	---	21.87	49.16	27.29	5000.0	9.000	L1	ON	19.5
0.354000	45.60	---	58.87	13.27	5000.0	9.000	L1	ON	19.5
0.354000	---	30.04	48.87	18.83	5000.0	9.000	L1	ON	19.5
0.382000	44.37	---	58.24	13.87	5000.0	9.000	L1	ON	19.5
0.382000	---	22.07	48.24	26.16	5000.0	9.000	L1	ON	19.5
0.406000	43.13	---	57.73	14.60	5000.0	9.000	L1	ON	19.5
0.406000	---	21.30	47.73	26.43	5000.0	9.000	L1	ON	19.5
0.458000	38.89	---	56.73	17.84	5000.0	9.000	N	ON	19.4
0.458000	---	19.76	46.73	26.96	5000.0	9.000	N	ON	19.4
0.482000	---	19.85	46.31	26.45	5000.0	9.000	L1	ON	19.4
0.482000	40.42	---	56.31	15.88	5000.0	9.000	L1	ON	19.4
0.526000	---	19.50	46.00	26.50	5000.0	9.000	L1	ON	19.4
0.526000	39.35	---	56.00	16.65	5000.0	9.000	L1	ON	19.4
0.574000	---	23.83	46.00	22.17	5000.0	9.000	L1	ON	19.4
0.574000	38.57	---	56.00	17.43	5000.0	9.000	L1	ON	19.4
0.610000	37.64	---	56.00	18.36	5000.0	9.000	L1	ON	19.4
0.610000	---	19.54	46.00	26.46	5000.0	9.000	L1	ON	19.4
0.666000	---	19.58	46.00	26.42	5000.0	9.000	L1	ON	19.4
0.666000	36.79	---	56.00	19.21	5000.0	9.000	L1	ON	19.4
19.202000	30.29	---	60.00	29.71	5000.0	9.000	L1	ON	20.2
19.202000	---	20.18	50.00	29.82	5000.0	9.000	L1	ON	20.2
28.694000	---	19.42	50.00	30.58	5000.0	9.000	N	ON	20.1
28.694000	29.88	---	60.00	30.12	5000.0	9.000	N	ON	20.1
29.498000	---	19.46	50.00	30.54	5000.0	9.000	N	ON	20.2
29.498000	30.61	---	60.00	29.39	5000.0	9.000	N	ON	20.2

Notes: Result (dBμV) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)
Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + transient limiter (dB)
The maximum measured value observed over a period of 5 seconds was recorded.

Full Spectrum

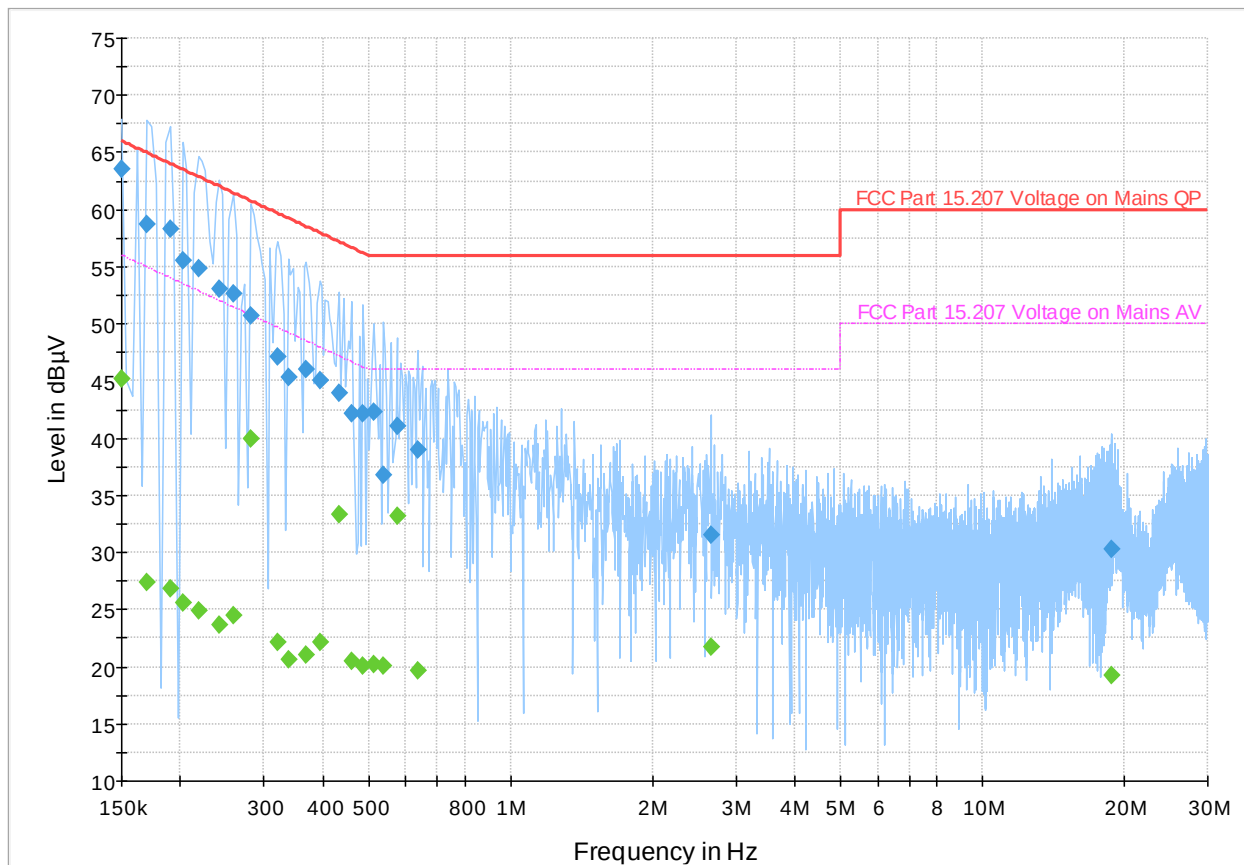
**Figure 8.1-2:** AC conducted emissions spectral plot, BLE 2440 MHz

Table 8.1-3: AC conducted emissions results, BLE 2440 MHz

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	63.55	---	66.00	2.45	5000.0	9.000	N	ON	19.6
0.150000	---	45.14	56.00	10.86	5000.0	9.000	N	ON	19.6
0.170000	58.66	---	64.96	6.30	5000.0	9.000	L1	ON	19.6
0.170000	---	27.41	54.96	27.55	5000.0	9.000	L1	ON	19.6
0.190000	---	26.87	54.04	27.17	5000.0	9.000	N	ON	19.5
0.190000	58.36	---	64.04	5.67	5000.0	9.000	N	ON	19.5
0.202000	55.55	---	63.53	7.98	5000.0	9.000	L1	ON	19.5
0.202000	---	25.63	53.53	27.90	5000.0	9.000	L1	ON	19.5
0.218000	54.91	---	62.90	7.98	5000.0	9.000	N	ON	19.5
0.218000	---	24.85	52.90	28.04	5000.0	9.000	N	ON	19.5
0.242000	53.08	---	62.03	8.95	5000.0	9.000	L1	ON	19.5
0.242000	---	23.71	52.03	28.31	5000.0	9.000	L1	ON	19.5
0.258000	52.59	---	61.50	8.90	5000.0	9.000	L1	ON	19.5
0.258000	---	24.45	51.50	27.04	5000.0	9.000	L1	ON	19.5
0.282000	---	40.01	50.76	10.74	5000.0	9.000	L1	ON	19.5
0.282000	50.78	---	60.76	9.98	5000.0	9.000	L1	ON	19.5
0.322000	---	22.17	49.66	27.48	5000.0	9.000	L1	ON	19.5
0.322000	47.06	---	59.66	12.59	5000.0	9.000	L1	ON	19.5
0.338000	---	20.66	49.25	28.59	5000.0	9.000	N	ON	19.4
0.338000	45.38	---	59.25	13.87	5000.0	9.000	N	ON	19.4
0.370000	---	21.01	48.50	27.50	5000.0	9.000	L1	ON	19.5
0.370000	46.03	---	58.50	12.48	5000.0	9.000	L1	ON	19.5
0.394000	---	22.08	47.98	25.90	5000.0	9.000	L1	ON	19.5
0.394000	45.00	---	57.98	12.98	5000.0	9.000	L1	ON	19.5
0.434000	---	33.28	47.18	13.90	5000.0	9.000	L1	ON	19.4
0.434000	44.00	---	57.18	13.18	5000.0	9.000	L1	ON	19.4
0.462000	---	20.52	46.66	26.14	5000.0	9.000	L1	ON	19.4
0.462000	42.22	---	56.66	14.44	5000.0	9.000	L1	ON	19.4
0.486000	---	20.02	46.24	26.21	5000.0	9.000	L1	ON	19.4
0.486000	42.10	---	56.24	14.13	5000.0	9.000	L1	ON	19.4
0.514000	---	20.21	46.00	25.79	5000.0	9.000	L1	ON	19.4
0.514000	42.23	---	56.00	13.77	5000.0	9.000	L1	ON	19.4
0.538000	---	20.10	46.00	25.90	5000.0	9.000	N	ON	19.4
0.538000	36.84	---	56.00	19.16	5000.0	9.000	N	ON	19.4
0.574000	41.07	---	56.00	14.93	5000.0	9.000	L1	ON	19.4
0.574000	---	33.21	46.00	12.79	5000.0	9.000	L1	ON	19.4
0.638000	38.99	---	56.00	17.01	5000.0	9.000	L1	ON	19.4
0.638000	---	19.65	46.00	26.35	5000.0	9.000	L1	ON	19.4
2.658000	---	21.72	46.00	24.28	5000.0	9.000	N	ON	19.3
2.658000	31.46	---	56.00	24.54	5000.0	9.000	N	ON	19.3
18.734000	---	19.29	50.00	30.71	5000.0	9.000	N	ON	20.3
18.734000	30.23	---	60.00	29.77	5000.0	9.000	N	ON	20.3

Notes: Result (dBμV) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)
Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + transient limiter (dB)
The maximum measured value observed over a period of 5 seconds was recorded.

Full Spectrum

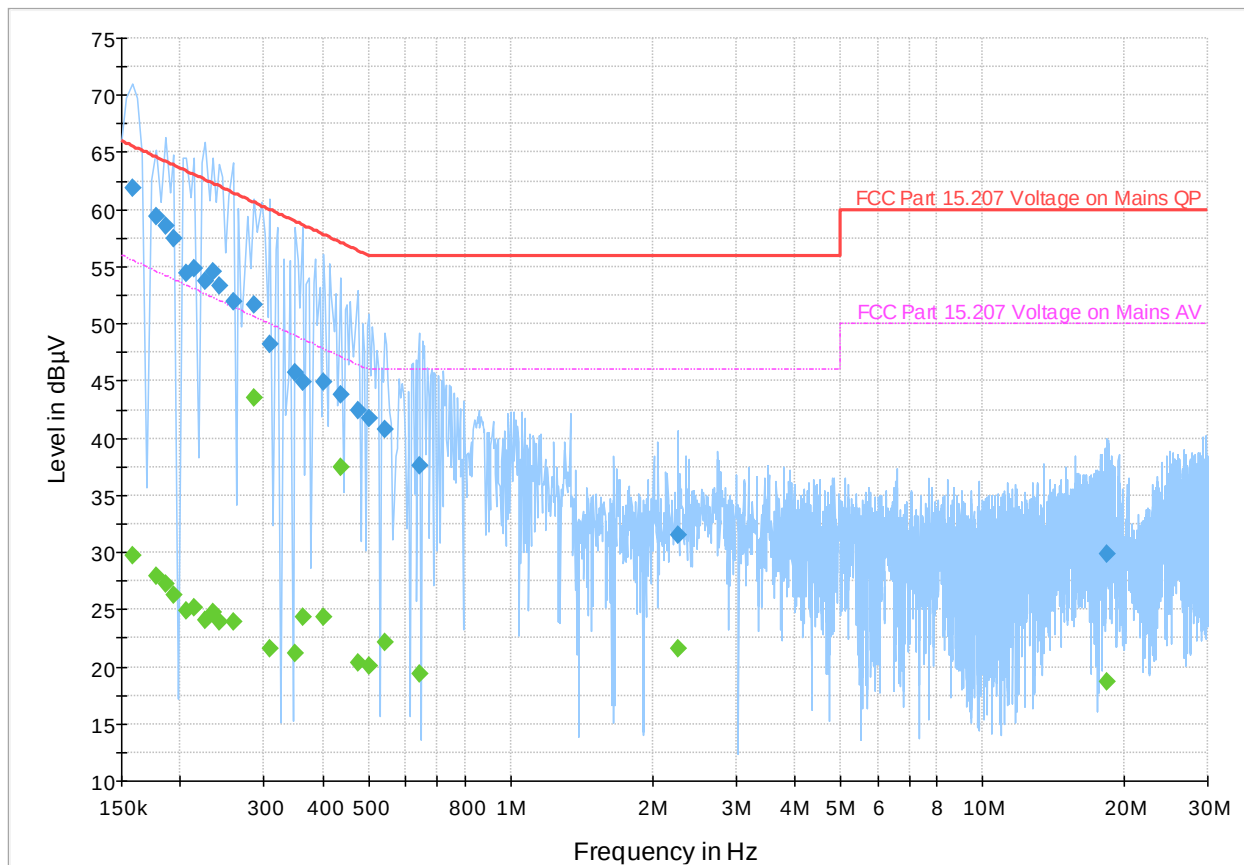
**Figure 8.1-3:** AC conducted emissions spectral plot, BLE 2480 MHz

Table 8.1-4: AC conducted emissions results, BLE 2480 MHz

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.158000	---	29.71	55.57	25.86	5000.0	9.000	N	ON	19.6
0.158000	61.95	---	65.57	3.62	5000.0	9.000	N	ON	19.6
0.178000	---	27.88	54.58	26.70	5000.0	9.000	N	ON	19.5
0.178000	59.41	---	64.58	5.17	5000.0	9.000	N	ON	19.5
0.186000	---	27.27	54.21	26.94	5000.0	9.000	N	ON	19.5
0.186000	58.53	---	64.21	5.68	5000.0	9.000	N	ON	19.5
0.194000	57.52	---	63.86	6.34	5000.0	9.000	N	ON	19.5
0.194000	---	26.28	53.86	27.59	5000.0	9.000	N	ON	19.5
0.206000	54.44	---	63.37	8.92	5000.0	9.000	N	ON	19.5
0.206000	---	24.87	53.37	28.50	5000.0	9.000	N	ON	19.5
0.214000	---	25.20	53.05	27.85	5000.0	9.000	L1	ON	19.5
0.214000	54.82	---	63.05	8.23	5000.0	9.000	L1	ON	19.5
0.226000	---	24.06	52.60	28.54	5000.0	9.000	N	ON	19.5
0.226000	53.78	---	62.60	8.82	5000.0	9.000	N	ON	19.5
0.234000	54.61	---	62.31	7.69	5000.0	9.000	L1	ON	19.5
0.234000	---	24.77	52.31	27.54	5000.0	9.000	L1	ON	19.5
0.242000	---	23.96	52.03	28.07	5000.0	9.000	N	ON	19.5
0.242000	53.40	---	62.03	8.63	5000.0	9.000	N	ON	19.5
0.258000	---	23.90	51.50	27.60	5000.0	9.000	N	ON	19.5
0.258000	51.98	---	61.50	9.52	5000.0	9.000	N	ON	19.5
0.286000	---	43.49	50.64	7.14	5000.0	9.000	L1	ON	19.5
0.286000	51.69	---	60.64	8.95	5000.0	9.000	L1	ON	19.5
0.310000	---	21.62	49.97	28.35	5000.0	9.000	N	ON	19.4
0.310000	48.22	---	59.97	11.75	5000.0	9.000	N	ON	19.4
0.350000	45.71	---	58.96	13.25	5000.0	9.000	N	ON	19.4
0.350000	---	21.15	48.96	27.81	5000.0	9.000	N	ON	19.4
0.362000	---	24.39	48.68	24.29	5000.0	9.000	N	ON	19.4
0.362000	44.87	---	58.68	13.81	5000.0	9.000	N	ON	19.4
0.402000	---	24.35	47.81	23.46	5000.0	9.000	L1	ON	19.5
0.402000	44.85	---	57.81	12.96	5000.0	9.000	L1	ON	19.5
0.438000	---	37.46	47.10	9.64	5000.0	9.000	L1	ON	19.4
0.438000	43.80	---	57.10	13.30	5000.0	9.000	L1	ON	19.4
0.474000	---	20.40	46.44	26.04	5000.0	9.000	L1	ON	19.4
0.474000	42.45	---	56.44	13.99	5000.0	9.000	L1	ON	19.4
0.502000	41.69	---	56.00	14.31	5000.0	9.000	L1	ON	19.4
0.502000	---	20.08	46.00	25.92	5000.0	9.000	L1	ON	19.4
0.542000	---	22.17	46.00	23.83	5000.0	9.000	L1	ON	19.4
0.542000	40.77	---	56.00	15.23	5000.0	9.000	L1	ON	19.4
0.642000	---	19.38	46.00	26.62	5000.0	9.000	L1	ON	19.4
0.642000	37.61	---	56.00	18.39	5000.0	9.000	L1	ON	19.4
2.266000	---	21.53	46.00	24.47	5000.0	9.000	L1	ON	19.4
2.266000	31.49	---	56.00	24.51	5000.0	9.000	L1	ON	19.4
18.290000	29.87	---	60.00	30.13	5000.0	9.000	L1	ON	20.3
18.290000	---	18.71	50.00	31.29	5000.0	9.000	L1	ON	20.3

Notes: Result (dBμV) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)
Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + transient limiter (dB)
The maximum measured value observed over a period of 5 seconds was recorded.

8.2 FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques References

8.2.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(a)(2)
RSS-247 → §5.2(a)

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
- (2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2.2 Test summary

Verdict	Pass		
Test date	April 6, 2021	Temperature	22 °C
Test engineer	David Hewitt, EMC Specialist	Air pressure	1005 mbar
Test location	Ground Plane	Relative humidity	48 %

8.2.1 Notes

Testing was performed with the BLE transmitter operating on a fixed channel at client-specified full power. Low, middle, and high channels were tested.

The EUT antenna port was connected to the spectrum analyzer via low loss cable and a suitable attenuator. The loss of this assembly was corrected for via a transducer factor in the spectrum analyzer.

8.2.2 Setup details

EUT setup configuration	Table top
Test facility	Nemko San Diego
Measurement method	558074 D01 DTS Measurement Guidance §8.2 ANSI C63.10 §11.8.1 using built-in marker function of the spectrum analyzer

Receiver/spectrum analyzer settings:

Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Detector mode	Peak
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.2.3 Test data

Table 8.2-1: 6 dB occupied bandwidth test data

Test Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
2402	599.40	> 500	99.40
2440	599.40	> 500	99.40
2480	596.40	> 500	96.40

8.2.5 Test data, continued



Figure 8.2-1: 6 dB occupied bandwidth, 2402 MHz



Figure 8.2-2: 6 dB occupied bandwidth, 2440 MHz



Figure 8.2-3: 6 dB occupied bandwidth, 2480 MHz

8.3 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements

8.3.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(b)(2) / (3)

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one-Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
 - (4) The conducted output power limit specified in paragraph (b) of this Section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this Section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this Section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

RSS-247 → §5.4(d)

- (d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

8.3.2 Test summary

Verdict	Pass		
Test date	April 6, 2021	Temperature	22 °C
Test engineer	David Hewitt, EMC Specialist	Air pressure	1005 mbar
Test location	Wireless bench	Relative humidity	50 %

8.3.3 Notes

Testing was performed with the BLE transmitter operating on a fixed channel at client-specified full power. Low, middle, and high channels were tested.

The attenuation of the interconnecting cable was included in the power meter software as a correction factor.

The antenna gain is 1.5 dBi per client declaration.

The duty cycle of transmitter output signal is 100%, so no duty cycle correction factor was necessary.

EIRP = Conducted Power + Declared Antenna Gain

8.3.4 Setup details

EUT setup configuration	Table top
Test facility	Nemko San Diego
Measurement method	ANSI C63.10 §11.9.2.3 AVGPM Power Meter

8.3.5 Test data

Table 8.3-1: Output power

Test Frequency (MHz)	Measured Conducted Power (dBm)	Conducted Limit (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
2402	2.33	30.0	2.5	4.83	36.0
2440	2.25	30.0	2.5	4.75	36.0
2480	2.39	30.0	2.5	4.89	36.0

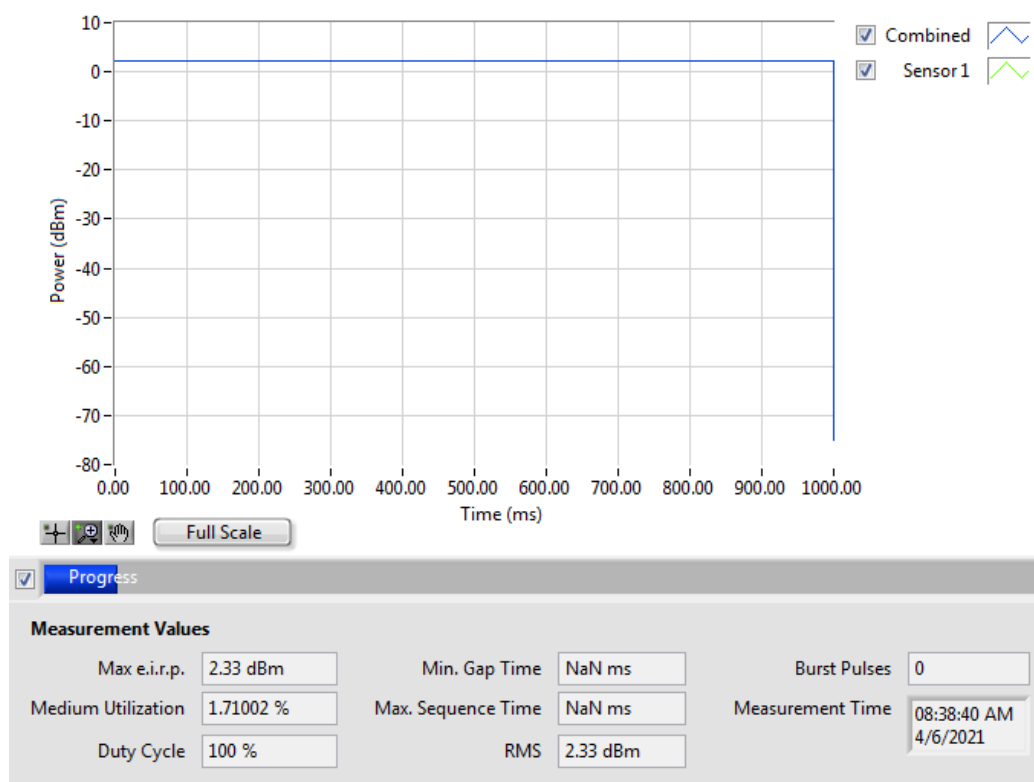


Figure 8.3-1: Output power, 2402 MHz

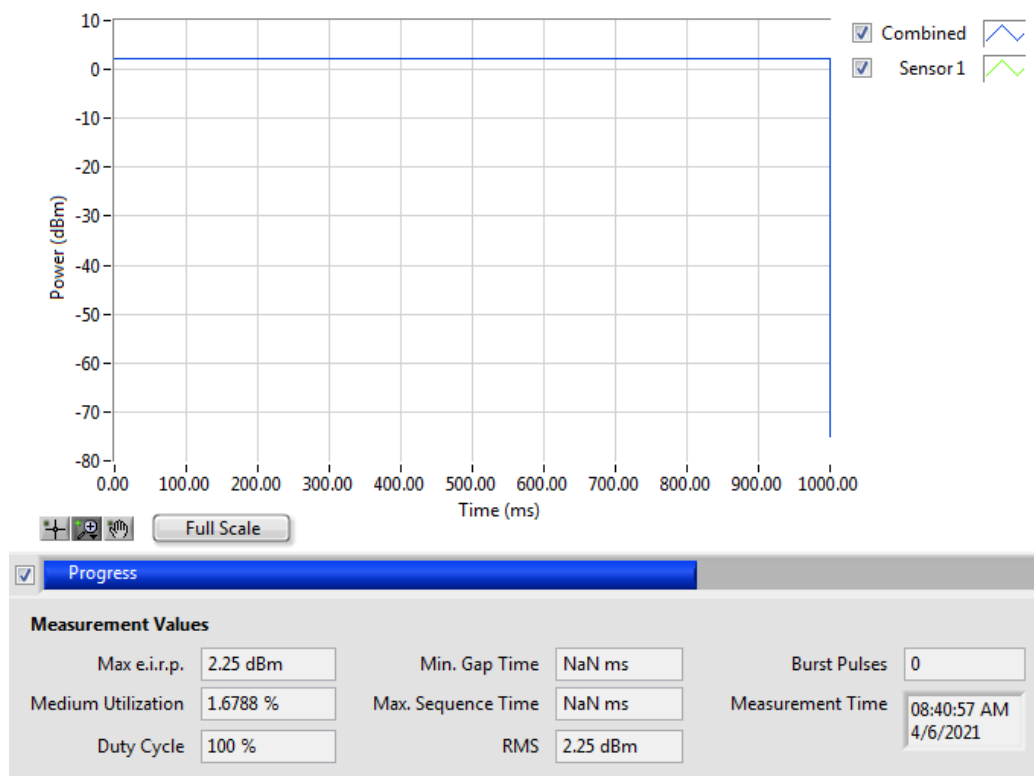


Figure 8.3-2: Output power, 2440 MHz

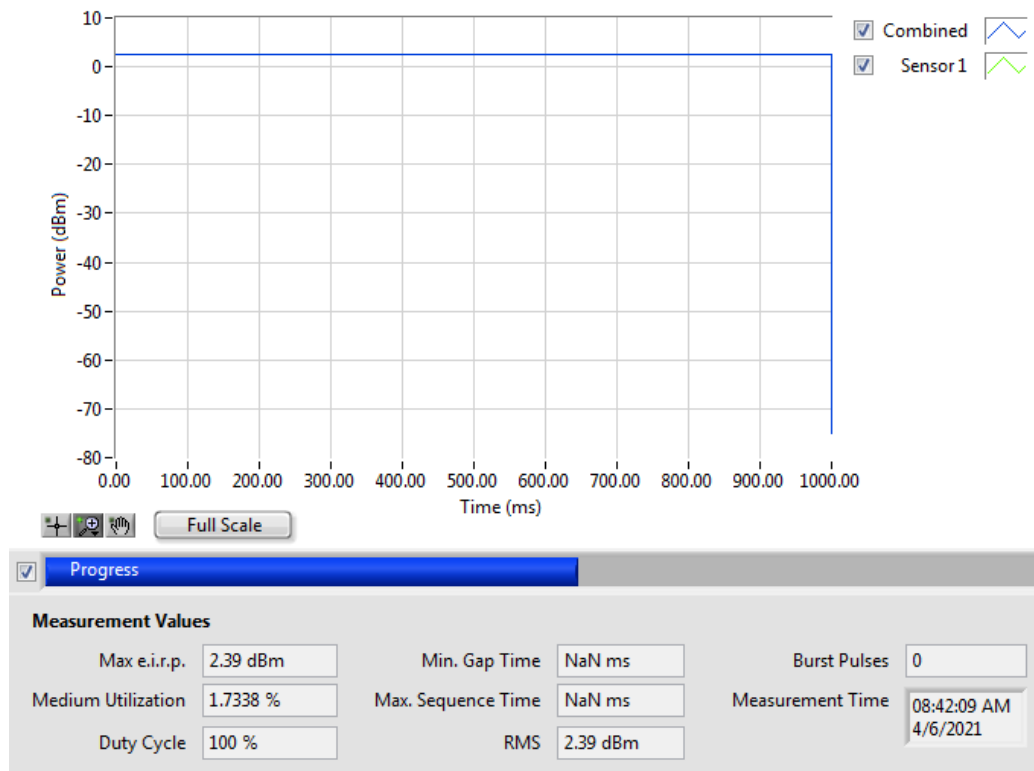


Figure 8.3-3: Output power, 2480 MHz

8.4 FCC Part 15.247(d) and RSS-247 5.5 Conducted band-edge spurious emissions

8.4.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(d)

- (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 → §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

8.4.2 Test summary

Verdict	Pass		
Test date	April 6, 2021	Temperature	23 °C
Test engineer	David Hewitt, EMC Specialist	Air pressure	1007 mbar
Test location	Wireless bench (Conducted)	Relative humidity	48 %

8.4.3 Notes

Testing was performed with the BLE transmitter operating on a fixed channel at client-specified full power. Low, middle, and high channels were tested.

The EUT antenna port was connected to the spectrum analyzer via low loss cable and a suitable attenuator. The loss of this assembly was corrected for via a transducer factor in the spectrum analyzer.

8.4.4 Setup details

EUT setup configuration	Tabletop
Test facility	Wireless bench
Measurement details	Conducted band edge measurement performed as per C63.10 §6.10.4 Conducted spurious emissions measurement performed as per C63.10 §11.11

Spectrum analyzer settings for conducted spurious emissions:

Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Detector mode	Peak
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.4.5 Test data

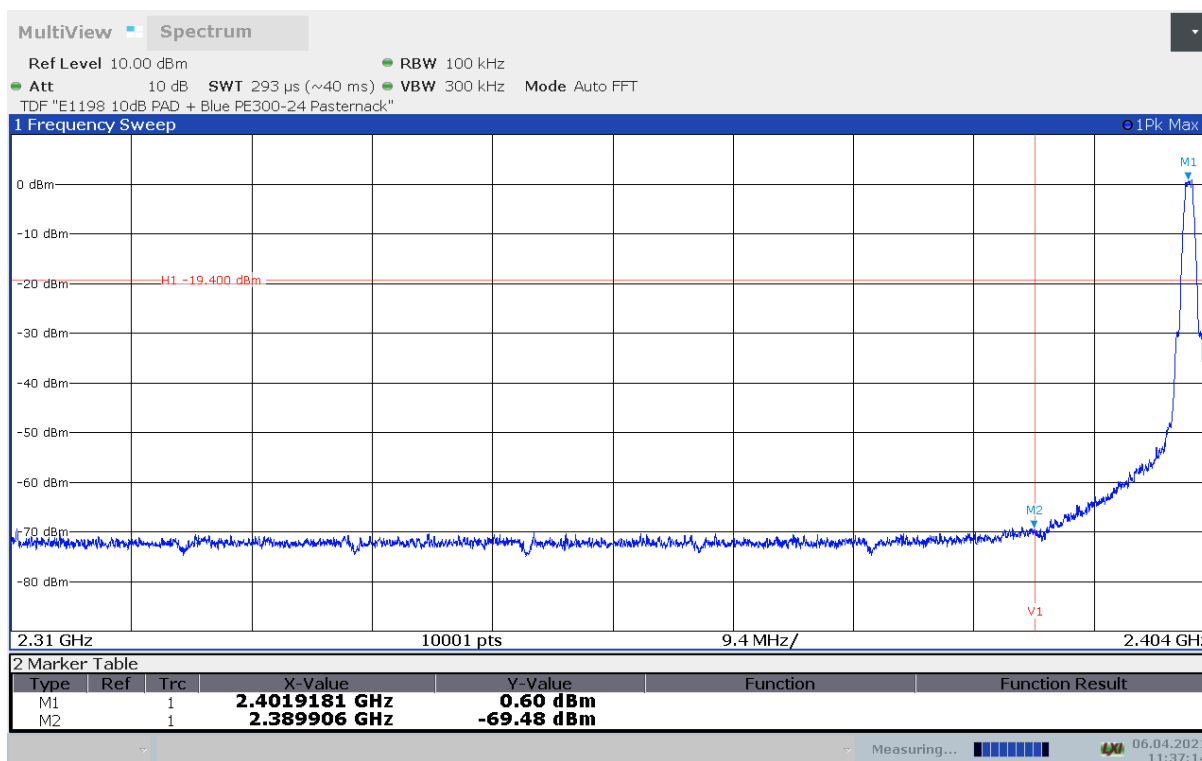


Figure 8.4-1: Conducted Band edge measurement, 2402 MHz

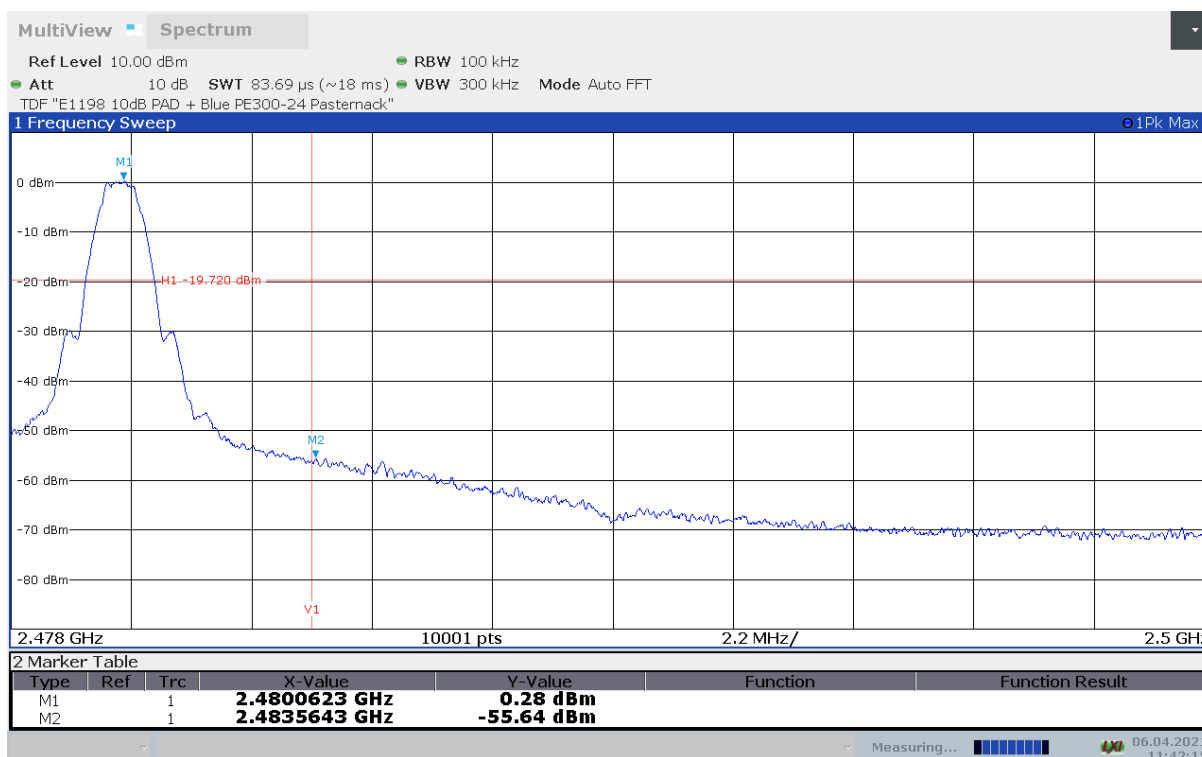


Figure 8.4-2: Conducted Band edge measurement, 2480 MHz

8.5 FCC 15.247(d) and RSS-247 5.5 Conducted spurious emissions

8.5.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(d)

- (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 → §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

8.5.1 Test summary

Verdict	Pass		
Test date	April 6, 2021	Temperature	23 °C
Test engineer	David Hewitt, EMC Specialist	Air pressure	1007 mbar
Test location	Wireless bench (Conducted)	Relative humidity	48 %

8.5.2 Notes

Testing was performed with the BLE transmitter operating on a fixed channel at client-specified full power. Low, middle, and high channels were tested.

The EUT antenna port was connected to the spectrum analyzer via low loss cable and a suitable attenuator. The loss of this assembly was corrected for via a transducer factor in the spectrum analyzer.

The spectrum was searched from 30 MHz to 26 GHz (above the 10th harmonic of the highest transmit frequency of 2480 MHz).

8.5.3 Setup details

EUT setup configuration	Tabletop
Test facility	Wireless bench
Measurement details	Conducted spurious emissions measurement performed as per C63.10 §11.11.3

Spectrum analyzer settings for conducted spurious emissions:

Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Detector mode	Peak
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.5.4 Test data

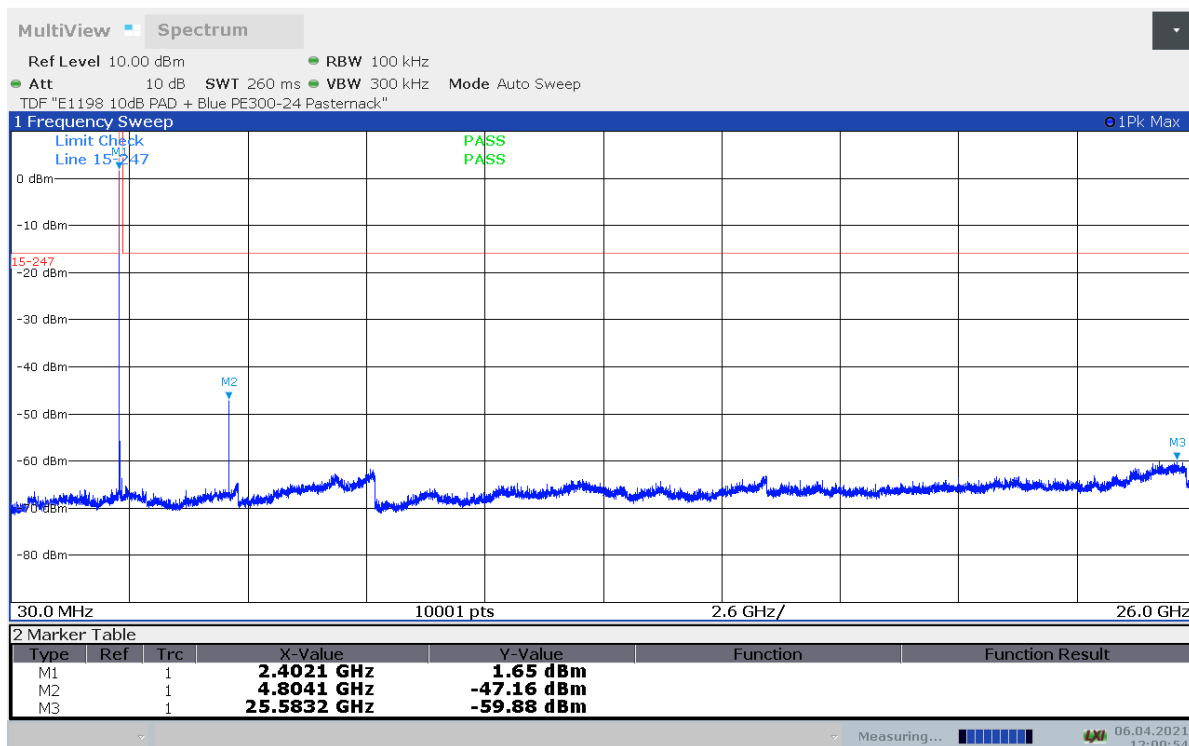


Figure 8.5-1: Conducted spurious emissions, 2402 MHz

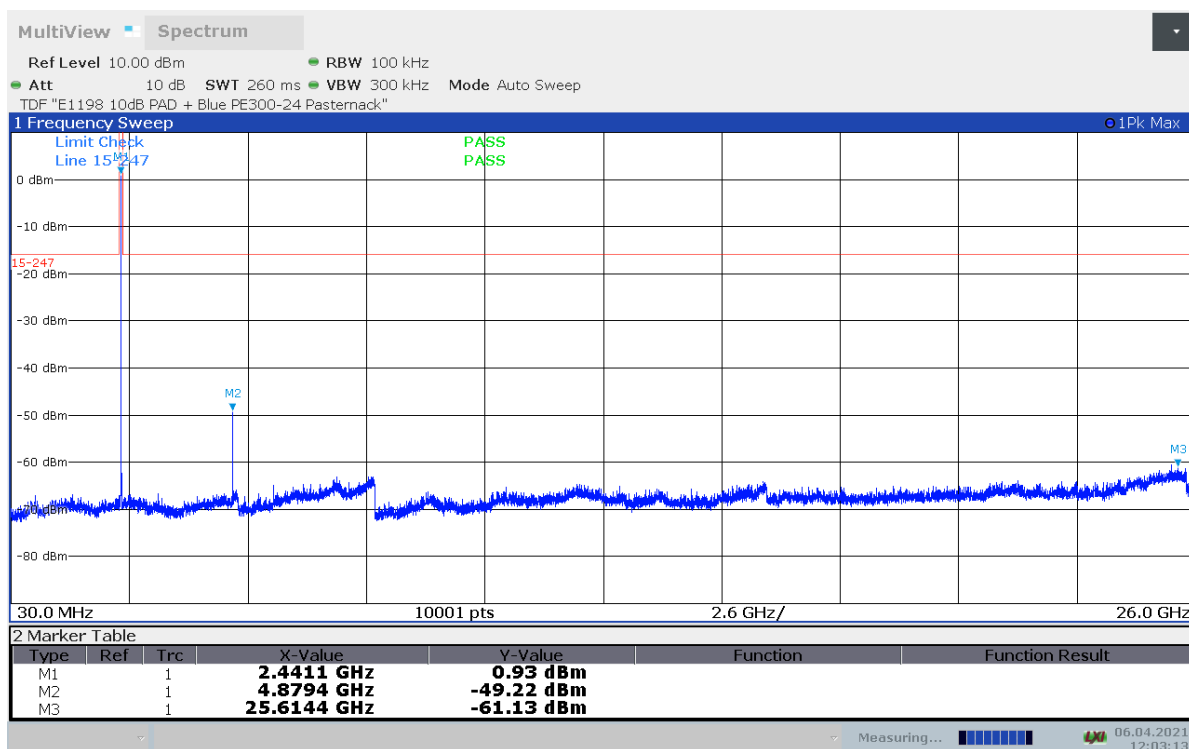


Figure 8.5-2: Conducted spurious emissions, 2440 MHz

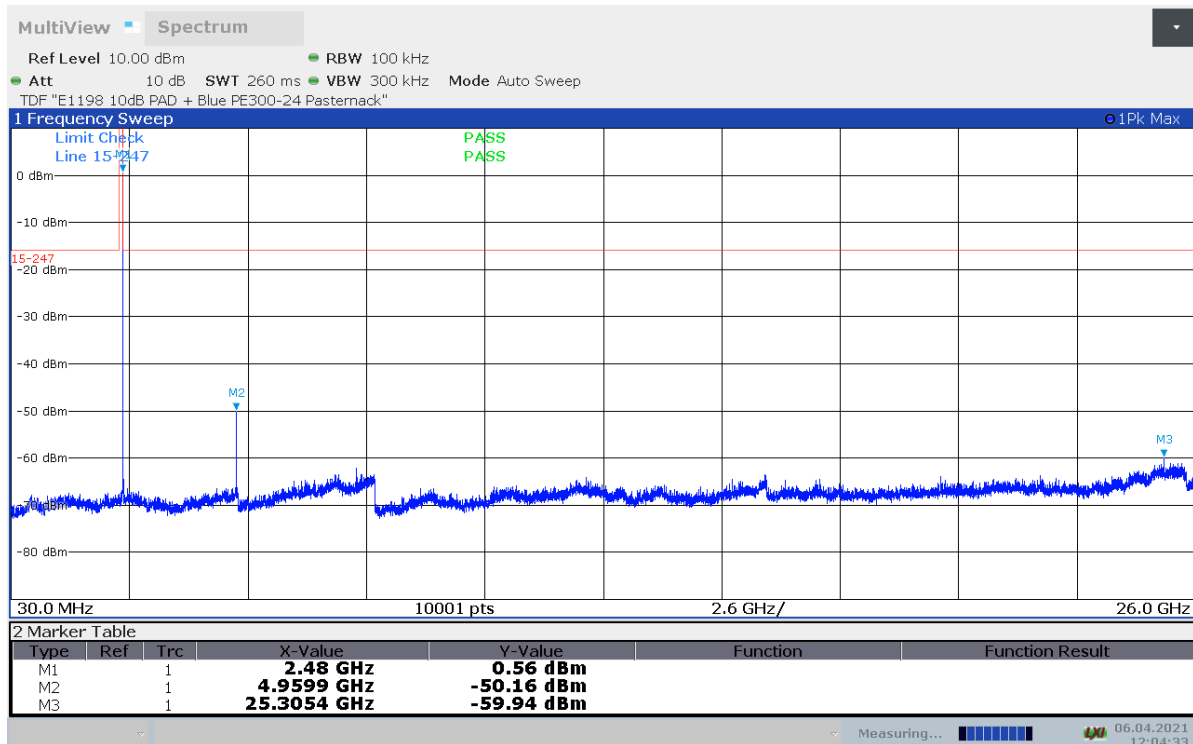


Figure 8.5-3: Conducted spurious emissions, 2480 MHz

Note: For the conducted emissions plots above, peaks within 2400-2483.5MHz are transmitter fundamentals signals and are not evaluated against the relevant limits.

8.6 FCC 15.247(d) and RSS-247 5.5 Radiated restricted band-edges and spurious emission

8.6.1 Definition and limits

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(d)

- (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 → §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Table 8.6-1: FCC §15.209– Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	μV/m	dBμV/m	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.
For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Table 8.6-2: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.6.2 Test summary

Verdict	Pass		
Test date	April 7, 2021	Temperature	20 °C
Test engineer	David Hewitt, EMC Specialist	Air pressure	1009 mbar
Test location	3m semi-anechoic chamber (Radiated)	Relative humidity	60 %
Test date	April 8, 2021	Temperature	20 °C
Test engineer	David Hewitt, EMC Specialist	Air pressure	1008 mbar
Test location	3m semi-anechoic chamber (Radiated)	Relative humidity	60 %

8.6.3 Notes

Testing was performed with the BLE transmitter operating on a fixed channel at client-specified full power. Low, middle, and high channels were tested.

The spectrum was searched from 30 MHz to 26 GHz (above the 10th harmonic of the highest transmit frequency of 2480 MHz).

Radiated measurements were performed at a 3 m measurement distance.

8.6.4 Setup details

EUT setup configuration	Tabletop
Test facility	Nemko San Diego
Measurement details	Radiated spurious emissions measurement performed as per C63.10 §11.12


Receiver settings for radiated measurements within restricted bands below 1 GHz:

Resolution bandwidth	120 kHz
Video bandwidth	300 kHz
Detector mode	Peak (preview measurements) Quasi-Peak (final measurements)
Trace mode	Max Hold
Measurement time	5 s (final measurements)

Receiver settings for radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	Average and peak (final measurements)
Trace mode	Max Hold
Measurement time	5 s (final measurements)

8.6.5 Test data

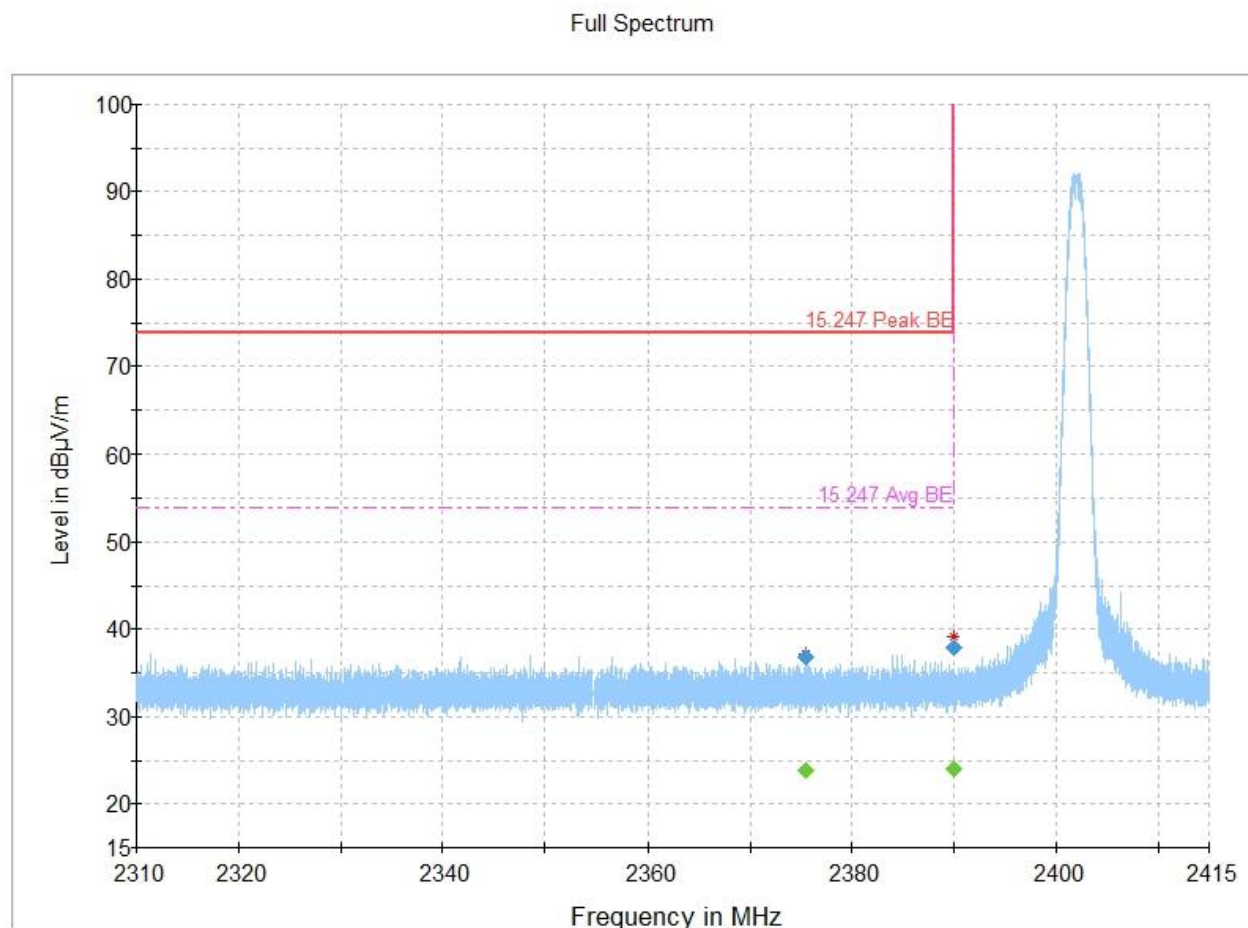

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-1: Radiated emissions, restricted band edge, low channel spectral plot

Table 8.6-2: Radiated emissions, restricted band edge, low channel results


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2375.404500	---	23.89	53.90	30.01	5000.0	1000.000	276.0	H	0.0	-10.2
2375.404500	36.92	---	73.90	36.98	5000.0	1000.000	276.0	H	0.0	-10.2
2390.000000	---	24.10	53.90	29.80	5000.0	1000.000	139.0	H	214.0	-10.1
2390.000000	37.91	---	73.90	35.99	5000.0	1000.000	139.0	H	214.0	-10.1

Notes:

¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

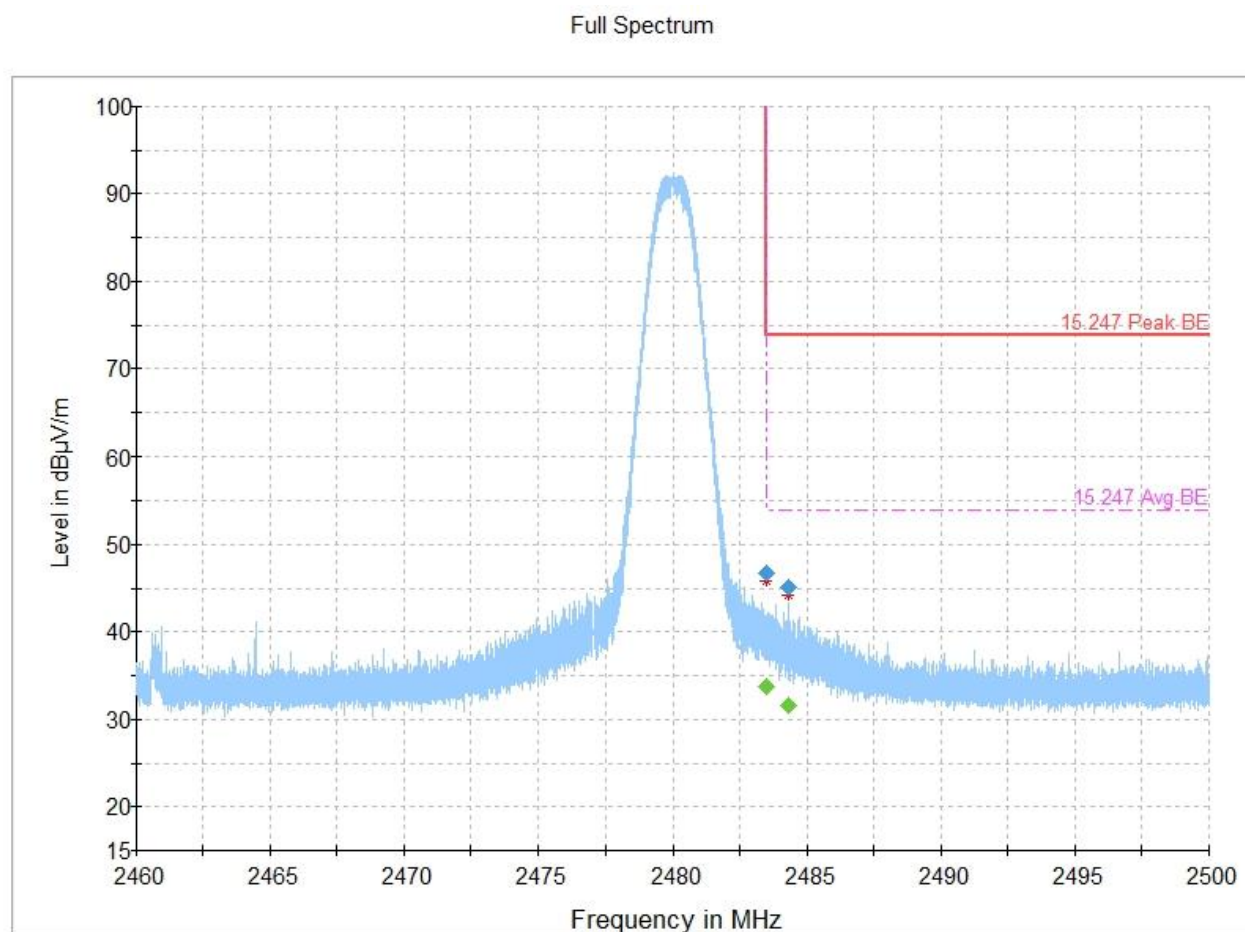

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-2: Radiated emissions, restricted band edge, high channel spectral plot

Table 8.6-3: Radiated emissions, restricted band edge, high channel results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.500000	---	33.69	53.90	20.22	5000.0	1000.000	139.0	H	309.0	-9.5
2483.500000	46.69	---	73.90	27.21	5000.0	1000.000	139.0	H	309.0	-9.5
2484.305333	---	31.57	53.90	22.33	5000.0	1000.000	105.0	H	310.0	-9.5
2484.305333	45.09	---	73.90	28.81	5000.0	1000.000	105.0	H	310.0	-9.5


Notes:

¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

Full Spectrum

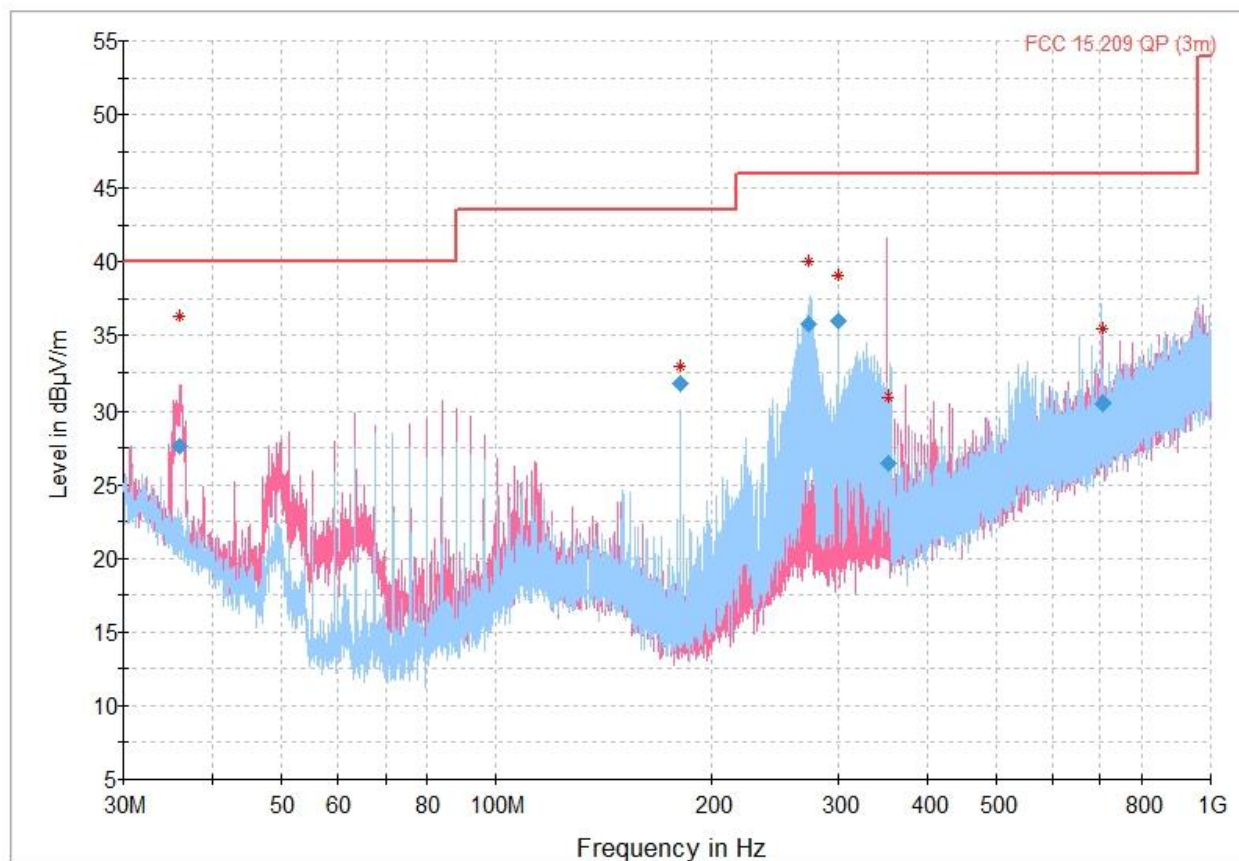

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-3: Radiated emissions, low channel, 30 – 1000 MHz spectral plot

Table 8.6-4: Radiated emissions, low channel, 30 – 1000 MHz (Quasi-Peak) results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.978667	27.59	40.00	12.41	5000.0	120.000	139.0	V	66.0	23.3
180.014333	31.80	43.50	11.70	5000.0	120.000	142.0	H	113.0	17.1
273.156333	35.75	46.00	10.25	5000.0	120.000	104.0	H	215.0	21.3
300.003333	35.98	46.00	10.02	5000.0	120.000	144.0	H	196.0	22.0
352.612333	26.43	46.00	19.57	5000.0	120.000	126.0	V	136.0	23.8
704.214333	30.49	46.00	15.51	5000.0	120.000	260.0	H	163.0	30.5

Notes:


¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

⁴ Limits converted to dBµV/m and an inverse proportionality factor of 20 dB per decade has been used to normalize the specification limit to a measurement distance of 3 meters to determine compliance.

Full Spectrum

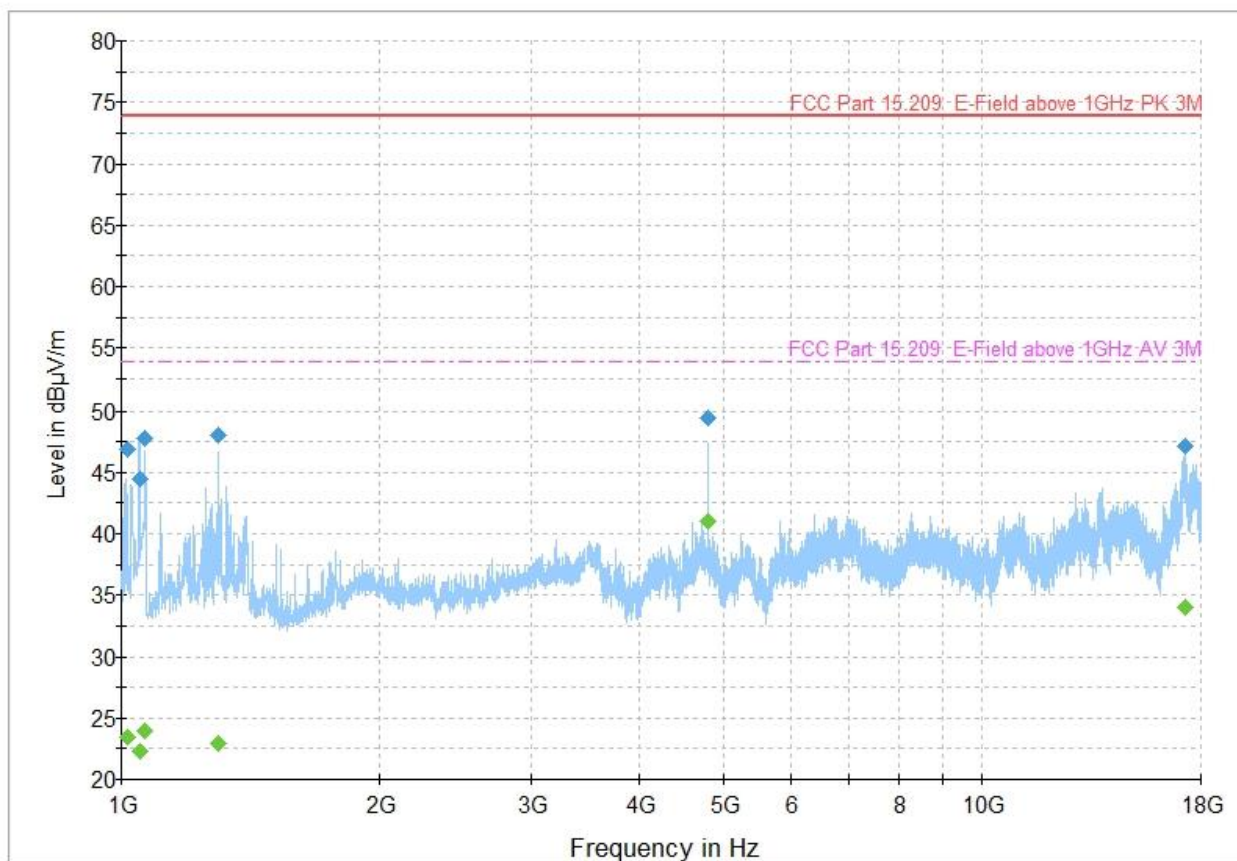

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-4: Radiated emissions, low channel, 1 – 18 GHz spectral plot

Table 8.6-5: Radiated emissions, low channel, 1 – 18 GHz (Quasi-Peak) results


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1016.422222	---	23.41	53.90	30.49	1000.0	1000.000	284.0	V	30.0	-14.9
1016.422222	46.83	---	73.90	27.07	1000.0	1000.000	284.0	V	30.0	-14.9
1050.455556	44.40	---	73.90	29.50	1000.0	1000.000	380.0	H	67.0	-15.3
1050.455556	---	22.27	53.90	31.63	1000.0	1000.000	380.0	H	67.0	-15.3
1064.255556	47.74	---	73.90	26.16	1000.0	1000.000	260.0	V	147.0	-15.1
1064.255556	---	24.01	53.90	29.89	1000.0	1000.000	260.0	V	147.0	-15.1
1297.611111	48.03	---	73.90	25.87	1000.0	1000.000	108.0	V	132.0	-14.2
1297.611111	---	22.92	53.90	30.98	1000.0	1000.000	108.0	V	132.0	-14.2
4803.422222	---	41.03	53.90	12.87	1000.0	1000.000	154.0	V	11.0	-1.7
4803.422222	49.47	---	73.90	24.43	1000.0	1000.000	154.0	V	11.0	-1.7
17241.577778	47.13	---	73.90	26.77	1000.0	1000.000	260.0	H	130.0	14.7
17241.577778	---	34.02	53.90	19.88	1000.0	1000.000	260.0	H	130.0	14.7

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB) - pre amp (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

Full Spectrum

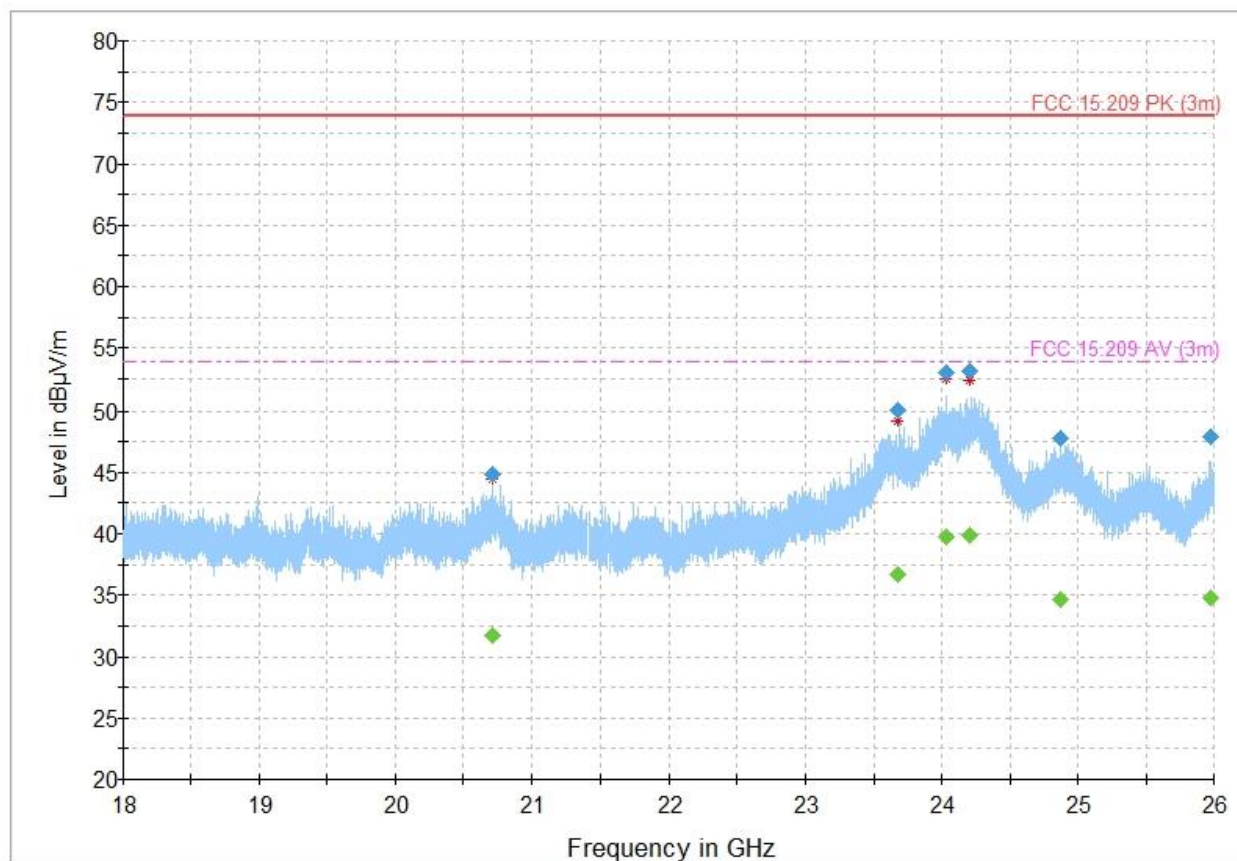

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-5: Radiated emissions, low channel, 18 – 26 GHz spectral plot

Table 8.6-6: Radiated emissions, low channel, 18 – 26 GHz (Peak and Average) results


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20716.233333	44.87	---	73.90	29.03	5000.0	1000.000	174.0	H	0.0	20.2
20716.233333	---	31.70	53.90	22.20	5000.0	1000.000	174.0	H	0.0	20.2
23682.433333	---	36.66	53.90	17.24	5000.0	1000.000	381.0	H	0.0	25.5
23682.433333	50.01	---	73.90	23.89	5000.0	1000.000	381.0	H	0.0	25.5
24038.366667	---	39.74	53.90	14.16	5000.0	1000.000	373.0	H	352.0	29.7
24038.366667	52.93	---	73.90	20.97	5000.0	1000.000	373.0	H	352.0	29.7
24211.966667	53.15	---	73.90	20.75	5000.0	1000.000	128.0	H	113.0	29.1
24211.966667	---	39.91	53.90	13.99	5000.0	1000.000	128.0	H	113.0	29.1
24875.100000	47.80	---	73.90	26.10	5000.0	1000.000	302.0	V	113.0	24.7
24875.100000	---	34.69	53.90	19.21	5000.0	1000.000	302.0	V	113.0	24.7
25976.433333	47.93	---	73.90	25.97	5000.0	1000.000	190.0	V	0.0	25.3
25976.433333	---	34.81	53.90	19.09	5000.0	1000.000	190.0	V	0.0	25.3

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB) - pre amp (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

Full Spectrum

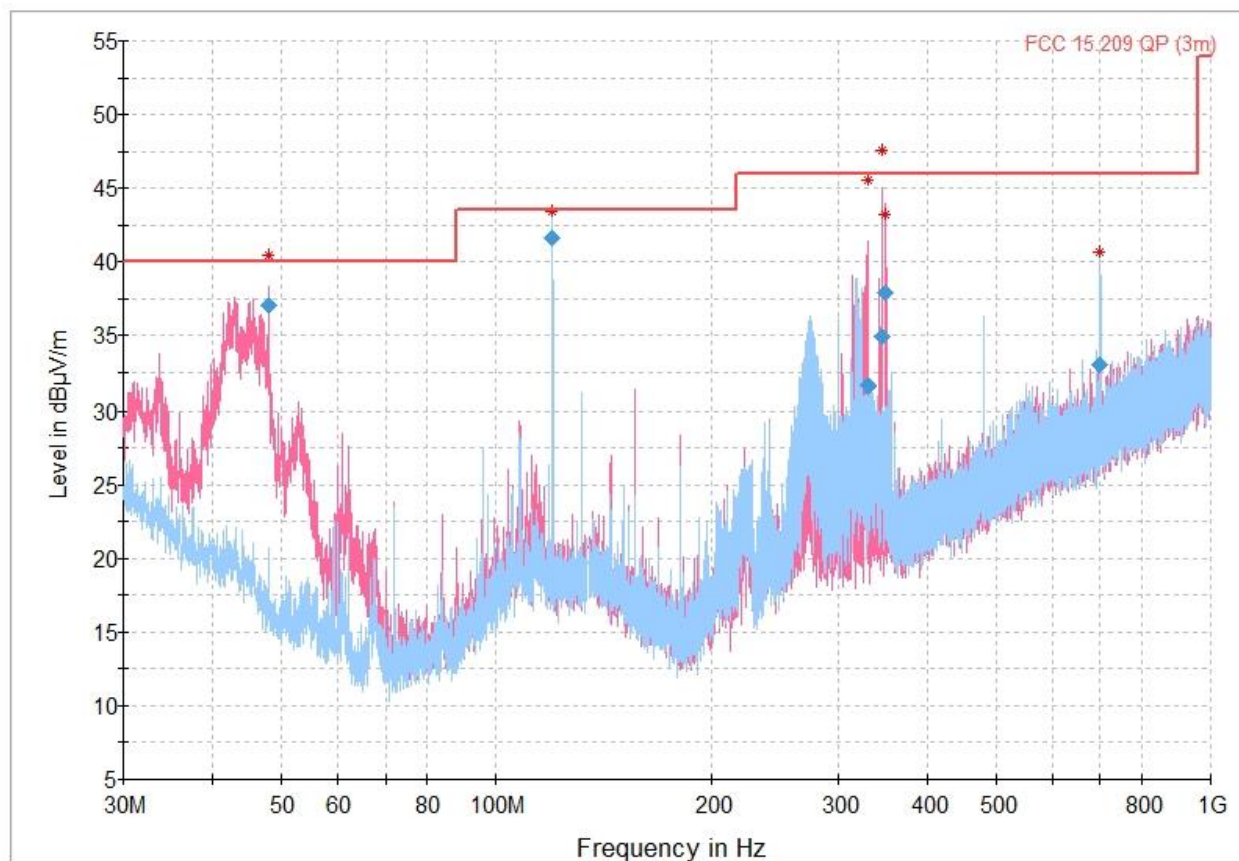

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-6: Radiated emissions, middle channel, 30 – 1000 MHz spectral plot

Table 8.6-7: Radiated emissions, middle channel, 30 – 1000 MHz (Quasi-Peak) results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.022000	37.02	40.00	2.98	5000.0	120.000	107.0	V	323.0	16.9
119.996000	41.62	43.50	1.88	5000.0	120.000	245.0	H	253.0	19.4
330.475667	31.67	46.00	14.33	5000.0	120.000	115.0	V	53.0	23.0
345.764333	34.94	46.00	11.06	5000.0	120.000	98.0	V	193.0	23.5
349.752333	37.91	46.00	8.09	5000.0	120.000	324.0	V	80.0	23.7
697.716000	33.00	46.00	13.00	5000.0	120.000	112.0	H	139.0	30.6

Notes:


¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

⁴ Limits converted to dBµV/m and an inverse proportionality factor of 20 dB per decade has been used to normalize the specification limit to a measurement distance of 3 meters to determine compliance.

Full Spectrum

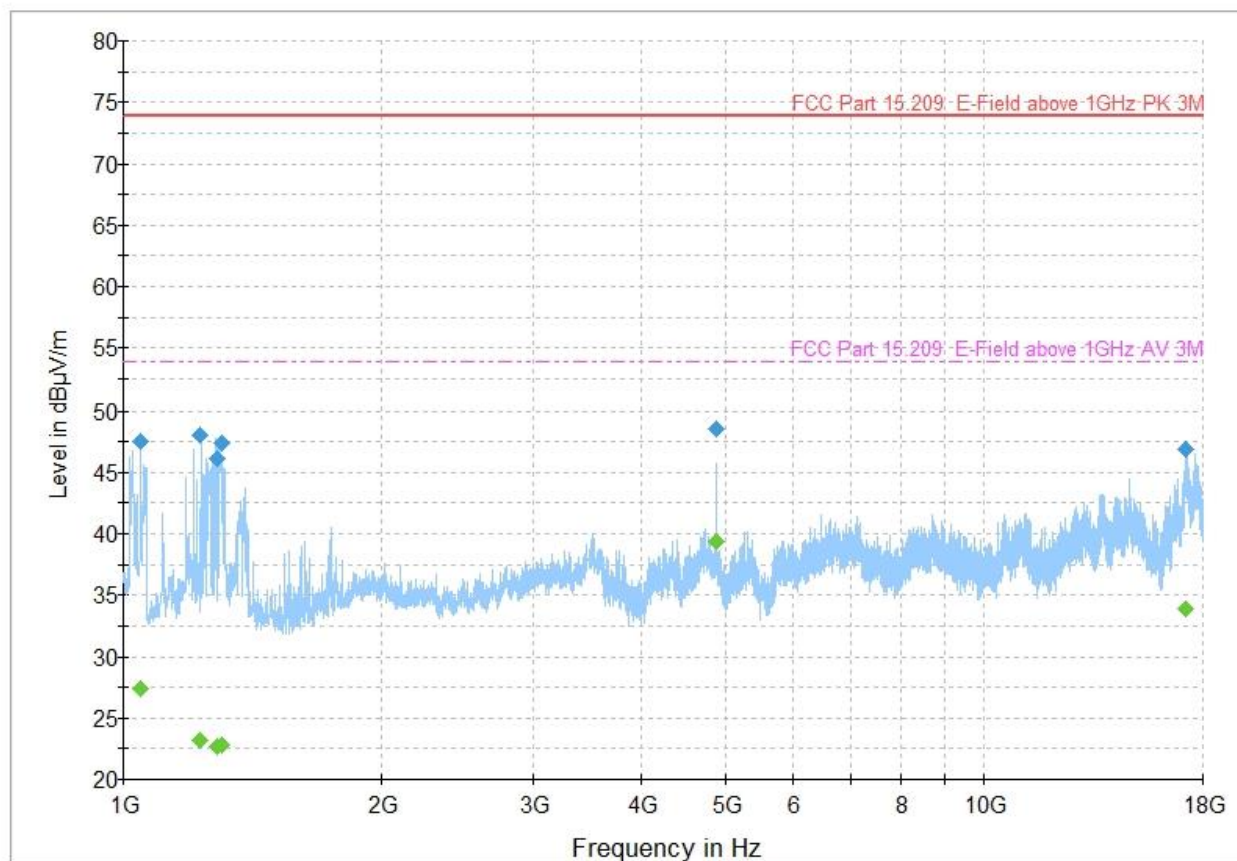

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-7: Radiated emissions, middle channel, 1 – 18 GHz spectral plot

Table 8.6-8: Radiated emissions, middle channel, 1 – 18 GHz (Quasi-Peak) results


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1048.677778	47.48	---	73.90	26.42	1000.0	1000.000	273.0	H	43.0	-15.3
1048.677778	---	27.34	53.90	26.56	1000.0	1000.000	273.0	H	43.0	-15.3
1230.222222	---	23.21	53.90	30.69	1000.0	1000.000	137.0	V	121.0	-13.8
1230.222222	47.99	---	73.90	25.91	1000.0	1000.000	137.0	V	121.0	-13.8
1287.733333	46.14	---	73.90	27.76	1000.0	1000.000	201.0	V	322.0	-14.2
1287.733333	---	22.73	53.90	31.17	1000.0	1000.000	201.0	V	322.0	-14.2
1300.522222	47.37	---	73.90	26.53	1000.0	1000.000	102.0	V	131.0	-14.2
1300.522222	---	22.86	53.90	31.04	1000.0	1000.000	102.0	V	131.0	-14.2
4880.577778	48.53	---	73.90	25.37	1000.0	1000.000	160.0	V	10.0	-2.0
4880.577778	---	39.33	53.90	14.57	1000.0	1000.000	160.0	V	10.0	-2.0
17170.777778	---	33.88	53.90	20.02	1000.0	1000.000	348.0	H	213.0	14.5
17170.777778	46.88	---	73.90	27.02	1000.0	1000.000	348.0	H	213.0	14.5

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB) - pre amp (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

Full Spectrum

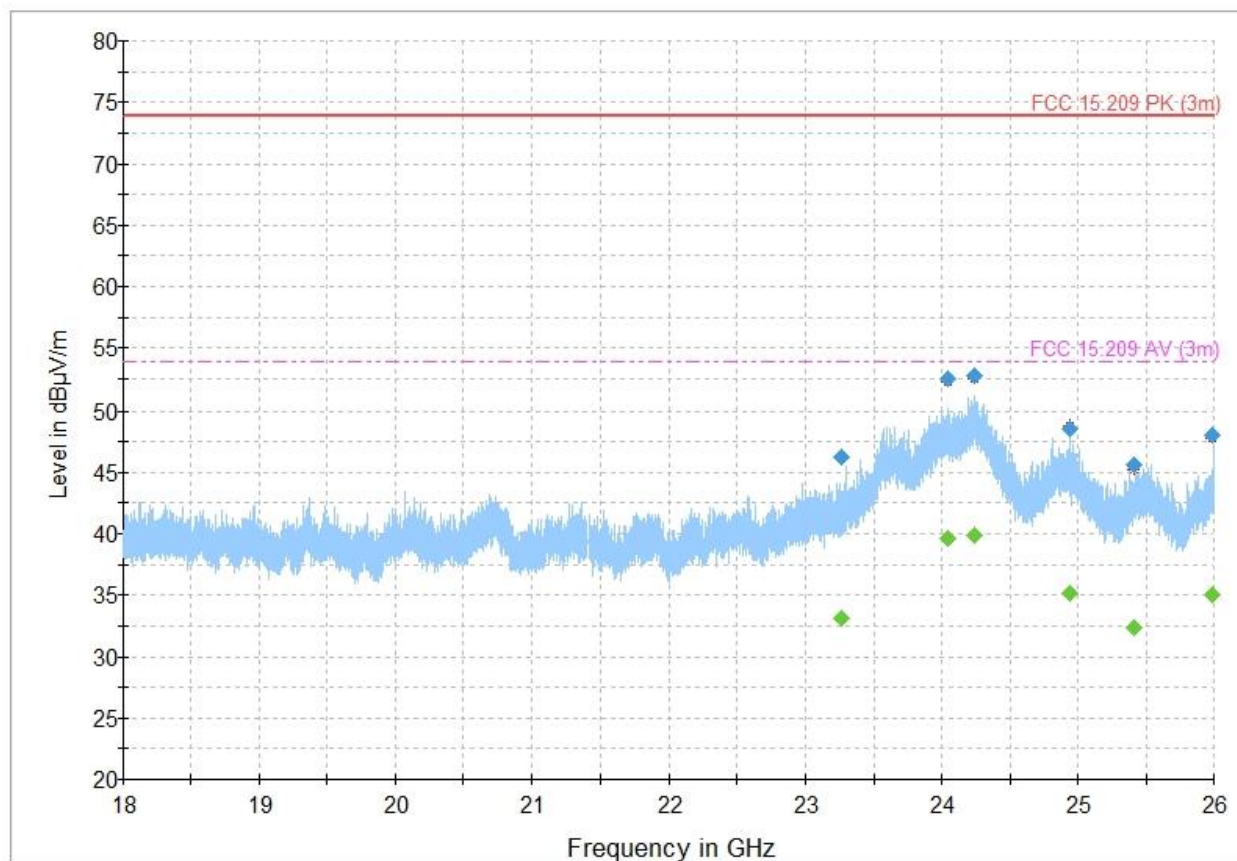

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-8: Radiated emissions, middle channel, 18 – 26 GHz spectral plot

Table 8.6-9: Radiated emissions, middle channel, 18 – 26 GHz (Peak and Average) results


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
23261.833333	46.30	---	73.90	27.60	5000.0	1000.000	389.0	V	20.0	22.6
23261.833333	---	33.09	53.90	20.81	5000.0	1000.000	389.0	V	20.0	22.6
24047.566667	---	39.57	53.90	14.33	5000.0	1000.000	128.0	V	144.0	29.7
24047.566667	52.44	---	73.90	21.46	5000.0	1000.000	128.0	V	144.0	29.7
24245.766667	---	39.81	53.90	14.09	5000.0	1000.000	374.0	V	307.0	29.0
24245.766667	52.76	---	73.90	21.14	5000.0	1000.000	374.0	V	307.0	29.0
24937.833333	---	35.14	53.90	18.76	5000.0	1000.000	240.0	H	11.0	24.7
24937.833333	48.51	---	73.90	25.39	5000.0	1000.000	240.0	H	11.0	24.7
25416.900000	---	32.39	53.90	21.51	5000.0	1000.000	166.0	H	32.0	23.8
25416.900000	45.57	---	73.90	28.33	5000.0	1000.000	166.0	H	32.0	23.8
25993.300000	48.05	---	73.90	25.85	5000.0	1000.000	387.0	V	281.0	25.4
25993.300000	---	35.09	53.90	18.81	5000.0	1000.000	387.0	V	281.0	25.4

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB) - pre amp (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

Full Spectrum

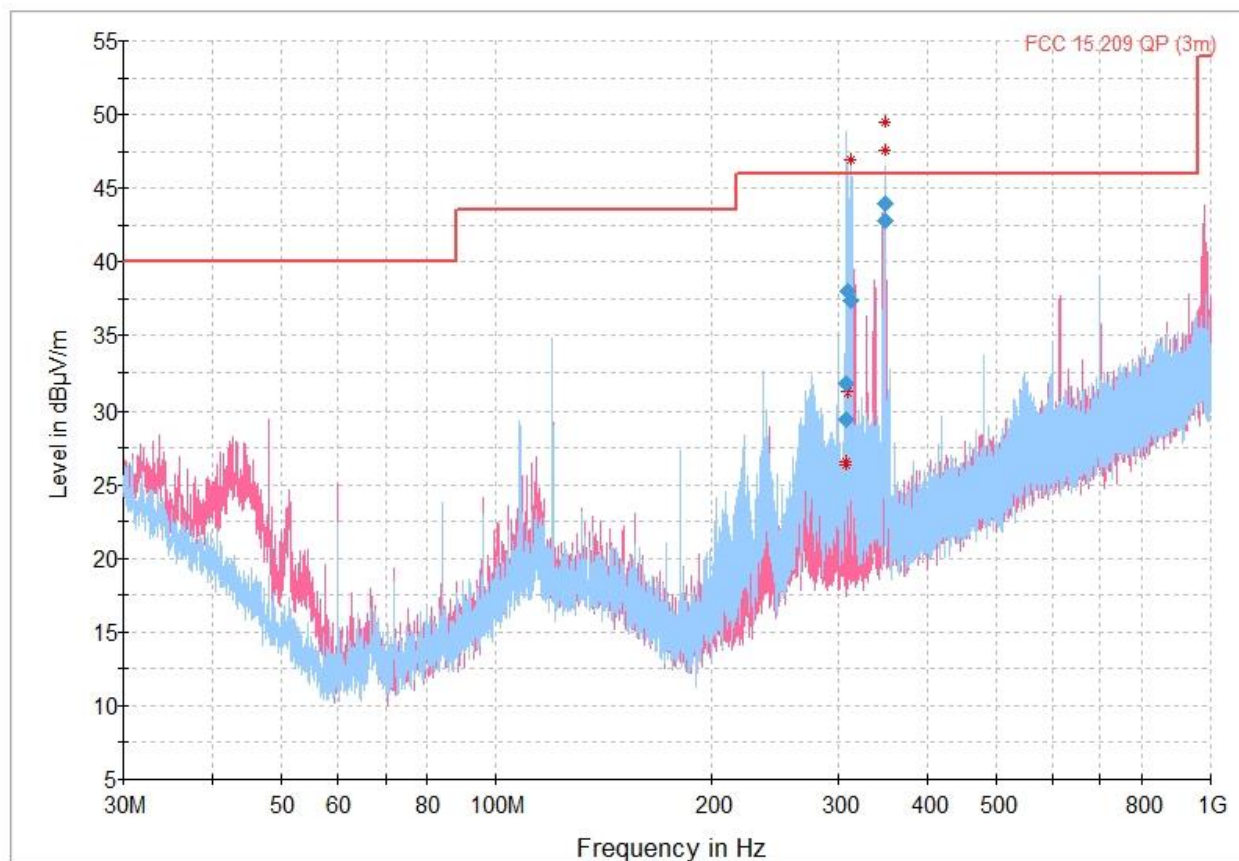

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-9: Radiated emissions, high channel, 30 – 1000 MHz spectral plot

Table 8.6-10: Radiated emissions, high channel, 30 – 1000 MHz (Quasi-Peak) results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
308.229667	29.40	46.00	16.60	5000.0	120.000	237.0	H	349.0	22.1
308.322333	31.73	46.00	14.27	5000.0	120.000	362.0	H	181.0	22.1
309.359667	37.97	46.00	8.03	5000.0	120.000	100.0	H	191.0	22.1
312.248333	37.43	46.00	8.57	5000.0	120.000	148.0	H	304.0	22.2
349.612000	42.81	46.00	3.19	5000.0	120.000	112.0	H	54.0	23.7
350.206000	43.95	46.00	2.05	5000.0	120.000	100.0	H	243.0	23.7

Notes:


¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

⁴ Limits converted to dBµV/m and an inverse proportionality factor of 20 dB per decade has been used to normalize the specification limit to a measurement distance of 3 meters to determine compliance.

Full Spectrum

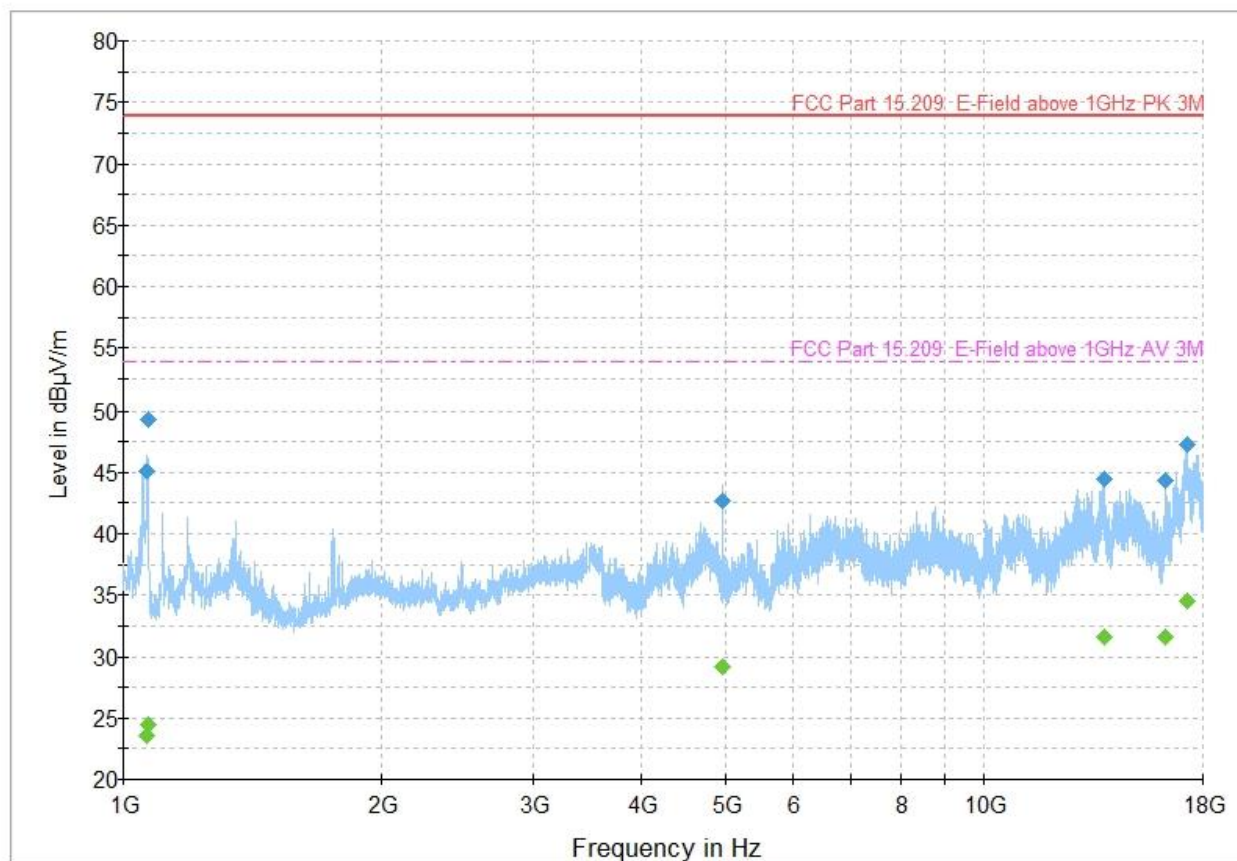

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-10: Radiated emissions, high channel, 1 – 18 GHz spectral plot

Table 8.6-11: Radiated emissions, high channel, 1 – 18 GHz (Quasi-Peak) results


Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1064.922222	45.16	---	73.90	28.74	1000.0	1000.000	224.0	H	42.0	-15.1
1064.922222	---	23.51	53.90	30.39	1000.0	1000.000	224.0	H	42.0	-15.1
1067.455556	49.32	---	73.90	24.58	1000.0	1000.000	194.0	V	133.0	-15.1
1067.455556	---	24.43	53.90	29.47	1000.0	1000.000	194.0	V	133.0	-15.1
4957.655556	42.62	---	73.90	31.28	1000.0	1000.000	378.0	H	251.0	-2.1
4957.655556	---	29.12	53.90	24.78	1000.0	1000.000	378.0	H	251.0	-2.1
13799.222222	44.40	---	73.90	29.50	1000.0	1000.000	263.0	H	20.0	10.7
13799.222222	---	31.53	53.90	22.37	1000.0	1000.000	263.0	H	20.0	10.7
16281.222222	44.29	---	73.90	29.61	1000.0	1000.000	238.0	V	0.0	13.3
16281.222222	---	31.58	53.90	22.32	1000.0	1000.000	238.0	V	0.0	13.3
17254.244444	47.27	---	73.90	26.63	1000.0	1000.000	370.0	V	174.0	14.6
17254.244444	---	34.47	53.90	19.43	1000.0	1000.000	370.0	V	174.0	14.6

Notes: ¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB) - pre amp (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

Full Spectrum

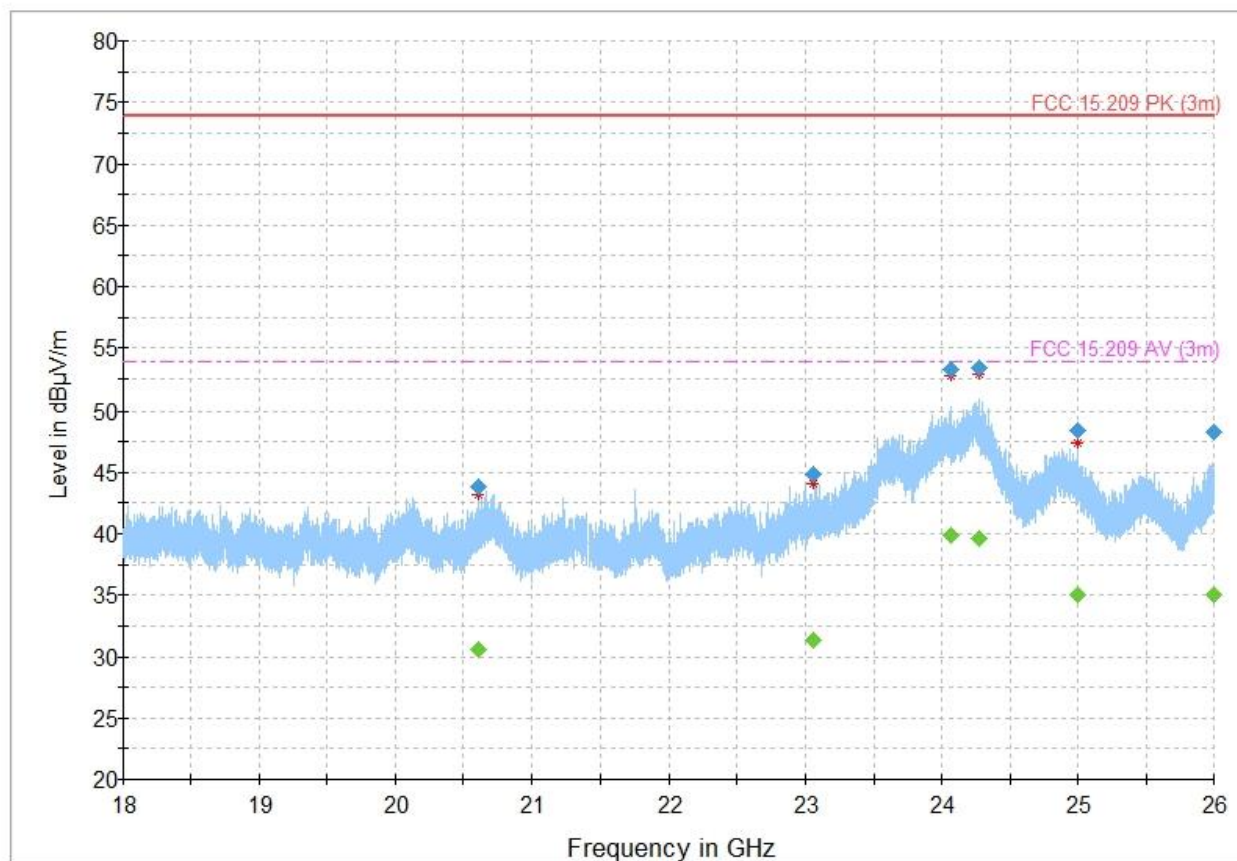

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.6-11: Radiated emissions, high channel, 18 – 26 GHz spectral plot

Table 8.6-12: Radiated emissions, high channel, 18 – 26 GHz (Peak and Average) results

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20608.233333	---	30.64	53.90	23.26	5000.0	1000.000	283.0	H	193.0	19.3
20608.233333	43.85	---	73.90	30.05	5000.0	1000.000	283.0	H	193.0	19.3
23062.900000	---	31.36	53.90	22.54	5000.0	1000.000	191.0	V	210.0	20.8
23062.900000	44.87	---	73.90	29.03	5000.0	1000.000	191.0	V	210.0	20.8
24064.100000	---	39.90	53.90	14.00	5000.0	1000.000	266.0	V	0.0	29.7
24064.100000	53.19	---	73.90	20.71	5000.0	1000.000	266.0	V	0.0	29.7
24275.966667	---	39.63	53.90	14.27	5000.0	1000.000	195.0	H	0.0	28.7
24275.966667	53.37	---	73.90	20.53	5000.0	1000.000	195.0	H	0.0	28.7
25000.833333	---	34.99	53.90	18.91	5000.0	1000.000	342.0	H	248.0	24.7
25000.833333	48.46	---	73.90	25.44	5000.0	1000.000	342.0	H	248.0	24.7
25999.233333	---	35.03	53.90	18.87	5000.0	1000.000	272.0	H	11.0	25.4
25999.233333	48.24	---	73.90	25.66	5000.0	1000.000	272.0	H	11.0	25.4

Notes:

¹ Field strength (dBµV/m) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)

² Correction factor = antenna factor ACF (dB) + cable loss (dB) - pre amp (dB)

³ The maximum measured value observed over a period of 5 seconds was recorded.

8.7 FCC 15.247(e) and RSS-247 5.2(b) Power spectral density of digital transmission system

8.7.1 References

Title 47 → Chapter I → Subchapter A → Part 15 → Subpart C → §15.247(e) / ANSI C63.10: 2013

- (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this Section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247 → §5.2(b)

- (a) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

8.7.2 Test summary

Verdict	Pass		
Test date	April 6, 2021	Temperature	22 °C
Test engineer	David Hewitt, EMC Specialist	Air pressure	1006 mbar
Test location	Wireless bench	Relative humidity	48 %

8.7.3 Notes

Testing was performed with the BLE transmitter operating on a fixed channel at client-specified full power. Low, middle, and high channels were tested.

The EUT antenna port was connected to the spectrum analyzer via low loss cable and a suitable attenuator. The loss of this assembly was corrected for via a transducer factor in the spectrum analyzer.

8.7.4 Setup details

EUT setup configuration	Table top
Test facility	Nemko San Diego
Measurement details	Measurement performed as per C63.10 §11.10.3 (Method AVGPSPD-1)


Receiver/spectrum analyzer settings:

Resolution bandwidth	3 kHz
Video bandwidth	10 kHz ($\geq 3 \times \text{RBW}$)
Frequency span	$\geq 1.5 \times \text{DTS bandwidth}$
Detector mode	RMS
Trace mode	Averaging
Averaging sweeps	100

8.7.5 Test data

Table 8.7-1: Power spectral density of DTS

Transmitter Frequency (MHz)	Measured Level (dBm/3 kHz)	Limit (dBm/3 kHz)
2402	-18.04	8.00
2440	-18.49	8.00
2480	-18.24	8.00

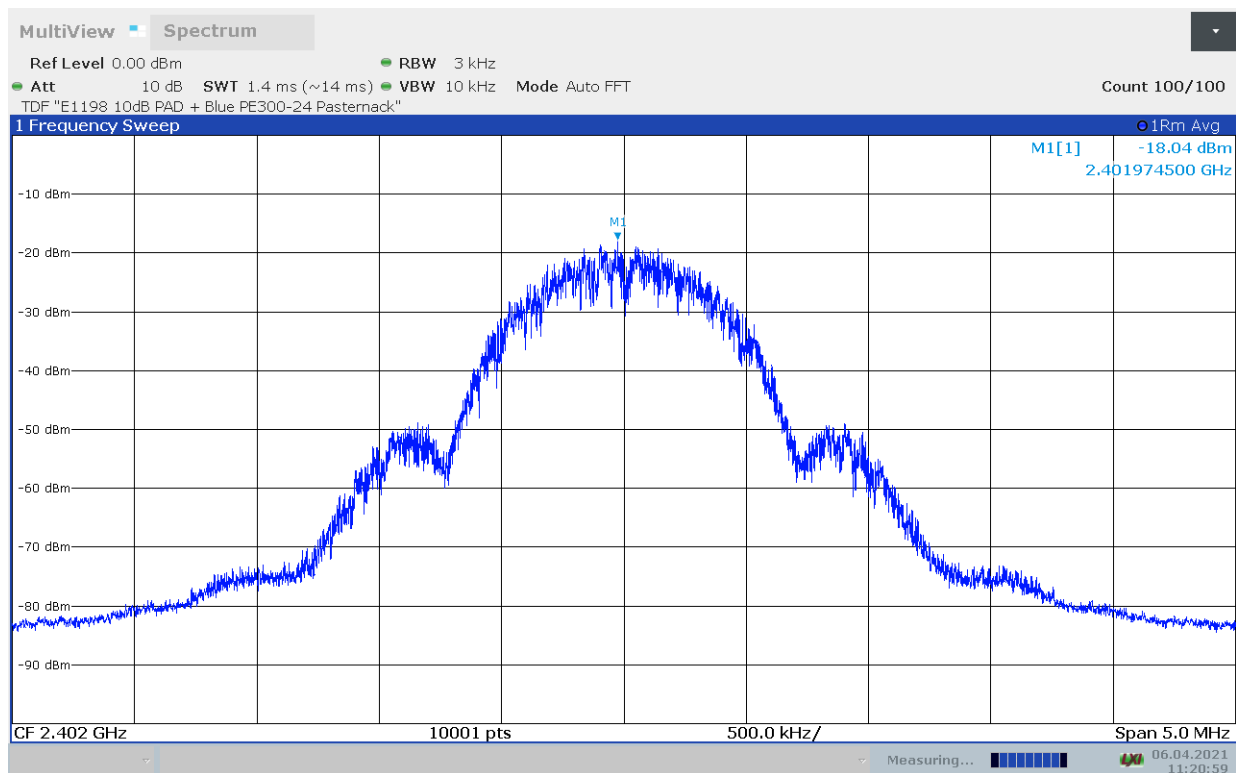**Figure 8.7-1:** Power spectral density of digital transmission system, 2402 MHz

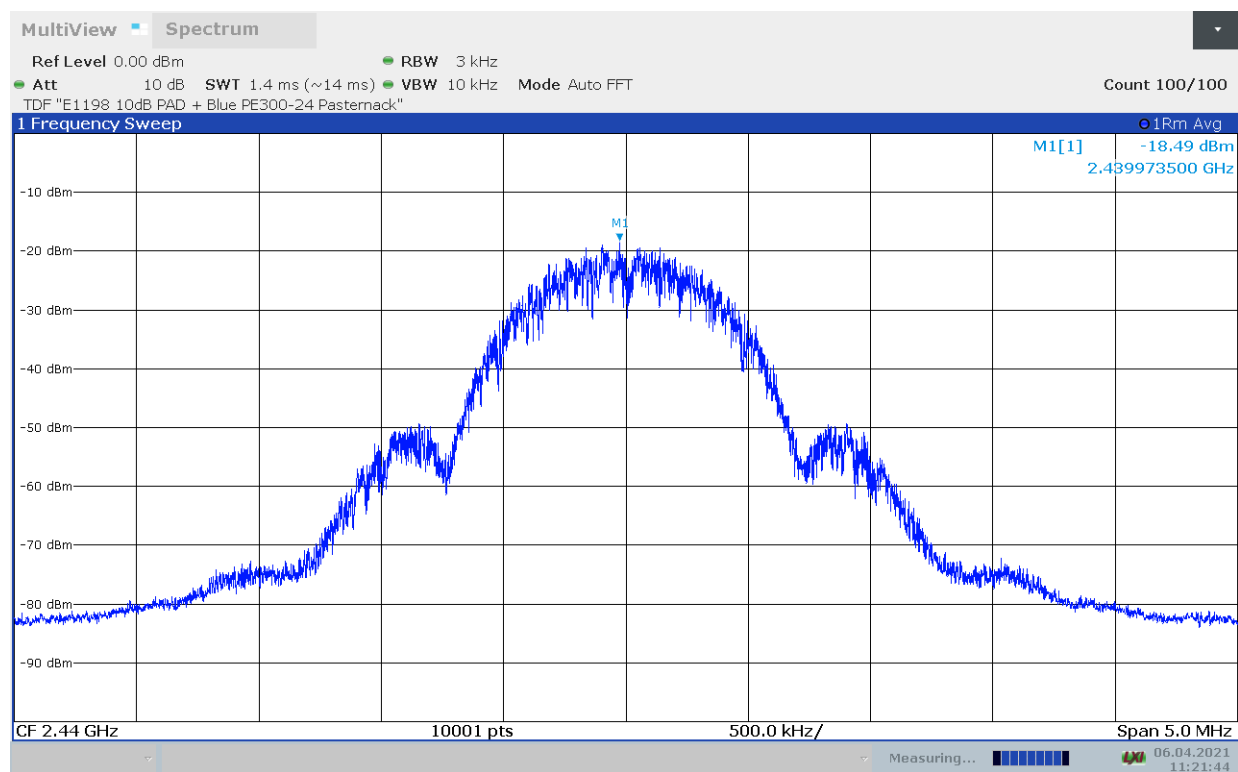


Figure 8.7-2: Power spectral density of digital transmission system, 2440 MHz

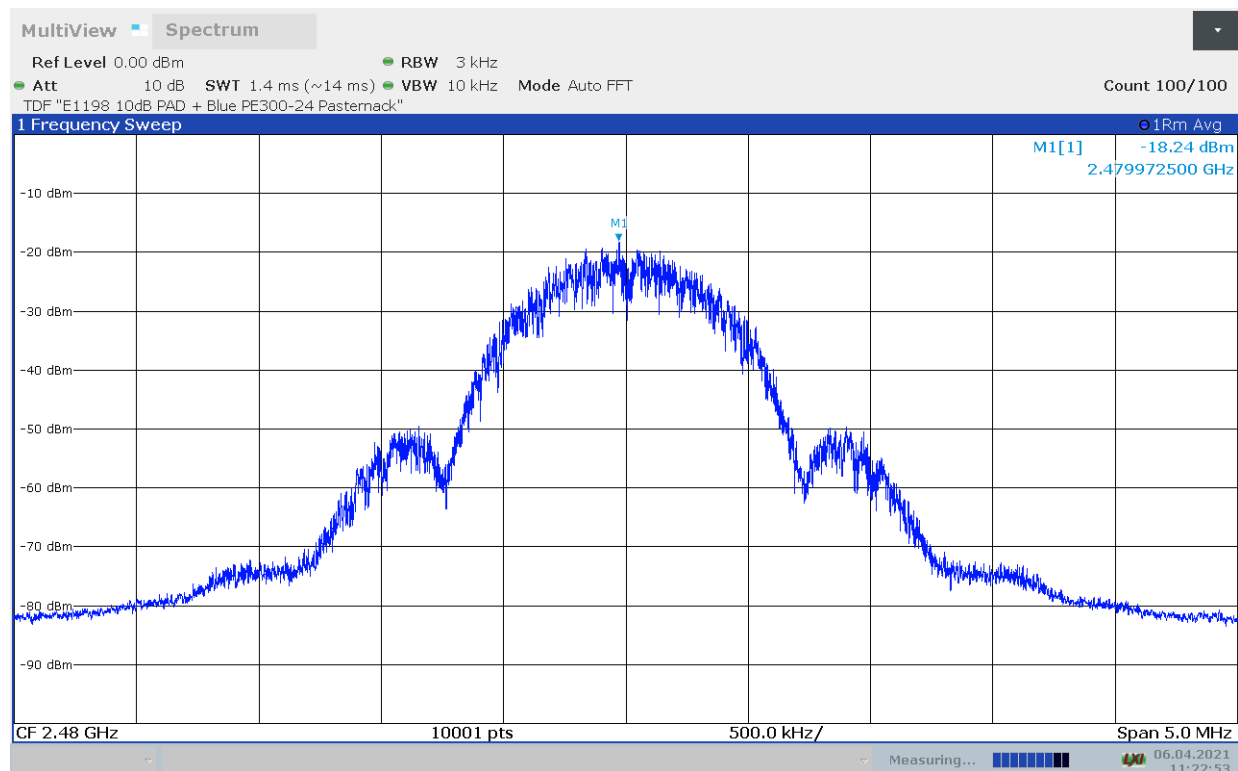


Figure 8.7-3: Power spectral density of digital transmission system, 2480 MHz

8.8 RSS-GEN 6.7 Occupied bandwidth (or 99% emission bandwidth)

8.8.1 References

RSS-Gen → §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

8.8.2 Test summary

Test date	April 5, 2021	Temperature	23 °C
Test engineer	David Hewitt, EMC Specialist	Air pressure	1005 mbar
Test location	Wireless bench	Relative humidity	53 %

8.8.3 Notes

Testing was performed with the BLE transmitter operating on a fixed channel at client-specified full power. Low, middle, and high channels were tested.

The EUT antenna port was connected to the spectrum analyzer via low loss cable and a suitable attenuator. The loss of this assembly was corrected for via a transducer factor in the spectrum analyzer.

8.8.4 Setup details

EUT setup configuration	Tabletop
Test facility	Nemko San Diego
Measurement details	Measurement performed as per C63.10 §6.9.3 using the built-in function of the spectrum analyzer

Receiver/spectrum analyzer settings:

Resolution bandwidth	50 kHz
Video bandwidth	200 kHz
Detector mode	Peak
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.8.5 Test data

Table 8.8-1: 99% Occupied bandwidth

Test Frequency (MHz)	M1 (MHz)	T1 (MHz)	T2 (MHz)	99%Bandwidth (MHz)
2402 (Low channel)	2.4022298	2.40147384	2.40251175	1.037907264
2440 (Mid channel)	2.439979	2.43947368	2.44051007	1.036387894
2480 (High channel)	2.479979	2.47947276	2.4805088	1.036049057

8.8.5 Test data, continued

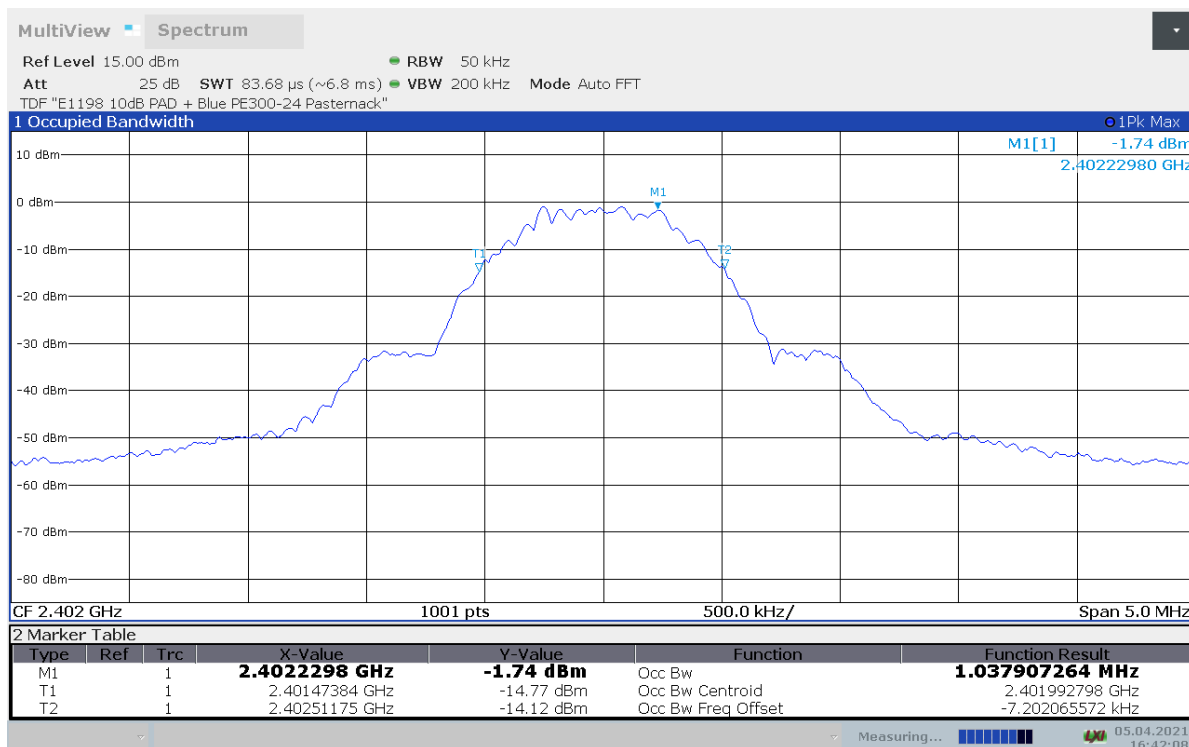


Figure 8.8-1: 99% bandwidth, 2402 MHz



Figure 8.8-2: 99% bandwidth, 2440 MHz

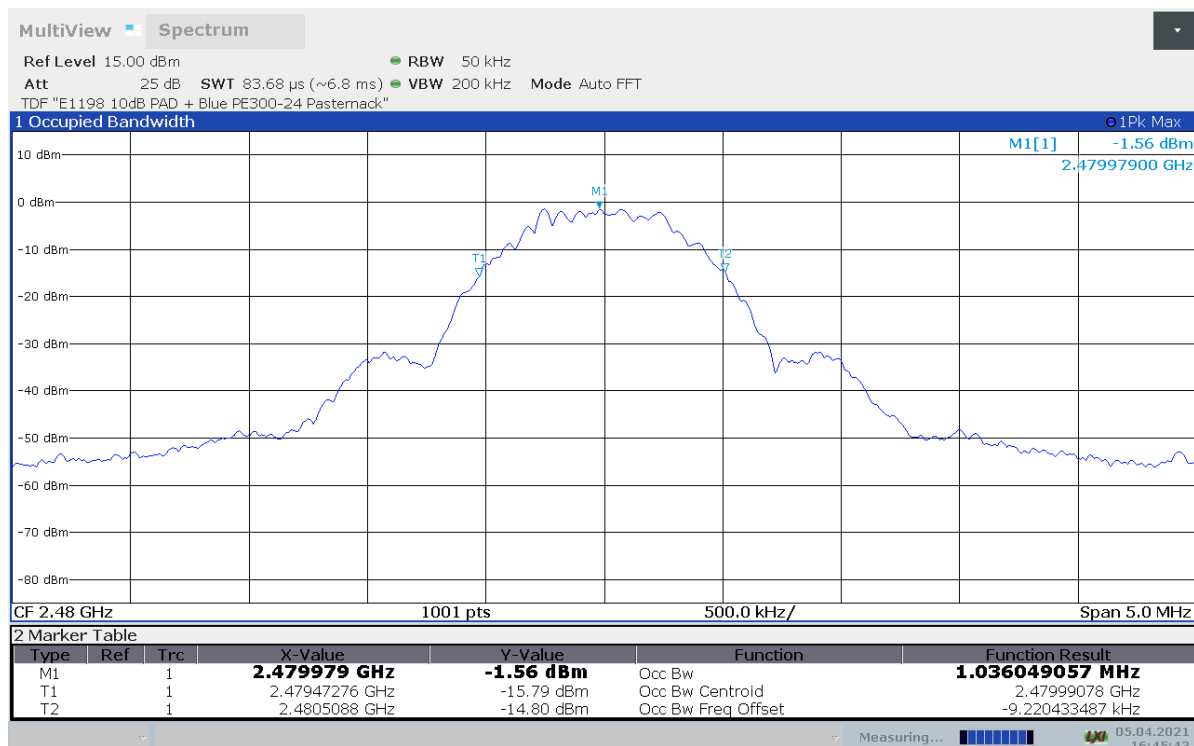


Figure 8.8-3: 99% bandwidth, 2480 MHz

Section 9 Block diagrams of test set-ups

9.1 Radiated emissions set-up

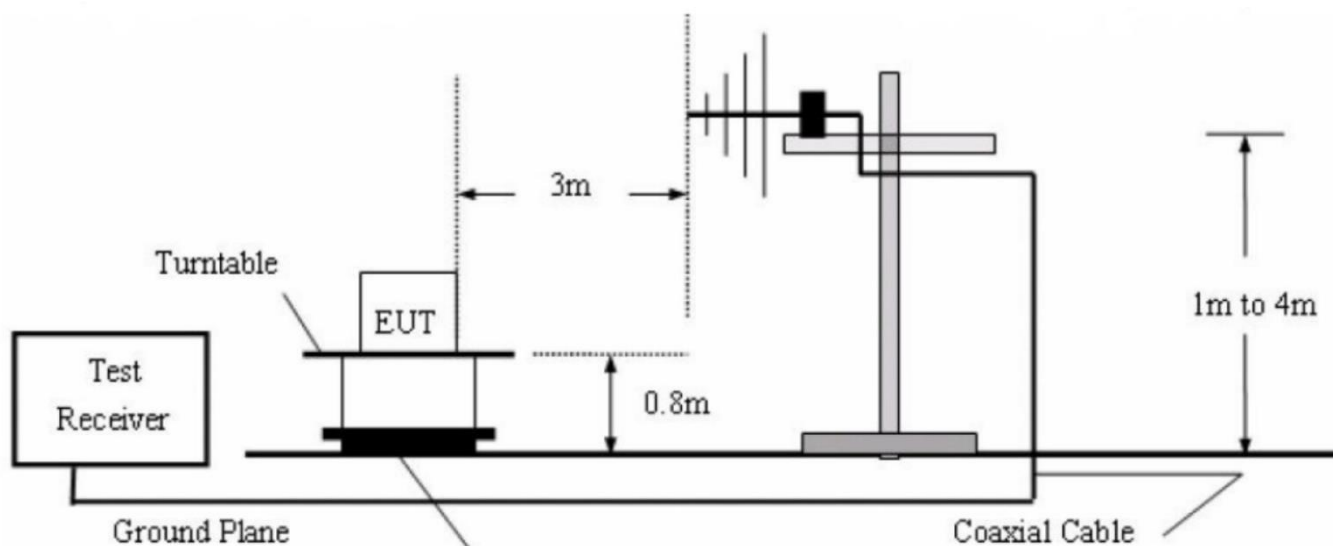


Figure 9.1-1: 30 MHz - 1000 MHz Setup

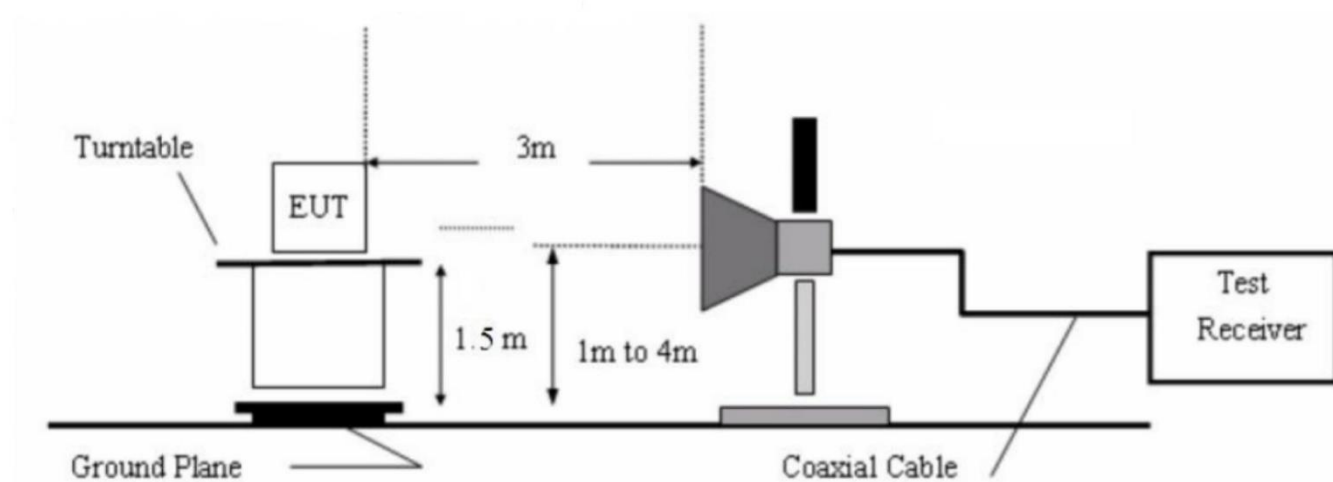


Figure 9.1-2: 1 GHz - 26 GHz Setup

9.2 Conducted emissions set-up

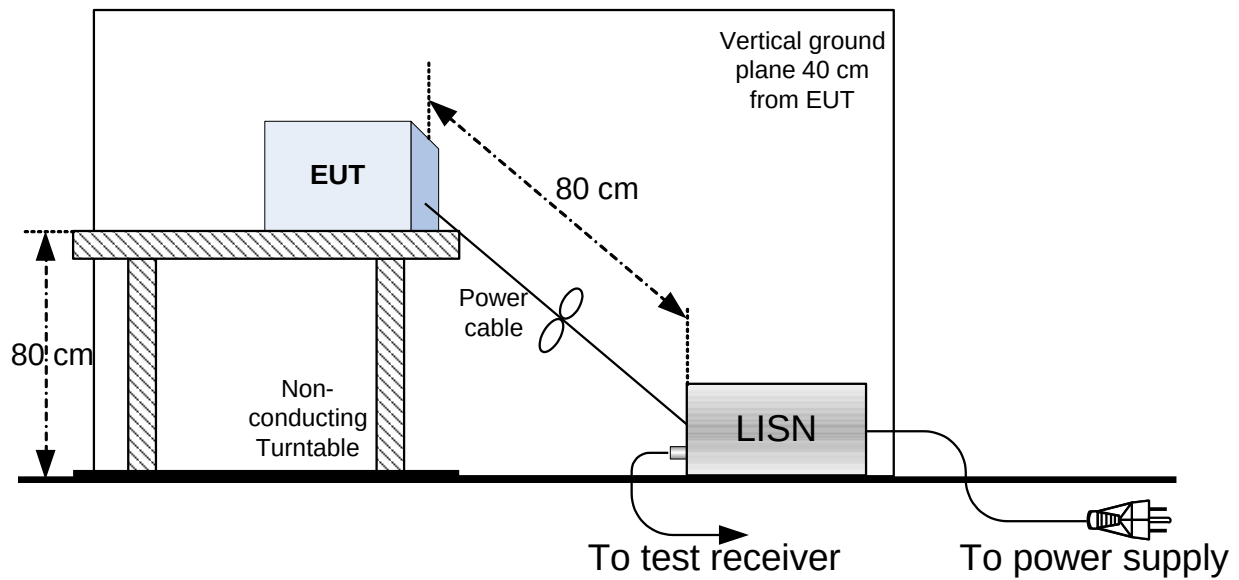


Figure 9.2-1: 150 kHz to 30 MHz Conducted Emissions Setup