

Bestway (Hong Kong) International Ltd.

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISSED RSS-247 RF report

Model:

S400204, S400205

Report Number:

2405B1801SHA-001

Issue Date:

June 6, 2024

Document Control Number:

TTRF15.247-03_V1 © 2018 Intertek



Applicant: Bestway (Hong Kong) International Ltd.
SUITE 713, 7/FLOOR, EAST WING, TSIM SHA TSUI CENTRE, 66 MODY
ROAD, KOWLOON, HONG KONG

Manufacturer: Bestway Inflatables & Material Corp.
No. 208 Jin Yuan Wu Road, Shanghai, 201812, China

Manufacturing site: Bestway (Nantong) Recreation Corp.
No. 8, West Huimin Road, Rugao Economic and Technology
Development Zone, Jiangsu, 226503, China

FCC ID: 2AS3R-400205R

IC: 26017-400204R

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of
Unlicensed Wireless Devices


RSS-247 Issue 3 (August 2023): Digital Transmission Systems (DTSs), Frequency Hopping
Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (February 2021) Amendment 2: General Requirements for Compliance of
Radio Apparatus

PREPARED BY:

REVIEWED BY:

Scout Gong
Project Engineer


Eric Li
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	8
1.3 ANTENNA INFORMATION	8
1.4 DESCRIPTION OF TEST FACILITY	9
2 TEST SPECIFICATIONS	10
2.1 STANDARDS OR SPECIFICATION	10
2.2 MODE OF OPERATION DURING THE TEST	10
2.3 TEST SOFTWARE LIST	11
2.4 TEST PERIPHERALS LIST	11
2.5 TEST ENVIRONMENT CONDITION:	11
2.6 INSTRUMENT LIST	12
2.7 MEASUREMENT UNCERTAINTY	13
3 MINIMUM 6DB BANDWIDTH	14
3.1 LIMIT	14
3.2 MEASUREMENT PROCEDURE	14
3.3 TEST CONFIGURATION	14
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH	14
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.	15
4.1 LIMIT	15
4.2 MEASUREMENT PROCEDURE	15
4.3 TEST CONFIGURATION	16
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	16
5 POWER SPECTRUM DENSITY	17
5.1 LIMIT	17
5.2 MEASUREMENT PROCEDURE	17
5.3 TEST CONFIGURATION	18
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY	18
6 EMISSION OUTSIDE THE FREQUENCY BAND	19
6.1 LIMIT	19
6.2 MEASUREMENT PROCEDURE	19
6.3 TEST CONFIGURATION	20
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND	20
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS	21
7.1 LIMIT	21
7.2 MEASUREMENT PROCEDURE	21
7.3 TEST CONFIGURATION	23
7.4 TEST RESULTS OF RADIATED EMISSIONS	25
8 POWER LINE CONDUCTED EMISSION	31
8.1 LIMIT	31
8.2 TEST CONFIGURATION	31
8.3 MEASUREMENT PROCEDURE	32

TEST REPORT

8.4	TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	33
9	OCCUPIED BANDWIDTH	35
9.1	LIMIT	35
9.2	MEASUREMENT PROCEDURE	35
9.3	TEST CONFIGURATION	35
9.4	THE RESULTS OF OCCUPIED BANDWIDTH.....	35
10	ANTENNA REQUIREMENT.....	36
11	APPENDIX A: TEST RESULTS	37
11.1	DTS BANDWIDTH.....	37
11.1.1	Test Data	37
11.1.2	Test Plots	37
11.2	OCCUPIED CHANNEL BANDWIDTH	41
11.2.1	Test Data	41
11.2.2	Test Plots	41
11.3	MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P	45
11.3.1	Test Data	45
11.3.2	Test Plots	45
11.4	MAXIMUM POWER SPECTRUM DENSITY	49
11.4.1	Test Data	49
11.4.2	Test Plots	49
11.5	BAND EDGE MEASUREMENTS	53
11.5.1	Test Data	53
11.5.2	Test Plots	53
11.6	CONDUCTED SPURIOUS EMISSION	56
11.6.1	Test Data	56
11.6.2	Test Plots	57
11.7	DUTY CYCLE	66
11.7.1	Test Data	66
11.7.2	Test Plots	66

Revision History

Report No.	Version	Description	Issued Date
2405B1801SHA-001	Rev. 01	Initial issue of report	June 6, 2024

Measurement Result Summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 3 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 3 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 3 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 3 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes:

1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3. Additions, Deviations and Exclusions from Standards: None.

1 General Information

1.1 Description of Equipment Under Test (EUT)

Product name:	Electric Spas
Type/Model/PMN:	S400204, S400205
HVIN:	26017-400204R
Description of EUT:	EUT is a wireless Electric Spas with BLE and Wi-Fi module. The two modules are the same product except the model's name due to the different sales regions.
Rating:	110-120 VAC, 60Hz, 12A
Category of EUT:	Class B
Brand name:	Bestway
EUT type:	☐ Tabletop ☒ Floor standing
Software Version:	-
Hardware Version:	-
Sample Identification No.:	0240330-18-002
Sample received date:	March 30, 2024
Date of test:	March 30, 2024, to June 5, 2024

TEST REPORT

1.2 Technical Specification

Frequency Band:	2400MHz ~ 2483.5MHz
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20)
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n(HT20): OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Operating Frequency:	2412MHz to 2462MHz for IEEE 802.11b/g/n(HT20)
Channel Number:	11 Channels for 802.11b, 802.11g and 802.11n(HT20)
Channel Separation:	5 MHz

1.3 Antenna Information

No.	Antenna Type	Gain	Note
1	PCB antenna	2 dBi	Internal type

Mode	Tx/Rx Function	Beamforming function	CDD function	Directional gain (dBi)
802.11b	1Tx/1Rx	NO	NO	-
802.11g	1Tx/1Rx	NO	NO	-
802.11n(HT20)	1Tx/1Rx	NO	NO	-

1.4 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

2 Test Specifications

2.1 Standards or Specification

47CFR Part 15 (2023)

ANSI C63.10 (2020)

KDB 558074 (v05r02)

RSS-247 Issue 3 (August 2023)

RSS-Gen Issue 5 (February 2021) Amendment 2

2.2 Mode of Operation During the Test

While testing transmitting mode of EUT, the internal modulation and continuous transmission was applied.

Software name	Manufacturer	Version	Supplied by
UI_mptool	-	1V16	Client

The lowest, middle and highest channels were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n(HT20)	2412	2437	2462

Data rate and Power setting:

The pre-scan for the conducted power with all rates in each modulation and band was used, and the worst case was found and used in all test cases. After this pre-scan, we choose the following table of the data rate as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate	Power Setting
2400-2483.5	802.11b	1Mbps	Default
	802.11g	6Mbps	Default
	802.11n(HT20)	MCS0	Default

The EUT will use two types of antennas, and there have the following test mode:

Radiated test mode:

Mode 1: EUT transmitted signal with internal antenna.

Conducted test mode:

Mode 2: EUT transmitted signal from PCBA RF port connected to SPA directly.

We have verified all test modes, and list all the results in this report.

2.3 Test Software List

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71
Conducted emission	SKET Auto EMC Test Software	Keleto	V3.0
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

2.4 Test Peripherals List

Item No.	Name	Brand and Model	Description
1	Laptop computer	DELL 5480	100-240V AC, 50/60Hz

2.5 Test Environment Condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	20°C	50%RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	21°C	52%RH
Power line conducted emission	21°C	52%RH

TEST REPORT

2.6 Instrument List

Conducted Emission						
Used	Equipment	Manufacturer	Type	Internal no.	Calibration date	Due date
☒	Test Receiver	R&S	ESR7	EC 6194	2024-02-08	2025-02-07
☒	A.M.N.	R&S	ESH2-Z5	EC 3119	2023-11-20	2024-11-19
☒	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2023-12-08	2024-12-07
☒	Shielded room	Zhongyu	-	EC 2838	2024-01-11	2025-01-10
Radiated Emission						
Used	Equipment	Manufacturer	Type	Internal no.	Calibration date	Due date
☒	Test Receiver	R&S	ESIB 26	EC 3045	2023-08-23	2024-08-22
☒	Test Receiver	R&S	ESR	EC 6501	2023-09-25	2024-09-24
☒	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2023-09-13	2024-09-12
☒	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2023-12-08	2024-12-07
☒	Horn antenna	Tonscend	bha9120d	EC 6432-2	2024-02-15	2025-02-14
☒	Horn antenna	ETS	3117	EC 4792-1	2023-09-16	2024-09-15
☒	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2023-09-13	2024-09-12
☒	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC 5262	2023-09-25	2024-09-24
☒	Semi-anechoic chamber	Albatross project	-	EC 3048	2023-07-13	2024-07-12
RF test						
Used	Equipment	Manufacturer	Type	Internal no.	Calibration date	Due date
☒	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2024-03-08	2025-03-07
☒	Vector Signal Generator	Agilent	N5182B	EC 5175	2024-03-08	2025-03-07
☒	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2024-03-08	2025-03-07
☒	Test Receiver	R&S	ESCI 7	EC 4501	2024-03-08	2025-03-07
☒	Signal generator	Agilent	N5182A	EC 6172	2023-08-09	2024-08-08
☒	Signal generator	Agilent	N5181A	EC 6171	2023-08-09	2024-08-08
☒	Climate chamber	GWS	MT3065	EC 6021	2024-03-08	2025-03-07
Additional instrument						
Used	Equipment	Manufacturer	Type	Internal no.	Calibration date	Due date
☒	Thermo-Hygrograph	Testo	175h1	EC 6643	2023-08-29	2024-08-28
☒	Pressure meter	YM3	Shanghai Mengde	EC 3320	2023-08-17	2024-08-16

2.7 Measurement Uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Minimum 6dB bandwidth	
Powe spectrum density	
Emission outside the frequency band	
Occupied bandwidth	
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

3 Minimum 6dB Bandwidth

Test Result: Pass

3.1 Limit


For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

The EUT was tested according to Subclause 11.8 of ANSI C63.10.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

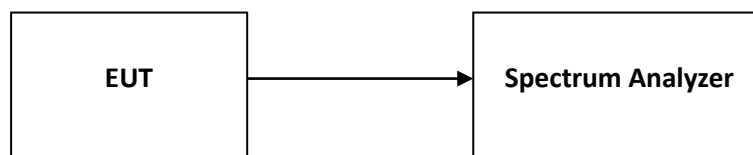

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A.

TEST REPORT

4 Maximum Conducted Output Power and e.i.r.p.

Test Result: Pass

4.1 Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)


If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The EUT was tested according to Subclause 11.9.2.2 of ANSI C63.10.

- a) Measure the duty cycle, x , of the transmitter output signal as described in Section 6.0.
- b) Set span to at least $1.5 \times \text{OBW}$.
- c) Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run”.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on- and off-times of the transmission). For example, add $10 \log (1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 %.

4.3 Test Configuration

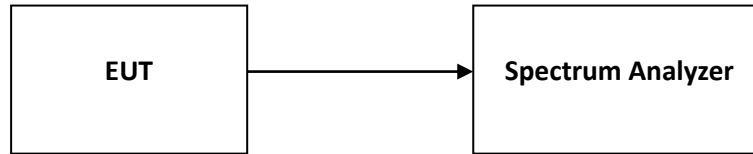

4.4 Test Results of Maximum Conducted Output Power

Please refer to Appendix A.

TEST REPORT

5 Power Spectrum Density

Test Result: Pass

5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.


If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and 8+ (6 –antenna gain-beam forming gain).

5.2 Measurement Procedure

The EUT was tested according to Subclause 11.10 of ANSI C63.10.

This procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., duty cycle < 98 %), and when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than ± 2 %):

- a) Measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least $1.5 \times \text{OBW}$.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq 3 \times \text{RBW}$.
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to “free run”.
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.
- m) If resultant value exceeds the limit, then reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

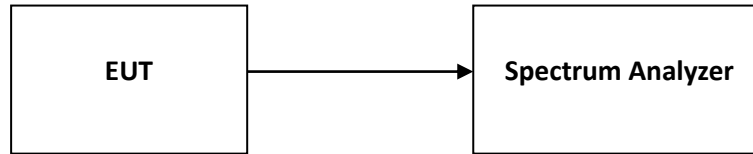TEST REPORT**5.3 Test Configuration****5.4 Test Results of Power Spectrum Density**

Please refer to Appendix A.

6 Emission Outside the Frequency Band

Test Result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

The EUT was tested according to Subclause 11.11 of ANSI C63.10.

Reference level measurement

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.3 Test Configuration

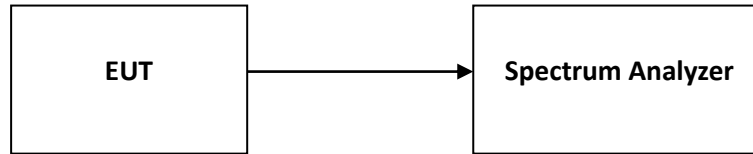

6.4 The Results of Emission Outside the Frequency Band

Please refer to Appendix A.

7 Radiated Emissions in Restricted Frequency Bands

Test Result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure

The EUT was tested according to Subclause 11.12 of ANSI C63.10.

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating turntable 0.1 meters above the ground in a 3-meter chamber room. The turntable was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating turntable 0.1 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3-meter chamber room for test. The turntable was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna varies from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

Note:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz, and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz, and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated, and the worst-case emissions are reported.

7.3 Test Configuration


For radiated emission below 30MHz:

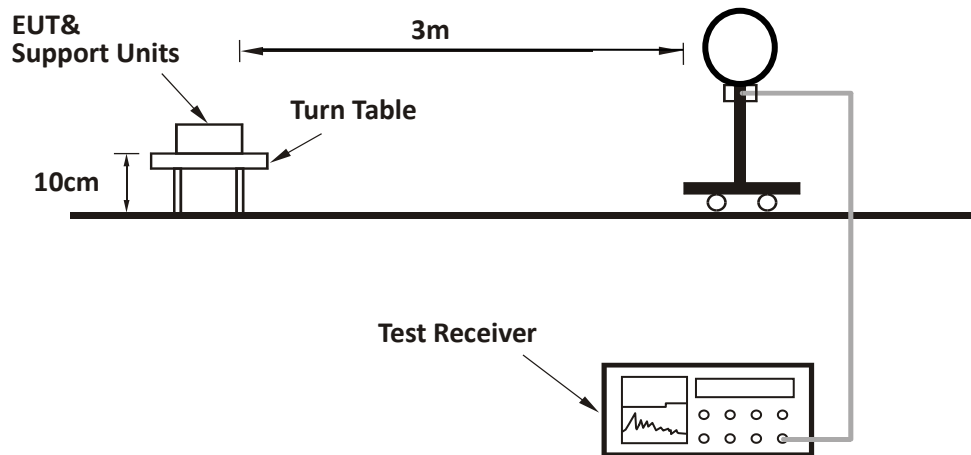

For radiated emission 30MHz to 1GHz:

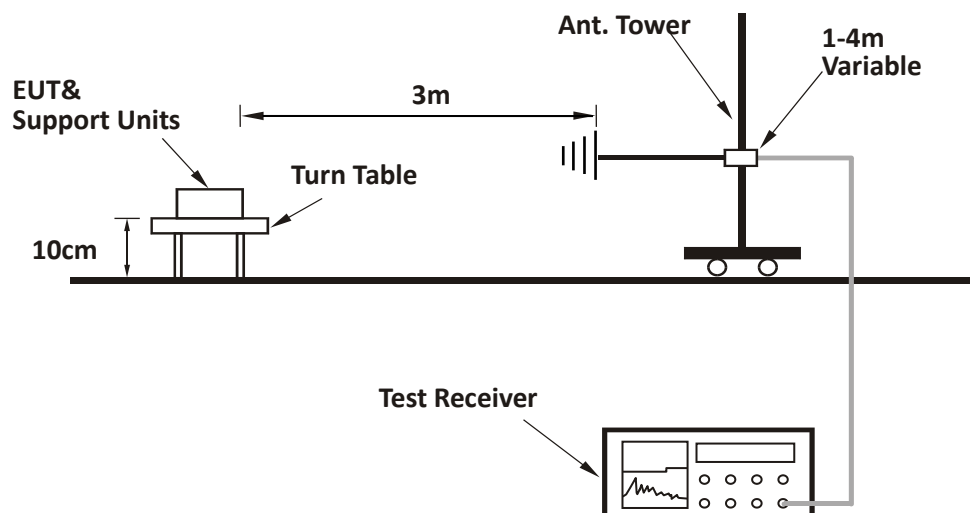

For radiated emission above 1GHz:

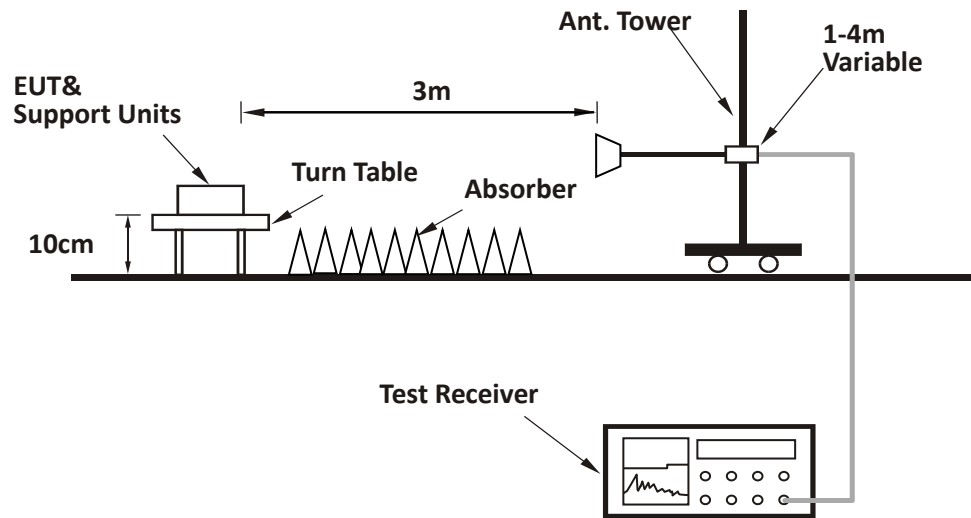



TEST REPORT

7.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

We test all models, and the worst waveform from 30MHz to 1000MHz is listed as below:

Test Curve (30MHz to 1GHz):

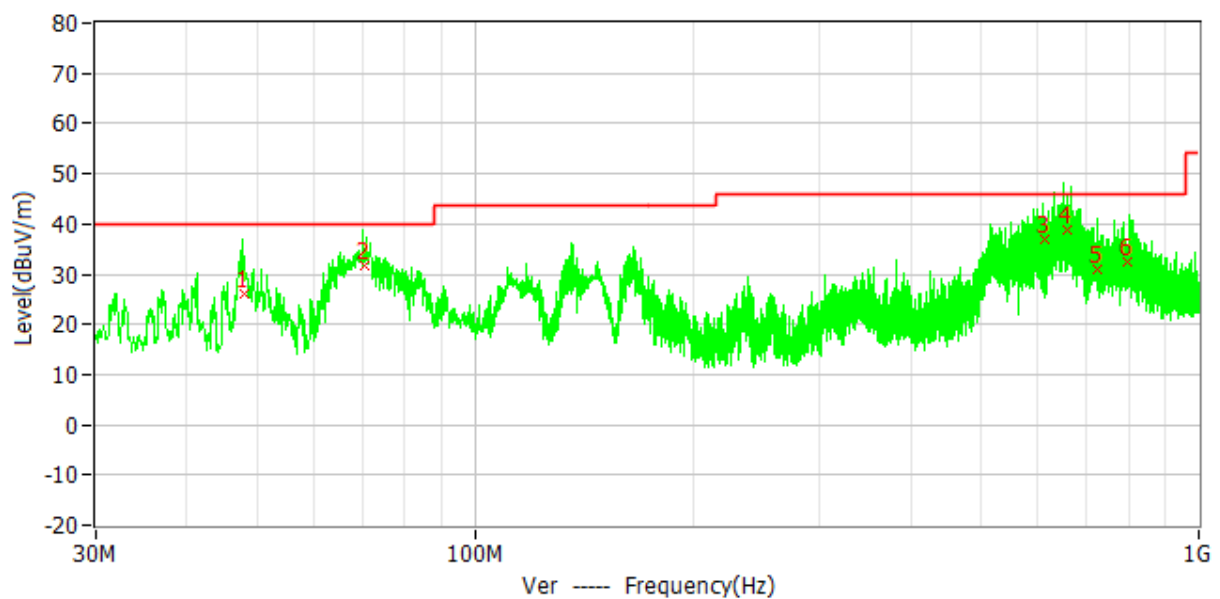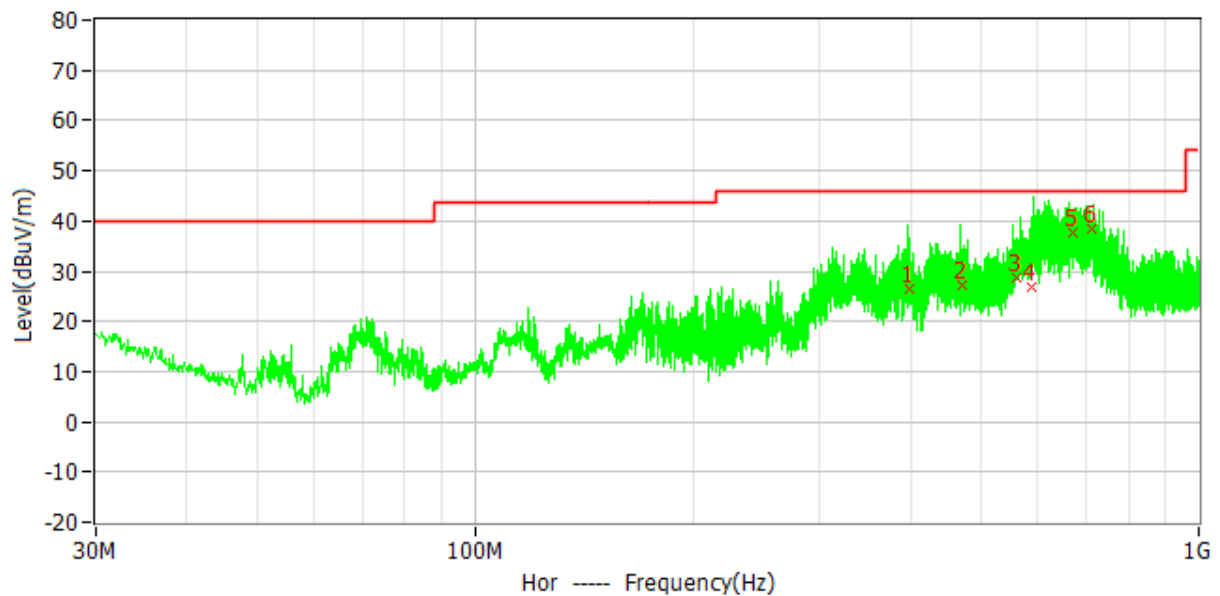

TEST REPORT

Test Data:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Original Receiver Reading dBuV	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB/m)	Detector
H	398.939	26.30	8.30	18.00	46.00	19.70	QP
	470.187	27.20	7.80	19.40	46.00	18.80	QP
	559.979	28.60	7.70	20.90	46.00	17.40	QP
	589.173	26.90	5.60	21.30	46.00	19.10	QP
	668.910	37.60	15.80	21.80	46.00	8.40	QP
	710.311	38.30	16.30	22.00	46.00	7.70	QP
V	48.193	26.20	16.00	10.20	40.00	13.80	QP
	70.632	31.50	24.10	7.40	40.00	8.50	QP
	611.118	36.80	15.30	21.50	46.00	9.20	QP
	656.594	38.80	17.10	21.70	46.00	7.20	QP
	722.569	30.80	8.70	22.10	46.00	15.20	QP
	795.926	32.50	9.80	22.70	46.00	13.50	QP

Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m.
Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m.
Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

TEST REPORT

Test Data:

The emission was conducted from 1GHz to 25GHz.

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dBuV/m)	Detector
L	H	2390.00	45.70	31.70	74.00	28.30	PK
	H	2390.00	35.20	31.70	54.00	18.80	AV
	V	2390.00	45.30	31.70	74.00	28.70	PK
	V	2390.00	35.40	31.70	54.00	18.60	AV
	H	2412.00	48.70	-22.60	Fundamental	/	PK
	H	2412.00	48.60	-22.60	Fundamental	/	AV
	V	2412.00	49.30	-22.60	Fundamental	/	PK
	V	2412.00	49.00	-22.60	Fundamental	/	AV
	H	4824.00	55.10	-14.10	74.00	18.90	PK
	H	4824.00	42.90	-14.10	54.00	11.10	AV
	V	4824.00	54.30	-14.10	74.00	19.70	PK
	V	4824.00	42.50	-14.10	54.00	11.50	AV
M	H	2437.00	48.80	-22.50	Fundamental	/	PK
	H	2437.00	48.60	-22.50	Fundamental	/	AV
	V	2437.00	48.80	-22.50	Fundamental	/	PK
	V	2437.00	48.70	-22.50	Fundamental	/	AV
	H	4874.00	53.40	-14.00	74.00	20.60	PK
	H	4874.00	43.90	-14.00	54.00	10.10	AV
	V	4874.00	53.50	-14.00	74.00	20.50	PK
	V	4874.00	42.50	-14.00	54.00	11.50	AV
H	H	2462.00	48.70	-22.20	Fundamental	/	PK
	H	2462.00	48.60	-22.20	Fundamental	/	AV
	V	2462.00	49.20	-22.20	Fundamental	/	PK
	V	2462.00	49.00	-22.20	Fundamental	/	AV
	H	2483.50	46.70	31.90	74.00	27.30	PK

TEST REPORT

	H	2483.50	36.30	31.90	54.00	17.70	AV
	V	2483.50	45.20	31.90	74.00	28.80	PK
	V	2483.50	35.20	31.90	54.00	18.80	AV
	H	4924.00	54.30	-13.80	74.00	19.70	PK
	H	4924.00	43.40	-13.80	54.00	10.60	AV
	V	4924.00	55.10	-13.80	74.00	18.90	PK
	V	4924.00	44.90	-13.80	54.00	9.10	AV

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dBuV/m)	Detector
L	H	2390.00	45.50	31.70	74.00	28.50	PK
	H	2390.00	36.30	31.70	54.00	17.70	AV
	V	2390.00	45.10	31.70	74.00	28.90	PK
	V	2390.00	35.30	31.70	54.00	18.70	AV
	H	2412.00	49.10	-22.60	Fundamental	/	PK
	H	2412.00	48.80	-22.60	Fundamental	/	AV
	V	2412.00	49.10	-22.60	Fundamental	/	PK
	V	2412.00	48.80	-22.60	Fundamental	/	AV
	H	4824.00	55.60	-14.10	74.00	18.40	PK
	H	4824.00	45.30	-14.10	54.00	8.70	AV
	V	4824.00	54.30	-14.10	74.00	19.70	PK
	V	4824.00	45.20	-14.10	54.00	8.80	AV
M	H	2437.00	48.70	-22.50	Fundamental	/	PK
	H	2437.00	48.60	-22.50	Fundamental	/	AV
	V	2437.00	49.30	-22.50	Fundamental	/	PK
	V	2437.00	49.10	-22.50	Fundamental	/	AV
	H	4874.00	52.80	-14.00	74.00	21.20	PK
	H	4874.00	43.30	-14.00	54.00	10.70	AV
	V	4874.00	53.70	-14.00	74.00	20.30	PK

TEST REPORT

	V	4874.00	43.80	-14.00	54.00	10.20	AV
H	H	2462.00	49.10	-22.20	Fundamental	/	PK
	H	2462.00	48.90	-22.20	Fundamental	/	AV
	V	2462.00	48.70	-22.20	Fundamental	/	PK
	V	2462.00	48.60	-22.20	Fundamental	/	AV
	H	2483.50	45.40	31.90	74.00	28.60	PK
	H	2483.50	36.70	31.90	54.00	17.30	AV
	V	2483.50	45.70	31.90	74.00	28.30	PK
	V	2483.50	35.50	31.90	54.00	18.50	AV
	H	4924.00	54.40	-13.80	74.00	19.60	PK
	H	4924.00	44.60	-13.80	54.00	9.40	AV
	V	4924.00	54.10	-13.80	74.00	19.90	PK
	V	4924.00	44.70	-13.80	54.00	9.30	AV

802.11n (HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dBuV/m)	Detector
L	H	2390.00	45.50	31.70	74.00	28.50	PK
	H	2390.00	36.60	31.70	54.00	17.40	AV
	V	2390.00	45.30	31.70	74.00	28.70	PK
	V	2390.00	36.90	31.70	54.00	17.10	AV
	H	2412.00	49.10	-22.60	Fundamental	/	PK
	H	2412.00	49.00	-22.60	Fundamental	/	AV
	V	2412.00	48.70	-22.60	Fundamental	/	PK
	V	2412.00	48.50	-22.60	Fundamental	/	AV
	H	4824.00	53.80	-14.10	74.00	20.20	PK
	H	4824.00	44.60	-14.10	54.00	9.40	AV
	V	4824.00	54.70	-14.10	74.00	19.30	PK
	V	4824.00	44.90	-14.10	54.00	9.10	AV
M	H	2437.00	49.30	-22.50	Fundamental	/	PK

TEST REPORT

	H	2437.00	49.20	-22.50	Fundamental	/	AV
	V	2437.00	49.20	-22.50	Fundamental	/	PK
	V	2437.00	49.10	-22.50	Fundamental	/	AV
	H	4874.00	54.80	-14.00	74.00	19.20	PK
	H	4874.00	44.50	-14.00	54.00	9.50	AV
	V	4874.00	54.40	-14.00	74.00	19.60	PK
	V	4874.00	45.00	-14.00	54.00	9.00	AV
H	H	2462.00	48.90	-22.20	Fundamental	/	PK
	H	2462.00	48.80	-22.20	Fundamental	/	AV
	V	2462.00	49.20	-22.20	Fundamental	/	PK
	V	2462.00	49.00	-22.20	Fundamental	/	AV
	H	2483.50	45.40	31.90	74.00	28.60	PK
	H	2483.50	36.40	31.90	54.00	17.60	AV
	V	2483.50	44.80	31.90	74.00	29.20	PK
	V	2483.50	35.40	31.90	54.00	18.60	AV
	H	4924.00	55.50	-13.80	74.00	18.50	PK
	H	4924.00	43.70	-13.80	54.00	10.30	AV
	V	4924.00	54.80	-13.80	74.00	19.20	PK
	V	4924.00	44.40	-13.80	54.00	9.60	AV

Note: Choose the worst power to test as representative.

8 Power Line Conducted Emission


Test Result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

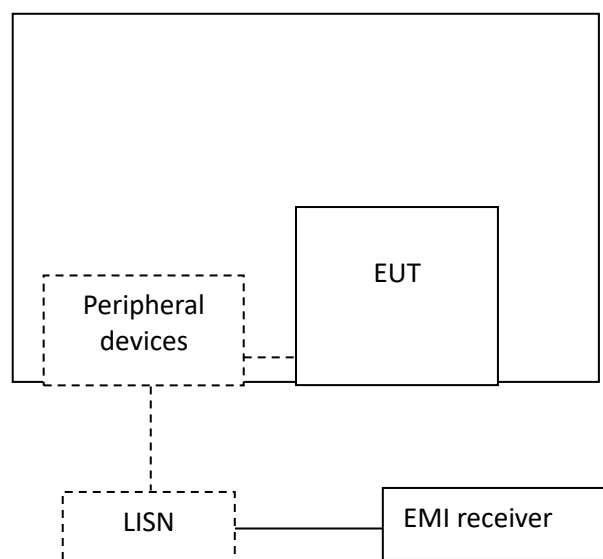

TEST REPORT**8.3 Measurement Procedure**

Measured levels of ac powerline conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.



The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT

8.4 Test Results of Power Line Conducted Emission

Test Voltage: 120V AC / 60 Hz

Test Curve:

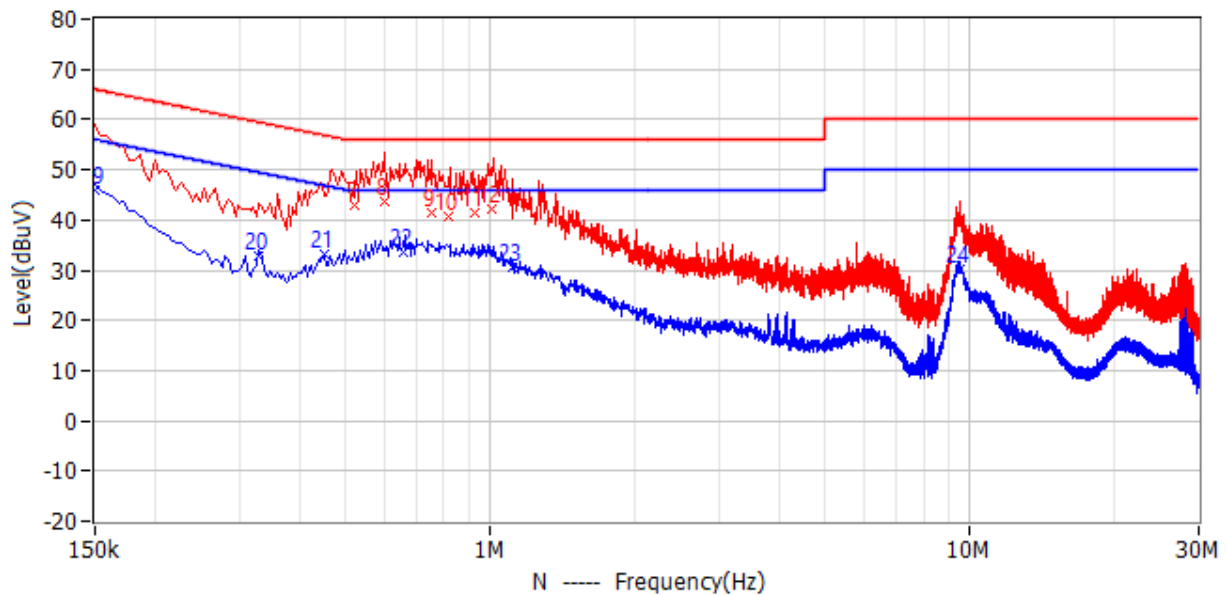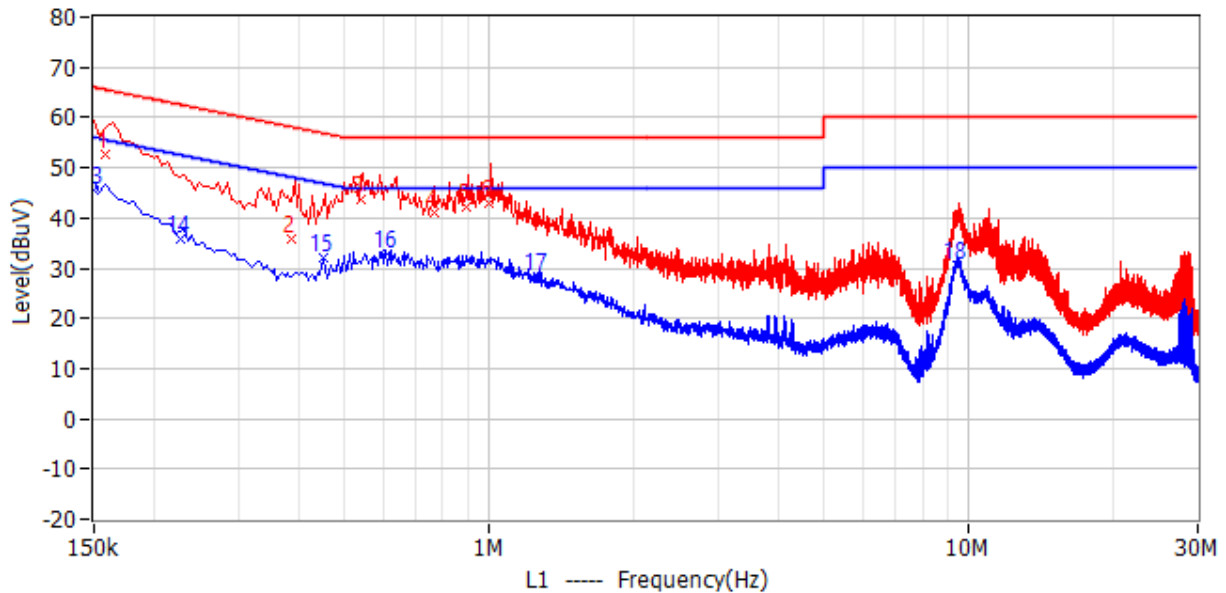

TEST REPORT

Test Data:

Frequency	Limit (dBuV)	Corrected Reading (dBuV)	Margin (dB)	Original Receiver Reading (dBuV)	Correct Factor (dB)	Detector	Phase
159.000kHz	65.50	52.60	12.90	46.40	6.20	QP	L1
388.500kHz	58.10	35.90	22.20	29.70	6.20	QP	L1
541.500kHz	56.00	43.80	12.20	37.60	6.20	QP	L1
771.000kHz	56.00	41.10	14.90	34.90	6.20	QP	L1
892.500kHz	56.00	42.00	14.00	35.80	6.20	QP	L1
996.000kHz	56.00	43.10	12.90	36.90	6.20	QP	L1
519.000kHz	56.00	42.80	13.20	36.60	6.20	QP	N
604.500kHz	56.00	43.80	12.20	37.60	6.20	QP	N
753.000kHz	56.00	41.30	14.70	35.10	6.20	QP	N
816.000kHz	56.00	40.80	15.20	34.60	6.20	QP	N
928.500kHz	56.00	41.50	14.50	35.30	6.20	QP	N
1.010MHz	56.00	42.30	13.70	36.10	6.20	QP	N
150.000kHz	56.00	45.70	10.30	39.50	6.20	CAV	L1
226.500kHz	52.60	35.90	16.70	29.70	6.20	CAV	L1
451.500kHz	46.80	32.10	14.70	25.90	6.20	CAV	L1
613.500kHz	46.00	32.70	13.30	26.50	6.20	CAV	L1
1.257MHz	46.00	28.50	17.50	22.30	6.20	CAV	L1
9.474MHz	50.00	30.70	19.30	24.10	6.60	CAV	L1
150.000kHz	56.00	46.00	10.00	39.80	6.20	CAV	N
330.000kHz	49.50	32.80	16.60	26.60	6.20	CAV	N
451.500kHz	46.80	33.00	13.90	26.80	6.20	CAV	N
658.500kHz	46.00	33.70	12.30	27.50	6.20	CAV	N
1.118MHz	46.00	30.50	15.50	24.30	6.20	CAV	N
9.528MHz	50.00	30.30	19.70	23.70	6.60	CAV	N

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

9 Occupied Bandwidth

Test Result: Pass

9.1 Limit

None.


9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration

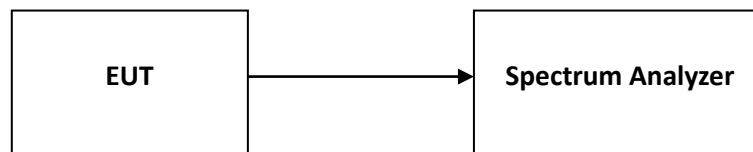

9.4 The Results of Occupied Bandwidth

Please refer to Appendix A.

10 Antenna Requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

TEST REPORT


11 Appendix A: Test Results


11.1 DTS Bandwidth

11.1.1 Test Data


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	8.560	2407.440	2416.000	0.5	PASS
		2437	8.560	2432.920	2441.480	0.5	PASS
		2462	8.480	2457.480	2465.960	0.5	PASS
11G	Ant1	2412	16.320	2403.840	2420.160	0.5	PASS
		2437	16.360	2428.800	2445.160	0.5	PASS
		2462	16.320	2453.840	2470.160	0.5	PASS
11N20SISO	Ant1	2412	17.560	2403.200	2420.760	0.5	PASS
		2437	17.640	2428.160	2445.800	0.5	PASS
		2462	17.560	2453.200	2470.760	0.5	PASS

11.1.2 Test Plots

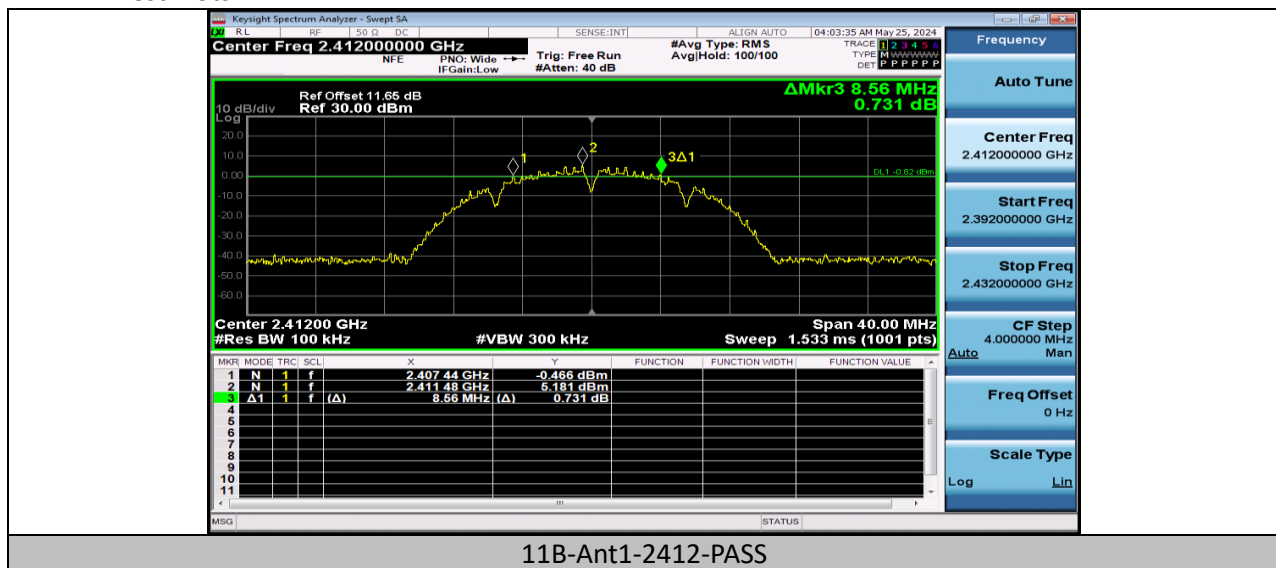

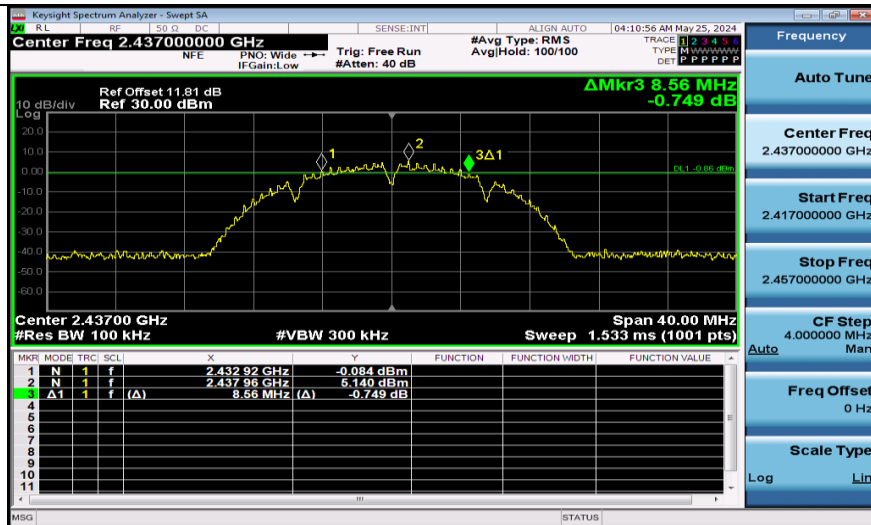

11B-Ant1-2437-PASS

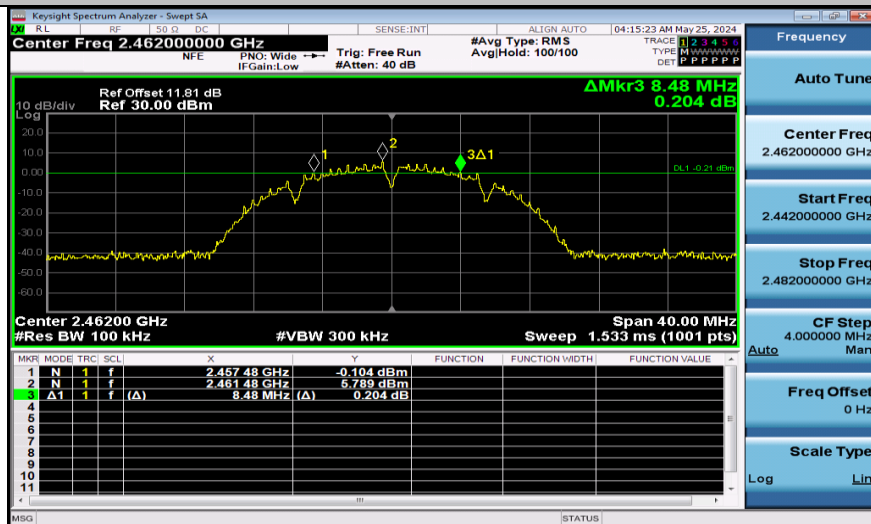


11B-Ant1-2462-PASS



11G-Ant1-2412-PASS




11G-Ant1-2437-PASS

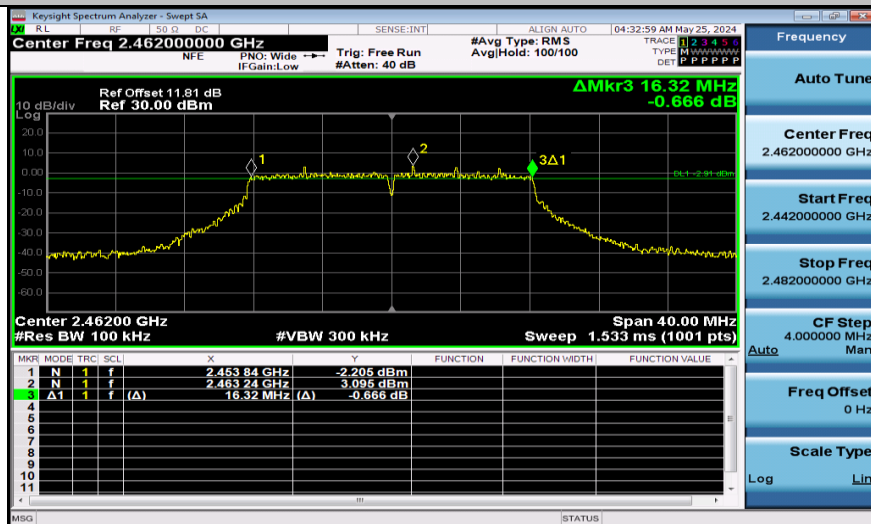


11G-Ant1-2462-PASS



11N20SISO-Ant1-2412-PASS

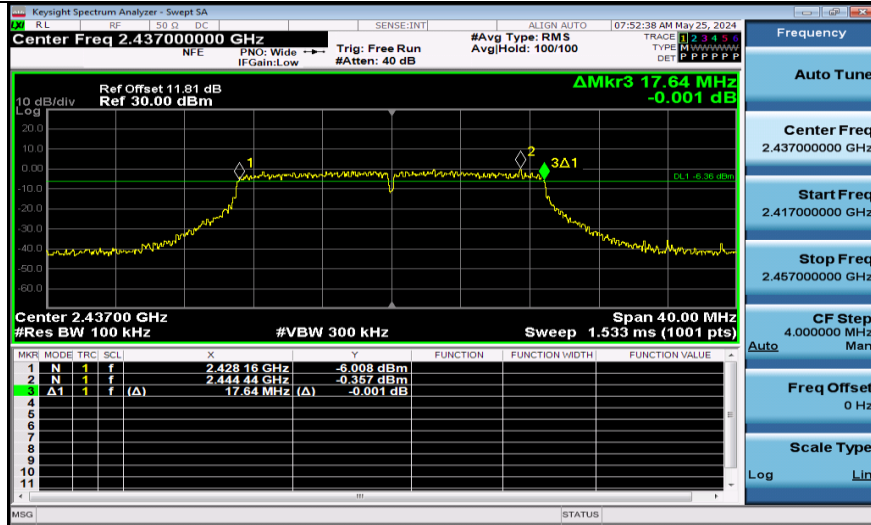

11N20SISO-Ant1-2437-PASS

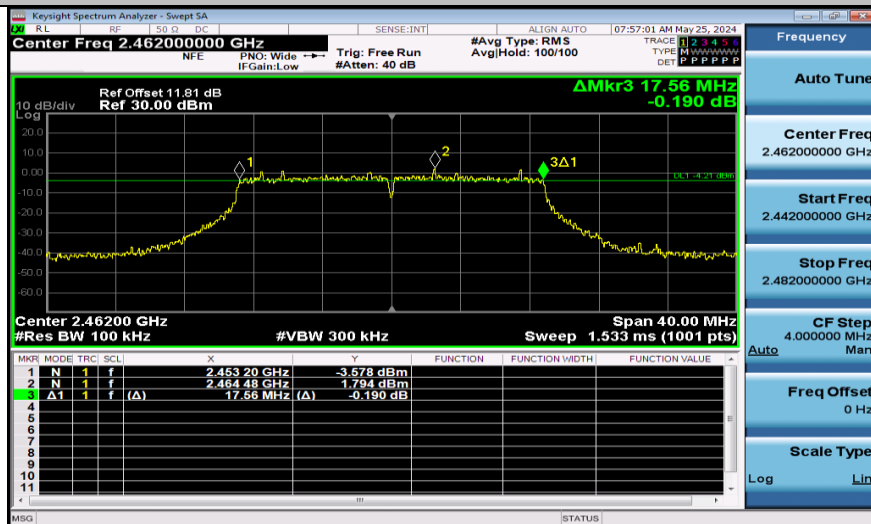

11N20SISO-Ant1-2462-PASS


TEST REPORT


11.2 Occupied Channel Bandwidth

11.2.1 Test Data


Test Mode	Antenna	Channel Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	14.152	2404.9184	2419.0704	---	---
		2437	14.132	2429.9393	2444.0713	---	---
		2462	14.092	2454.9288	2469.0208	---	---
11G	Ant1	2412	17.362	2403.4120	2420.7740	---	---
		2437	17.056	2428.4933	2445.5493	---	---
		2462	17.217	2453.3442	2470.5612	---	---
11N20SISO	Ant1	2412	18.210	2402.9044	2421.1144	---	---
		2437	18.204	2427.8998	2446.1038	---	---
		2462	18.176	2452.8652	2471.0412	---	---

11.2.2 Test Plots

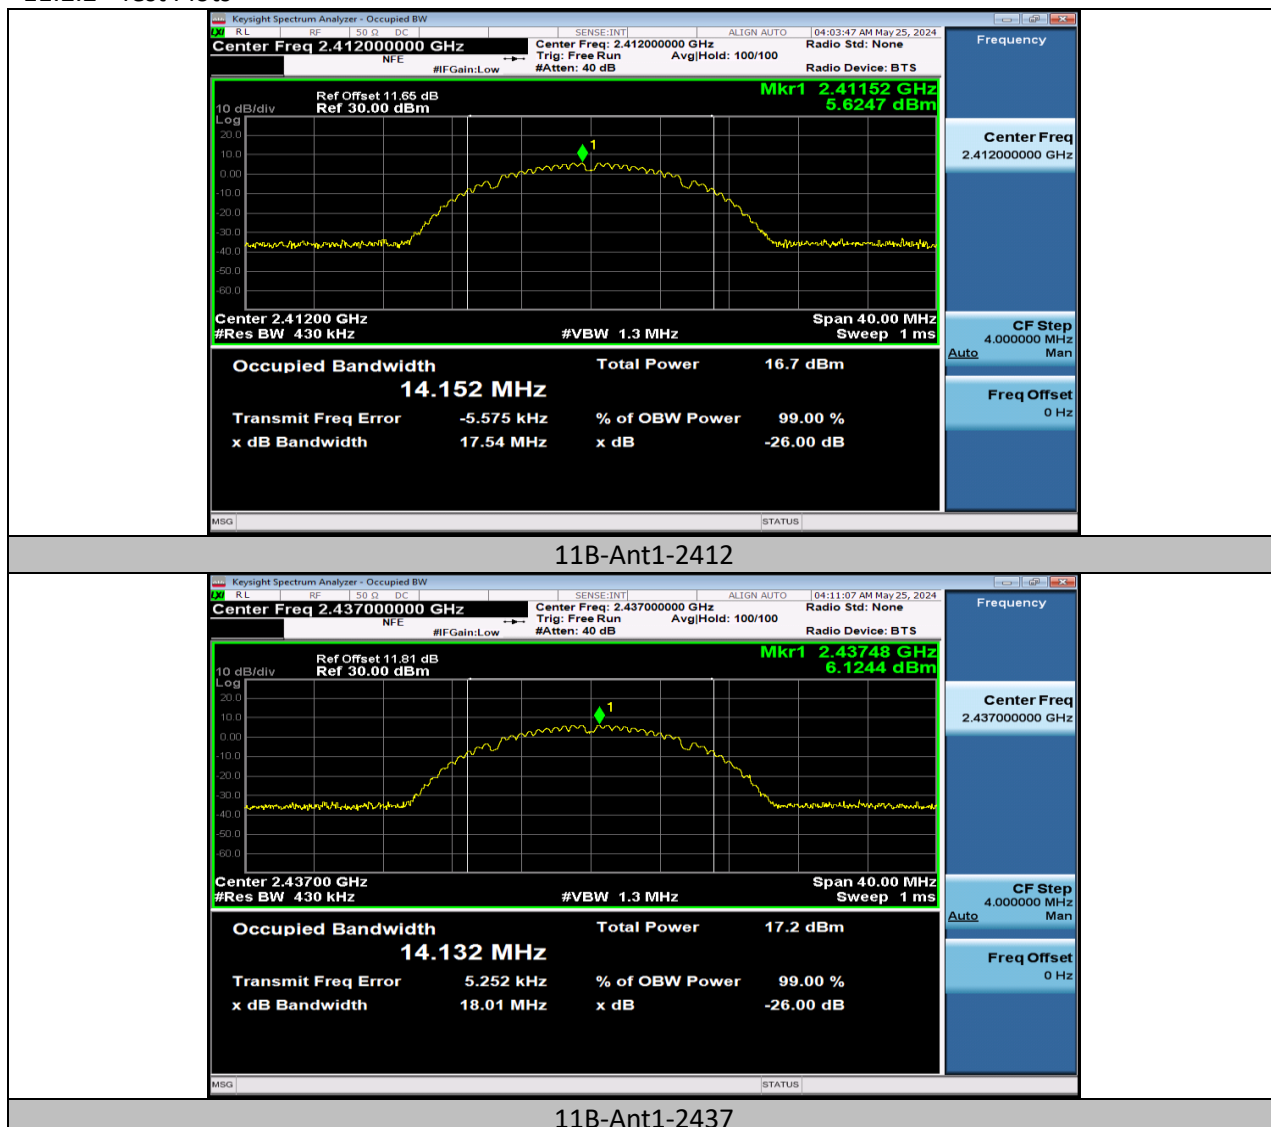


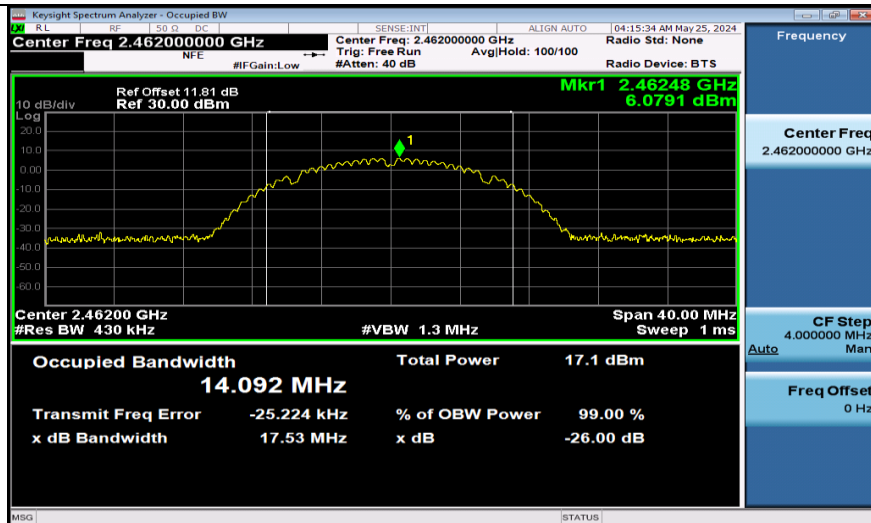


11B-Ant1-2462

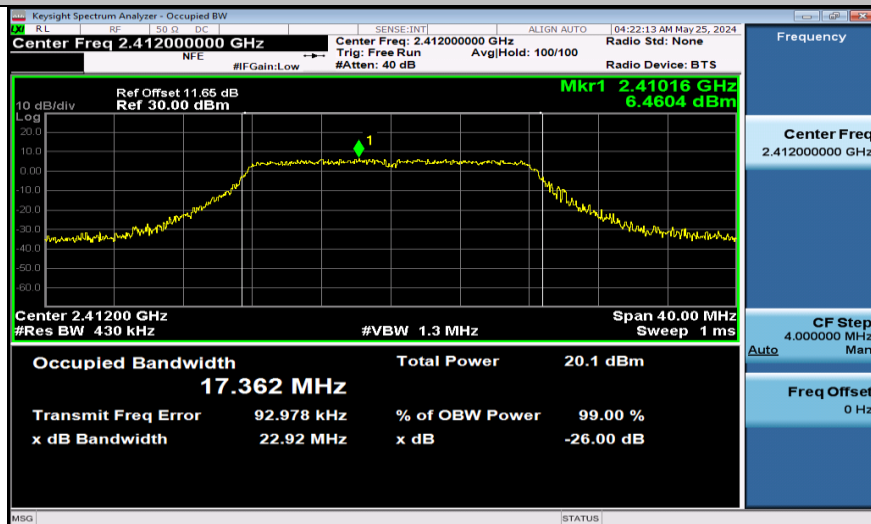


11G-Ant1-2412

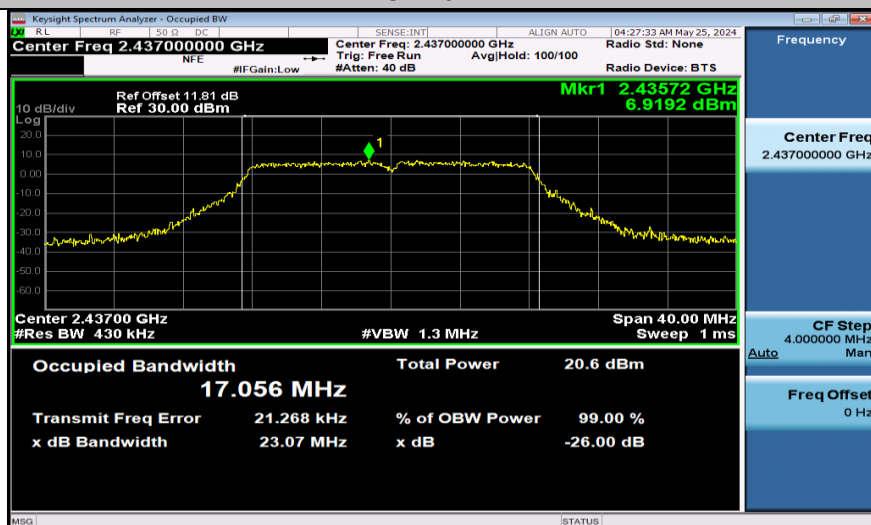


11G-Ant1-2437

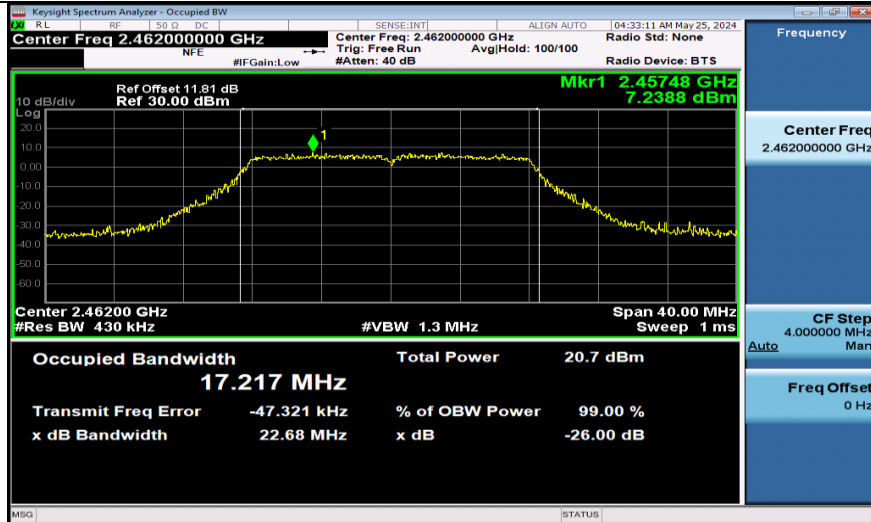

11G-Ant1-2462

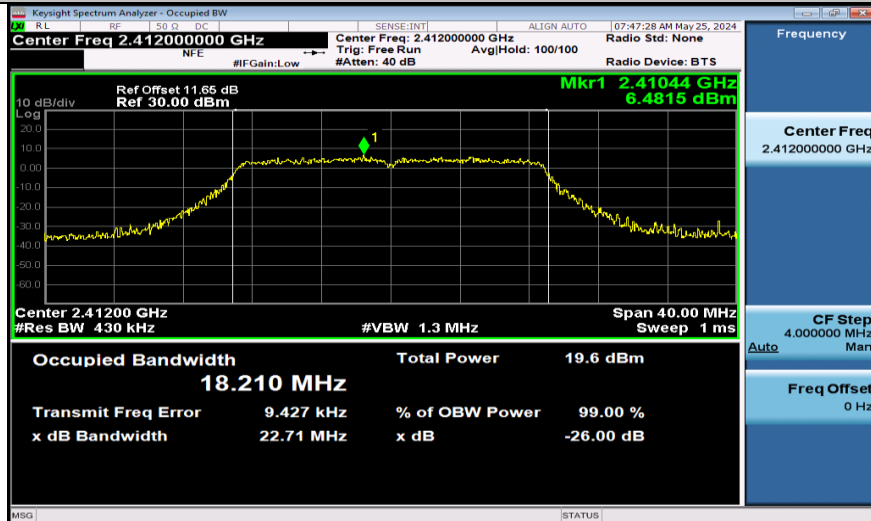


11N20SISO-Ant1-2412

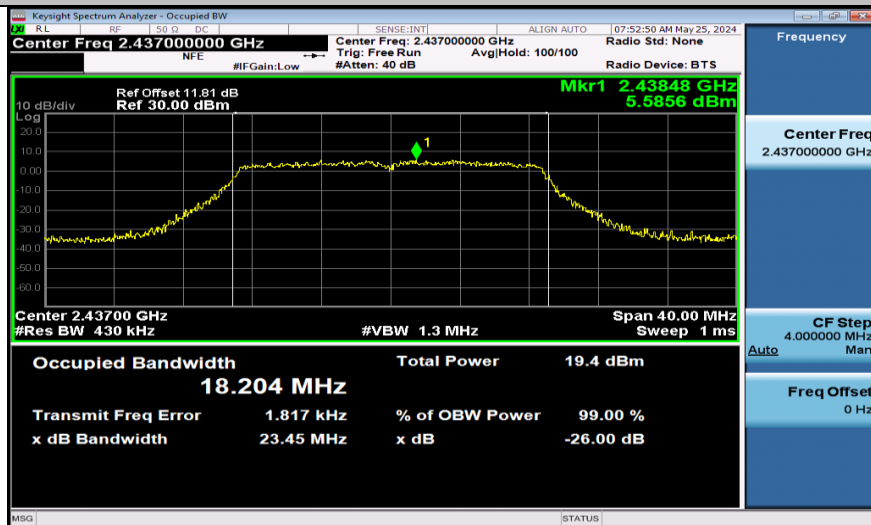

11N20SISO-Ant1-2437

TEST REPORT

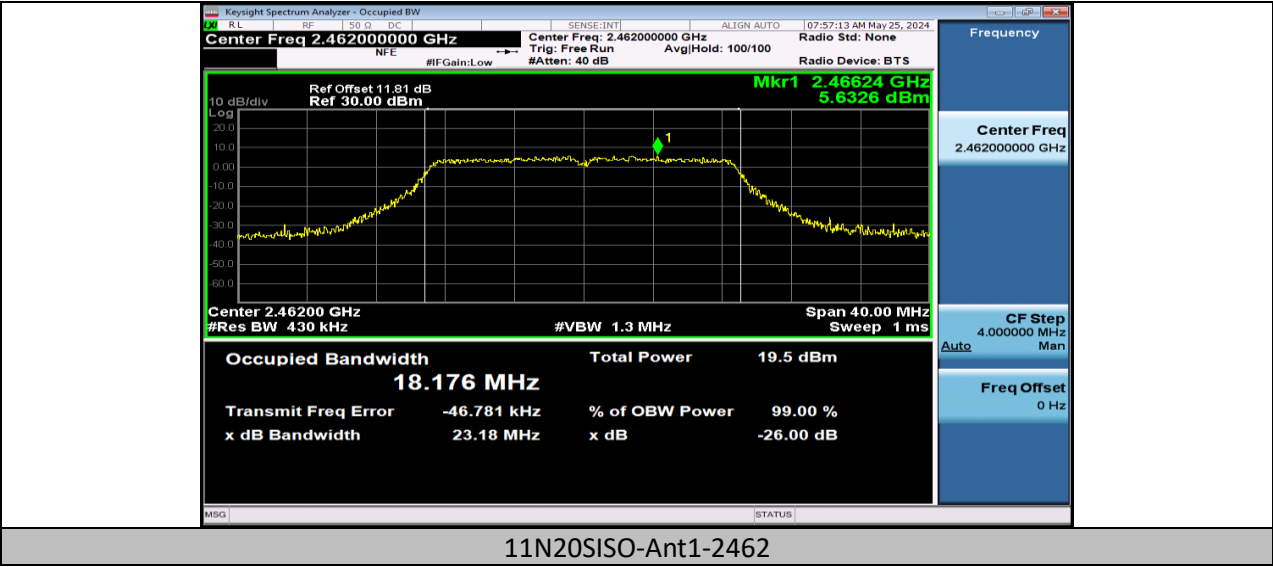


TEST REPORT


11.3 Maximum conducted output power and e.i.r.p

11.3.1 Test Data


Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	13.67	98.89	0.05	13.72	≤30.00	15.72	≤36.00	PASS
11B	Ant1	2437	14.20	98.96	0.05	14.25	≤30.00	16.25	≤36.00	PASS
11B	Ant1	2462	14.16	98.89	0.05	14.21	≤30.00	16.21	≤36.00	PASS
11G	Ant1	2412	13.83	94.09	0.26	14.09	≤30.00	16.09	≤36.00	PASS
11G	Ant1	2437	14.38	94.09	0.26	14.64	≤30.00	16.64	≤36.00	PASS
11G	Ant1	2462	14.29	94.06	0.27	14.56	≤30.00	16.56	≤36.00	PASS
11N20SISO	Ant1	2412	13.23	93.66	0.28	13.51	≤30.00	15.51	≤36.00	PASS
11N20SISO	Ant1	2437	13.13	93.66	0.28	13.41	≤30.00	15.41	≤36.00	PASS
11N20SISO	Ant1	2462	13.29	93.66	0.28	13.57	≤30.00	15.57	≤36.00	PASS

11.3.2 Test Plots

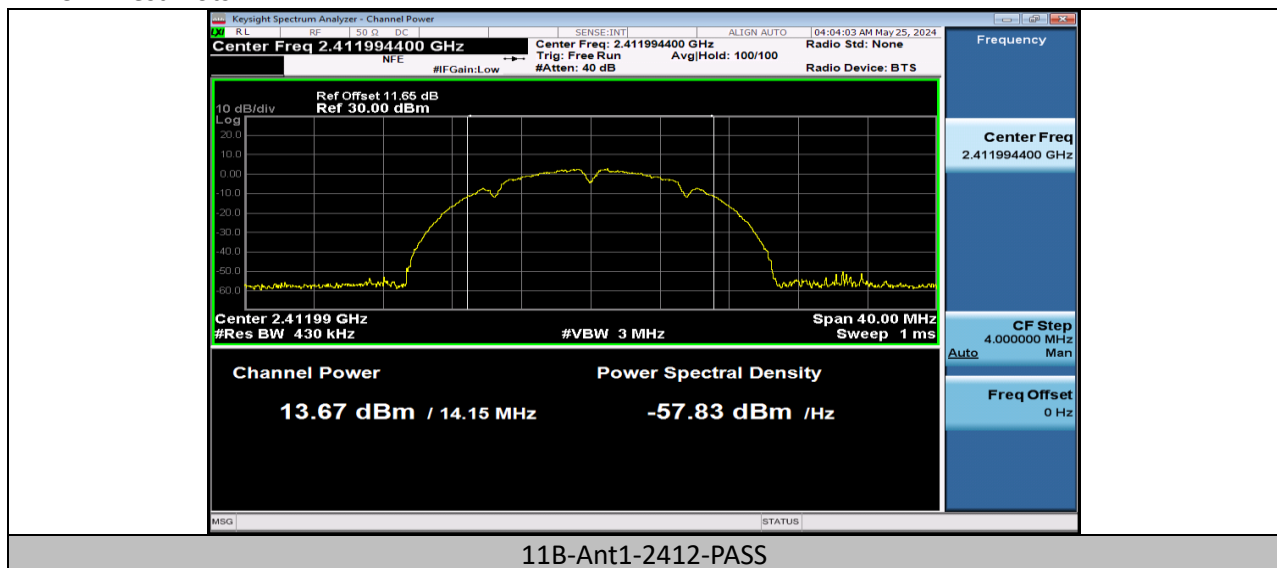


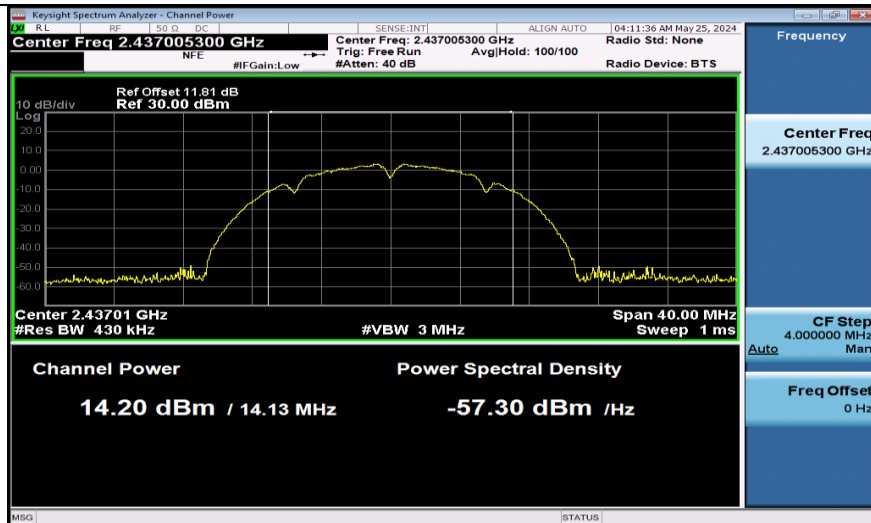

11B-Ant1-2437-PASS

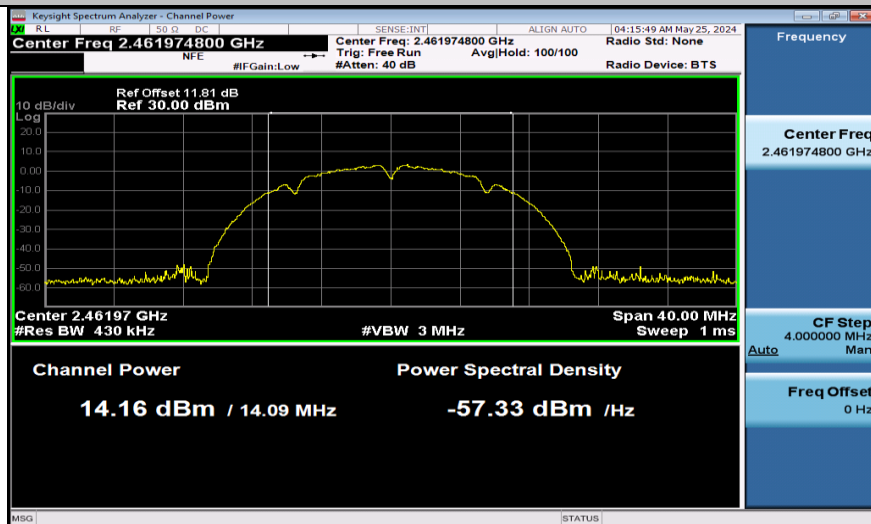


11B-Ant1-2462-PASS

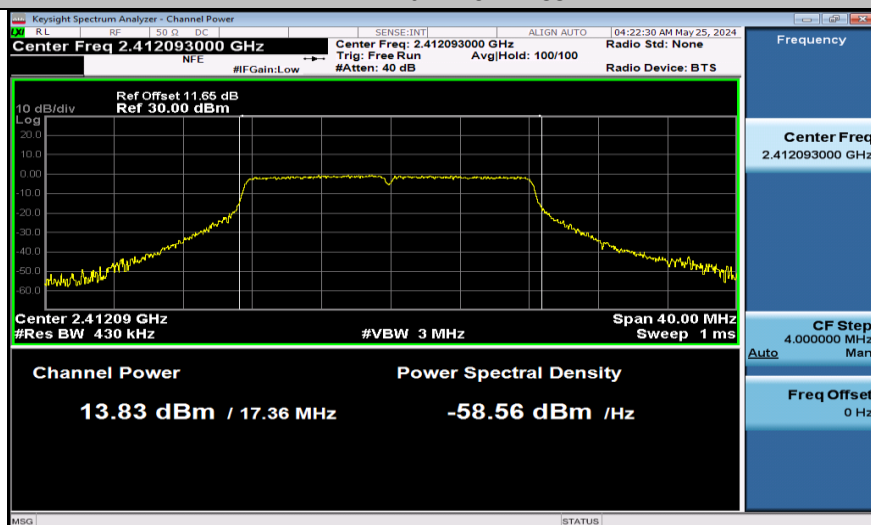


11G-Ant1-2412-PASS


TEST REPORT

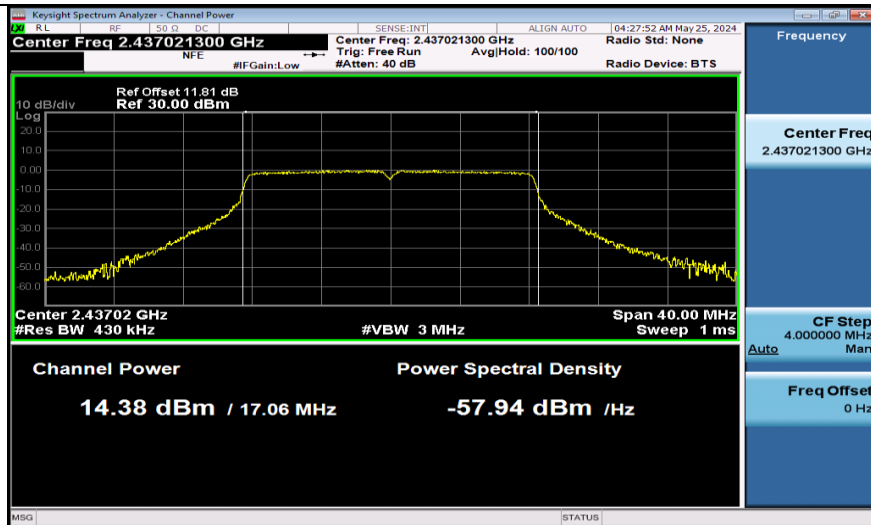

11G-Ant1-2437-PASS

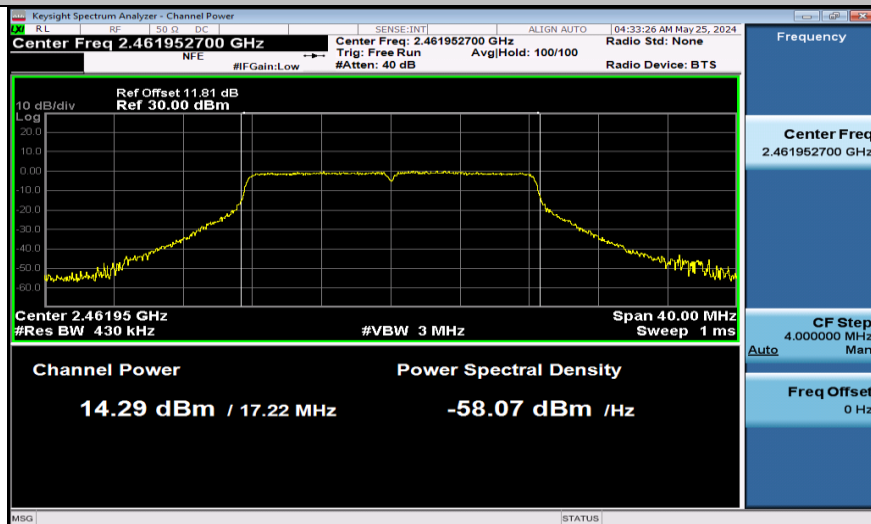


11G-Ant1-2462-PASS

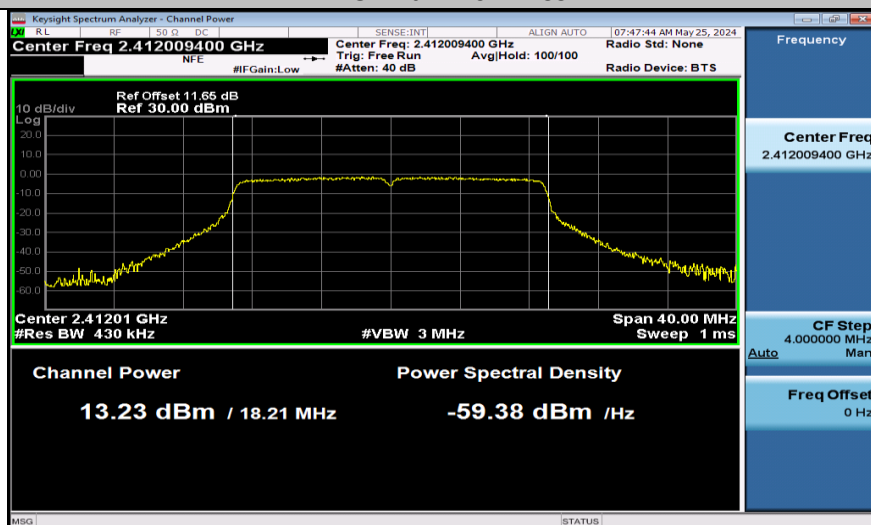


11N20SISO-Ant1-2412-PASS

TEST REPORT

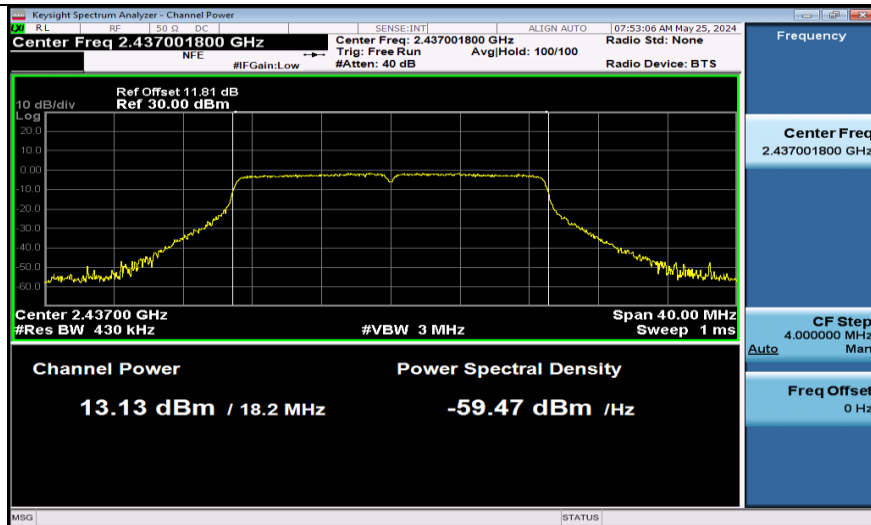

11N20ISO-Ant1-2437-PASS

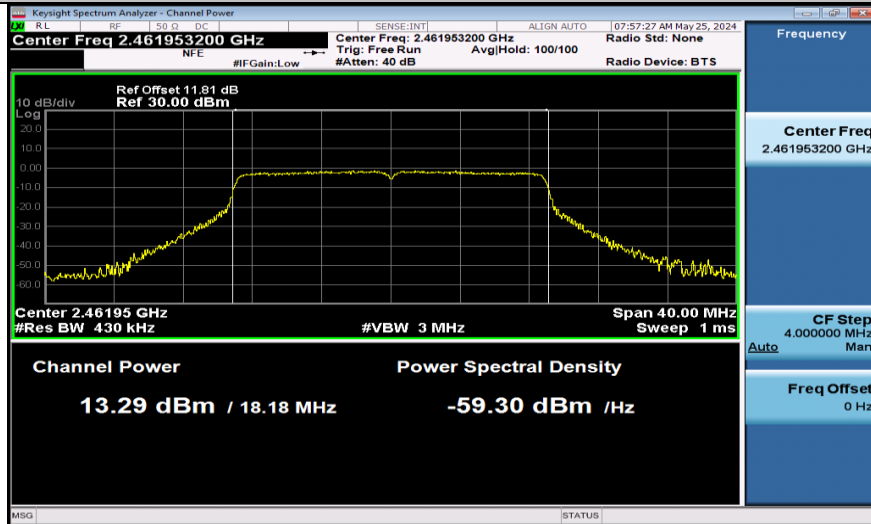

11N20ISO-Ant1-2462-PASS


TEST REPORT

11.4 Maximum power spectrum density

11.4.1 Test Data


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-17.814	≤8.00	PASS
		2437	-17.009	≤8.00	PASS
		2462	-17.341	≤8.00	PASS
11G	Ant1	2412	-17.518	≤8.00	PASS
		2437	-17.730	≤8.00	PASS
		2462	-17.504	≤8.00	PASS
11N20SISO	Ant1	2412	-19.224	≤8.00	PASS
		2437	-17.975	≤8.00	PASS
		2462	-18.368	≤8.00	PASS

11.4.2 Test Plots

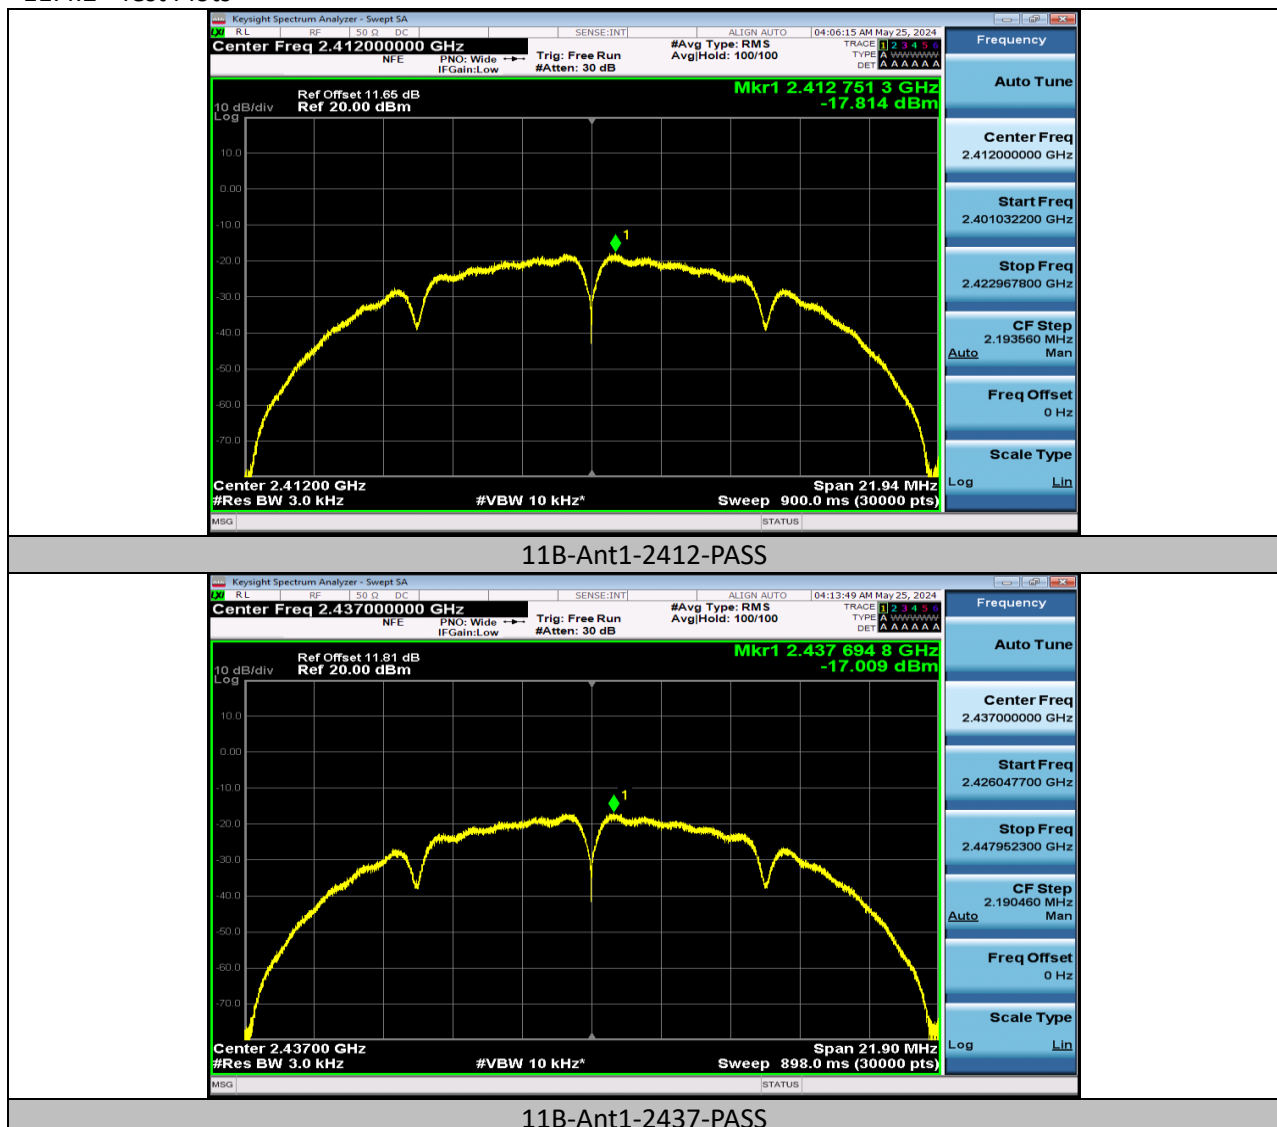




11B-Ant1-2462-PASS

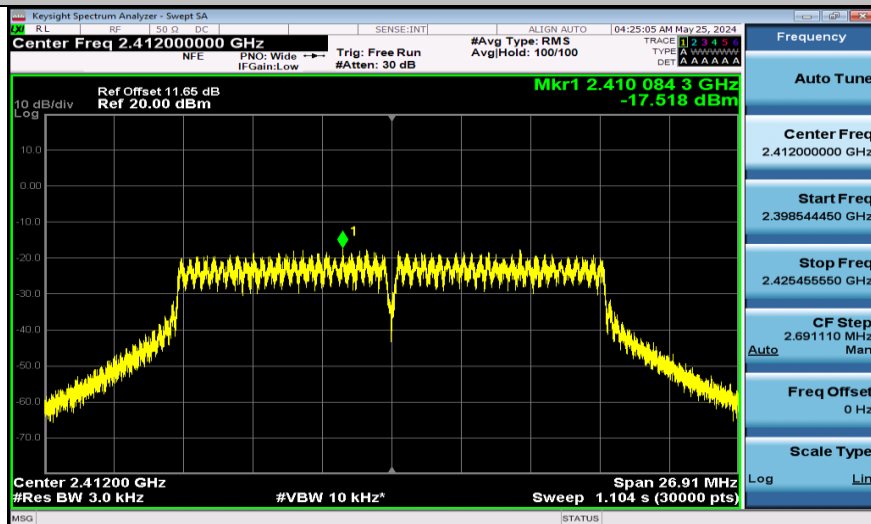

11G-Ant1-2412-PASS

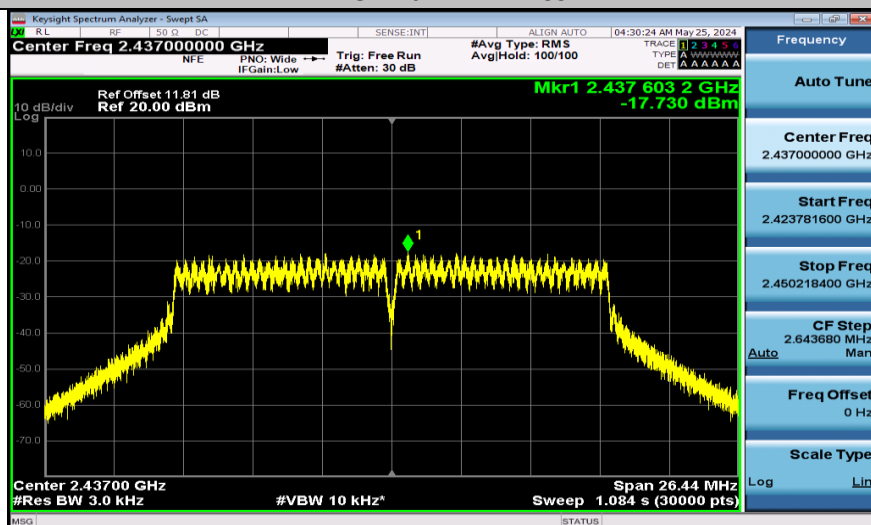

11G-Ant1-2437-PASS