


Test Mode	IEEE 802.11g Mid CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

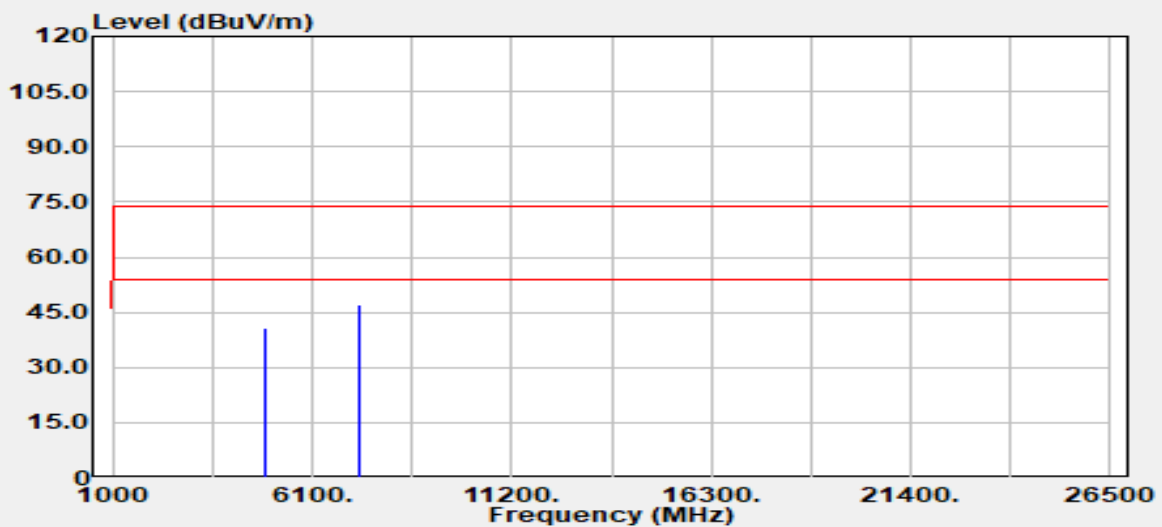


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	34.63	6.09	40.72	74.00	-33.28
4874.00	Average	26.84	6.09	32.93	54.00	-21.07
7311.00	Peak	33.77	13.33	47.10	74.00	-26.90
7311.00	Average	25.78	13.33	39.11	54.00	-14.89

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11g High CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

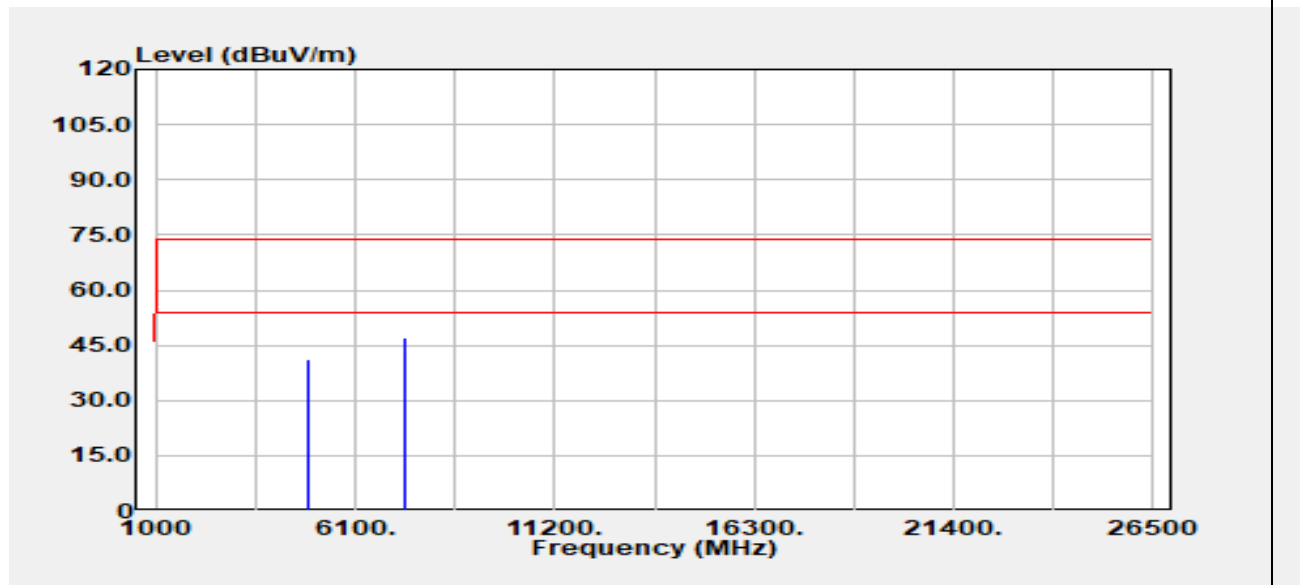


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBUV/m)	Limit @3m (dBUV/m)	Margin (dB)
4924.00	Peak	34.59	6.53	41.12	74.00	-32.88
4924.00	Average	26.98	6.53	33.51	54.00	-20.49
7386.00	Peak	33.69	13.33	47.02	74.00	-26.98
7386.00	Average	25.91	13.33	39.24	54.00	-14.76

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11g High CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

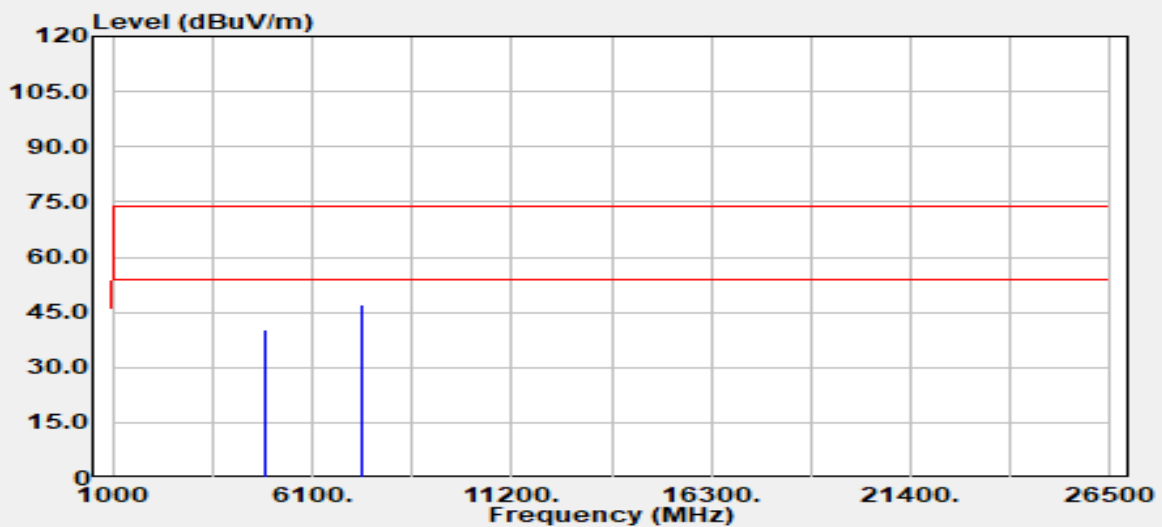


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	33.91	6.53	40.44	74.00	-33.56
4924.00	Average	26.90	6.53	33.43	54.00	-20.57
7386.00	Peak	33.91	13.33	47.24	74.00	-26.76
7386.00	Average	25.91	13.33	39.24	54.00	-14.76

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

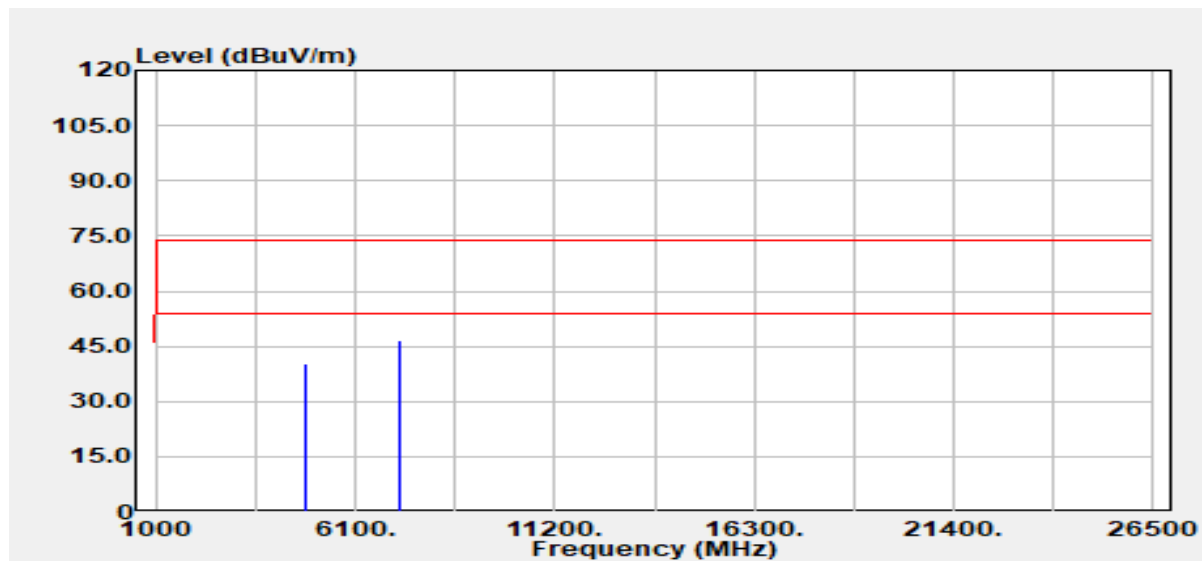


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	34.50	5.90	40.40	74.00	-33.60
4824.00	Average	27.94	5.90	33.83	54.00	-20.17
7236.00	Peak	33.20	13.31	46.51	74.00	-27.49
7236.00	Average	25.86	13.31	39.18	54.00	-14.82

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

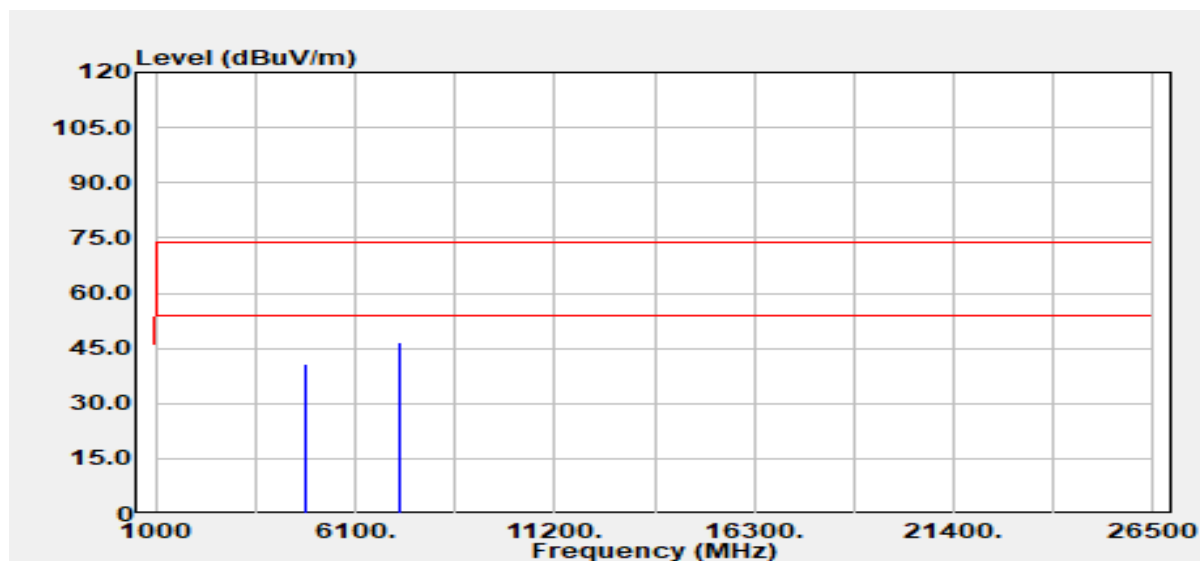


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	34.75	5.90	40.65	74.00	-33.35
4824.00	Average	27.03	5.90	32.93	54.00	-21.07
7236.00	Peak	33.32	13.31	46.63	74.00	-27.37
7236.00	Average	25.91	13.31	39.22	54.00	-14.78

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

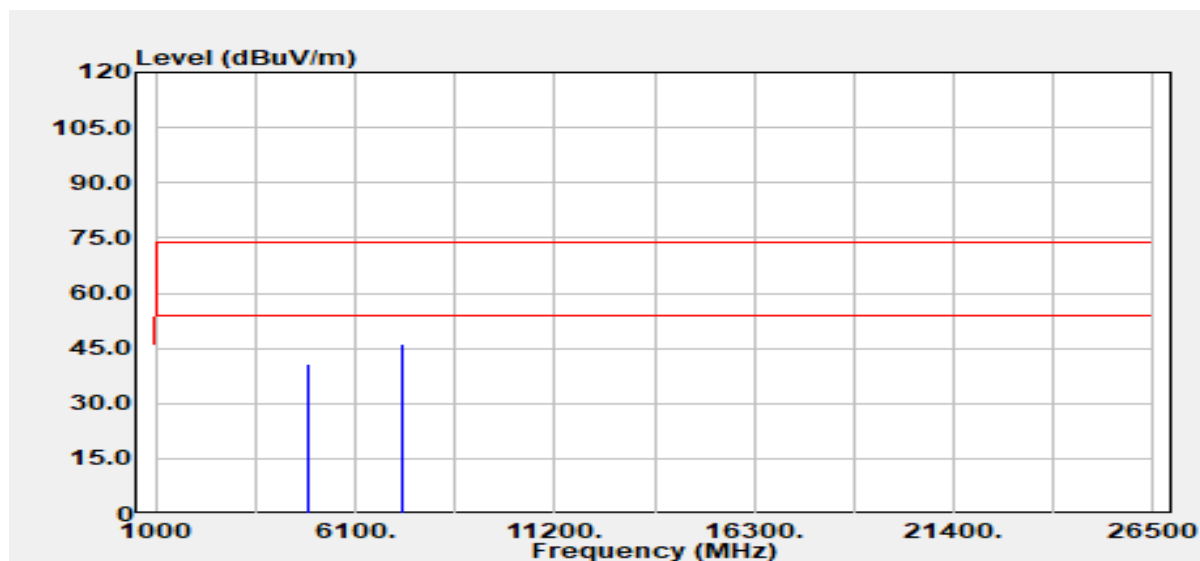


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	34.46	6.09	40.54	74.00	-33.46
4874.00	Average	27.61	6.09	33.70	54.00	-20.30
7311.00	Peak	32.96	13.33	46.29	74.00	-27.71
7311.00	Average	25.75	13.33	39.08	54.00	-14.92

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2211004434KR

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

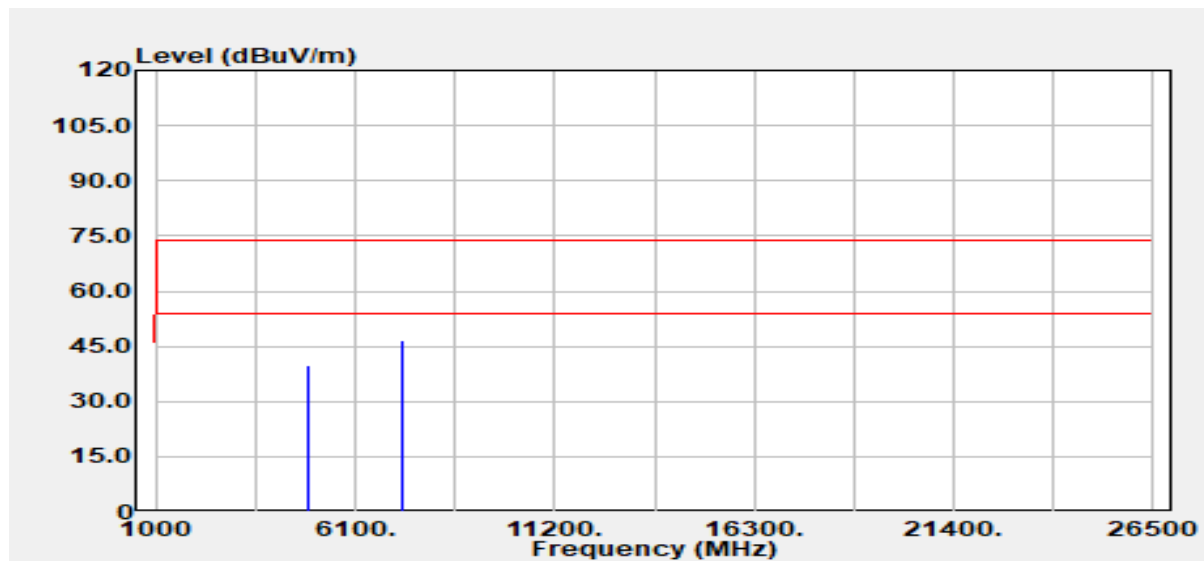


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	33.59	6.09	39.68	74.00	-34.32
4874.00	Average	26.80	6.09	32.89	54.00	-21.11
7311.00	Peak	33.53	13.33	46.86	74.00	-27.14
7311.00	Average	25.72	13.33	39.05	54.00	-14.95

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

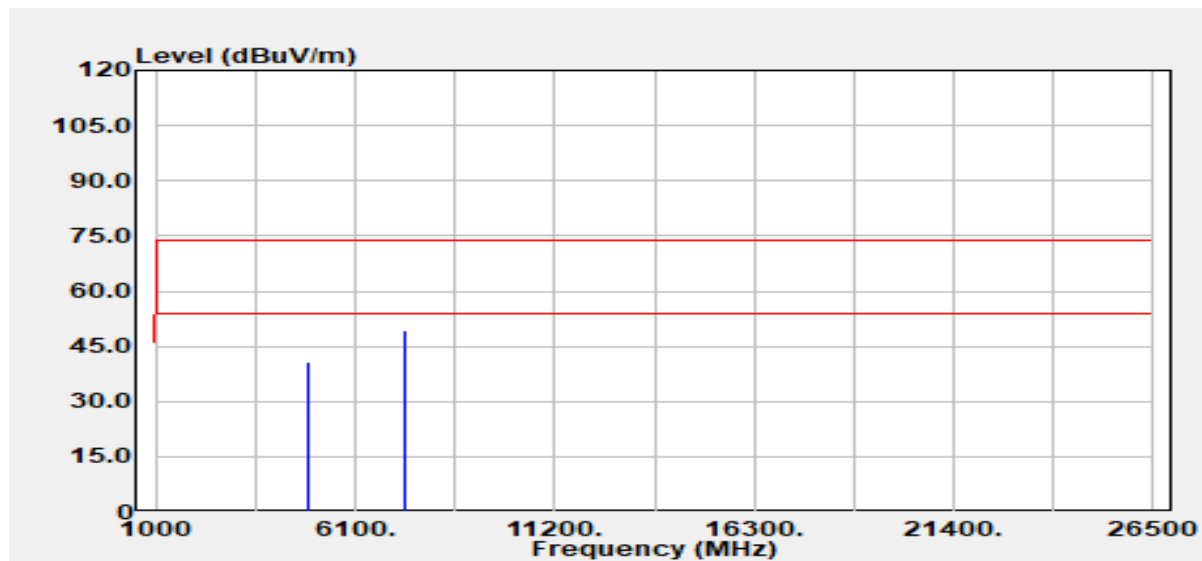


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	34.30	6.53	40.83	74.00	-33.17
4924.00	Average	26.90	6.53	33.43	54.00	-20.57
7386.00	Peak	36.14	13.33	49.47	74.00	-24.53
7386.00	Average	25.81	13.33	39.15	54.00	-14.85

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

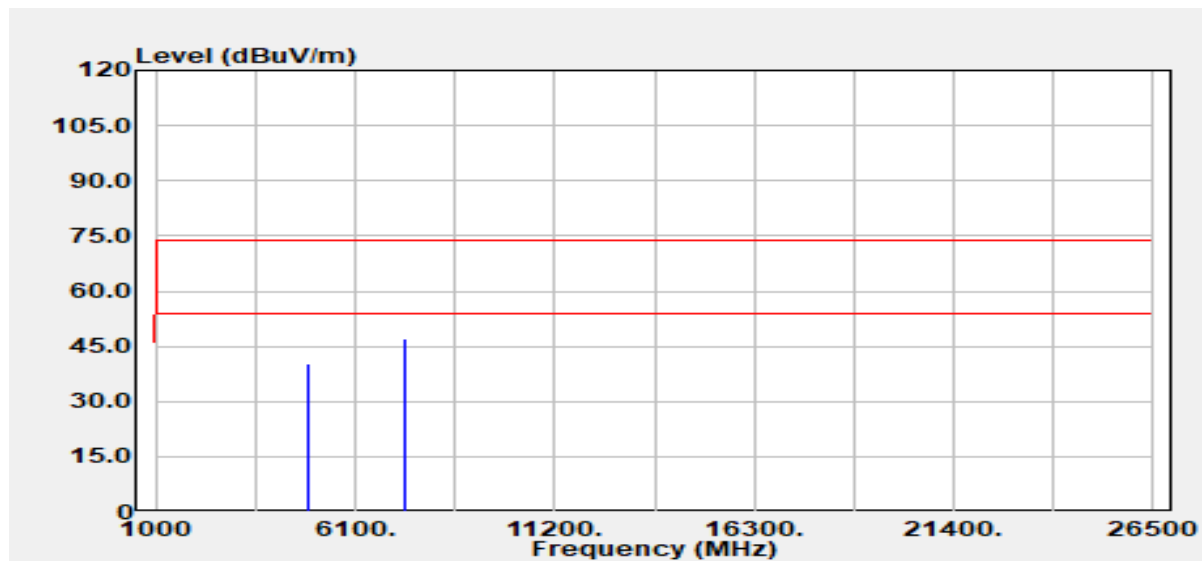


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	33.97	6.53	40.50	74.00	-33.50
4924.00	Average	26.87	6.53	33.40	54.00	-20.60
7386.00	Peak	33.61	13.33	46.95	74.00	-27.05
7386.00	Average	25.85	13.33	39.18	54.00	-14.82

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

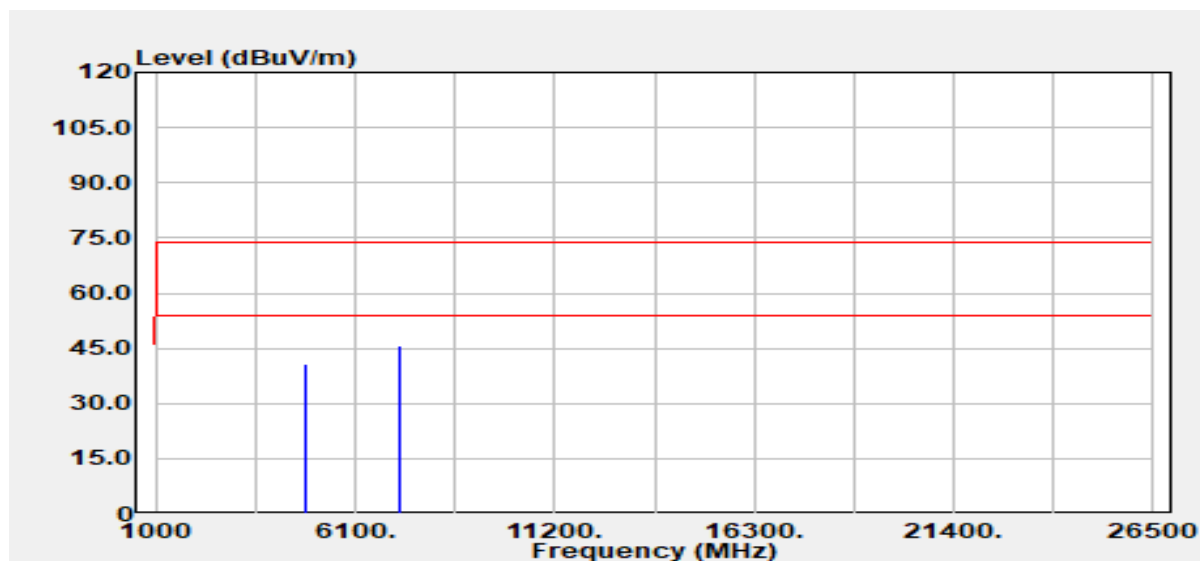


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.00	Peak	34.98	5.93	40.91	74.00	-33.09
4844.00	Average	26.11	5.93	32.04	54.00	-21.96
7266.00	Peak	32.59	13.33	45.92	74.00	-28.08
7266.00	Average	24.85	13.33	38.18	54.00	-15.82

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

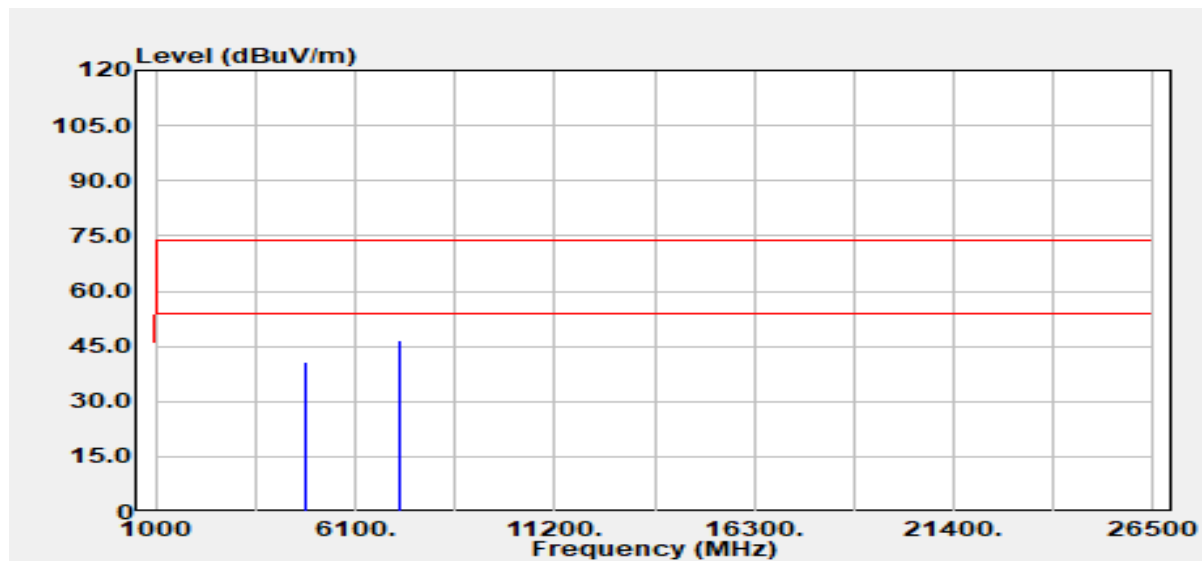


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.00	Peak	35.02	5.93	40.95	74.00	-33.05
4844.00	Average	26.00	5.93	31.93	54.00	-22.07
7266.00	Peak	33.13	13.33	46.46	74.00	-27.54
7266.00	Average	25.14	13.33	38.47	54.00	-15.53

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 15, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

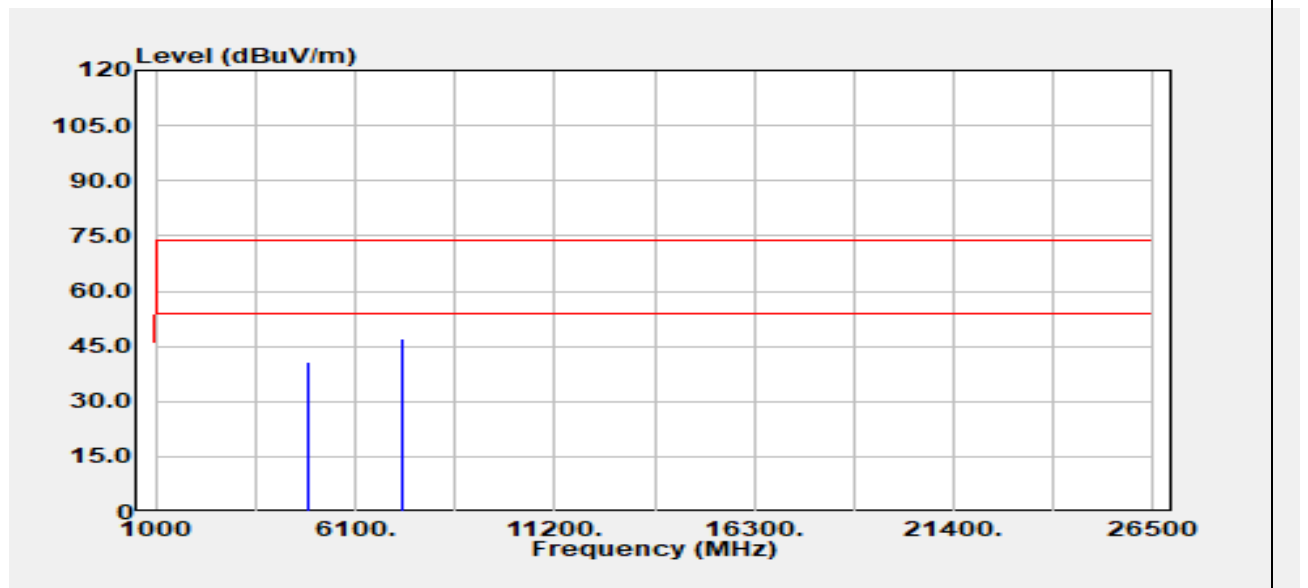


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	34.66	6.09	40.75	74.00	-33.25
4874.00	Average	26.34	6.09	32.43	54.00	-21.57
7311.00	Peak	33.71	13.33	47.04	74.00	-26.96
7311.00	Average	24.87	13.33	38.20	54.00	-15.80

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2211004434KR

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

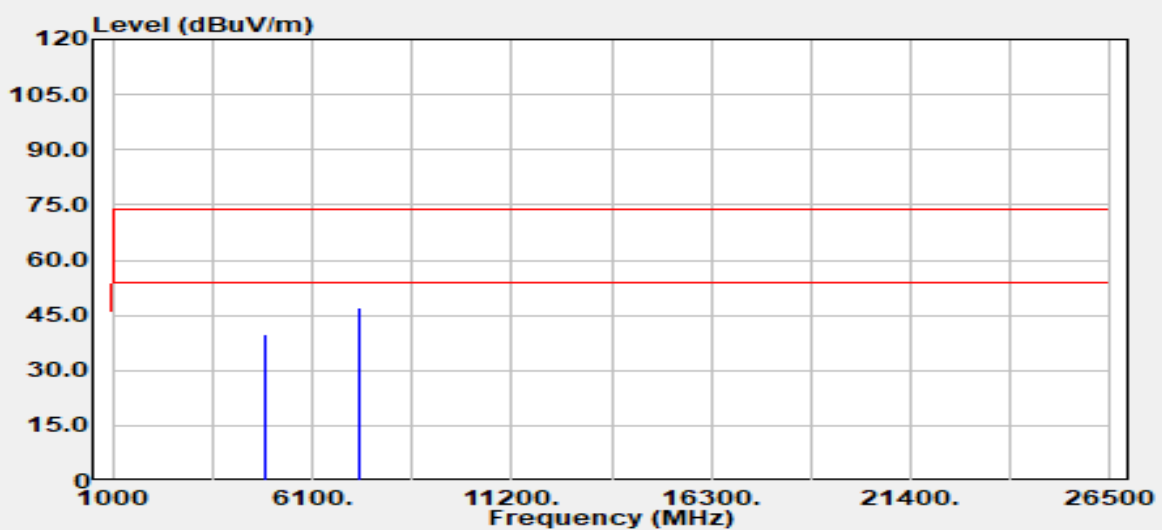


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	33.76	6.09	39.85	74.00	-34.15
4874.00	Average	25.97	6.09	32.06	54.00	-21.94
7311.00	Peak	33.89	13.33	47.23	74.00	-26.77
7311.00	Average	24.83	13.33	38.16	54.00	-15.84

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

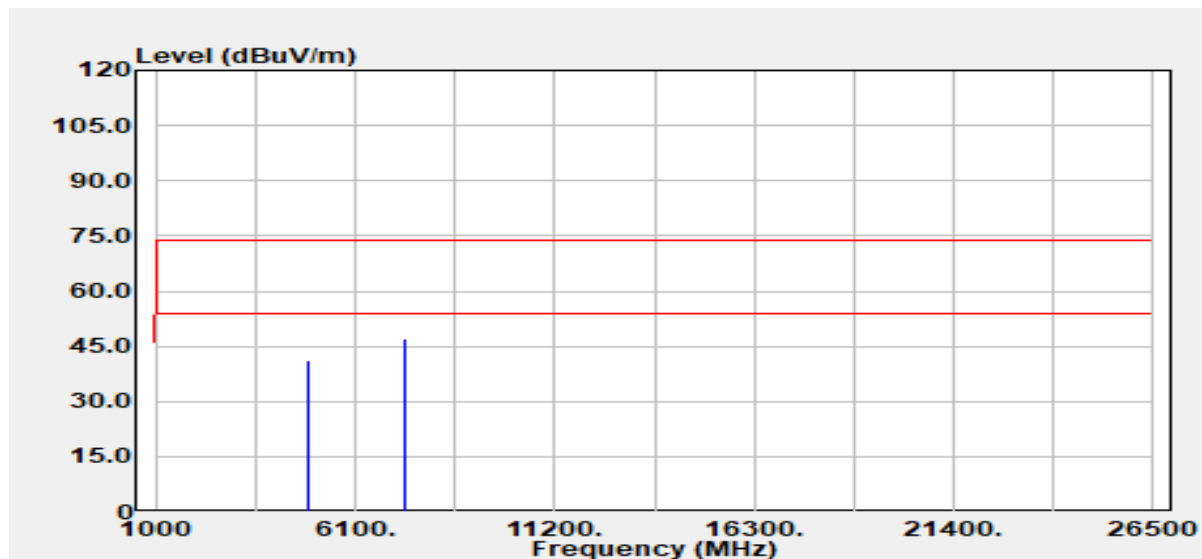


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.00	Peak	34.78	6.30	41.08	74.00	-32.92
4904.00	Average	26.12	6.30	32.41	54.00	-21.59
7356.00	Peak	33.49	13.40	46.88	74.00	-27.12
7356.00	Average	24.61	13.40	38.00	54.00	-16.00

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2211004434KR

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	24.2(°C)/ 61%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		

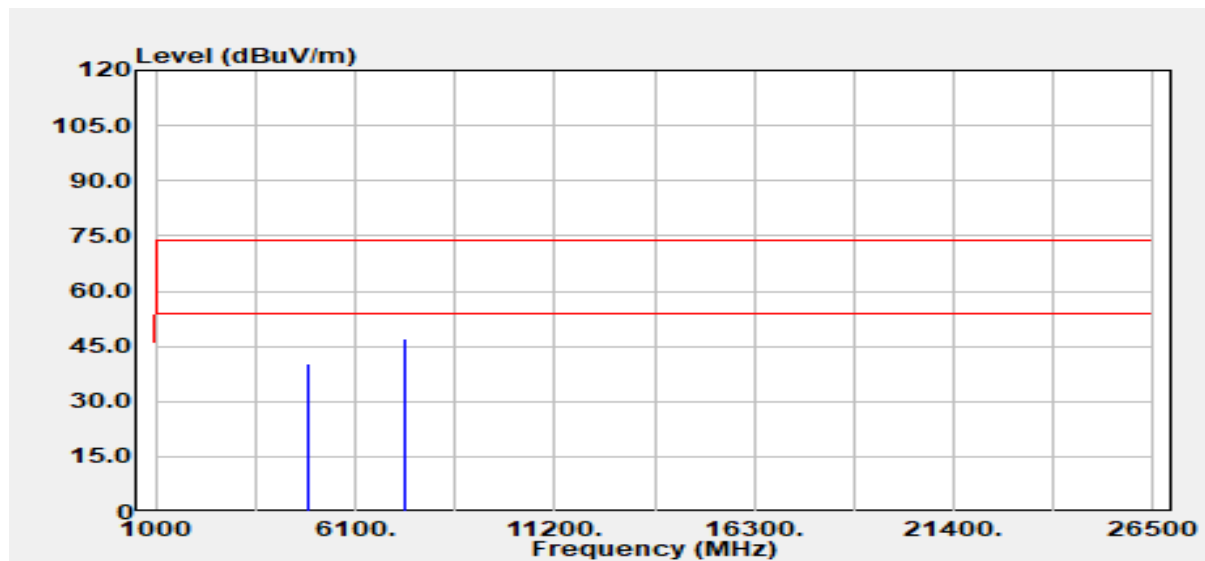


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.00	Peak	33.98	6.30	40.27	74.00	-33.73
4904.00	Average	25.95	6.30	32.24	54.00	-21.76
7356.00	Peak	33.50	13.40	46.90	74.00	-27.10
7356.00	Average	24.60	13.40	38.00	54.00	-16.00

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2211004434KR

Test Mode	IEEE 802.11ax HE20 Low CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

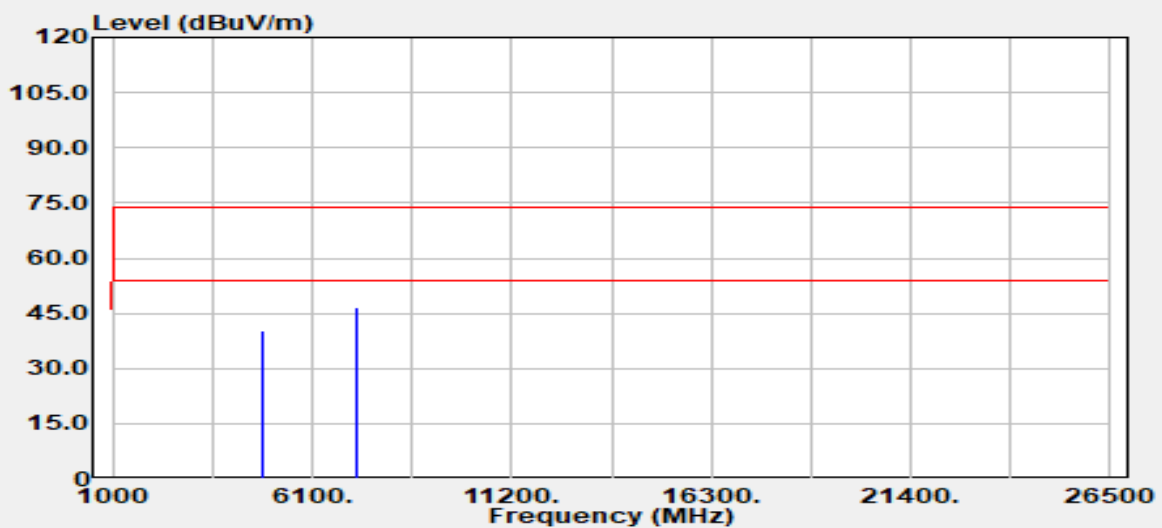

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	34.60	5.90	40.49	74.00	-33.51
4824.00	Average	26.43	5.90	32.33	54.00	-21.67
7236.00	Peak	33.48	13.31	46.79	74.00	-27.21
7236.00	Average	24.31	13.31	37.62	54.00	-16.38

Remark:


- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2211004434KR

Page: 177 / 187
Rev.: 00

Test Mode	IEEE 802.11ax HE20 Low CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

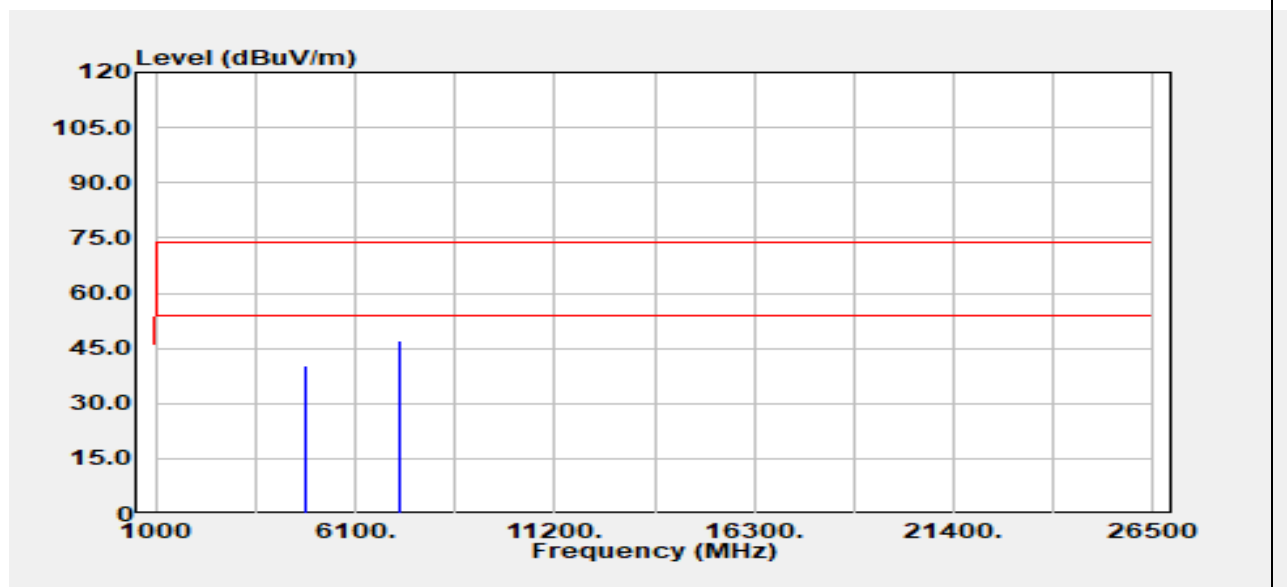


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4824.00	Peak	34.26	5.90	40.16	74.00	-33.84
4824.00	Average	25.50	5.90	31.40	54.00	-22.60
7236.00	Peak	33.86	13.31	47.18	74.00	-26.82
7236.00	Average	24.31	13.31	37.62	54.00	-16.38

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 Mid CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

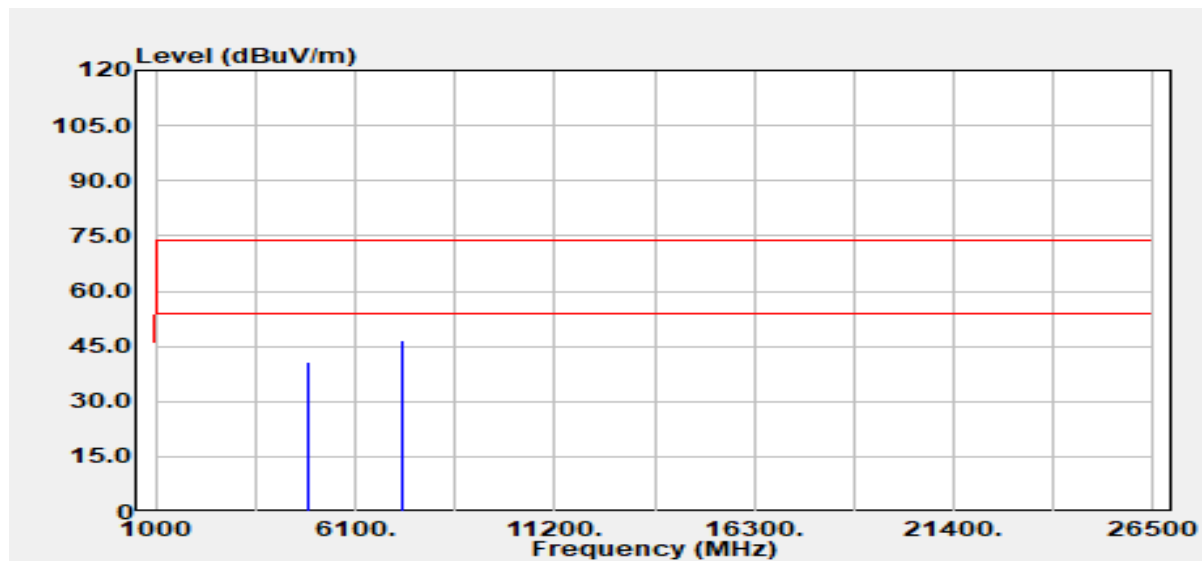

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	34.87	6.09	40.96	74.00	-33.04
4874.00	Average	25.97	6.09	32.06	54.00	-21.94
7311.00	Peak	33.40	13.33	46.73	74.00	-27.27
7311.00	Average	23.63	13.33	36.96	54.00	-17.04

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.




Report No.: TMWK2211004434KR

Page: 179 / 187

Rev.: 00

Test Mode	IEEE 802.11ax HE20 Mid CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

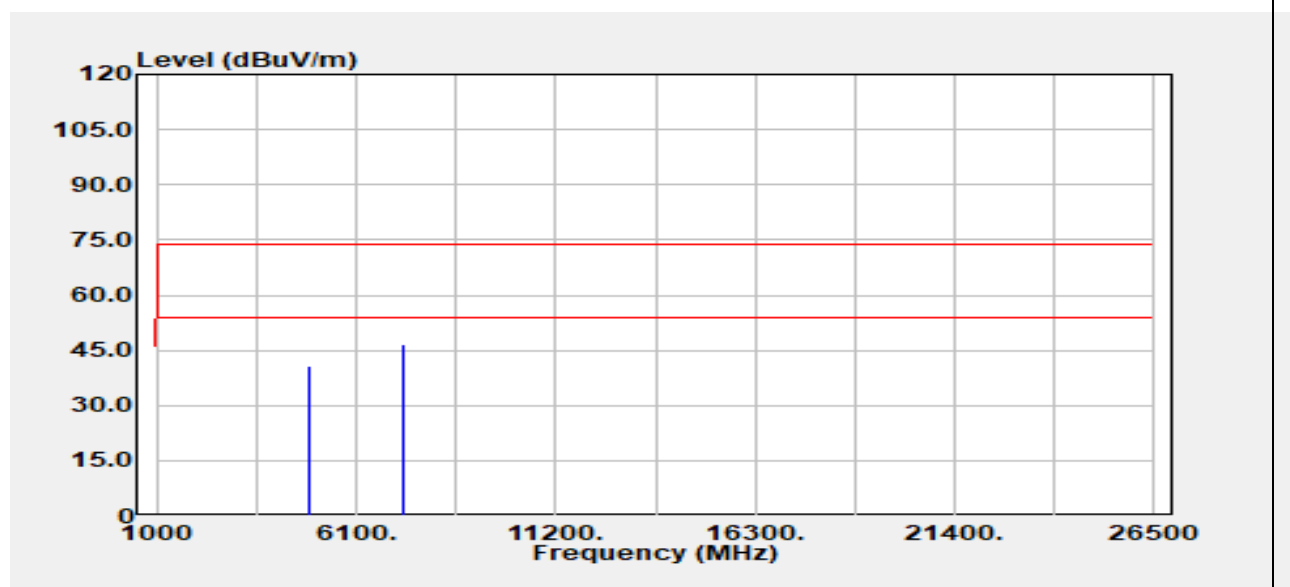


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	34.75	6.09	40.83	74.00	-33.17
4874.00	Average	25.27	6.09	31.36	54.00	-22.64
7311.00	Peak	33.41	13.33	46.75	74.00	-27.25
7311.00	Average	23.77	13.33	37.10	54.00	-16.90

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 High CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

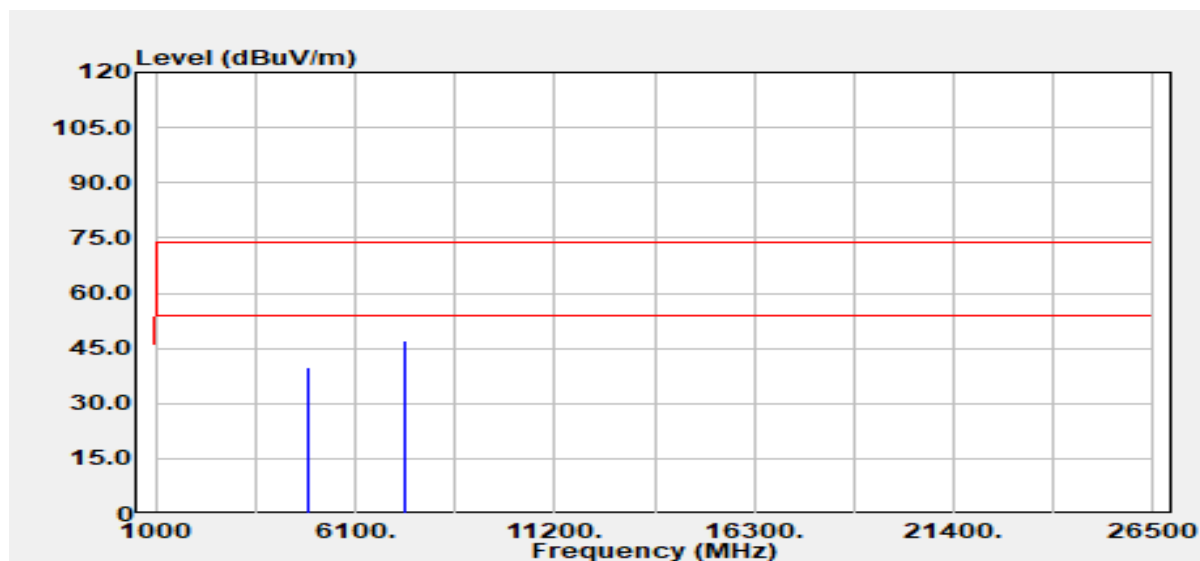


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	33.33	6.53	39.86	74.00	-34.14
4924.00	Average	25.22	6.53	31.75	54.00	-22.25
7386.00	Peak	33.72	13.33	47.05	74.00	-26.95
7386.00	Average	24.17	13.33	37.50	54.00	-16.50

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE20 High CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

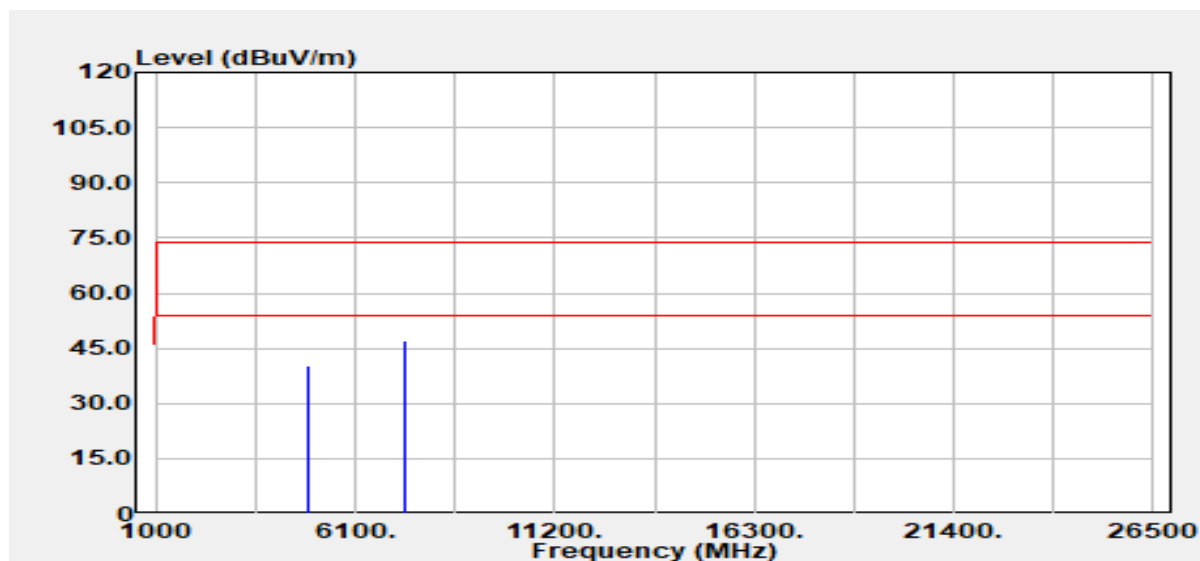


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4924.00	Peak	33.57	6.53	40.10	74.00	-33.90
4924.00	Average	25.08	6.53	31.61	54.00	-22.39
7386.00	Peak	33.69	13.33	47.02	74.00	-26.98
7386.00	Average	24.27	13.33	37.60	54.00	-16.40

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2211004434KR

Test Mode	IEEE 802.11ax HE40 Low CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

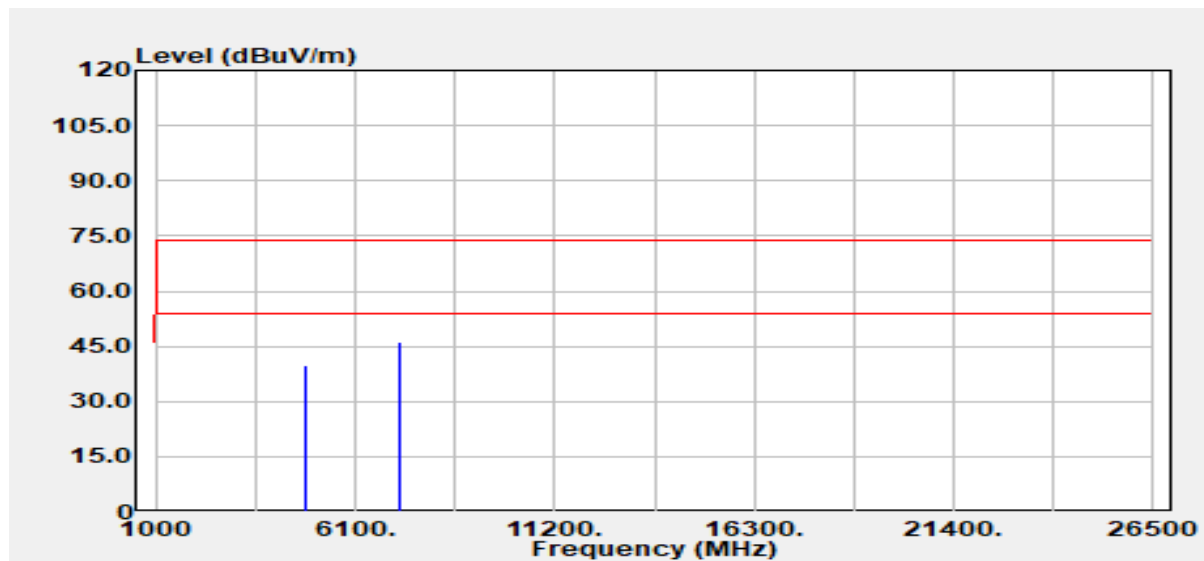


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.00	Peak	34.00	5.93	39.93	74.00	-34.07
4844.00	Average	25.50	5.93	31.43	54.00	-22.57
7266.00	Peak	32.95	13.33	46.28	74.00	-27.72
7266.00	Average	24.14	13.33	37.47	54.00	-16.53

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2211004434KR

Test Mode	IEEE 802.11ax HE40 Low CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

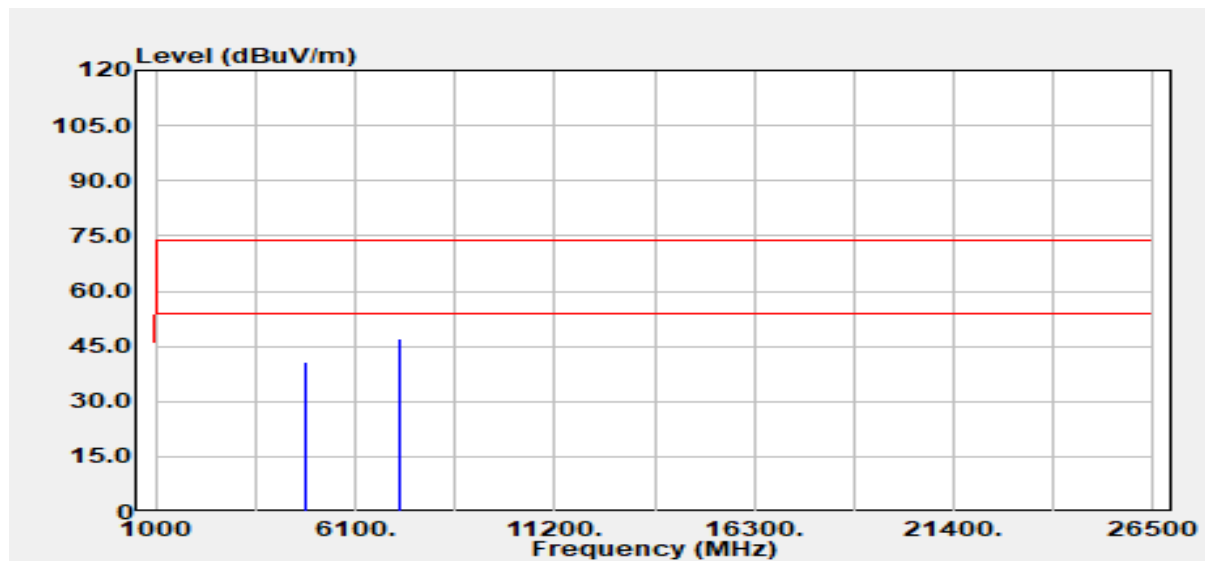


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4844.00	Peak	34.90	5.93	40.83	74.00	-33.17
4844.00	Average	25.59	5.93	31.52	54.00	-22.48
7266.00	Peak	33.95	13.33	47.28	74.00	-26.72
7266.00	Average	24.32	13.33	37.65	54.00	-16.35

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2211004434KR

Test Mode	IEEE 802.11ax HE40 Mid CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

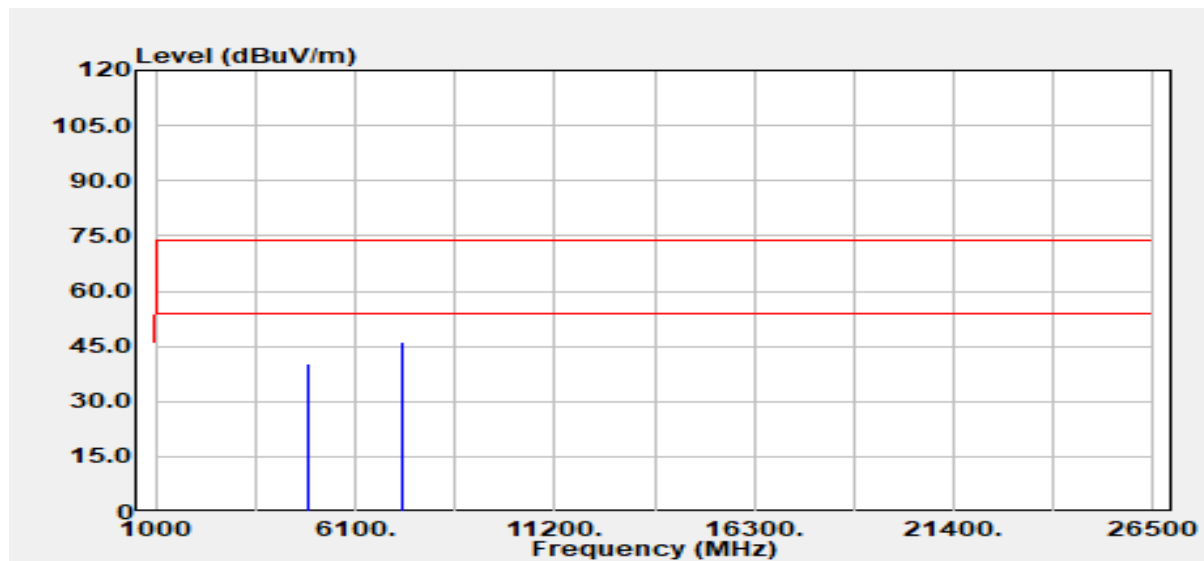

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	34.28	6.09	40.37	74.00	-33.63
4874.00	Average	25.53	6.09	31.62	54.00	-22.38
7311.00	Peak	32.73	13.33	46.06	74.00	-27.94
7311.00	Average	23.87	13.33	37.20	54.00	-16.80

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.




Report No.: TMWK2211004434KR

Page: 185 / 187

Rev.: 00

Test Mode	IEEE 802.11ax HE40 Mid CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

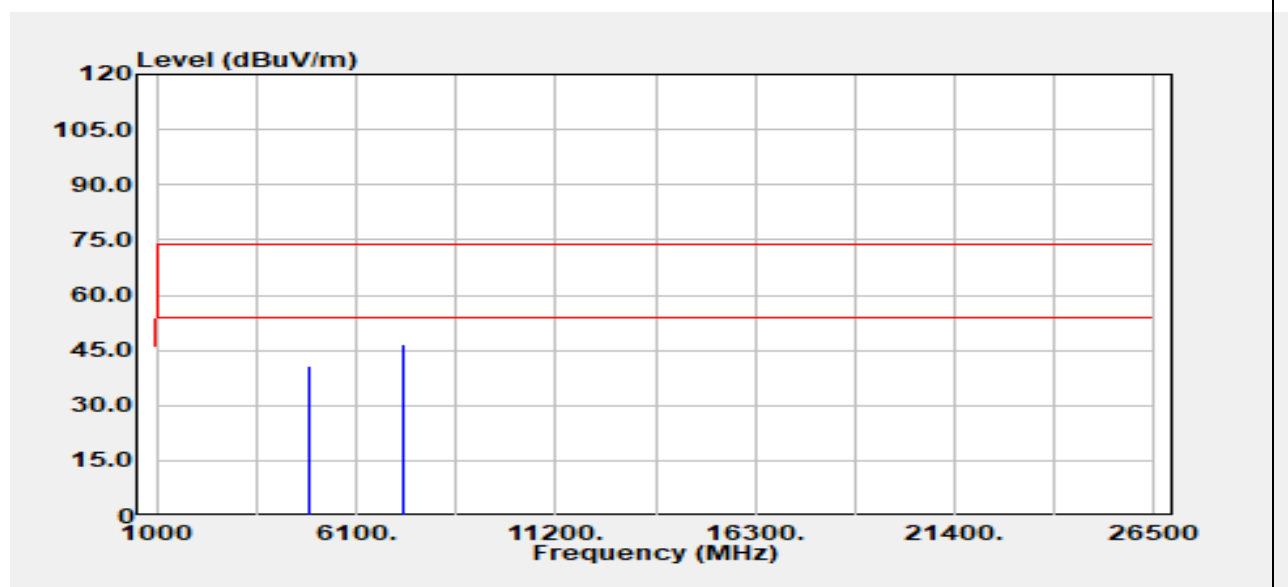


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4874.00	Peak	34.77	6.09	40.86	74.00	-33.14
4874.00	Average	25.24	6.09	31.33	54.00	-22.67
7311.00	Peak	33.26	13.33	46.59	74.00	-27.41
7311.00	Average	23.74	13.33	37.07	54.00	-16.93

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 High CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Vertical	Test Engineer	Tony Chao
Detector	Peak / Average		

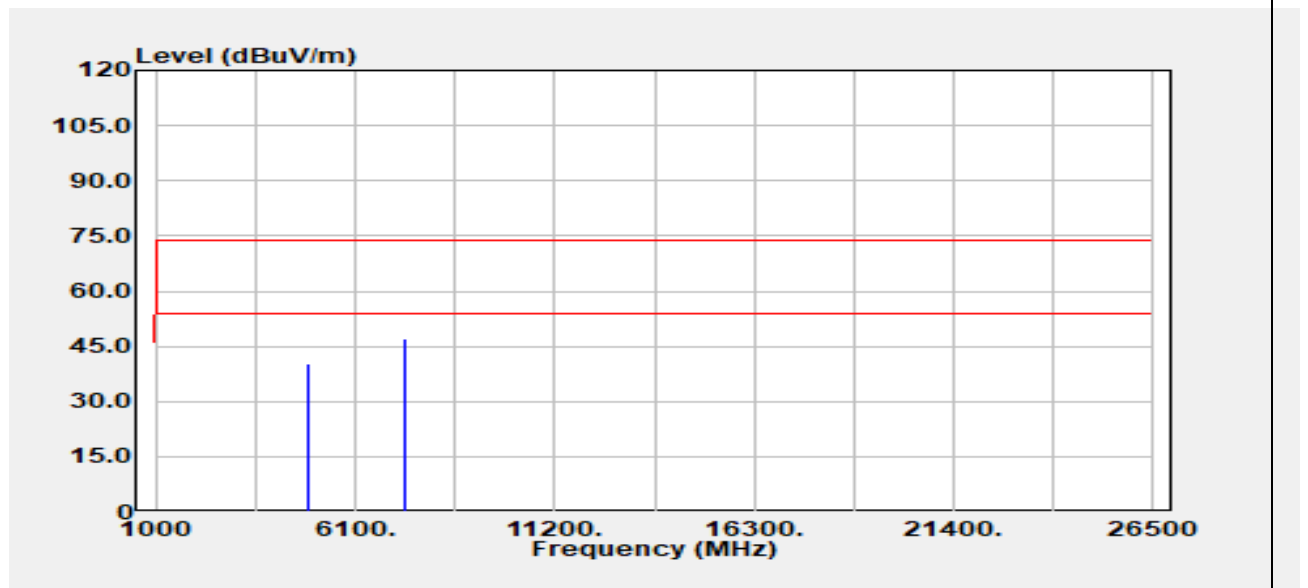


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.00	Peak	34.14	6.30	40.44	74.00	-33.57
4904.00	Average	25.55	6.30	31.85	54.00	-22.15
7356.00	Peak	33.56	13.40	46.95	74.00	-27.05
7356.00	Average	23.74	13.40	37.14	54.00	-16.86

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11ax HE40 High CH	Temp/Hum	24.3(°C)/ 62%RH
Test Item	Harmonic	Test Date	November 16, 2022
Polarize	Horizontal	Test Engineer	Tony Chao
Detector	Peak / Average		

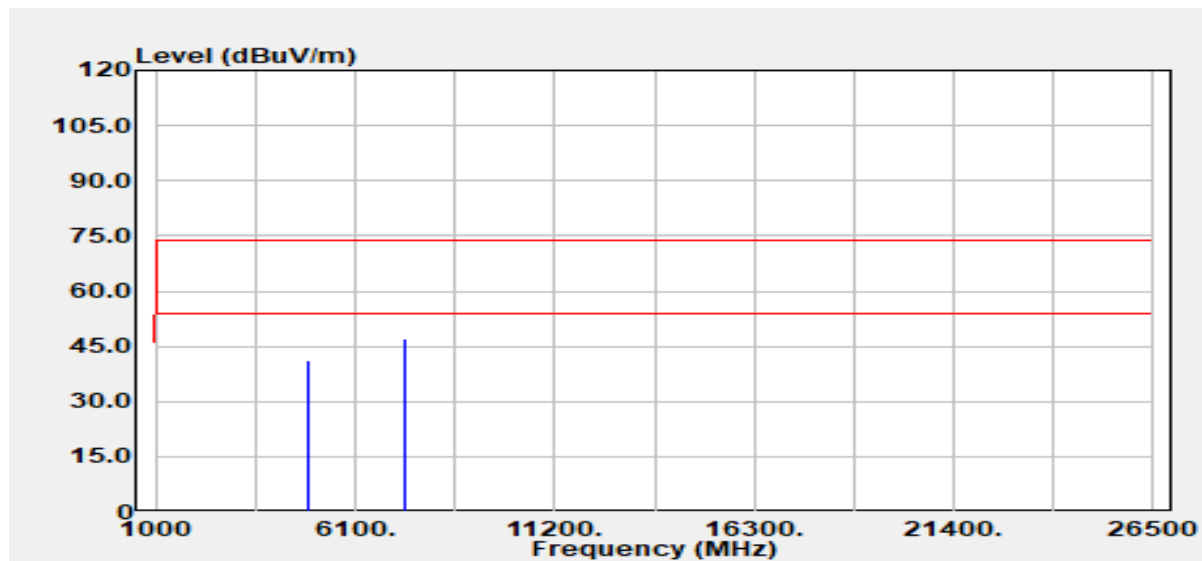

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dBμV)	Factor (dB)	Actual FS (dBμV/m)	Limit @3m (dBμV/m)	Margin (dB)
4904.00	Peak	34.87	6.30	41.17	74.00	-32.83
4904.00	Average	25.10	6.30	31.40	54.00	-22.60
7356.00	Peak	33.50	13.40	46.90	74.00	-27.10
7356.00	Average	23.90	13.40	37.30	54.00	-16.70

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- End of Test Report -