



FCC TEST REPORT

FCC ID: 2AS5B-P102

On Behalf of

Aisee Technology Inc

IR thermal imaging

Model No.: AISEEIR (P102+AISEEBOX)

Prepared for : Aisee Technology Inc
Address : 3086 Deluna Dr. Rancho Palos Verdes, CA 90275 United States

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2507223-C01-R10
Date of Receipt : August 15, 2025
Date of Test : August 15, 2025 - August 27, 2025
Date of Report : August 27, 2025
Version Number : V0

TABLE OF CONTENTS

Description	Page
1 TEST SUMMARY	5
1.1 MEASUREMENT UNCERTAINTY	5
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 TEST MODE.....	7
2.3 TEST FACILITY	7
2.4 DESCRIPTION OF SUPPORT UNITS.....	7
2.5 DEVIATION FROM STANDARDS	8
2.6 ABNORMALITIES FROM STANDARD CONDITIONS	8
2.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
2.8 ADDITIONAL INSTRUCTIONS	8
2.9 TEST CONDITIONS.....	8
3 TEST INSTRUMENTS LIST	9
4 TEST RESULTS AND MEASUREMENT DATA	10
4.1 ANTENNA REQUIREMENT:	10
4.2 CONDUCTED EMISSIONS	11
4.3 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	12
4.4 MAXIMUM CONDUCTED OUTPUT POWER.....	44
4.5 POWER SPECTRAL DENSITY	57
4.6 BAND EDGE	69
4.7 RADIATED EMISSION	76
4.8 FREQUENCY STABILITY	83
5 PHOTOS OF TEST SETUP.....	84
6 PHOTOS OF EUT	84

TEST REPORT DECLARATION

Applicant : Aisee Technology Inc
Address : 3086 Deluna Dr. Rancho Palos Verdes, CA 90275 United States
Manufacturer : Wuhan Xuanyuan Idrive Technology CO., Ltd
Address : NO.4 Building, No.8 Deyi Road, East Lake Development Zone, Wuhan, China
EUT Description : IR thermal imaging
(A) Model No. : AISEEIR (P102+AISEEBOX)
(B) Trademark : **Aisee**

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSI C63.10:2013

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Jensen Wang

Test Engineer

Jensen Wang

Approved by (name + signature).....:

Simple Guan

Project Manager

Simple Guan

Date of issue.....:

August 27, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	August 27, 2025	Initial released Issue	Jensen Wang



1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10	N/A
-6dB Occupied bandwidth	Section 15.407 (e)	PASS
Maximum Conducted Output Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10	PASS
Band Edge	15.205, RSS-247 Issue 2, ANSI C63.10	PASS
Frequency Stability	15.407(f), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.
4. Measurement-method usage KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.1 Measurement Uncertainty

Item	Uncertainty
Uncertainty for Power Line Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31dB(Polarize: V)
	4.30dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Conducted-Spurious Emission	1.26dB

2 General Information

2.1 General Description of EUT

EUT Name : IR thermal imaging
 Model : AISEEIR (P102+AISEEBOX)
 Diff : N/A
 Test Voltage : DC 12V from DC POWER

Radio Technology : 5G WIFI

Operation frequency : 802.11a/802.11ac20/802.11n(HT20)/802.11ax20: 5745-5825MHz
 802.11ac40/802.11n(HT40)/802.11ax40: 5755-5795MHz
 802.11ac80/802.11ax80: 5775MHz
 Channel separation : 20MHz for 802.11a/802.11ac20/802.11n(HT20)/802.11ax20
 40MHz for 802.11ac40/ 802.11n(HT40)/802.11ax40
 80MHz for 802.11ac80/802.11ax80
 Modulation technology: : IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK)
 IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK)
 IEEE 802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)
 IEEE 802.11ax: OFDMA (64QAM,16QAM,QPSK,BPSK,256QAM,1024QAM)
 Antenna Type : Internal antenna , Maximum Gain is 2.29dBi.
 PMN : N/A
 HVIN : N/A
 Software version : V1.0
 Hardware version : V1.0
 FVIN :
 Note : 1.Antenna information is provided by applicant.
 Testing lab is not responsible for the accuracy of the information.
 2.802.11ax supports only full RU.

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158

2.4 Description of Support Units

Accessories 1 : IR Thermal Camera
Manufacturer : Wuhan Xuanyuan Idrive Technology CO., Ltd
Model : P102
Rating : N/A

Accessories 2 : Monitor
Manufacturer : SKYWORTH
Model : 28U1
Rating : N/A

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

2.9 Test Conditions



Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

3 Test Instruments list


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835825	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK20220329 01	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118 G-45	SK20200108 01	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	20221125163 8	/	2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

4 Test results and Measurement Data

4.1 Antenna requirement:

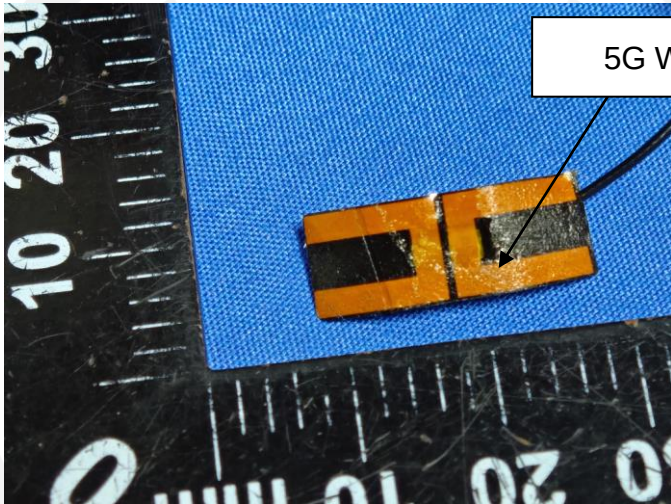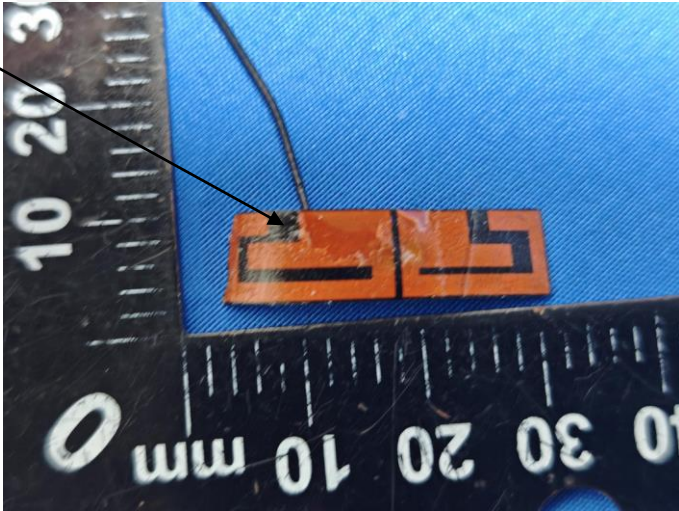
Standard requirement:	FCC Part15 C Section 15.203, RSS-GEN(6.8)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
Internal antenna, Maximum Gain is 2.29dBi, for 5745-5825MHz  5G WiFi ANT  2.4G ANT	

4.2 Conducted Emissions

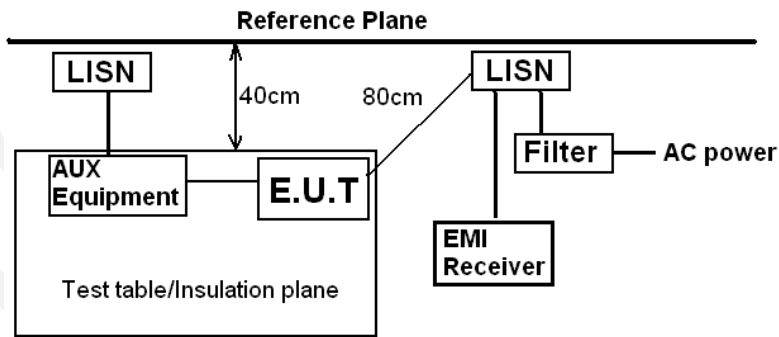Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen §8.8		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test setup:	 Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 3.0 for details		
Test mode:	Refer to section 2.2 for details		
Test results:	N/A		

Note: 1. This EUT is powered by a car power supply, so this item is not tested

4.3 Emission Bandwidth and 99% Occupied Bandwidth


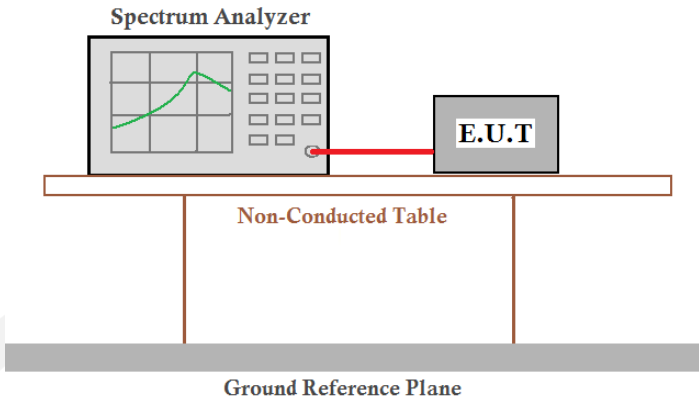
Test Requirement:	FCC Part15 E Section 15.407, RSS-Gen §6.7; RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane. The Spectrum Analyzer screen shows a frequency spectrum with a peak.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass



Note: Note: Both antennas have been tested and only the worst data of antenna 1 is shown.



Measurement Data:



Band 4 (5725-5850 MHz):



Condition	Antenna	Mode	Frequency(MHz)	6dB_Emission_Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5745.00	16.380	0.500	Pass
NVNT	ANT1	802.11a	5785.00	16.324	0.500	Pass
NVNT	ANT1	802.11a	5825.00	15.514	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	17.053	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	17.092	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	16.774	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	17.212	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	16.905	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	16.548	0.500	Pass
NVNT	ANT1	802.11ax(HE20)	5745.00	18.368	0.500	Pass
NVNT	ANT1	802.11ax(HE20)	5785.00	18.472	0.500	Pass
NVNT	ANT1	802.11ax(HE20)	5825.00	18.041	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	35.177	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	35.140	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	35.191	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	35.186	0.500	Pass
NVNT	ANT1	802.11ax(HE40)	5755.00	36.481	0.500	Pass
NVNT	ANT1	802.11ax(HE40)	5795.00	35.166	0.500	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	75.243	0.500	Pass
NVNT	ANT1	802.11ax(HE80)	5775.00	76.159	0.500	Pass

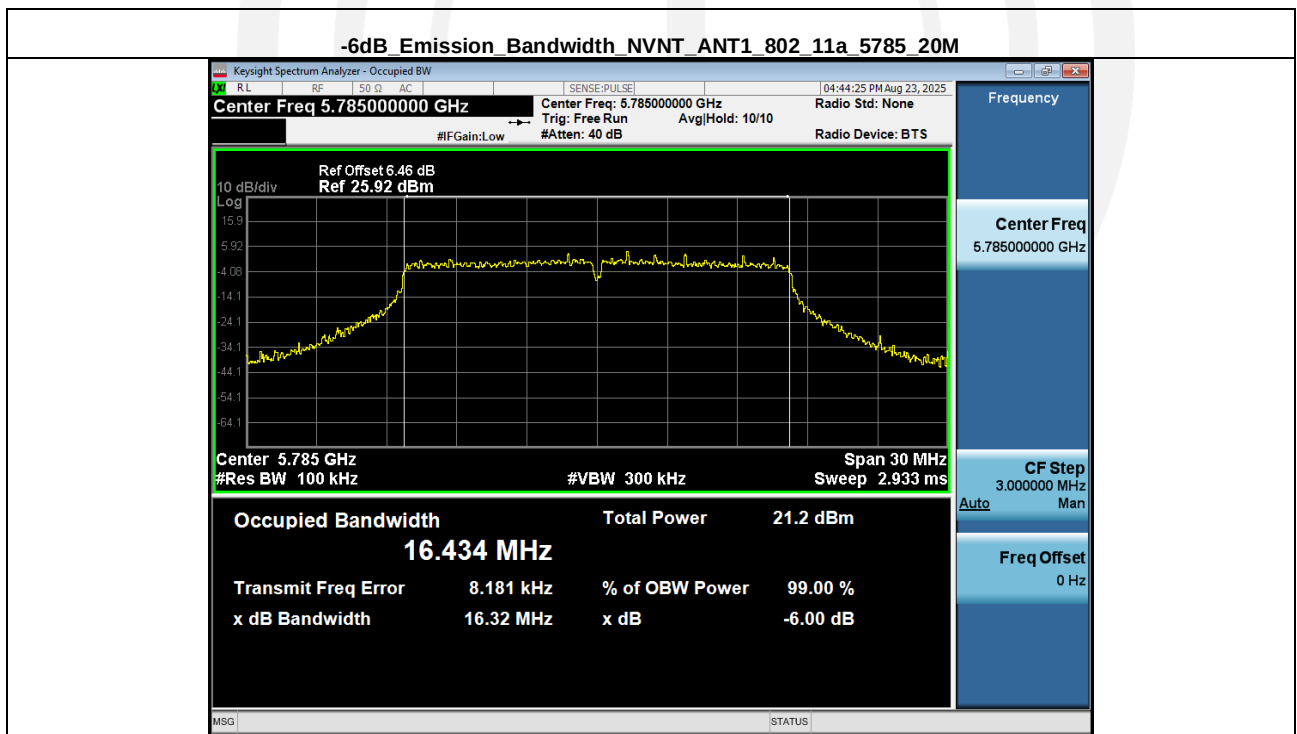
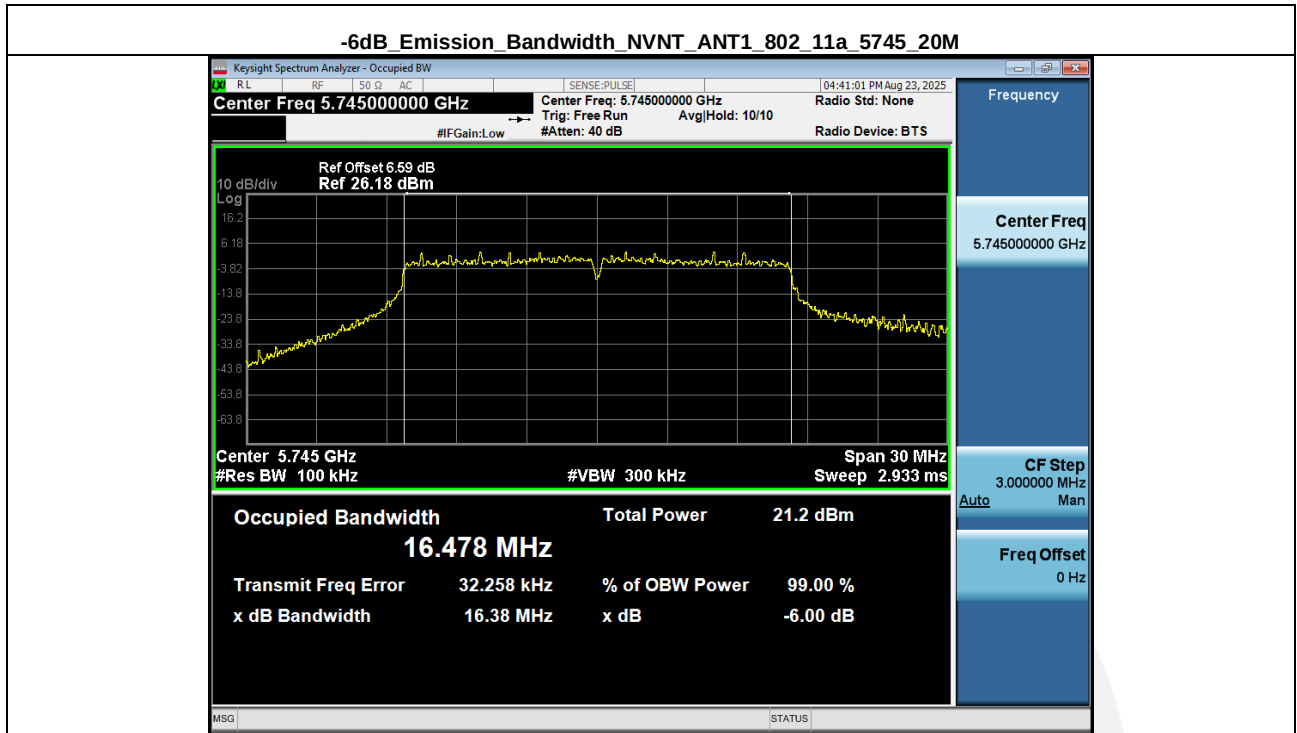


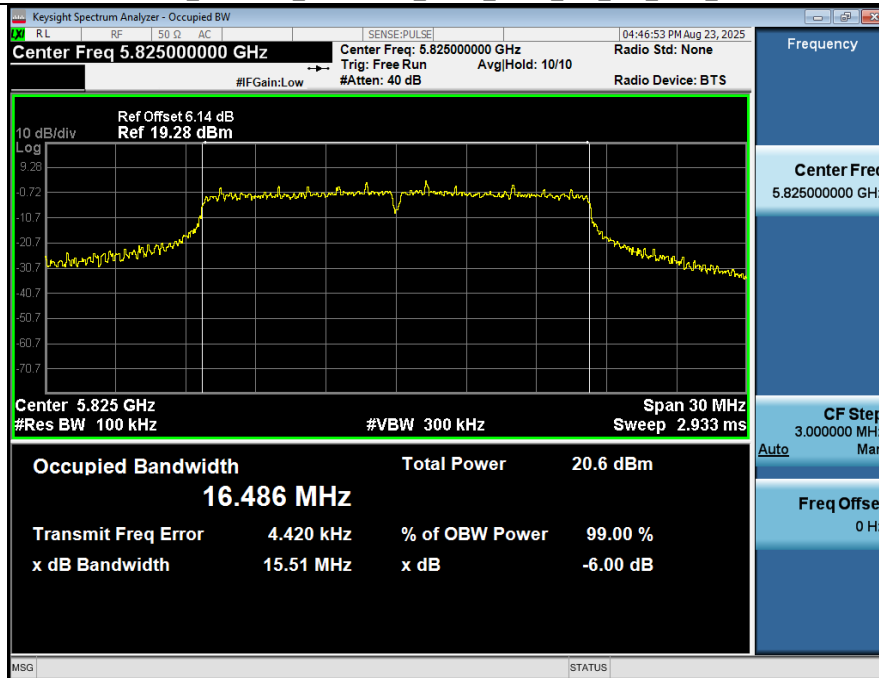
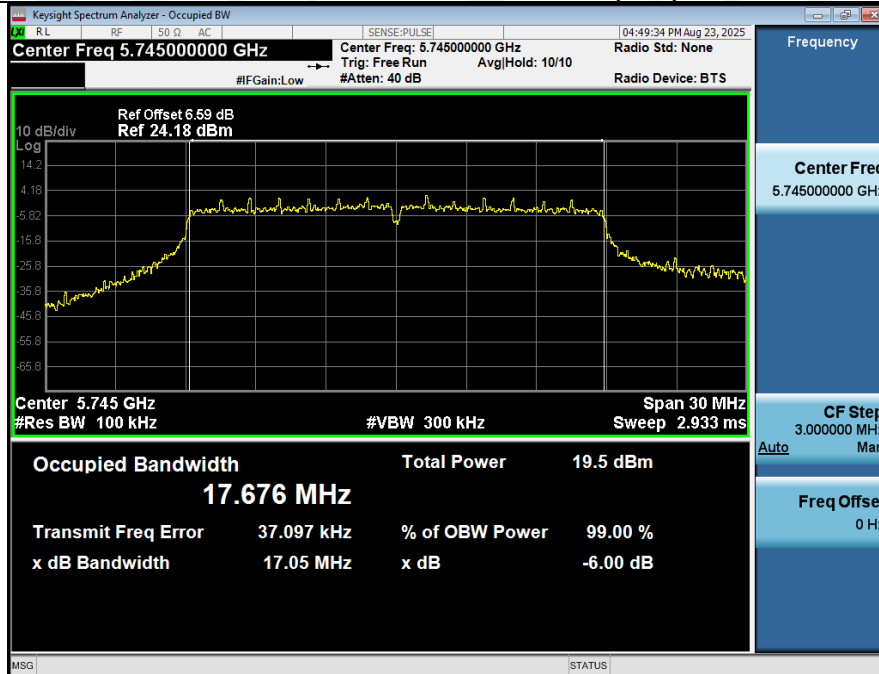
-6dB Emission Bandwidth_NVNT_ANT1_802_11a_5825_20M**-6dB Emission Bandwidth_NVNT_ANT1_802_11n(HT20)_5745_20M**

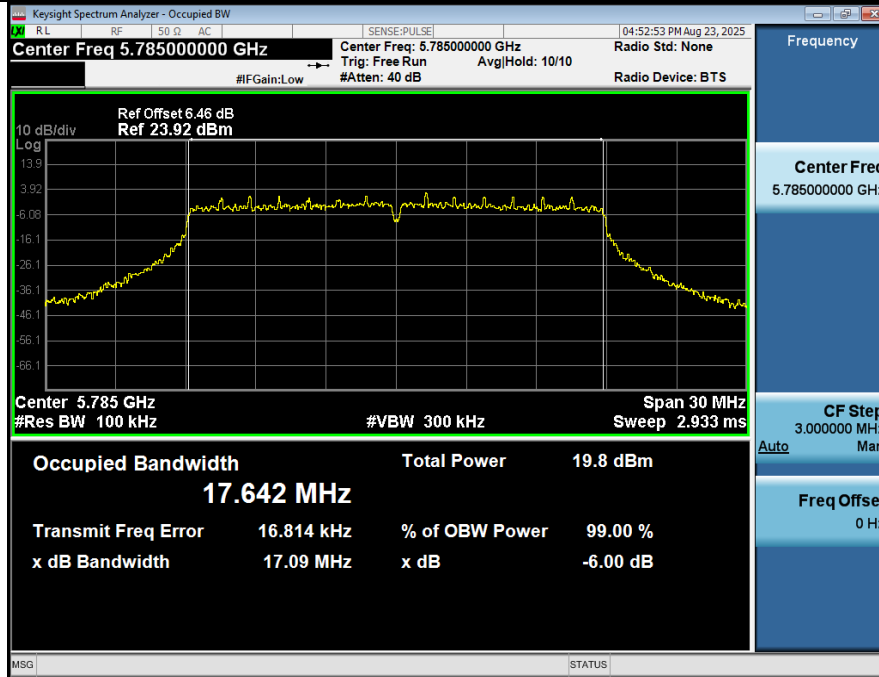
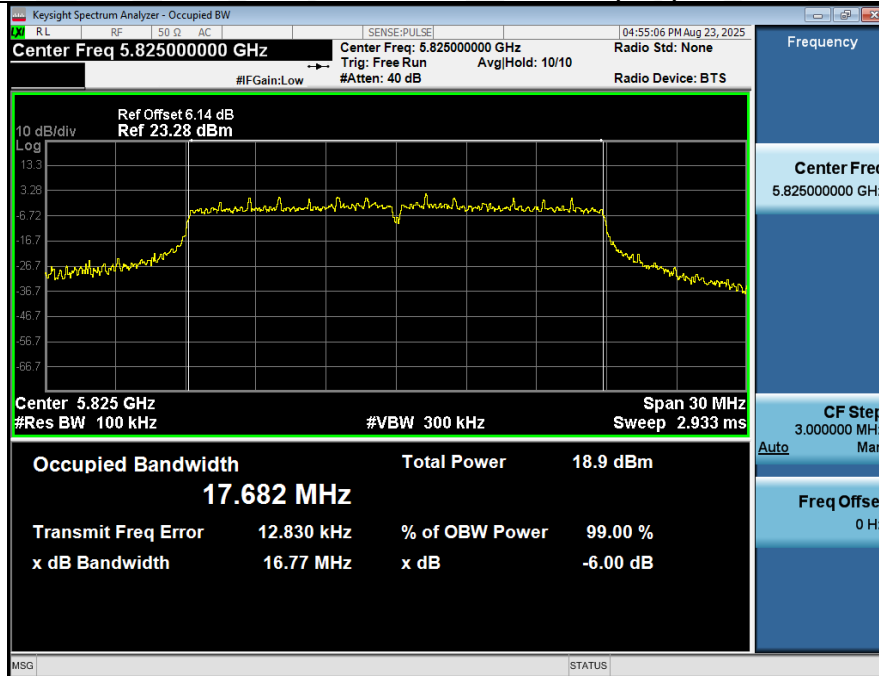
-6dB Emission Bandwidth NVNT_ANT1_802_11n(HT20)_5785_20M**-6dB Emission Bandwidth NVNT_ANT1_802_11n(HT20)_5825_20M**

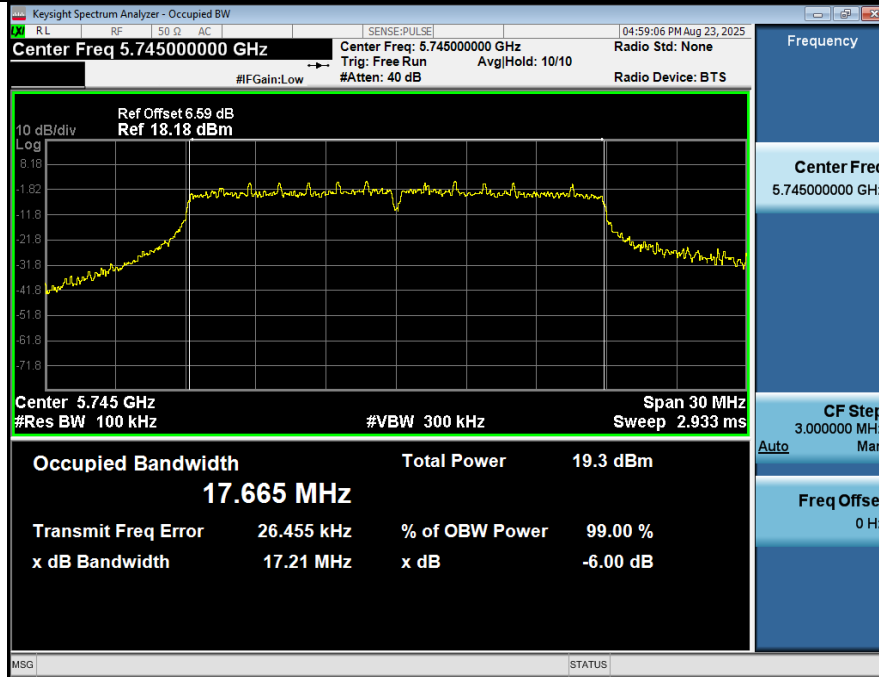
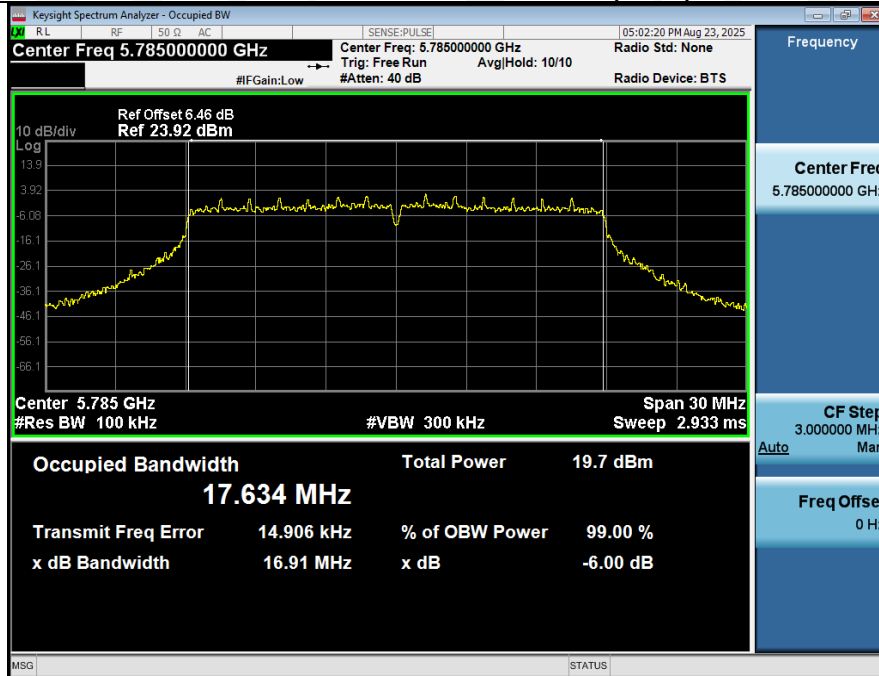
-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT20)_5745_20M**-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT20)_5785_20M**

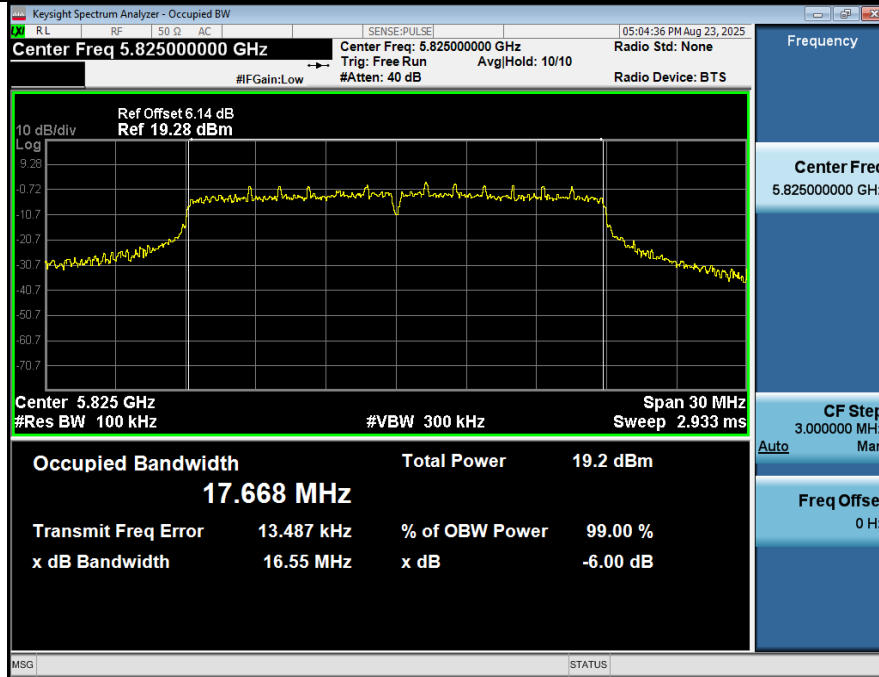
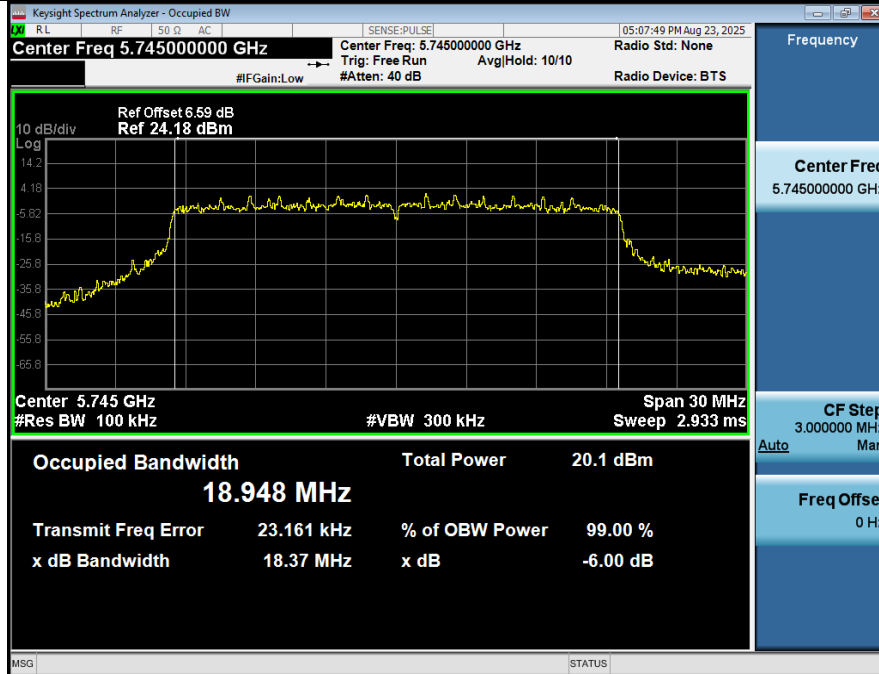
-6dB Emission Bandwidth NVNT ANT1 802 11ac(VHT20) 5825 20M**-6dB Emission Bandwidth NVNT ANT1 802 11ax(HE20) 5745 20M**

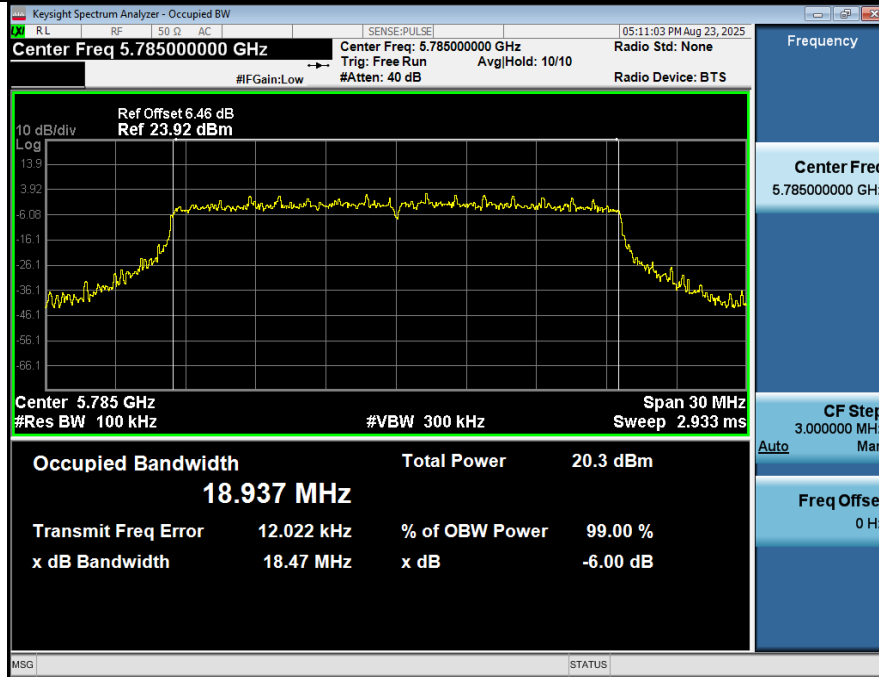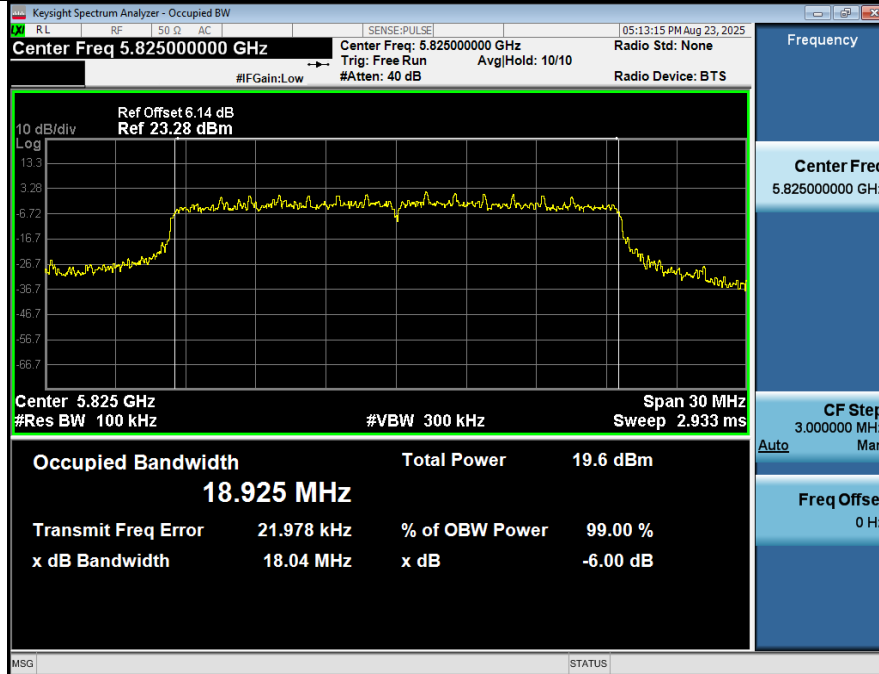-6dB Emission Bandwidth NVNT_ANT1_802_11ax(HE20)_5785_20M**-6dB Emission Bandwidth NVNT_ANT1_802_11ax(HE20)_5825_20M**

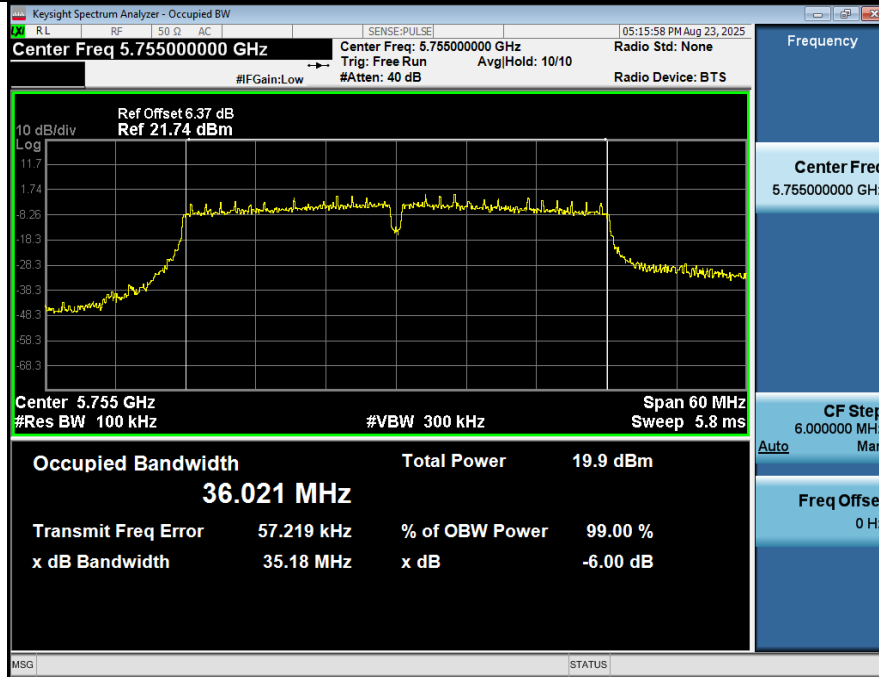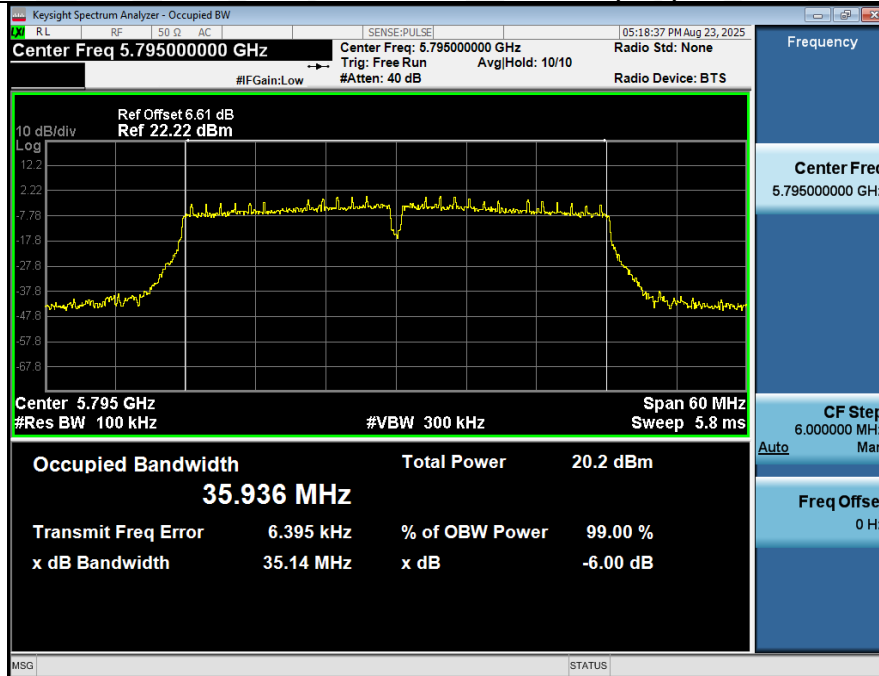-6dB Emission Bandwidth NVNT_ANT1_802_11n(HT40)_5755_40M**-6dB Emission Bandwidth NVNT_ANT1_802_11n(HT40)_5795_40M**

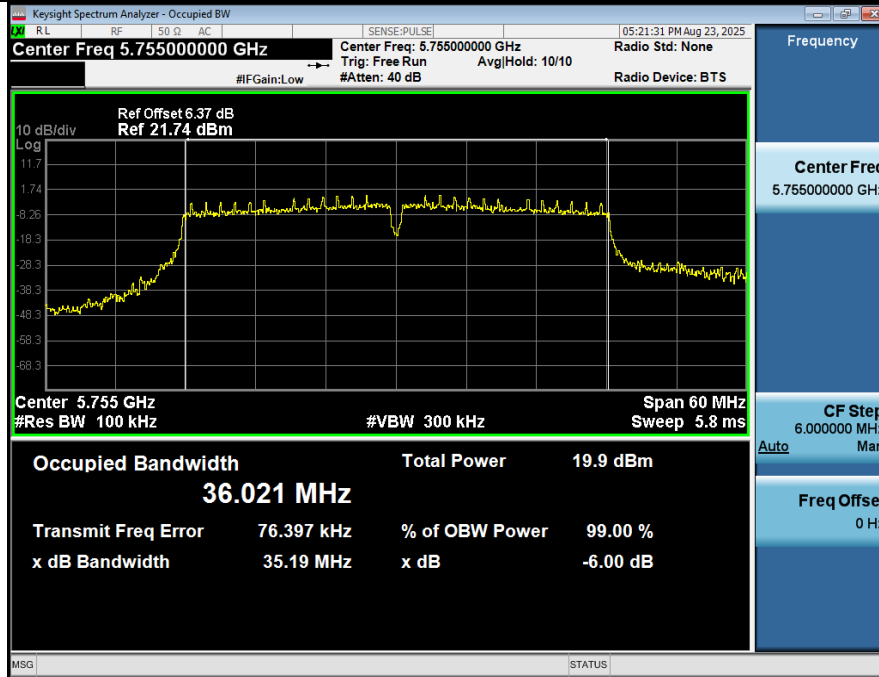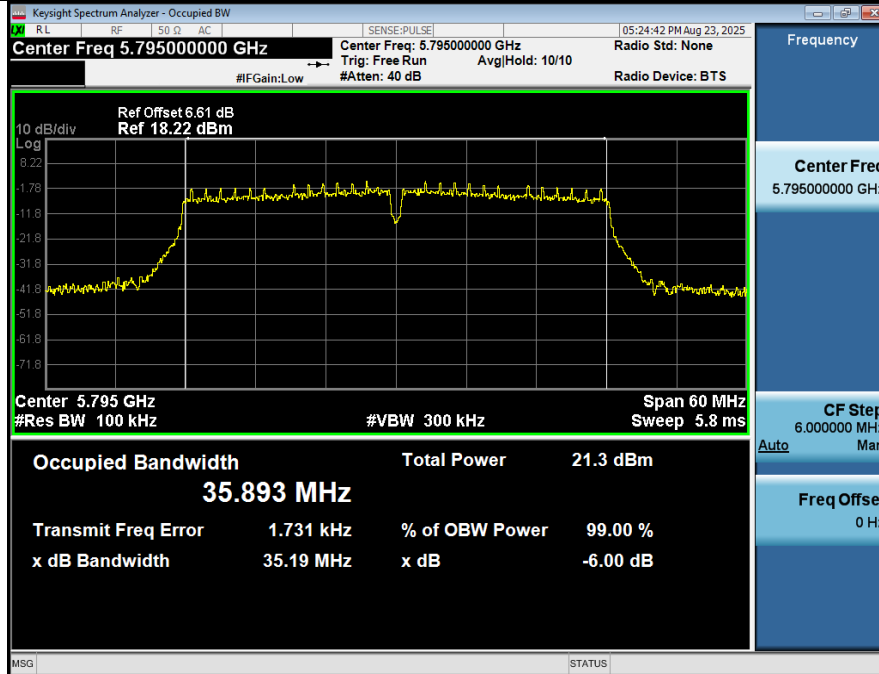
-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT40)_5755_40M**-6dB Emission Bandwidth NVNT_ANT1_802_11ac(VHT40)_5795_40M**

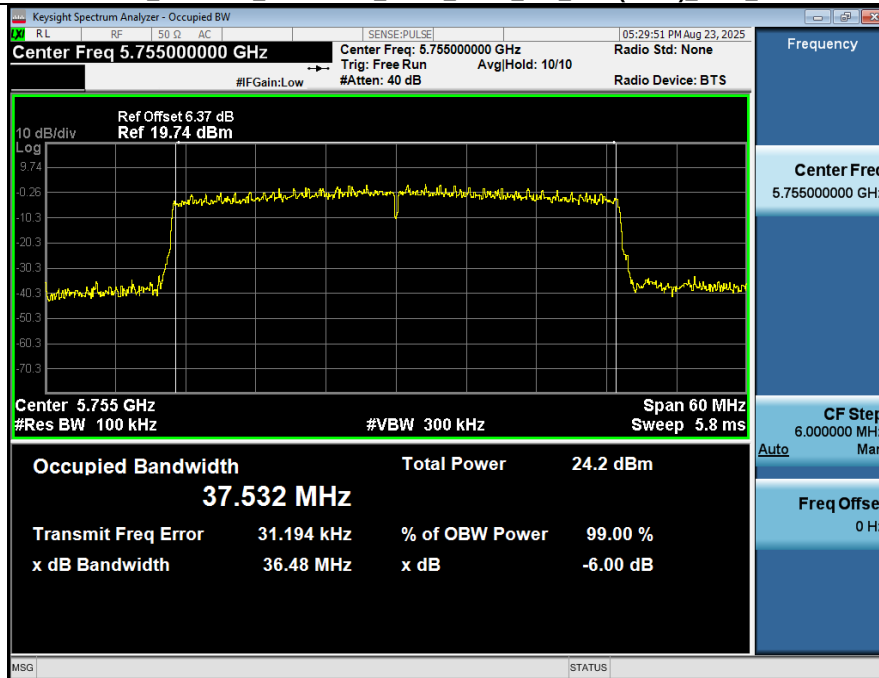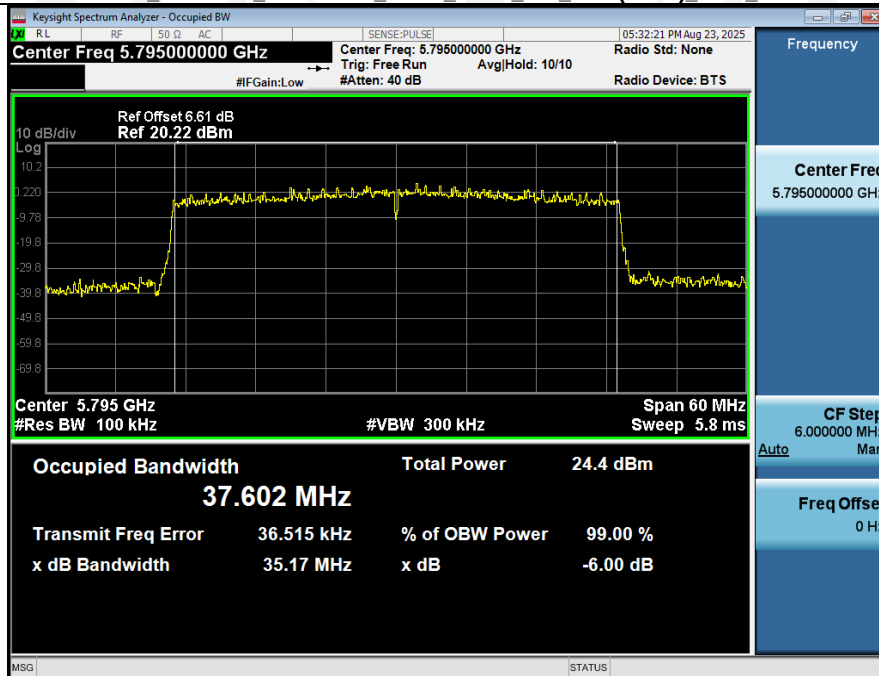-6dB Emission Bandwidth NVNT_ANT1_802_11ax(HE40) 5755 40M**-6dB Emission Bandwidth NVNT_ANT1_802_11ax(HE40) 5795 40M**

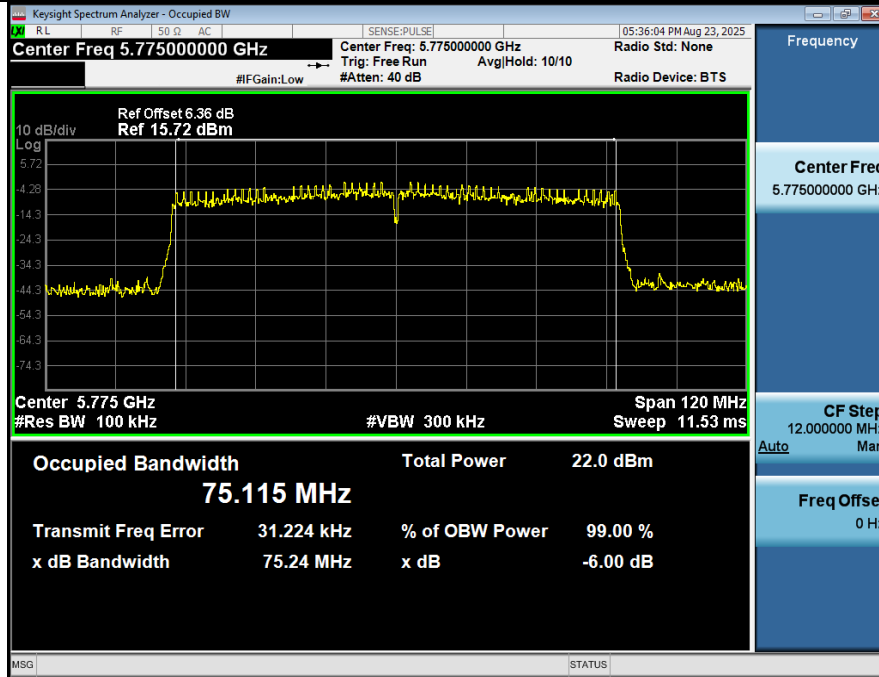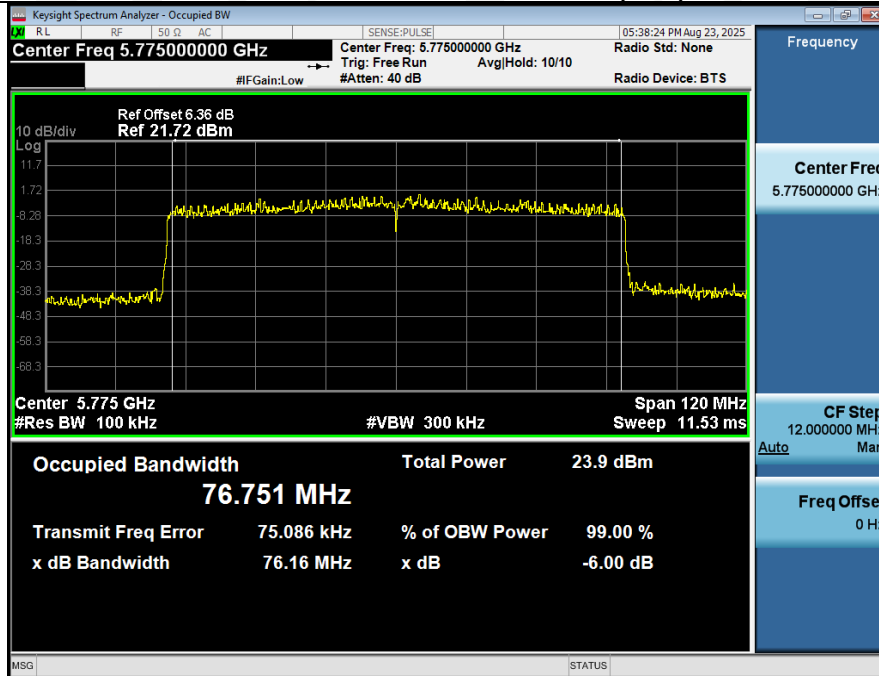
-6dB Emission Bandwidth NVNT ANT1_802_11ac(VHT80)_5775_80M**-6dB Emission Bandwidth NVNT ANT1_802_11ax(HE80)_5775_80M**

Condition	Antenna	Modulation	Frequency(MHz)	- 26dB Emission Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5745.00	24.70	16.91
NVNT	ANT1	802.11a	5785.00	20.41	16.78
NVNT	ANT1	802.11a	5825.00	25.64	16.94
NVNT	ANT1	802.11n(HT20)	5745.00	25.88	18.10
NVNT	ANT1	802.11n(HT20)	5785.00	21.68	17.98
NVNT	ANT1	802.11n(HT20)	5825.00	25.62	18.11
NVNT	ANT1	802.11ac(VHT20)	5745.00	24.86	18.11
NVNT	ANT1	802.11ac(VHT20)	5785.00	21.95	18.04
NVNT	ANT1	802.11ac(VHT20)	5825.00	23.65	18.05
NVNT	ANT1	802.11ax(HE20)	5745.00	23.95	19.16
NVNT	ANT1	802.11ax(HE20)	5785.00	21.84	19.10
NVNT	ANT1	802.11ax(HE20)	5825.00	24.47	19.15
NVNT	ANT1	802.11n(HT40)	5755.00	45.79	36.55
NVNT	ANT1	802.11n(HT40)	5795.00	40.54	36.29
NVNT	ANT1	802.11ac(VHT40)	5755.00	49.96	36.45
NVNT	ANT1	802.11ac(VHT40)	5795.00	40.34	36.30
NVNT	ANT1	802.11ax(HE40)	5755.00	39.38	37.70
NVNT	ANT1	802.11ax(HE40)	5795.00	39.52	37.62
NVNT	ANT1	802.11ac(VHT80)	5775.00	79.87	75.32
NVNT	ANT1	802.11ax(HE80)	5775.00	79.89	76.87


99%_OCB_NVNT_ANT1_802_11a_5745

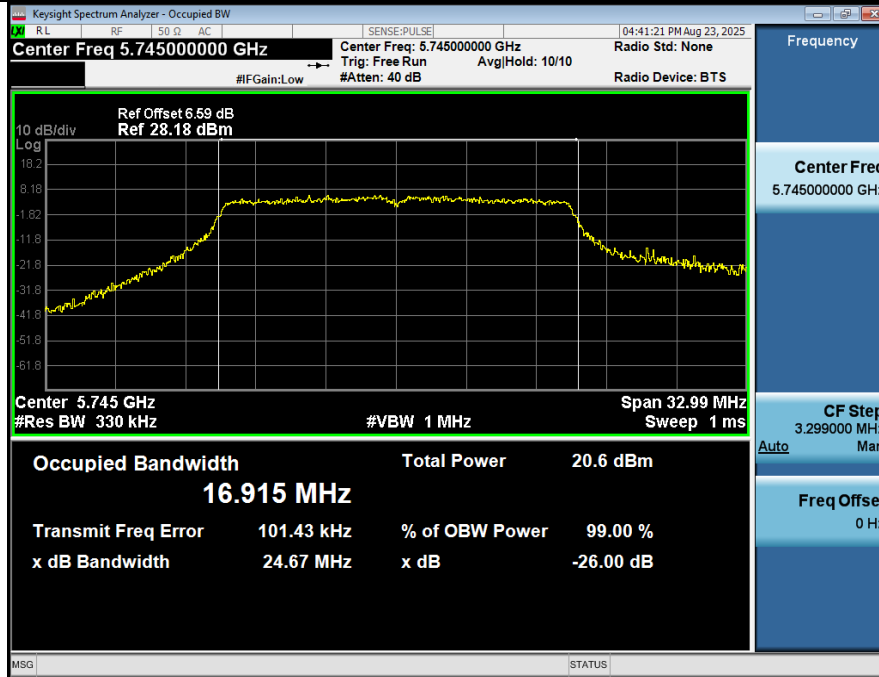


-26BW_NVNT_ANT1_802_11a_5745

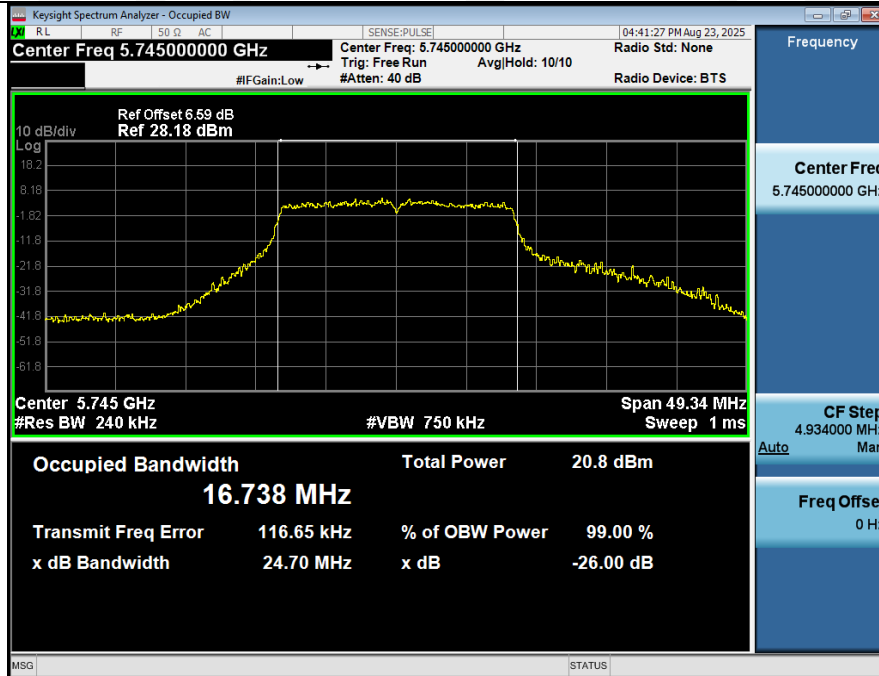


99%_OCB_NVNT_ANT1_802_11a_5785

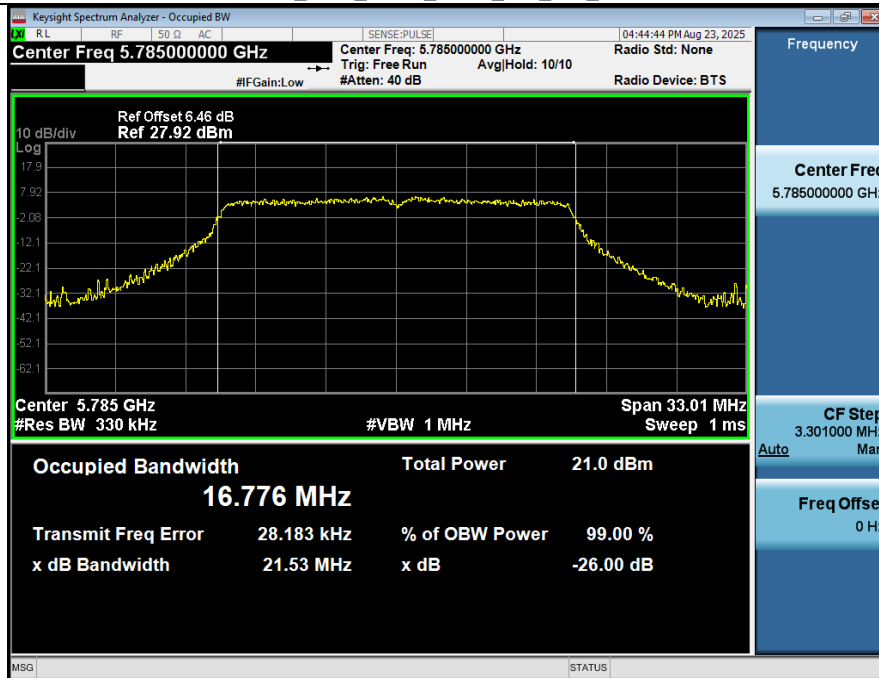


-26BW_NVNT_ANT1_802_11a_5785

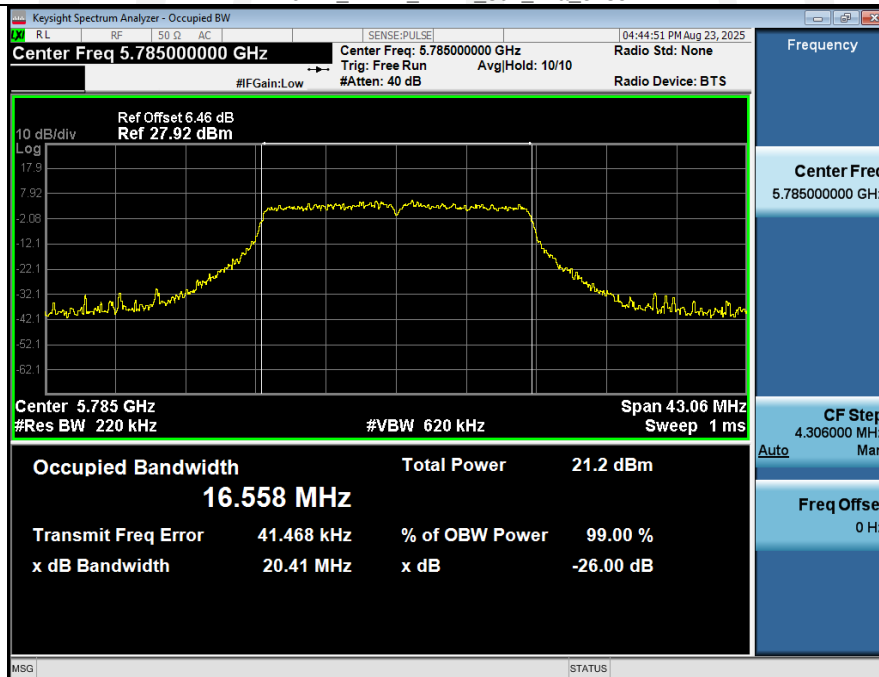


99%_OCB_NVNT_ANT1_802_11a_5825

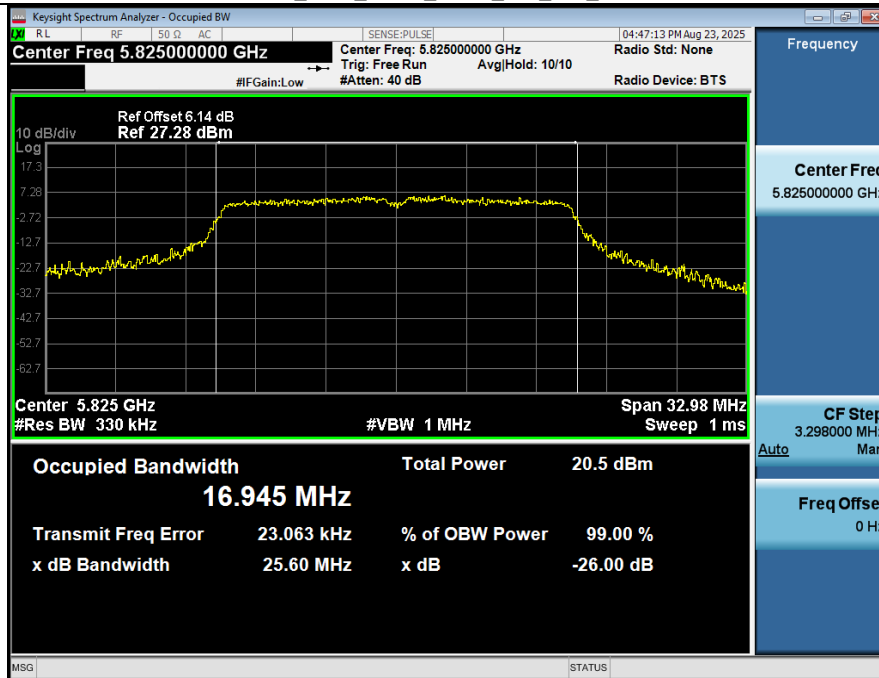


-26BW_NVNT_ANT1_802_11a_5825

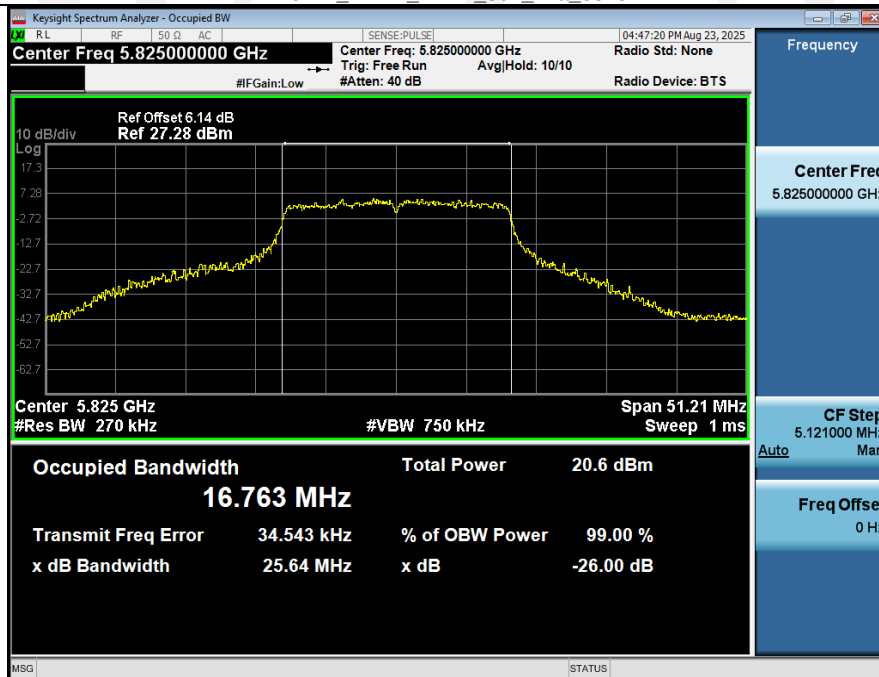

99% OCB NVNT ANT1_802_11n(HT20)_5745

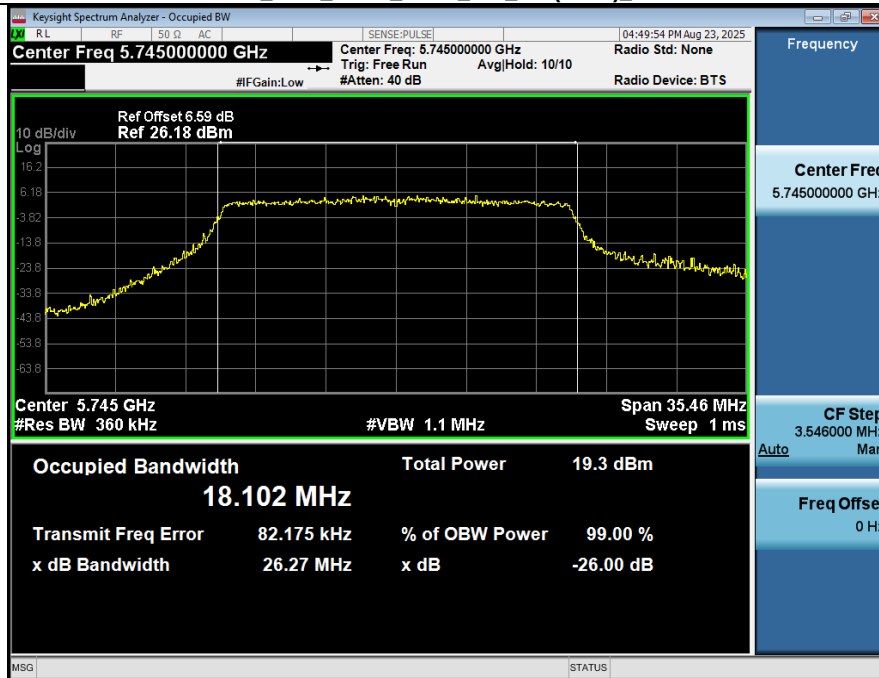


-26BW NVNT ANT1_802_11n(HT20)_5745

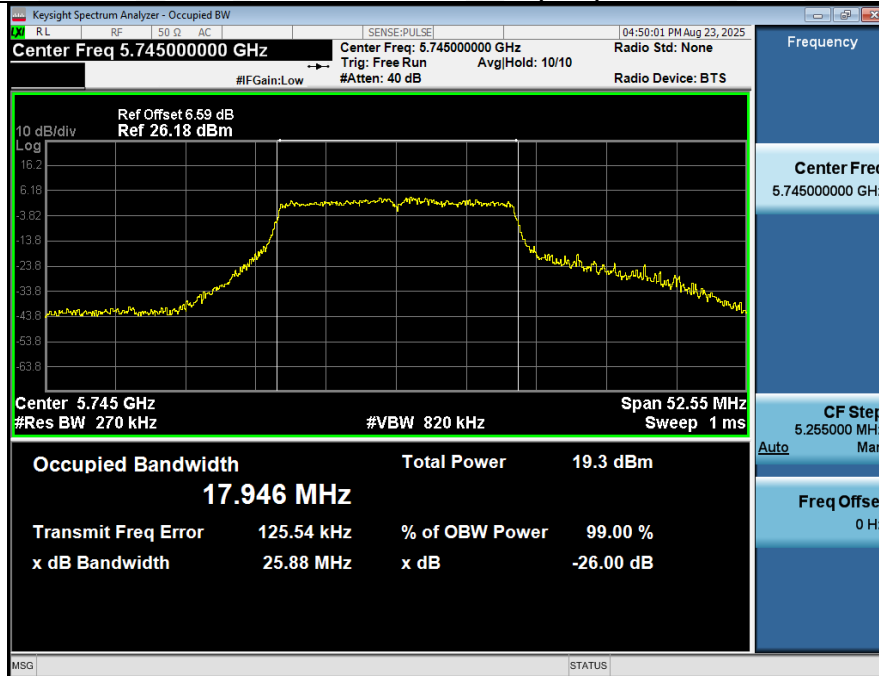


99% OCB NVNT ANT1_802_11n(HT20)_5785




-26BW NVNT ANT1_802_11n(HT20)_5785

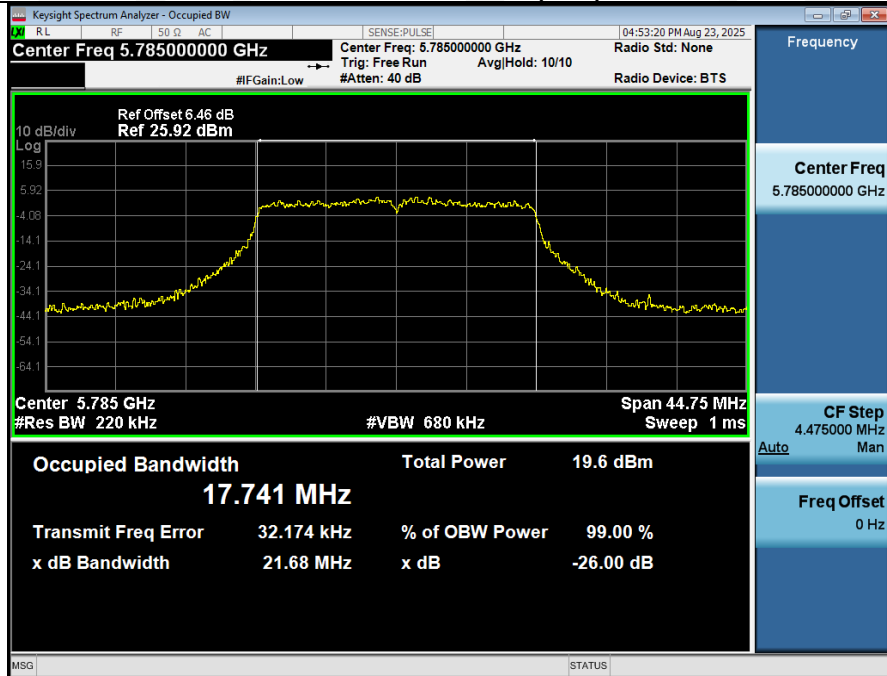


99% OCB NVNT ANT1_802_11n(HT20)_5825

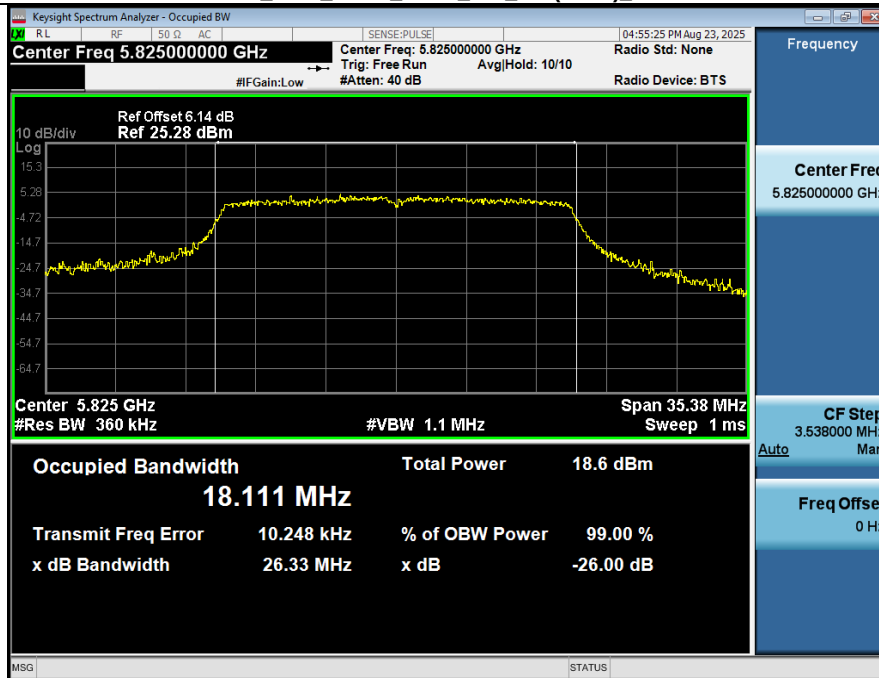


-26BW NVNT ANT1_802_11n(HT20)_5825

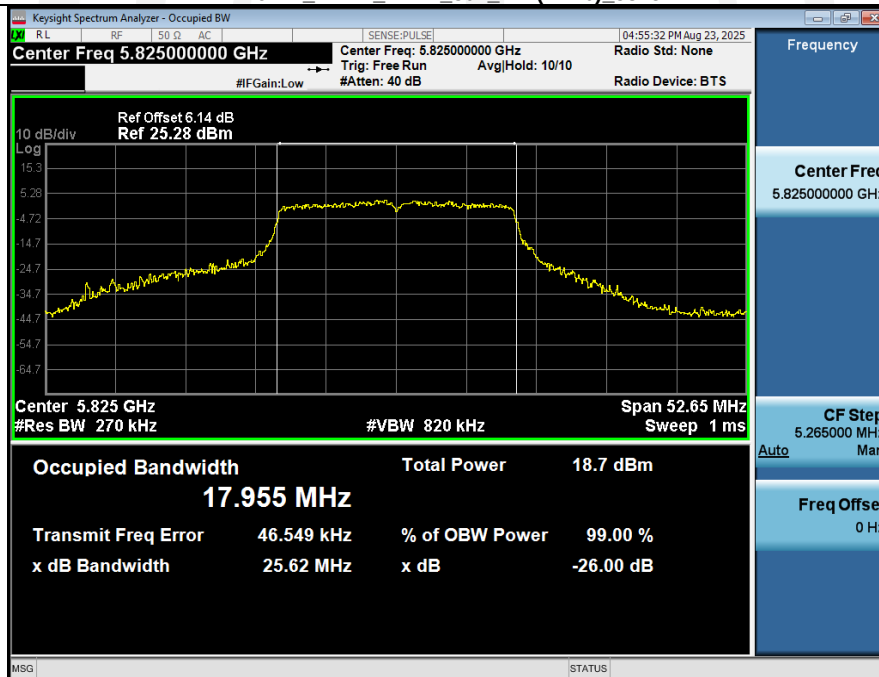

99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5745

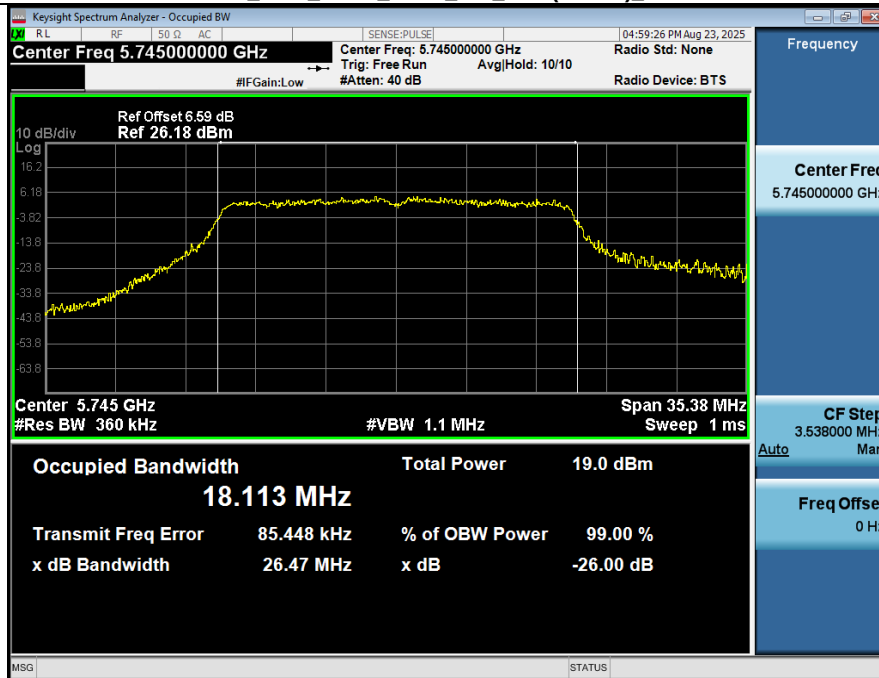


-26BW_NVNT_ANT1_802_11ac(VHT20)_5745

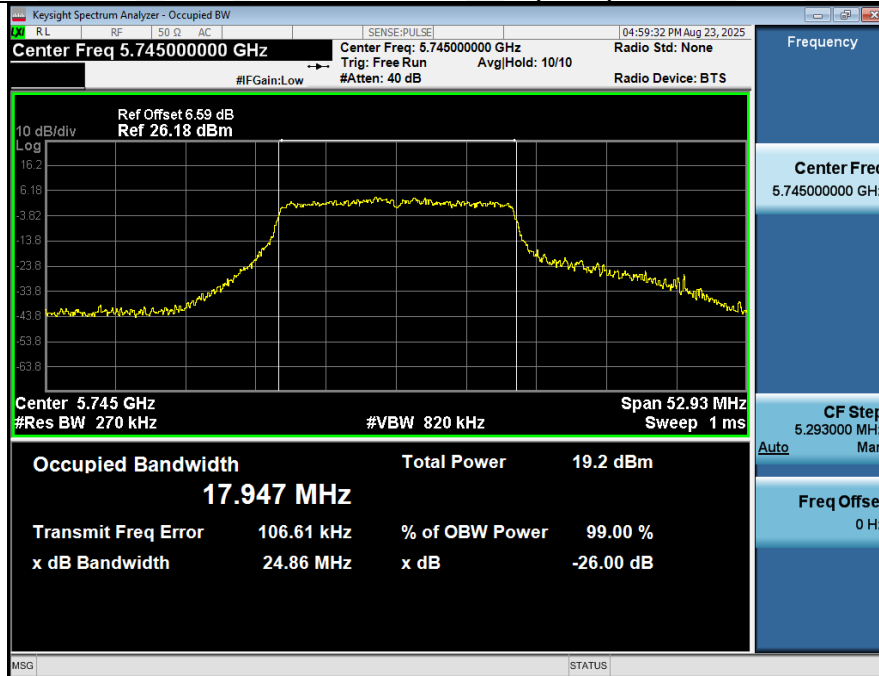


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5785




-26BW_NVNT_ANT1_802_11ac(VHT20)_5785

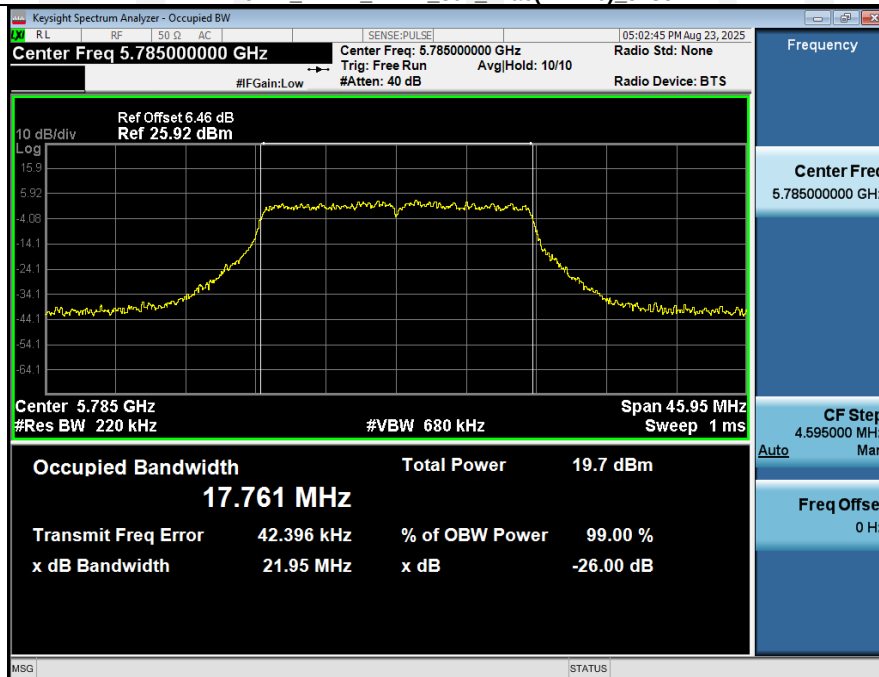


99%_OCB_NVNT_ANT1_802_11ac(VHT20)_5825

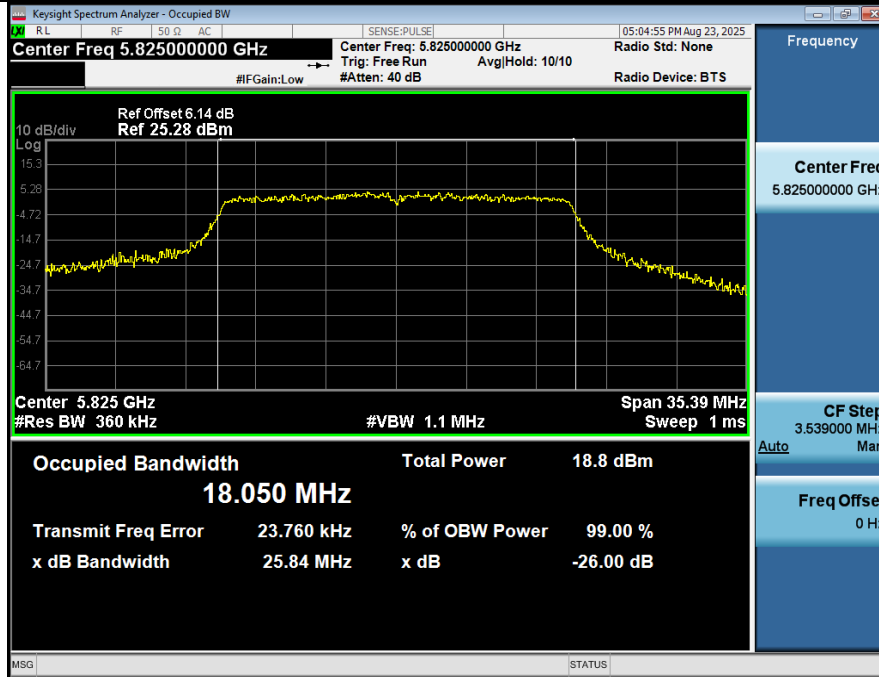

-26BW_NVNT_ANT1_802_11ac(VHT20)_5825

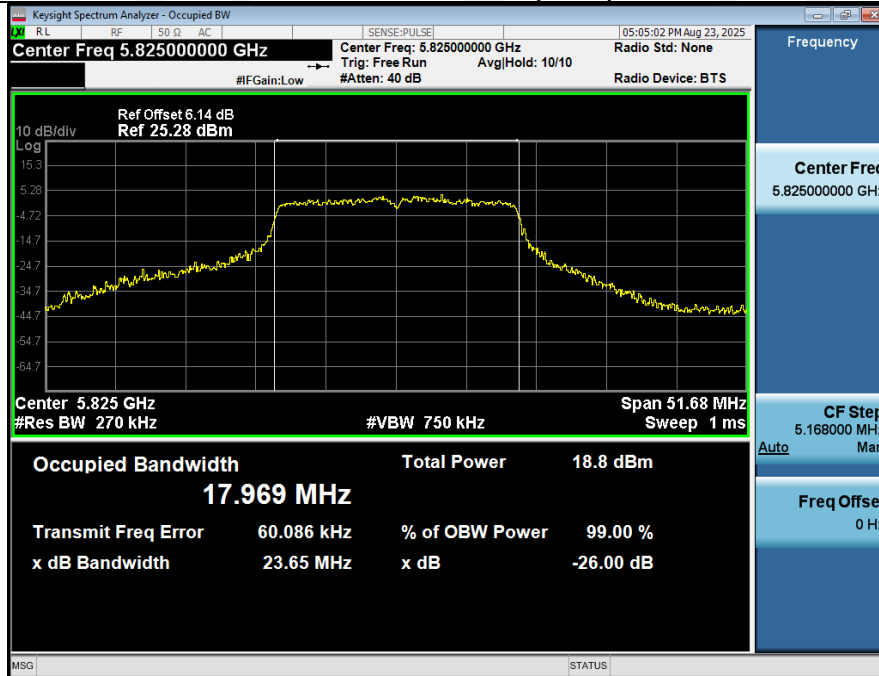


99% OCB_NVNT_ANT1_802_11ax(HE20)_5745

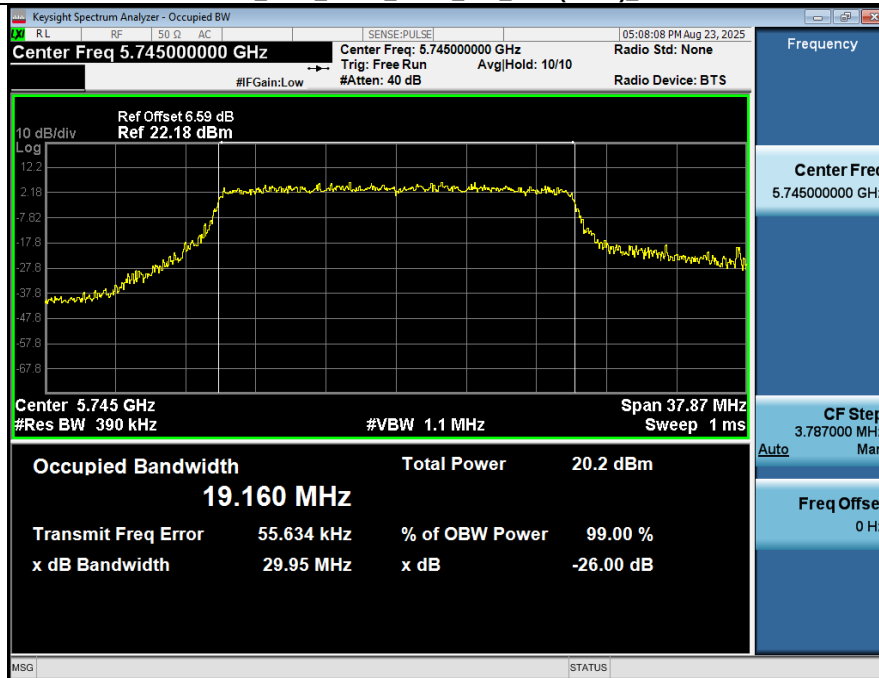


-26BW_NVNT_ANT1_802_11ax(HE20)_5745




99% OCB_NVNT_ANT1_802_11ax(HE20)_5785

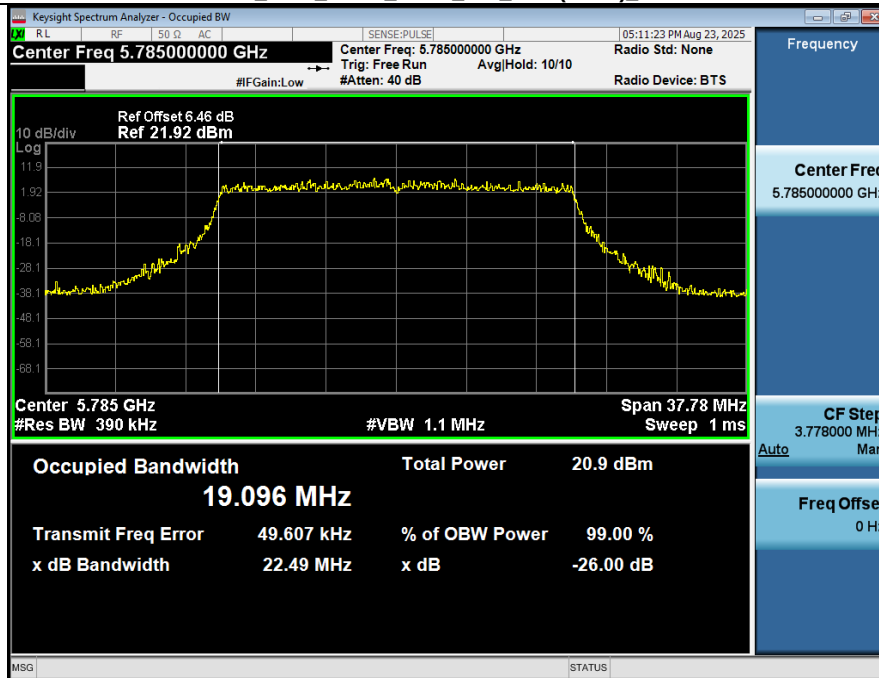

-26BW_NVNT_ANT1_802_11ax(HE20)_5785

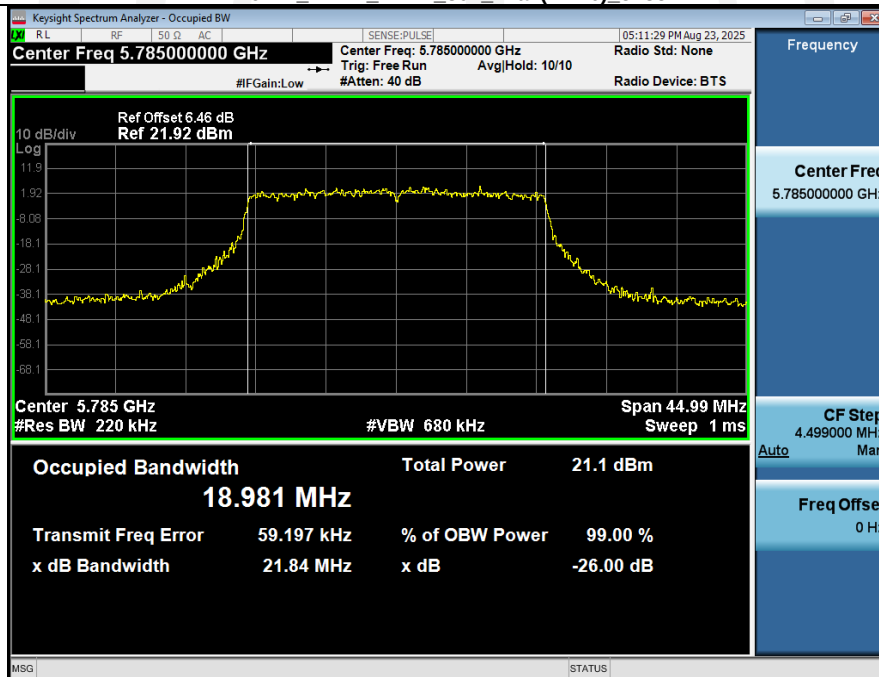


99% OCB NVNT ANT1_802_11ax(HE20)_5825

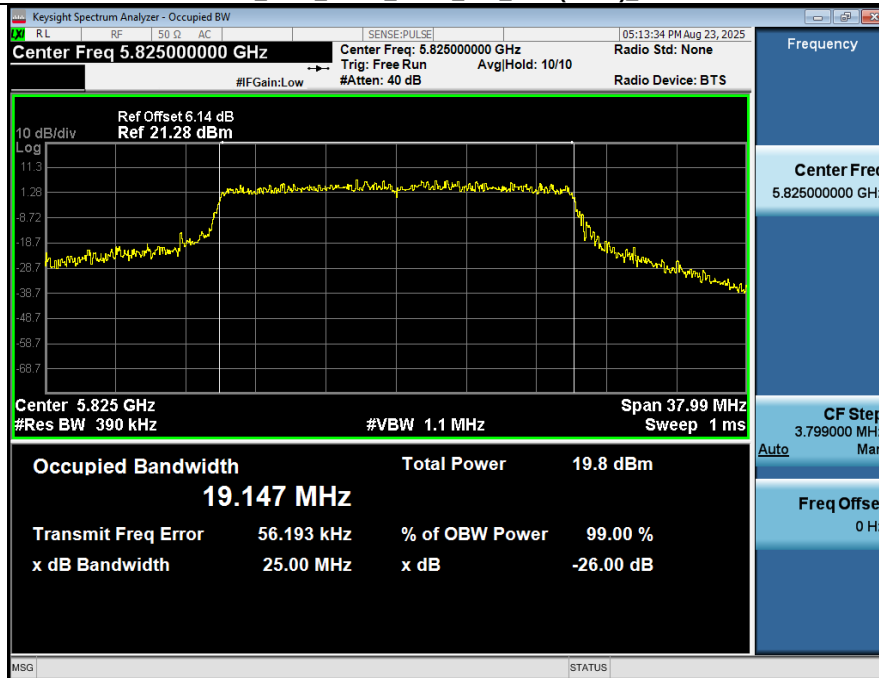

-26BW NVNT ANT1_802_11ax(HE20)_5825




99% OCB NVNT ANT1_802_11n(HT40)_5755

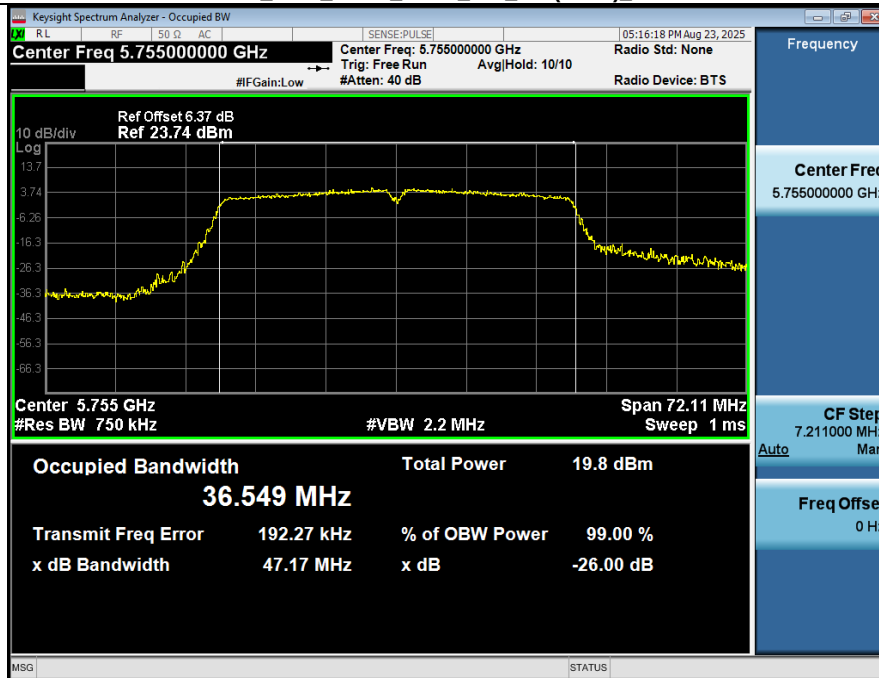


-26BW NVNT ANT1_802_11n(HT40)_5755



99% OCB NVNT ANT1_802_11n(HT40)_5795

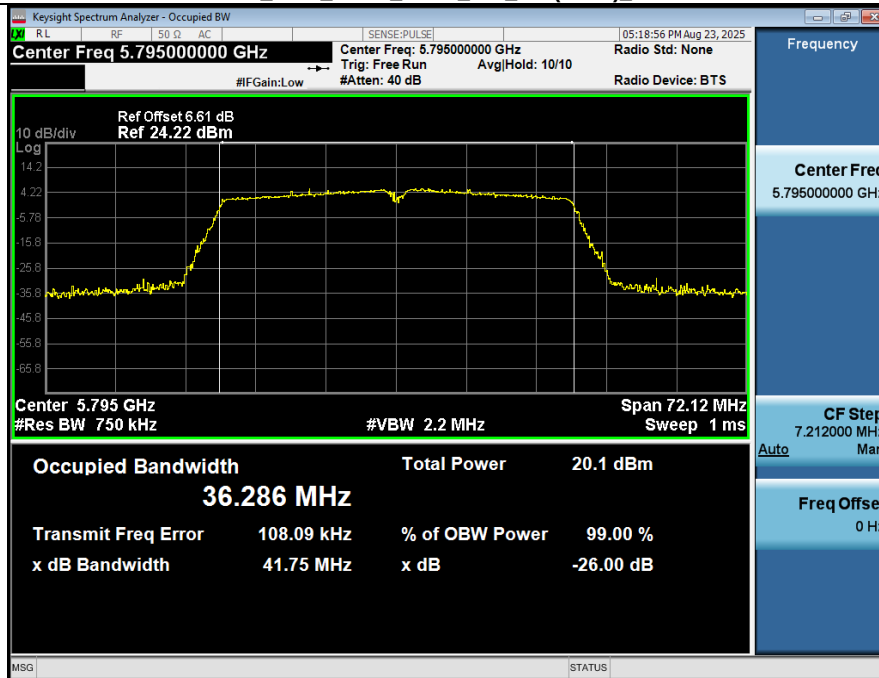


-26BW NVNT ANT1_802_11n(HT40)_5795

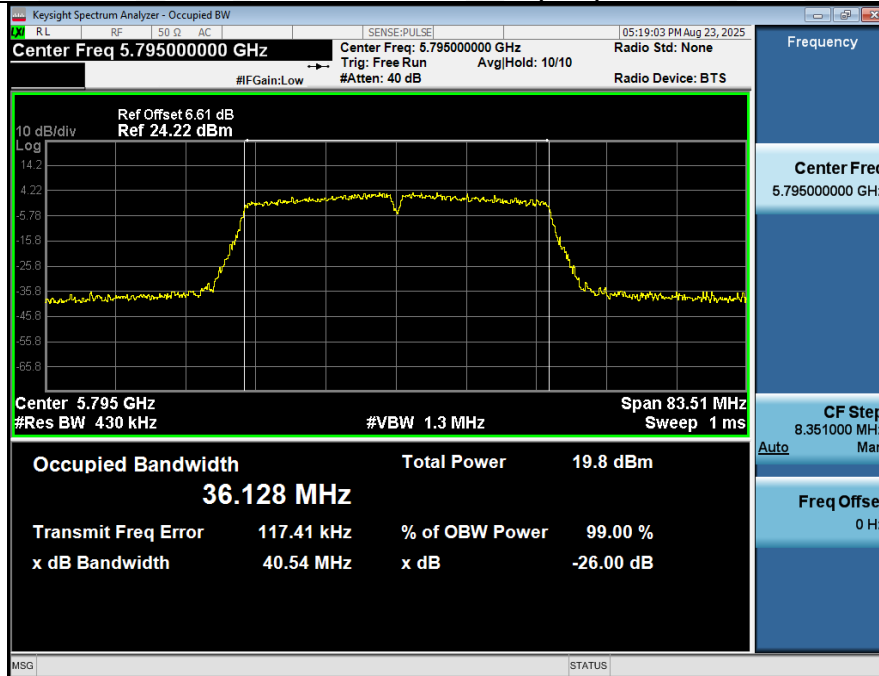


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5755




-26BW_NVNT_ANT1_802_11ac(VHT40)_5755

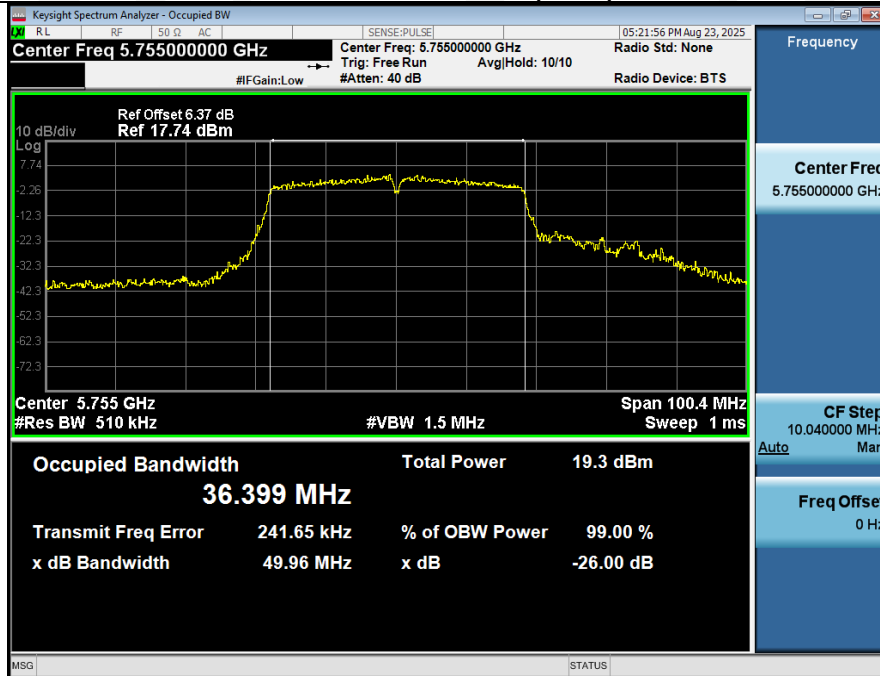


99%_OCB_NVNT_ANT1_802_11ac(VHT40)_5795

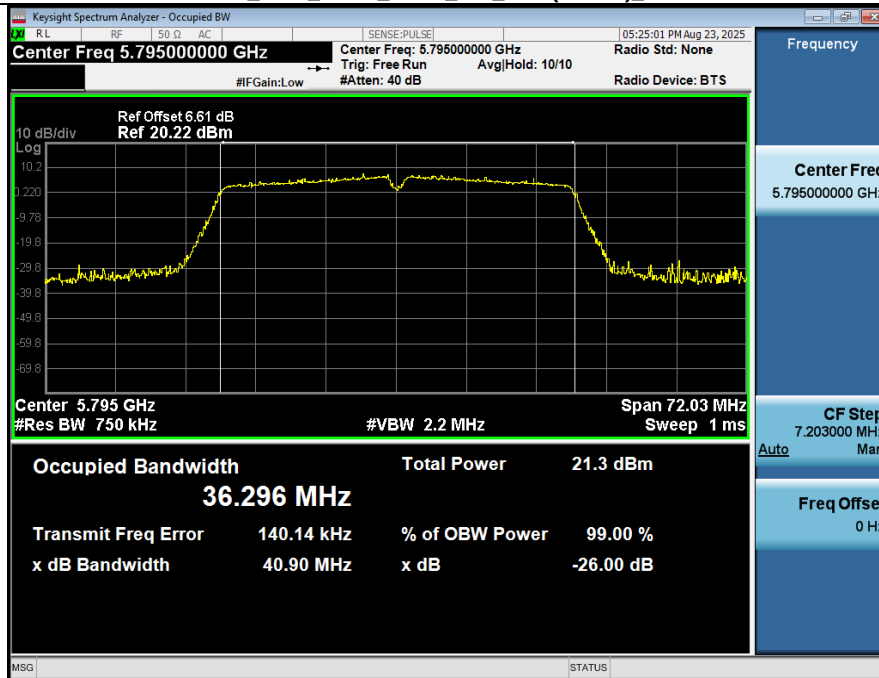

-26BW_NVNT_ANT1_802_11ac(VHT40)_5795

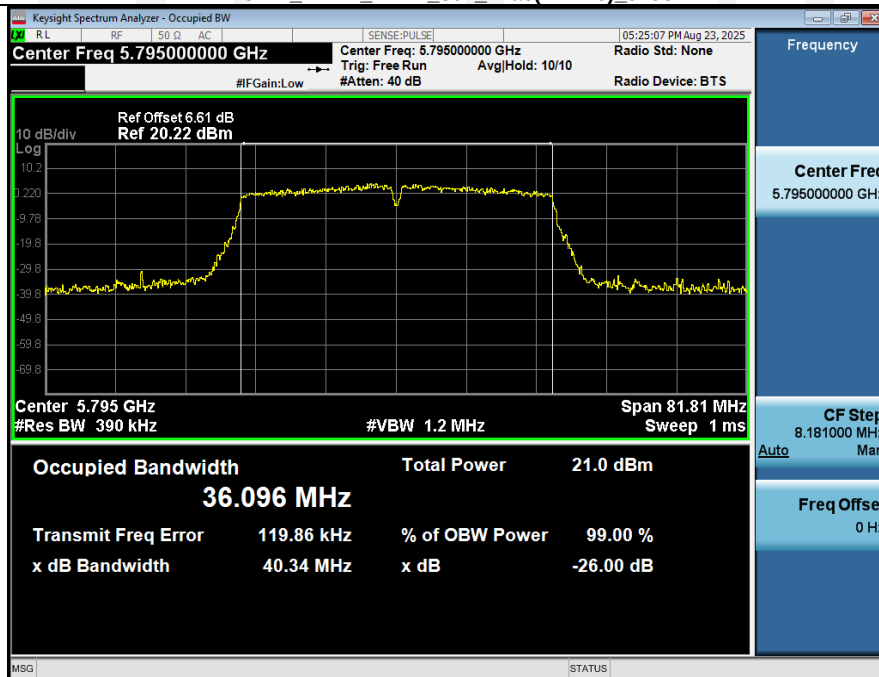


99% OCB NVNT ANT1_802_11ax(HE40)_5755

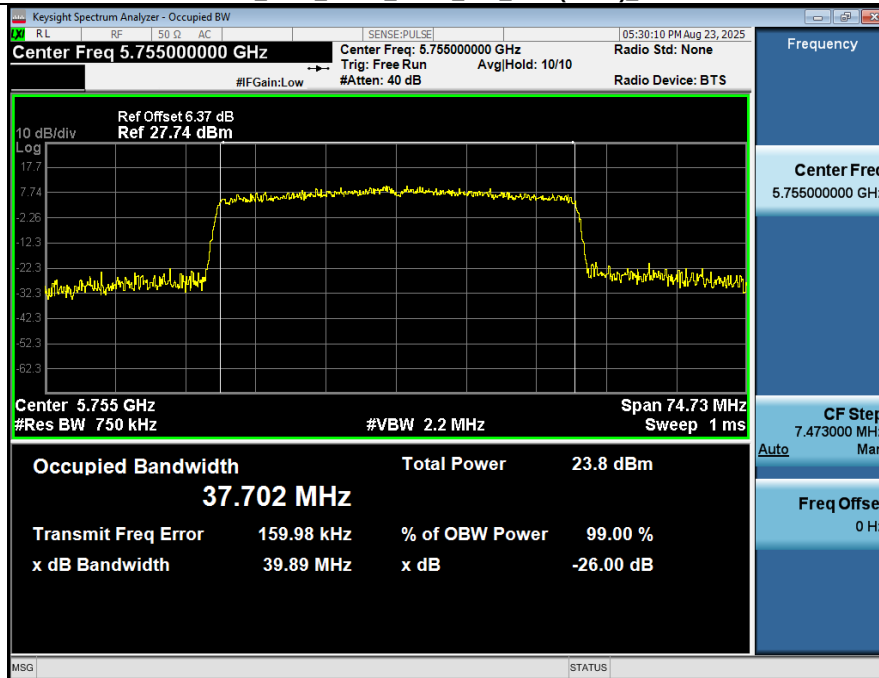


-26BW NVNT ANT1_802_11ax(HE40)_5755




99% OCB NVNT ANT1_802_11ax(HE40)_5795

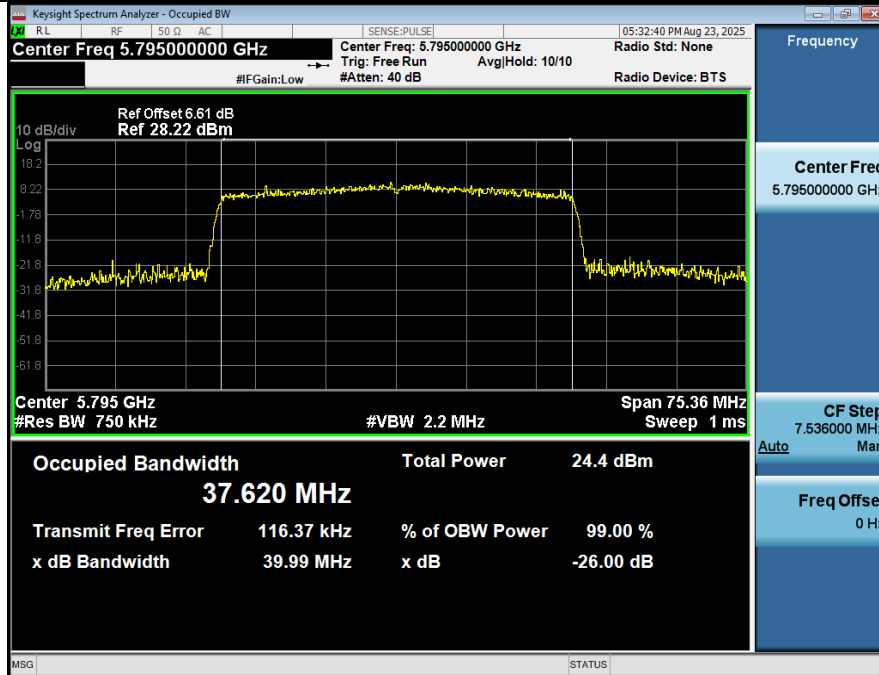


-26BW NVNT ANT1_802_11ax(HE40)_5795

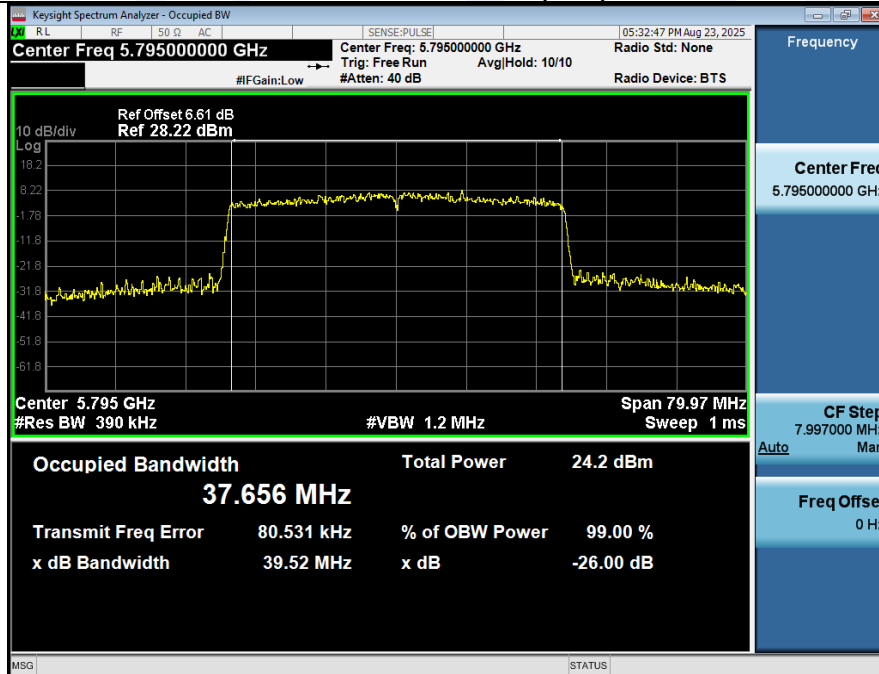


99%_OCB_NVNT_ANT1_802_11ac(VHT80)_5775

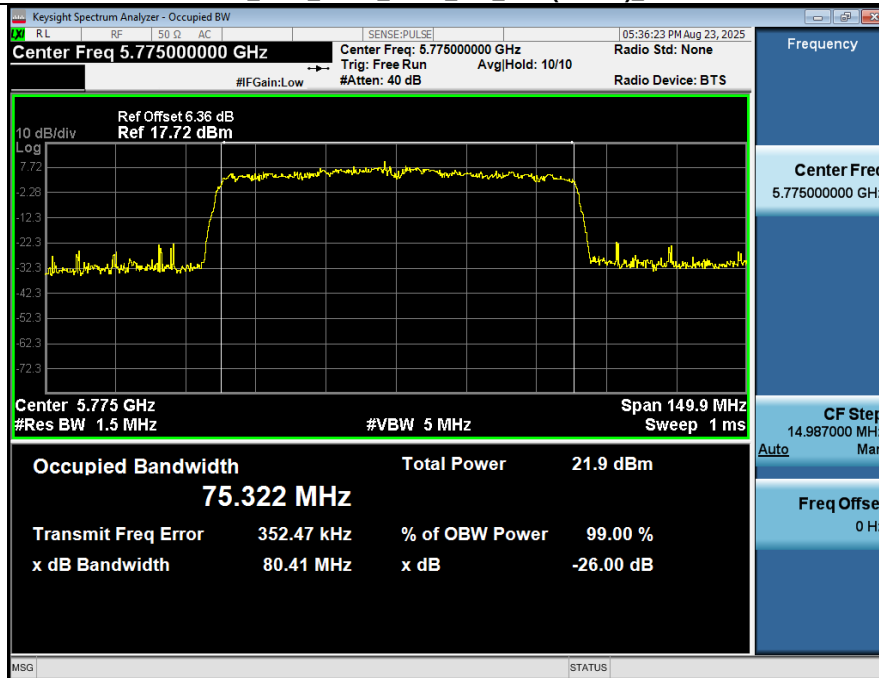


-26BW_NVNT_ANT1_802_11ac(VHT80)_5775

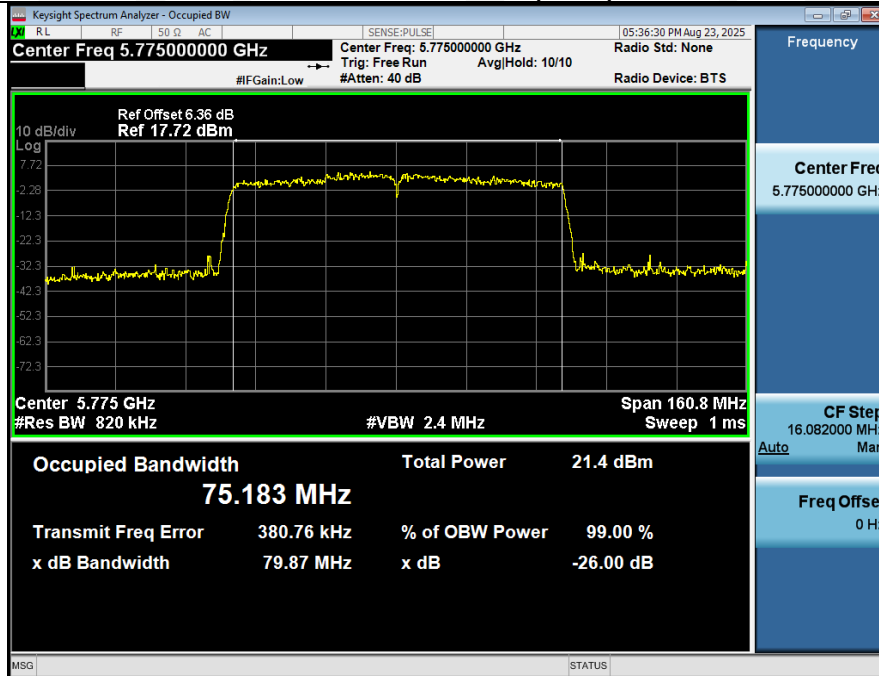


99% OCB NVNT ANT1_802_11ax(HE80)_5775

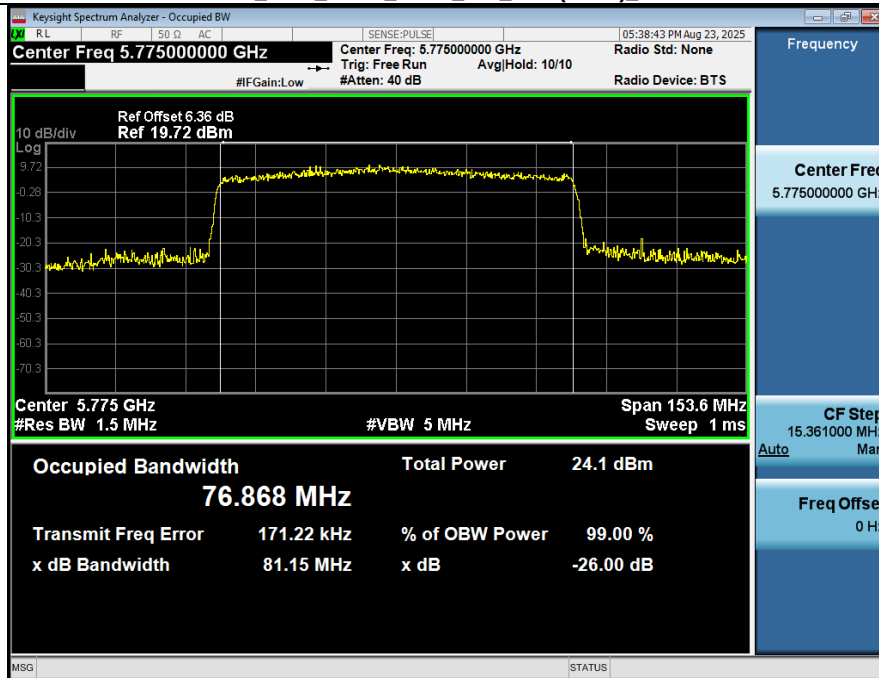

-26BW NVNT ANT1_802_11ax(HE80)_5775

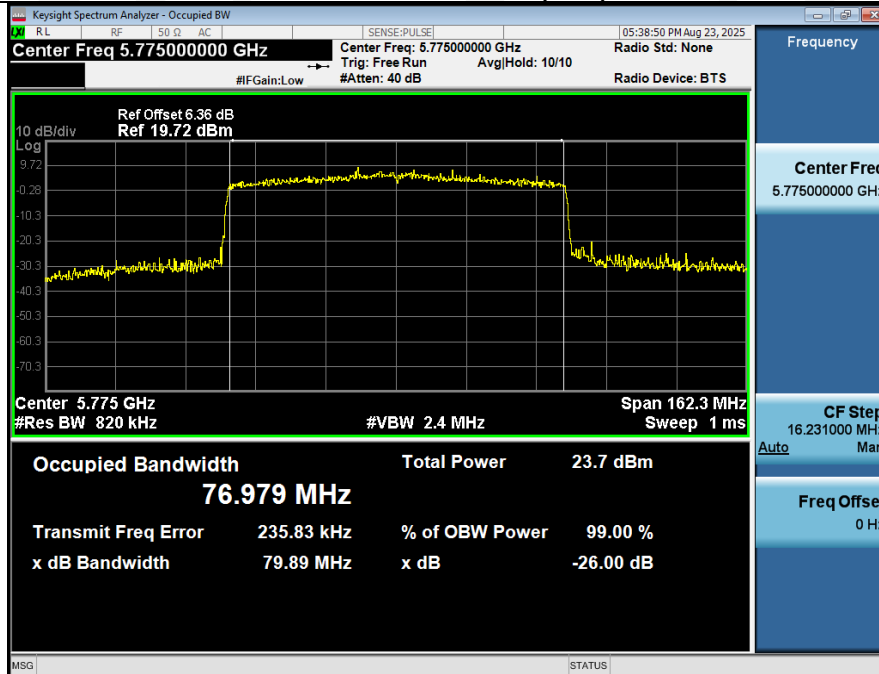

4.4 Maximum Conducted Output Power

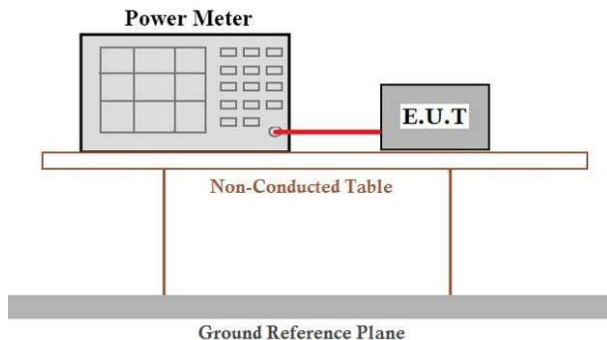Test Requirement:	FCC Part15 E Section 15.407, RSS-247 §6.2
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W. IC: For the 5.15–5.25 GHz band, For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. For the 5.25–5.35 GHz band, Other than devices installed in vehicles, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test setup:	 The diagram illustrates the test setup. A Power Meter is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the


	conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data**Band 4 (5725 – 5850 MHz) SISO:**


Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	14.42	0.18	14.60	30	Pass
NVNT	ANT1	802.11a	5785.00	14.63	0.18	14.81	30	Pass
NVNT	ANT1	802.11a	5825.00	13.72	0.18	13.90	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	12.67	0.19	12.86	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	12.85	0.19	13.04	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	11.88	0.20	12.08	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	12.04	0.51	12.55	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	12.50	0.51	13.01	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	11.56	0.51	12.07	30	Pass
NVNT	ANT1	802.11ax(HE20)	5745.00	12.44	0.56	13.00	30	Pass
NVNT	ANT1	802.11ax(HE20)	5785.00	12.54	0.58	13.12	30	Pass
NVNT	ANT1	802.11ax(HE20)	5825.00	11.71	0.58	12.29	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	12.30	0.38	12.68	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	13.07	0.26	13.33	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	12.79	0.62	13.41	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	13.67	0.90	14.57	30	Pass
NVNT	ANT1	802.11ax(HE40)	5755.00	15.53	0.90	16.43	30	Pass
NVNT	ANT1	802.11ax(HE40)	5795.00	15.55	0.90	16.45	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	11.67	3.01	14.68	30	Pass
NVNT	ANT1	802.11ax(HE80)	5775.00	14.59	1.25	15.84	30	Pass

Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
NVNT	ANT1	802.11a	5745.00	95.89	0.18
NVNT	ANT1	802.11a	5785.00	95.89	0.18
NVNT	ANT1	802.11a	5825.00	95.89	0.18
NVNT	ANT1	802.11n(HT20)	5745.00	95.65	0.19
NVNT	ANT1	802.11n(HT20)	5785.00	95.65	0.19
NVNT	ANT1	802.11n(HT20)	5825.00	95.59	0.20
NVNT	ANT1	802.11ac(VHT20)	5745.00	88.89	0.51
NVNT	ANT1	802.11ac(VHT20)	5785.00	88.89	0.51
NVNT	ANT1	802.11ac(VHT20)	5825.00	88.89	0.51
NVNT	ANT1	802.11ax(HE20)	5745.00	88.00	0.56
NVNT	ANT1	802.11ax(HE20)	5785.00	87.50	0.58
NVNT	ANT1	802.11ax(HE20)	5825.00	87.50	0.58
NVNT	ANT1	802.11n(HT40)	5755.00	91.67	0.38
NVNT	ANT1	802.11n(HT40)	5795.00	94.29	0.26
NVNT	ANT1	802.11ac(VHT40)	5755.00	86.67	0.62
NVNT	ANT1	802.11ac(VHT40)	5795.00	81.25	0.90
NVNT	ANT1	802.11ax(HE40)	5755.00	81.25	0.90
NVNT	ANT1	802.11ax(HE40)	5795.00	81.25	0.90
NVNT	ANT1	802.11ac(VHT80)	5775.00	50.00	3.01
NVNT	ANT1	802.11ax(HE80)	5775.00	75.00	1.25


Duty Cycle NVNT_ANT1_802_11a_5745

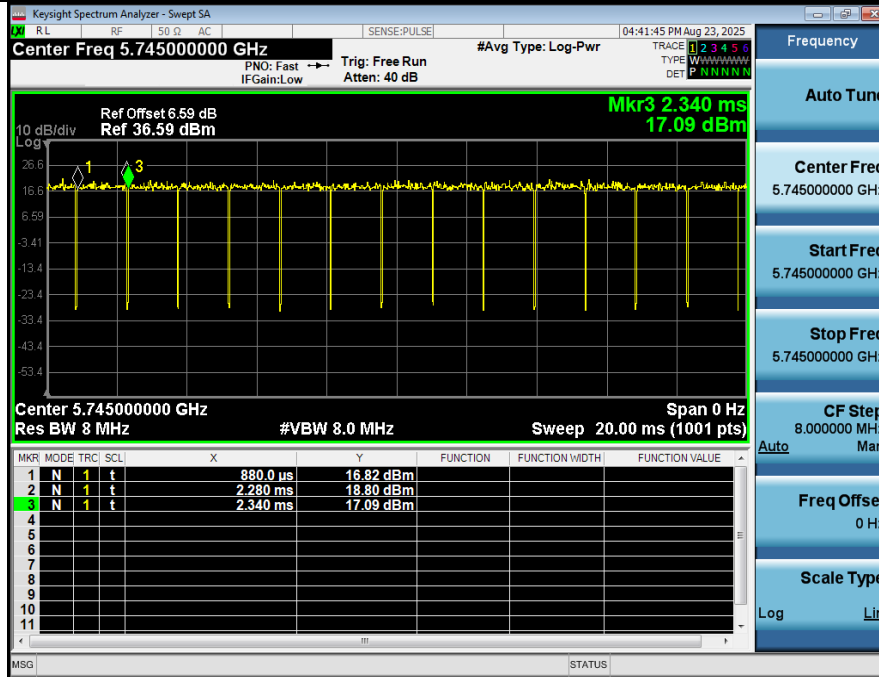


Duty Cycle NVNT_ANT1_802_11a_5785

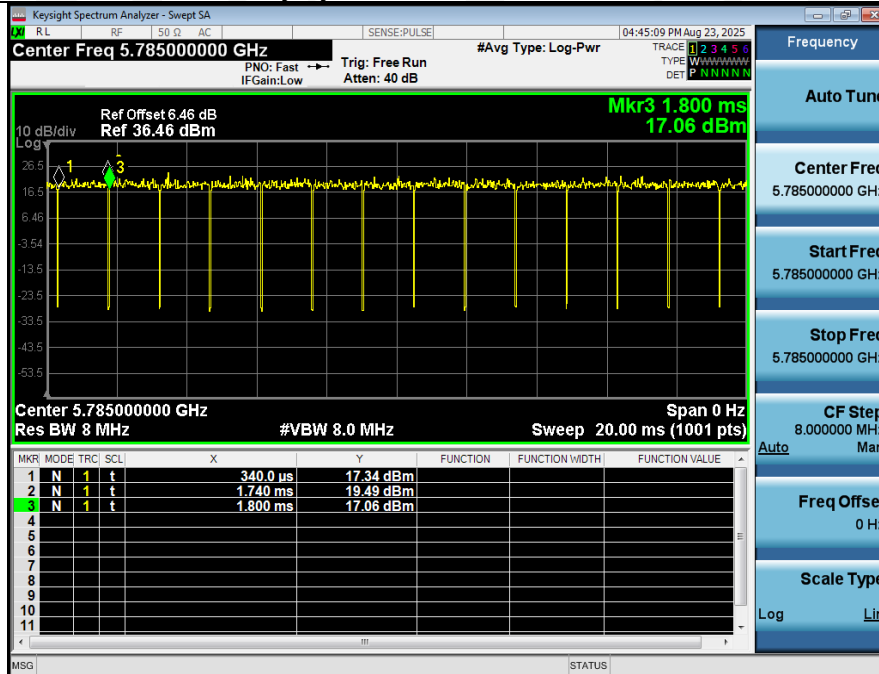


Duty Cycle NVNT_ANT1_802_11a_5825

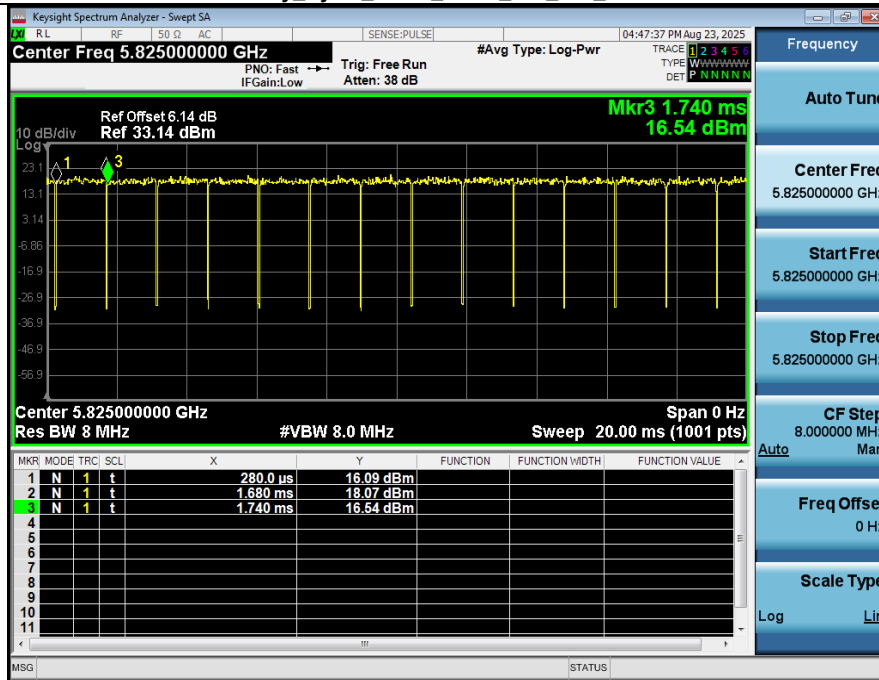

Duty Cycle NVNT_ANT1_802_11n(HT20)_5745

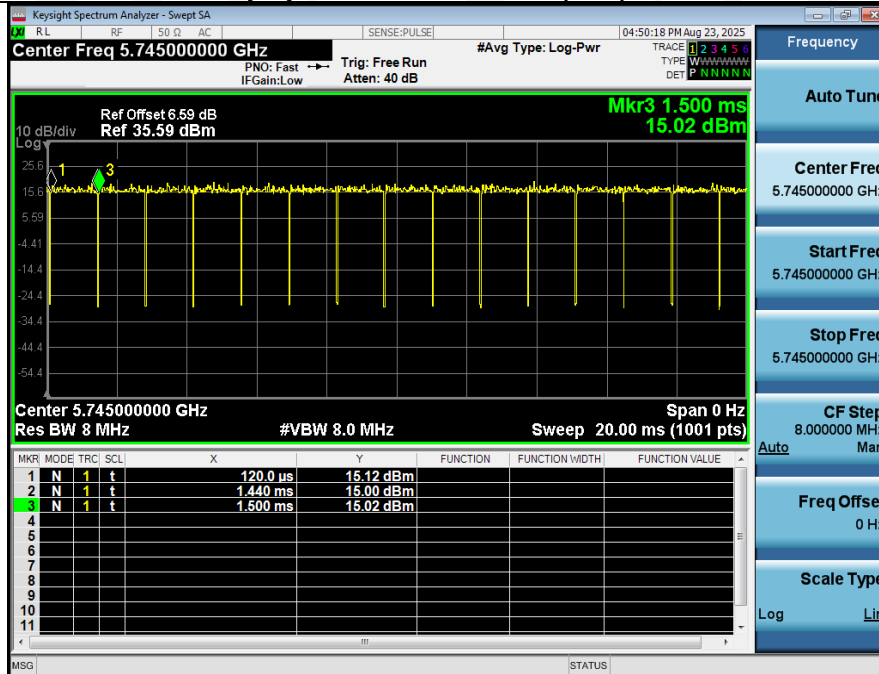

Duty Cycle NVNT_ANT1_802_11n(HT20)_5785

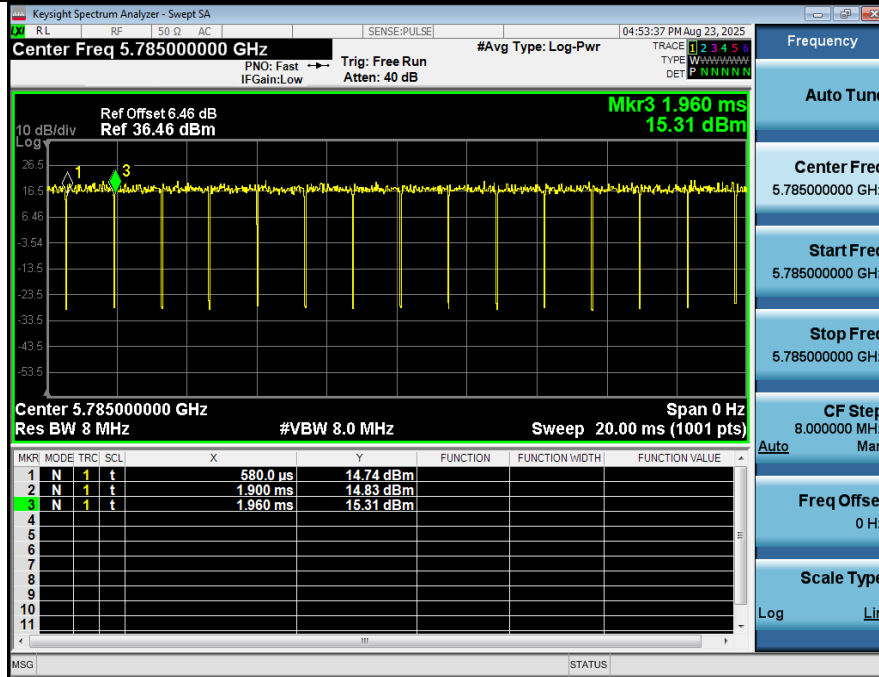

Duty Cycle NVNT_ANT1_802_11n(HT20)_5825

