

TEST REPORT

 CTK Co., Ltd. The Power Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-01273 Page (1) / (33) Pages	
--	---	--	--

1. Client

- Name : Haenim CO.,LTD.
- Address : 15, Saryeom-ro 21beon-gil, Seo-gu, Incheon, Republic of Korea
- Date of Receipt : 2019-03-29

2. Manufacturer

- Name : Haenim CO.,LTD.
- Address : 15, Saryeom-ro 21beon-gil, Seo-gu, Incheon, Republic of Korea

3. Use of Report : For FCC Certification

4. Test Sample / Model: Electric UV Sterilizer, UN Sterilizer & Dryer, UV Sanitizer & Dryer / HN-03+WM-BLE

5. Date of Test : 2019-04-03 to 2019-04-07

6. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.247

7. Testing Environment: Temp.: (24 ± 5) °C, Humidity: (45 ± 3) % R.H.

8. Test Results : Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by  Bong-jun Jang: (Signature)	Technical Manager  Young-taek Lee: (Signature)
-------------	--	---

2019-04-08

Republic of KOREA **CTK Co., Ltd.**

REPORT REVISION HISTORY

Date	Revision	Page No
2019-04-08	Issued (CTK-2019-01273)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-01273 Page (3) / (32) Pages	
--	---	--	--

CONTENTS

1. General Product Description	4
1.1 Client Information	4
1.2 Product Information.....	4
1.3 Peripheral Devices	4
2. Facility and Accreditations.....	5
2.1 Test Facility	5
2.2 Laboratory Accreditations and Listings.....	5
2.3 Calibration Details of Equipment Used for Measurement.....	5
3. Test Specifications	6
3.1 Standards	6
3.2 Mode of operation during the test	6
3.3 Model Differences.....	7
3.4 Device Modifications	7
3.5 Maximum Measurement Uncertainty	7
3.6 Test Software	8
4. Technical Characteristic Test.....	9
4.1 6dB Bandwidth	9
4.2 Maximum peak Conducted Output Power	13
4.3 Transmitter Power Spectral Density.....	16
4.4 Band Edge & Conducted Spurious emission	19
4.5 Field Strength of Harmonics.....	23
4.6 AC Conducted Emissions	30
APPENDIX A – Test Equipment Used For Tests	33

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-01273 Page (4) / (32) Pages	
--	---	--	--

1. General Product Description

1.1 Client Information

Company	Haenim CO.,LTD.
Contact Point	15, Saryeom-ro 21beon-gil, Seo-gu, Incheon, Republic of Korea
Contact Person	Name : Heung Bae Choi E-mail : choi@hnbaby.co.kr

1.2 Product Information

FCC ID	2AS5XHN-03VBLE
Product Description	Electric UV Sterilizer, UN Sterilizer & Dryer, UV Sanitizer & Dryer
Model name	HN-03+WM-BLE
Variant Model name	HN-03+WG-BLE, HN-03+WB-BLE, HN-03+WS-BLE, HN-03+WGN-BLE, HN-03+WP-BLE, HN-03+WBL-BLE, HN-03+WGY-BLE, HN-03+BM-BLE, HN-03+BG-BLE, HN-03+BB-BLE, HN-03+BS-BLE, HN-03+BGN-BLE, HN-03+BP-BLE, HN-03+BBL-BLE, HN-03+BGY-BLE, HN-03+GM-BLE, HN-03+GG-BLE, HN-03+GB-BLE, HN-03+GS-BLE, HN-03+GGN-BLE, HN-03+GP-BLE, HN-03+GBL-BLE, HN-03+GGY-BLE, HN-03+SWM-BLE, HN-03+SWG-BLE, HN-03+SWB-BLE, HN-03+SWS-BLE, HN-03+SWGN-BLE, HN-03+SWP-BLE, HN-03+SWBL-BLE, HN-03+SWGY-BLE
Operating Frequency	2 402 MHz – 2 480 MHz
RF Output Power	2.207 dBm (1.662 mW)
Antenna Specification	Antenna type : PCB Antenna Peak Gain : 4.8 dBi
Type of Modulation	GFSK(Bluetooth4.0 – LE)
Power Source	AC 120 V, 60 Hz

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
-	-	-	-

	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-01273 Page (5) / (32) Pages	
--	---	--	--

2. Facility and Accreditations

2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea.

2.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
CANADA	ISED	ISED EMI (3/10m test site)	8737A-2	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	MSIP	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	

2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

3. Test Specifications

3.1 Standards

FCC Part Section(s)	Requirement(s)	Limit	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	> 500 kHz	C	Conducted
15.247(b)	Maximum Output Power	< 1 Watt	C	
15.247(d)	Conducted Spurious emission	> 20 dBc	C	
15.247(d)	Band Edge	> 20 dBc	C	
15.247(e)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz	C	
15.209	Field Strength of Harmonics	15.209(a)	C	Radiated
15.207	AC Conducted Emissions	15.207(a)	C	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable				
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.				
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013				
<i>Note 4:</i> The tests were performed according to the method of measurements prescribed in KDB No.558074.				

3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.
The results are only attached worst cases.

Test Frequency

Lowest channel	Middle channel	Highest channel
2 402 MHz	2 440 MHz	2 480 MHz

Test mode

Modulation	Duty Cycle
GFSK	61.2%

3.3 Model Differences

These models are identical except for as below;

- HN-03+WM-BLE is Basic model.
- The model names in the table below are technically the same except for color.

HN-03+ W M-BLE
① ② ③ ④
① HN-03+WM-BLE : Basic model
② W : Body color (W : White, B : Black, G : Gray, SW : Shiny white)
③ M : Handle part color (M : Metal, G : Gold, B : Black, S : Silver, GN :Green, P : Pink, BL : Blue, GY : Gray)
④ BLE : Wireless and Non-Wireless Devices (NB : Non-Wireless Devices, BLE : Wireless Devices)

Wireless Devices		
HN-03+SWP-BLE	HN-03+WG-BLE	HN-03+WB-BLE
HN-03+WS-BLE	HN-03+WGN-BLE	HN-03+WP-BLE
HN-03+WBL-BLE	HN-03+WGY-BLE	HN-03+BM-BLE
HN-03+BG-BLE	HN-03+BB-BLE	HN-03+BS-BLE
HN-03+BGN-BLE	HN-03+BP-BLE	HN-03+BBL-BLE
HN-03+BGY-BLE	HN-03+GM-BLE	HN-03+GG-BLE
HN-03+GB-BLE	HN-03+GS-BLE	HN-03+GGN-BLE
HN-03+GP-BLE	HN-03+GBL-BLE	HN-03+GGY-BLE
HN-03+SWM-BLE	HN-03+SWG-BLE	HN-03+SWB-BLE
HN-03+SWS-BLE	HN-03+SWGN-BLE	
HN-03+SWBL-BLE	HN-03+SWGY-BLE	

3.4 Device Modifications

The following modifications were necessary for compliance:

Not applicable

3.5 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
 Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	± 1.5 dB
Power Spectral Density	± 1.5 dB
Occupied Bandwidth	± 0.1 MHz
Unwanted Emission(conducted)	± 3.0 dB
Radiated Emissions ($f \leq 1$ GHz)	± 4.0 dB
Radiated Emissions ($f > 1$ GHz)	± 5.0 dB



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01273
Page (8) / (32) Pages

3.6 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	TOYO EMI software EP5RE Ver. 5.1.0
Line Conducted Test	ESCI7, ESCI3 : EMC32 Ver. 8.50.0 ESR7 : EMC32 Ver. 8.53.0

4. Technical Characteristic Test

4.1 6dB Bandwidth

Test Procedures

ANSI C63.10-2013 6.9.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Procedures

ANSI C63.10-2013 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- | | |
|--|----------------------------|
| a) RBW = 100 kHz | b) VBW $\geq 3 \times$ RBW |
| c) Detector = peak | d) Trace mode = Max hold |
| e) Sweep = auto couple | |
| f) Allow trace to fully stabilize | |
| g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. | |

Minimum Standard :


6 dB Bandwidth > 500kHz

Test Data :


Frequency (MHz)	6dB Bandwidth (MHz)	99 % Bandwidth (MHz)	Result
2 402	0.709	1.080	Complies
2 440	0.751	1.088	Complies
2 480	0.715	1.080	Complies

See next pages for actual measured spectrum plots.


6dB Bandwidth & 99 % Bandwidth Low channel (2 402 MHz)

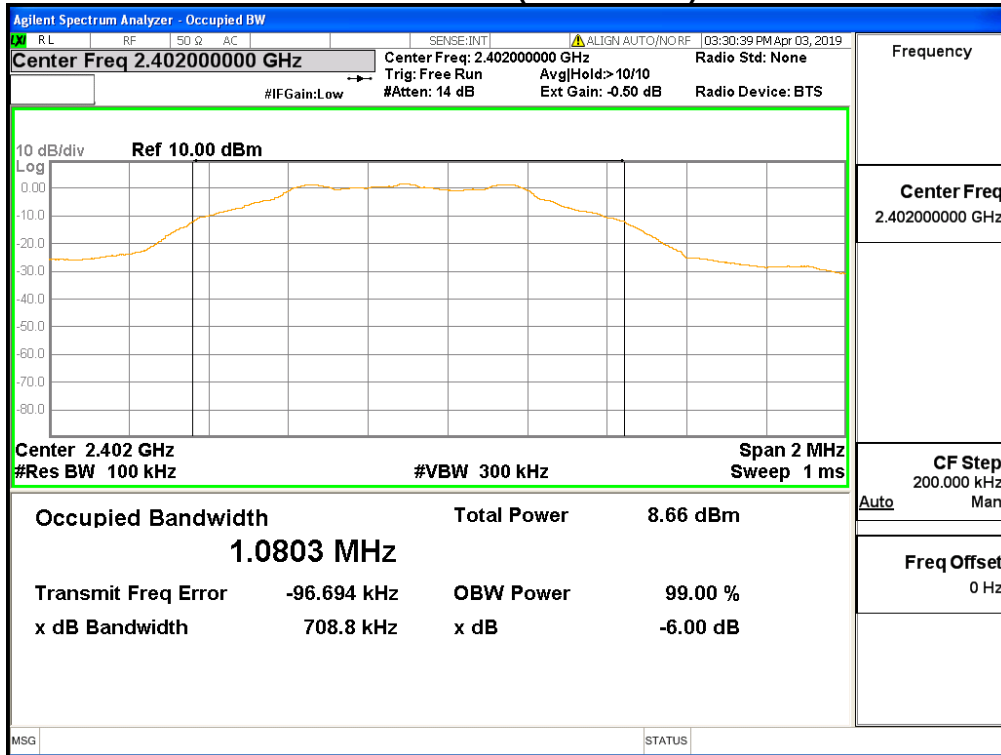

Middle channel (2 440MHz)

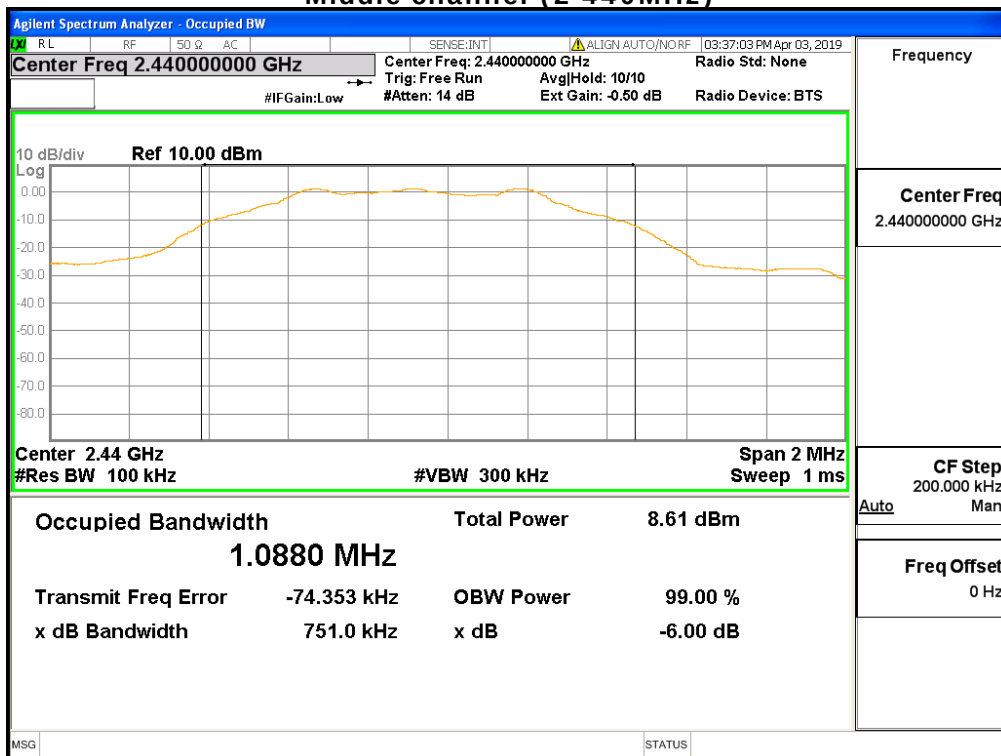

High channel (2 480 MHz)

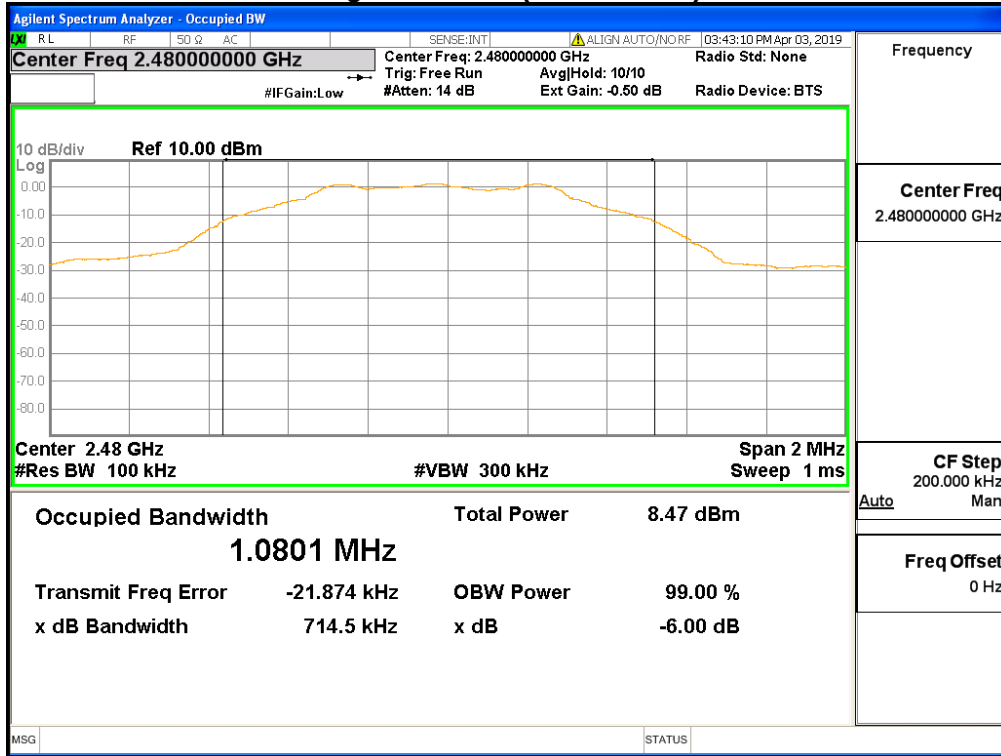

4.2 Maximum peak Conducted Output Power

Test Procedures

Procedure 9.1.1 in KDB 558074

Maximum Peak Output Power from the EUT were measured according to the dictates power measurement procedure in section 9.1.1 of KDB 558074.

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Test Settings:

Center frequency = the highest, middle and the lowest channels

- | | |
|--|-----------------------------|
| a) RBW $\geq$ DTS bandwidth | b) VBW $\geq 3 \times$ RBW |
| c) span $\geq 3 \times$ RBW | d) Sweep time = auto couple |
| e) Detector = peak | f) Trace mode= max hold |
| g) Allow trace to fully stabilize | |
| h) Use peak marker function to determine the peak amplitude level. | |

Limit :


Maximum Output Power < 1 W (30 dBm)

Test Data :


Frequency (MHz)	Maximum peak Conducted Output Power		
	Output power (dBm)	Output power (mW)	Result
2 402	2.207	1.662	Complies
2 440	2.097	1.621	Complies
2 480	2.069	1.610	Complies

See next pages for actual measured spectrum plots.


Low channel (2 402 MHz)

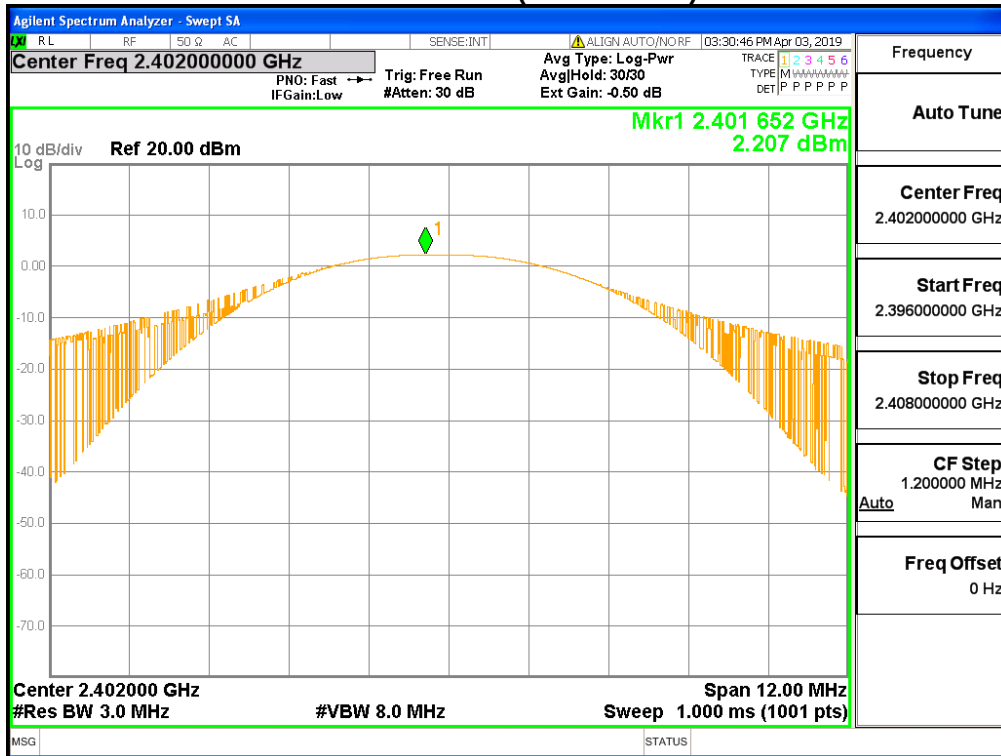

Middle channel (2 440 MHz)

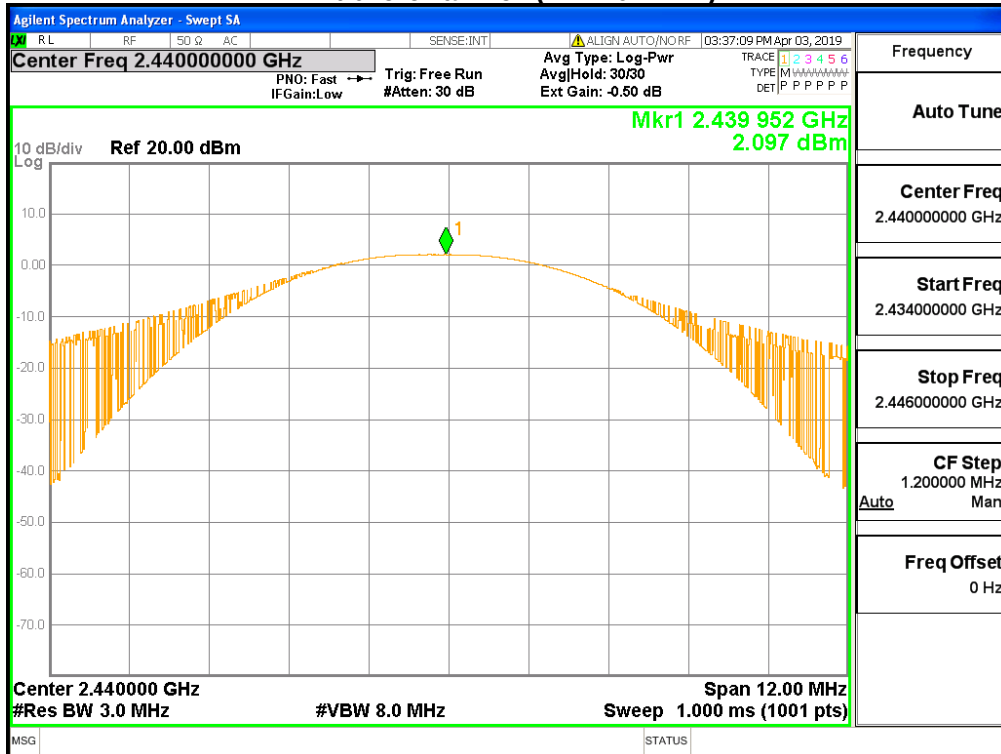

High channel (2 480 MHz)

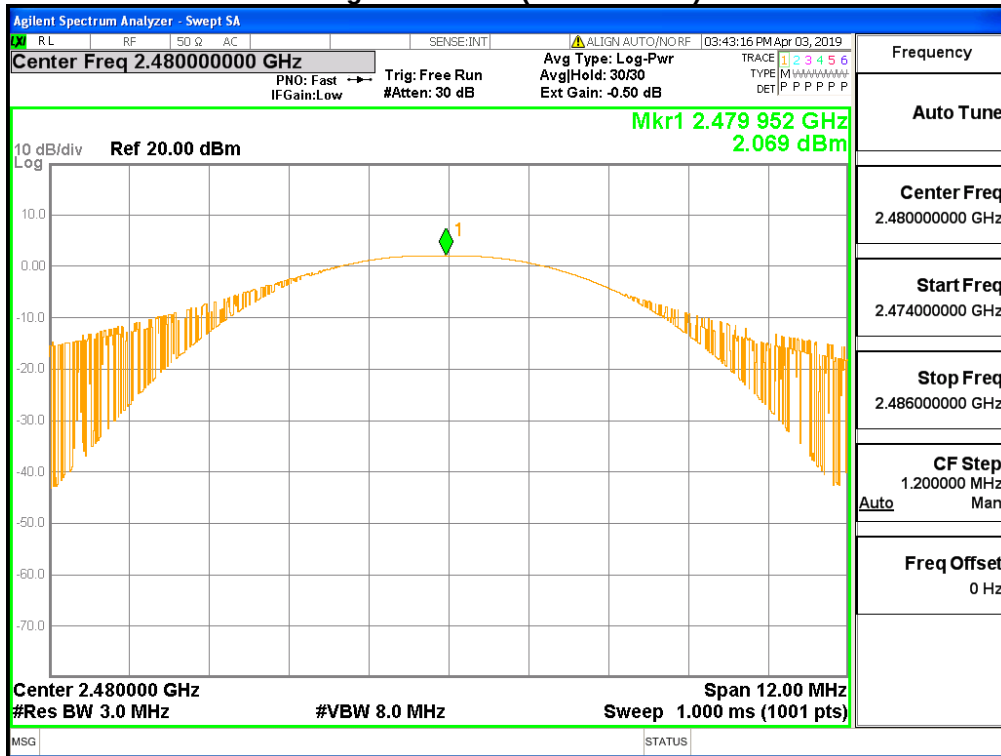

4.3 Transmitter Power Spectral Density

Test Procedures

Procedure 10.2 in KDB 558074, Method Peak PSD

Power Spectral Density from the EUT were measured according to the dictates PKPSD measurement procedure in 10.2 of KDB 558074.

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- b) VBW $\geq 3 \times \text{RBW}$
- c) span $\geq 1.5 \times \text{DTS bandwidth}$
- d) Sweep time = auto couple
- e) Detector = peak
- f) Trace mode= max hold
- g) Allow trace to fully stabilize
- h) Use the peak marker function to determine the maximum amplitude level within the RBW.

Limit :


Power Spectral Density < 8dBm @ 3 kHz BW

Test Data :


Frequency (MHz)	Power Spectral Density	
	dBm	Result
2 402	-12.623	Complies
2 440	-13.692	Complies
2 480	-12.558	Complies

See next pages for actual measured spectrum plots.

Low channel (2 402 MHz)

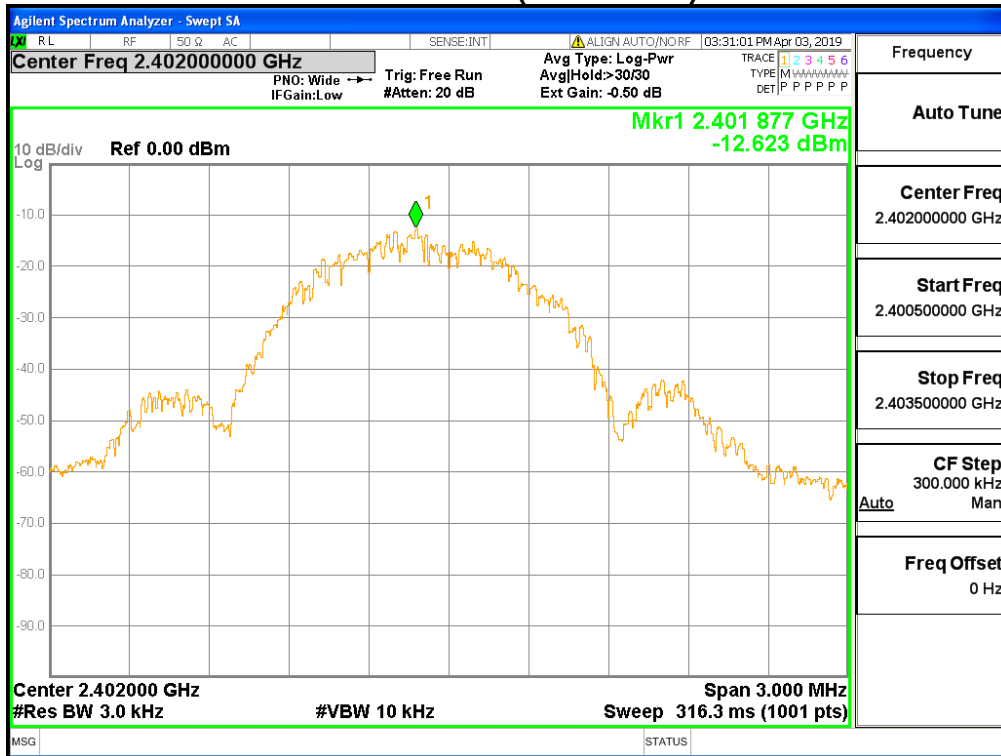

Middle channel (2 440 MHz)

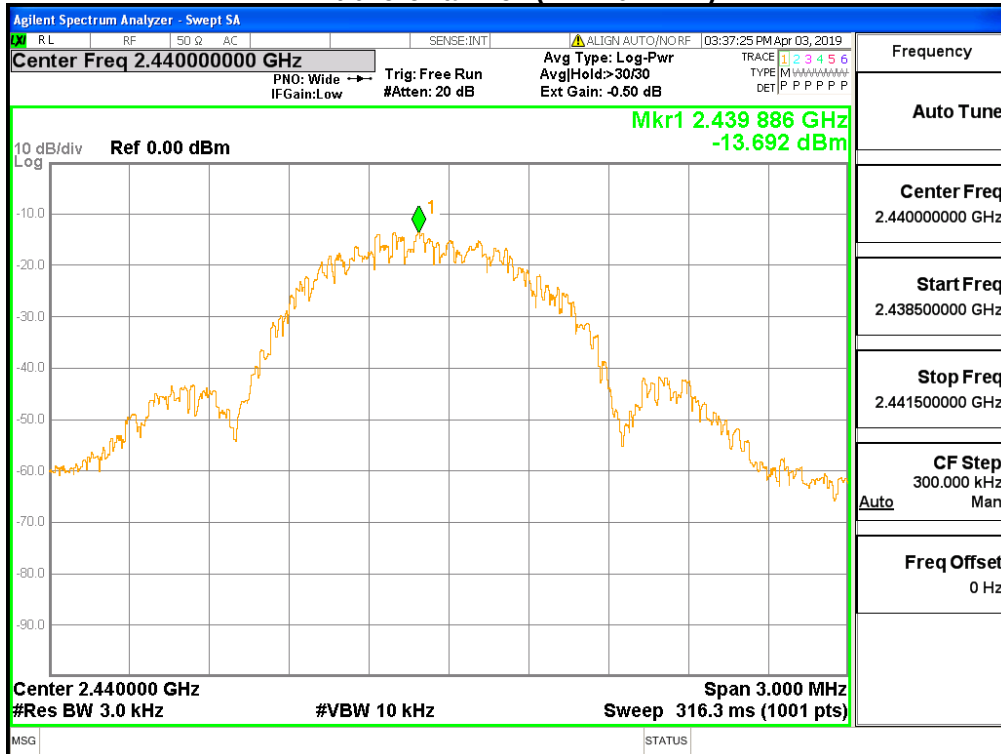




CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-01273
Page (18) / (32) Pages

High channel (2 480 MHz)

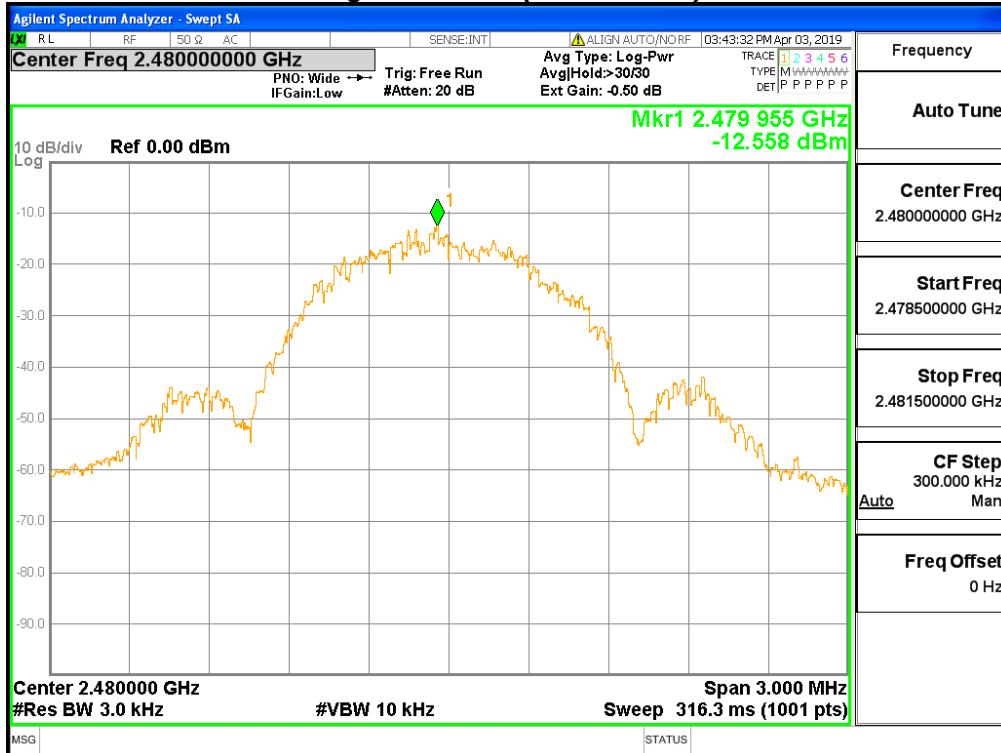

4.4 Band Edge & Conducted Spurious emission

Test Procedures

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Settings:

Center frequency = the highest, middle and the lowest channels

- | | |
|---|-----------------------------|
| a) RBW = 100 kHz | b) VBW $\geq 3 \times$ RBW |
| c) Detector = peak | d) Sweep time = auto couple |
| e) Trace mode= max hold | |
| f) Allow trace to fully stabilize | |
| g) Use the peak marker function to determine the maximum amplitude level. | |

Limit :



Emission level < 20 dBc

Test results: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest in-band spectral density. Therefore the applying equipment meets the requirement.


See next pages for actual measured spectrum plots.

Band-edge

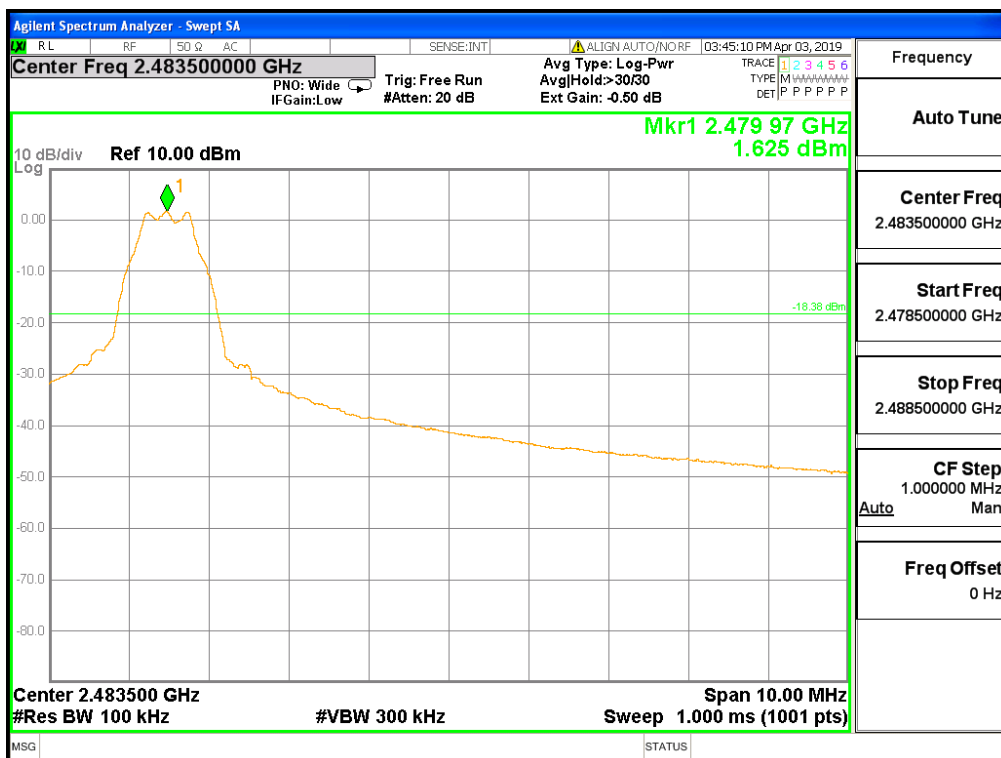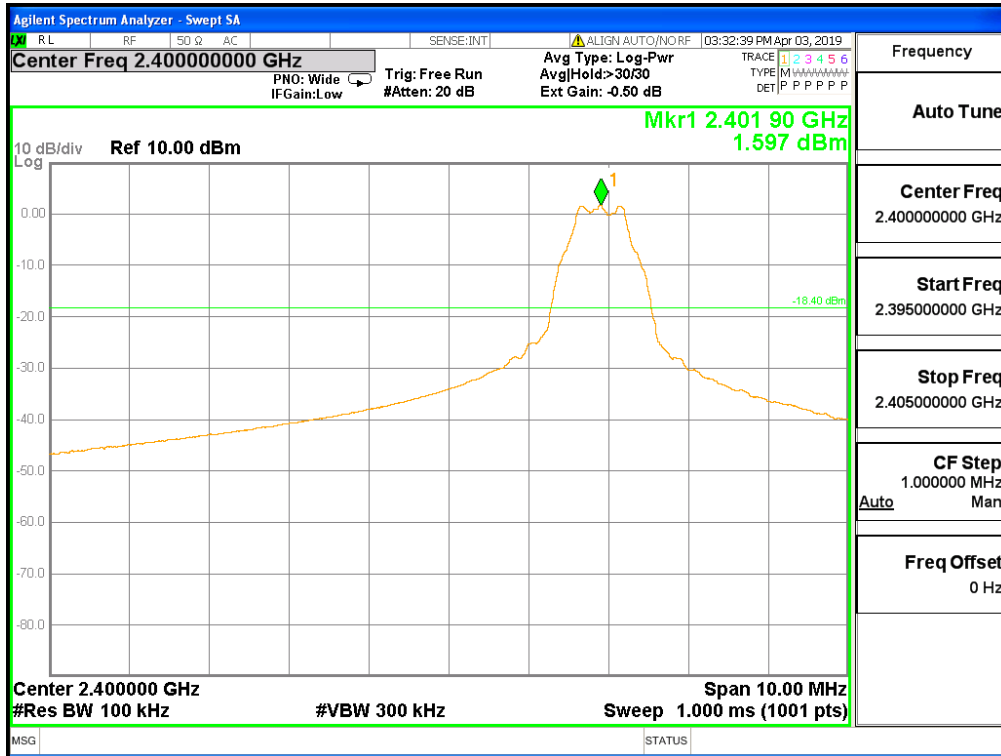



Conducted Spurious emission

Low channel (2 402 MHz)

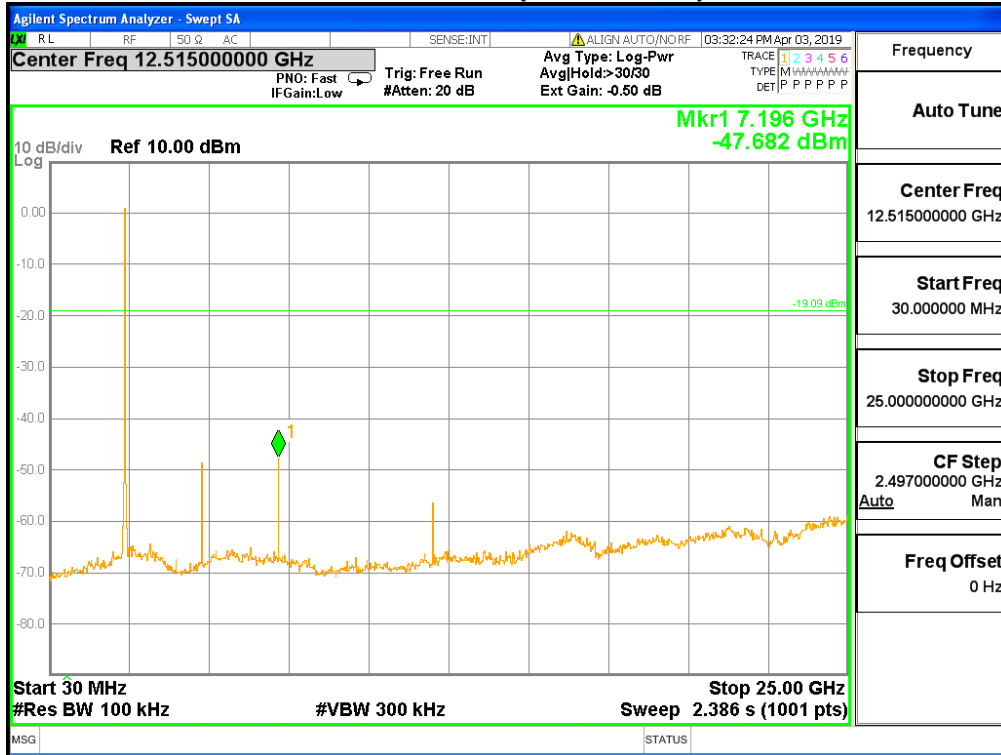

Middle channel (2 440 MHz)

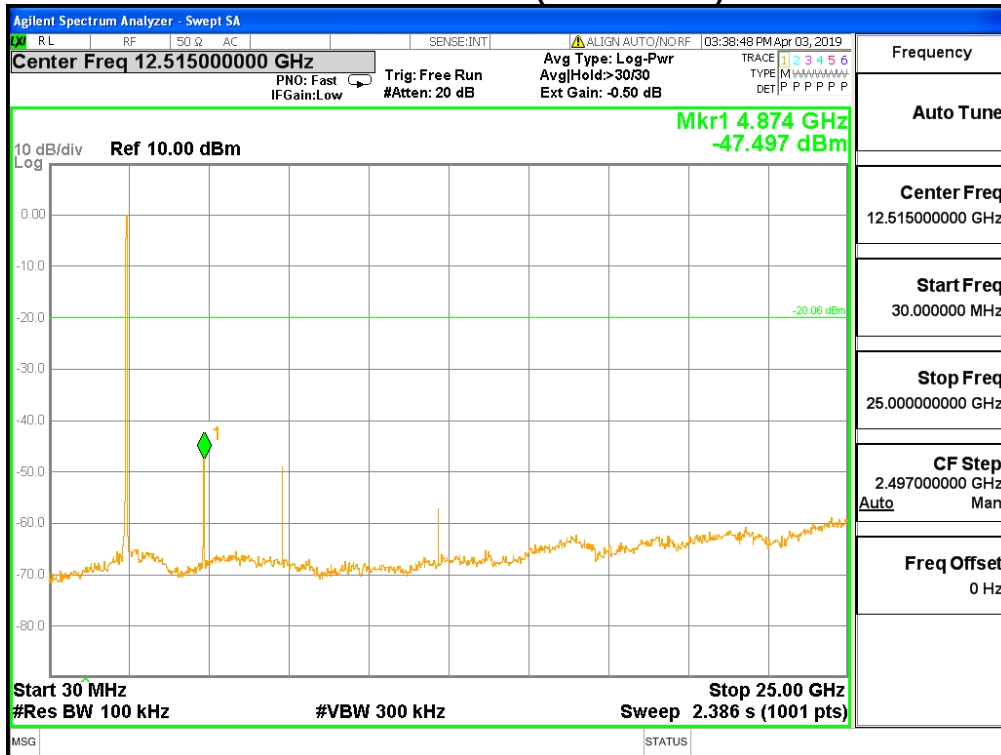



 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-01273 Page (23) / (32) Pages	
---	--	--	--

4.5 Field Strength of Harmonics

Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)
☒ 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Instrument Settings

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz
- b) VBW $\geq$ RBW
- c) Sweep time = auto couple

Limit :

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz for peak measurement.

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

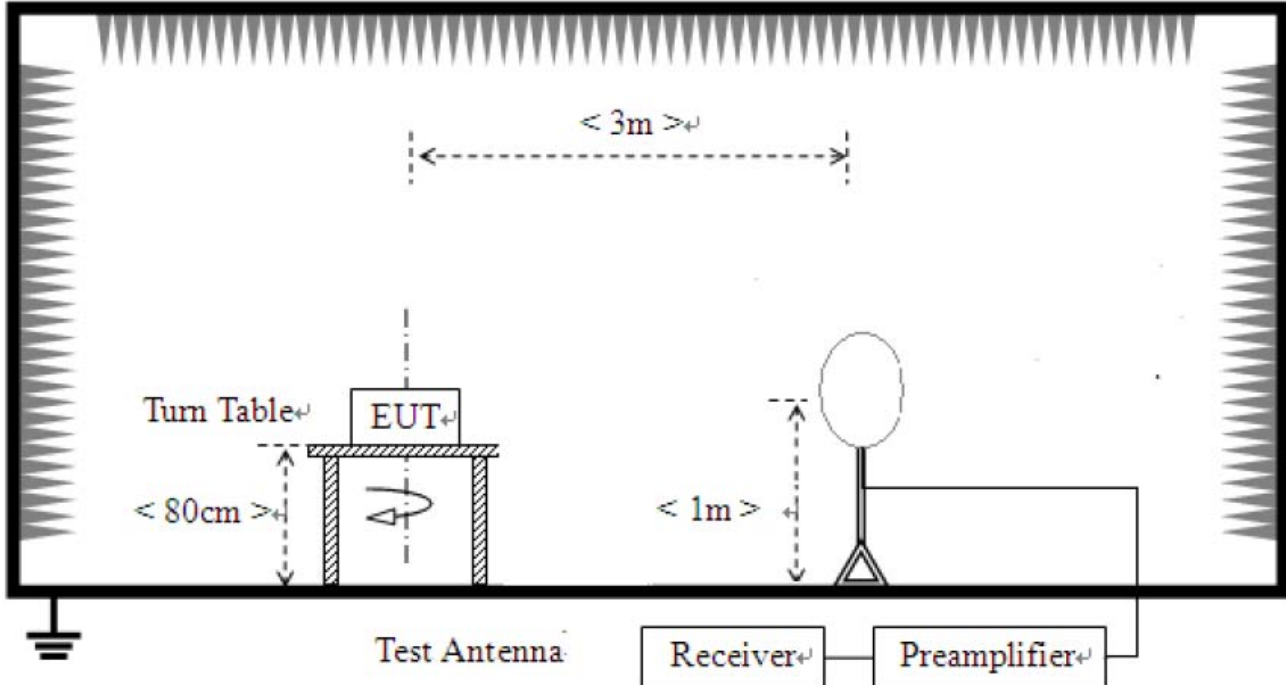

- 2) For field strength of emissions from 30 MHz to 1 GHz

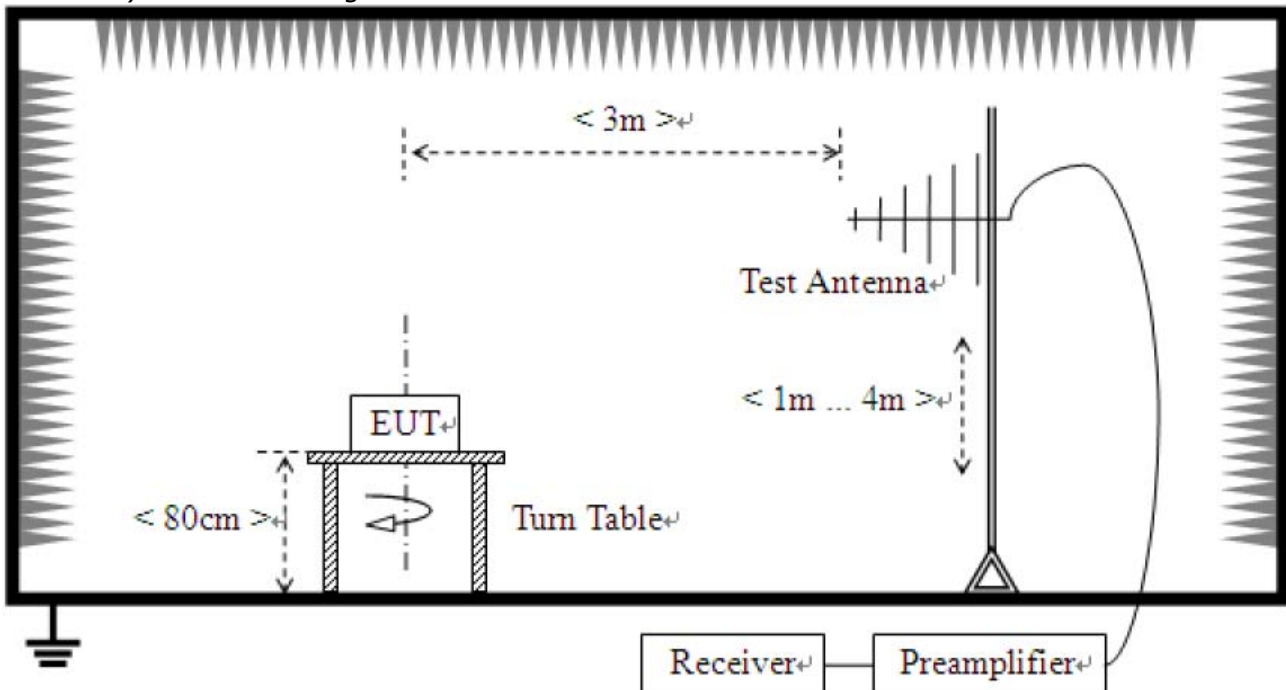

3) For field strength of emissions above 1 GHz

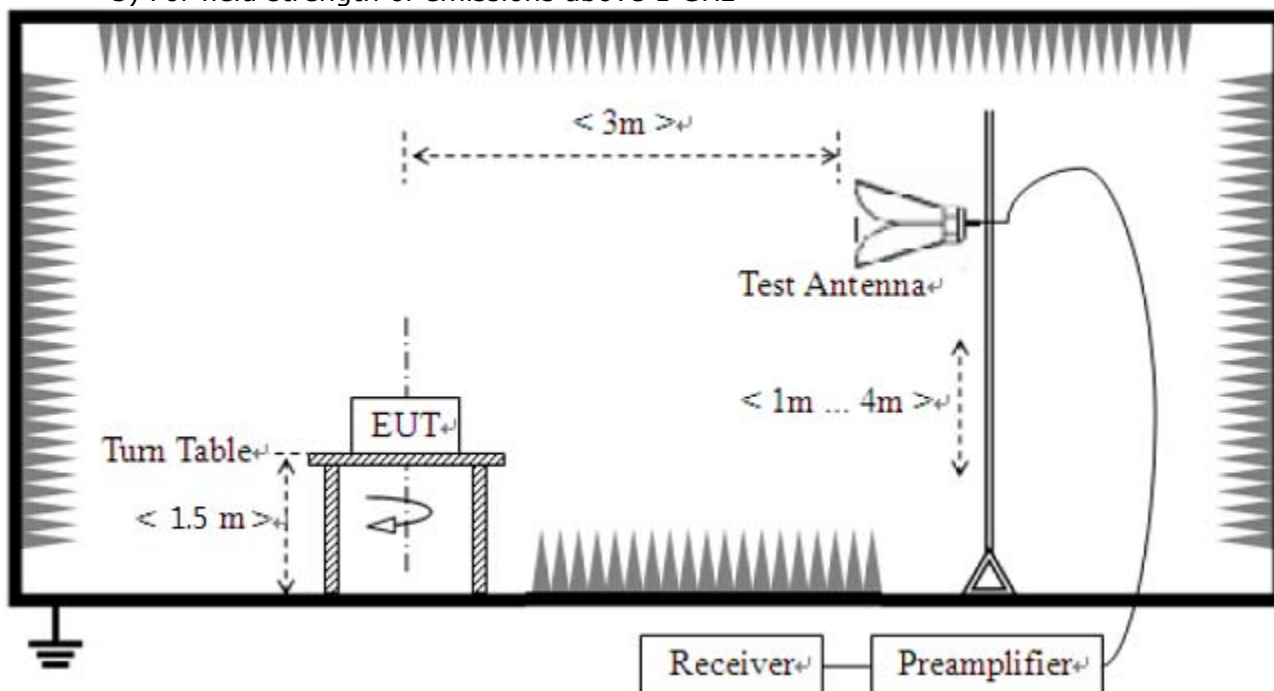

Test results

1) 9 kHz to 30 MHz

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)


2) 30 MHz to 1 GHz

Test mode : Low Channel(Worst Case)

The requirements are:

☒ Complies

Test Data

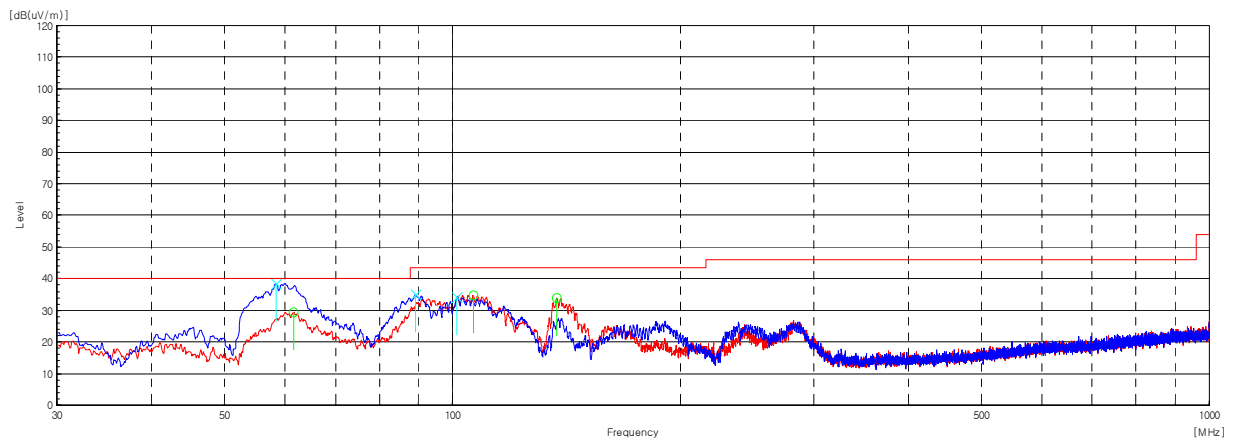

Frequency [MHz]	(P)	Reading [dB(uV)]	Factor [dB(1/m)]	Result [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]
58.523	V	51.9	-13.5	38.4	40.0	1.6
61.680	H	43.8	-14.3	29.5	40.0	10.5
89.442	V	51.1	-16.0	35.1	43.5	8.4
101.417	V	48.2	-14.1	34.1	43.5	9.4
106.534	H	49.0	-14.3	34.7	43.5	8.8
137.344	H	51.4	-17.6	33.8	43.5	9.7

Remark :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.
2. Result = Reading + Factor(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

3) above 1 GHz

The requirements are:

☒ Complies

Test Data

Test mode : Lowest frequency

Frequency [MHz]	Ant. Pol. (V/H)	Reading [dBuV/m]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
2 390.00	V	38.1	-3.8	34.3	54	19.7	Average
2 378.10	V	60.8	-3.8	57.0	74	17.0	Peak
7 206.07	H	32.9	6.0	38.9	54	15.1	Average
7 204.75	H	46.4	6.0	52.4	74	21.6	Peak

Test mode : Middle frequency

Frequency [MHz]	Ant. Pol. (V/H)	Reading [dBuV/m]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
7 319.49	H	33.6	6.0	39.6	54	14.4	Average
7 319.49	H	46.5	6.0	52.5	74	21.5	Peak

Test mode : Highest frequency

Frequency [MHz]	Ant. Pol. (V/H)	Reading [dBuV/m]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
2 487.78	V	30.2	-3.7	26.5	54	27.5	Average
2 483.50	H	69.9	-3.7	66.2	74	7.8	Peak
7 439.49	H	34.8	6.0	40.8	54	13.2	Average
7 440.81	H	49.2	6.0	55.2	74	18.8	Peak

Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

4.6 AC Conducted Emissions

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

Module has been tested by mounting the End product(Printer).

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Results


The requirements are:

☒ Complies

Test Data

[LINE]

Class B_L1

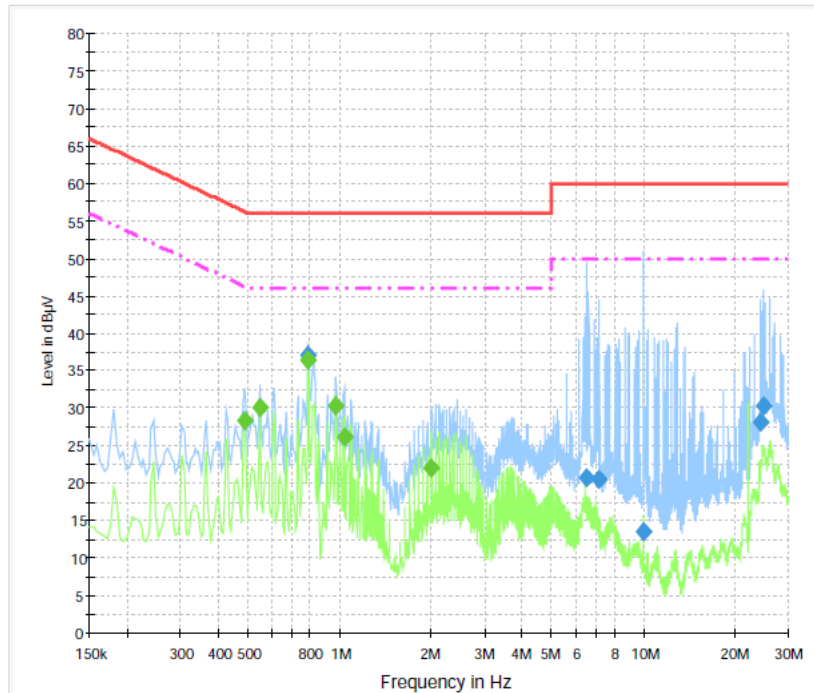

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.789000	37.0	1000.0	9.000	On	L1	10.0	19.0	56.0
6.495000	20.8	1000.0	9.000	On	L1	10.0	39.2	60.0
7.161000	20.5	1000.0	9.000	On	L1	10.0	39.5	60.0
10.000500	13.6	1000.0	9.000	On	L1	10.1	46.4	60.0
24.265500	28.1	1000.0	9.000	On	L1	10.2	31.9	60.0
24.958500	30.3	1000.0	9.000	On	L1	10.2	29.7	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.487500	28.2	1000.0	9.000	On	L1	10.1	18.0	46.2
0.546000	30.1	1000.0	9.000	On	L1	10.1	15.9	46.0
0.789000	36.4	1000.0	9.000	On	L1	10.0	9.6	46.0
0.973500	30.2	1000.0	9.000	On	L1	10.0	15.8	46.0
1.036500	26.1	1000.0	9.000	On	L1	10.0	19.9	46.0
2.008500	22.1	1000.0	9.000	On	L1	10.0	23.9	46.0

[NEUTRAL]

Class B_N

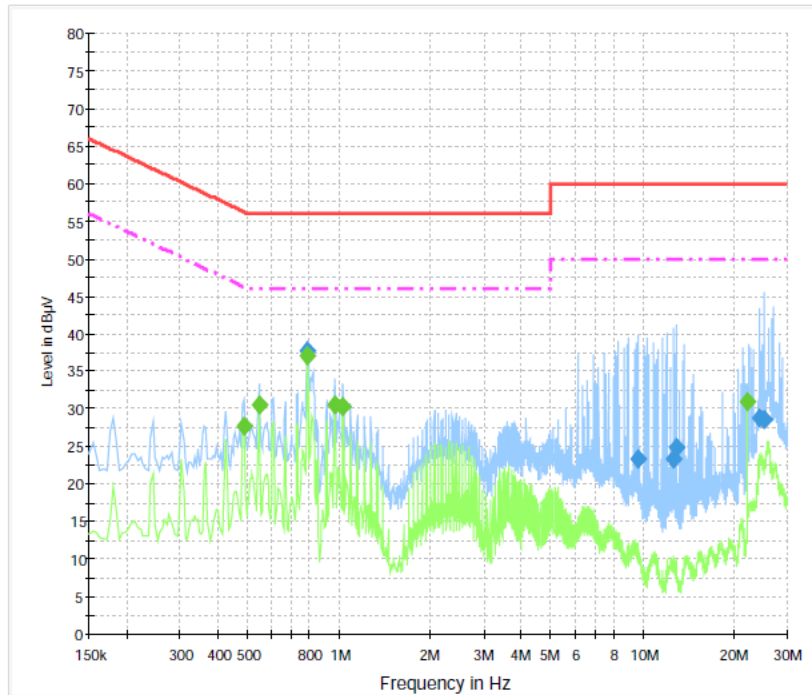

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.789000	37.8	1000.0	9.000	On	N	10.4	18.2	56.0
9.681000	23.4	1000.0	9.000	On	N	10.4	36.6	60.0
12.723000	23.3	1000.0	9.000	On	N	10.4	36.7	60.0
12.880500	24.8	1000.0	9.000	On	N	10.4	35.2	60.0
24.256500	28.7	1000.0	9.000	On	N	10.6	31.3	60.0
25.071000	28.6	1000.0	9.000	On	N	10.6	31.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.487500	27.6	1000.0	9.000	On	N	10.5	18.6	46.2
0.546000	30.5	1000.0	9.000	On	N	10.5	15.5	46.0
0.789000	37.1	1000.0	9.000	On	N	10.4	8.9	46.0
0.969000	30.6	1000.0	9.000	On	N	10.4	15.4	46.0
1.032000	30.3	1000.0	9.000	On	N	10.3	15.7	46.0
22.119000	30.9	1000.0	9.000	On	N	10.6	19.1	50.0

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2018-10-25	2019-10-25
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2018-10-24	2019-10-24
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2018-10-25	2019-10-25
4	Bilog Antenna	Schaffner	CBL6111C	2551	2018-05-10	2020-05-10
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2018-05-02	2020-05-02
6	6dB Attenuator	R&S	DNF	272.4110.50-2	2018-10-25	2019-10-25
7	AMPLIFIER	SONOMA	310	291721	2019-01-28	2020-01-28
8	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2019-01-29	2020-01-29
9	LISN	Rohde & Schwarz	ENV216	101760	2019-01-29	2020-01-29
10	Preamplifier	Agilent	8449B	3008A02011	2018-12-03	2019-12-03
11	Horn Antenna	ETS-Lindgren	3116	00062504	2017-12-04	2019-12-04
12	Horn Antenna	ETS-Lindgren	3117	00154525	2019-02-22	2021-02-22
13	Singnal Canditioning Unit	R&S	SCU-40	10023	2018-10-24	2019-10-24
14	Band Reject Filter	Micro Tronics	BRM50702	G233	2019-01-28	2020-01-28