



FCC TEST REPORT

Test report
On Behalf of
Techbloom (Beijing) Information Technology Co., Ltd.
For
Fault Predictive Intelligent UHF RFID Reader and Writer
Model No.: RF-RW202H
Serial Model : N/A
FCC ID: 2AS75-RF-RW202H

Prepared for: **Techbloom (Beijing) Information Technology Co., Ltd.**
Room 301, Buliding 6, No. 2, Ronghua South Road, Beijing ETDZ, Beijing China

Prepared By: **Shenzhen HUAK Testing Technology Co., Ltd.**
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: **Apr. 24, 2019 ~ Apr. 30, 2019**
Date of Report: **Apr. 30, 2019**
Report Number: **HK1904290896-E**



TEST RESULT CERTIFICATION

Applicant's name Techbloom (Beijing) Information Technology Co., Ltd.
Address Room 301, Buliding 6, No. 2, Ronghua South Road, Beijing ETDZ,
Beijing China

Manufacture's Name Techbloom (Beijing) Information Technology Co., Ltd.
Address Room 301, Buliding 6, No. 2, Ronghua South Road, Beijing ETDZ,
Beijing China

Product description

Trade Mark: N/A
Product name Fault Predictive Intelligent UHF RFID Reader and Writer
Model and/or type reference .. RF-RW202H
Standards FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test


Date (s) of performance of tests Apr. 24, 2019 ~ Apr. 30, 2019
Date of Issue Apr. 30, 2019
Test Result Pass

Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

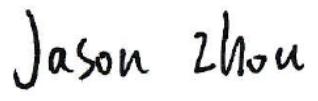Authorized Signatory : 

(Jason Zhou)



Table of Contents	Page
1. TEST SUMMARY	4
2. GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 Carrier Frequency of Channels	6
2.3 Operation of EUT during testing	6
2.4 DESCRIPTION OF TEST SETUP	6
2.5 MEASUREMENT INSTRUMENTS LIST	7
3. CONDUCTED EMISSIONS TEST	8
3.1 Conducted Power Line Emission Limit	8
3.2 Test Setup	8
3.3 Test Procedure	8
3.4 Test Result	8
4 RADIATED EMISSION TEST	11
4.1 Radiation Limit	11
4.2 Test Setup	11
4.3 Test Procedure	12
4.4 Test Result	12
5 BAND EDGE	22
5.1 Limits	22
5.2 Test Procedure	22
5.3 Test Result	22
6 OCCUPIED BANDWIDTH MEASUREMENT	24
6.1 Test Setup	24
6.2 Test Procedure	24
6.3 Measurement Equipment Used	24
6.4 Test Result	24
7 ANTENNA REQUIREMENT	32
8 PHOTOGRAPH OF TEST	33
Radiated Emission	33



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST		RESULT
15.207	Conducted Emission	COMPLIANT
15.249&15.209	Fundamental & Radiated Spurious Emission Measuremen	COMPLIANT
15.215	Bandwidth	COMPLIANT
15.205	Band Edge Emission	COMPLIANT
15.203	Antenna Requirement	COMPLIANT

1.2 TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Fault Predictive Intelligent UHF RFID Reader and Writer
Model Name	RF-RW202H
Serial No.	N/A
Trade Mark	N/A
Model Difference	N/A
FCC ID	2AS75-RF-RW202H
Antenna Type	SMA connect Antenna
Antenna Gain	3dBi
BT Operation frequency	902MHz-928MHz
Number of Channels	50CH
Modulation Type	ASK
Battery	N/A
Power Source	DC 24V

2.2 Carrier Frequency of Channels

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.75	14	909.25	27	915.75	40	922.25
2	903.25	15	909.75	28	916.25	41	922.75
3	903.75	16	910.25	29	916.75	42	923.25
4	904.25	17	910.75	30	917.25	43	923.75
5	904.75	18	911.25	31	917.75	44	924.25
6	905.25	19	911.75	32	918.25	45	924.75
7	905.75	20	912.25	33	918.75	46	925.25
8	906.25	21	912.75	34	919.25	47	925.75
9	906.75	22	913.25	35	919.75	48	926.25
10	907.25	23	913.75	36	920.25	49	926.75
11	907.75	24	914.25	37	920.75	50	927.25
12	908.25	25	914.75	38	921.25		
13	908.75	26	915.25	39	921.75		

2.3 Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode**


Low Channel: 902.75MHz

Middle Channel: 914.75MHz

High Channel: 927.25MHz

2.4 DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted testing:

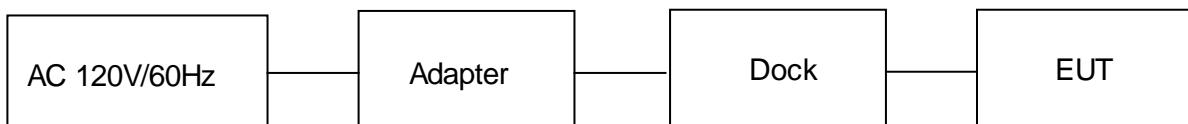

Note: Dock is only a connector, there is no extra circuit.

Operation of EUT during Radiation and Above1GHz Radiation testing:





2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2018	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2018	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2018	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2018	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2018	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2018	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2018	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2018	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2018	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2018	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JZOZtheBO T120-B Version	HKE-083	N/A	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 28, 2018	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2018	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 28, 2018	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 28, 2018	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year

3. CONDUCTED EMISSIONS TEST

3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

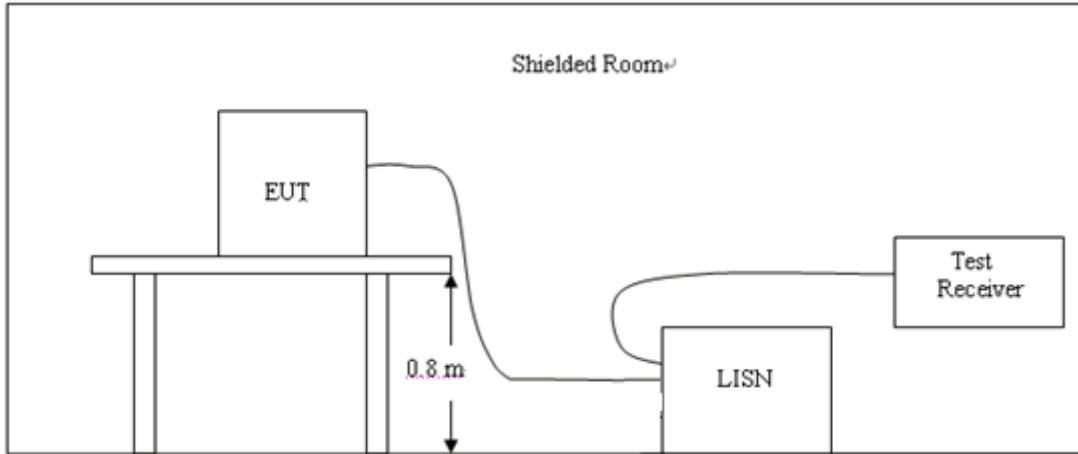

3.3 Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.


3.4 Test Result

Pass

All the test modes completed for test. Only the worst result was reported as below:




Test Specification: Line

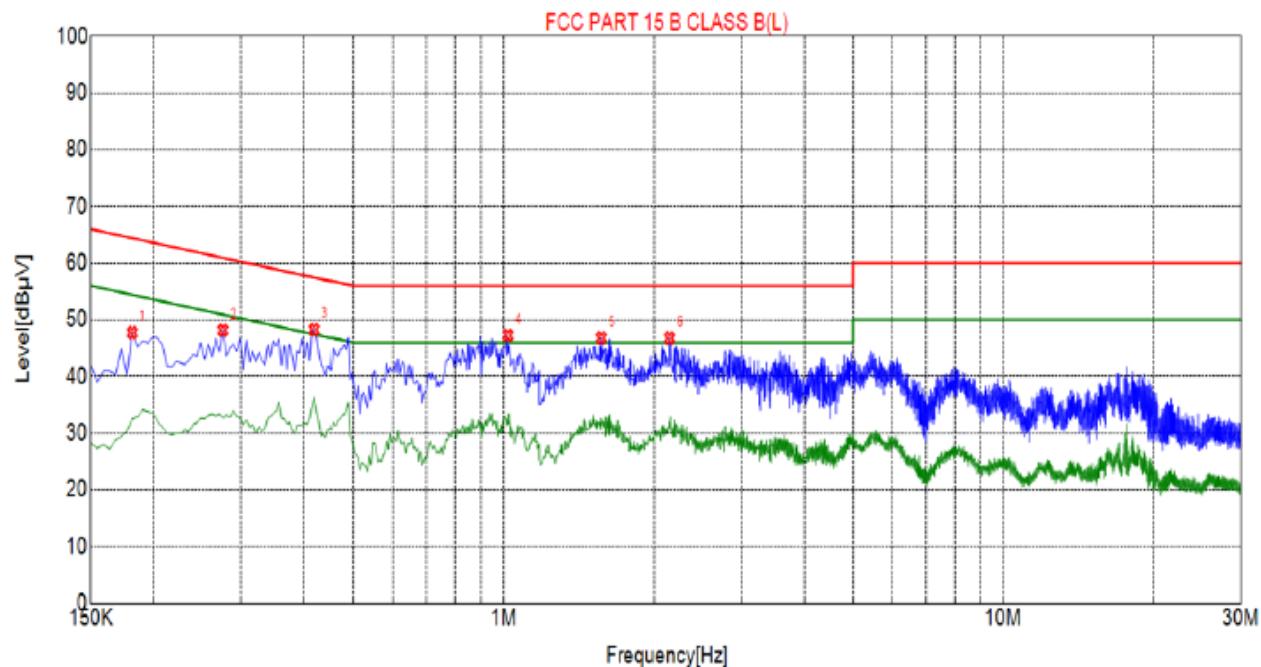

Suspected List						
NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.1815	47.75	10.06	64.42	16.67	QP
2	0.2780	48.18	10.04	60.94	12.76	QP
3	0.4200	48.29	10.04	57.45	9.16	QP
4	1.0185	47.27	10.07	56.00	8.73	QP
5	1.5675	46.82	10.11	56.00	9.18	QP
6	2.1480	46.79	10.16	56.00	9.21	QP

Test Specification: Neutral

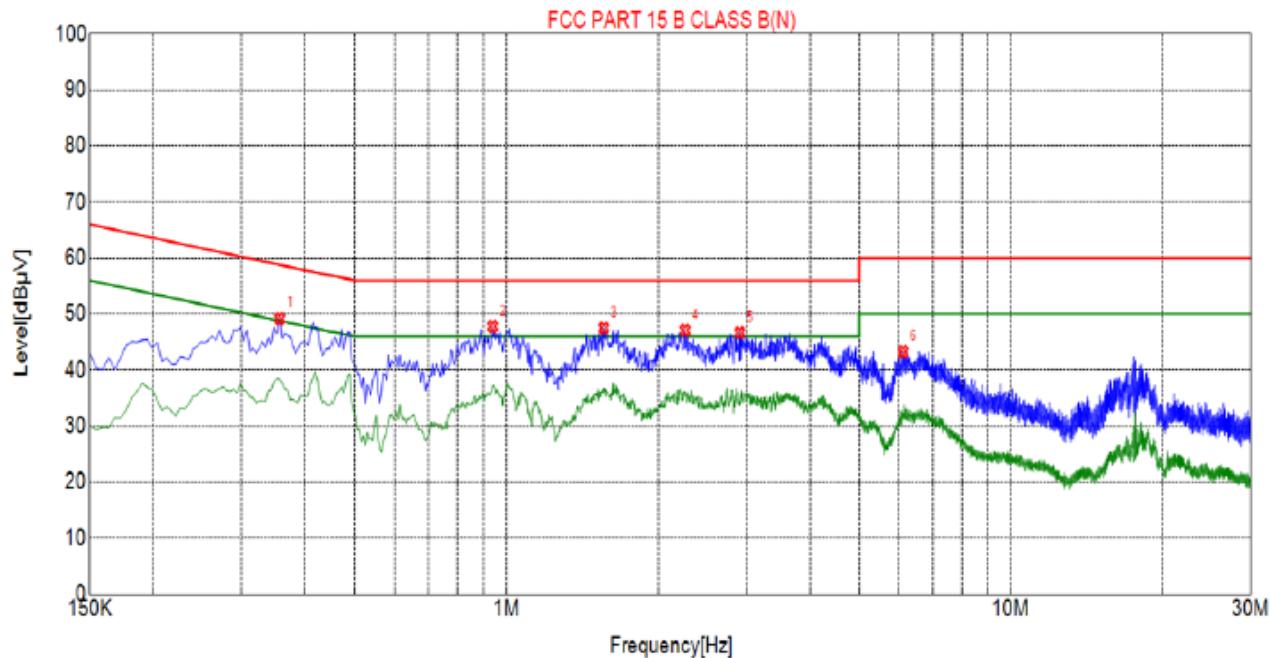

Suspected List						
NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.3570	49.16	10.03	58.80	9.64	QP
2	0.9375	47.78	10.06	58.00	8.22	QP
3	1.5585	47.50	10.11	58.00	8.50	QP
4	2.2605	47.09	10.18	58.00	8.91	QP
5	2.8995	46.65	10.21	58.00	9.35	QP
6	6.1215	43.27	10.23	60.00	16.73	QP

4 RADIATED EMISSION TEST

4.1 Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 Test Setup


(1) Radiated Emission Test-Up Frequency Below 30MHz

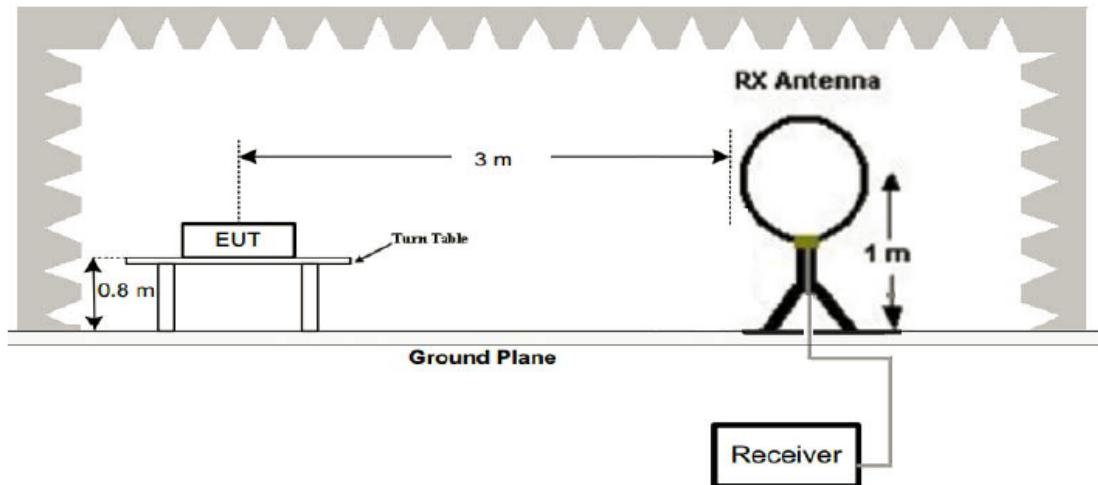

(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

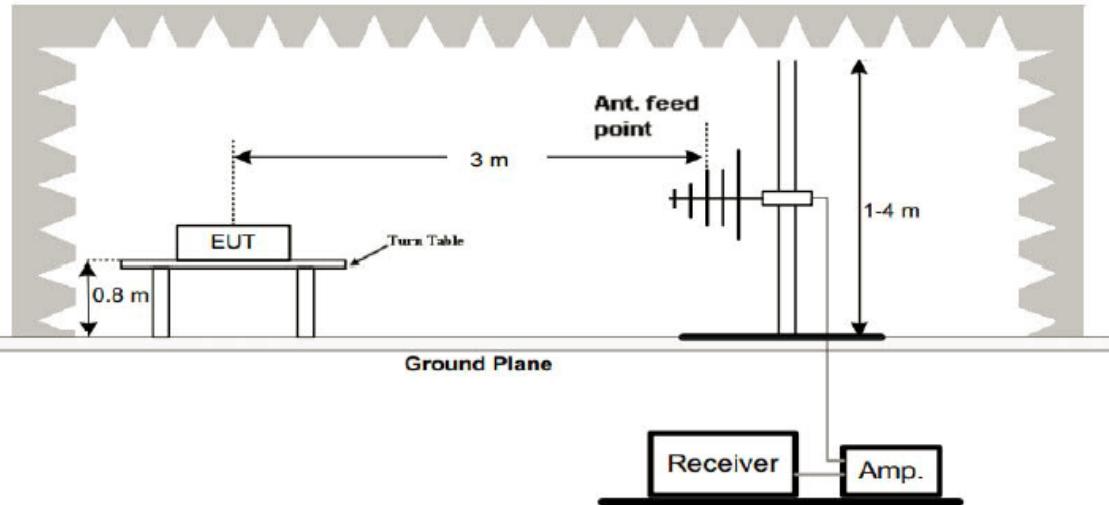

(3) Radiated Emission Test-Up Frequency Above 1GHz

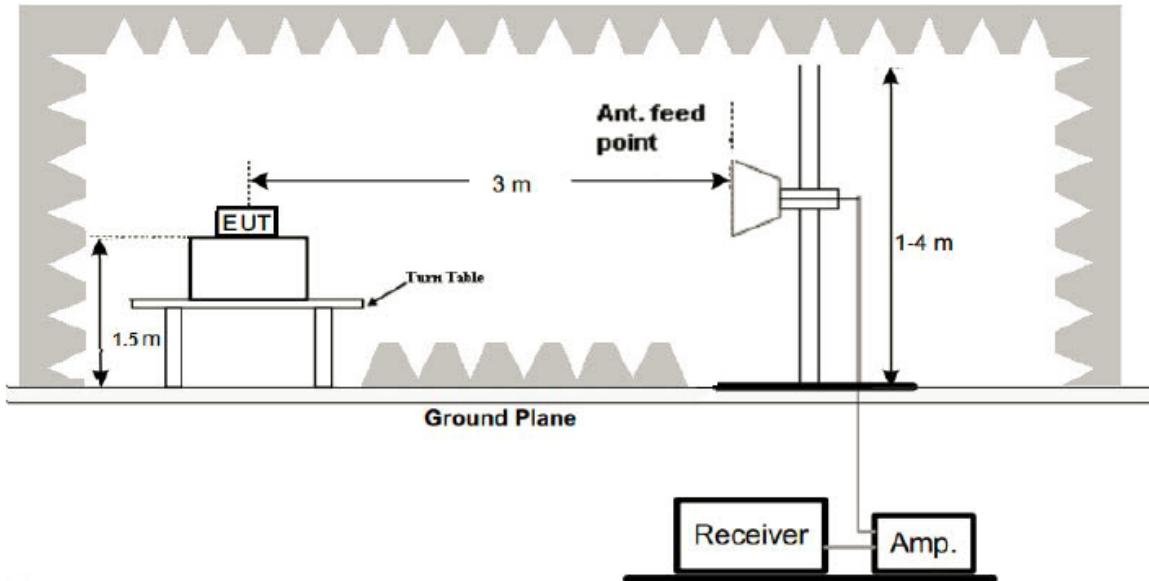

4.3 Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 Test Result


PASS

Remark:

1. All the test modes completed for test. The worst case of Radiated Emission is the first antenna, the test data of this mode was reported.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
3. Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9KHz to 30MHz and not recorded in this report.
4. This data is the worst case of Radiated Emission under the worst one of the Antenna.

Low channel below 1GHz Test Results:


Antenna polarity: H

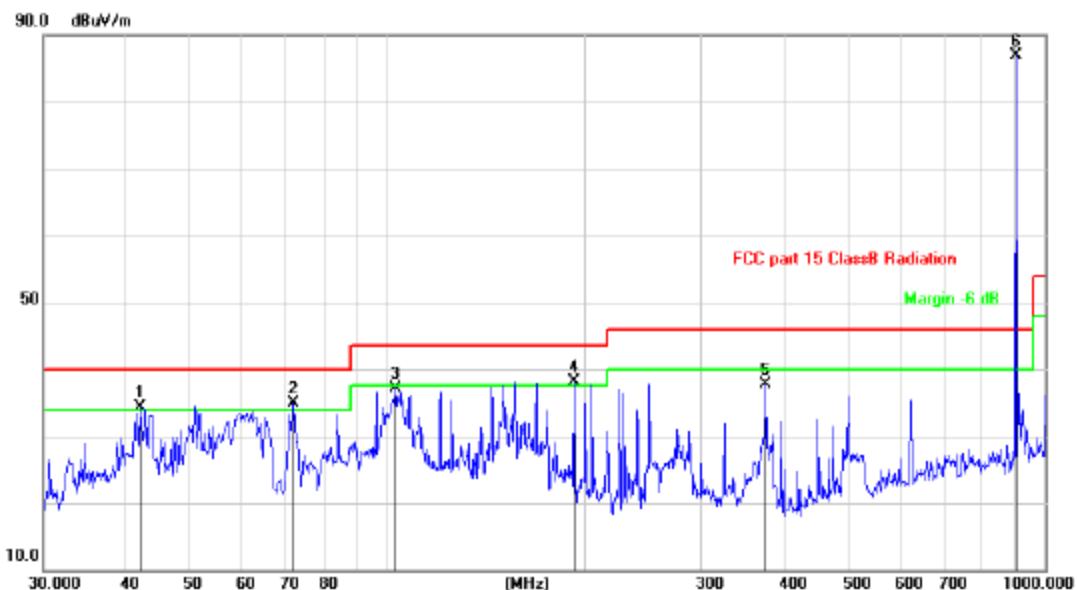

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	
1 !	42.0065	46.78	-12.56	34.22	40.00	-5.78	QP		
2 !	72.0841	50.20	-15.28	34.92	40.00	-5.08	QP		
3	102.7192	53.13	-15.96	37.17	43.50	-6.33	QP		
4 !	192.4183	53.06	-15.02	38.04	43.50	-5.46	QP		
5	375.9384	47.12	-9.39	37.73	46.00	-8.27	QP		
6 *	902.7503	85.80	1.12	86.92	94.00	-7.08	QP		

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level.
 The frequency 902.7504MHz is main frequency.

Antenna polarity: V

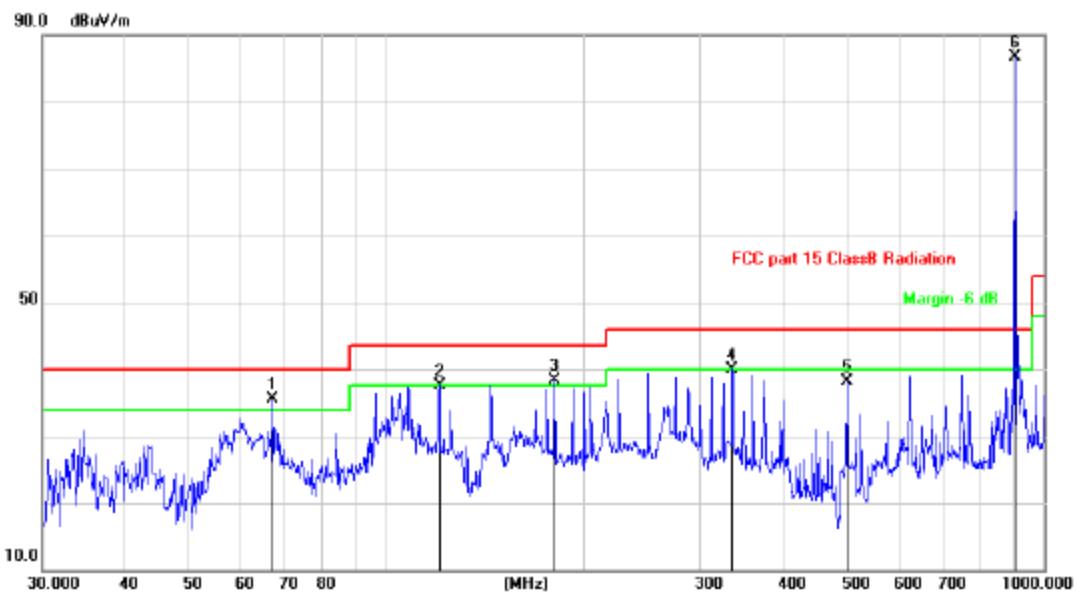


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	!	67.2022	49.87	-14.37	35.50	40.00	-4.50	QP			
2		120.2766	51.62	-14.13	37.49	43.50	-6.01	QP			
3	!	180.0165	52.09	-13.69	38.40	43.50	-5.10	QP			
4		336.0350	50.43	-10.43	40.00	46.00	-6.00	QP			
5		501.1788	44.43	-6.29	38.14	46.00	-7.86	QP			
6	*	902.7504	85.57	1.12	86.69	94.00	-7.31	QP			

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level

The frequency 902.7503MHz is main frequency.

Middle channel below 1GHz Test Results:

Antenna polarity: H

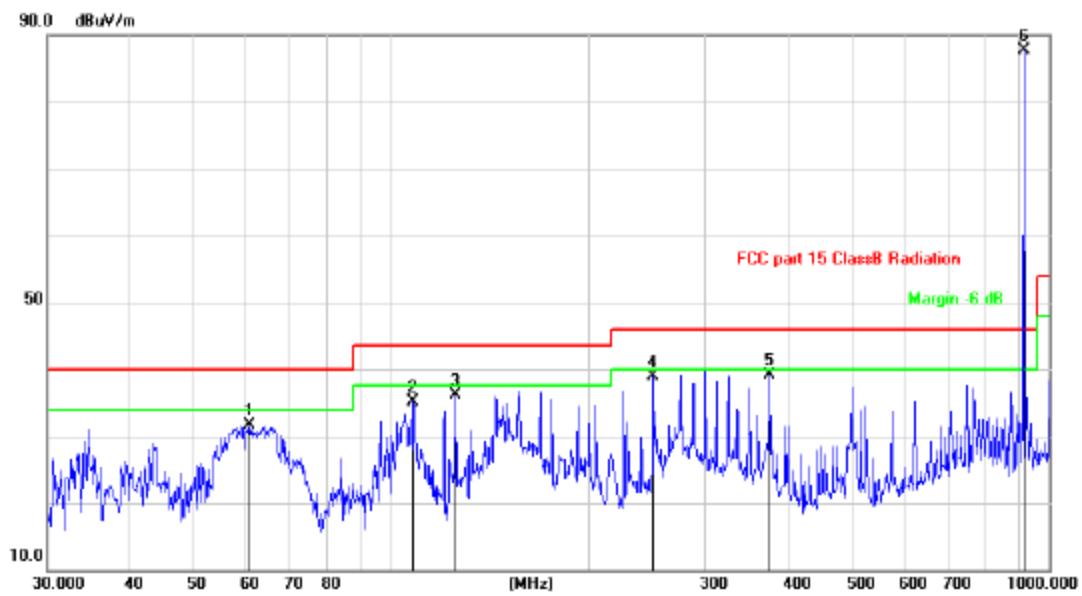


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	60.9176	44.93	-13.29	31.64	40.00	-8.36	QP			
2	107.8876	50.63	-15.48	35.15	43.50	-8.35	QP			
3	125.0066	49.83	-13.81	36.02	43.50	-7.48	QP			
4	250.3011	52.61	-13.77	38.84	46.00	-7.16	QP			
5	375.9384	48.52	-9.39	39.13	46.00	-6.87	QP			
6 *	914.7507	86.25	1.39	87.64	94.00	-6.36	QP			

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level

The frequency 914.7507MHz is main frequency.

Antenna polarity: V

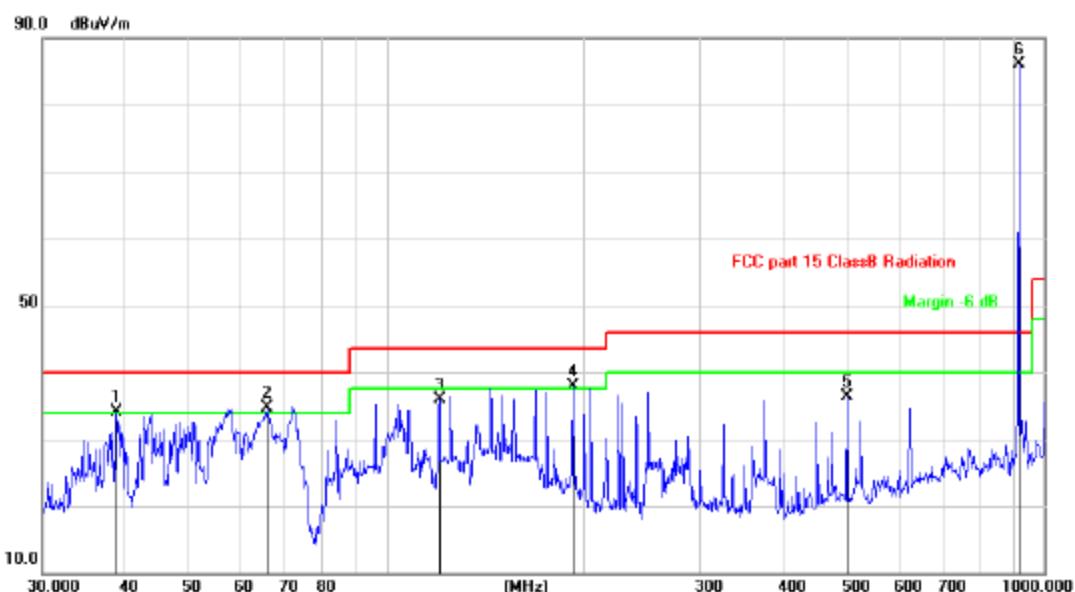


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	!	38.8878	46.65	-12.63	34.02	40.00	-5.98	QP			
2	!	65.8031	48.76	-14.12	34.64	40.00	-5.36	QP			
3		120.2766	50.10	-14.13	35.97	43.50	-7.53	QP			
4	!	192.4185	52.89	-15.02	37.87	43.50	-5.63	QP			
5		501.1789	42.67	-6.29	36.38	46.00	-9.62	QP			
6	*	914.7507	84.62	1.39	86.01	94.00	-7.99	QP			

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level

The frequency 914.7507MHz is main frequency.

High channel below 1GHz Test Results:

Antenna polarity: H

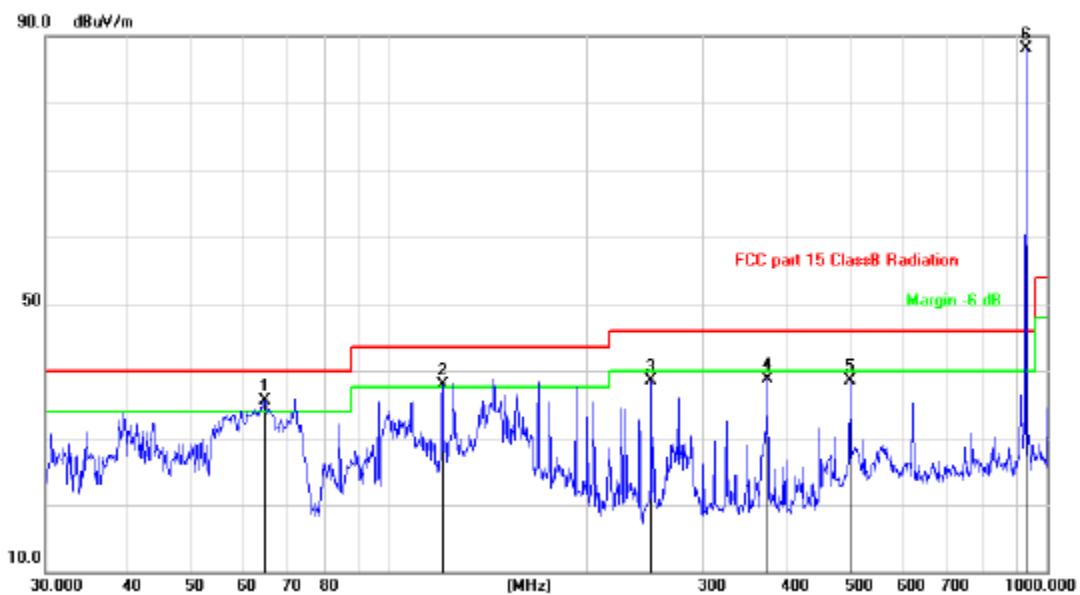


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over dB	Antenna Height cm		Table Degree	
							Detector	Comment	degree	Comment
1 !	64.6594	49.37	-13.94	35.43	40.00	-4.57	QP			
2 !	120.2766	52.10	-14.13	37.97	43.50	-5.53	QP			
3	250.3011	52.21	-13.77	38.44	46.00	-7.56	QP			
4	375.9384	48.17	-9.39	38.78	46.00	-7.22	QP			
5	501.1789	44.87	-6.29	38.58	46.00	-7.42	QP			
6 *	927.2501	86.34	1.67	88.01	94.00	-5.99	QP			

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level

The frequency 927.2501MHz is main frequency.

Antenna polarity: V

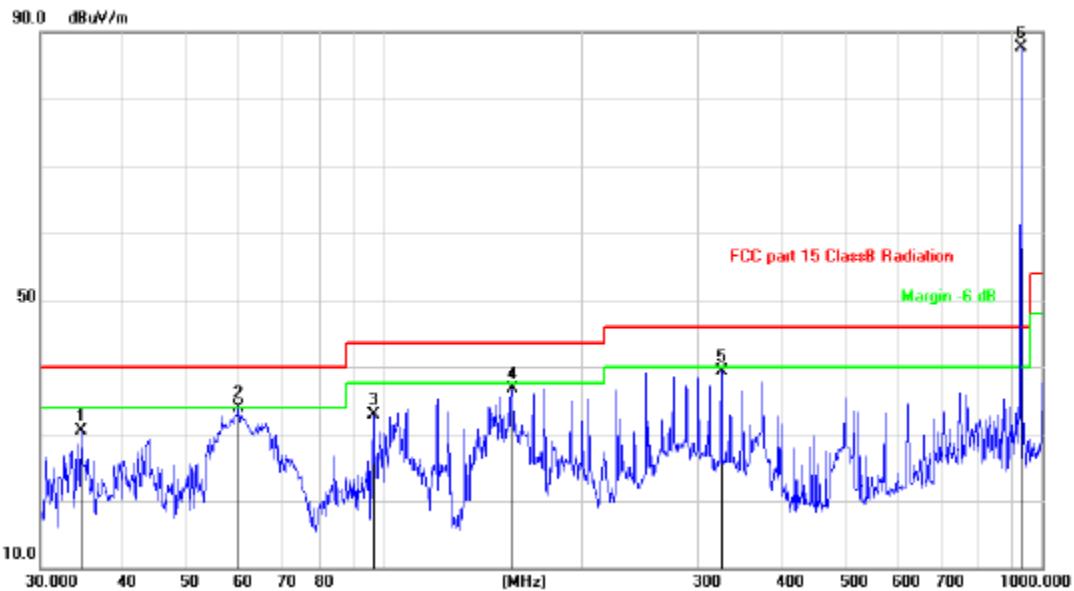

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	34.6385	43.70	-13.29	30.41	40.00	-9.59	QP		
2	60.0690	47.05	-13.14	33.91	40.00	-6.09	QP		
3	96.0986	49.46	-16.50	32.96	43.50	-10.54	QP		
4	156.4577	48.82	-12.06	36.76	43.50	-6.74	QP		
5	325.5957	49.87	-10.65	39.22	46.00	-6.78	QP		
6 *	927.2501	86.00	1.67	87.67	94.00	-6.33	QP		

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level
The frequency 927.2501MHz is main frequency.

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (4) The radiated Emission limit of the main frequency is 94dBuV/m, so it is pass.



Above 1 GHz Test Results:

CH Low

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Margin (dB)	Detector Type
1805.5	108.89	-5.84	53.26	74	-20.74	peak
1805.5	95.69	-5.84	46.63	54	-7.37	AVG
2708.25	56.60	-3.64	52.96	74	-21.04	peak
2708.25	47.62	-3.64	43.98	54	-10.02	AVG
3611	58.88	-0.95	57.93	74	-16.07	peak
3611	48.16	-0.95	47.21	54	-6.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Margin (dB)	Detector Type
1805.5	108.43	-5.84	52.69	74	-21.31	peak
1805.5	95.49	-5.84	43.65	54	-10.35	AVG
2708.25	56.38	-3.64	52.74	74	-21.26	peak
2708.25	47.05	-3.64	43.41	54	-10.59	AVG
3611	58.22	-0.95	57.27	74	-16.73	peak
3611	48.02	-0.95	47.07	54	-6.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
1829.5	108.26	-5.71	52.67	74	-21.33	peak
1829.5	95.08	-5.71	45.61	54	-8.39	AVG
2744.25	55.94	-3.51	52.43	74	-21.57	peak
2744.25	46.84	-3.51	43.33	54	-10.67	AVG
3659	57.99	-0.82	57.17	74	-16.83	peak
3659	47.88	-0.82	47.06	54	-6.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
1829.5	108.07	-5.71	52.69	74	-21.31	peak
1829.5	93.01	-5.71	42.68	54	-11.32	AVG
2744.25	55.96	-3.51	52.45	74	-21.55	peak
2744.25	47.00	-3.51	43.49	54	-10.51	AVG
3659	57.97	-0.82	57.15	74	-16.85	peak
3659	47.74	-0.82	46.92	54	-7.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
1854.5	56.34	-5.65	52.36	74	-21.64	peak
1854.5	47.21	-5.65	46.89	54	-7.11	AVG
2781.75	56.08	-3.43	52.65	74	-21.35	peak
2781.75	47.47	-3.43	44.04	54	-9.96	AVG
3709	57.30	-0.75	56.55	74	-17.45	peak
3709	47.72	-0.75	46.97	54	-7.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
1854.5	56.72	-5.65	53.66	74	-20.34	peak
1854.5	47.82	-5.65	45.62	54	-8.38	AVG
2781.75	56.08	-3.43	52.65	74	-21.35	peak
2781.75	47.44	-3.43	44.01	54	-9.99	AVG
3709	56.87	-0.75	56.12	74	-17.88	peak
3709	47.51	-0.75	46.76	54	-7.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) <54 dB μ V/m(AV Limit), the Average Detected not need to completed.
- (7)All modes of operation were investigated and the worst-case emissions are reported.



5.1 Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

5.3 Test Result

NOTE; This data is the worst case of Radiated Emission under the worst one of the Antenna.

PASS

Radiated Band Edge Test:

Operation Mode: TX CH Low

Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
850	35.56	-3.05	32.51	46	-13.49	QP
850	/	/	/	/	/	AVG
880	36.35	-3.08	33.27	46	-12.73	QP
880	/	/	/	/	/	AVG
902	38.05	-3.12	34.93	46	-11.07	QP
902	/	/	/	/	/	AVG

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
850	35.61	-3.05	32.56	46	-13.44	QP
850	/	/	/	/	/	AVG
880	36.32	-3.08	33.24	46	-12.76	QP
880	/	/	/	/	/	AVG
902	37.56	-3.12	34.44	46	-11.56	QP
902	/	/	/	/	/	AVG



Operation Mode: TX CH High

Horizontal (Worst case)

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
928.00	36.02	-3.18	32.84	46	-13.16	QP
928.00	/	/	/	/	/	AVG
950.00	37.13	-3.22	33.91	46	-12.09	QP
950.00	/	/	/	/	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
928.00	36.11	-3.18	32.93	46	-13.07	QP
928.00	/	/	/	/	/	AVG
950.00	37.15	-3.22	33.93	46	-12.07	QP
950.00	/	/	/	/	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



6 OCCUPIED BANDWIDTH MEASUREMENT

6.1 Test Setup

Same as Radiated Emission Measurement

6.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW= 1KHz. VBW= 3 KHz, Span=130KHz
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

6.3 Measurement Equipment Used

Same as Radiated Emission Measurement


6.4 Test Result

Antenna 1

PASS

Frequency	20dB Bandwidth (MHz)	Result
902.75MHz	0.038	PASS
914.75MHz	0.0397	PASS
927.25MHz	0.0409	PASS

CH: 902.75MHz

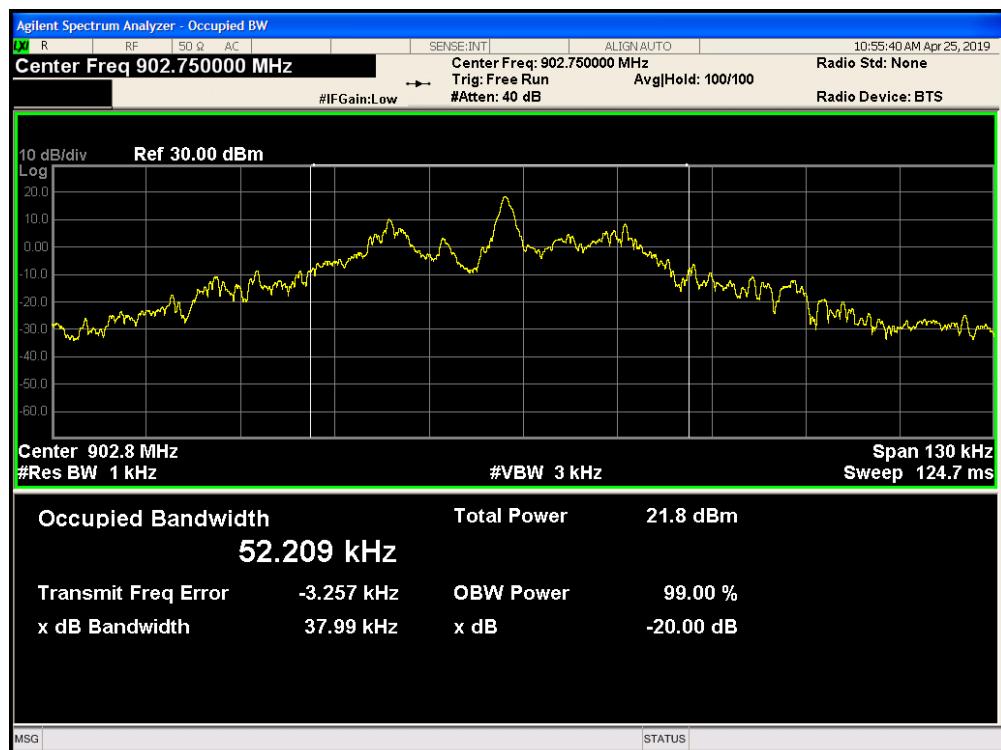



CH: 914.75MHz



CH: 927.25MHz





Antenna 2

PASS


Frequency	20dB Bandwidth (MHz)	Result
902.75MHz	0.038	PASS
914.75MHz	0.0383	PASS
927.25MHz	0.0412	PASS

CH: 902.75MHz





CH: 914.75MHz

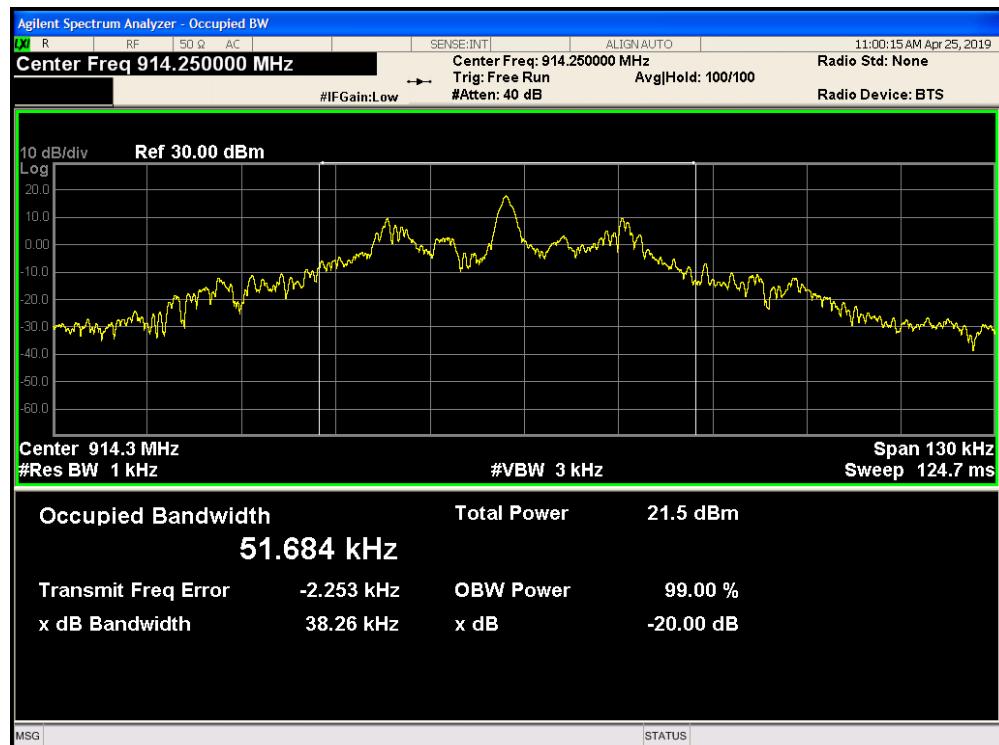

CH: 927.25MHz





Antenna 3

PASS

Frequency	20dB Bandwidth (MHz)	Result
902.75MHz	0.0548	PASS
914.75MHz	0.0528	PASS
927.25MHz	0.0711	PASS

CH: 902.75MHz






CH: 914.75MHz



CH: 927.25MHz

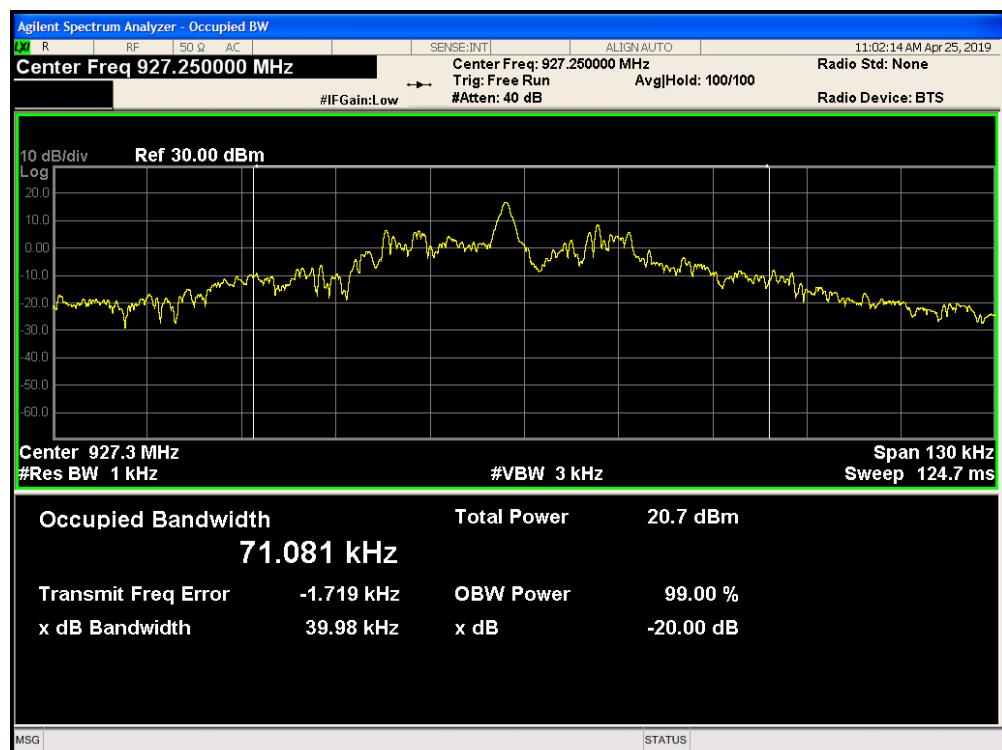



Antenna 4

PASS

Frequency	20dB Bandwidth (MHz)	Result
902.75MHz	0.053	PASS
914.75MHz	0.0503	PASS
927.25MHz	0.075	PASS

CH: 902.75MHz





CH: 914.75MHz



CH: 927.25MHz





7 ANTENNA REQUIREMENT

Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Connected Construction

The antenna used in this product is External Antenna. The directional gains of antenna used for transmitting is 3dBi.


The product is professionally installed. The installer will be responsible for ensuring that the proper antenna is employed.

External Antenna

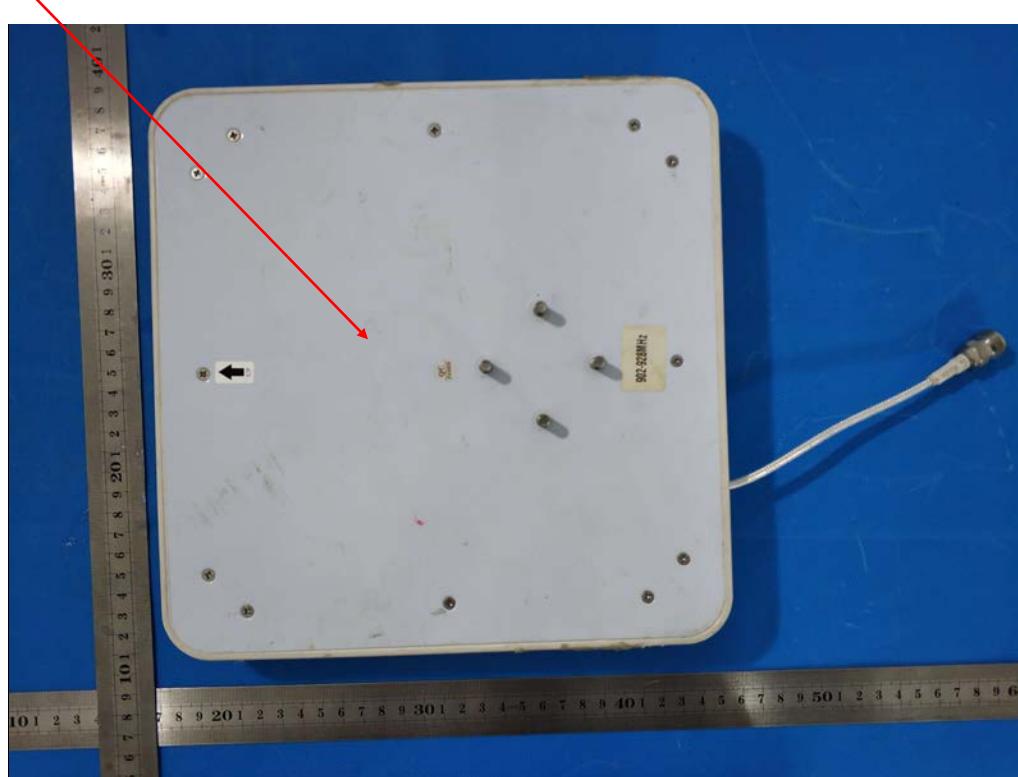

8 PHOTOGRAPH OF TEST

Radiated Emission

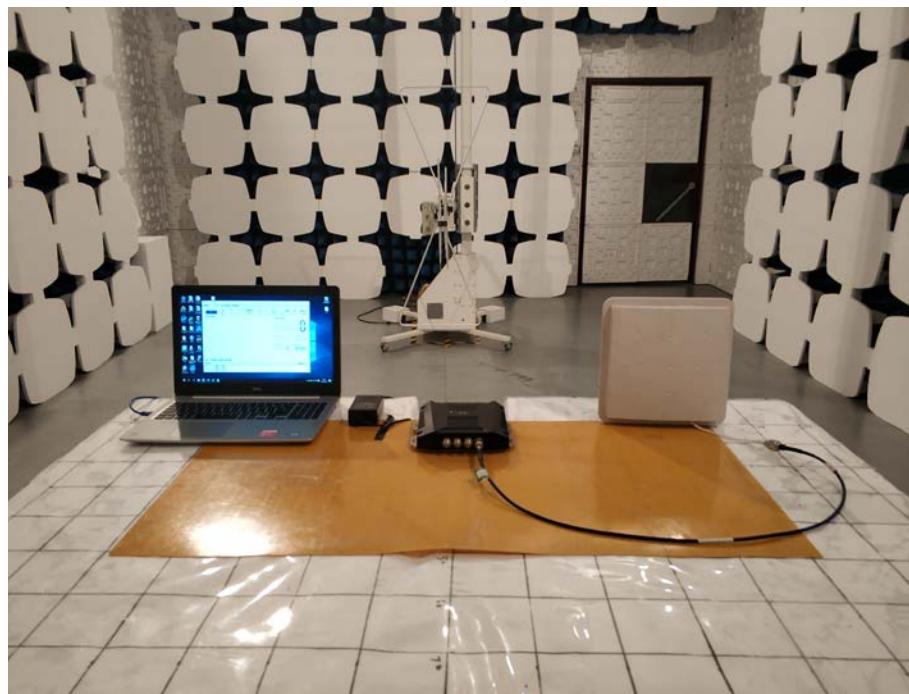

Conducted Emission



End of Report