

Product specification

Quick Reference Data

	Antenna module on the system board	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	0	
Directivity (dBi)	1(all direction antenna)	
Efficiency (dB)	70%	
Gain (dBi)	1.68 (Peak Gain XZ-plane)	
Maximum Power (dBm)	1.46 (XY-plane)	
Minimum Power (dBm)	1.42 (XY-plane)	
Avg. Power (dBm)	1.35 (XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	V ertical & Horizontal	
V . S . W . R	< 6	


All the technical data and information contained herein are subject to change without prior notice

Antenna Gain

Gain Table


Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	

Antenna size

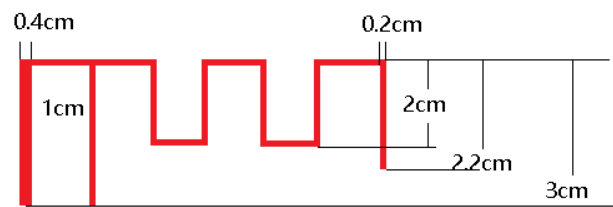


Test Ccompany:	TA Technology (Shanghai) Co., Ltd.
Test Address:	Building 1, No. 400, Fangchun Road, China (Shanghai) Pilot Free Trade Zone
Applicant Ccompany:	Shenzhen Veister Tech Co., Ltd
Applicant Address:	4F Block B, No.2 Huangfeng Industrial Area HangKong Road, Baoan, Shenzhen, China


Return Loss

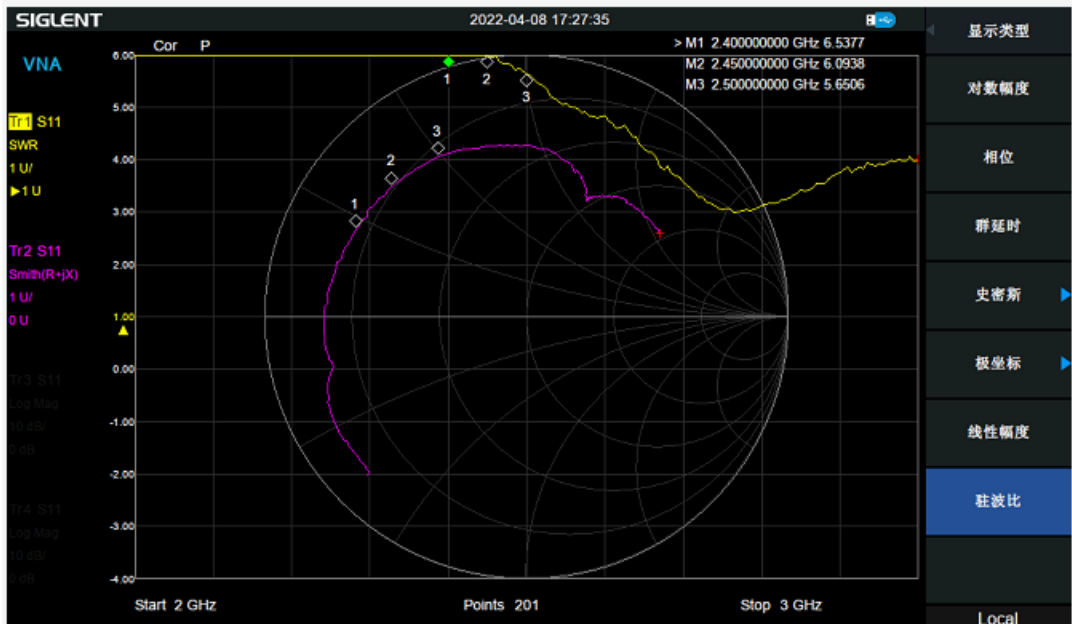


3D radiation pattern diagram

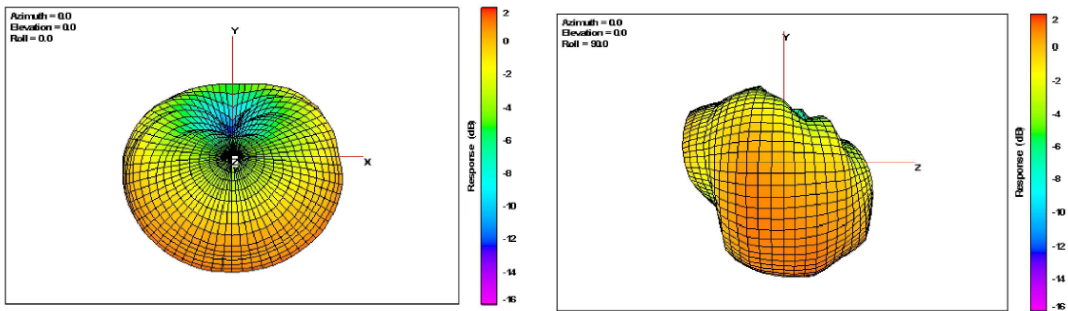

XY-plane

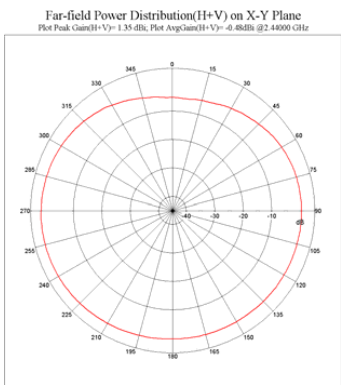

XZ-plane

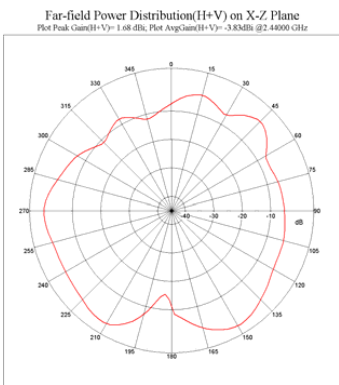

YZ-plane

