

Report No.: TWN2505731E

Applicant: Shenzhen Glory Star Technology Industrial Co., Ltd

Product: Wireless Earphone

Model No.: G25, MC-AP120

Trademark: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

oron amagnesse compasse

Approved By

Terry Tang

Manager

Dated: June 03, 2025

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TWN2505731E Page 2 of 55

Date: 2025-06-03



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Report No.: TWN2505731E

Date: 2025-06-03



Test Report Conclusion

	Content	
1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	13
6.5	Test Result.	15
7.0	Band Edge	25
7.1	Test Method and Test Procedure.	25
7.2	Radiated Test Setup	25
7.3	Configuration of the EUT	25
7.4	EUT Operating Condition.	25
7.5	Band Edge Limit.	25
7.6	Band Edge Test Result.	26
8.0	Antenna Requirement	30
9.0	20dB bandwidth measurement.	31
10.0	FCC ID Label	41
11.0	Photo of Test Setup and EUT View.	42

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TWN2505731E Page 4 of 55

Date: 2025-06-03



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United States

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Glory Star Technology Industrial Co., Ltd

Address: Room2101, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District, Shenzhen, China

1.3 Description of EUT

Product: Wireless Earphone

Manufacturer: Shenzhen Glory Star Technology Industrial Co., Ltd

Address: Room2101, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District,

Shenzhen, China

Trademark: N/A Model Number: G25

Additional Model Name MC-AP120 Rating: DC5.0V

Battery: DC3.7V, 40mAh Li-ion battery for earphones and Built-in DC3.7V, 300mAh

Li-ion battery for charger base.

Serial No.: GS2520250618

Hardware Version: V2.0

Software Version: v02x_s13047 Operation Frequency: 2402-2480MHz

Modulation Type: GFSK, 月/4DQPSK, 8DPSK

Number of Channels: 79 Channel Separation: 1MHz

Antenna Designation Chip antenna with gain 2.25dBi maximum (Get from the antenna specification)

1.4 Submitted Sample: 4 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TWN2505731E Page 5 of 55

Date: 2025-06-03



1.5 Test Duration

2025-05-20 to 2025-06-03

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 55

Report No.: TWN2505731E

Date: 2025-06-03



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100253	2024-07-12	2025-07-11
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2024-07-12	2025-07-11
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2024-07-12	2025-07-11
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2025-07-17
Power meter	Anritsu	ML2487A	6K00003613	2024-07-12	2025-07-11
Power sensor	Anritsu	MA2491A	32263	2024-07-12	2025-07-11
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2024-07-12	2025-07-11
EMI Test Receiver	RS	ESCS 30	834115/006	2024-07-12	2025-07-11
Spectrum	HP/Agilent	E4407B	MY50441392	2024-07-12	2025-07-11
Spectrum	RS	FSP	1164.4391.38	2024-07-12	2025-07-11
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2024-07-12	2025-07-11
RF Cable	Zhengdi	7m		2024-07-12	2025-07-11
Pre-Amplifier	Schwarebeck	BBV9743	#218	2024-07-12	2025-07-11
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2024-07-12	2025-07-11
LISN	SCHAFFNER	NNB42	00012	2024-07-12	2025-07-11
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 55

Report No.: TWN2505731E

Date: 2025-06-03



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies
FCC Part 15.215(c)	20dB bandwidth	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: TWN2505731E

Date: 2025-06-03



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

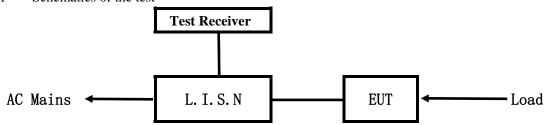


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

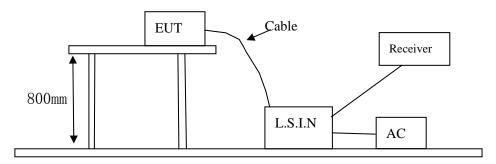

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
	Shenzhen Glory Star		
Wireless Earphone	Technology Industrial Co.,	G25, MC-AP120	2AS7V-AP120
	Ltd		

B. Internal Device

_				
Ī	Device	Manufacturer	Model	FCC ID/DOC

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 9 of 55

Report No.: TWN2505731E

Date: 2025-06-03



N/A		
IV/A		

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	Xiaomi	MDY-12-EF	Input: 100-240V~, 50/60Hz, 1.7A;
			Output: DC5V, 3A;
			5-20A; 6.2- 3.25A(67W Max)

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

6 61					
Frequency	Limits (dB µ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies
- 5.6 Test Results:

Date: 2025-06-03




A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Results: Pass

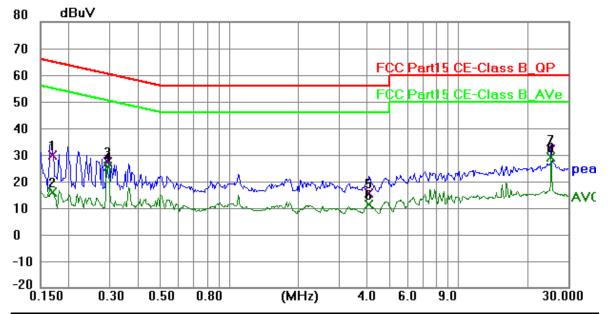

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1695	19.39	10.33	29.72	64.98	-35.26	QP	Р
2	0.1695	5.51	10.33	15.84	54.98	-39.14	AVG	Р
3	0.2943	17.06	10.35	27.41	60.40	-32.99	QP	Р
4	0.2943	15.29	10.35	25.64	50.40	-24.76	AVG	Р
5	4.0608	3.32	12.05	15.37	56.00	-40.63	QP	Р
6	4.0608	-0.66	12.05	11.39	46.00	-34.61	AVG	Р
7	25.2300	16.52	15.29	31.81	60.00	-28.19	QP	Р
8	25.2300	13.72	15.29	29.01	50.00	-20.99	AVG	Р

Date: 2025-06-03




B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Results: Pass

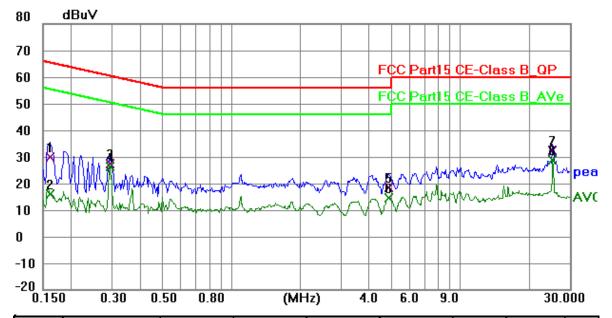

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1617	19.54	10.34	29.88	65.38	-35.50	QP	Р
2	0.1617	5.43	10.34	15.77	55.38	-39.61	AVG	Р
3	0.2943	17.08	10.35	27.43	60.40	-32.97	QP	Р
4	0.2943	15.75	10.35	26.10	50.40	-24.30	AVG	Р
5	4.8525	6.13	12.26	18.39	56.00	-37.61	QP	Р
6	4.8525	2.37	12.26	14.63	46.00	-31.37	AVG	Р
7	25.2300	16.87	15.29	32.16	60.00	-27.84	QP	Р
8	25.2300	13.36	15.29	28.65	50.00	-21.35	AVG	Р

Report No.: TWN2505731E

Date: 2025-06-03



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. The frequency spectrum is set as follows:


Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
ADOVE IGHZ	Peak	1MHz	10Hz	Average

(Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

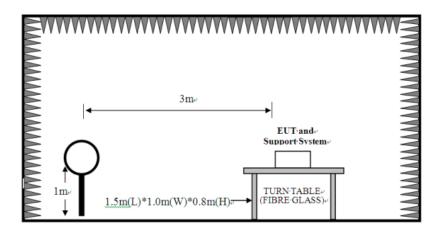


Report No.: TWN2505731E


Date: 2025-06-03



For radiated emissions from 30MHz to1GHz

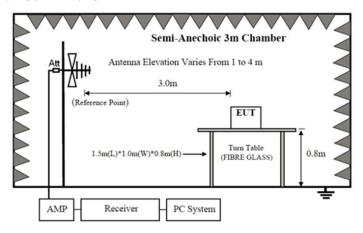

For radiated emissions above 1GHz

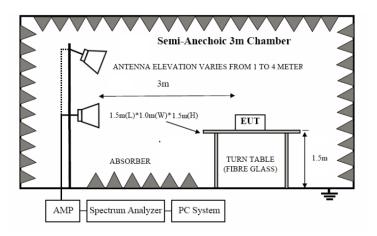

- 6.2 Configuration of the EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TWN2505731E Page 14 of 55

Date: 2025-06-03



A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Stre	ength of Fundame	ntal (3m)	Field Strength of Harmonics (3m)			
(MHz)	mV/m	n dBuV/m uV/m dBuV/m				V/m	
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)	

Note:

- 1. RF Field Strength $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-80	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. The three modulation modes of GFSK, Pi/4D-QPSK and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.
- 6. Battery was fully charged during test
- 7. The RF parts for left and right earphone are exactly same. So, for radiated emissions above 1GHz, only left earphone was selected for testing as a representative; for radiated emissions below 1GHz, both left and right earphone were tested.

Report No.: TWN2505731E Page 15 of 55

Date: 2025-06-03




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

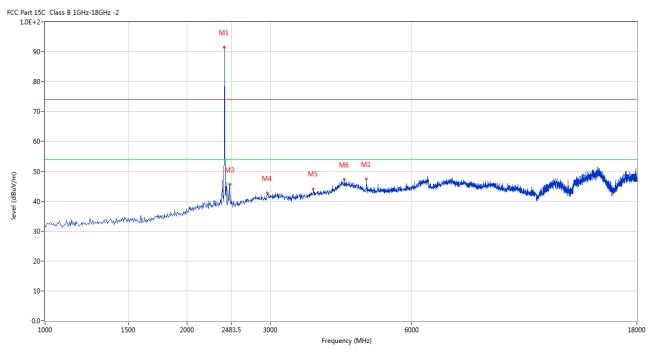


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	91.46	-3.57	114.0	-22.54	Peak	234.00	100	Horizontal	Pass
2	4802.799	47.39	3.12	74.0	-26.61	Peak	244.00	100	Horizontal	Pass
3	2465.884	45.60	-3.57	74.0	-28.40	Peak	360.00	100	Horizontal	Pass
4	2958.760	42.67	-2.65	74.0	-31.33	Peak	73.00	100	Horizontal	Pass
5	3706.573	43.98	-0.19	74.0	-30.02	Peak	239.00	100	Horizontal	Pass
6	4309.923	47.19	1.86	74.0	-26.81	Peak	17.00	100	Horizontal	Pass

Report No.: TWN2505731E Page 16 of 55

Date: 2025-06-03



Vertical

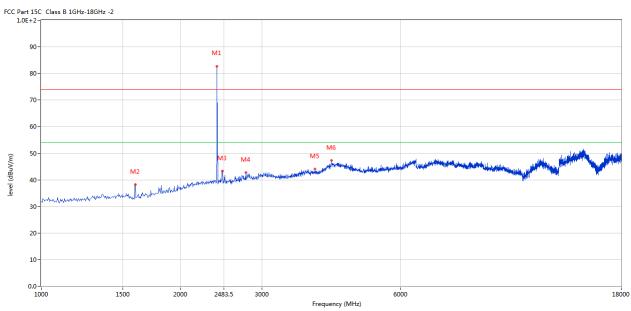

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	82.76	-3.57	114.0	-31.24	Peak	96.00	100	Vertical	Pass
2	1599.100	38.20	-7.97	74.0	-35.80	Peak	252.00	100	Vertical	Pass
3	2465.884	43.27	-3.57	74.0	-30.73	Peak	326.00	100	Vertical	Pass
4	2771.807	42.68	-2.77	74.0	-31.32	Peak	321.00	100	Vertical	Pass
5	3914.771	43.98	0.87	74.0	-30.02	Peak	240.00	100	Vertical	Pass
6	4250.437	47.23	1.72	74.0	-26.77	Peak	6.00	100	Vertical	Pass


Report No.: TWN2505731E Page 17 of 55

Date: 2025-06-03



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

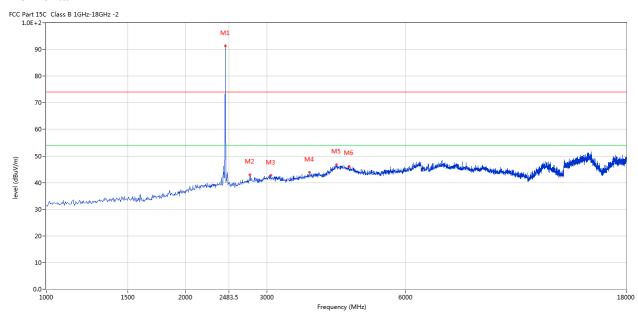


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	91.26	-3.57	114.0	-22.74	Peak	232.00	100	Horizontal	Pass
2	2759.060	42.91	-2.80	74.0	-31.09	Peak	137.00	100	Horizontal	Pass
3	3060.735	42.69	-2.37	74.0	-31.31	Peak	189.00	100	Horizontal	Pass
4	3715.071	43.81	-0.14	74.0	-30.19	Peak	153.00	100	Horizontal	Pass
5	4246.188	46.73	1.71	74.0	-27.27	Peak	132.00	100	Horizontal	Pass
6	4518.120	46.22	2.27	74.0	-27.78	Peak	294.00	100	Horizontal	Pass

Report No.: TWN2505731E Page 18 of 55

Date: 2025-06-03



Vertical

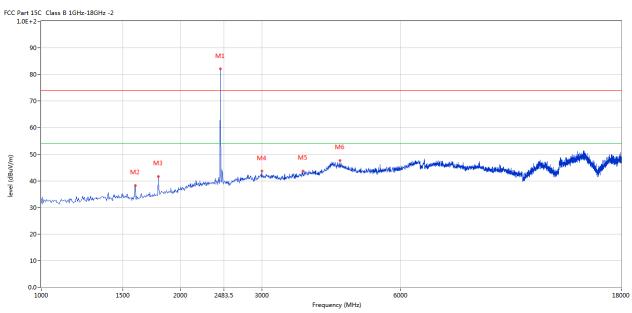

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	82.05	-3.57	114.0	-31.95	Peak	118.00	100	Vertical	Pass
2	1599.100	38.17	-7.97	74.0	-35.83	Peak	249.00	100	Vertical	Pass
3	1756.311	35.13	-7.14	74.0	-38.87	Peak	159.00	100	Vertical	Pass
4	3001.250	43.77	-2.63	74.0	-30.23	Peak	285.00	100	Vertical	Pass
5	3685.329	43.76	-0.28	74.0	-30.24	Peak	360.00	100	Vertical	Pass
6	4433.142	47.73	2.07	74.0	-26.27	Peak	143.00	100	Vertical	Pass


Report No.: TWN2505731E Page 19 of 55

Date: 2025-06-03



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

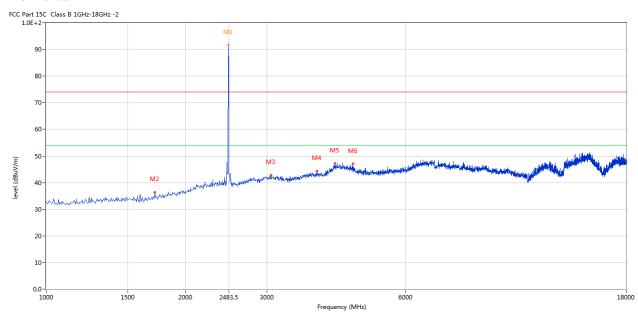

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	91.67	-3.57	114.0	-22.33	Peak	226.00	100	Horizontal	Pass
2	1718.070	36.35	-7.41	74.0	-37.65	Peak	241.00	100	Horizontal	Pass
3	3060.735	42.82	-2.37	74.0	-31.18	Peak	61.00	100	Horizontal	Pass
4	3851.037	44.17	0.57	74.0	-29.83	Peak	328.00	100	Horizontal	Pass
5	4216.446	47.23	1.64	74.0	-26.77	Peak	297.00	100	Horizontal	Pass
6	4607.348	47.10	2.59	74.0	-26.90	Peak	8.00	100	Horizontal	Pass


Page 20 of 55

Report No.: TWN2505731E

Date: 2025-06-03



Vertical

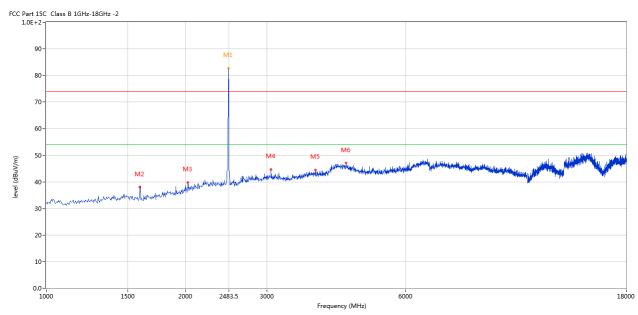

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	82.66	-3.57	114.0	-31.34	Peak	285.00	100	Vertical	Pass
2	1543.864	33.38	-8.07	74.0	-40.62	Peak	108.00	100	Vertical	Pass
3	2023.994	39.79	-4.90	74.0	-34.21	Peak	259.00	100	Vertical	Pass
4	3064.984	44.57	-2.35	74.0	-29.43	Peak	274.00	100	Vertical	Pass
5	3829.793	44.49	0.46	74.0	-29.51	Peak	17.00	100	Vertical	Pass
6	4458.635	46.99	2.12	74.0	-27.01	Peak	274.00	100	Vertical	Pass

Note: (1) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (2) Margin=Emission-Limits
- (3) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (4) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TWN2505731E Page 21 of 55

Date: 2025-06-03




Left Earphone

B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

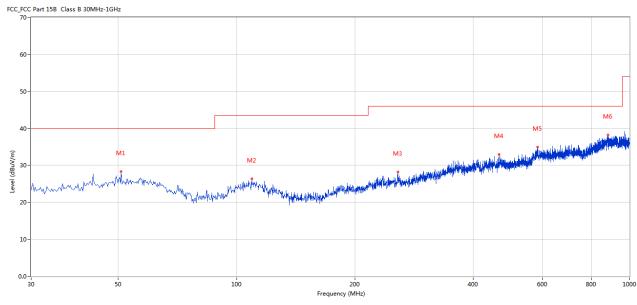

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	50.850	28.39	-5.04	40.0	11.61	Peak	279.00	100	Horizontal	Pass
2	109.278	26.41	-5.98	43.5	17.09	Peak	244.00	100	Horizontal	Pass
3	257.408	28.25	-5.09	46.0	17.75	Peak	274.00	100	Horizontal	Pass
4	465.179	33.01	-0.54	46.0	12.99	Peak	130.00	100	Horizontal	Pass
5	583.732	34.94	1.65	46.0	11.06	Peak	309.00	100	Horizontal	Pass
6	880.477	38.18	5.09	46.0	7.82	Peak	81.00	100	Horizontal	Pass

Report No.: TWN2505731E Page 22 of 55


Date: 2025-06-03



Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

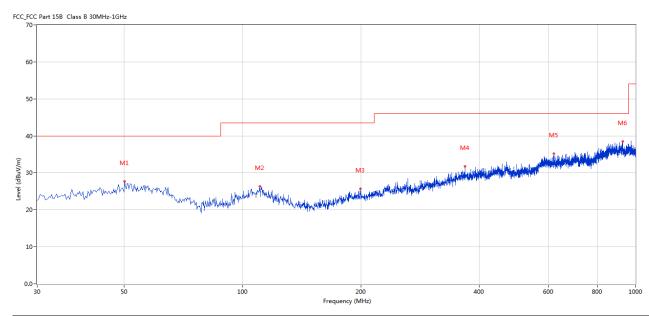

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	50.122	27.65	-5.17	40.0	12.35	Peak	241.00	100	Vertical	Pass
2	110.732	26.36	-5.96	43.5	17.14	Peak	231.00	100	Vertical	Pass
3	199.708	25.77	-7.35	43.5	17.73	Peak	232.00	100	Vertical	Pass
4	367.961	31.78	-1.71	46.0	14.22	Peak	322.00	100	Vertical	Pass
5	620.097	35.18	1.45	46.0	10.82	Peak	62.00	100	Vertical	Pass
6	928.965	38.44	5.03	46.0	7.56	Peak	353.00	100	Vertical	Pass

Report No.: TWN2505731E Page 23 of 55

Date: 2025-06-03




Right Earphone

General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

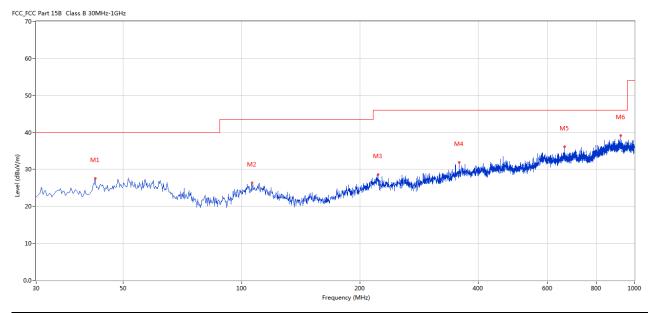

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	42.364	27.53	-5.53	40.0	12.47	Peak	148.00	100	Horizontal	Pass
2	106.368	26.41	-6.15	43.5	17.09	Peak	183.00	100	Horizontal	Pass
3	222.497	28.60	-6.46	46.0	17.40	Peak	359.00	100	Horizontal	Pass
4	357.778	31.96	-2.05	46.0	14.04	Peak	82.00	100	Horizontal	Pass
5	663.979	36.07	2.10	46.0	9.93	Peak	197.00	100	Horizontal	Pass
6	923.632	39.18	5.34	46.0	6.82	Peak	252.00	100	Horizontal	Pass

Report No.: TWN2505731E Page 24 of 55


Date: 2025-06-03



Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

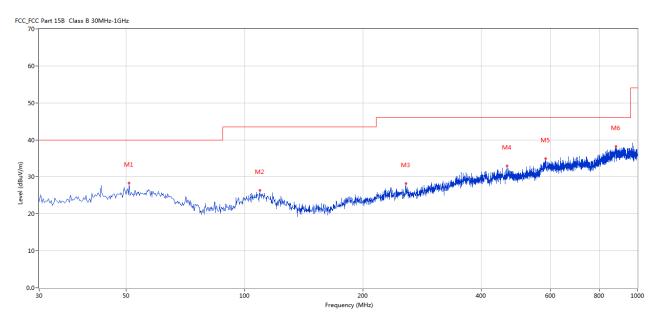

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	50.850	28.39	-5.04	40.0	11.61	Peak	279.00	100	Horizontal	Pass
2	109.278	26.41	-5.98	43.5	17.09	Peak	244.00	100	Horizontal	Pass
3	257.408	28.25	-5.09	46.0	17.75	Peak	274.00	100	Horizontal	Pass
4	465.179	33.01	-0.54	46.0	12.99	Peak	130.00	100	Horizontal	Pass
5	583.732	34.94	1.65	46.0	11.06	Peak	309.00	100	Horizontal	Pass
6	880.477	38.18	5.09	46.0	7.82	Peak	81.00	100	Horizontal	Pass

Report No.: TWN2505731E

Date: 2025-06-03




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

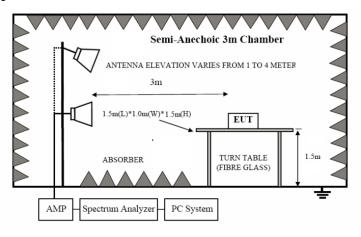

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of the EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.


Report No.: TWN2505731E Page 26 of 55

Date: 2025-06-03



7.6 Test Result

Product:	Wireless Earphone	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

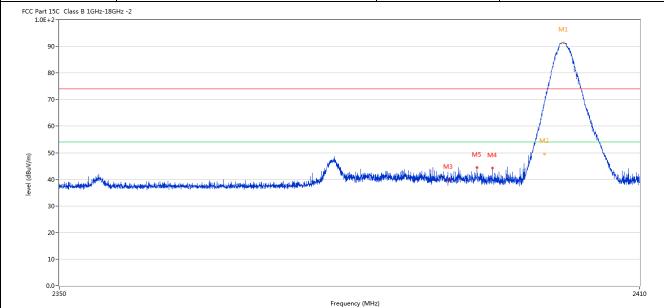

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402.037	91.28	-3.57	74.0	17.28	Peak	238.00	100	Horizontal	N/A
2	2439.541	65.02	-3.57	74.0	-8.98	Peak	238.00	100	Horizontal	Pass
2**	2439.541	49.54	-3.57	54.0	-4.46	AV	238.00	100	Horizontal	Pass
3	2390.055	39.73	-3.53	74.0	-34.27	Peak	46.00	100	Horizontal	Pass
4	2394.644	44.19	-3.55	74.0	-29.81	Peak	238.00	100	Horizontal	Pass
5	2393.039	44.42	-3.54	74.0	-29.58	Peak	46.00	100	Horizontal	Pass

Report No.: TWN2505731E Page 27 of 55

Date: 2025-06-03



Product:			Wireless Earphone			Detect	tor		Vertical	
	Mode	I	Keeping Tr	ansmitting		Test Vol	ltage DC3.7V			
Te	mperature	re 24 deg. C, Humidity 56% RH								
Te	est Result:		Pa	SS						
CC Par	t 15C Class B 1GHz-18GF	lz -2			'		<u>'</u>			,
1.01										
	90-								M1	
	80-							<u> </u>		
	70-							/		
	60-							M5		
Ê	50-					.1	M4	M2		
3						M3	kaal ka tii dal	مالاست	N	
level (dB	30 -	hidayuna dhing yara qilaadiishi da untid uga ahiinda ga ahiinda ga ahiinda ga ahiinda ga ahiinda ga ahiinda ga	روايي فيزير بين مينون المارية	ann pillegden pirminte la Annager despot	or a second and a large by	Helio a kata dinit				ediado destrondido
	30 -	isian na dha na adhala a mar na an	antigo, dinimali pira minane, mid galandi	ace a philosophic primate in the America base of	Pasikanin ede ida edil	Hater a dry a size had deleted	Labatra Licaniya ka			
	30-	niago, en eller, , , , , eller le	and photomorphy in minimum make and and and	ana debahasinta kalahanga bagih	Frequency (MHz)	neuro de maio de	Adhalista an in haife			
	30 -	Results	Factor	Limit	Frequency (MHz) Over Limit	Detector	Table	Height	ANT	2410
	30 - 20 - 10	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	1	Detector	Table (o)	Height (cm)	ANT	2410
No.	30 - 20 - 10 - 2350 Frequency				Over Limit	Detector Peak		_	ANT Vertical	2410
No.	30- 20- 10- 0.0- 2350 Frequency (MHz)	(dBuV/m)	(dB)	(dBuV/m)	Over Limit (dB)		(0)	(cm)		verdid
No.	30- 20- 10- 0.0- 2350 Frequency (MHz) 2401.992	(dBuV/m) 82.73	(dB) -3.57	(dBuV/m) 74.0	Over Limit (dB) 8.73	Peak	(o) 90.00	(cm) 100	Vertical	Verdid
No.	30- 10- 0.0- 2350 Frequency (MHz) 2401.992 2400.027	(dBuV/m) 82.73 58.79	(dB) -3.57 -3.57	(dBuV/m) 74.0 74.0	Over Limit (dB) 8.73 -15.21	Peak Peak	(o) 90.00 105.00	(cm) 100 100	Vertical Vertical	Verdid N/A Pass
(w/\ngp) si-si	30- 20- 10- 2350 Frequency (MHz) 2401.992 2400.027 2400.027	(dBuV/m) 82.73 58.79 43.61	(dB) -3.57 -3.57 -3.57	(dBuV/m) 74.0 74.0 54.0	Over Limit (dB) 8.73 -15.21 -10.39	Peak Peak AV	(o) 90.00 105.00 105.00	(cm) 100 100 100	Vertical Vertical Vertical	Verdid N/A Pass Pass

Report No.: TWN2505731E Page 28 of 55

Date: 2025-06-03



]	Product:		Wireless	s Earphone		P	olarity		Horizont	al
	Mode		Keeping 7	Fransmitting		Test	Voltage		DC3.7V	7
Te	mperature		24 0	leg. C,	Humidity		_		56% RF	I
Те	est Result:		F	Pass						
Part 1	L5C Class B 1GHz-18GHz 2-	: -2								
7	10-									
	0-	distance of the state of the st		M2	And the second second	li sa da de la combinación de	المائيا ومعرابية بالمراجعة إصابابا	المرابع والمراجع والمراجع المراجع والمراجع والمراجع والمراجع والمراجع والمراجع والمراجع والمراجع والمراجع والم	langal salahka da saidan ka julu filikus salah	A Language
4 3 2 1	10	distribution and security and the second		M2	5	hand he works who be	inderection and engineering	ak dan distribution of the base of the bas	विद्धार प्रविद्यालयां के उस्ते प्रविद्यालयां के विद्यालयां के विद्यालयां के विद्यालयां के विद्यालयां के विद्यालयां क	2500
4 3 2 1 0.	0-2470	Results	Factor			Detector	Table			2500
4 3 2 1	0		Factor (dB)	2483.	5 Frequency (MHz)			Height (cm)	ANT	2500
4 3 2 1 0.	0	Results		2483.	5 Frequency (MHz)		Table	Height		
4 3 2 1	Frequency (MHz)	Results (dBuV/m)	(dB)	Limit (dBuV/m)	5 Frequency (MHz) Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	2500 Verdi

Report No.: TWN2505731E Page 29 of 55

Date: 2025-06-03



F	Product:		Wireless 1	Earphone		Detector			Vertical	
	Mode]	Keeping Tr	ansmitting		Test Vo	ltage		DC3.7V	
Tei	mperature		24 de	g. C,		Humio	lity	56% RH		
Te	est Result:		Pa	SS						
	rt 15C Class B 1GHz-18GH E+2-	z -2			<u>'</u>					
1.00	L+2									
	90-		M1							
	80-		The state of the s	The state of the s						
	70-		_/	1						
			/	The state of the s						
	60-									
	60-		_/	M ₂ M ₂						
	50-			M2						
		المعادة والمعادلة والمعادل		M2	Manufaldurate mysteria man	de planting of the land of the same of	War fellower for the tale	بتعامله وبداره فالمتاب ودوست	orthographes act as sepalable	- Hardalphanes
	50-	المعلقة والمعالمة والمعادمة والمعادم		M2	March Liberate marie assessment	destruction which set his homeof	aryon berkanyo dhadayigi	and the little of the second second	rrikak <u>k</u> eptakersikasakekak	- the parties of the latest of
	50- 40	وميد والمعالمة المراكب والمراكب		M2	March Laborate made stranger	isobilancian, developalitationes d	aten ketangi dheada,isi	ingerificial angest about	rrikabigalantesikanohoklobb	ettermentlikkepklaserte
	50- 40-	البروادي المراوية والمراوية والمراوي		M2	March Liberation and School School	in the second	or on his constraint when the second	ئىلىرىلىلىلىلىلىلىلىلىلىلىلىلىلىلىلىلىلى	olidanikusika, ajadesi	-tio, and high article
level (dBuV/m)	50- 40	ennandidaturahkundenderi		M2	March Laborates angel the second	indianaioofishiisaaai	aryon distance in the space of	anat plakker kangsulukan	odáteniovátovátovátok	ritor, antill deptaring
level (dBuV/m)	30 - 20 - 0.	ار مورود المورود المور		M2		મામીત્રામના તારમી <mark>ત્રી</mark> ત અન્યત્	aternásticous de	ayaiyaidan Xugaadadaa	olidanian ota vipelisa	
level (dBuV/m)	50 - 40 - 30 - 20 -	ومرورة المراوية المراوية والمراوية و		2483.		in the second second	Marin distance des phases	المعادلة	eckébychárosá a vápokár	250
level (dBuV/m)	30 - 20 - 0.	Results	Factor	2483.	5	Detector	Table	Height	dituite de	250
level (dBuV/m)	30 - 20 - 2470		Factor (dB)	1	5 Frequency (MHz)					250
level (dBuV/m)	50- 40- 30- 20- 10- 2470	Results		Limit	5 Frequency (MHz)		Table	Height		

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

2. The three modulation modes of GFSK, Pi/4D-QPSK and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: TWN2505731E Page 30 of 55

Date: 2025-06-03



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a Chip antenna with gain 2.25dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Report No.: TWN2505731E

Date: 2025-06-03



Page 31 of 55

9.0 20dB Bandwidth Measurement

Test Configuration



Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Limit

N/A

Page 32 of 55


Report No.: TWN2505731E

Date: 2025-06-03



Test Result

Wireless Earphone	T4 M- 4	
	Test Mode:	Keep transmitting
Keeping Transmitting	Test Voltage	DC3.7V
24 deg. C,	Humidity	56% RH
Pass	Detector	PK
894kHz		
	24 deg. C, Pass	24 deg. C, Humidity Pass Detector

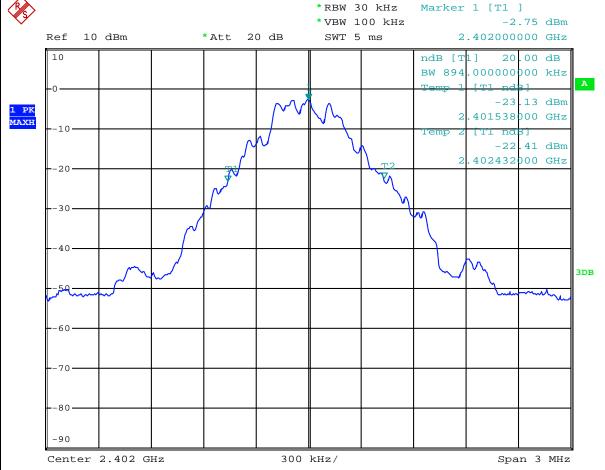

Date: 30.MAY.2025 12:47:26


Page 33 of 55

Report No.: TWN2505731E

Date: 2025-06-03



GFSK			
Product:	Wireless Earphone	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	894kHz		

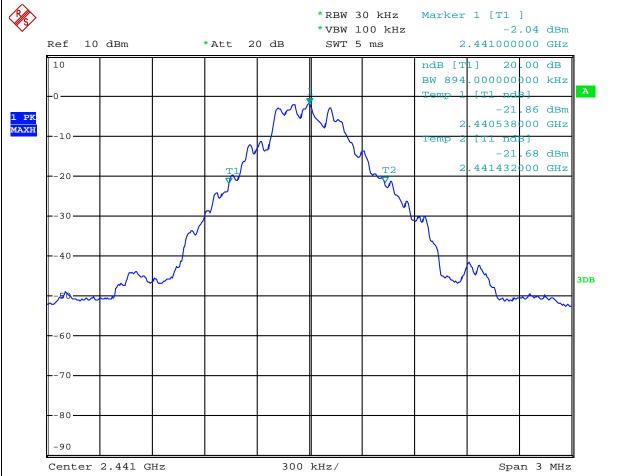

Date: 30.MAY.2025 12:54:30


Page 34 of 55

Report No.: TWN2505731E

Date: 2025-06-03



GFSK			
Product:	Wireless Earphone	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	894kHz		

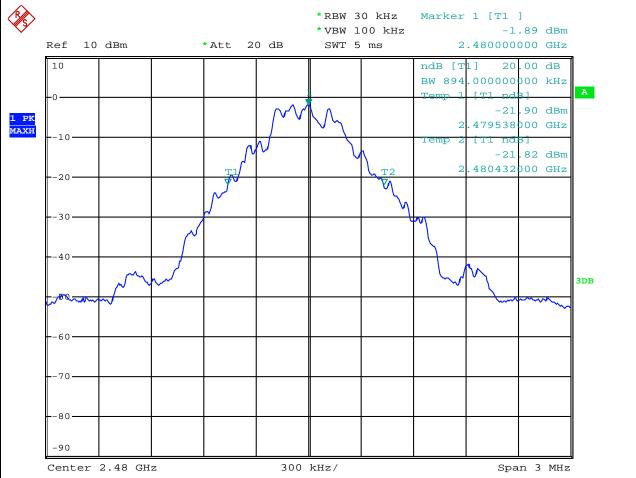

Date: 30.MAY.2025 12:55:43


Page 35 of 55

Report No.: TWN2505731E

Date: 2025-06-03



Л/4DQPSK			
Product:	Wireless Earphone	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.278MHz		

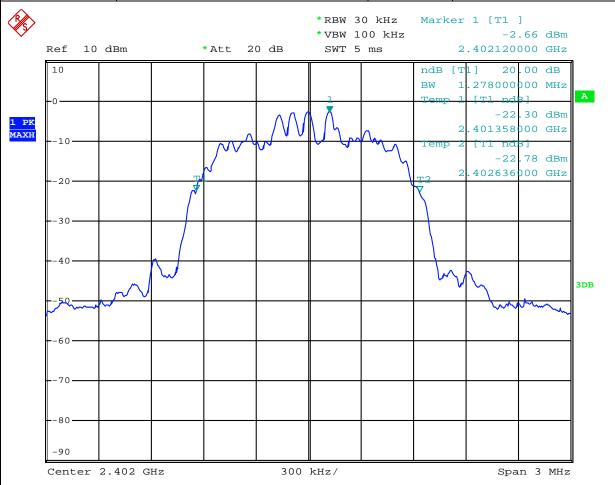

Date: 30.MAY.2025 13:01:36


Page 36 of 55

Report No.: TWN2505731E

Date: 2025-06-03



Л/4DQPSK			
Product:	Wireless Earphone	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.272MHz		

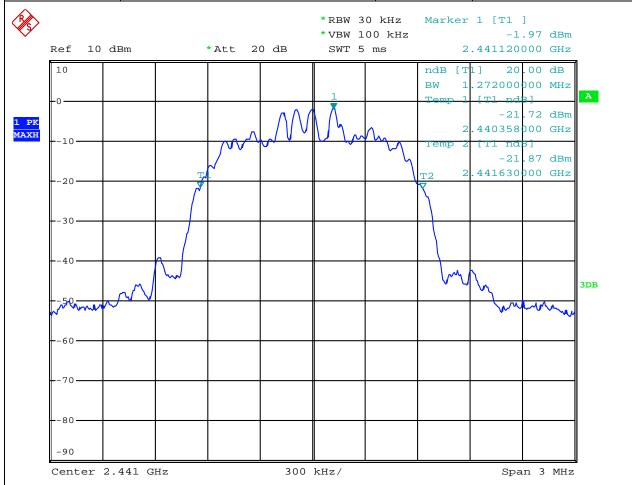

Date: 30.MAY.2025 12:57:52


Page 37 of 55

Report No.: TWN2505731E

Date: 2025-06-03



Л/4DQPSK			
Product:	Wireless Earphone	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.278MHz		

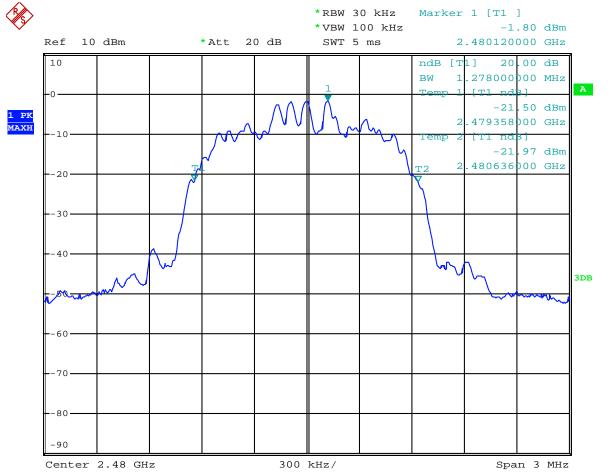

Date: 30.MAY.2025 12:57:21


Page 38 of 55

Report No.: TWN2505731E

Date: 2025-06-03



8DPSK			
Product:	Wireless Earphone	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.242MHz		-

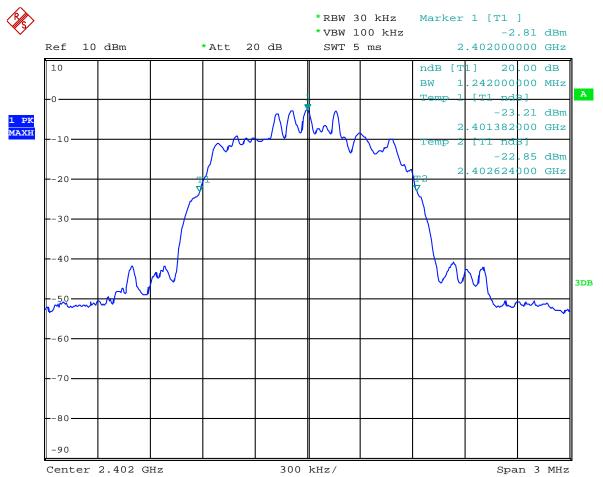

Date: 30.MAY.2025 13:03:03


Page 39 of 55

Report No.: TWN2505731E

Date: 2025-06-03



8DPSK					
Product:	Wireless Earphone	Test Mode:	Keep transmitting		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	1.242MHz				

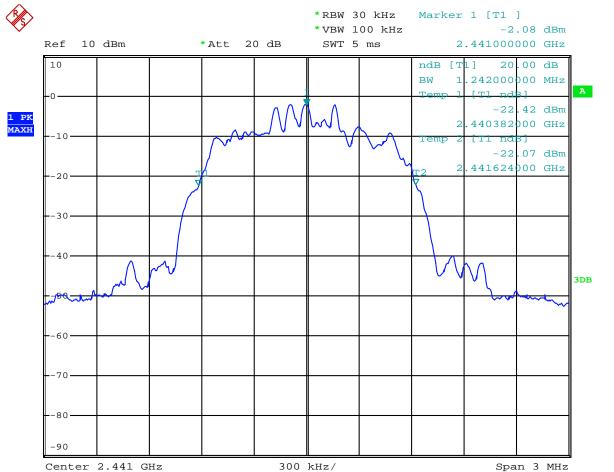

Date: 30.MAY.2025 13:05:37


Page 40 of 55

Report No.: TWN2505731E

Date: 2025-06-03



8DPSK					
Product:	Wireless Earphone	Test Mode:	Keep transmitting		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	1.242MHz				

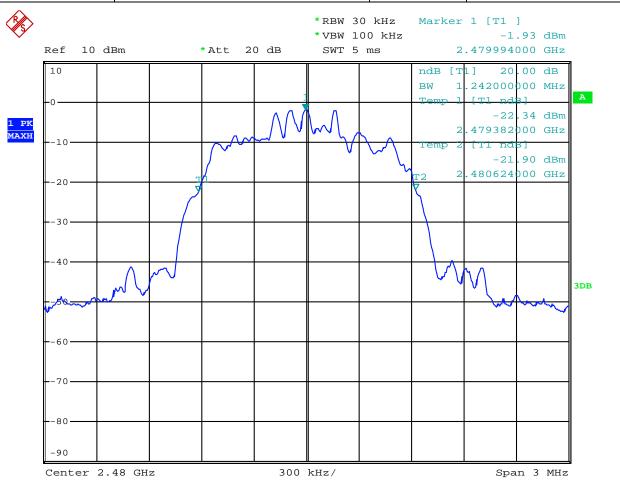

Date: 30.MAY.2025 13:07:52

Date: 2025-06-03



Page 41 of 55

10.0 FCC ID Label

FCC ID: 2AS7V-AP120

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Page 42 of 55


Report No.: TWN2505731E

Date: 2025-06-03



11.0 Photo of testing

11.1 Conducted test View

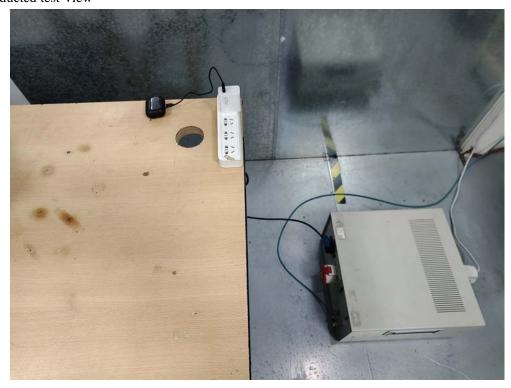

Page 43 of 55

Report No.: TWN2505731E

Date: 2025-06-03





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2025-06-03



11.2 Photographs - EUT

Outside View- charger base



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 45 of 55

Report No.: TWN2505731E

Date: 2025-06-03



Outside View - charger base



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2025-06-03



Outside View - charger base



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2025-06-03





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 48 of 55

Report No.: TWN2505731E

Date: 2025-06-03



Outside View - Left earphone

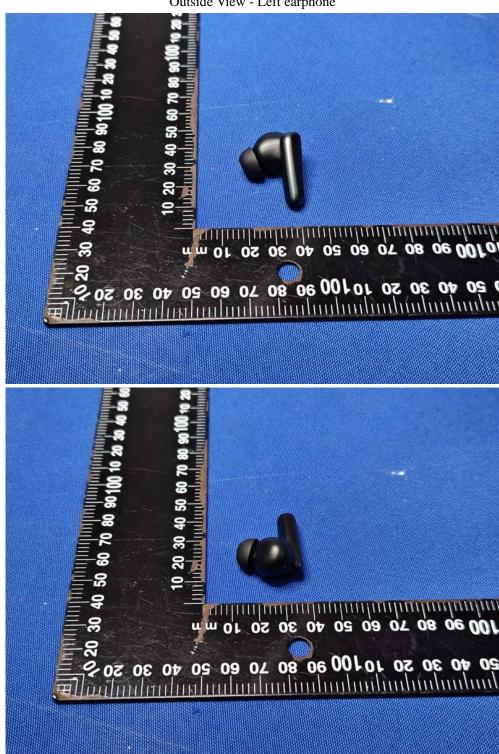


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2025-06-03



Outside View - Left earphone

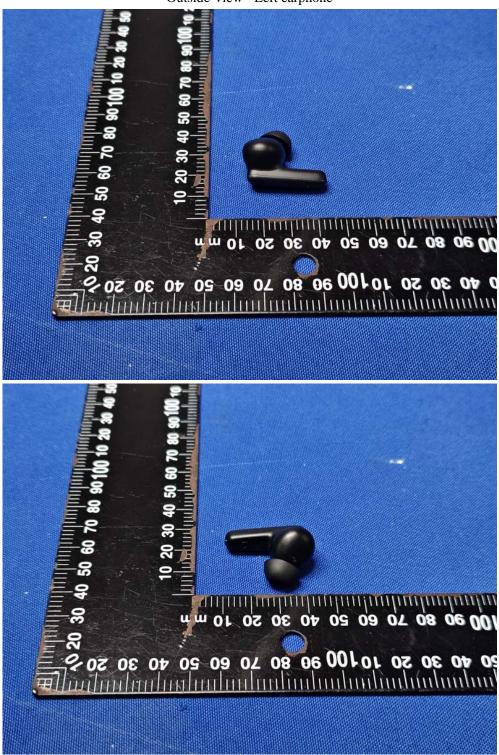

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 50 of 55

Report No.: TWN2505731E

Date: 2025-06-03






The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2025-06-03



Inside View - Left earphone

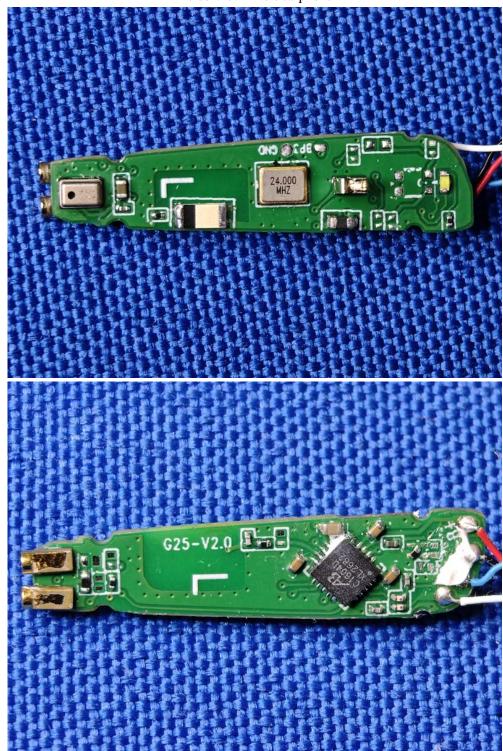

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 52 of 55

Report No.: TWN2505731E

Date: 2025-06-03



Outside View - Right earphone




The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2025-06-03



Outside View - Right earphone

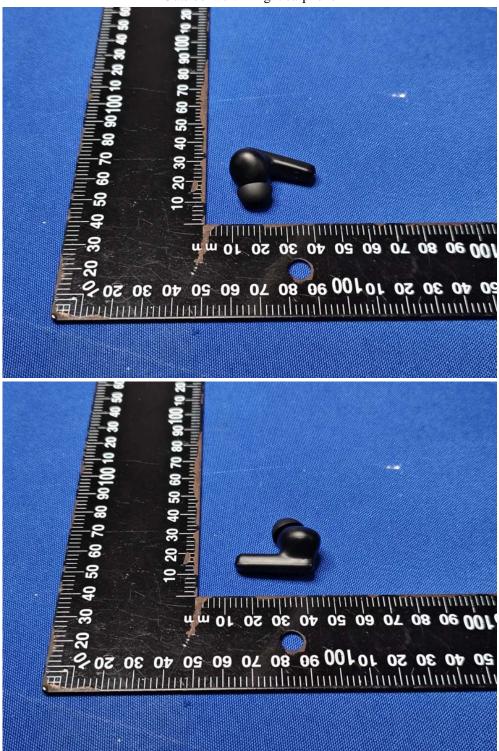

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 54 of 55

Report No.: TWN2505731E

Date: 2025-06-03



Inside View - Right earphone




The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2025-06-03



Inside View - Right earphone

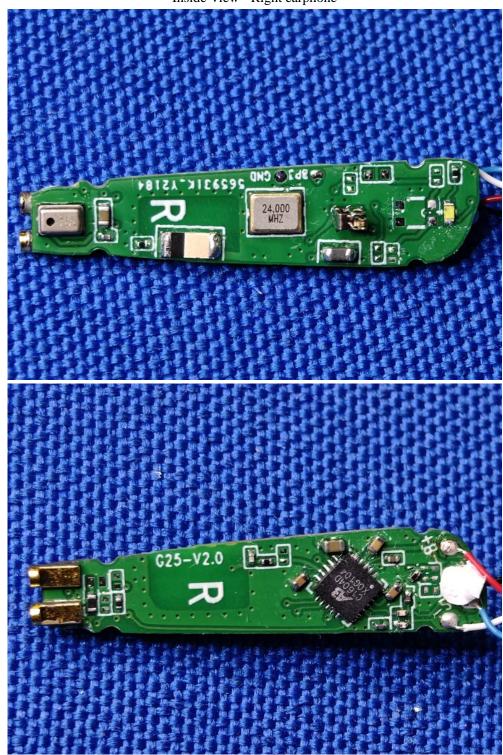

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to