



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-Mail:ctl@ctl-lab.com

FCC SDoC Test Report

FCC PART 15 Subpart B

Report Reference No.: CTL1904242031-F

Compiled by

(position+printed name+signature) : File administrators Bruce Zheng

Bruce Zheng

Name of the organization performing
the tests

Technique principal Ivan Xie

Ivan Xie

(position+printed name+signature) :

Approved by
(position+printed name+signature) : Manager Tracy Qi

Tracy Qi

Date of issue: May. 05, 2019

Representative Laboratory Name.: Shenzhen CTL Testing Technology Co., Ltd.

Address: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test Firm: Shenzhen CTL Testing Technology Co., Ltd.

Address: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Applicant's name: Tive, Inc.

Address: 38 Cameron Ave, Suite 200, Cambridge, MA, 02140, USA

Test specification:

Standard.....: FCC PART 15 Subpart B

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: GSM Temperature Tracker

Trade Mark: tive Solo

FCC ID: 2AS8K5000

Test voltage: DC 3.7V

Result: Pass

FCC Test Report

Test Report No. :	CTL1904242031-F	May. 05, 2019
		Date of issue

Equipment under Test : GSM Temperature Tracker

Type / Model : TT-5000

Listed Models : N/A

Applicant : Tive, Inc.

Address : 38 Cameron Ave, Suite 200, Cambridge, MA, 02140, USA

Manufacturer : Tive, Inc.

Address : 38 Cameron Ave, Suite 200, Cambridge, MA, 02140, USA

Test Result	Pass
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

History of this test report

Report No.	Version	Description	Issued Date
CTL1904242031-F	V1.0	Initial Issued Report	May. 05, 2019

Content

1.	<u>TEST STANDARDS</u>	5
2.	<u>SUMMARY</u>	6
2.1.	General Remarks	6
2.2.	Equipment Under Test	6
2.3.	Short description of the Equipment under Test (EUT)	6
2.4.	EUT operation mode	6
2.5.	EUT configuration	6
2.7.	Related Submittal(s) / Grant (s)	7
2.8.	Modifications	7
2.9.	Test Result Summary	7
3.	<u>TEST ENVIRONMENT</u>	8
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	8
3.4.	Statement of the measurement uncertainty	9
3.5.	Equipments Used during the Test	9
4	<u>TEST CONDITIONS AND RESULTS</u>	10
4.1.	Radiated Emission Test	10
5.	<u>TEST SETUP PHOTOS OF THE EUT</u>	14
6.	<u>PHOTOS OF THE EUT</u>	15

1. TEST STANDARDS

The tests were performed according to following standards:

[**FCC Rules Part 15 Subpart B - Unintentional Radiators**](#)

[**ANSI C63.4-2014**](#)

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Apr. 26, 2019

Sampling and Testing commenced on : Apr. 26, 2019

Testing concluded on : May. 05, 2019

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : 120V / 60 Hz 115V / 60Hz
 12 V DC 24 V DC
 Other (specified in blank below)

DC 3.7V

2.3. Short description of the Equipment under Test (EUT)

The EUT is a GSM Temperature Tracker

2.4. EUT operation mode

The EUT has been tested under typical operating condition.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

2.7. Related Submittal(s) / Grant (s)

This test report is intended for GSM Temperature Tracker filing to comply with the FCC Part 15, Subpart B Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

2.9. Test Result Summary

Test Item	Test Requirement	Standard Paragraph	Result
Radiated Emission	FCC PART 15 Subpart B	Section 15.109	PASS
Conducted Emission	FCC PART 15 Subpart B	Section 15.107	N/A

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 399832

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

Certified by A2LA, USA

Registration No.:4343.01

Date of registration: December 27, 2017

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission(chamber1)	30~1000MHz	±3.20dB	(1)
Radiated Emission(chamber2)	30~1000MHz	±3.53dB	(1)
Conducted Emission	0.15~30MHz	±2.66dB	(1)
Disturbance Power	30~300MHz	±2.90dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Equipments Used during the Test


Radiated Emission(Chamber 1)						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	ULTRA-BROADBAND ANTENNA	Sunol Sciences Corp.	JB1 Antenna	A061713	2018/10/08	2019/10/07
2	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2018/05/25	2019/05/24
3	Horn Antenna	Sunol Sciences Corp	DRH-118	A062013	2018/05/25	2019/05/24

4 TEST CONDITIONS AND RESULTS


4.1. Radiated Emission Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

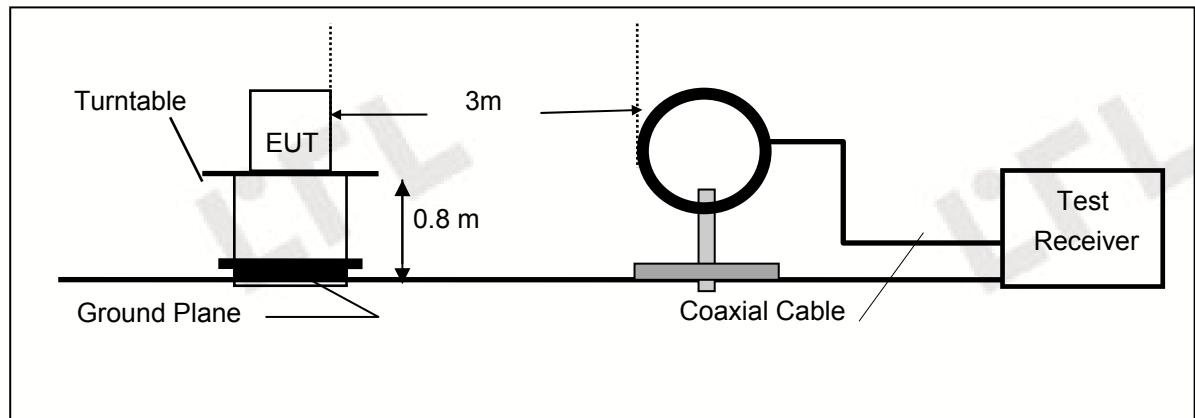

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

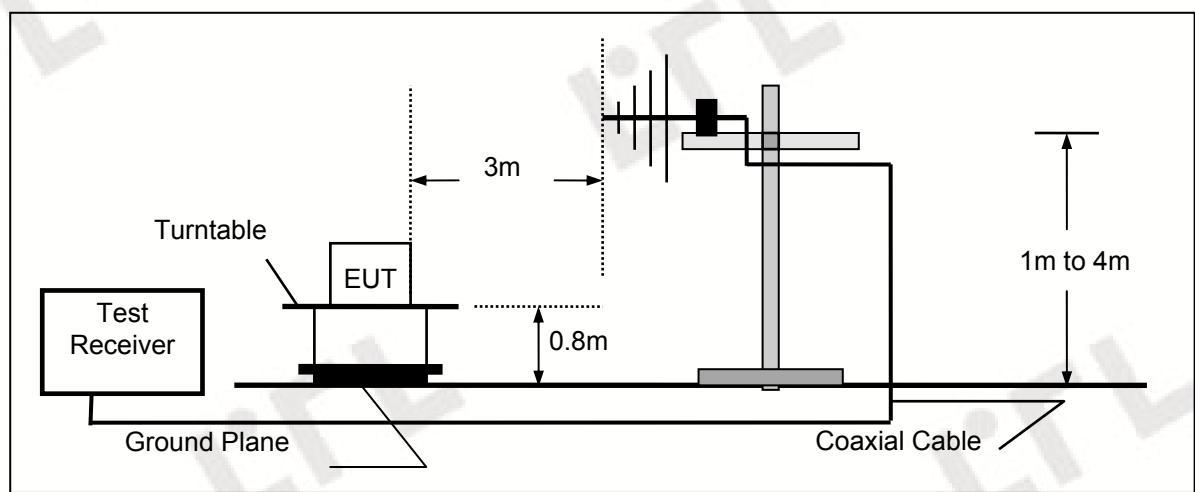

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

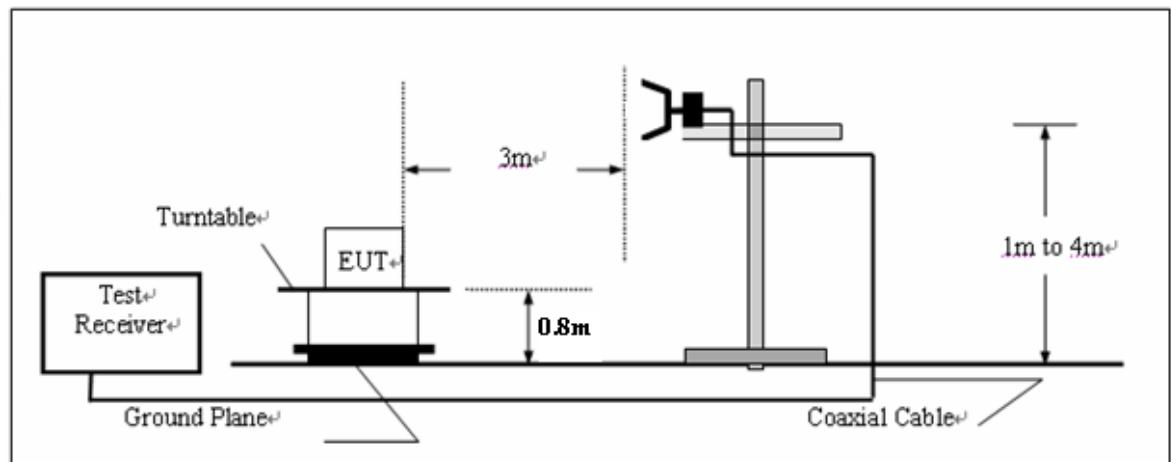

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.



Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note: 30MHz to 5th Harmonic of the highest frequency were tested, only list the worst result in the report.

Radiation Test Results

Polarization:		Horizontal																																																																									
Shenzhen CTL Testing Technology Co., Ltd																																																																											
Radiation Emission Test FCC PART15 B																																																																											
EUT: TT-5000 Manufacturer: Tive, Inc. Operating Condition: WORKING Test Site: Chamber1 Operator: ZSR Test Specification: DC 3.7V Comment: / Start of Test: 28/04/2019 / 09:08:46																																																																											
SWEET TABLE: "test (30M-1G)" Short Description: Field Strength <table> <thead> <tr> <th>Start Frequency</th> <th>Stop Frequency</th> <th>Detector</th> <th>Meas.</th> <th>IF Time</th> <th>Transducer</th> </tr> </thead> <tbody> <tr> <td>30.0 MHz</td> <td>1.0 GHz</td> <td>MaxPeak</td> <td>300.0 ms</td> <td>120 kHz</td> <td>JB1</td> </tr> </tbody> </table>				Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer	30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1																																																												
Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer																																																																						
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1																																																																						
x x x MES CTL190428500_red																																																																											
MEASUREMENT RESULT: "CTL190428500_red"																																																																											
28/04/2019 09:11																																																																											
Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization																																																																			
MHz	dB μ V/m	dB	dB μ V/m	dB		cm	deg																																																																				
30.000000	24.70	22.2	40.0	15.3	---	0.0	0.00	HORIZONTAL																																																																			
70.740000	12.40	9.1	40.0	27.6	---	0.0	0.00	HORIZONTAL																																																																			
130.880000	18.40	15.3	43.5	25.1	---	0.0	0.00	HORIZONTAL																																																																			
253.100000	23.40	14.6	46.0	22.6	---	0.0	0.00	HORIZONTAL																																																																			
553.800000	25.20	22.0	46.0	20.8	---	0.0	0.00	HORIZONTAL																																																																			
934.040000	31.10	27.0	46.0	14.9	---	0.0	0.00	HORIZONTAL																																																																			
Trace: (Discrete) <table> <thead> <tr> <th>Mark</th> <th>Freq</th> <th>RD</th> <th>C.F</th> <th>Result</th> <th>Limit</th> <th>Margin</th> <th>Det.</th> <th>Polarity</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2005.00</td> <td>44.21</td> <td>-4.16</td> <td>40.05</td> <td>54.00</td> <td>13.95</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>2340.00</td> <td>45.15</td> <td>-3.41</td> <td>41.74</td> <td>54.00</td> <td>12.26</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>2750.00</td> <td>46.06</td> <td>-2.11</td> <td>43.95</td> <td>54.00</td> <td>10.05</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>4</td> <td>2950.00</td> <td>44.42</td> <td>-0.98</td> <td>43.44</td> <td>54.00</td> <td>10.56</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>5</td> <td>4490.00</td> <td>41.03</td> <td>3.97</td> <td>45.00</td> <td>54.00</td> <td>9.00</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>6</td> <td>5205.00</td> <td>40.55</td> <td>5.91</td> <td>46.46</td> <td>54.00</td> <td>7.54</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>				Mark	Freq	RD	C.F	Result	Limit	Margin	Det.	Polarity		MHz	dBuV	dB	dBuV	dBuV	dB			1	2005.00	44.21	-4.16	40.05	54.00	13.95	Peak	HORIZONTAL	2	2340.00	45.15	-3.41	41.74	54.00	12.26	Peak	HORIZONTAL	3	2750.00	46.06	-2.11	43.95	54.00	10.05	Peak	HORIZONTAL	4	2950.00	44.42	-0.98	43.44	54.00	10.56	Peak	HORIZONTAL	5	4490.00	41.03	3.97	45.00	54.00	9.00	Peak	HORIZONTAL	6	5205.00	40.55	5.91	46.46	54.00	7.54	Peak	HORIZONTAL
Mark	Freq	RD	C.F	Result	Limit	Margin	Det.	Polarity																																																																			
	MHz	dBuV	dB	dBuV	dBuV	dB																																																																					
1	2005.00	44.21	-4.16	40.05	54.00	13.95	Peak	HORIZONTAL																																																																			
2	2340.00	45.15	-3.41	41.74	54.00	12.26	Peak	HORIZONTAL																																																																			
3	2750.00	46.06	-2.11	43.95	54.00	10.05	Peak	HORIZONTAL																																																																			
4	2950.00	44.42	-0.98	43.44	54.00	10.56	Peak	HORIZONTAL																																																																			
5	4490.00	41.03	3.97	45.00	54.00	9.00	Peak	HORIZONTAL																																																																			
6	5205.00	40.55	5.91	46.46	54.00	7.54	Peak	HORIZONTAL																																																																			

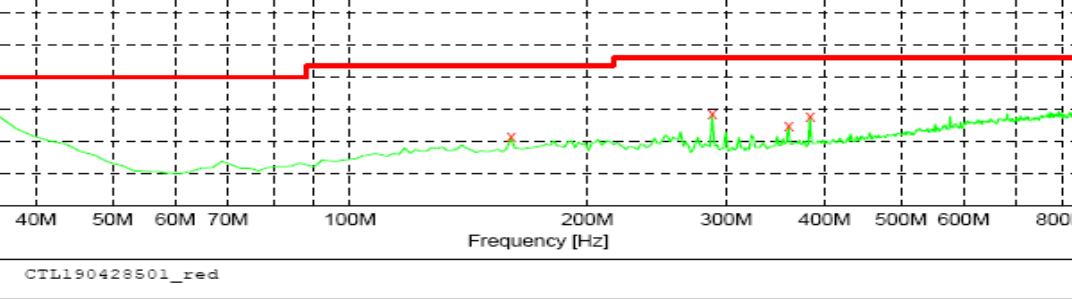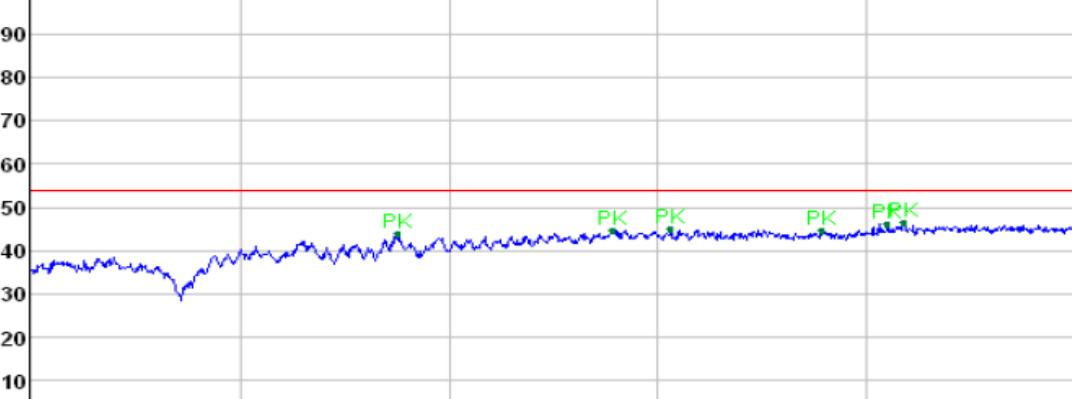Polarization:		Vertical																																																																									
Shenzhen CTL Testing Technology Co., Ltd																																																																											
Radiation Emission Test FCC PART15 B																																																																											
EUT: TT-5000																																																																											
Manufacturer: Tive, Inc.																																																																											
Operating Condition: WORKING																																																																											
Test Site: Chamber1																																																																											
Operator: ZSR																																																																											
Test Specification: DC 3.7V																																																																											
Comment: /																																																																											
Start of Test: 28/04/2019 / 09:11:44																																																																											
SWEET TABLE: "test (30M-1G)"																																																																											
Short Description: Field Strength Start Frequency: 30.0 MHz Stop Frequency: 1.0 GHz Detector: MaxPeak Meas. Time: 300.0 ms IF Bandw.: 120 kHz Transducer: JBL																																																																											
																																																																											
x x x MES CTL190428501_red																																																																											
MEASUREMENT RESULT: "CTL190428501_red"																																																																											
28/04/2019 09:13																																																																											
<table border="1"> <thead> <tr> <th>Frequency</th> <th>Level</th> <th>Transd</th> <th>Limit</th> <th>Margin</th> <th>Det.</th> <th>Height</th> <th>Azimuth</th> <th>Polarization</th> </tr> <tr> <th>MHz</th> <th>dBµV/m</th> <th>dB</th> <th>dBµV/m</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>33.880000</td> <td>30.60</td> <td>19.7</td> <td>40.0</td> <td>9.4</td> <td>---</td> <td>0.0</td> <td>0.00</td> <td>VERTICAL</td> </tr> <tr> <td>159.980000</td> <td>21.30</td> <td>14.5</td> <td>43.5</td> <td>22.2</td> <td>---</td> <td>0.0</td> <td>0.00</td> <td>VERTICAL</td> </tr> <tr> <td>288.020000</td> <td>28.40</td> <td>15.7</td> <td>46.0</td> <td>17.6</td> <td>---</td> <td>0.0</td> <td>0.00</td> <td>VERTICAL</td> </tr> <tr> <td>359.800000</td> <td>24.70</td> <td>17.5</td> <td>46.0</td> <td>21.3</td> <td>---</td> <td>0.0</td> <td>0.00</td> <td>VERTICAL</td> </tr> <tr> <td>383.080000</td> <td>27.50</td> <td>17.9</td> <td>46.0</td> <td>18.5</td> <td>---</td> <td>0.0</td> <td>0.00</td> <td>VERTICAL</td> </tr> <tr> <td>935.980000</td> <td>30.80</td> <td>27.0</td> <td>46.0</td> <td>15.2</td> <td>---</td> <td>0.0</td> <td>0.00</td> <td>VERTICAL</td> </tr> </tbody> </table>				Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization	MHz	dBµV/m	dB	dBµV/m	dB		cm	deg		33.880000	30.60	19.7	40.0	9.4	---	0.0	0.00	VERTICAL	159.980000	21.30	14.5	43.5	22.2	---	0.0	0.00	VERTICAL	288.020000	28.40	15.7	46.0	17.6	---	0.0	0.00	VERTICAL	359.800000	24.70	17.5	46.0	21.3	---	0.0	0.00	VERTICAL	383.080000	27.50	17.9	46.0	18.5	---	0.0	0.00	VERTICAL	935.980000	30.80	27.0	46.0	15.2	---	0.0	0.00	VERTICAL
Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization																																																																			
MHz	dBµV/m	dB	dBµV/m	dB		cm	deg																																																																				
33.880000	30.60	19.7	40.0	9.4	---	0.0	0.00	VERTICAL																																																																			
159.980000	21.30	14.5	43.5	22.2	---	0.0	0.00	VERTICAL																																																																			
288.020000	28.40	15.7	46.0	17.6	---	0.0	0.00	VERTICAL																																																																			
359.800000	24.70	17.5	46.0	21.3	---	0.0	0.00	VERTICAL																																																																			
383.080000	27.50	17.9	46.0	18.5	---	0.0	0.00	VERTICAL																																																																			
935.980000	30.80	27.0	46.0	15.2	---	0.0	0.00	VERTICAL																																																																			
																																																																											
Trace: (Discrete)																																																																											
<table border="1"> <thead> <tr> <th>Mark</th> <th>Freq</th> <th>RD</th> <th>C.F</th> <th>Result</th> <th>Limit</th> <th>Margin</th> <th>Det.</th> <th>Polarity</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuv</th> <th>dB</th> <th>dBuv</th> <th>dBuv</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2755.00</td> <td>45.98</td> <td>-2.10</td> <td>43.88</td> <td>54.00</td> <td>10.12</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>3780.00</td> <td>41.70</td> <td>3.07</td> <td>44.77</td> <td>54.00</td> <td>9.23</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>3</td> <td>4060.00</td> <td>41.66</td> <td>3.29</td> <td>44.95</td> <td>54.00</td> <td>9.05</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>4</td> <td>4785.00</td> <td>39.73</td> <td>4.74</td> <td>44.47</td> <td>54.00</td> <td>9.53</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>5</td> <td>5095.00</td> <td>40.33</td> <td>5.75</td> <td>46.08</td> <td>54.00</td> <td>7.92</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>6</td> <td>5175.00</td> <td>40.70</td> <td>5.88</td> <td>46.58</td> <td>54.00</td> <td>7.42</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>				Mark	Freq	RD	C.F	Result	Limit	Margin	Det.	Polarity		MHz	dBuv	dB	dBuv	dBuv	dB			1	2755.00	45.98	-2.10	43.88	54.00	10.12	Peak	VERTICAL	2	3780.00	41.70	3.07	44.77	54.00	9.23	Peak	VERTICAL	3	4060.00	41.66	3.29	44.95	54.00	9.05	Peak	VERTICAL	4	4785.00	39.73	4.74	44.47	54.00	9.53	Peak	VERTICAL	5	5095.00	40.33	5.75	46.08	54.00	7.92	Peak	VERTICAL	6	5175.00	40.70	5.88	46.58	54.00	7.42	Peak	VERTICAL
Mark	Freq	RD	C.F	Result	Limit	Margin	Det.	Polarity																																																																			
	MHz	dBuv	dB	dBuv	dBuv	dB																																																																					
1	2755.00	45.98	-2.10	43.88	54.00	10.12	Peak	VERTICAL																																																																			
2	3780.00	41.70	3.07	44.77	54.00	9.23	Peak	VERTICAL																																																																			
3	4060.00	41.66	3.29	44.95	54.00	9.05	Peak	VERTICAL																																																																			
4	4785.00	39.73	4.74	44.47	54.00	9.53	Peak	VERTICAL																																																																			
5	5095.00	40.33	5.75	46.08	54.00	7.92	Peak	VERTICAL																																																																			
6	5175.00	40.70	5.88	46.58	54.00	7.42	Peak	VERTICAL																																																																			