

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

Test Report No. : OT-19O-RWD-038

AGR No. : A199A-269

Applicant : AMOSENSE

Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea

Manufacturer : AMOSENSE

Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea

Type of Equipment : NOVO

FCC ID : 2AS9T-SB42SW

Model Name : SB42-SW

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 20 pages (including this page)

Date of Incoming : September 23, 2019

Date of Issuing : October 17, 2019

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART C Section 15.225**


This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production.

Reviewed by:


Tae-Ho, Kim / Senior Manager
ONETECH Corp.

Approved by:


Ki-Hong, Nam / Chief Engineer
ONETECH Corp.

CONTENTS

Page

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 RELATED SUBMITTAL(S) / GRANT(S)	6
2.3 PURPOSE OF THE TEST	6
2.4 TEST METHODOLOGY.....	6
2.5 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 MODEL DIFFERENCES:	7
4. SYSTEM TEST CONFIGURATION	8
4.1 JUSTIFICATION.....	8
4.2 PERIPHERAL EQUIPMENT	8
4.3 MODE OF OPERATION DURING THE TEST	8
4.4 EQUIPMENT MODIFICATIONS.....	8
4.5 CONFIGURATION OF TEST SYSTEM.....	9
4.6 ANTENNA REQUIREMENT	9
5. PRELIMINARY TEST	10
5.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
5.2 RADIATED EMISSIONS TESTS.....	10
6. FINAL RESULT OF MEASUREMENT.....	11
6.1 RADIATED EMISSION TEST.....	11
6.1.1 Operation frequency band: (13.553 ~ 13.567) MHz.....	11
6.2 SPURIOUS EMISSION TEST.....	13
6.2.1 Spurious Radiated Emission Below 30 MHz	13
6.2.2 Spurious Radiated Emission below 1 GHz.....	14
6.3 20 dB BANDWIDTH	15
6.3.1 Operating environment.....	15
6.3.2 Test set-up	15
6.3.3 Test data	16

6.4 FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	17
6.4.1 <i>Operating environment</i>	17
6.4.2 <i>Test set-up</i>	17
6.4.3 <i>Test data</i>	17
6.5 FREQUENCY STABILITY WITH VOLTAGE VARIATION.....	18
6.5.1 <i>Operating environment</i>	18
6.5.2 <i>Test set-up</i>	18
6.5.3 <i>Test data</i>	18
7. FIELD STRENGTH CALCULATION	19
8. LIST OF TEST EQUIPMENT	20

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-19O-RWD-038	October 17, 2019	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : AMOSENSE
Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea
Manufacturer : AMOSENSE
Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea
Factory : AMO VINA CO.,LTD
Address : Lot CN12, Khai Quang industrial Park, Khai Quang Ward, Vinh Yen City, Vinh Phuc Province, Vietnam
Contact Person : UIHAN JEONG/Research Engineer
Telephone No. : +82-010-4948-5676
FCC ID : 2AS9T-SB42SW
Model Name : SB42-SW
Brand Name : -
Serial Number : N/A
Date : October 17, 2019

DEVICE TYPE	DXX – Low Power Communication Device Transmitter
E.U.T. DESCRIPTION	NOVO
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR47 Part 15 Subpart C Section 15.225
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.215 (c)	20 dB BANDWIDTH	Met the Limit / PASS
15.225 (e)	FREQUENCY STABILITY WITH TEMPERATURE VARIATION / FREQUENCY STABILITY WITH VOLTAGE VARIATION	Met the Limit / PASS
15.225 (a),(b),(c)	Radiated Emission Limits	Met the Limit / PASS
15.209, 15.225(e)	SPURIOUS EMISSION TEST	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not applicable because the EUT use battery.

2.2 Related Submittal(s) / Grant(s)

Original submittal only

2.3 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.225.

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiate d testing was performed at a distance of 3 m from EUT to the antenna.

2.5 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The AMOSENSE, Model SB42-SW (referred to as the EUT in this report) is an NOVO, Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	NOVO	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	NFC	13.56 MHz
	Sig Fox	902.137 5 MHz ~ 904.662 5 MHz
	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
MODULATION TYPE	NFC	ASK
	Sig Fox	DBPSK
	Bluetooth LE	GFSK
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
RF OUTPUT POWER'	NFC	39.53 dBμV/m
	Sig Fox	22.26 dBm
	Bluetooth LE	-0.44 dBm
	WLAN 2.4 GHz	2.99 dBm(802.11b) 1.64 dBm(802.11g) 1.57 dBm(802.11n_HT20)
ANTENNA TYPE	NFC: FPCB Antenna Sig Fox : Chip Antenna WLAN 2.4 GHz / Bluetooth LE : Chip Antenna	
ANTENNA GAIN	WLAN 2.4 GHz / Bluetooth LE : 2.40 dBi Sig Fox : -0.59 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32.768 kHz, 26 MHz, 32 MHz, 50 MHz	

3.2 Model Differences:

-. None

4. SYSTEM TEST CONFIGURATION

4.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	AMONSENSE	NOVO Rev04	N/A
NFC ANTENNA	N/A	ANFA150N526 NOVO	N/A

4.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
SB42-SW	AMONSENSE	NOVO(EUT)	-
N/A	N/A	Jig Board	EUT
Ideapad 100	LENOVO	Notebook PC	-
PA-1450-55LR	LITE-ON TECHNOLOGY	AC Adapter	-

4.3 Mode of operation during the test

-. The EUT has 13.56 MHz RF boards for program was used for making continuous transmission mode during the test.

4.4 Equipment Modifications

-. None

4.5 Configuration of Test System

Line Conducted Test : It is not need to test this requirement, because the EUT shall be operated by DC battery.

Radiated Emission Test : Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber.

For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The measuring antenna is an electrically screened loop antenna.

The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

4.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is FPCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

5. PRELIMINARY TEST

5.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not needed to test, because the power of the EUT is supplied from a DC battery.	

5.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

6.1 RADIATED EMISSION TEST

6.1.1 Operation frequency band: (13.553 ~ 13.567) MHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 46 % R.H. Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209

Type of Test : Low Power Transmitter below 1 705 kHz

Result : PASSED

EUT : NOVO

Date: September 24, 2019 ~ October 15, 2019

Operating Condition : Transmitting Mode

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)


Distance : 3 m

Radiated Emission		Ant	Correction Factors		Total	FCC	
Freq. (MHz)	Amplitud (dBμV)	Pol.	Antenna (dB/m)	Cable (dB)	Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
13.56	39.53	H	20.37	0.30	60.20	124	63.80
13.56	27.63	V			48.30	124	75.70


Remark. The EUT was tested at 3 m.



Tested by: Hyung-Kwon, Oh / Assistant Manager

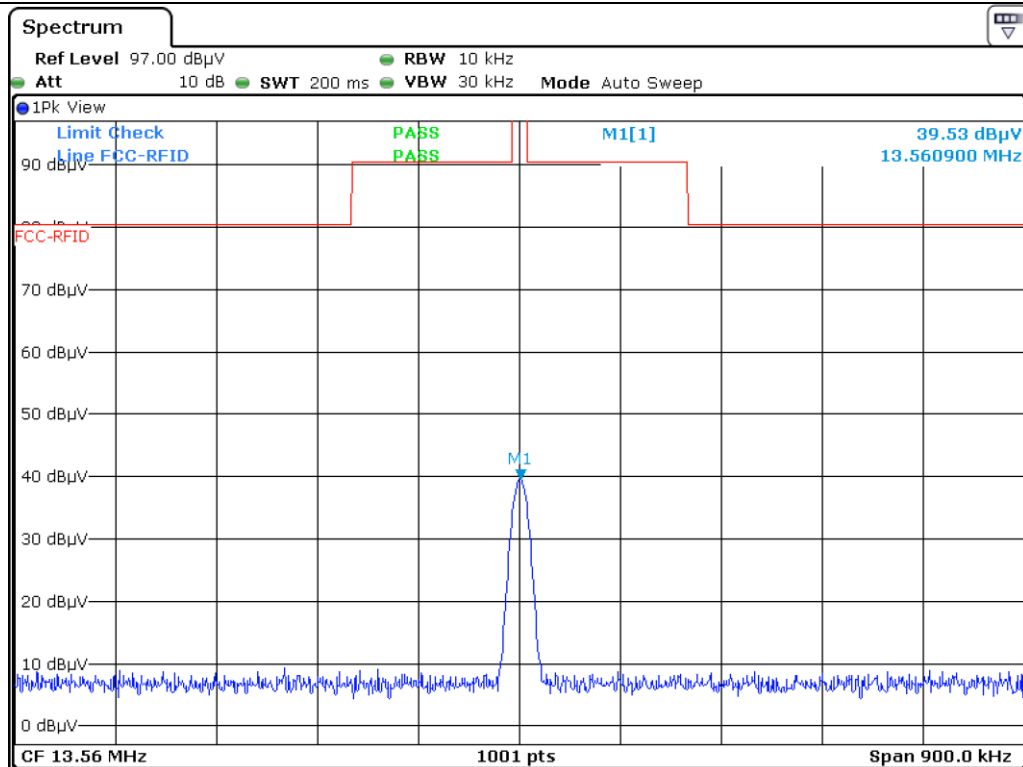

H

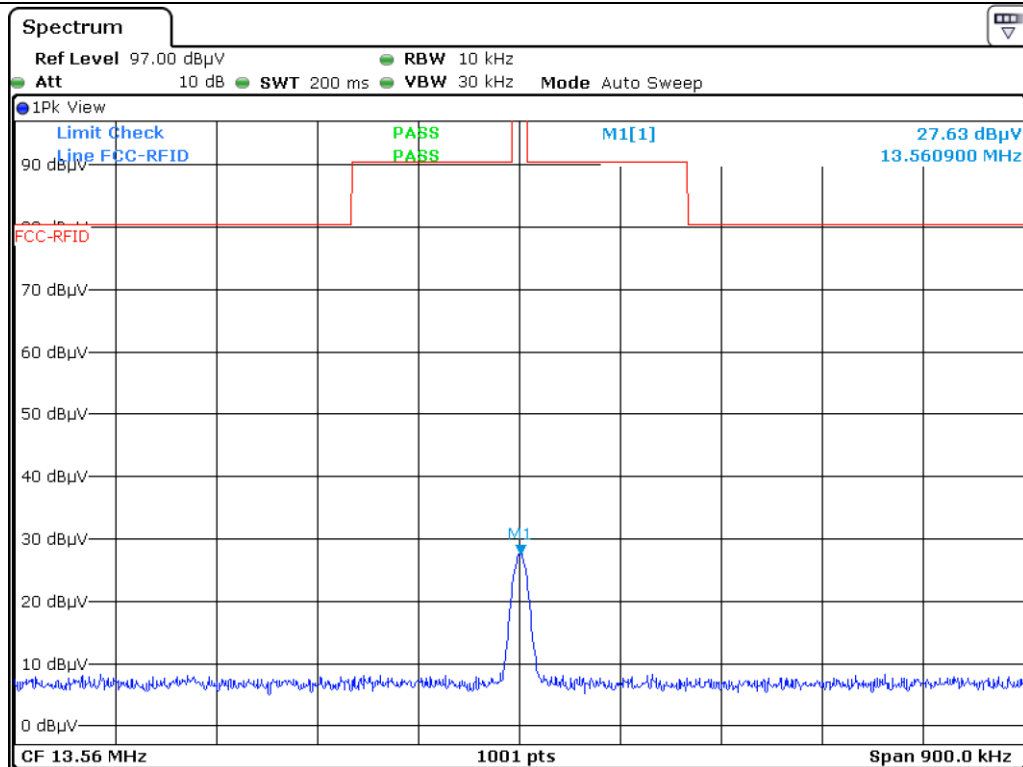

V

cc. to above test data, the field strength level of 13.56 MHz is 38.11dBuV/m and the worst limit subject to 15.225 (b) and (c) is 80.5 dBuV/m, so the EUT meets the requirement.

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

6.2 SPURIOUS EMISSION TEST

6.2.1 Spurious Radiated Emission Below 30 MHz

Humidity Level : 43.9 % R.H.

Temperature: 24.3 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209

Type of Test : Low Power Transmitter below 1 705 kHz

Frequency Range : 9 kHz ~ 30 MHz

Result : PASSED

EUT : NOVO

Date: September 24, 2019 ~ October 15, 2019

Operating Condition : Transmitting Mode

Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									


Tested by: Hyung-Kwon, Oh / Assistant Manager


6.2.2 Spurious Radiated Emission below 1 GHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : (43 ~ 44) % R.H. Temperature: (24 ~ 25) °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209
 Type of Test : Low Power Transmitter below 1 705 kHz
 Result : PASSED

EUT : NOVO Date: September 24, 2019 ~ October 15, 2019

Distance : 3 m

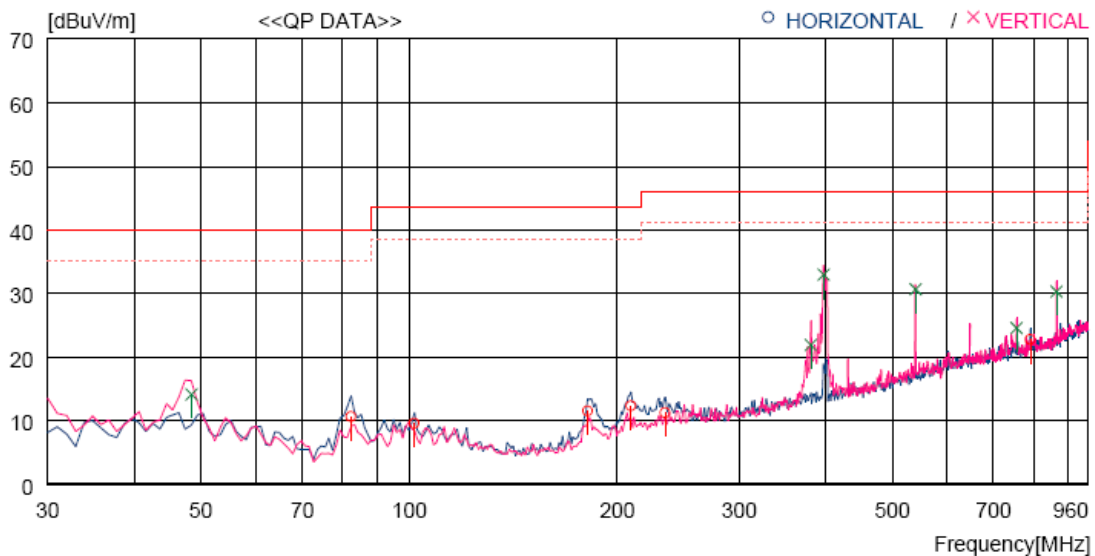

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	82.380	33.2	8.4	2.0	33.0	10.6	40.0	29.4	100	127
2	101.780	27.8	12.4	2.3	33.0	9.5	43.5	34.0	100	111
3	181.320	31.5	9.9	3.1	33.0	11.5	43.5	32.0	400	359
4	209.450	30.9	11.1	3.3	33.0	12.3	43.5	31.2	300	0
5	234.670	28.5	12.1	3.5	32.9	11.2	46.0	34.8	200	356
6	791.442	28.0	21.2	6.6	33.1	22.7	46.0	23.3	300	306
----- Vertical -----										
7	48.430	31.4	14.2	1.6	33.1	14.1	40.0	25.9	100	231
8	381.140	34.9	15.5	4.5	33.0	21.9	46.0	24.1	200	347
9	397.630	45.6	15.8	4.6	33.1	32.9	46.0	13.1	200	0
10	540.220	40.2	18.3	5.4	33.3	30.6	46.0	15.4	200	0
11	756.523	30.6	20.7	6.4	33.2	24.5	46.0	21.5	100	359
12	864.190	34.2	21.9	6.9	32.7	30.3	46.0	15.7	100	121

Tested by: Hyung-Kwon, Oh / Assistant Manager

6.3 20 dB BANDWIDTH

6.3.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

6.3.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.



- Test Date : September 24, 2019 ~ October 15, 2019

- Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209

Operating Freq. (MHz)	Measured Value (kHz)	Assigned Operating Frequency Band (kHz)	Result
13.56	25.97	900.00	PASS

Spectrum

Ref Level 10.00 dBm
Att 20 dB RBW 10 kHz
SWT 200 ms VBW 30 kHz Mode Auto FFT

1Pk View

0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
-80 dBm

D1[1] 0.30 dB
25.9700 kHz
-26.370 dBm
D2 -46.370 dBm
M1
Q1
13.5474100 MHz

CF 13.56 MHz 1001 pts Span 100.0 kHz

6.4 FREQUENCY STABILITY WITH TEMPERATURE VARIATION

6.4.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

6.4.2 Test set-up

Turn EUT off and set chamber temperature to -20 °C and then allow sufficient time (approximately 20 to 30 minutes after chamber reach the assigned temperature) for EUT to stabilize. Turn ON EUT and measure the EUT operating frequency and then turn off the EUT after the measurement. The temperature in the chamber was raised 10 °C step from -20 °C to +50°C. Repeat above method for frequency measurements every 10 °C step and then record all measured frequencies on each temperature step.

6.4.3 Test data

-. Test Date : September 24, 2019 ~ October 15, 2019
-. Result : PASSED

Temperature (°C)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Margin (Hz)	Limit (Hz)
-20	13,560,000.0	13,560,385	385	±1 356.00
-10		13,560,247	247	
0		13,560,180	180	
10		13,560,224	224	
20		13,560,475	475	
30		13,560,387	387	
40		13,560,251	251	
50		13,560,361	361	



Tested by: Hyung-Kwon, Oh / Assistant Manager

6.5 FREQUENCY STABILITY WITH VOLTAGE VARIATION

6.5.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

6.5.2 Test set-up

An external DC power supply was connected to the input of the EUT. The voltage of EUT set to 115 % of the nominal value and then was reduced to 85 % of nominal voltage. The output frequency was recorded at each step.

6.5.3 Test data

-. Test Date : September 24, 2019 ~ October 15, 2019

-. Result : PASSED

Voltage (Vdc)	Carrier Freq. (Hz)	Measured Freq. (Hz)	Margin (Hz)	Limit (Hz)
3.45(115 %)	13,560,000	13,560,359	359	± 1 356.00
3.00(100 %)		13,560,425	425	
2.55(85 %)		13,560,241	241	


Tested by: Hyung-Kwon, Oh / Assistant Manager

7. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses.

+	Meter reading	(dB μ V)
-	Amplifier Gain	(dB)
+	Cable Loss	(dB)
-	Antenna Factor	(dB/m)
=	Corrected Result	(dB μ V/m)

Margin (dB)

	Specification Limit	(dB μ V/m)
-	Corrected Result	(dB μ V/m)
=	dB Relative to Spec	($\pm$ dB)

8. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESCI	101012	Oct. 22, 2018	One Year	-
2.		R/S	ESR	101470	Oct. 22, 2018	One Year	■
3.		R/S	ESPI	101278	Oct. 20, 2018	One Year	■
4.	Spectrum analyzer	R/S	FSV30	101372	Jul. 24, 2019	One Year	■
5.	Amplifier	Sonoma Instrument	310N	312544	Mar. 18, 2019	One Year	■
6.	Amplifier	Sonoma Instrument	310N	312545	Mar. 18, 2019	One Year	-
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-255	Jun. 05, 2018	Two Year	■
8.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-419	Aug. 09, 2018	Two Year	-
9.	Controller	Innco System	CO3000	CO3000/904/ 37211215/L	N/A	N/A	■
10.	LISN	EMCO	3825/2	9109-1867	Mar. 27, 2019	One Year	-
				9109-1869	Mar. 19, 2019	One Year	■
		Schwarzbeck	NNLK8121	804	Oct. 22, 2018	One Year	■
		Schwarzbeck	NSLK8128	8128-216	Mar. 20, 2019	One Year	■
11.	Turn Table	Innco System	DT3000	930611	N/A	N/A	■
12.	Antenna Master	Innco System	MA4000-EP	MA4000/332	N/A	N/A	-
13.	Antenna Master	Innco System	MA-4000XPET	MA4000/509	N/A	N/A	■
14.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-235	May 13, 2018	Two Year	■
15.	Frequency Counter	HP	53152A	US39270295	Jul. 25, 2019	One Year	■
16.	Environmental Test Chamber	ESPEC	PSL-2KP	14009407	Feb. 22, 2019	One Year	■
17.	DC Power Supply	Protek	PWS-3003D	4020409	Jul. 24, 2019	One Year	