

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-19O-RWD-041
AGR No. : A199A-269
Applicant : AMOSENSE
Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea
Manufacturer : AMOSENSE
Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea
Type of Equipment : NOVO
FCC ID. : 2AS9T-SB42SW
Model Name : SB42-SW
Serial number : N/A
Total page of Report : 80 pages (including this page)
Date of Incoming : September 23, 2019
Date of issue : October 17, 2019

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Tae-Ho, Kim / Senior Manager
ONETECH Corp.

Approved by:



Ki-Hong, Nam / Chief Engineer
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.4 CONFIGURATION OF TEST SYSTEM.....	18
5.5 ANTENNA REQUIREMENT	18
6. PRELIMINARY TEST	19
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	19
6.2 GENERAL RADIATED EMISSIONS TESTS	19
7. MIMIMUM 6 DB BANDWIDTH	20
7.1 OPERATING ENVIRONMENT	20
7.2 TEST SET-UP	20
7.3 TEST EQUIPMENT USED	20
7.4 TEST DATA FOR 802.11B WLAN MODE.....	21
7.5 TEST DATA FOR 802.11G WLAN MODE	23
7.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	25
8. MAXIMUM PEAK OUTPUT POWER.....	27
8.1 OPERATING ENVIRONMENT	27
8.2 TEST SET-UP	27
8.3 TEST EQUIPMENT USED	27
8.4 TEST DATA FOR 802.11B WLAN MODE.....	28

8.5 TEST DATA FOR 802.11G WLAN MODE	30
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	34
9.1 OPERATING ENVIRONMENT	34
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	34
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	34
9.4 TEST EQUIPMENT USED	34
9.5 TEST DATA FOR CONDUCTED EMISSION	35
9.5.1 Test data for 802.11b WLAN Mode.....	35
9.5.2 Test data for 802.11g WLAN Mode.....	40
9.5.3 Test data for 802.11n_HT20 WLAN Mode.....	45
9.6 TEST DATA FOR RADIATED EMISSION.....	50
9.6.1 Radiated Emission which fall in the Restricted Band.....	50
10. PEAK POWER SPECTRUL DENSITY	71
10.1 OPERATING ENVIRONMENT	71
10.2 TEST SET-UP	71
10.3 TEST EQUIPMENT USED	71
10.4 TEST DATA FOR 802.11B WLAN MODE.....	72
10.5 TEST DATA FOR 802.11G WLAN MODE	74
10.6 TEST DATA FOR 802.11N_HT20 WLAN MODE.....	76
11. RADIATED EMISSION TEST	78
11.1 OPERATING ENVIRONMENT	78
11.2 TEST SET-UP	78
11.3 TEST EQUIPMENT USED	78
11.4 TEST DATA.....	79
11.4.1 Test data for 30 MHz ~ 1 GHz	79
11.4.2 Test data for Below 30 MHz	80
11.4.3 Test data for above 1 GHz	80

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-19O-RWD-041	October 17, 2019	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : AMOSENSE
Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea
Manufacturer : AMOSENSE
Address : 56 Naruteo-ro, Seocho-gu, SEOUL, South Korea
Factory : AMO VINA CO.,LTD
Address : Lot CN12, Khai Quang industrial Park, Khai Quang Ward, Vinh Yen City, Vinh Phuc Province, Vietnam
Contact Person : UIHAN JEONG/Research Engineer
Telephone No. : +82-010-4948-5676
FCC ID : 2AS9T-SB42SW
Model Name : SB42-SW
Brand Name : -
Serial Number : N/A
Date : October 17, 2019

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	NOVO
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not applicable because the EUT use battery.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The AMOSENSE, Model SB42-SW (referred to as the EUT in this report) is a NOVO. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	NOVO	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	NFC	13.56 MHz
	Sig Fox	902.137 5 MHz ~ 904.662 5 MHz
	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
MODULATION TYPE	NFC	ASK
	Sig Fox	DBPSK
	Bluetooth LE	GFSK
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK) 802.11g/n(HT20): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
RF OUTPUT POWER'	NFC	39.53 dBμV/m
	Sig Fox	22.26 dBm
	Bluetooth LE	-0.44 dBm
	WLAN 2.4 GHz	2.99 dBm(802.11b) 1.64 dBm(802.11g) 1.57 dBm(802.11n_HT20)
ANTENNA TYPE	NFC: FPCB Antenna Sig Fox : Chip Antenna WLAN 2.4 GHz / Bluetooth LE : Chip Antenna	
ANTENNA GAIN	WLAN 2.4 GHz / Bluetooth LE : 2.40 dBi Sig Fox : -0.59 dBi	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32.768 kHz, 26 MHz, 32 MHz, 50 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	AMONSENSE	NOVO Rev04	N/A
NFC ANTENNA	N/A	ANFA150N526 NOVO	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
SB42-SW	AMONSENSE	NOVO(EUT)	-
N/A	N/A	Jig Board	EUT
Ideapad 100	LENOVO	Notebook PC	-
PA-1450-55LR	LITE-ON TECHNOLOGY	AC Adapter	-

5.3 Mode of operation during the test


For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.


Modulation	DATA RATE	OUTPUT POWER[dBm]
802.11 b (Middle Channel)	1 Mbps	2.27
	2 Mbps	2.25
	5.5 Mbps	2.21
	11 Mbps	2.16
802.11g (Middle Channel)	6 Mbps	0.90
	9 Mbps	0.88
	12 Mbps	0.85
	18 Mbps	0.84
	24 Mbps	0.80
	36 Mbps	0.77
	48 Mbps	0.74
	54 Mbps	0.72
802.11 n(HT 20) (Middle Channel)	6.5 Mbps	0.85
	13 Mbps	0.84
	19.5 Mbps	0.79
	26 Mbps	0.78
	39 Mbps	0.75
	52 Mbps	0.71
	58.5 Mbps	0.69
	65 Mbps	0.64

- . The worse case data rate for each modulation is determined 1 Mbps for IEEE 802.11b, 6 Mbps for IEEE 802.11g, 6.5 Mbps for HT20.
- . To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.
- . The worst case for each modulation is in IEEE 802.11b. So the plot for Radiated Emission which fall in the Restricted Band is provided only in IEEE 802.11b.


-. Occupied Bandwidth(99 %)

Modulation	CHANNEL	FREQUENCY (MHz)	Occupied Bandwidth(MHz)
802.11 b	Low	2 412	11.24
	Middle	2 442	11.19
	High	2 462	11.14

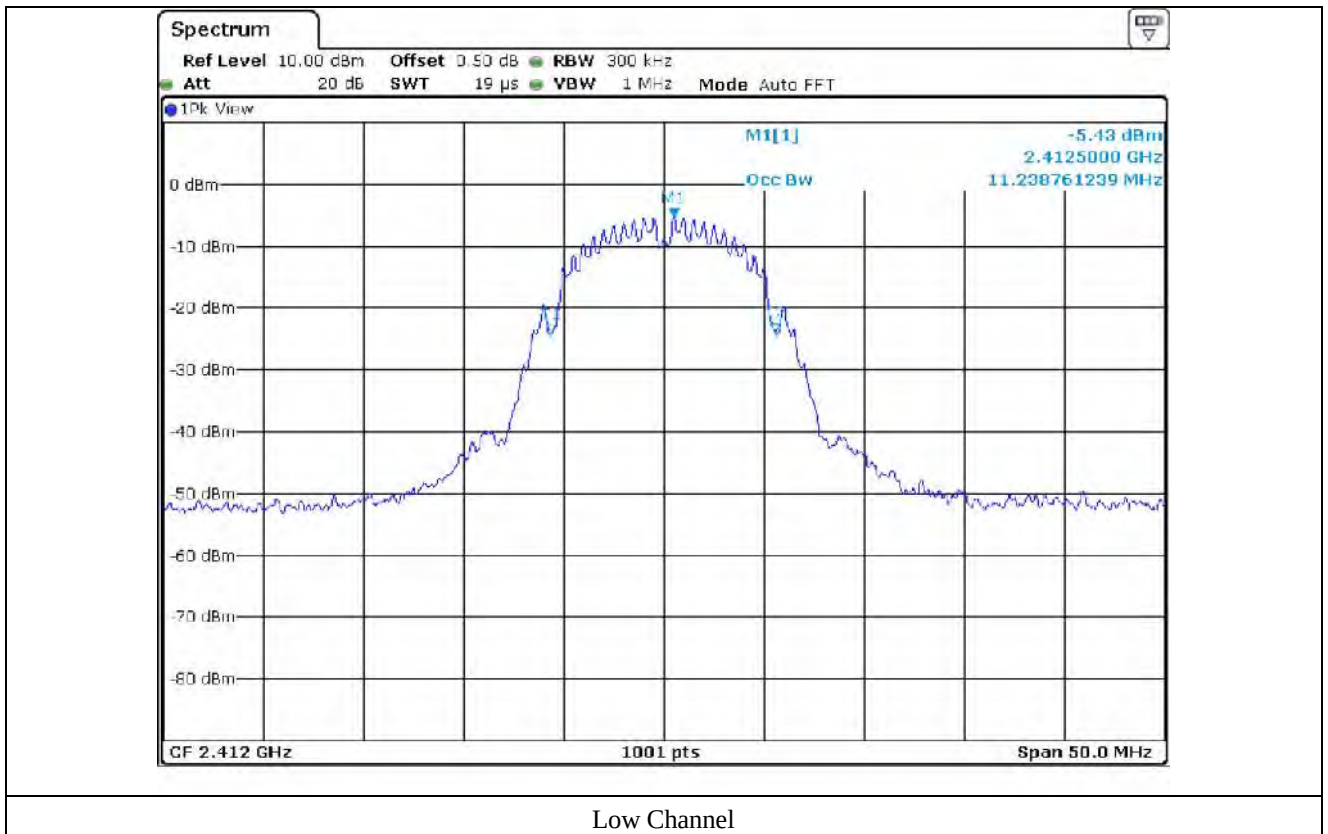

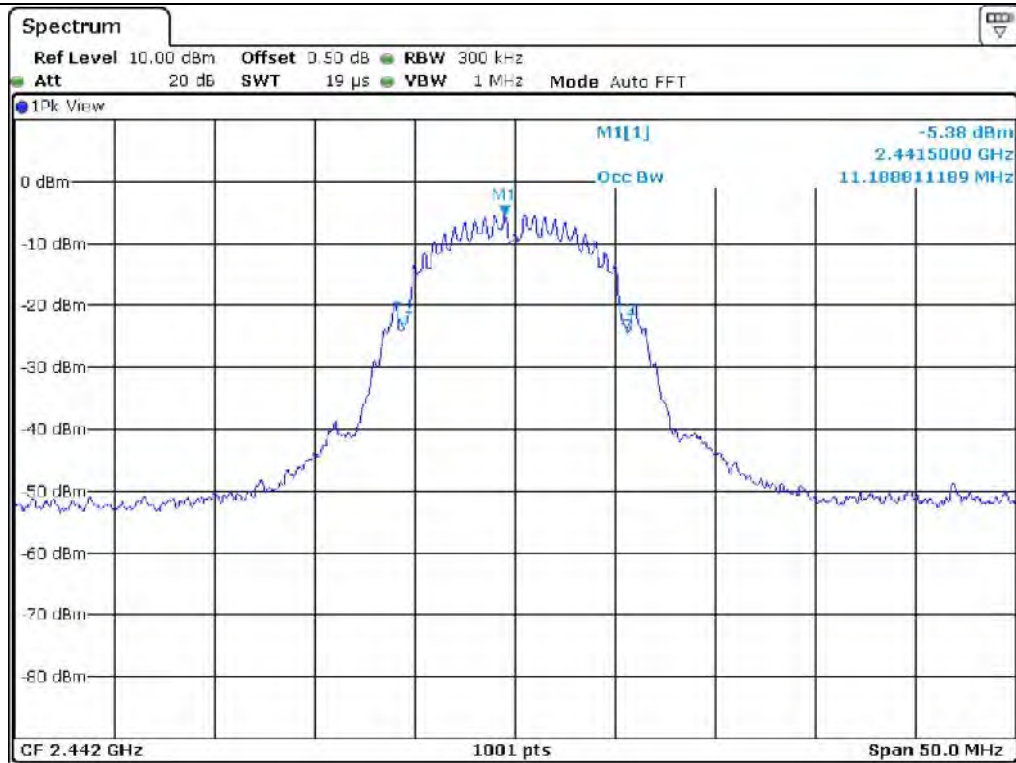



Middle Channel

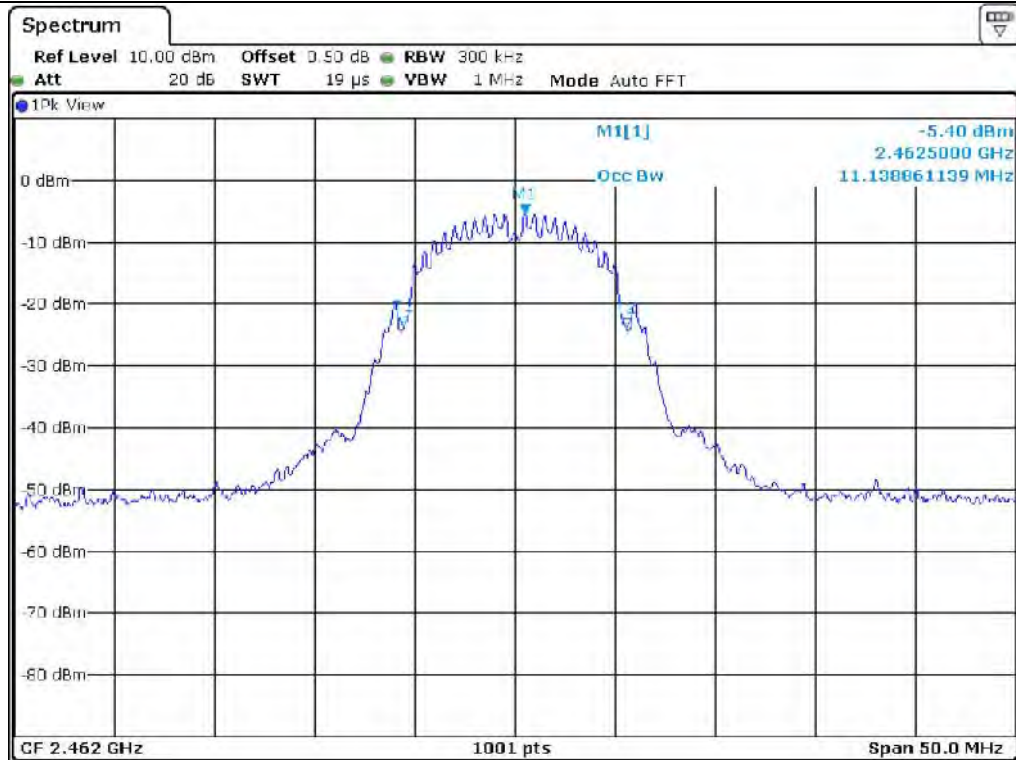


High Channel

Modulation	CHANNEL	FREQUENCY (MHz)	Occupied Bandwidth(MHz)
802.11 g	Low	2 412	16.38
	Middle	2 442	16.43
	High	2 462	16.38

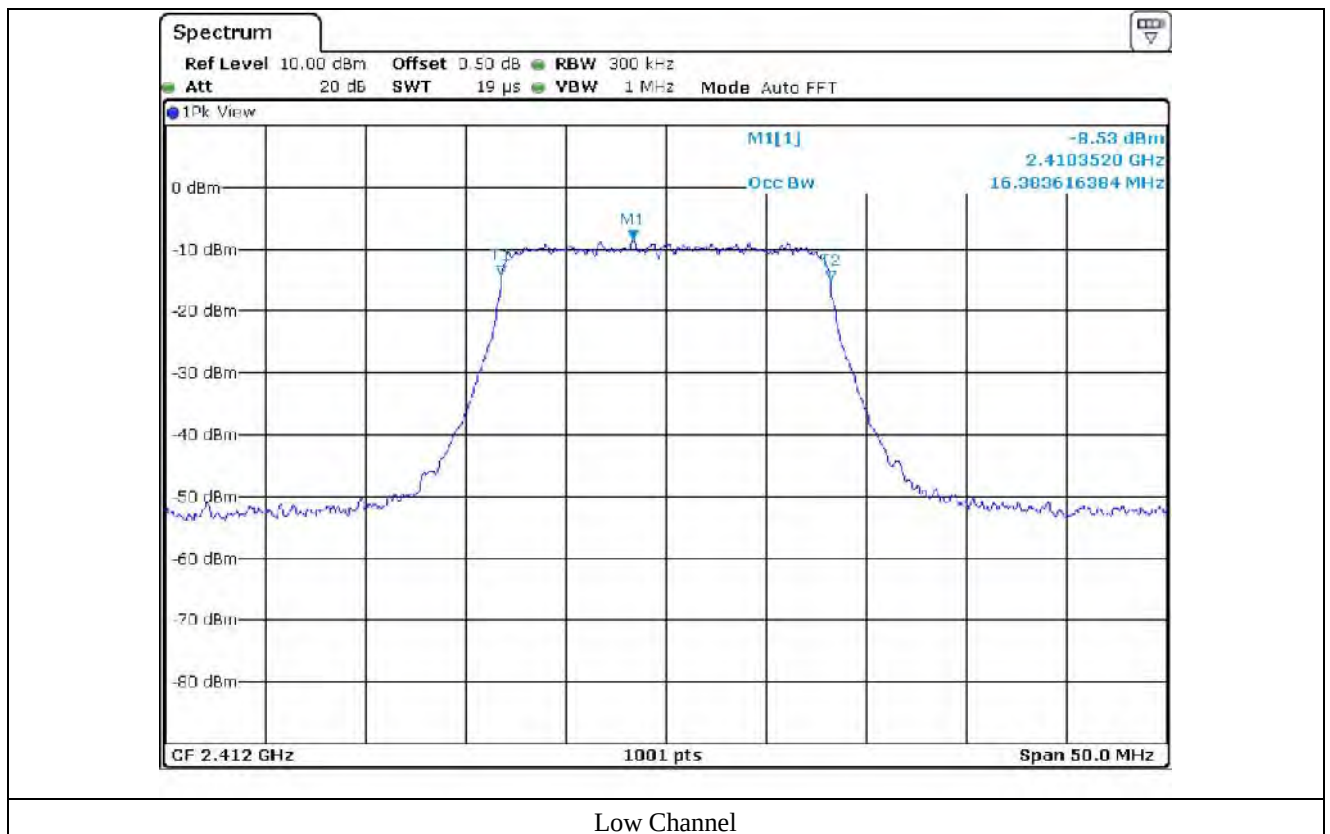

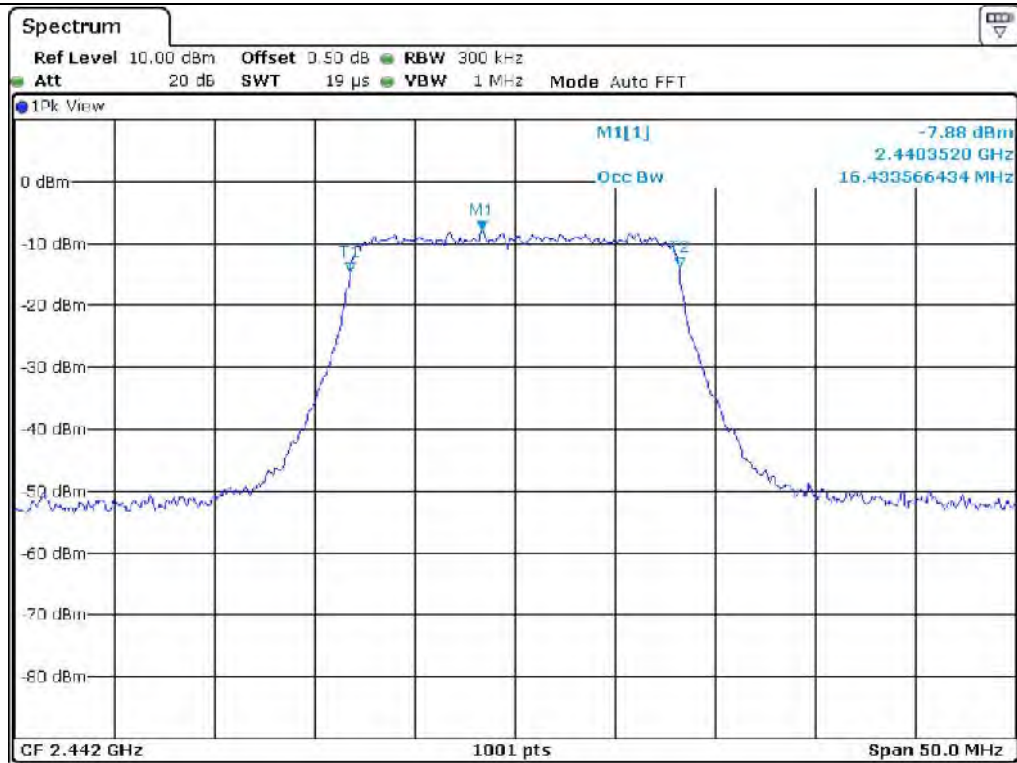



Middle Channel

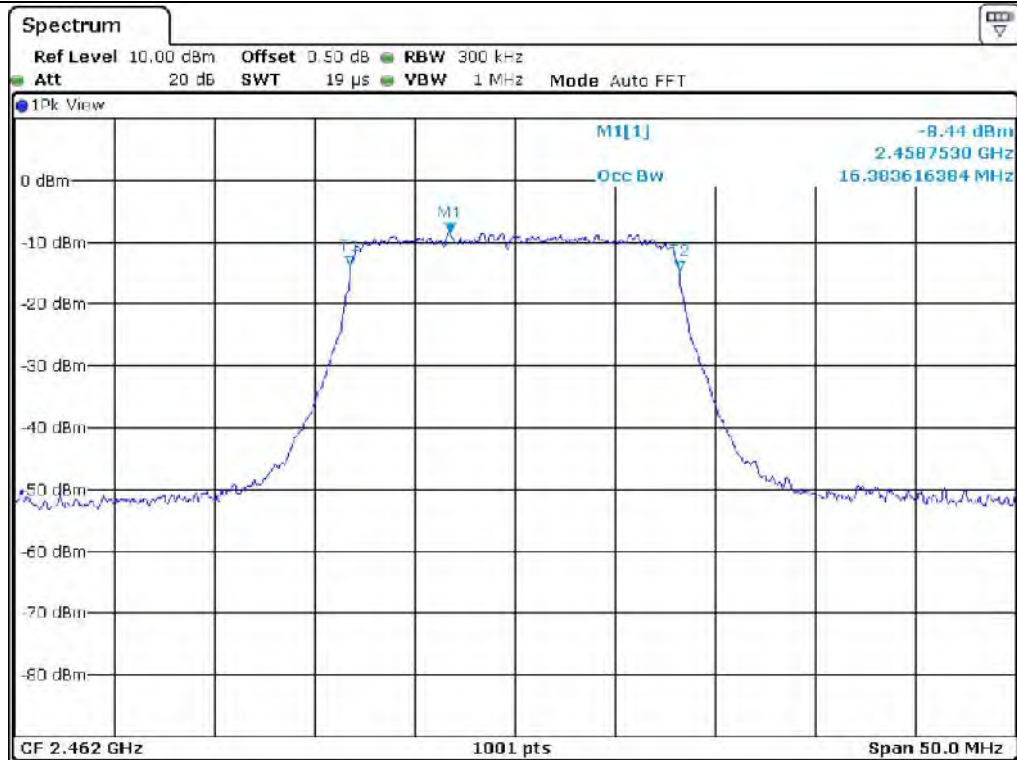

High Channel

Modulation	CHANNEL	FREQUENCY (MHz)	Occupied Bandwidth(MHz)
802.11 n(HT 20)	Low	2 412	17.58
	Middle	2 442	17.58
	High	2 462	17.58

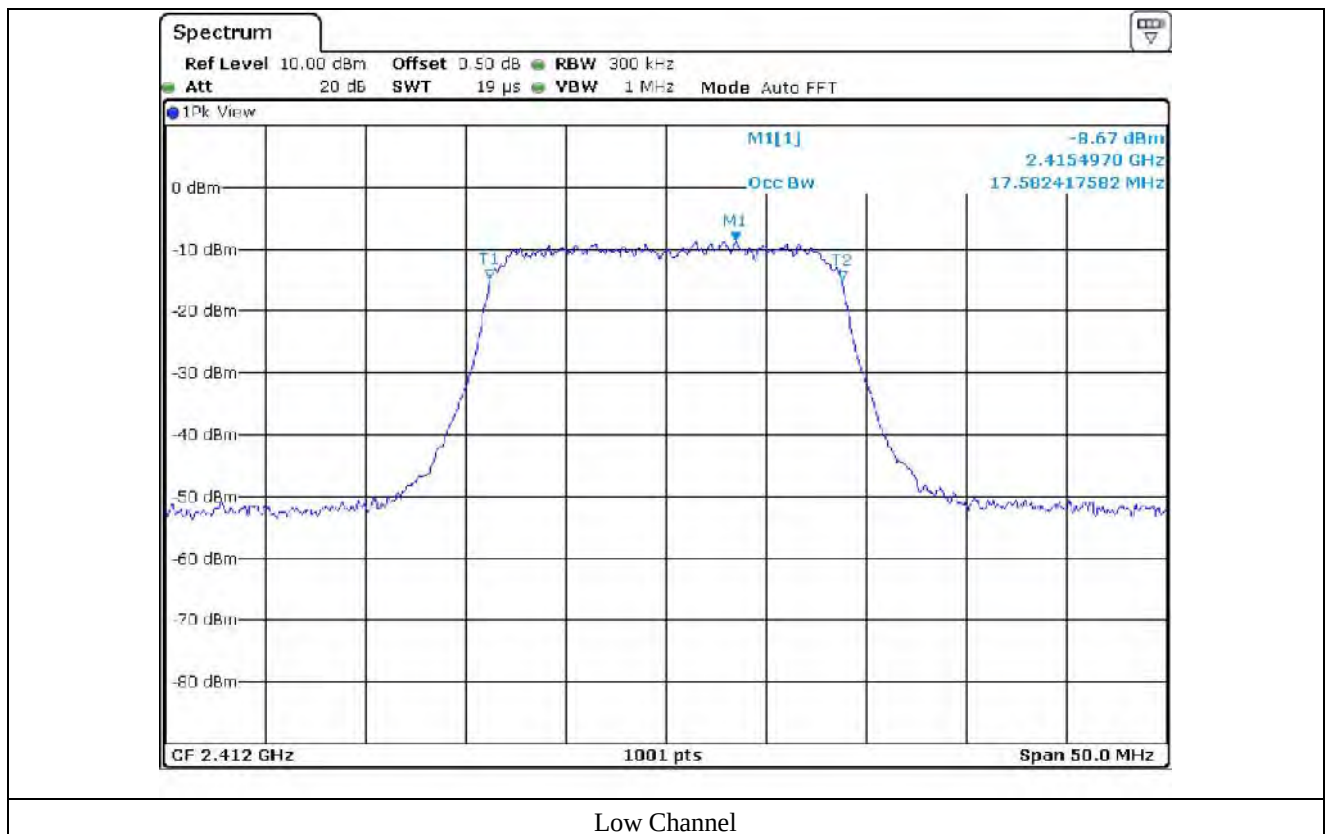

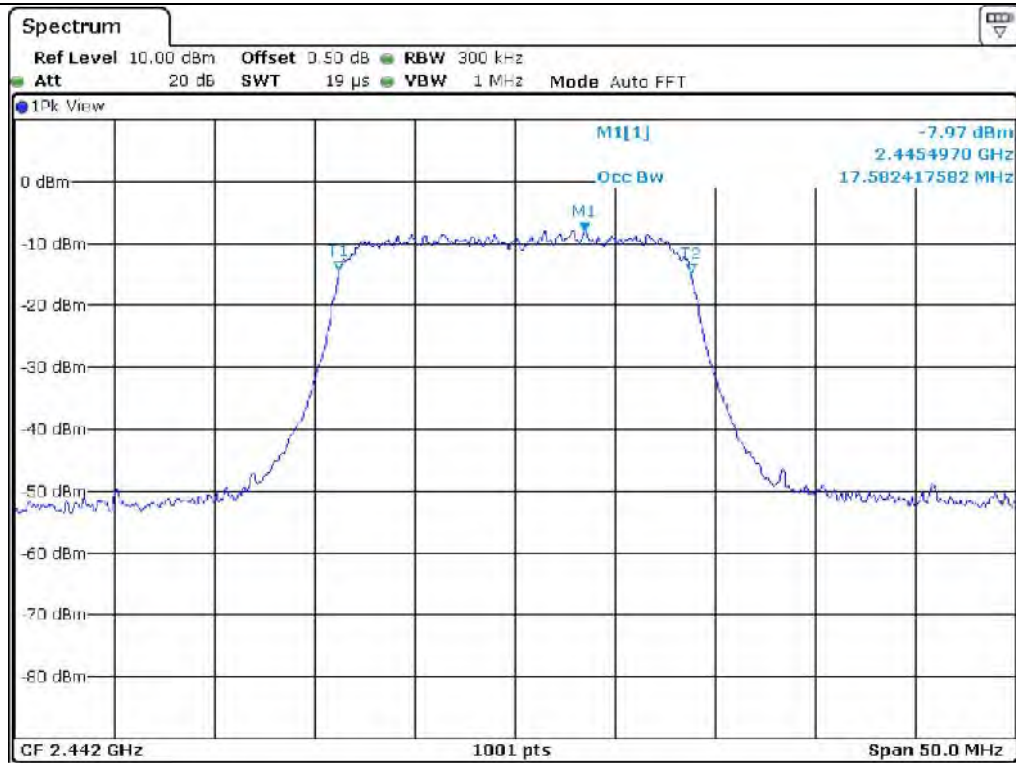

Middle Channel



High Channel


-. Duty Cycle


Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
802.11 b	4.20	0.52	88.98	0.52
802.11 g	0.670	0.125	84.28	0.74
802.11 n(HT20)	0.640	0.115	84.77	0.72

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100


Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

-. Test Plot

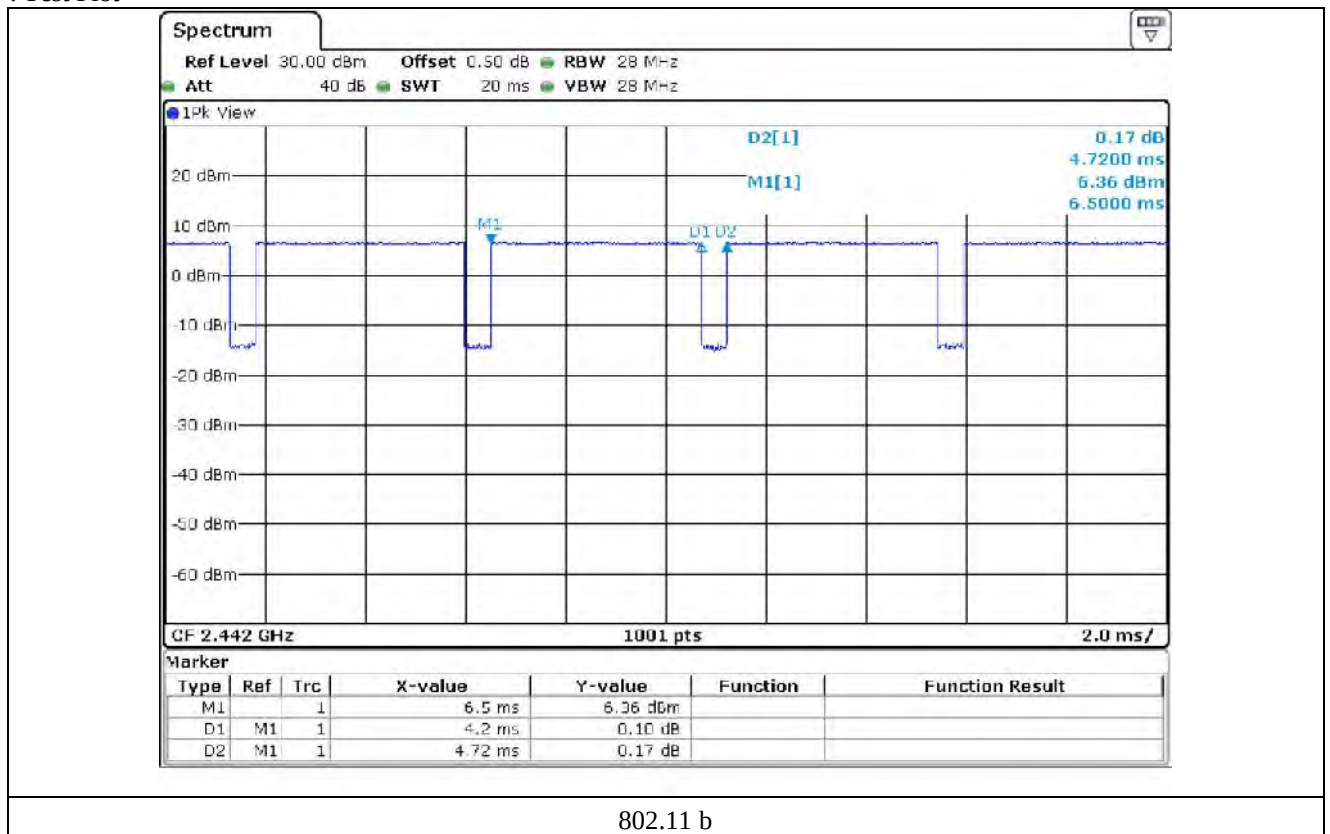

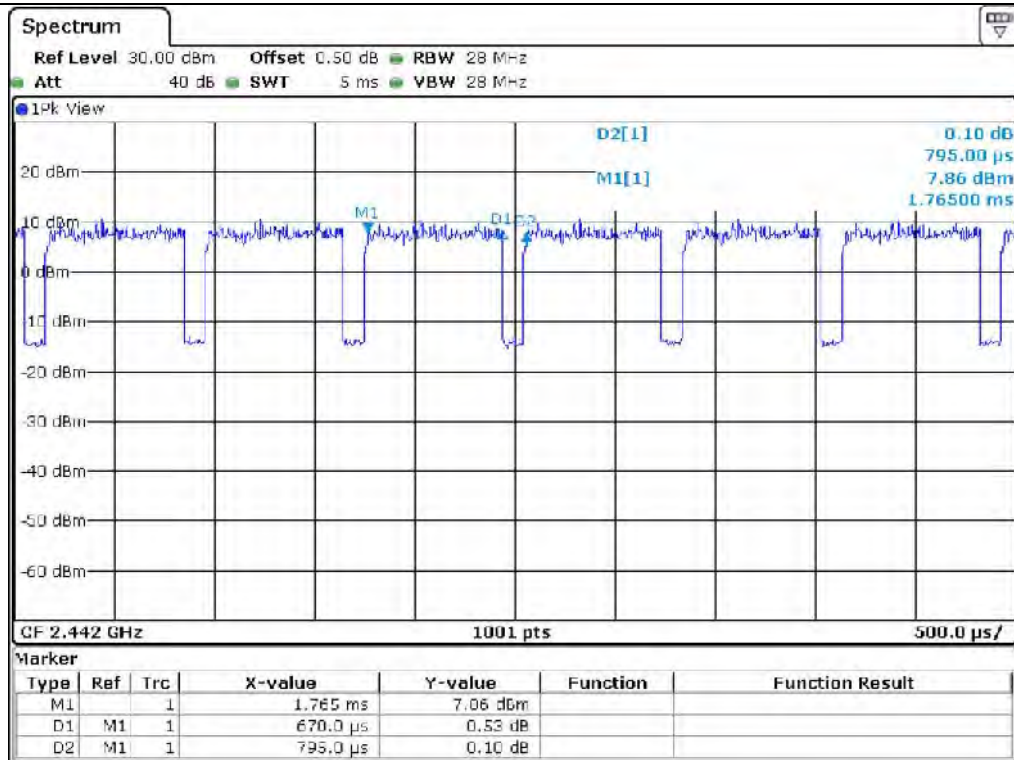

802.11 g

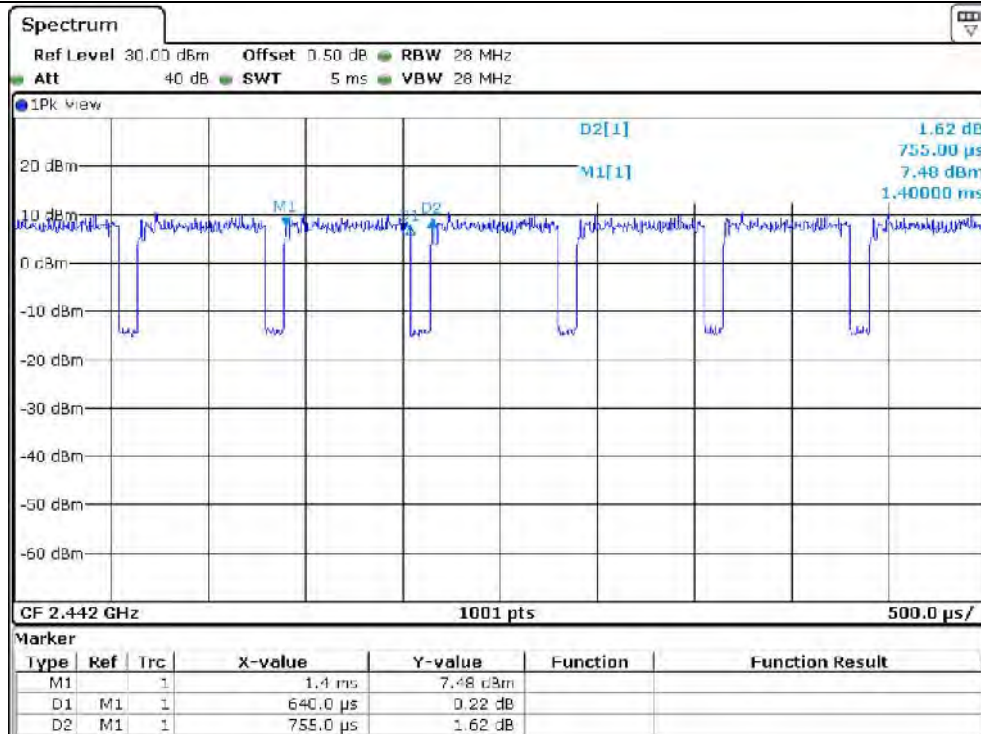

802.11 n(HT20)

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
It is not needed to test, because the power of the EUT is supplied from a DC battery.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

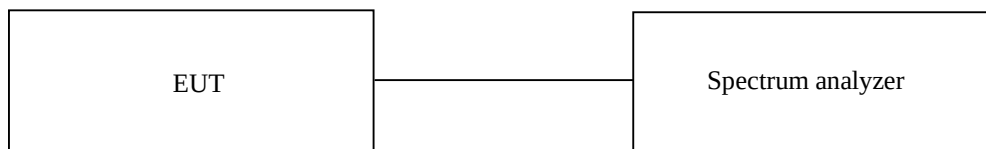

7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data for 802.11b WLAN Mode


-. Test Date : September 24, 2019 ~ October 15, 2019


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
LOW	2 412.00	9.04	0.50	8.54
MIDDLE	2 442.00	9.04	0.50	8.54
HIGH	2 462.00	9.04	0.50	8.54


Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Assistant Manager

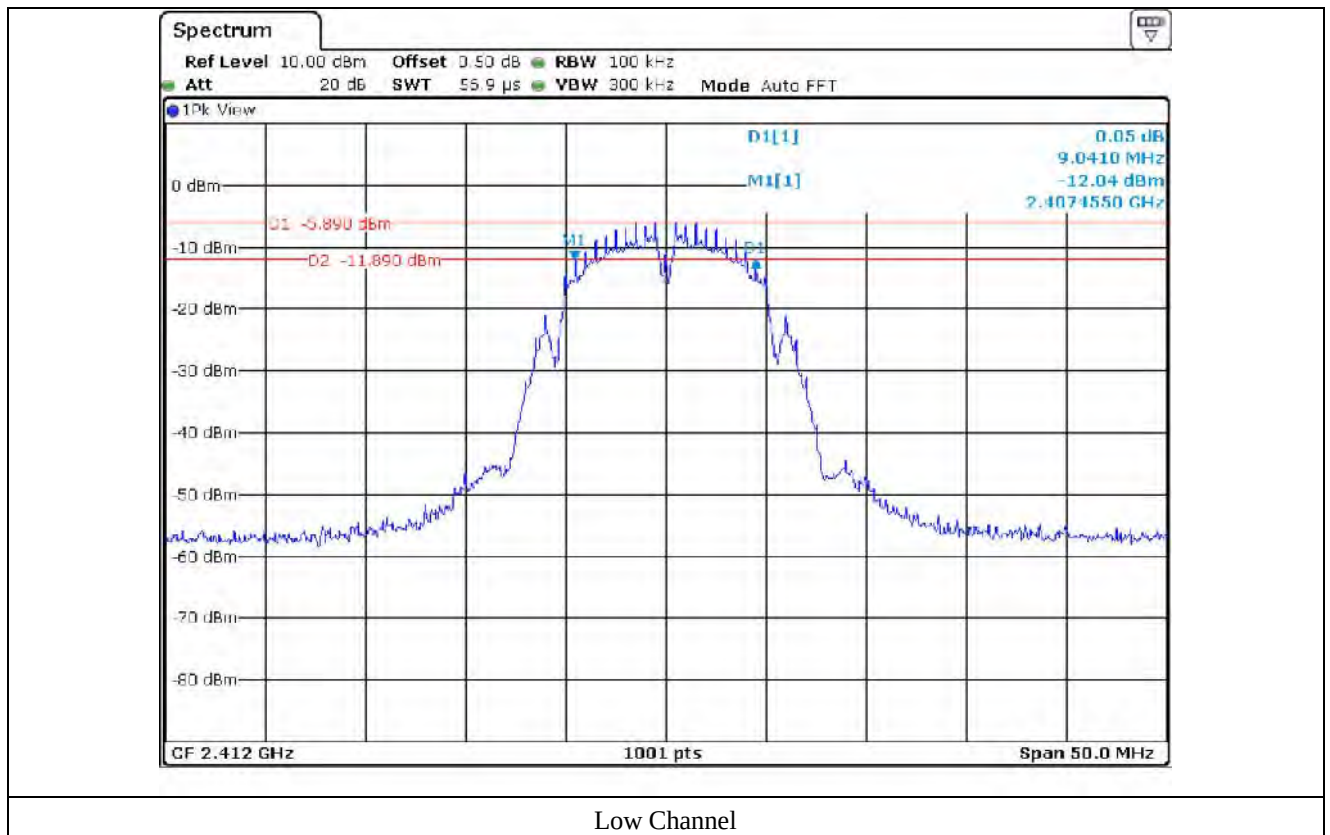

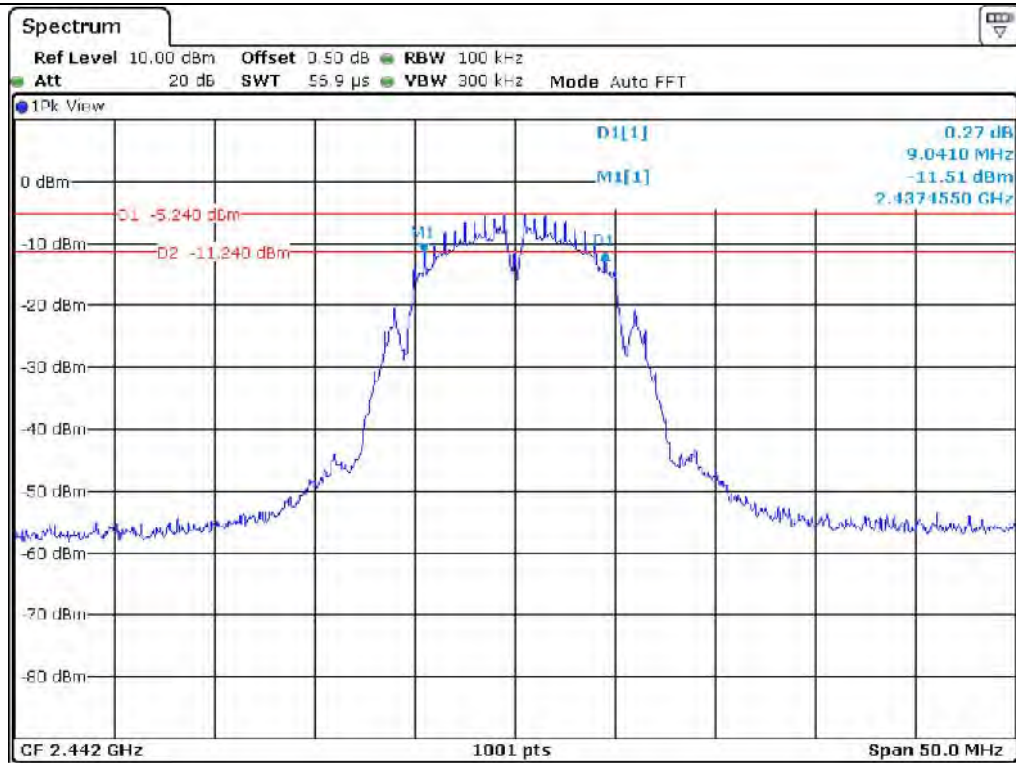

Middle Channel

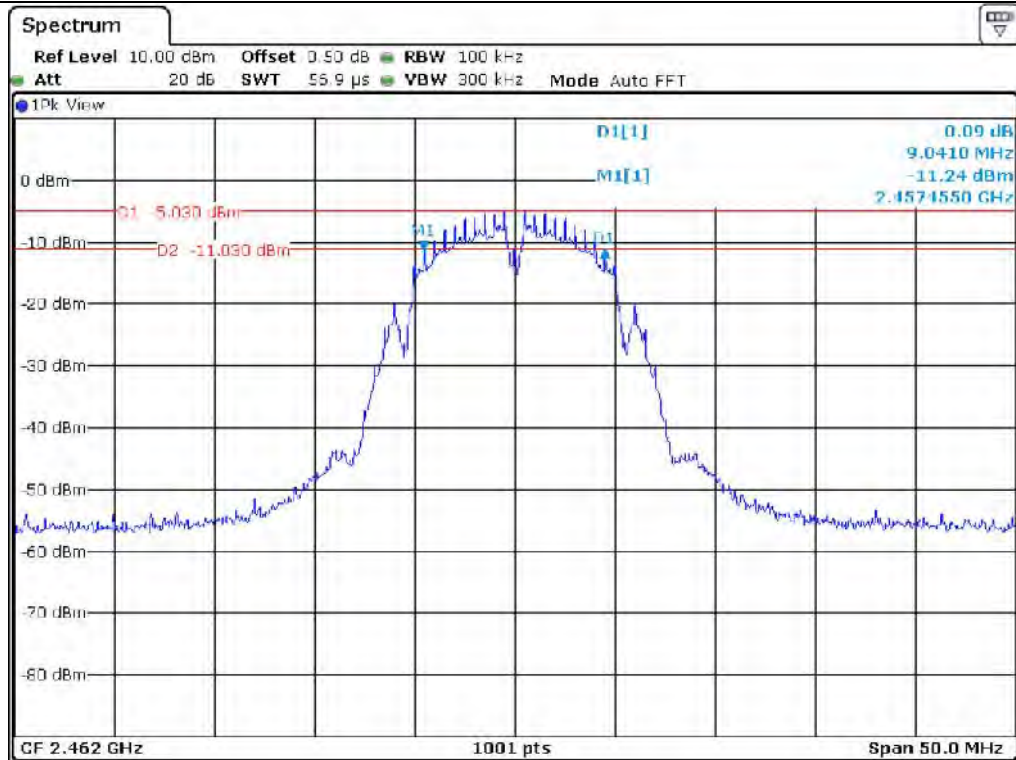

High Channel

7.5 Test data for 802.11g WLAN Mode

-. Test Date : September 24, 2019 ~ October 15, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
LOW	2 412.00	16.33	0.50	15.83
MIDDLE	2 442.00	16.33	0.50	15.83
HIGH	2 462.00	16.33	0.50	15.83

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

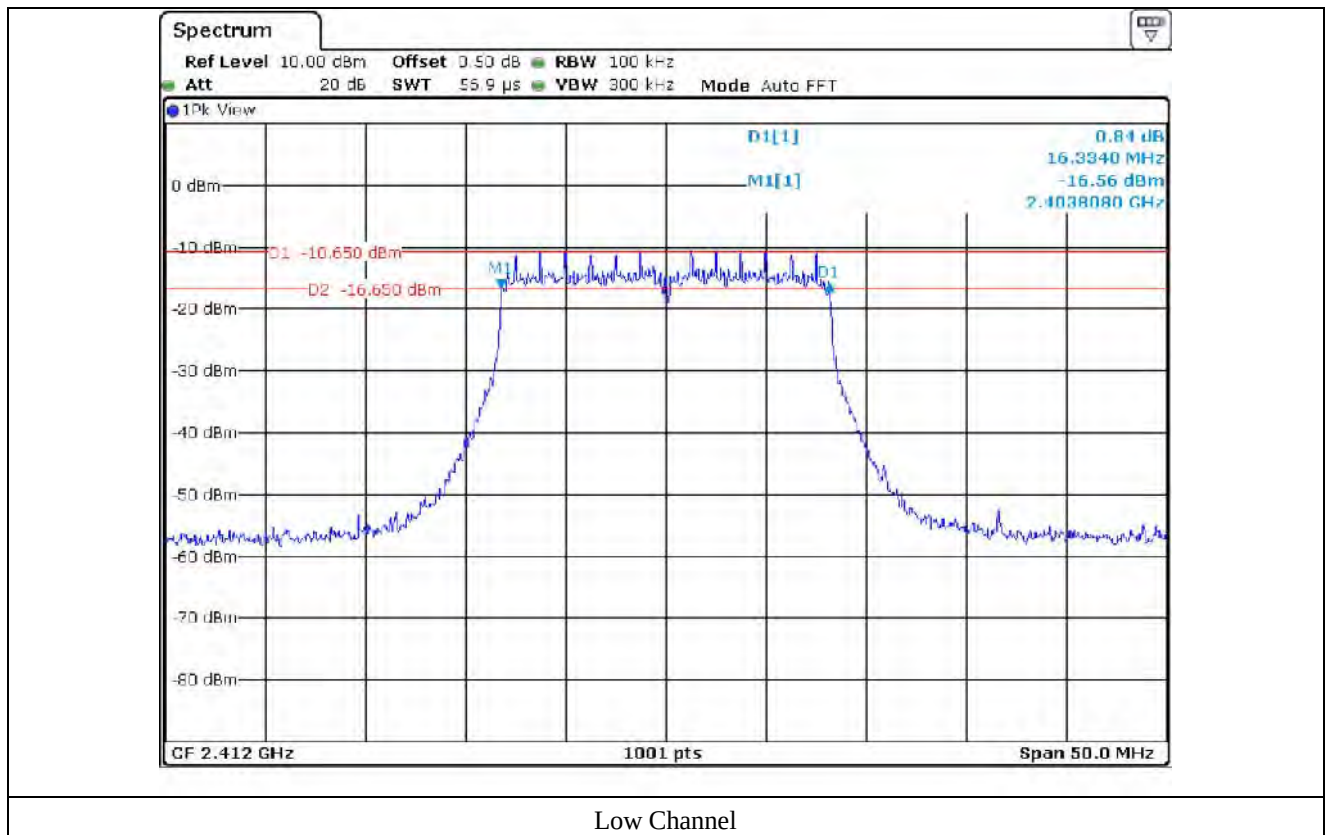

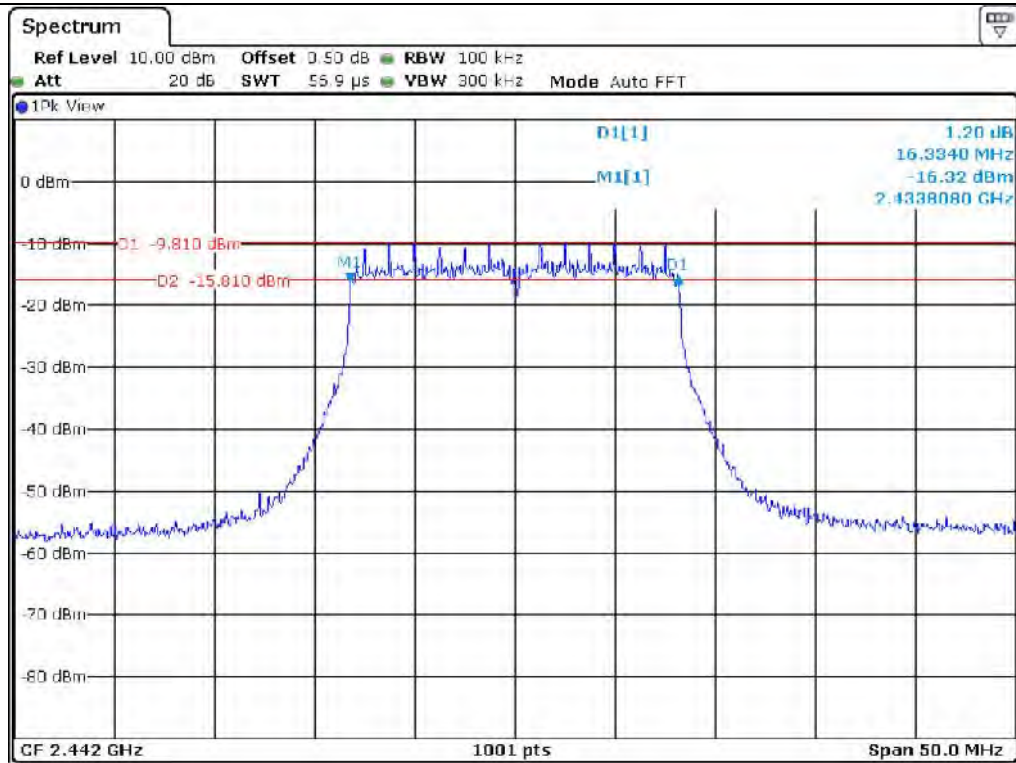

Middle Channel

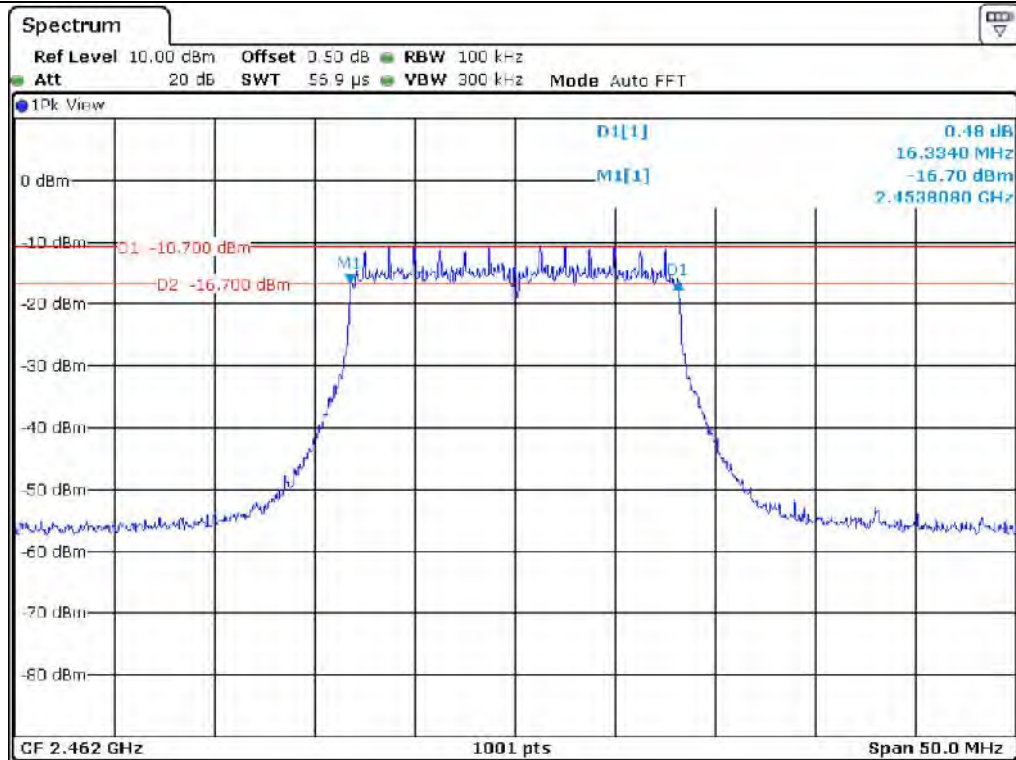

High Channel

-. Test Result : Pass

Remark. Margin = Measured Value - Limit

Spectrum

Ref Level 10.00 dBm Offset 0.50 dB RBW 100 kHz
Att 20 dB SWT 55.9 μ s VBW 300 kHz Mode Auto FFT

1Pk View


D1[1] 1.01 dBm
M1[1] 16.6830 MHz
-17.08 dBm
2.4034590 GHz

0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
-80 dBm


D1 -10.430 dBm
D2 -16.430 dBm

M1

CF 2.412 GHz 1001 pts Span 50.0 MHz

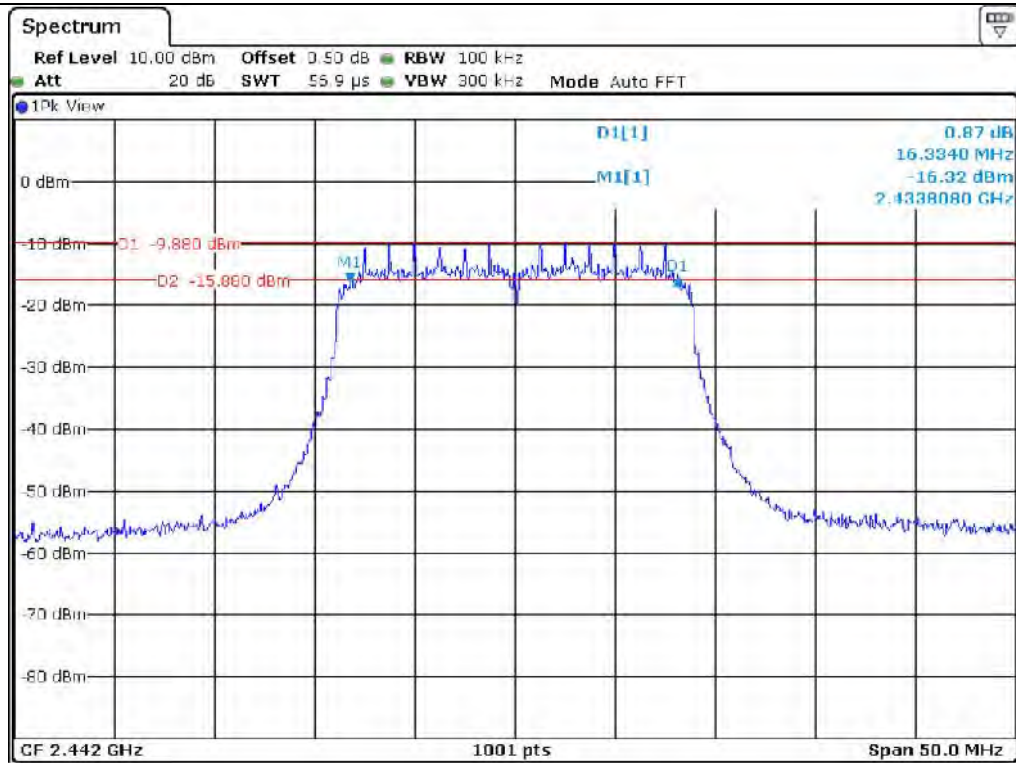

Middle Channel

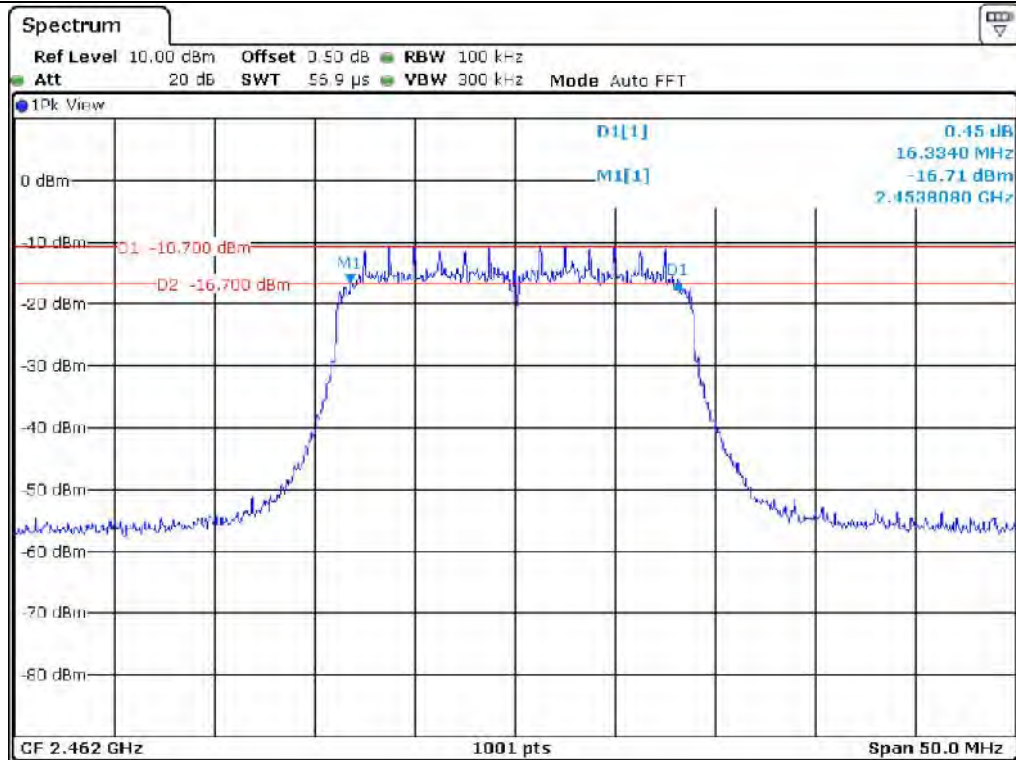

High Channel


8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

8.2 Test set-up

The maximum peak output power was measured with the wide band sensor connected to the antenna output of the EUT.
The Wide Band Sensor is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section 8.3.2(558074 D01 15.247 Meas Guidance v05r02).

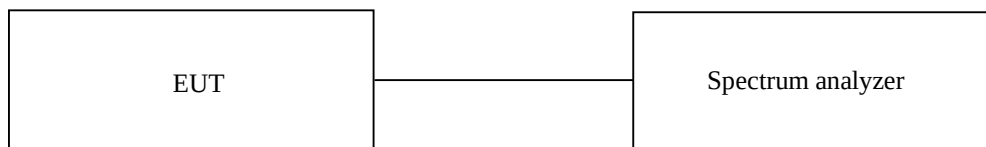

8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 802.11b WLAN Mode

-. Test Date : September 24, 2019 ~ October 15, 2019


-. Test Result : Pass


-. Duty Cycle : 88.98 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	Correction Factor (dB)	Result (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	2.40	0.52	2.92	30.00	27.08
MIDDLE	2 442.00	2.27	0.52	2.79	30.00	27.21
HIGH	2 462.00	2.47	0.52	2.99	30.00	27.01


Remark : Margin = Limit – Result (= Measured Vlaue + Correction Factor)

Tested by: Hyung-Kwon, Oh / Assistant Manager

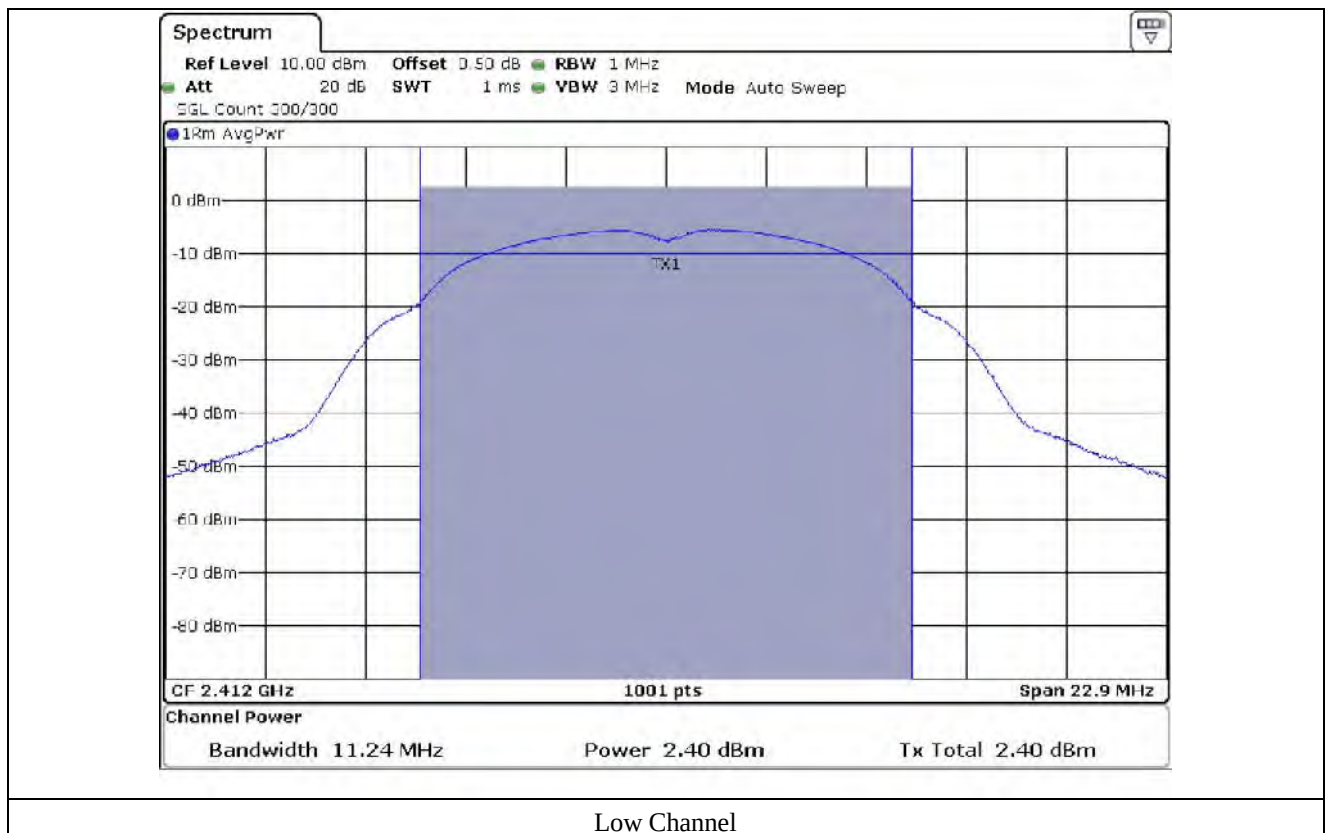

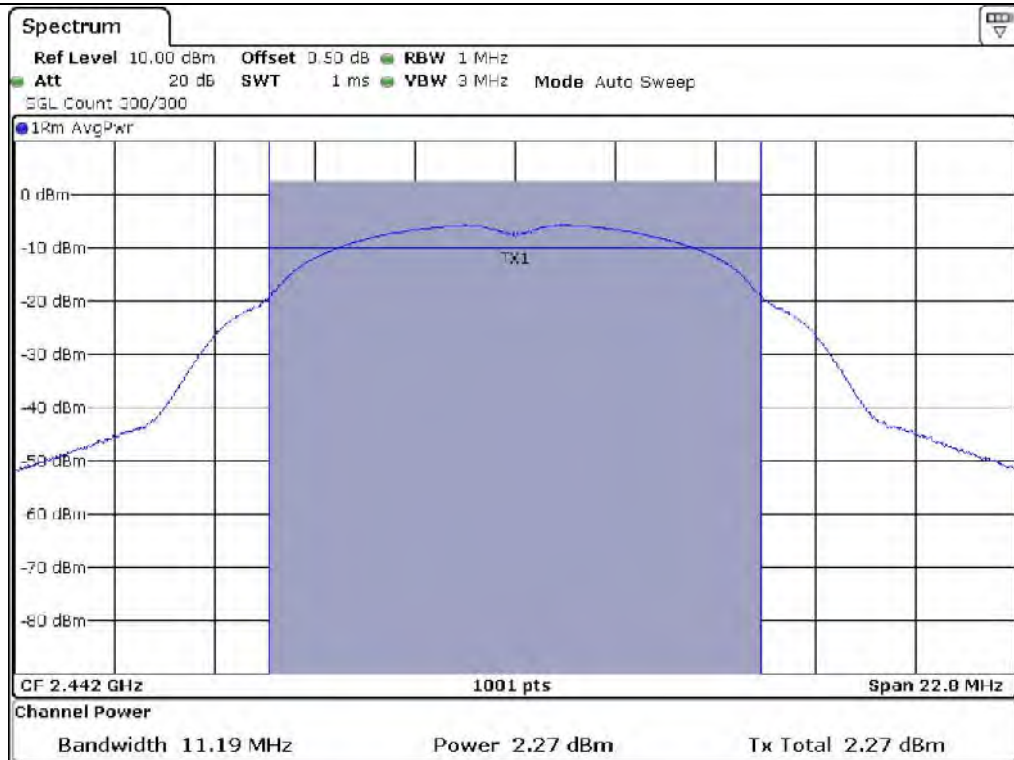

Middle Channel

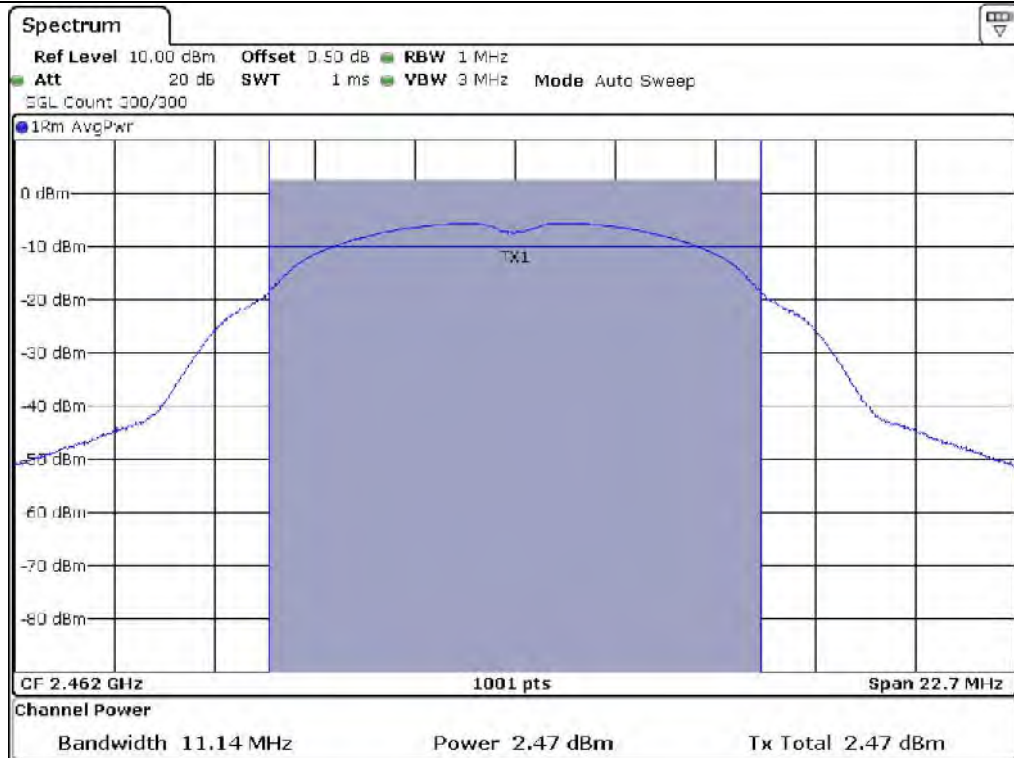

High Channel

8.5 Test data for 802.11g WLAN Mode

-. Test Date : September 24, 2019 ~ October 15, 2019


-. Test Result : Pass


-. Duty Cycle : 84.28 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	Correction Factor (dB)	Result (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	0.28	0.74	1.02	30.00	28.98
MIDDLE	2 442.00	0.90	0.74	1.64	30.00	28.36
HIGH	2 462.00	0.18	0.74	0.92	30.00	29.08


Remark : Margin = Limit – Result (= Measured Vlaue + Correction Factor)

Tested by: Hyung-Kwon, Oh / Assistant Manager

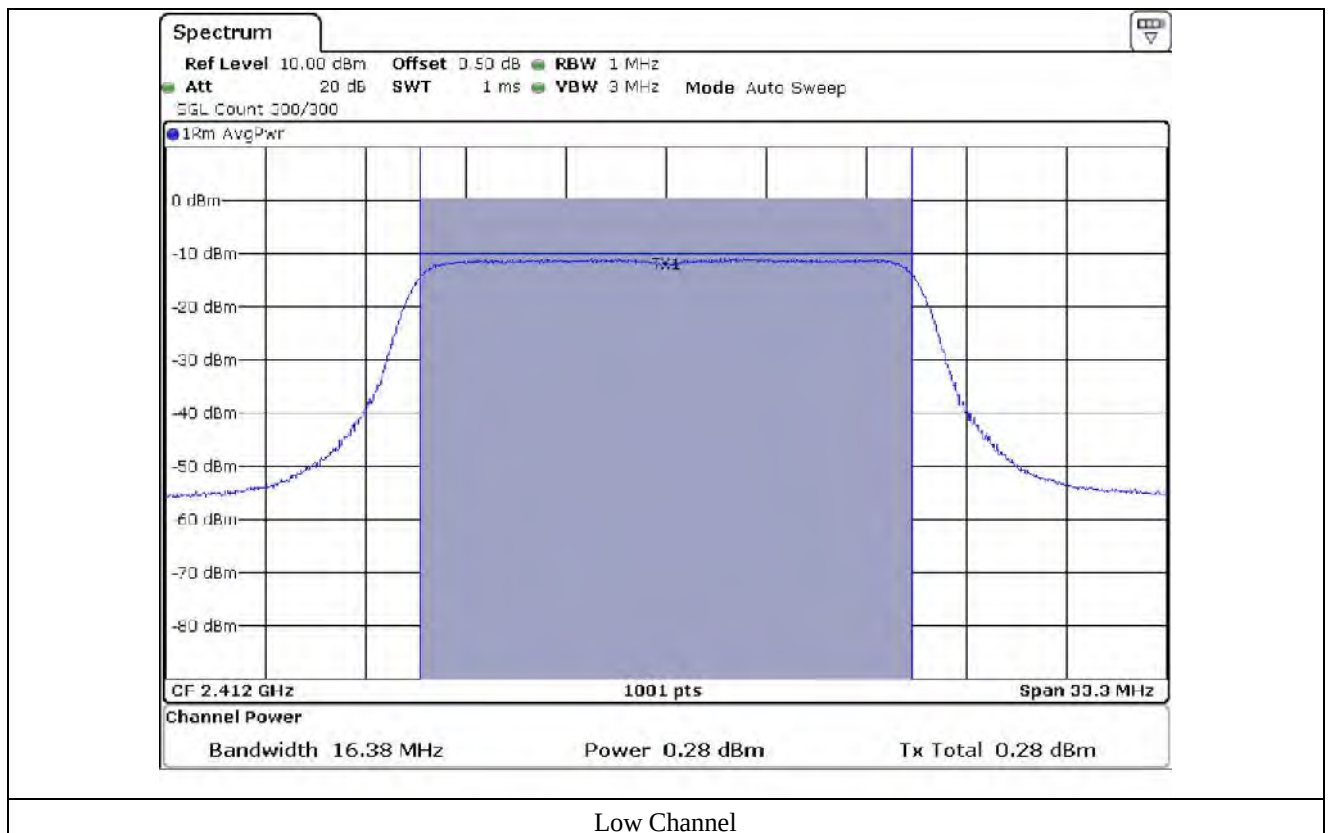

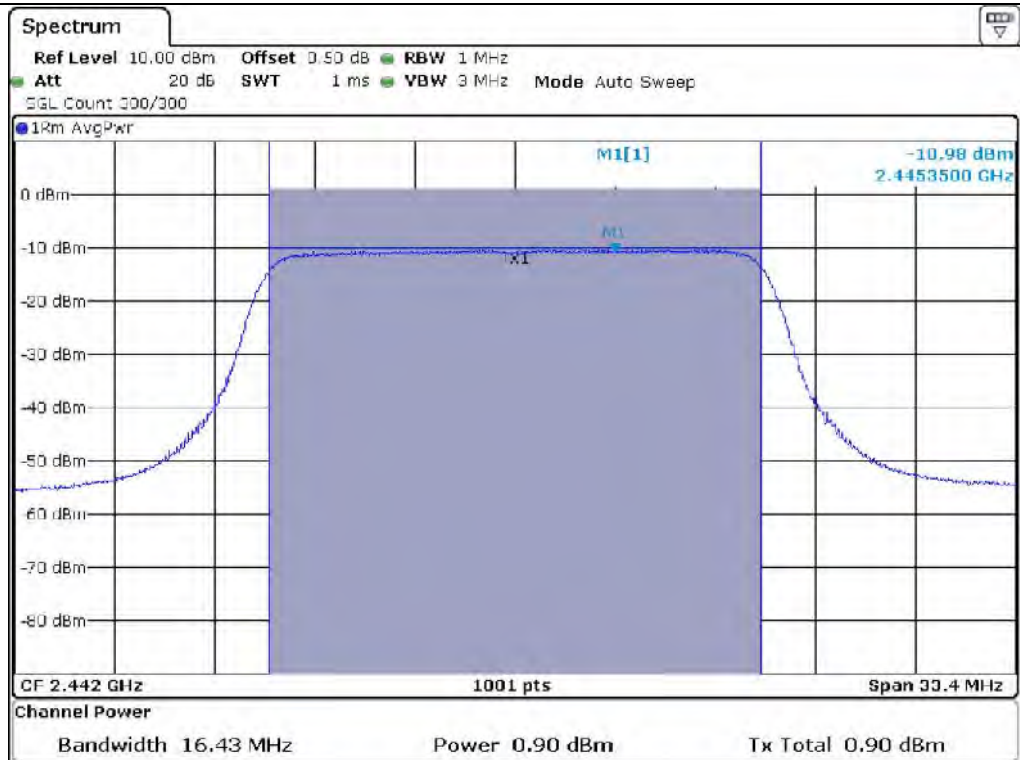

Middle Channel

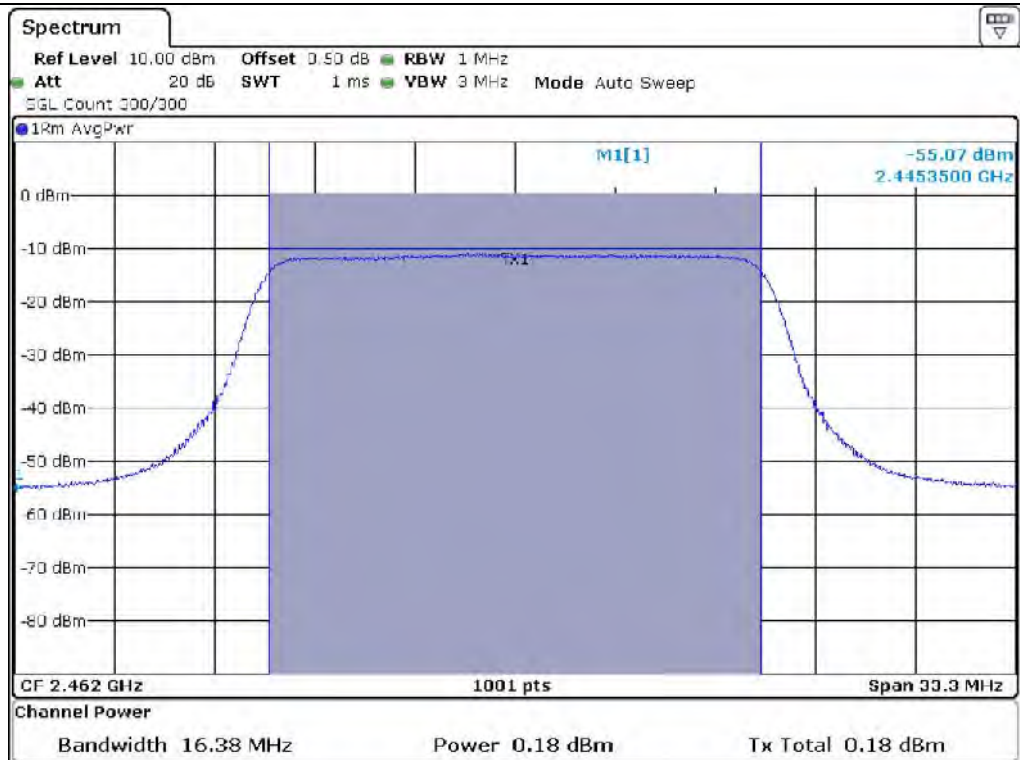

High Channel

8.6 Test data for 802.11n_HT20 WLAN Mode

-. Test Date : September 24, 2019 ~ October 15, 2019


-. Test Result : Pass


-. Duty Cycle : 84.77 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	Correction Factor (dB)	Result (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	0.23	0.72	0.95	30.00	29.05
MIDDLE	2 442.00	0.85	0.72	1.57	30.00	28.43
HIGH	2 462.00	0.05	0.72	0.77	30.00	29.23


Remark : Margin = Limit – Result (= Measured Vlaue + Correction Factor)

Tested by: Hyung-Kwon, Oh / Assistant Manager

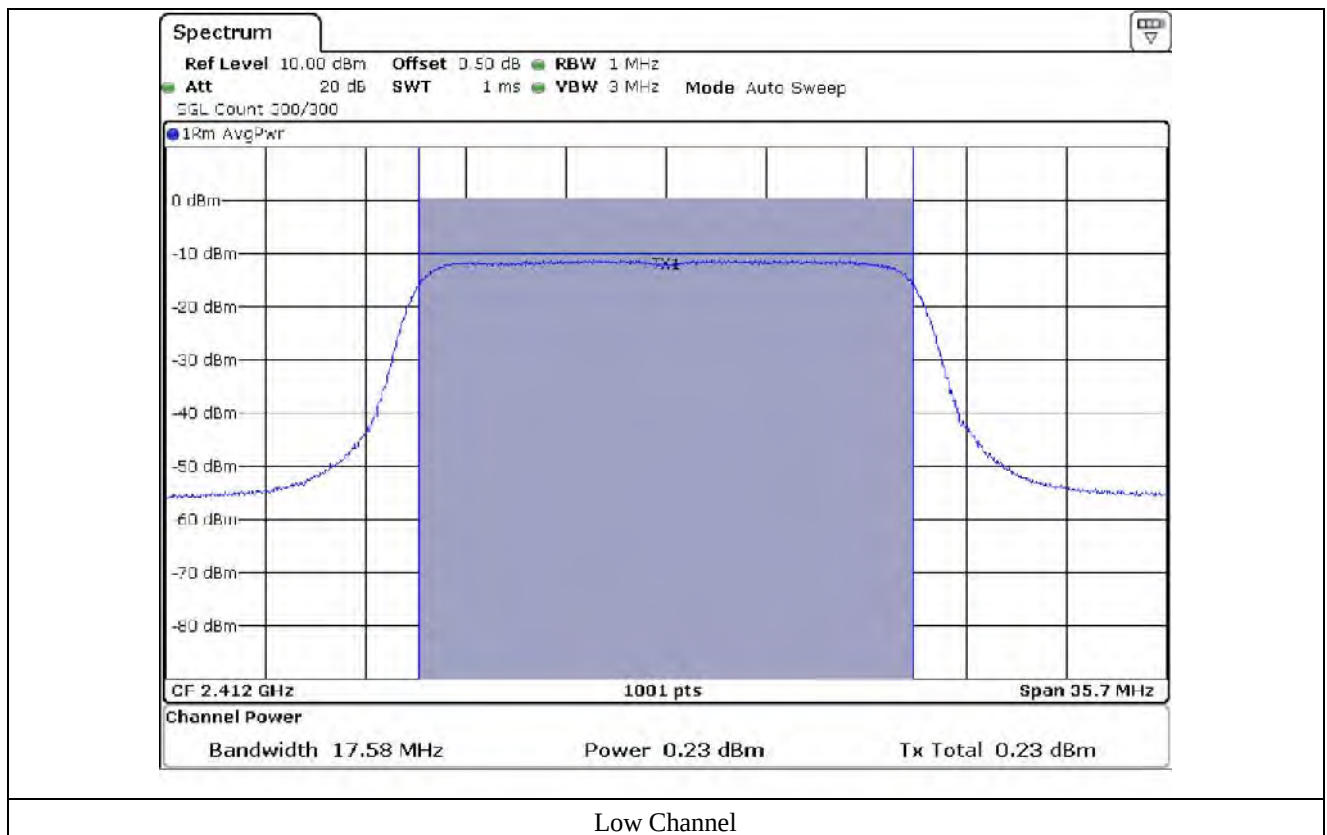

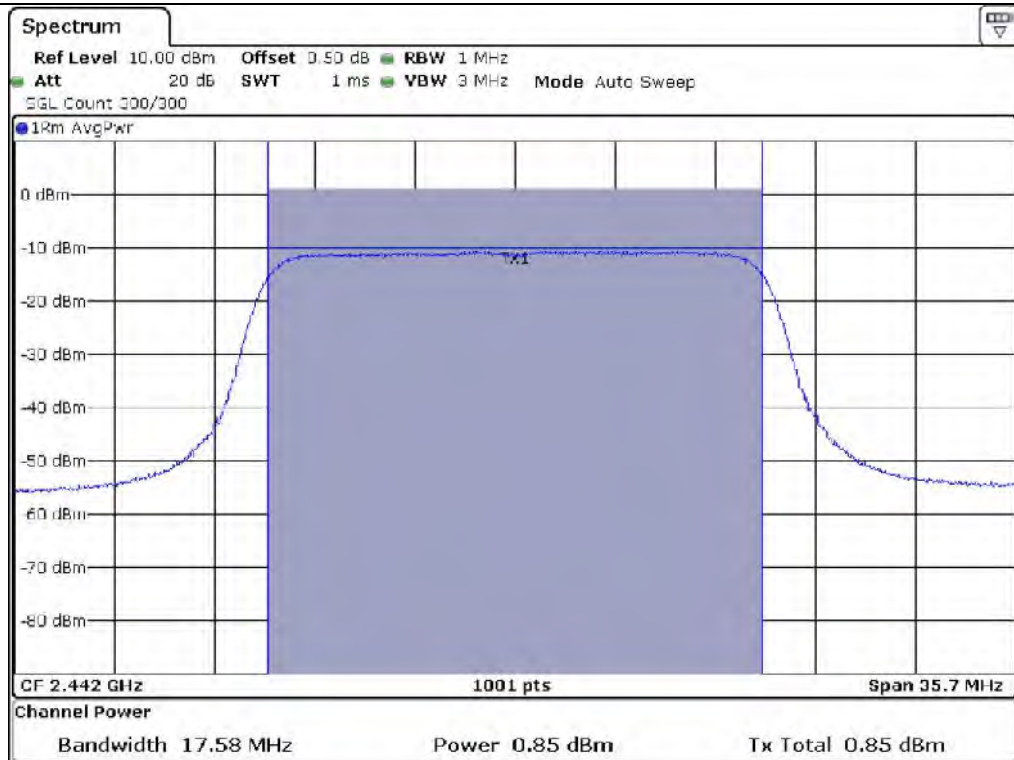

Middle Channel

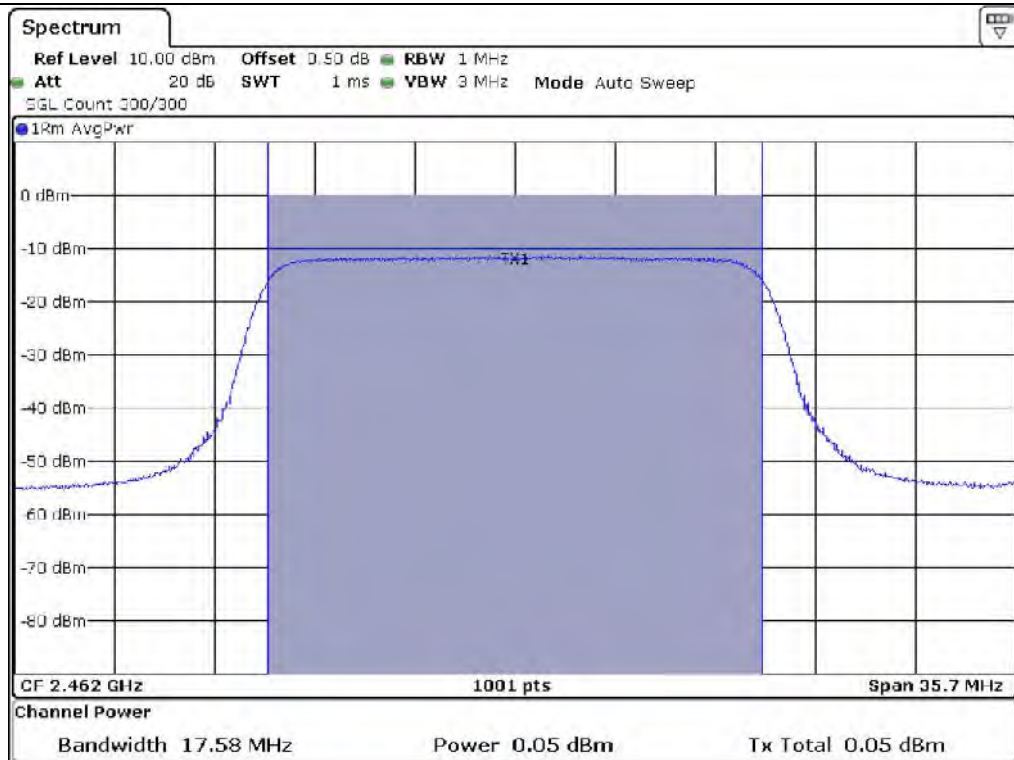

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

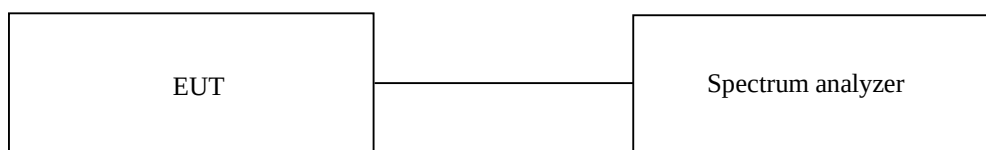

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


9.4 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)
■ -	ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 28, 2019 (1Y)
■ -	310N	Sonoma Instrument	Pre-Amplifier	312545	Mar. 18, 2019 (1Y)
■ -	BBV9718	Schwarzbeck	Amplifier	310	Mar. 28, 2019 (1Y)
■	SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Mar. 11, 2019 (1Y)
■ -	DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ -	MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ -	BBHA 9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 16, 2019 (1Y)
■ -	BBHA 9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jan. 16, 2019 (1Y)


All test equipment used is calibrated on a regular basis.

9.5 Test data for conducted emission


9.5.1 Test data for 802.11b WLAN Mode

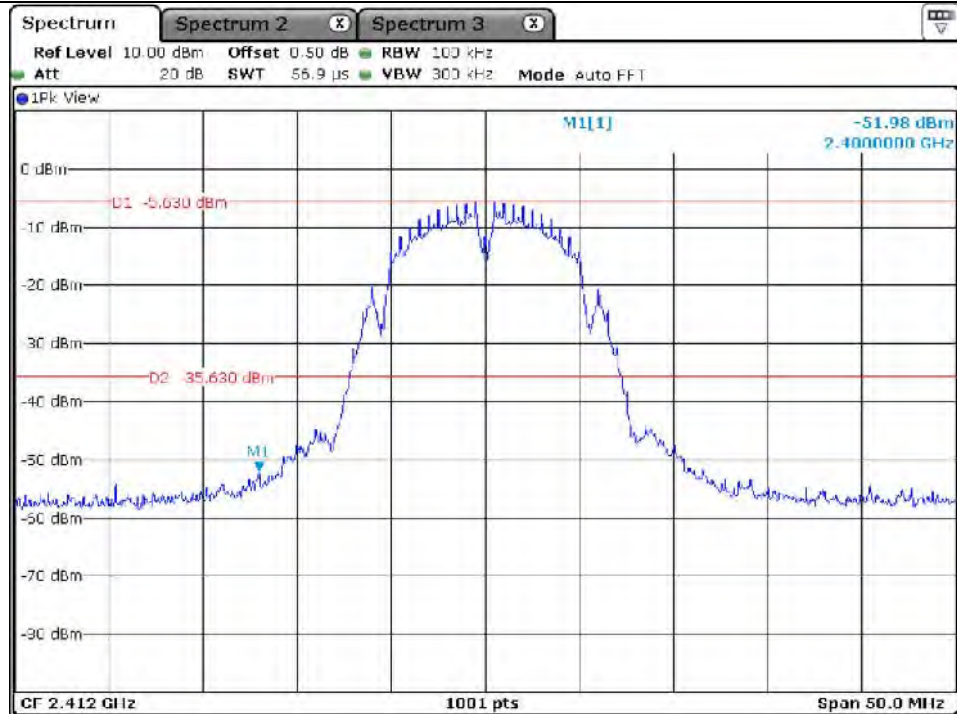


Low Channel

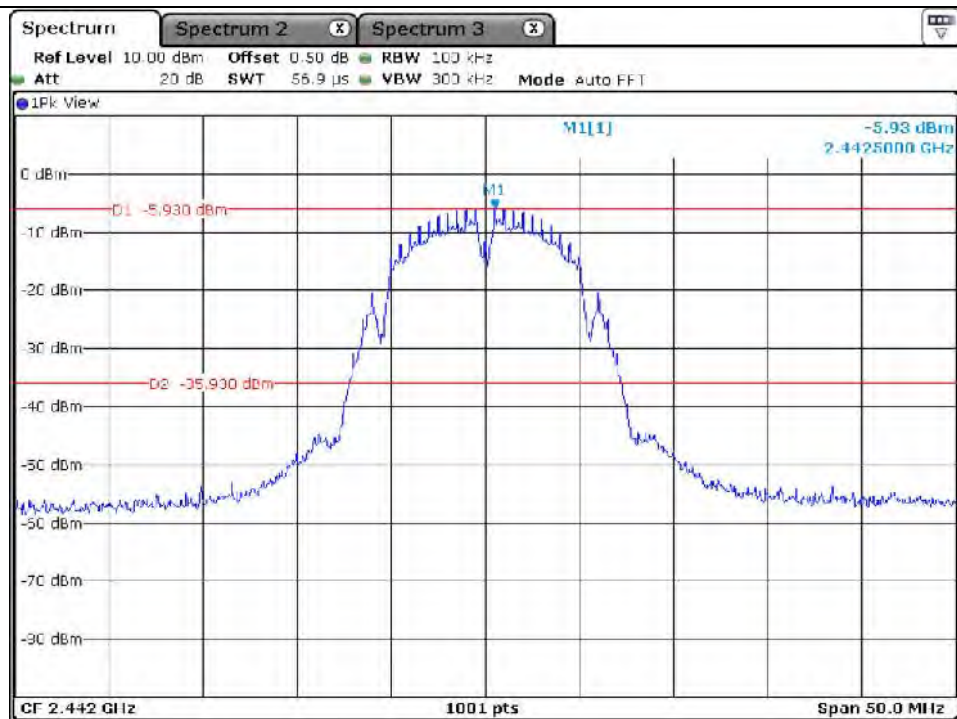


Middle Channel

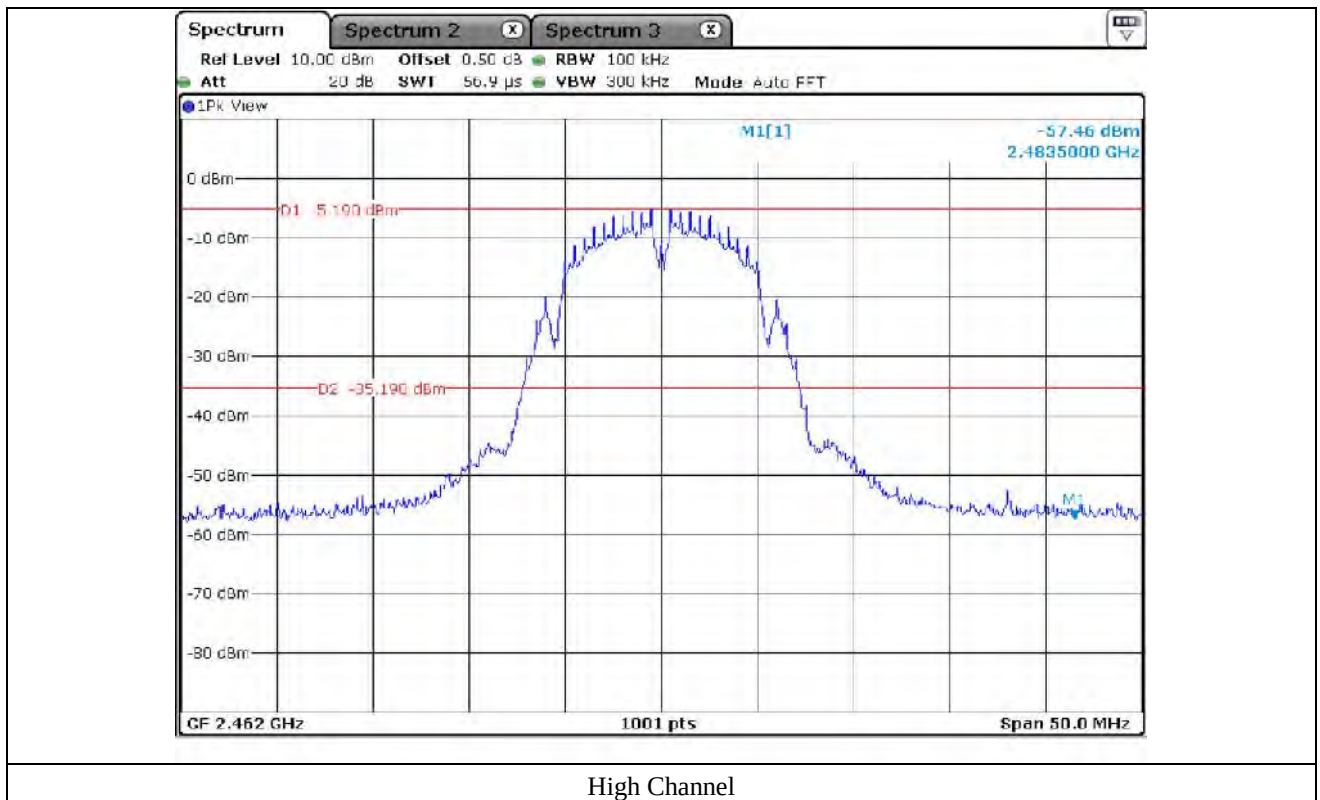


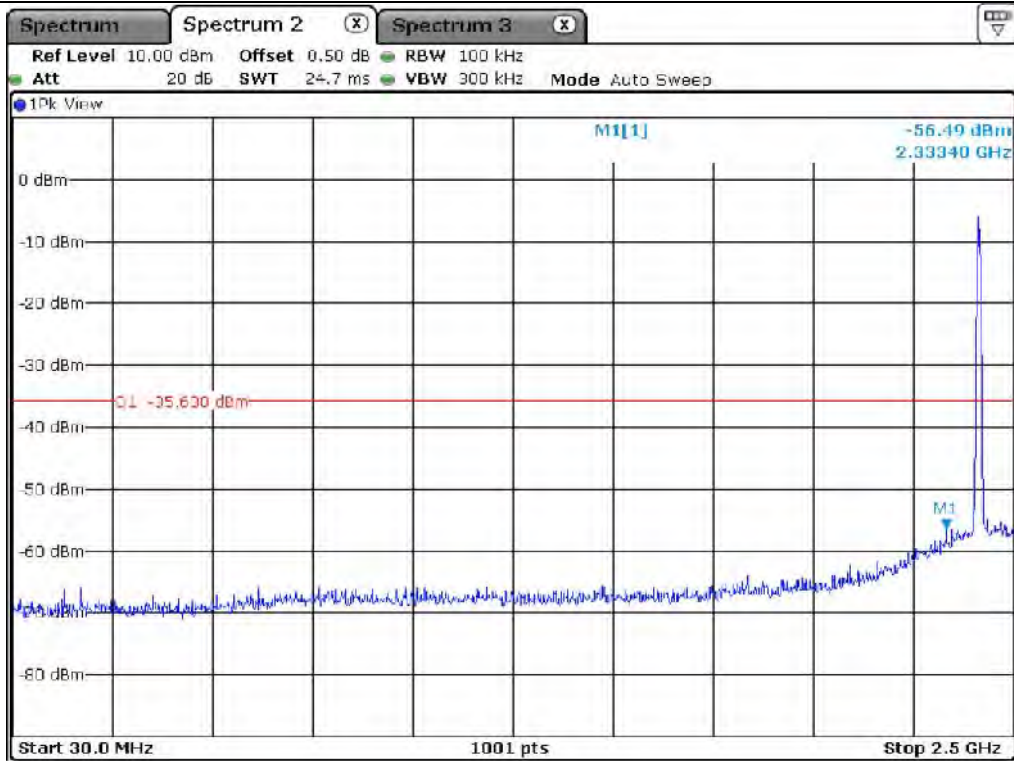


Low Channel

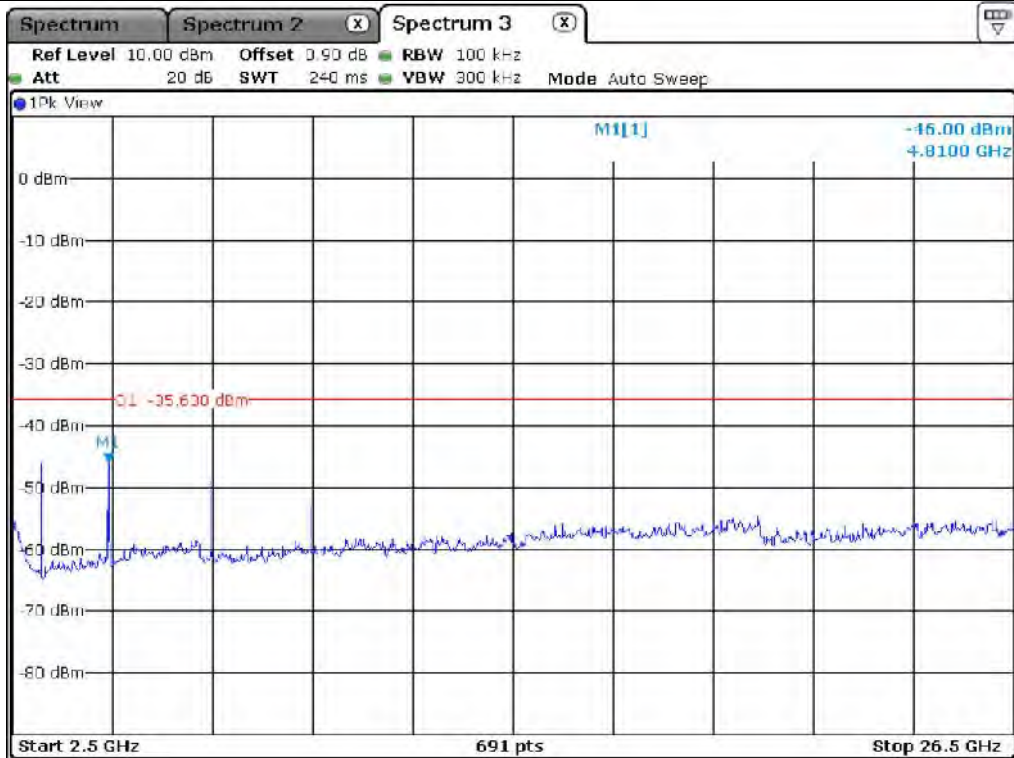


Low Channel

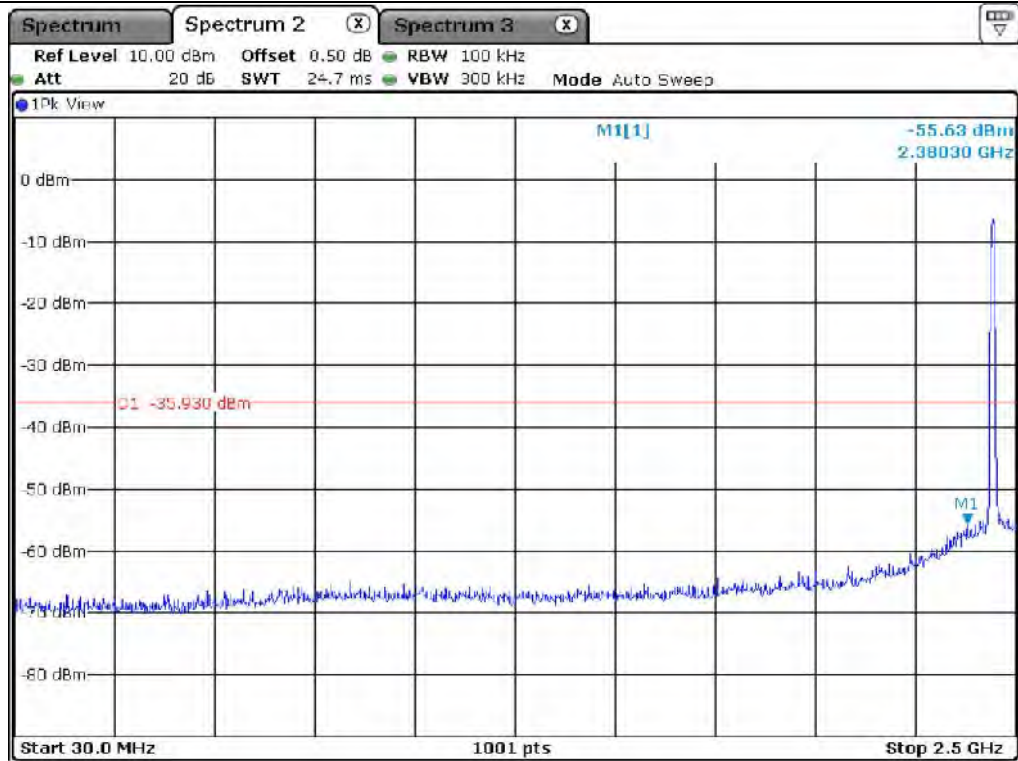


Middle Channel

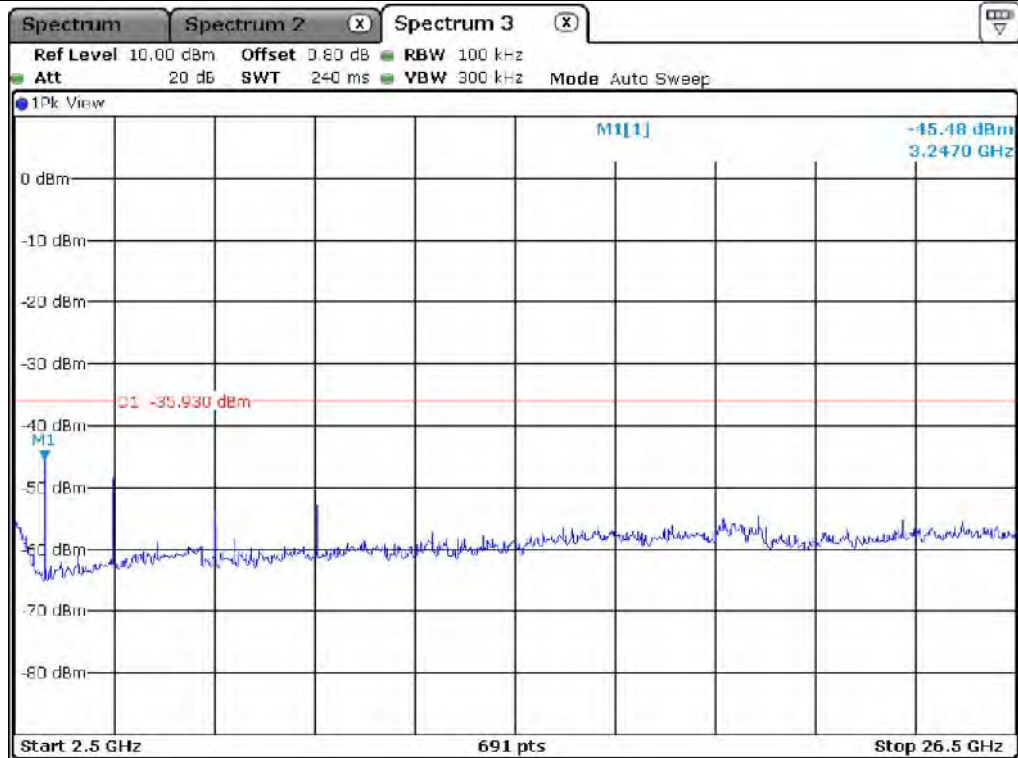

Middle Channel

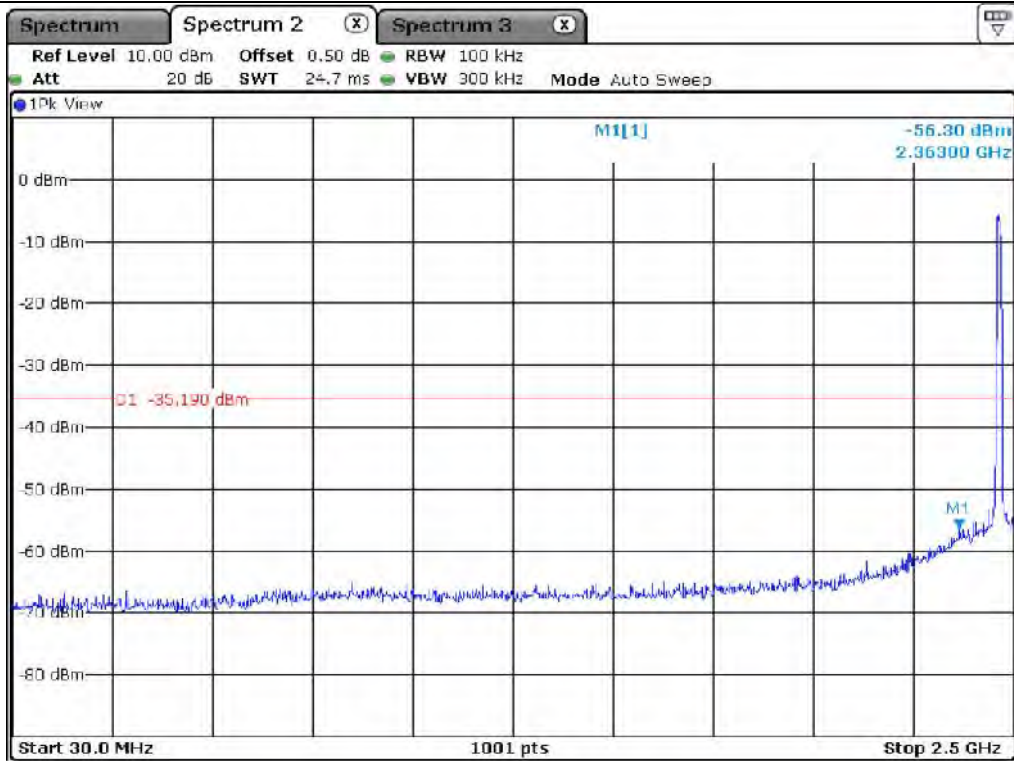


High Channel

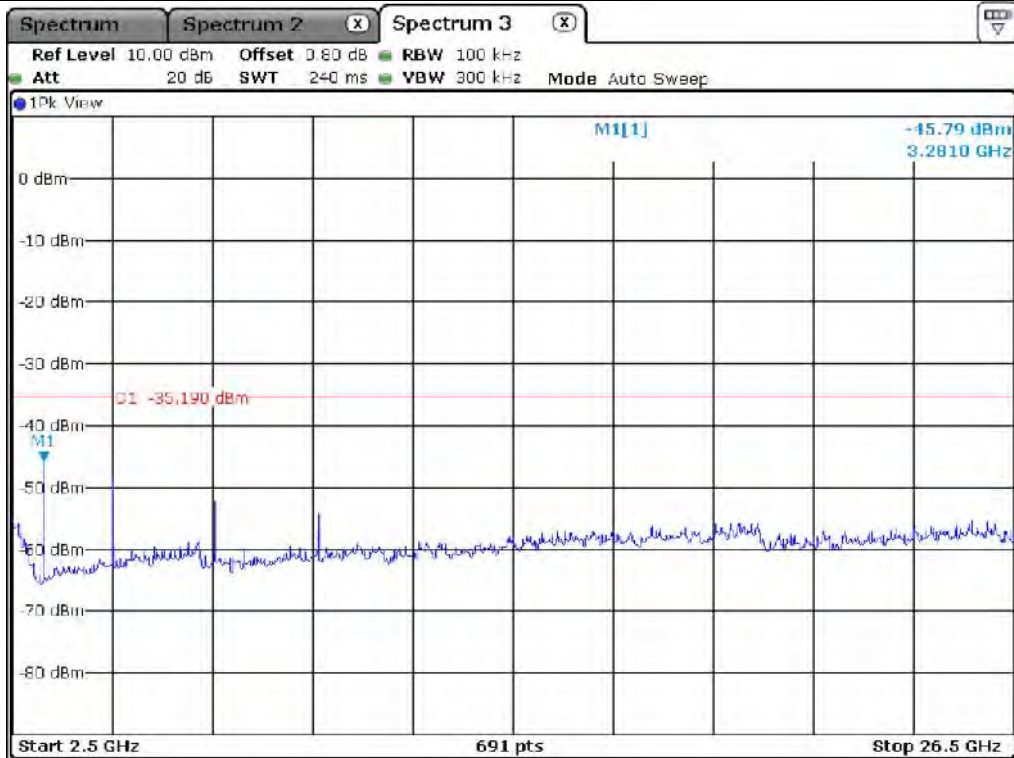


High Channel


9.5.2 Test data for 802.11g WLAN Mode

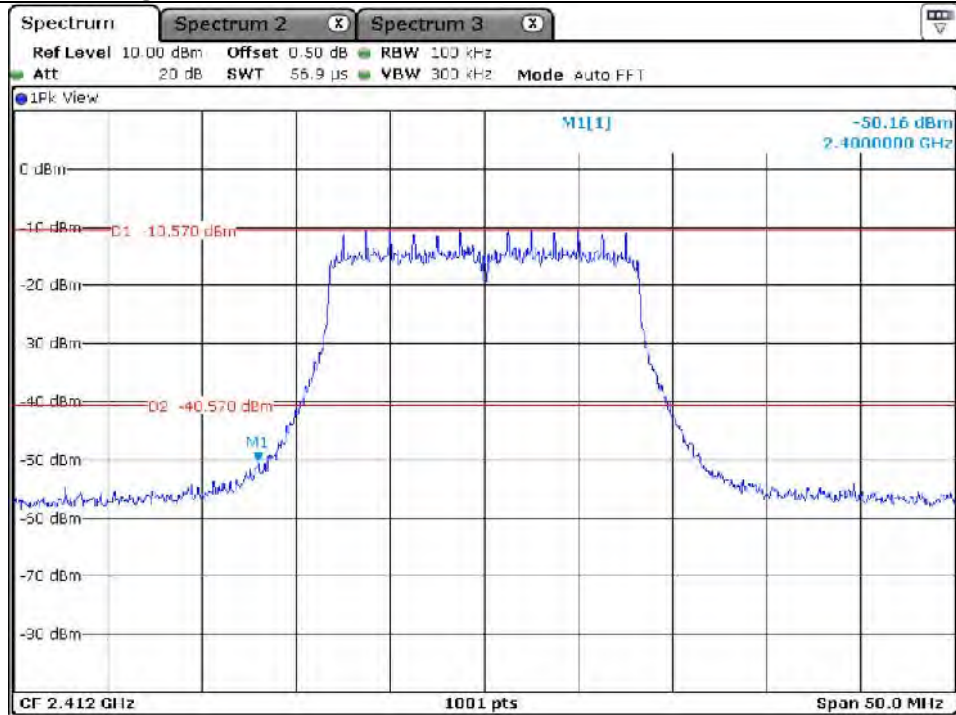


Low Channel

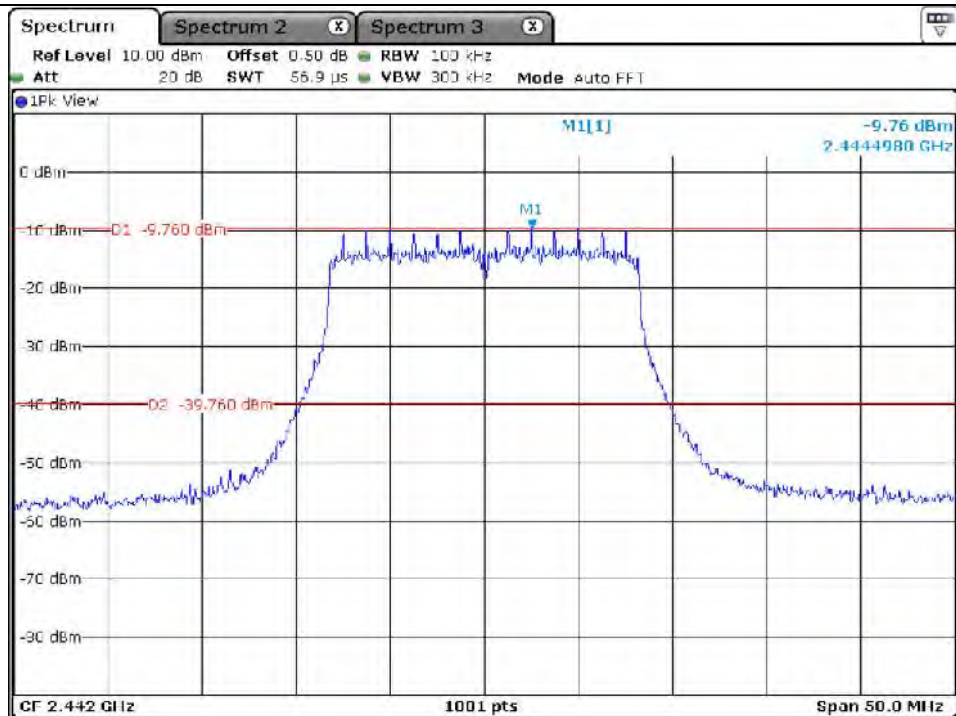


Middle Channel

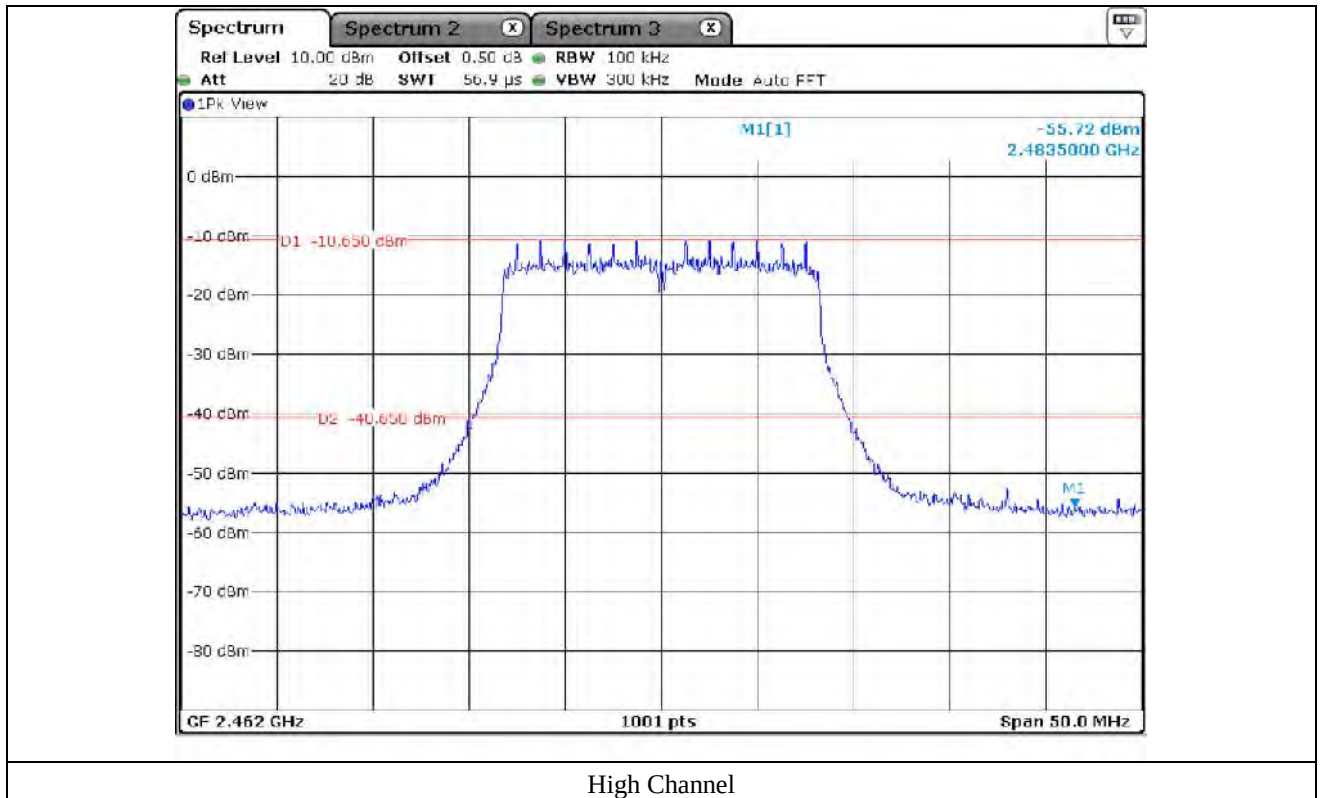


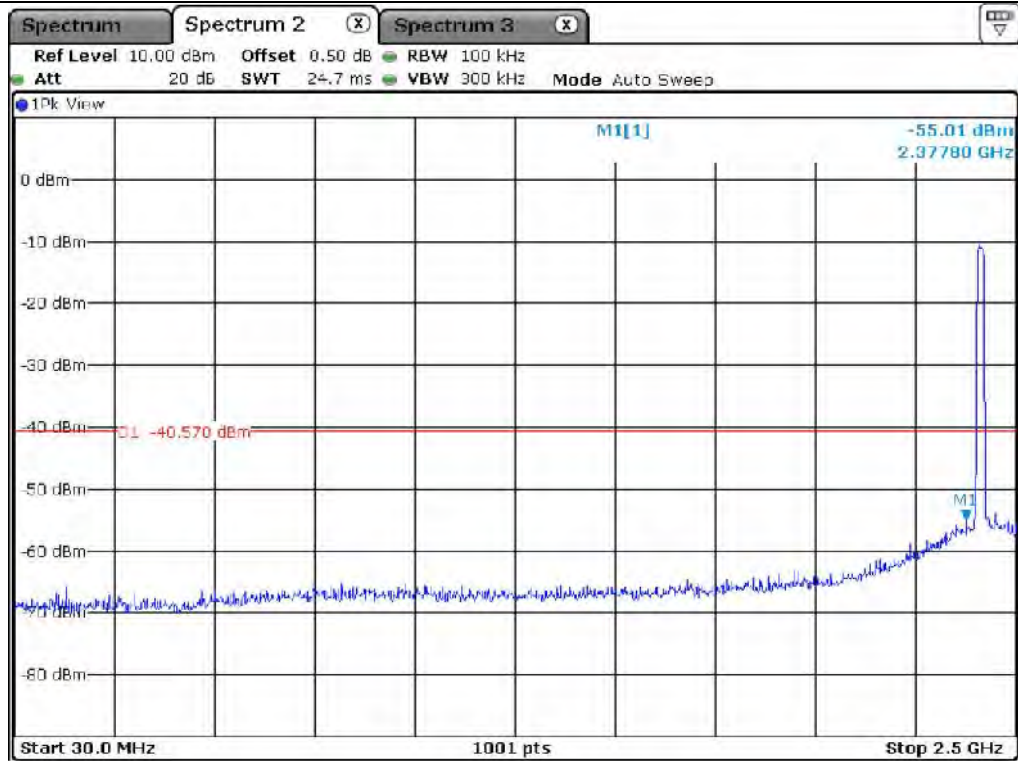


Low Channel

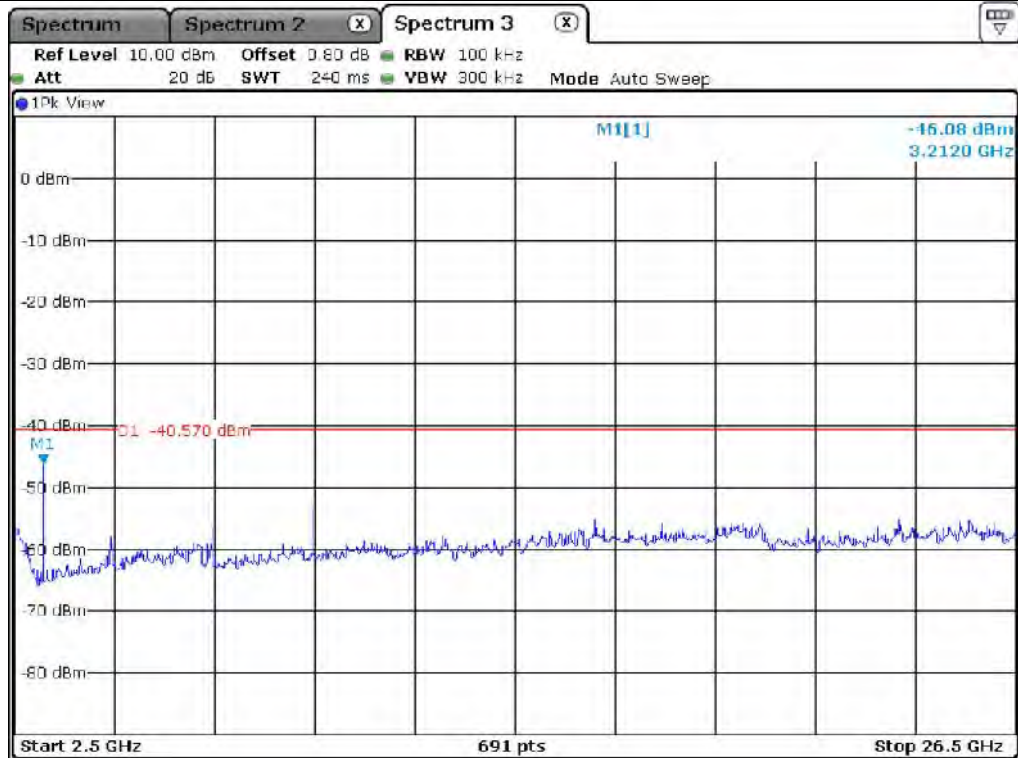


Low Channel

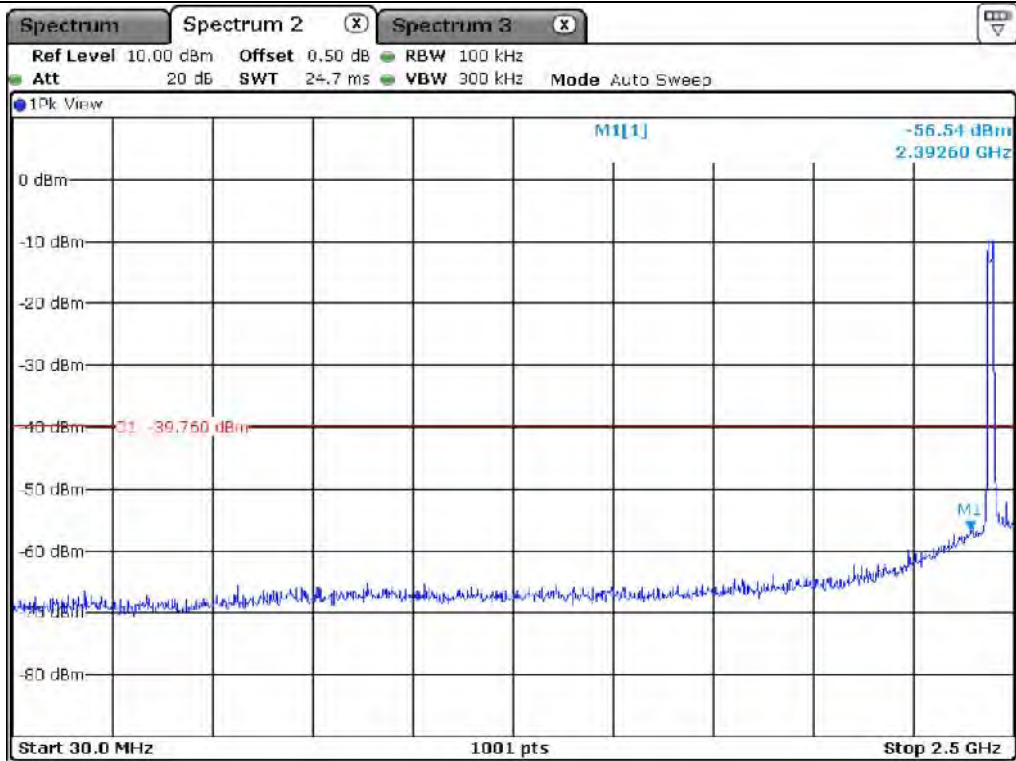


Middle Channel

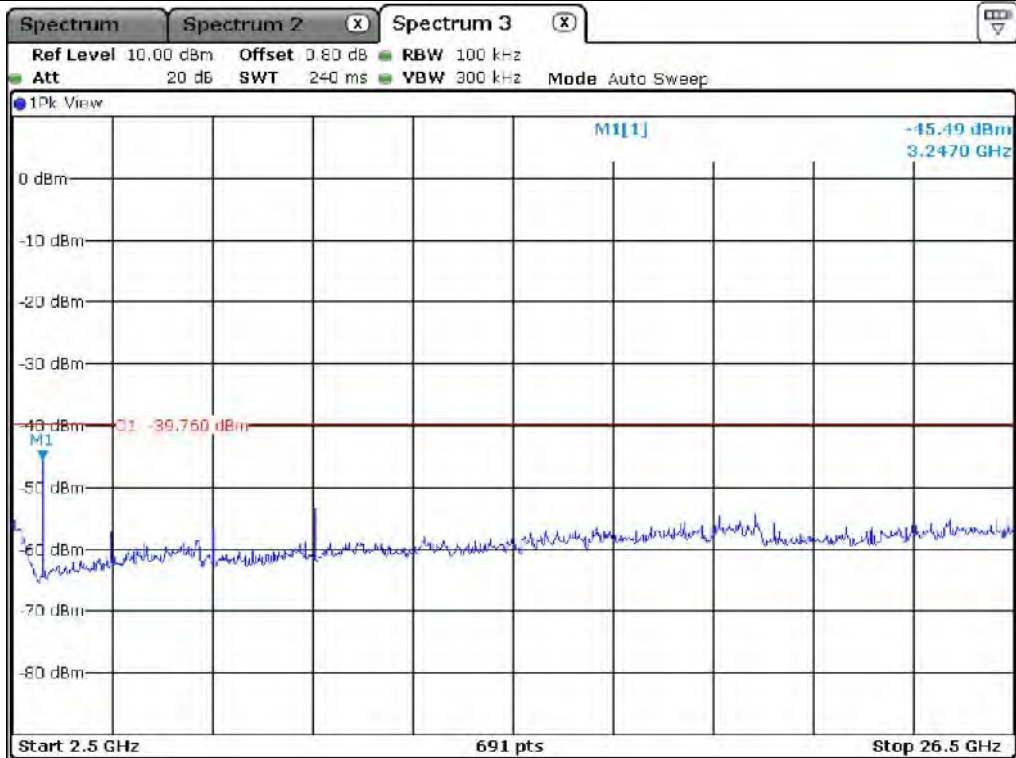

Middle Channel

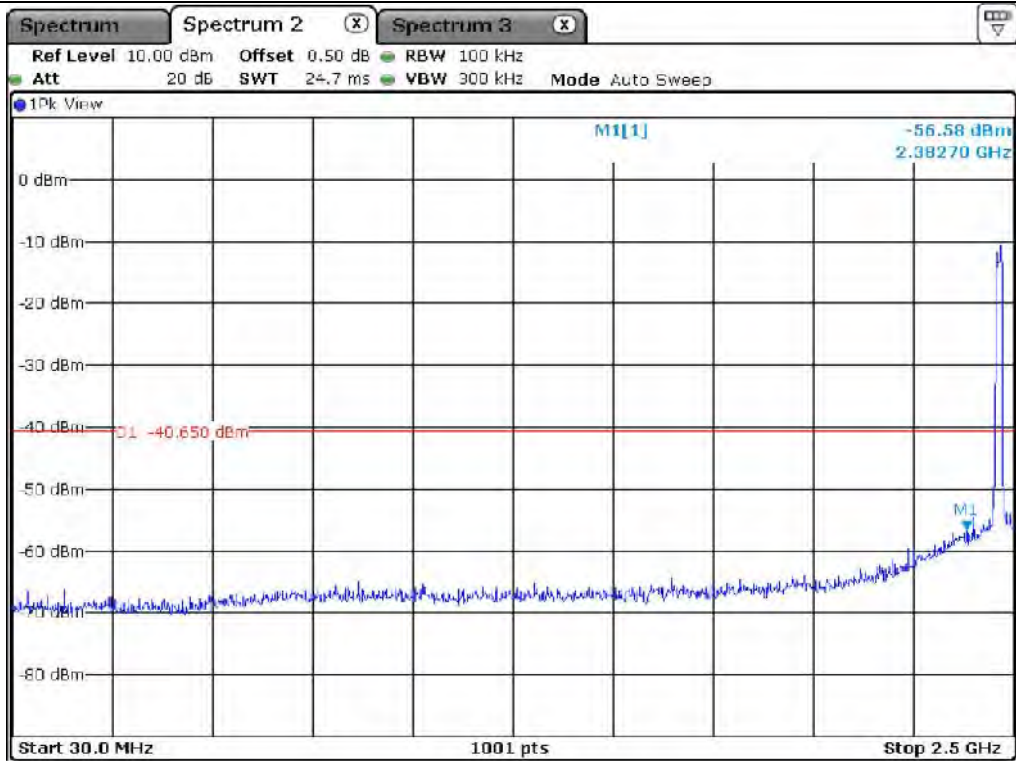


High Channel

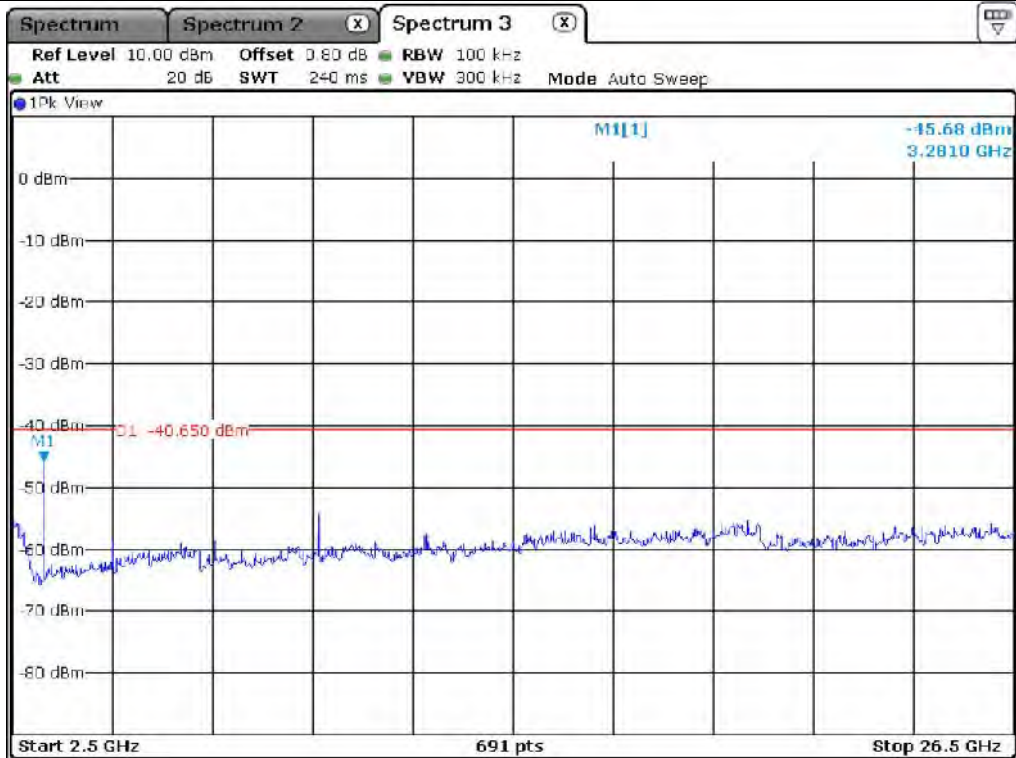


High Channel


9.5.3 Test data for 802.11n_HT20 WLAN Mode

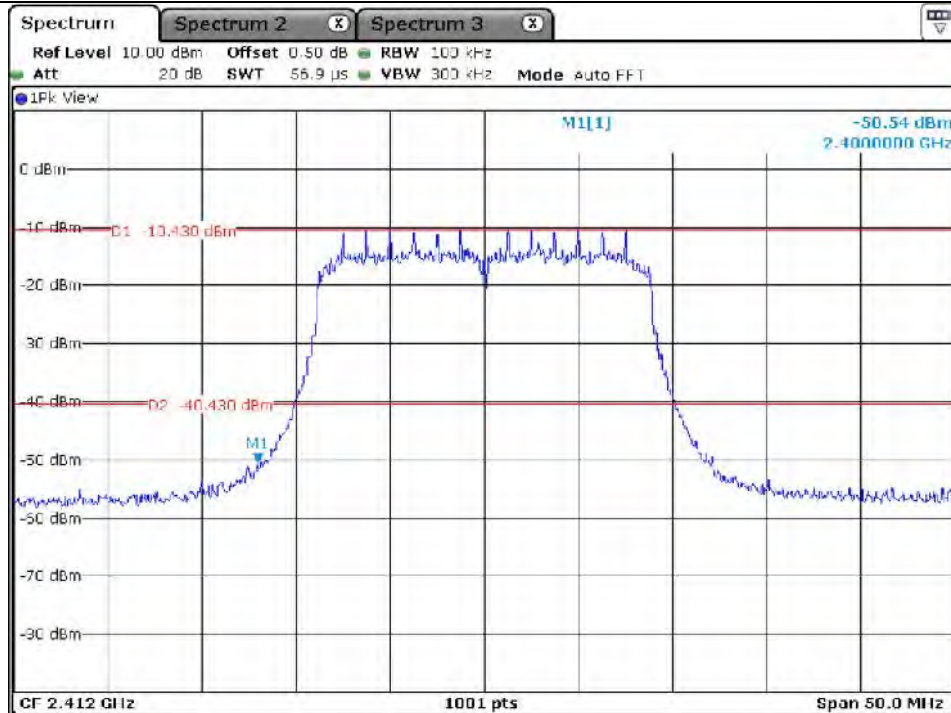


Low Channel

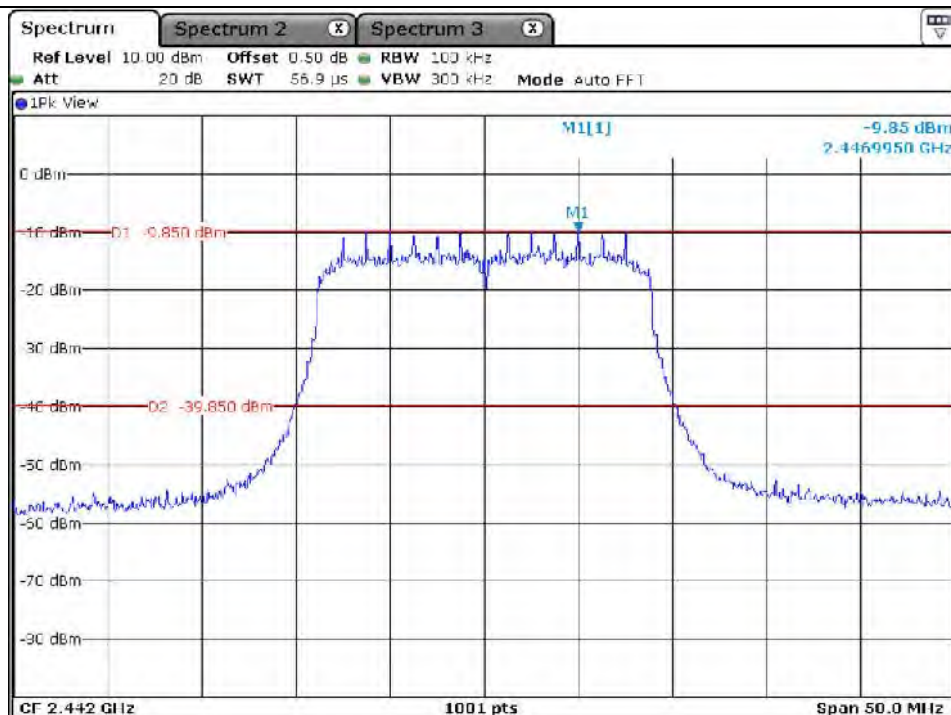


Middle Channel

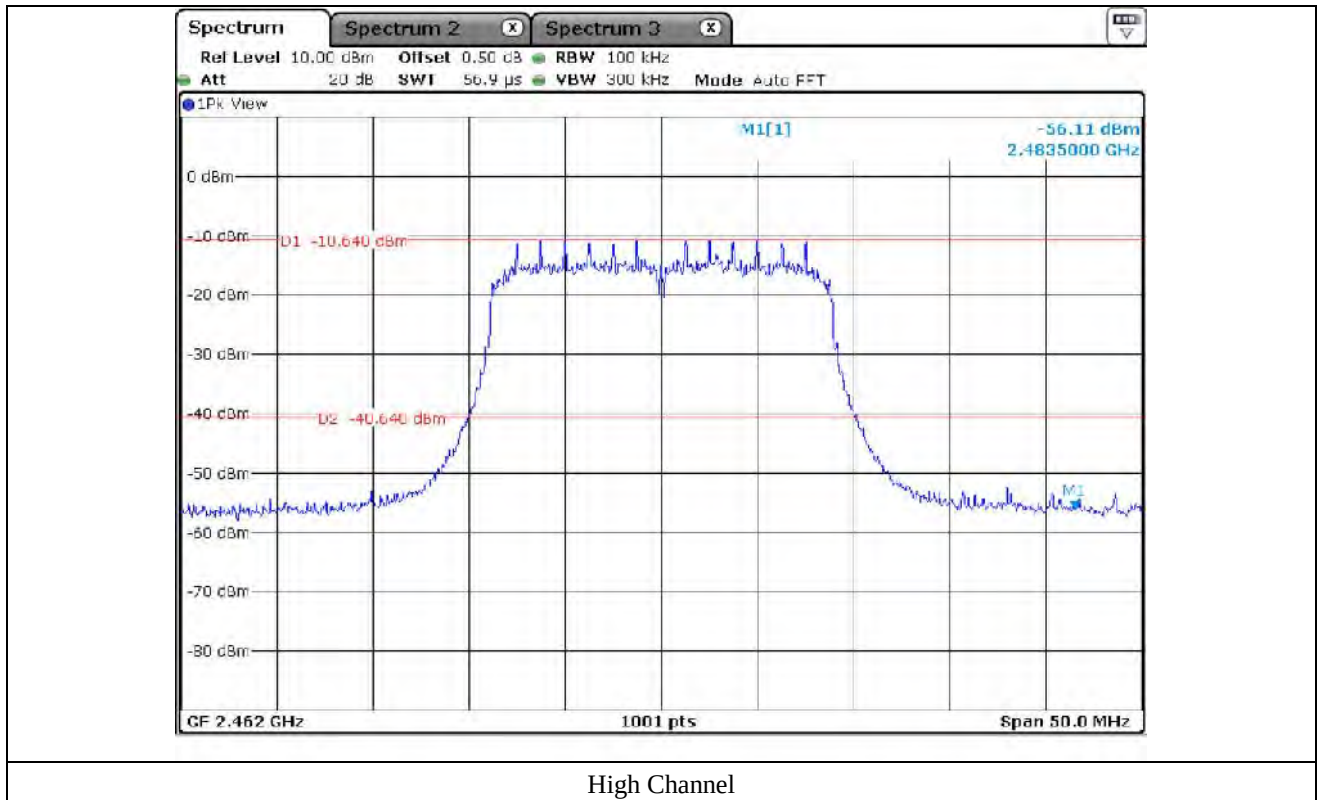


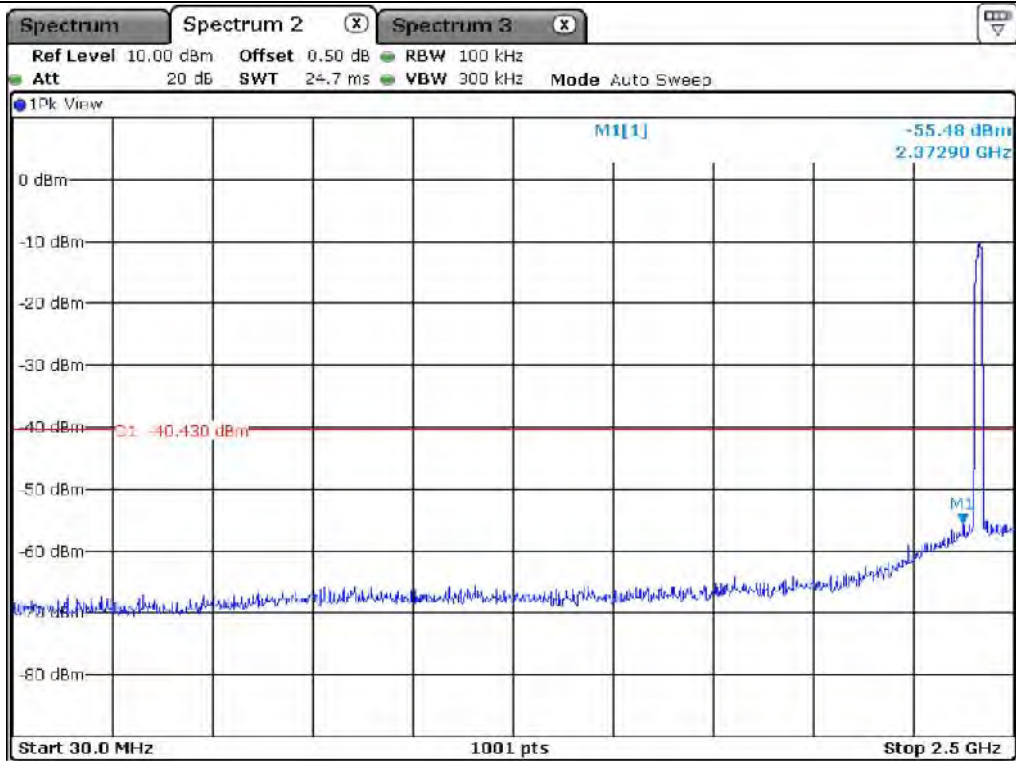


Low Channel

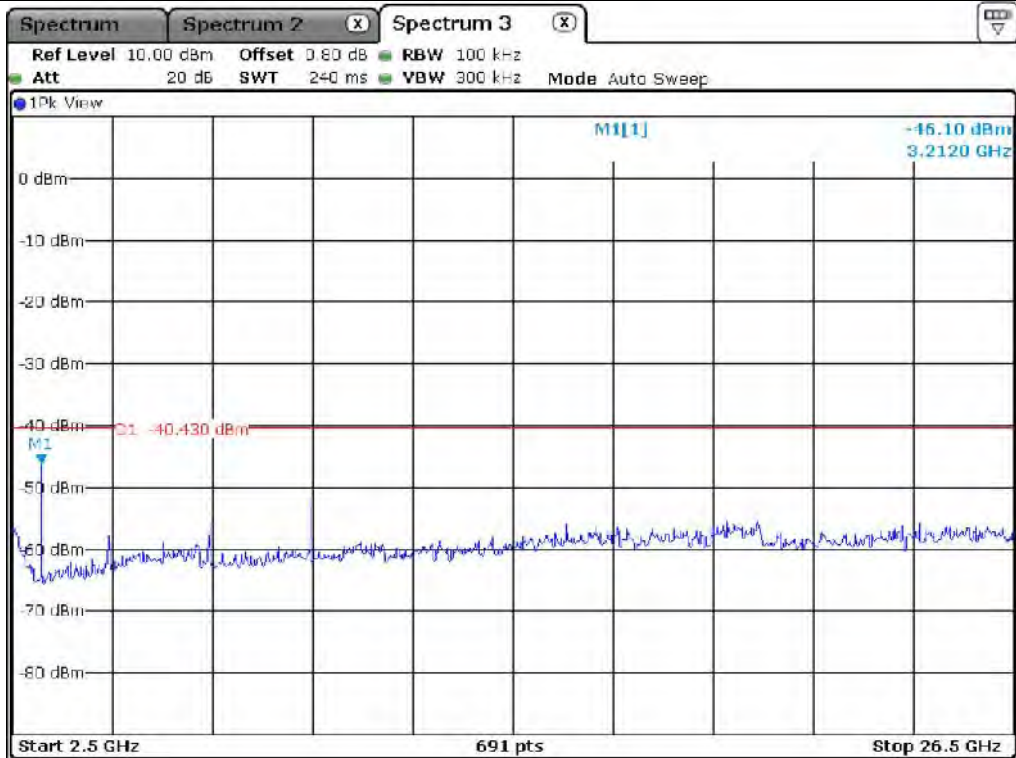


Low Channel

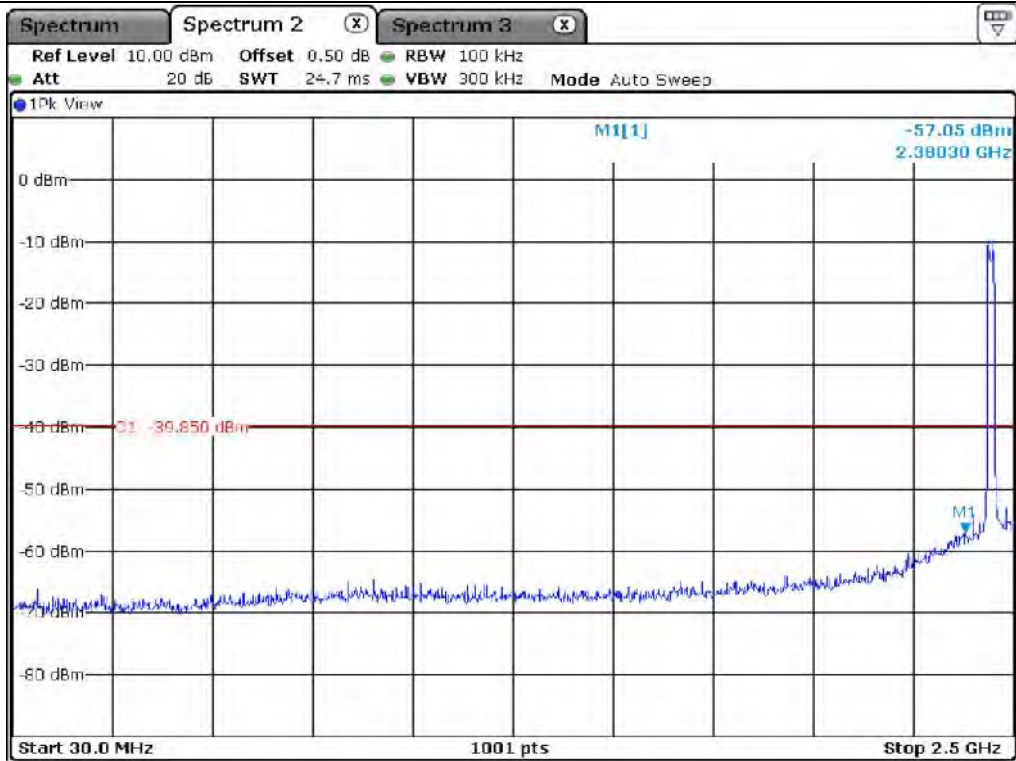


Middle Channel

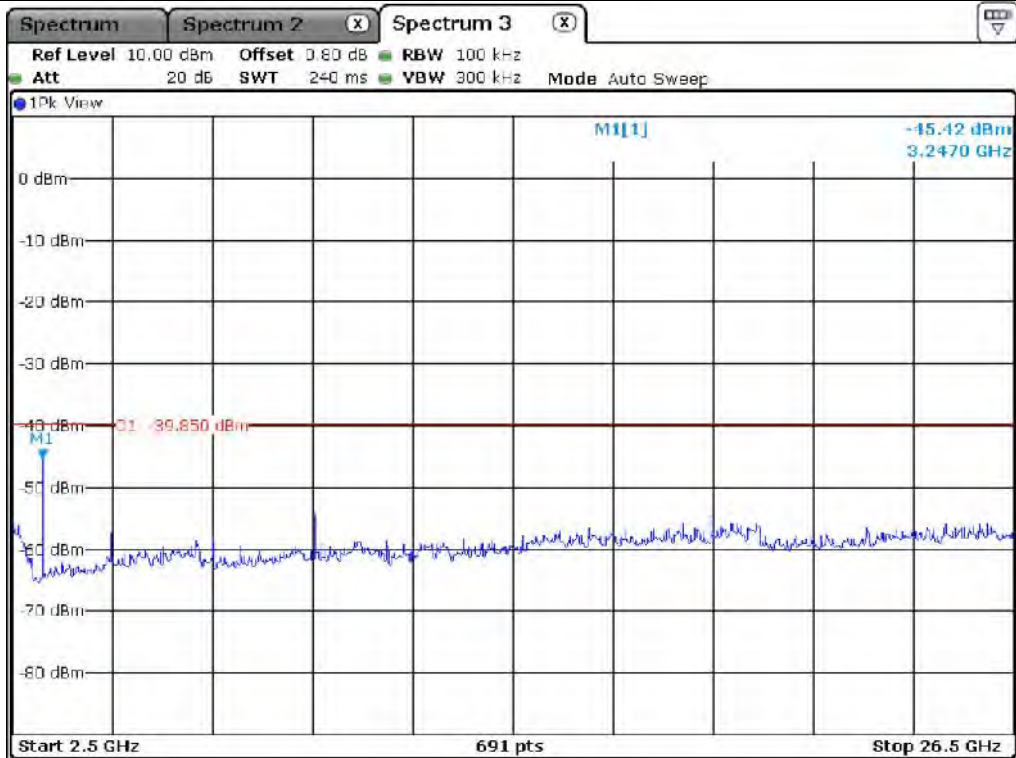

Middle Channel

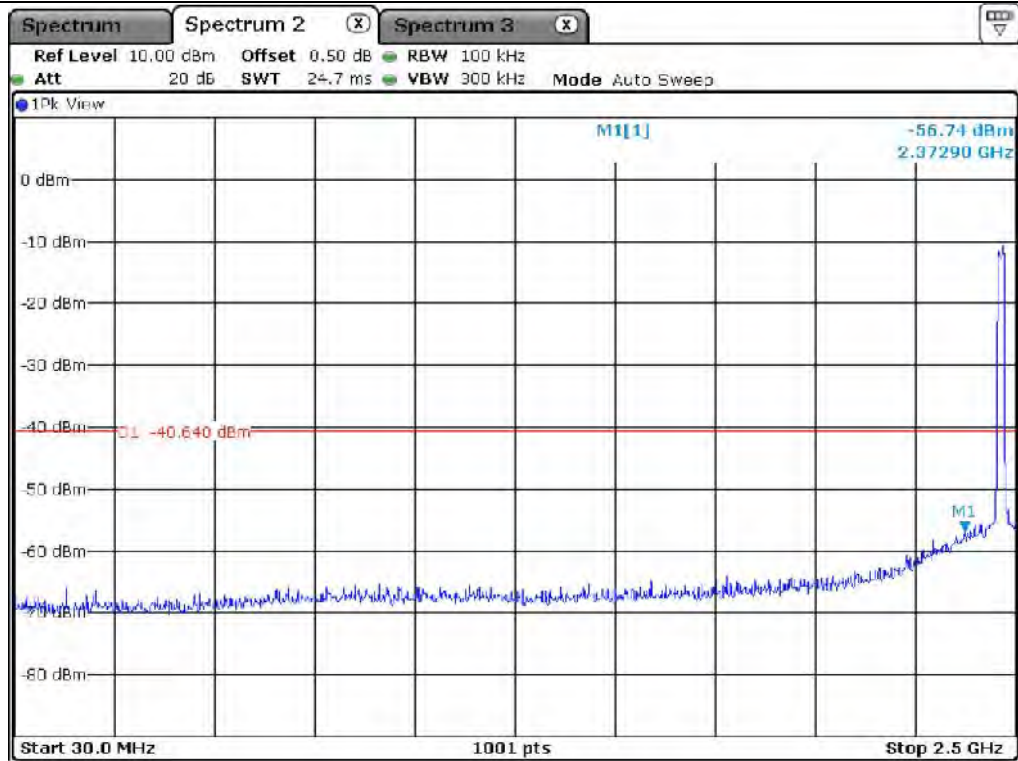

High Channel

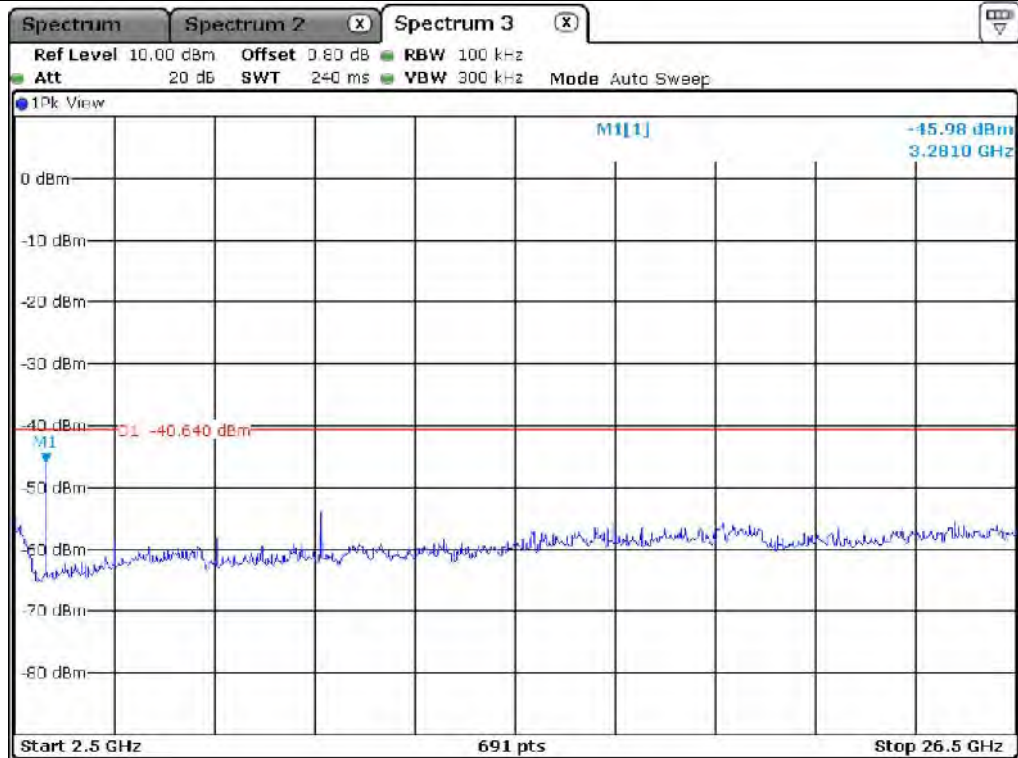

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

9.6.1.1 Test data for 802.11b WLAN Mode

- . Test Date : September 24, 2019 ~ October 15, 2019
- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 88.98 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 365.984	17.38	Peak	H	26.94	9.20	53.52	74.00	20.48	53.52
2 366.144	6.75	Average	H			43.41	54.00	10.59	43.41
2 358.392	17.87	Peak	V			54.01	74.00	19.99	54.01
2 388.202	7.76	Average	V			44.42	54.00	9.58	44.42
Test Data for Low Channel Edge									
2 387.754	17.78	Peak	H	26.94	9.20	-	53.92	74.00	20.08
2 387.335	5.77	Average	H			0.52	42.43	54.00	11.57
2 389.942	17.98	Peak	V			-	54.12	74.00	19.88
2 389.168	6.96	Average	V			0.52	43.62	54.00	10.38

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for High Channel Edge									
2 483.502	17.21	Peak	H	27.47	9.49	-	54.17	74.00	19.83
2 487.813	5.77	Average	H			0.52	43.25	54.00	10.75
2 488.122	17.79	Peak	V			-	54.75	74.00	19.25
2 483.502	7.10	Average	V			0.52	44.58	54.00	9.42
Test Data for High Channel									
2 484.069	17.86	Peak	H	27.49	9.49	-	54.82	74.00	19.18
2 489.426	6.16	Average	H			0.52	43.64	54.00	10.36
2 498.574	19.36	Peak	V			-	56.32	74.00	17.68
2 497.882	8.05	Average	V			0.52	45.53	54.00	8.47


Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical


Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor



Tested by: Hyung-Kwon, Oh / Assistant Manager

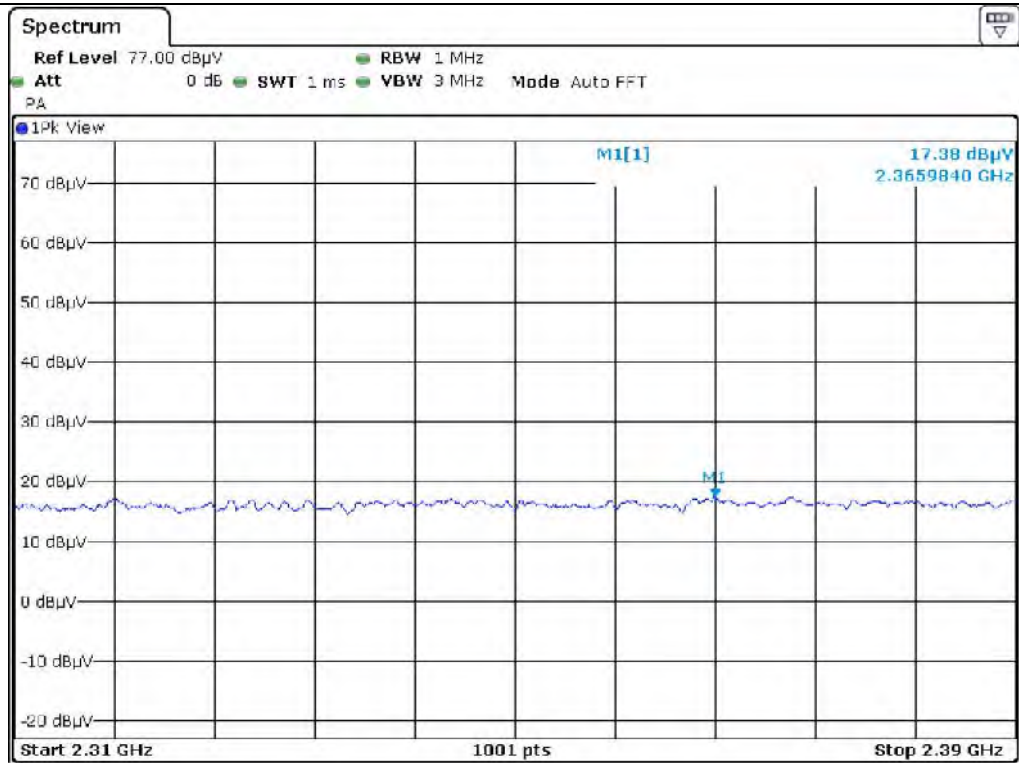


Low Channel_Peak_H

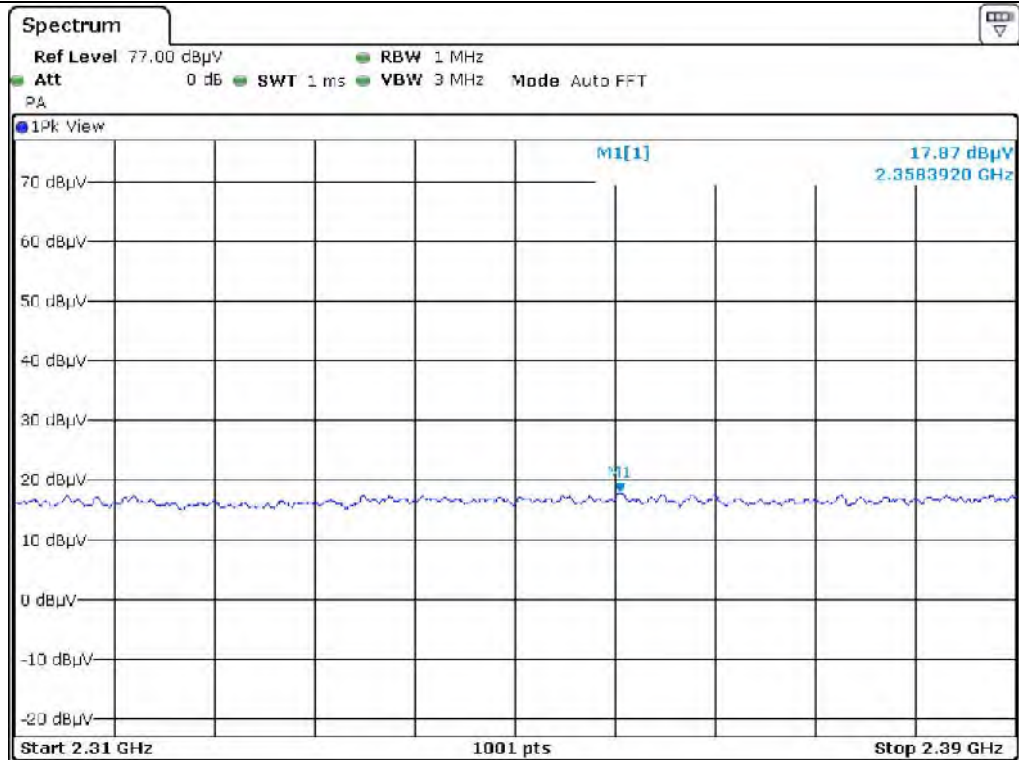


Low Channel_Peak_V

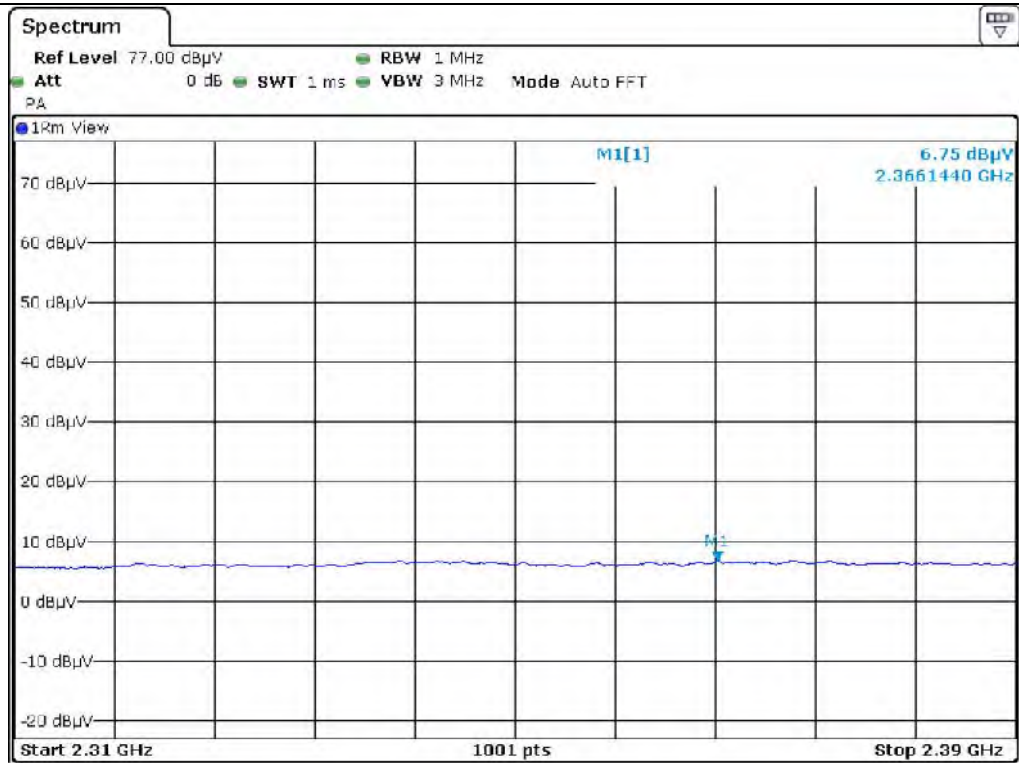


Low Channel_ Average_H

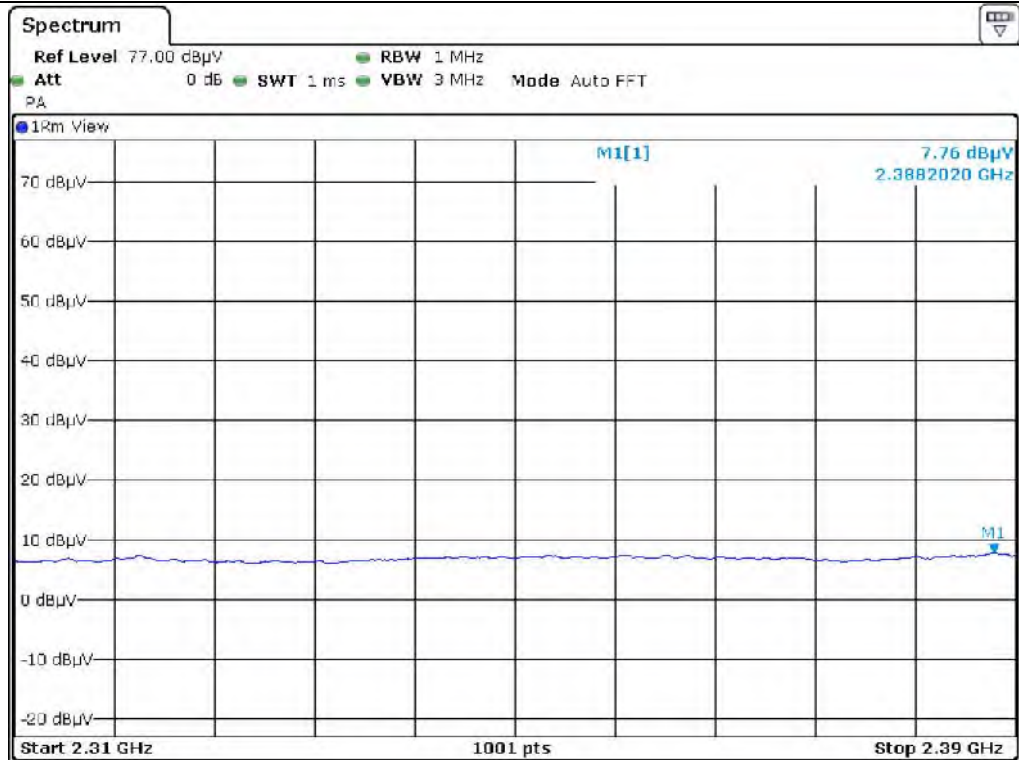


Low Channel_ Average_V

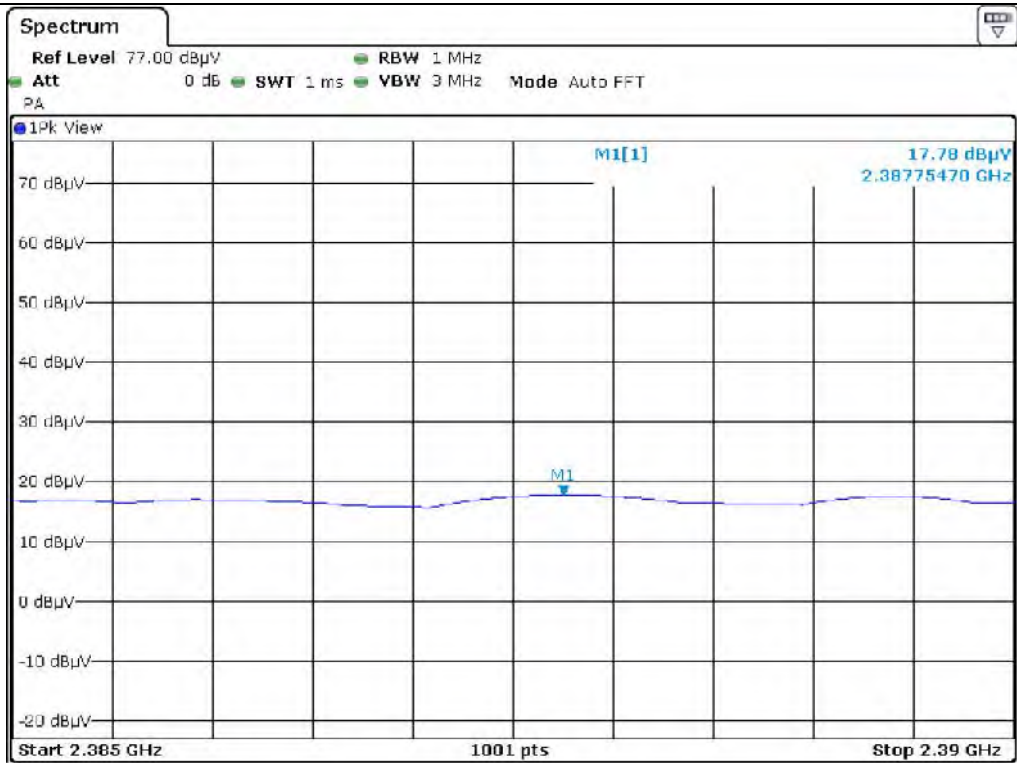


Low Channel Edge_Peak_H

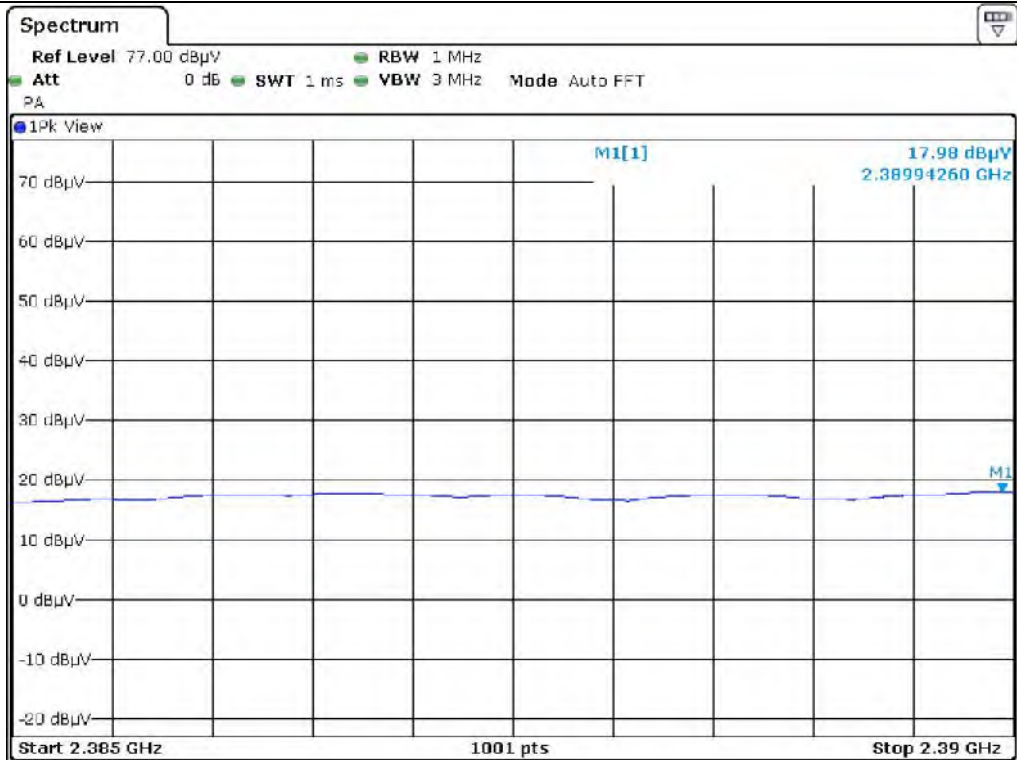


Low Channel Edge_Peak_V

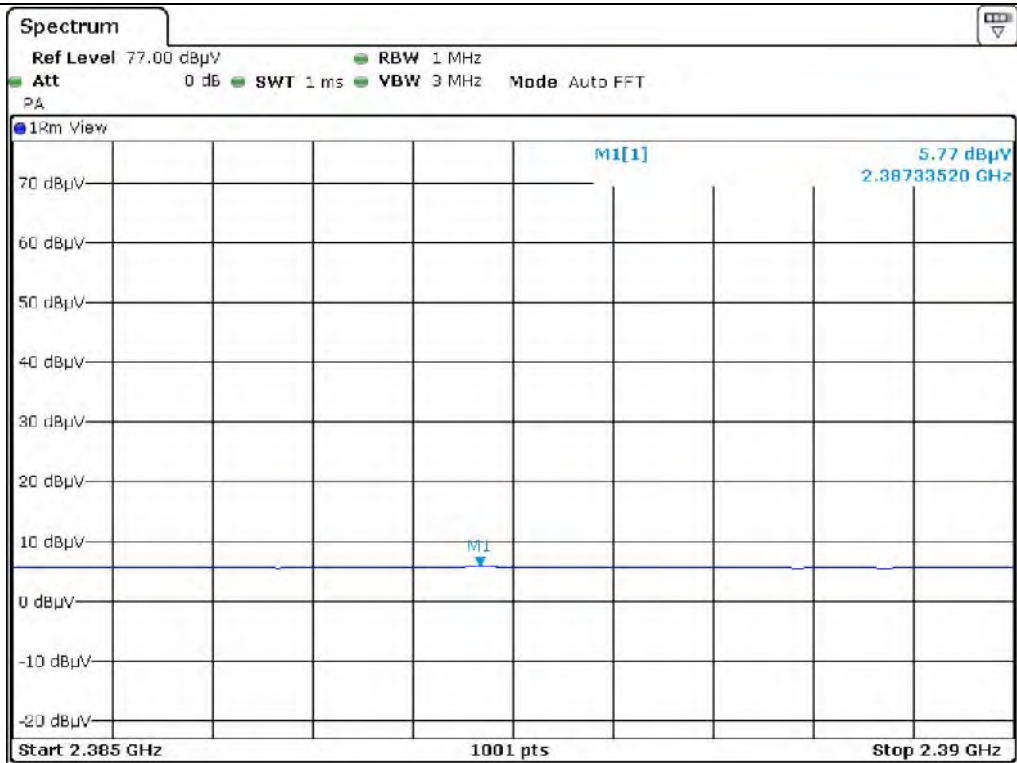


Low Channel Edge_Average_H

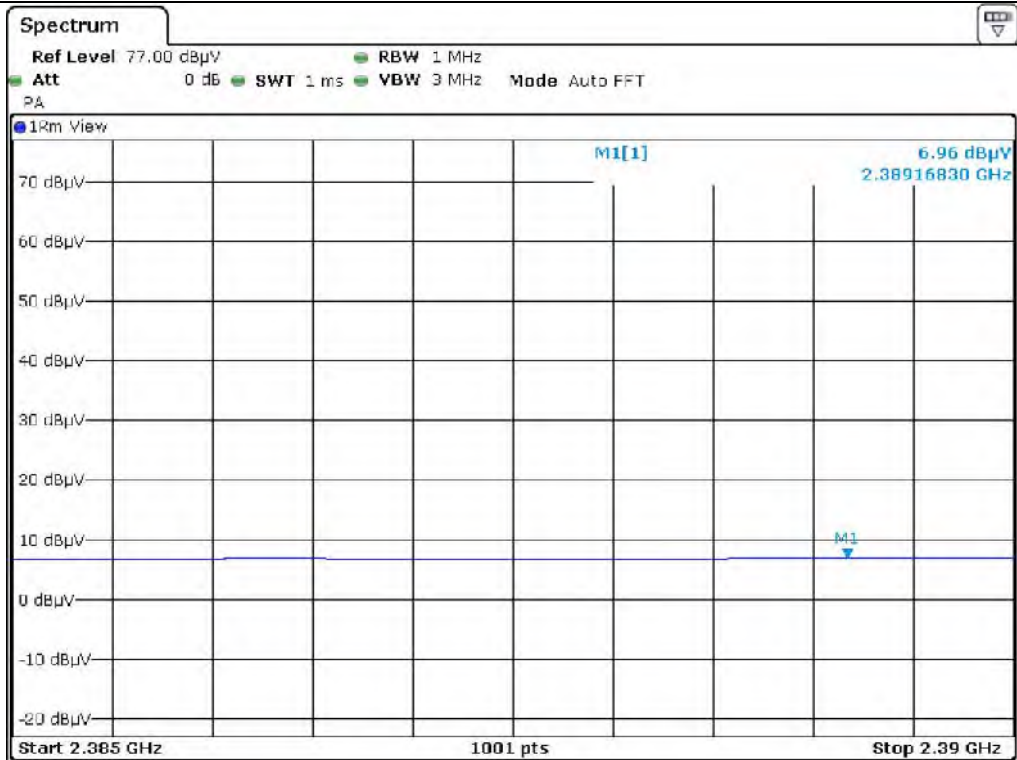


Low Channel Edge_Average_V

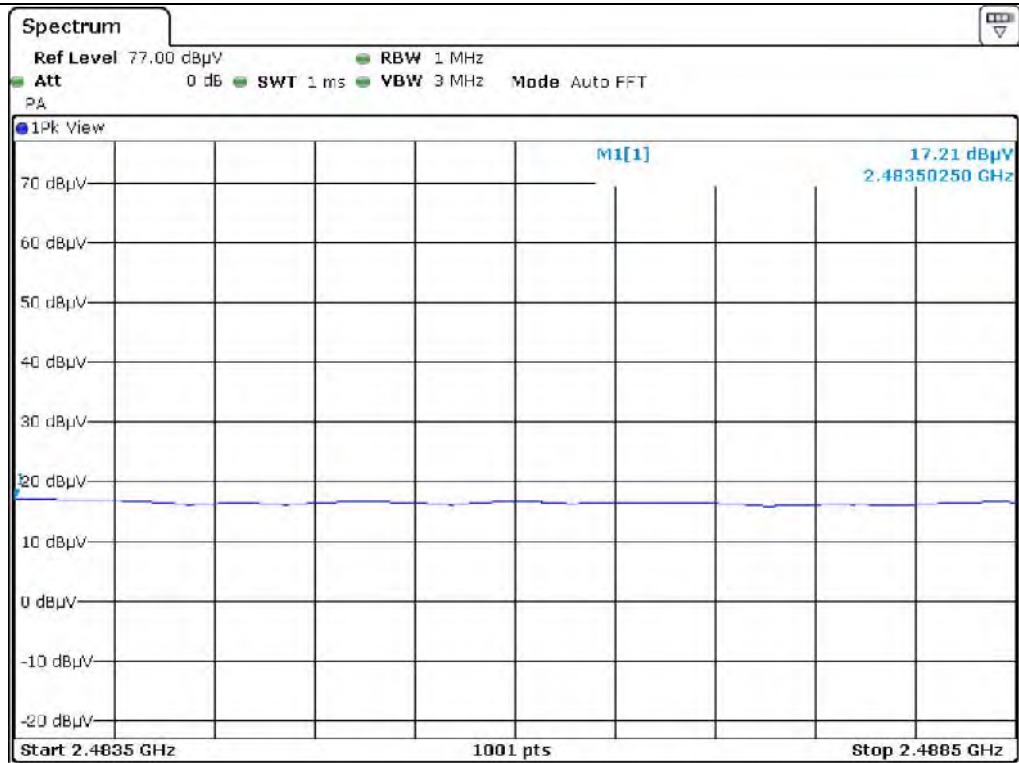


High Channel Edge_Peak_H

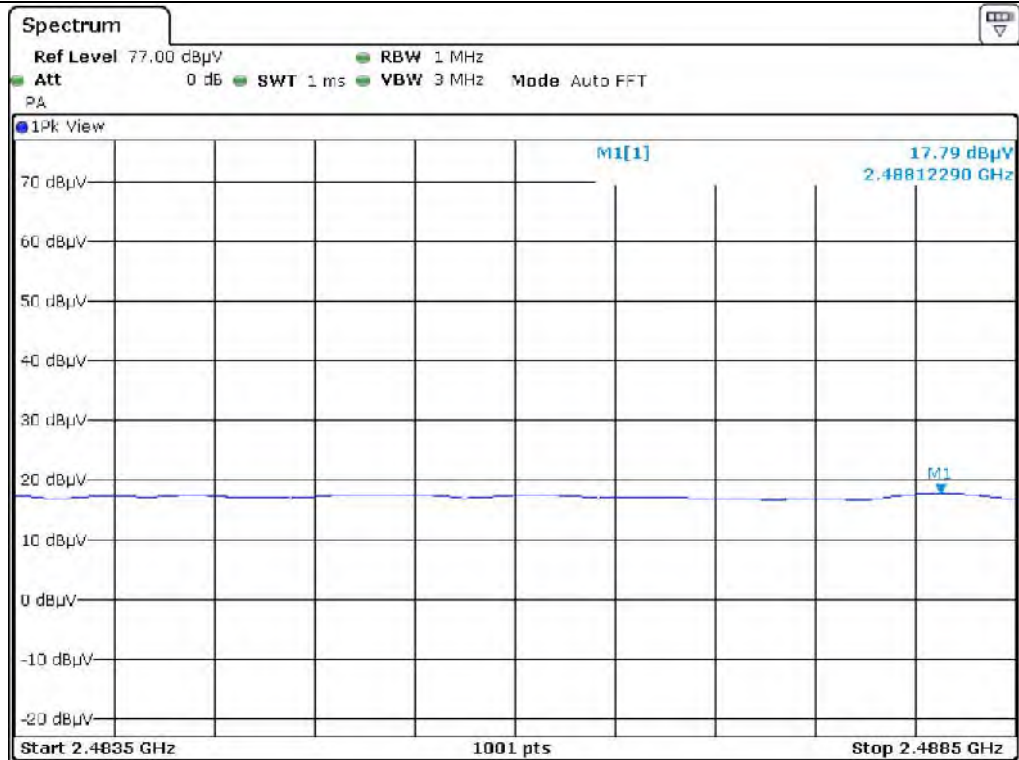


High Channel Edge_Peak_V

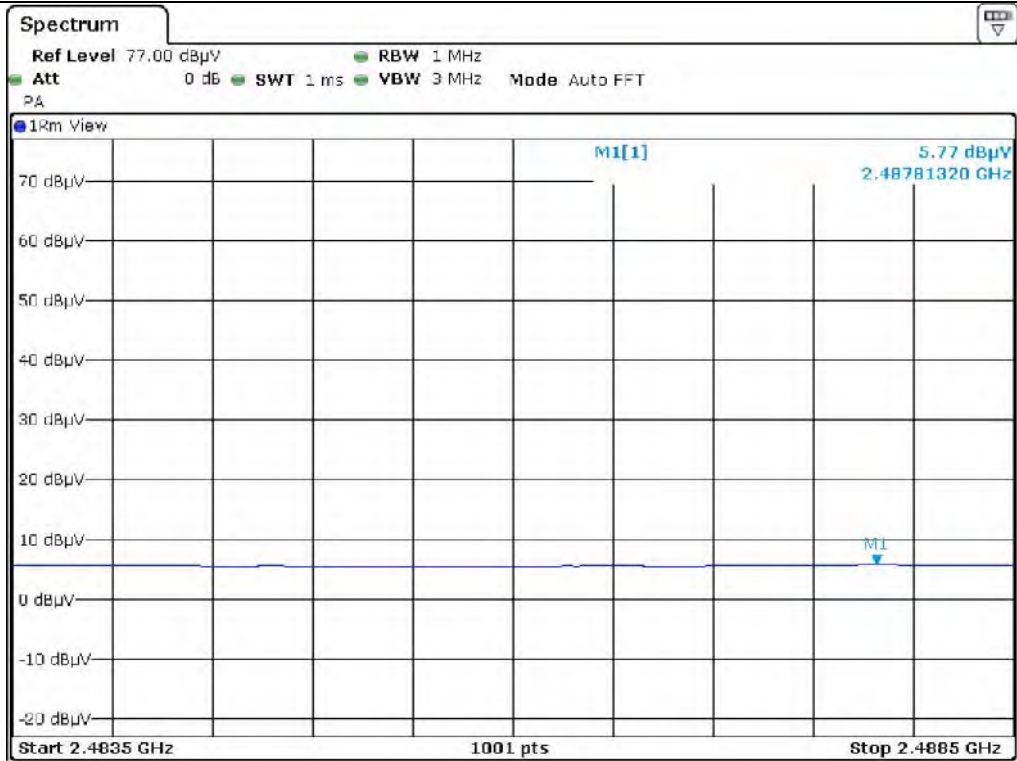


High Channel Edge_Average_H

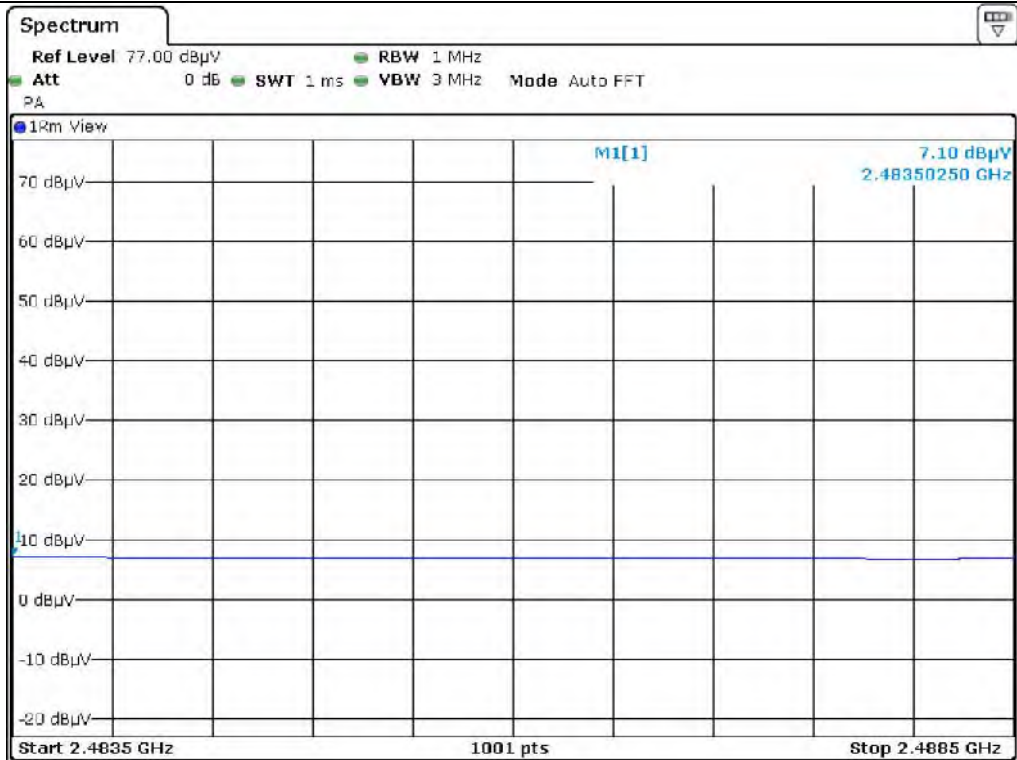


High Channel Edge_Average_V

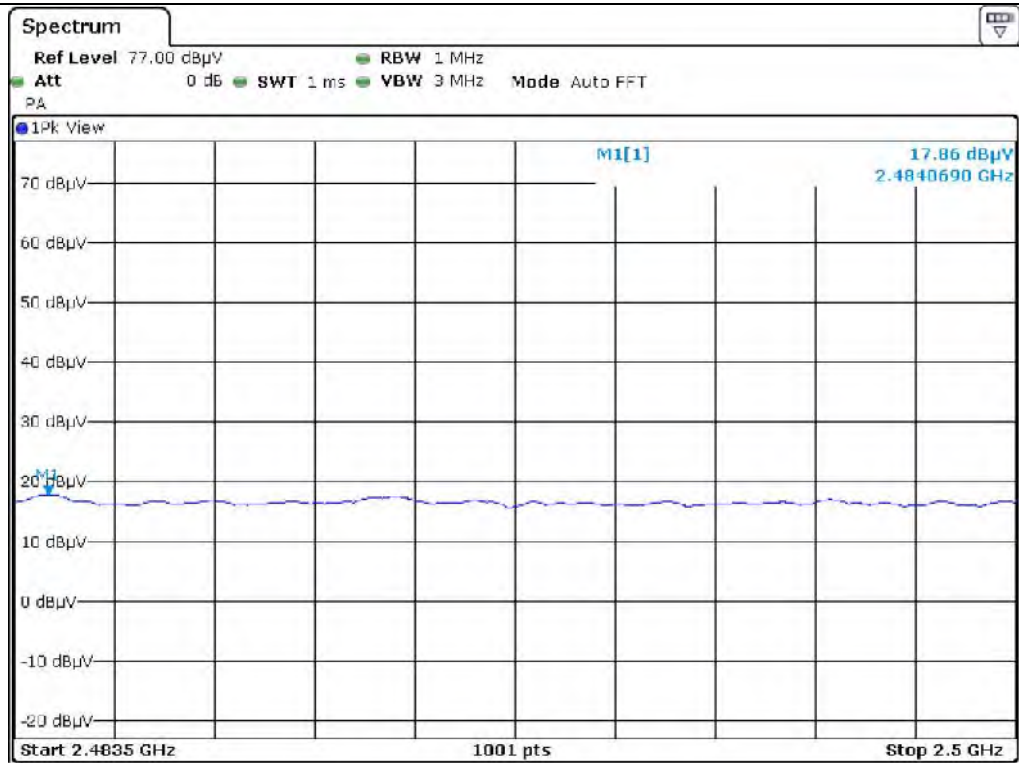


High Channel_Peak_H

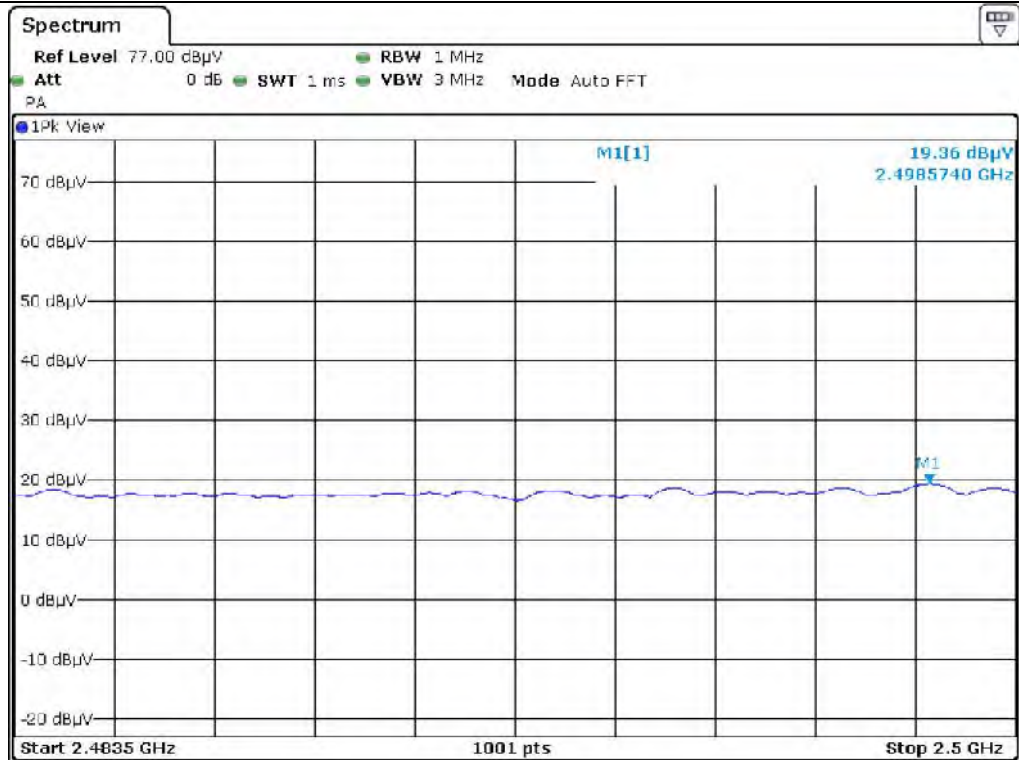

High Channel_Peak_V

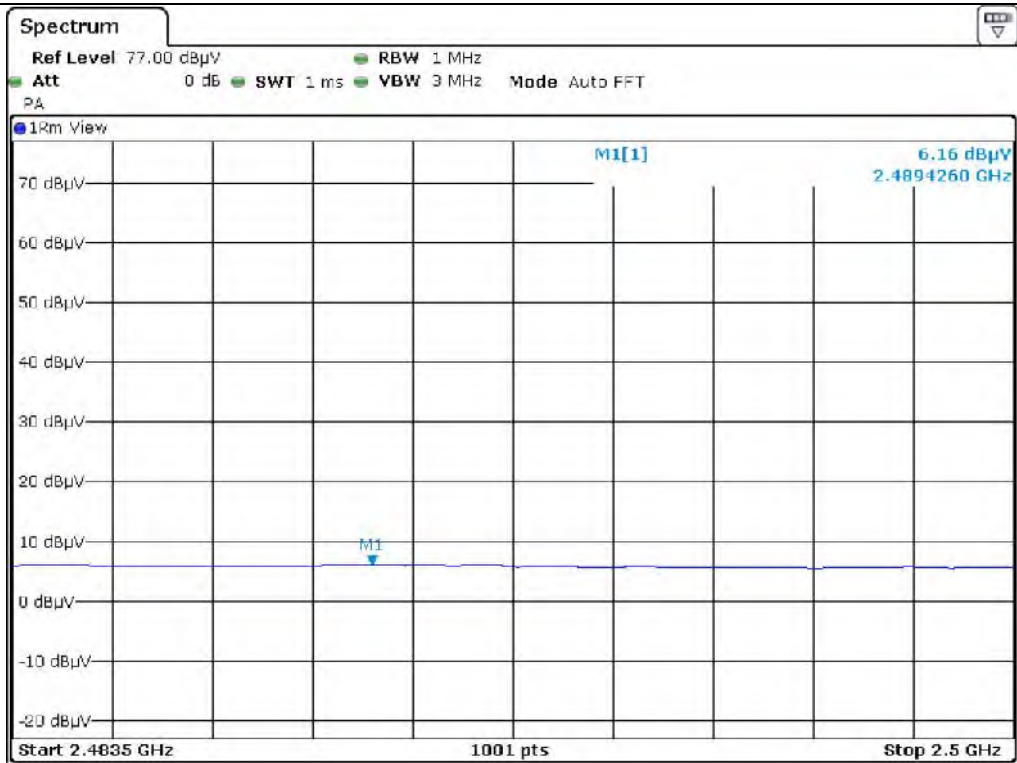

High Channel_Average_H

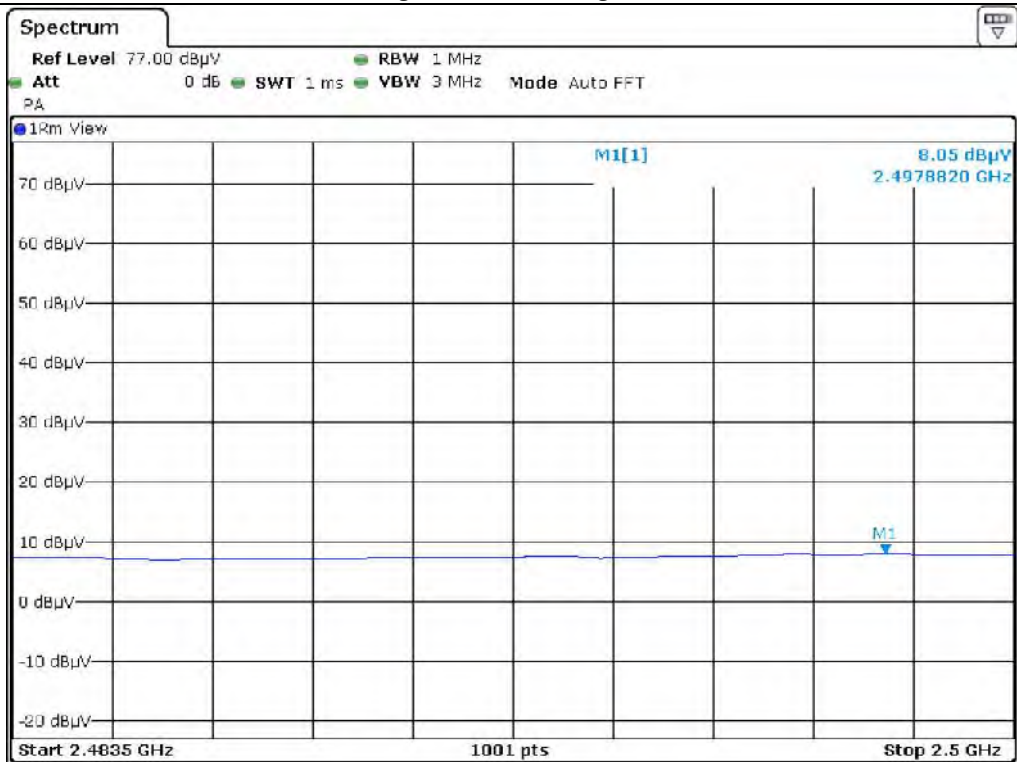

High Channel_Average_V

9.6.1.2 Test data for 802.11g WLAN Mode

- . Test Date : September 24, 2019 ~ October 15, 2019
- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 84.28 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 365.988	17.84	Peak	H	26.94	9.20	-	53.98	74.00	20.02
2 366.154	7.65	Average	H			0.74	44.53	54.00	9.47
2 358.397	18.24	Peak	V			-	54.38	74.00	19.62
2 388.255	8.04	Average	V			0.74	44.92	54.00	9.08
Test Data for High Channel									
2 484.073	18.06	Peak	H	27.47	9.49	-	55.02	74.00	18.98
2 489.426	6.60	Average	H			0.74	44.30	54.00	9.70
2 498.516	19.54	Peak	V			-	56.50	74.00	17.50
2 497.880	8.89	Average	V			0.74	46.59	54.00	7.41

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor



Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.1.3 Test data for 802.11n_HT20 WLAN Mode

- . Test Date : September 24, 2019 ~ October 15, 2019
- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 84.77 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 365.988	18.51	Peak	H	26.94	9.20	-	54.65	74.00	19.35
2 366.150	8.53	Average	H			0.72	45.39	54.00	8.61
2 358.397	19.27	Peak	V			-	55.41	74.00	18.59
2 388.200	9.49	Average	V			0.72	46.35	54.00	7.65
Test Data for High Channel									
2 484.071	18.84	Peak	H	27.47	9.49	-	55.80	74.00	18.20
2 489.420	7.60	Average	H			0.72	45.28	54.00	8.72
2 498.577	20.89	Peak	V			-	57.85	74.00	16.15
2 497.880	8.96	Average	V			0.72	46.64	54.00	7.36

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor



Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.2 Spurious & Harmonic Radiated Emission

9.6.2.1 Test data for 802.11b WLAN Mode

- Test Date : September 24, 2019 ~ October 15, 2019
- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 88.98 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	18.31	Peak	H	28.84	10.31	-	57.46	74.00	16.54
4 824.00	6.26	Average	H			0.52	45.93	54.00	8.07
4 824.00	18.80	Peak	V			-	57.95	74.00	16.05
4 824.00	6.25	Average	V			0.52	45.92	54.00	8.08
Test Data for Middle Channel									
4 884.00	18.74	Peak	H	28.01	10.43	-	57.18	74.00	16.82
4 884.00	6.40	Average	H			0.52	45.36	54.00	8.64
4 884.00	18.48	Peak	V			-	56.92	74.00	17.08
4 884.00	6.43	Average	V			0.52	45.39	54.00	8.61
Test Data for High Channel									
4 924.00	18.25	Peak	H	29.15	10.81	-	58.21	74.00	15.79
4 924.00	6.55	Average	H			0.52	47.03	54.00	6.97
4 924.00	18.58	Peak	V			-	58.54	74.00	15.46
4 924.00	6.71	Average	V			0.52	47.19	54.00	6.81


Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical


Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor


Tested by: Hyung-Kwon, Oh / Assistant Manager

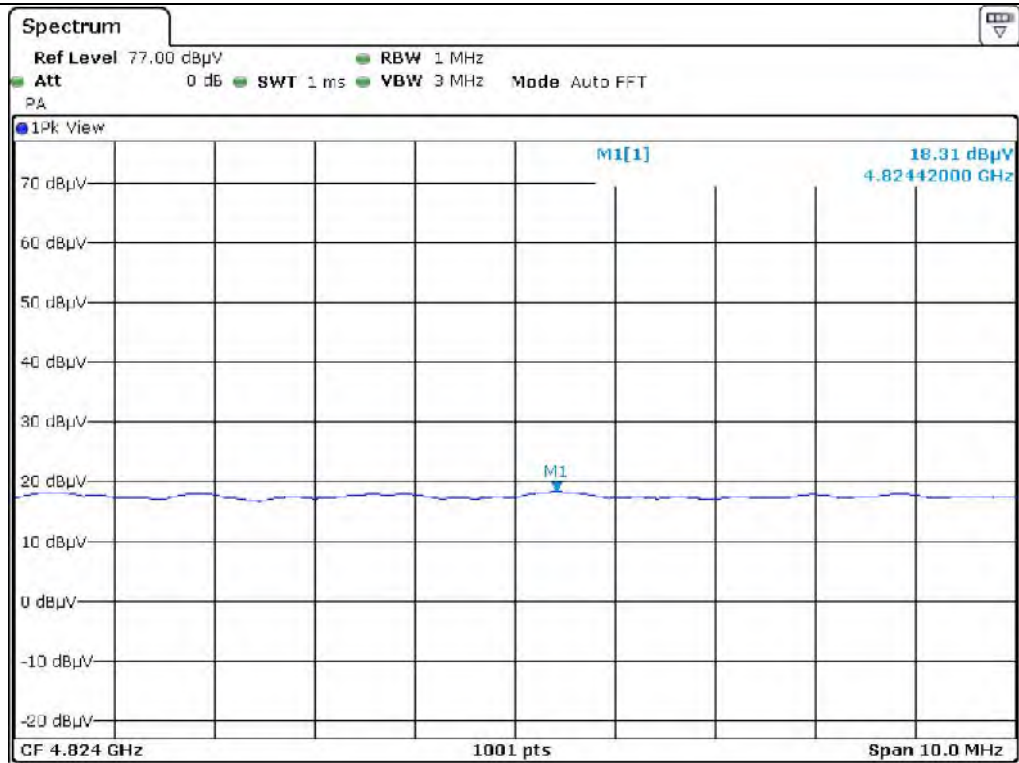


Low Channel_Peak_H

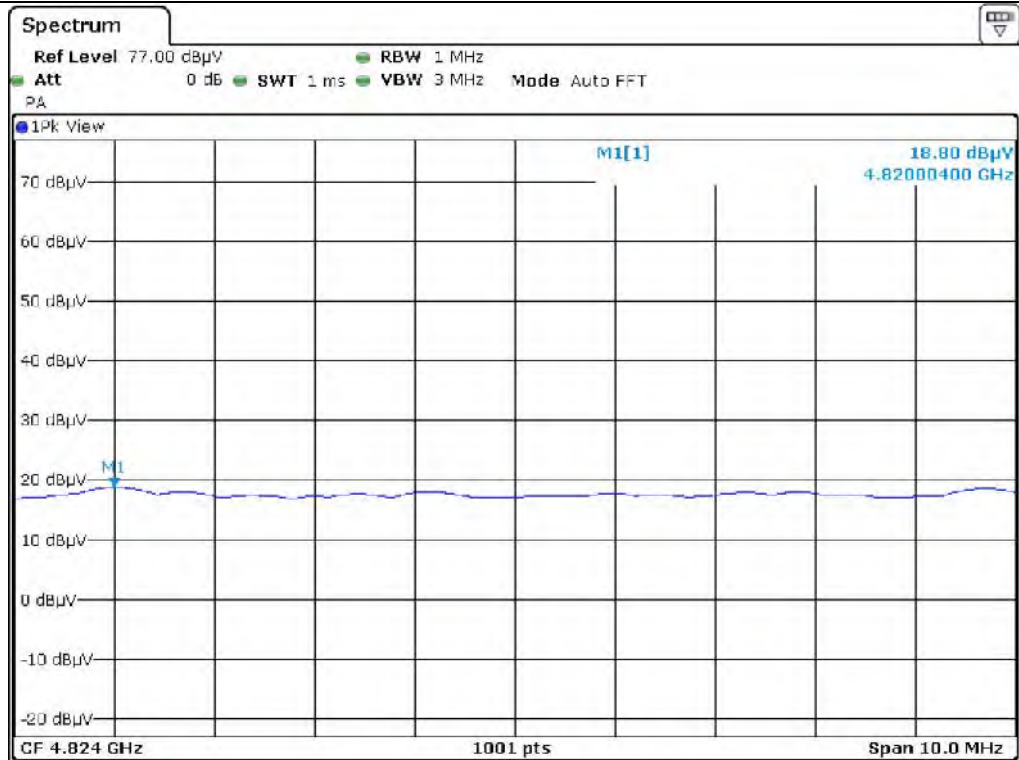


Low Channel_Peak_V

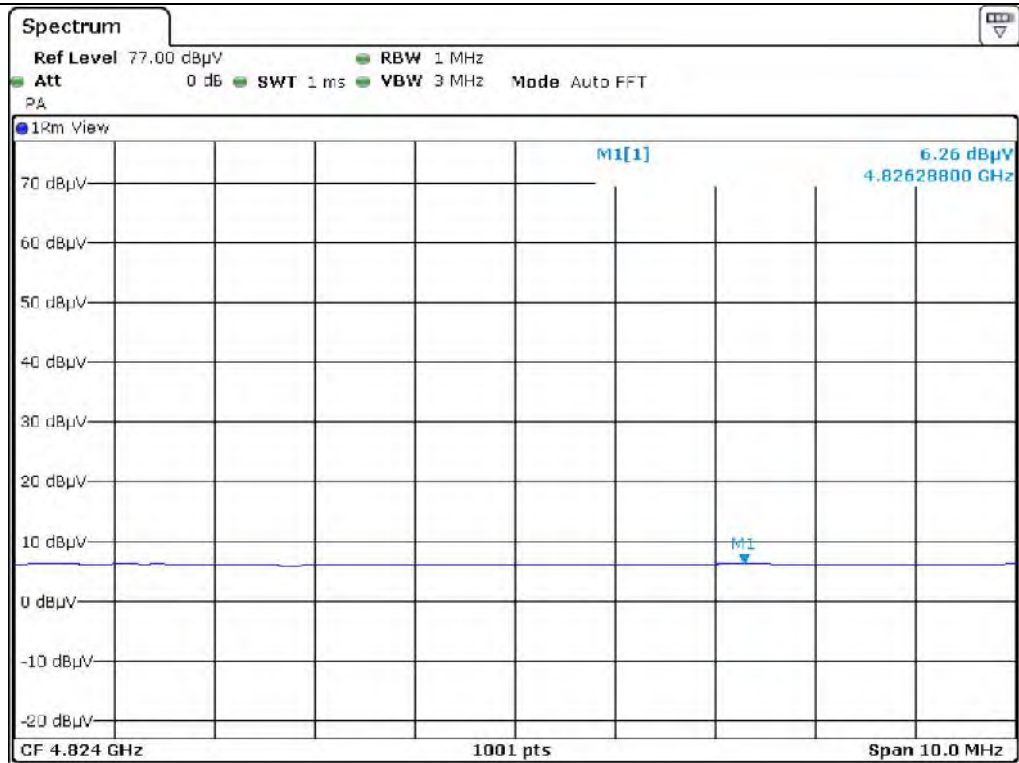


Low Channel_Average_H

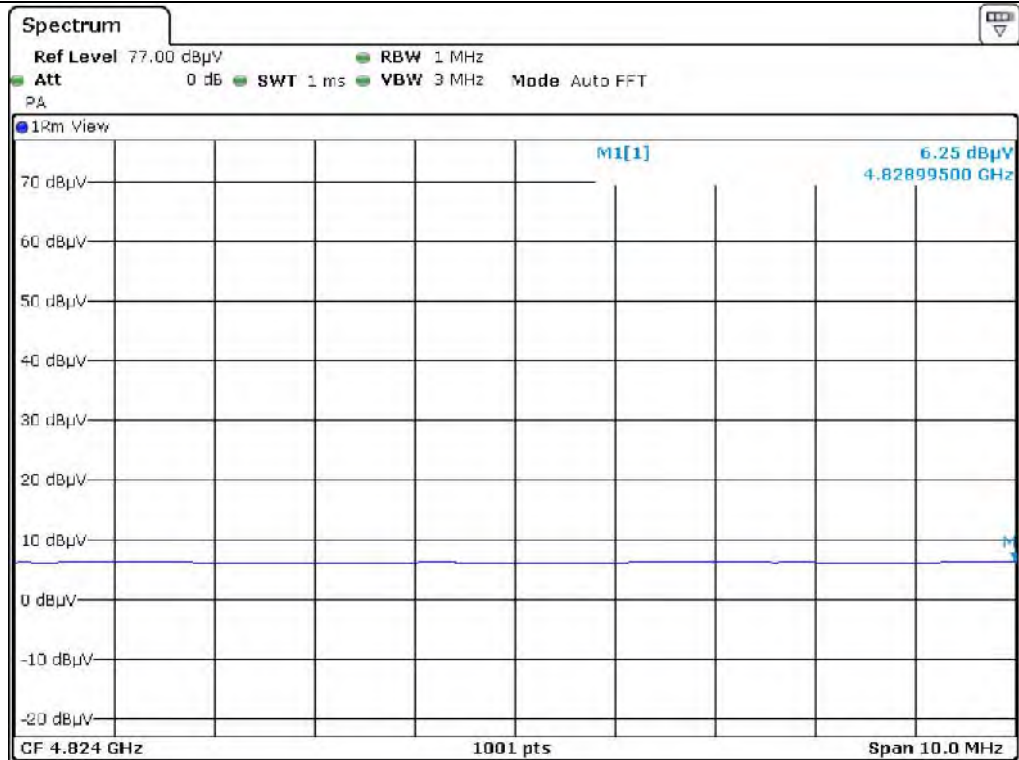


Low Channel_Average_V

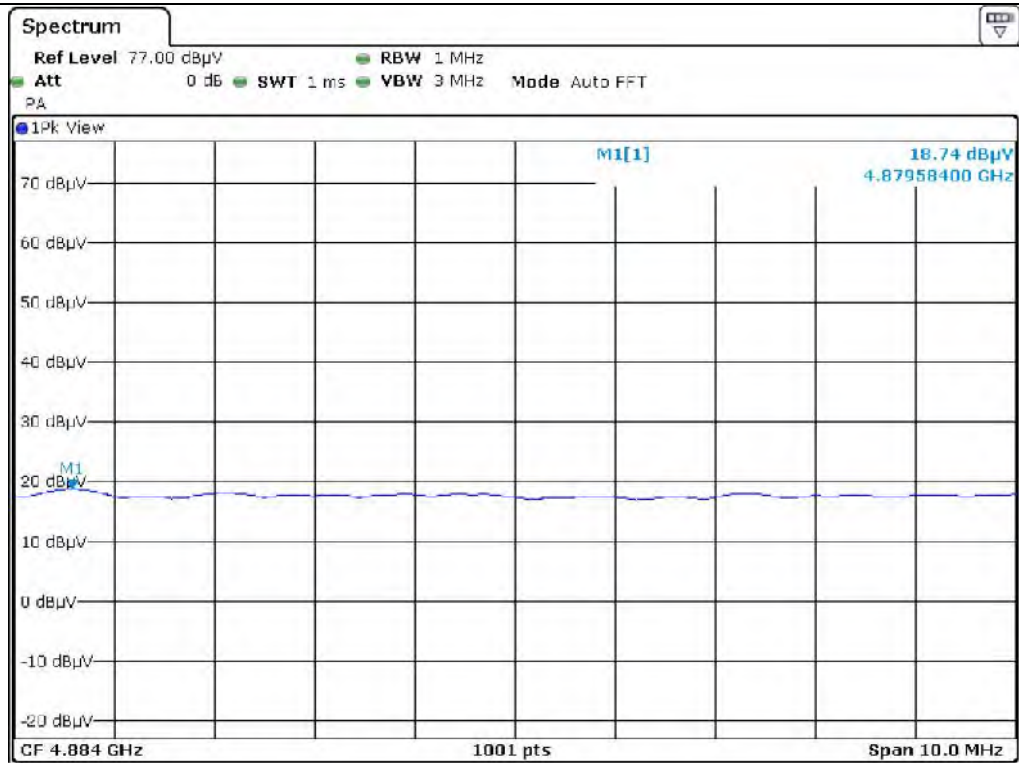


Middle Channel_Peak_H

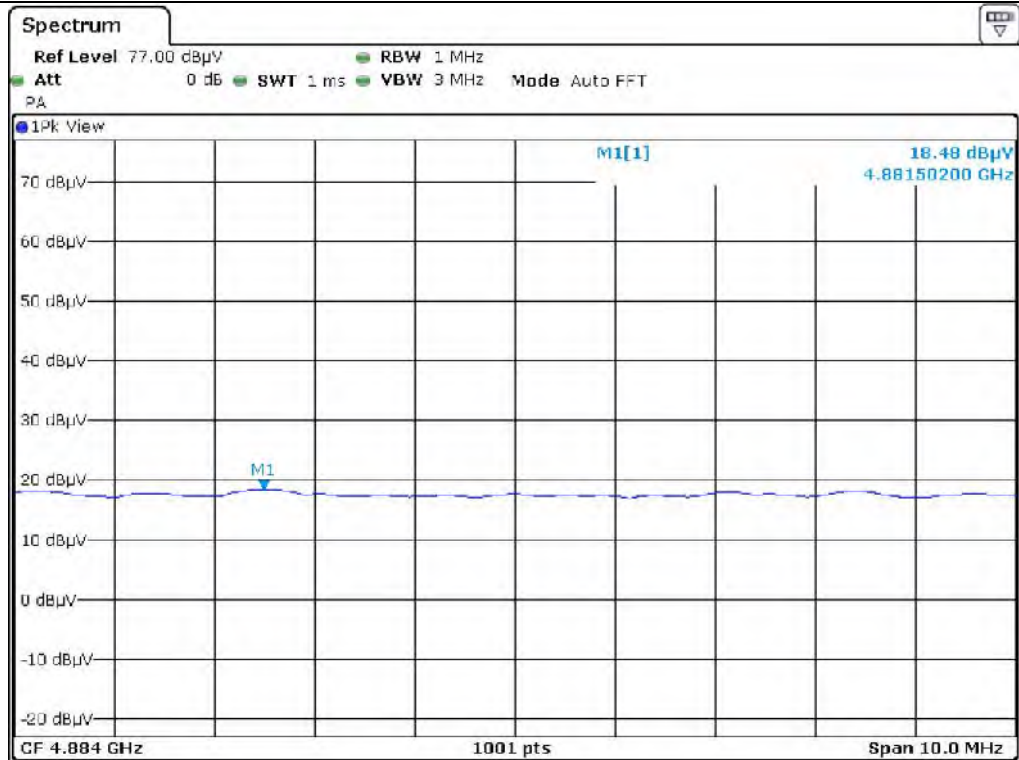


Middle Channel_Peak_V

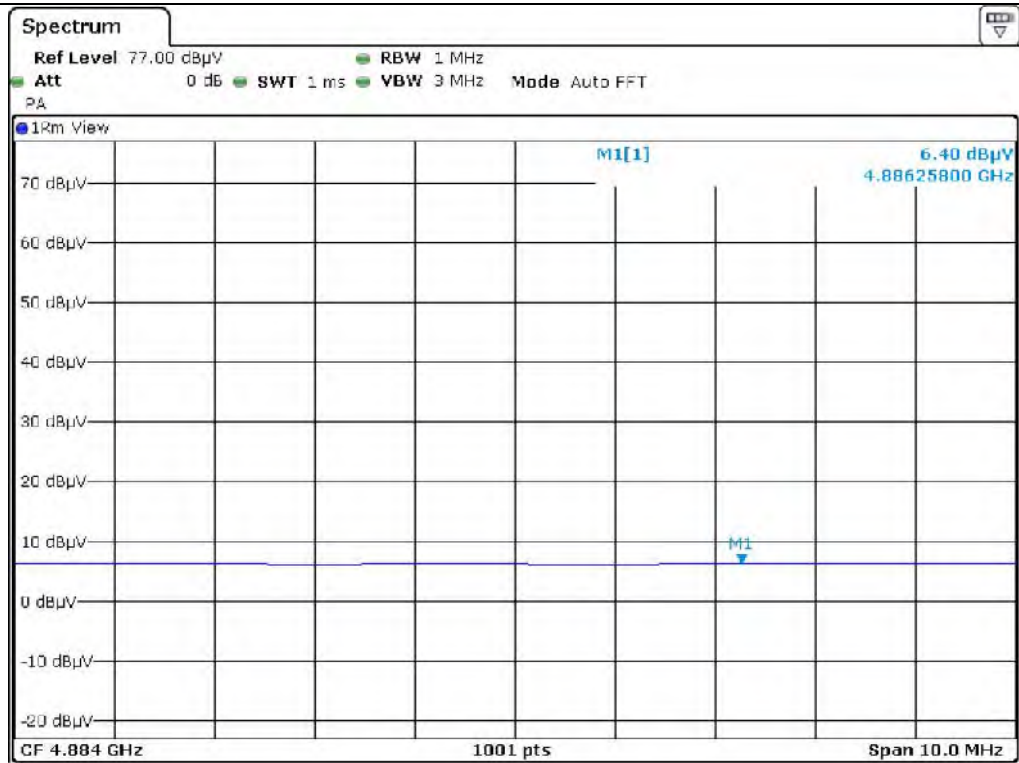


Middle Channel_Average_H

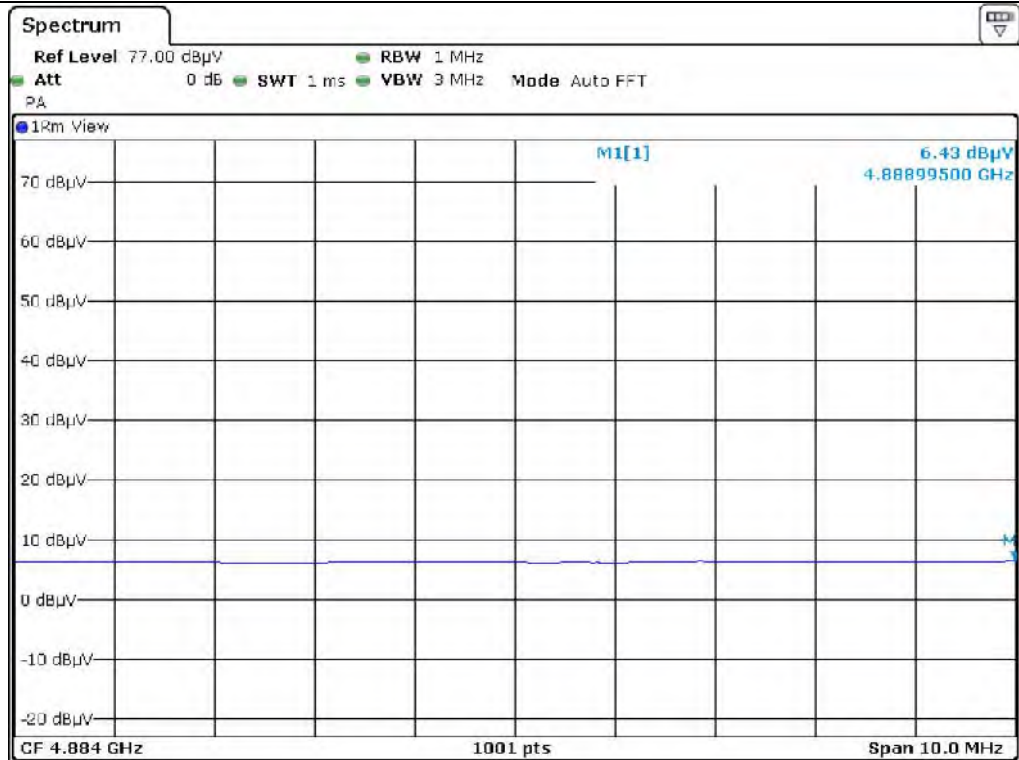


Middle Channel_Average_V

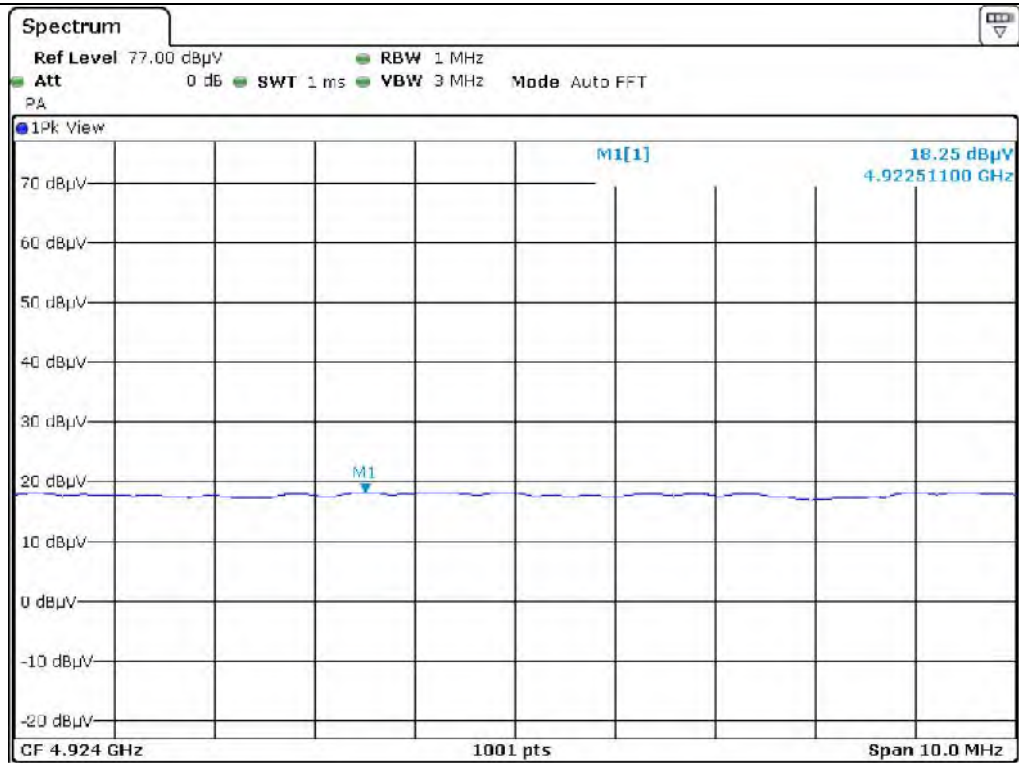


High Channel_Peak_H

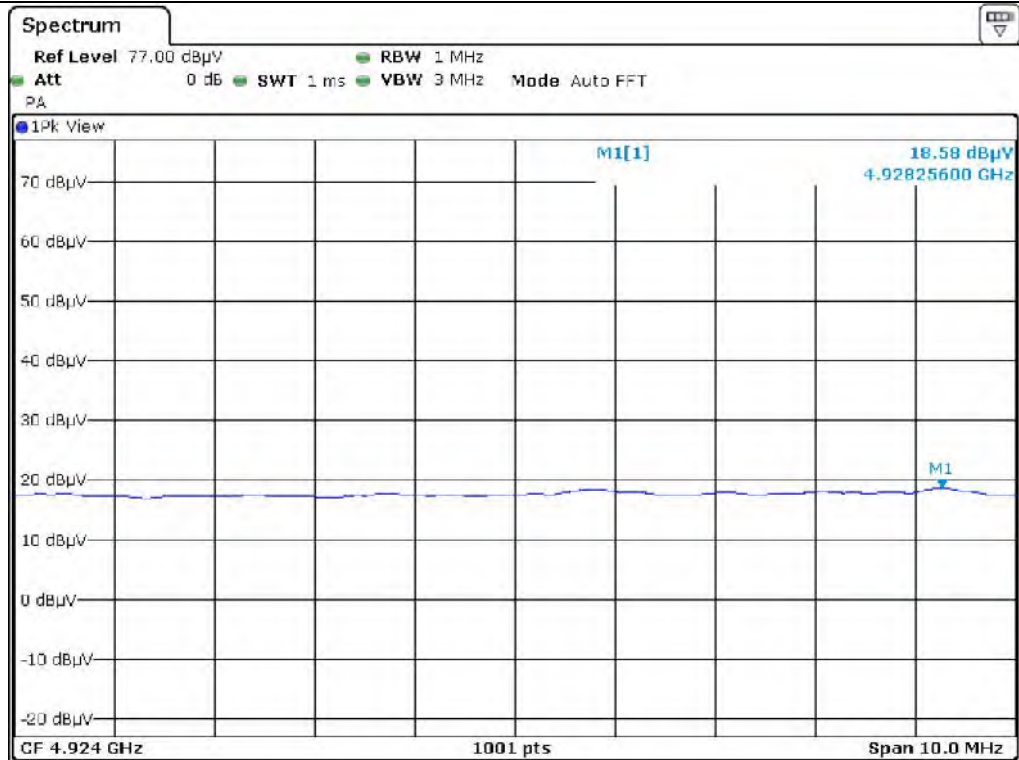

High Channel_Peak_V

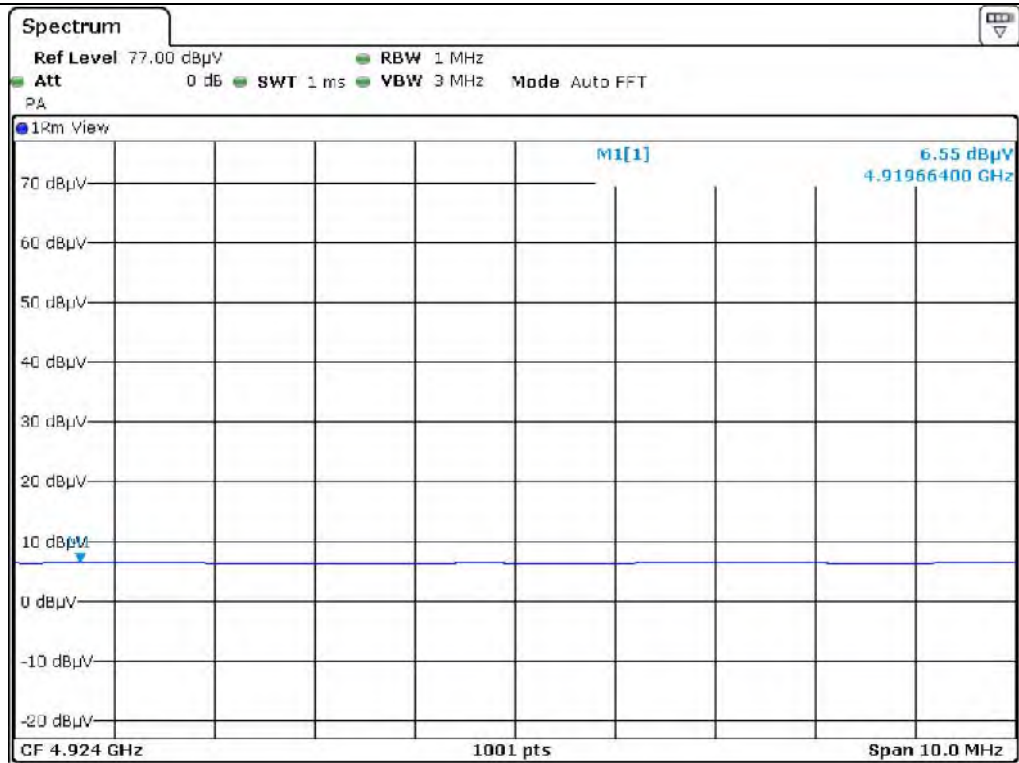

High Channel_Average_H

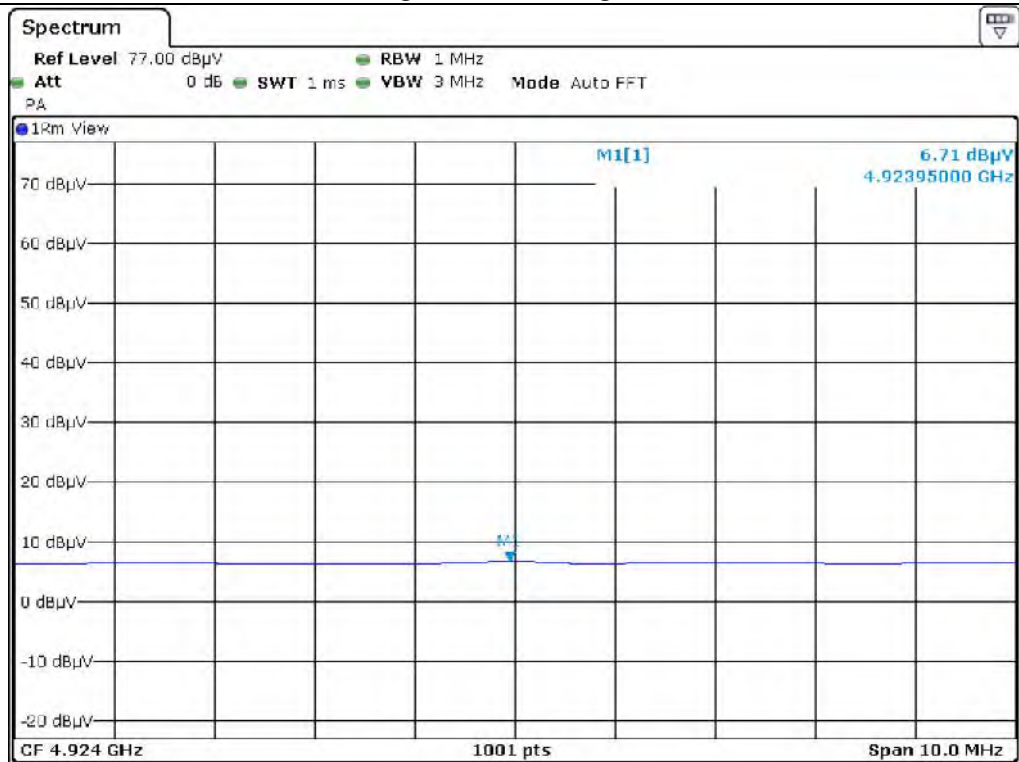

High Channel_Average_V

9.6.2.2 Test data for 802.11g WLAN Mode

- . Test Date : September 24, 2019 ~ October 15, 2019
- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 84.28 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	18.61	Peak	H	28.84	10.31	-	57.76	74.00	16.24
4 824.00	6.69	Average	H			0.74	46.58	54.00	7.42
4 824.00	18.08	Peak	V			-	57.23	74.00	16.77
4 824.00	6.28	Average	V			0.74	46.17	54.00	7.83
Test Data for Middle Channel									
4 884.00	18.57	Peak	H	28.01	10.43	-	57.01	74.00	16.99
4 884.00	6.49	Average	H			0.74	45.67	54.00	8.33
4 884.00	18.18	Peak	V			-	56.62	74.00	17.38
4 884.00	6.07	Average	V			0.74	45.25	54.00	8.75
Test Data for High Channel									
4 924.00	18.40	Peak	H	29.15	10.81	-	58.36	74.00	15.64
4 924.00	6.42	Average	H			0.74	47.12	54.00	6.88
4 924.00	18.56	Peak	V			-	58.52	74.00	15.48
4 924.00	6.59	Average	V			0.74	47.29	54.00	6.71

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor

Tested by: Hyung-Kwon, Oh / Assistant Manager

9.6.2.3 Test data for 802.11n_HT20 WLAN Mode

- . Test Date : September 24, 2019 ~ October 15, 2019
- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 84.77 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Correction Factor	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 824.00	18.34	Peak	H	28.84	10.31	-	57.49	74.00	16.51
4 824.00	6.51	Average	H			0.72	46.38	54.00	7.62
4 824.00	18.46	Peak	V			-	57.61	74.00	16.39
4 824.00	6.73	Average	V			0.72	46.60	54.00	7.40
Test Data for Middle Channel									
4 884.00	18.06	Peak	H	28.01	10.43	-	56.50	74.00	17.50
4 884.00	6.39	Average	H			0.72	45.55	54.00	8.45
4 884.00	18.60	Peak	V			-	57.04	74.00	16.96
4 884.00	6.20	Average	V			0.72	45.36	54.00	8.64
Test Data for High Channel									
4 924.00	18.26	Peak	H	29.15	10.81	-	58.22	74.00	15.78
4 924.00	6.72	Average	H			0.72	47.40	54.00	6.60
4 924.00	18.76	Peak	V			-	58.72	74.00	15.28
4 924.00	6.90	Average	V			0.72	47.58	54.00	6.42

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor

Tested by: Hyung-Kwon, Oh / Assistant Manager

10. PEAK POWER SPECTRUL DENSITY


10.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

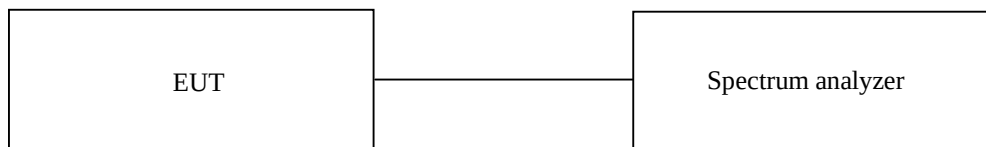

10.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data for 802.11b WLAN Mode

-. Test Date : September 24, 2019 ~ October 15, 2019


-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-17.12	8.00	25.12
Middle	2 442.00	-16.60	8.00	24.60
High	2 462.00	-16.58	8.00	24.58


Remark. Margin = Limit – Measured value

Tested by: Hyung-Kwon, Oh / Assistant Manager

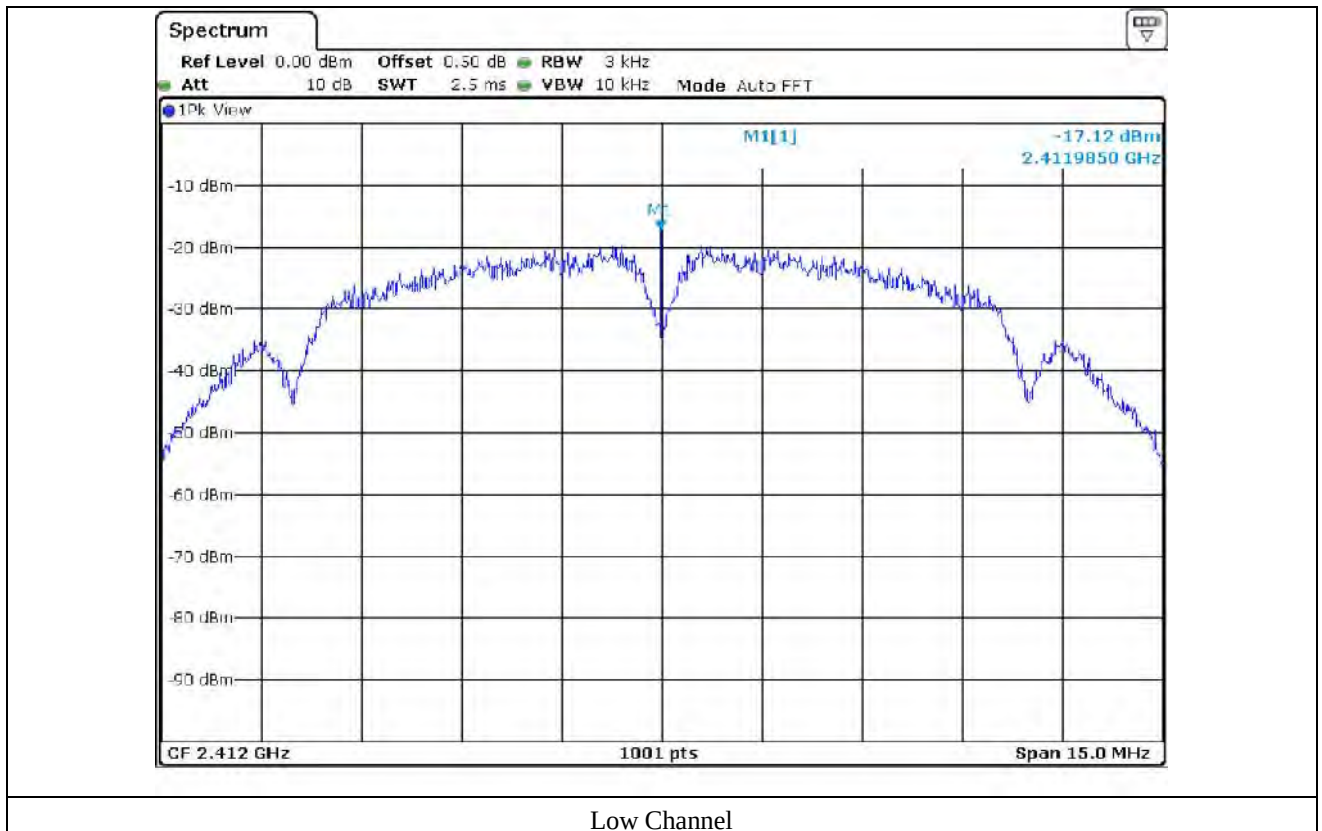

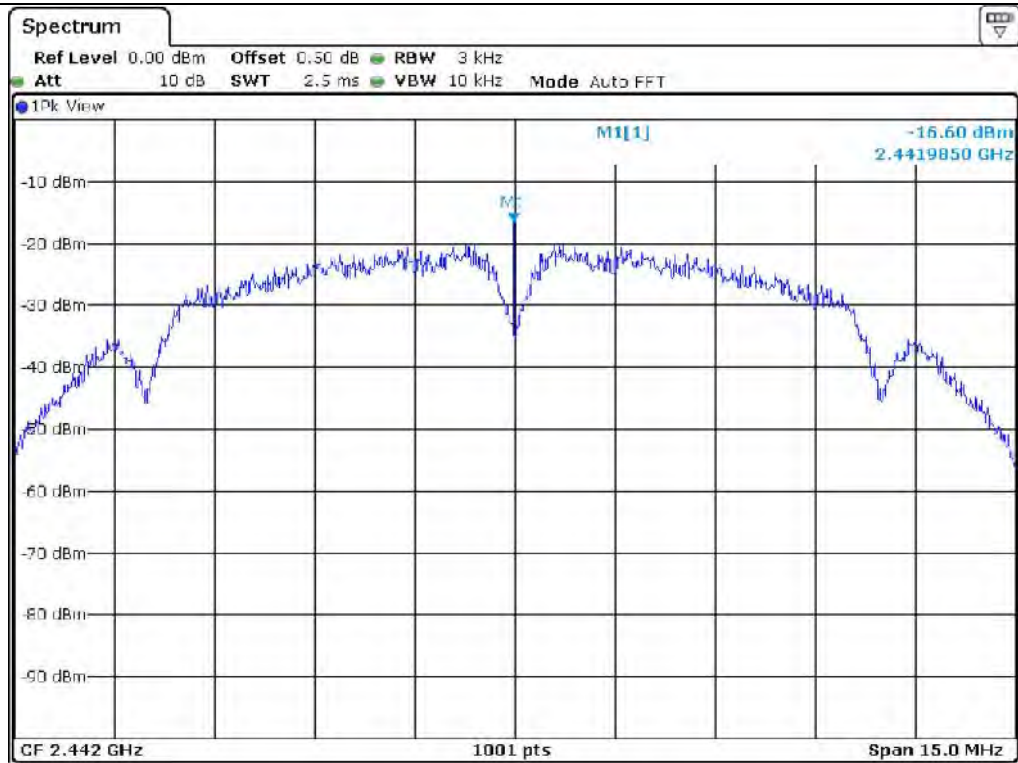

Middle Channel

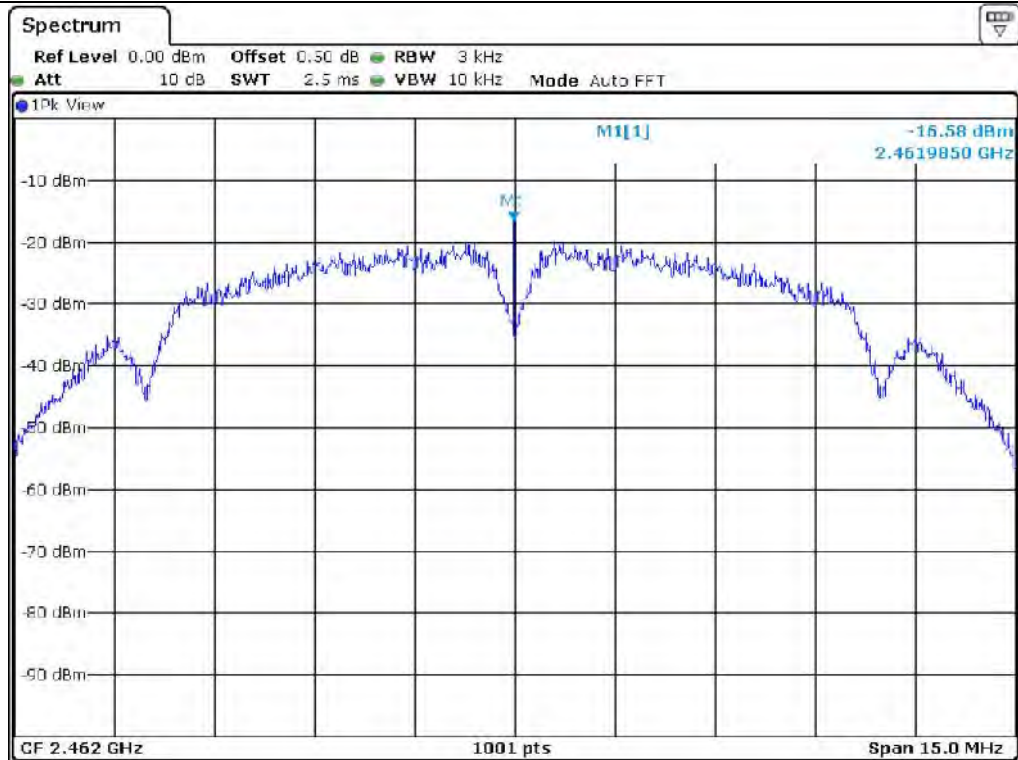

High Channel

10.5 Test data for 802.11g WLAN Mode

-. Test Date : September 24, 2019 ~ October 15, 2019


-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-17.95	8.00	25.95
Middle	2 442.00	-17.29	8.00	25.29
High	2 462.00	-17.24	8.00	25.24


Remark. Margin = Limit – Measured value

Tested by: Hyung-Kwon, Oh / Assistant Manager

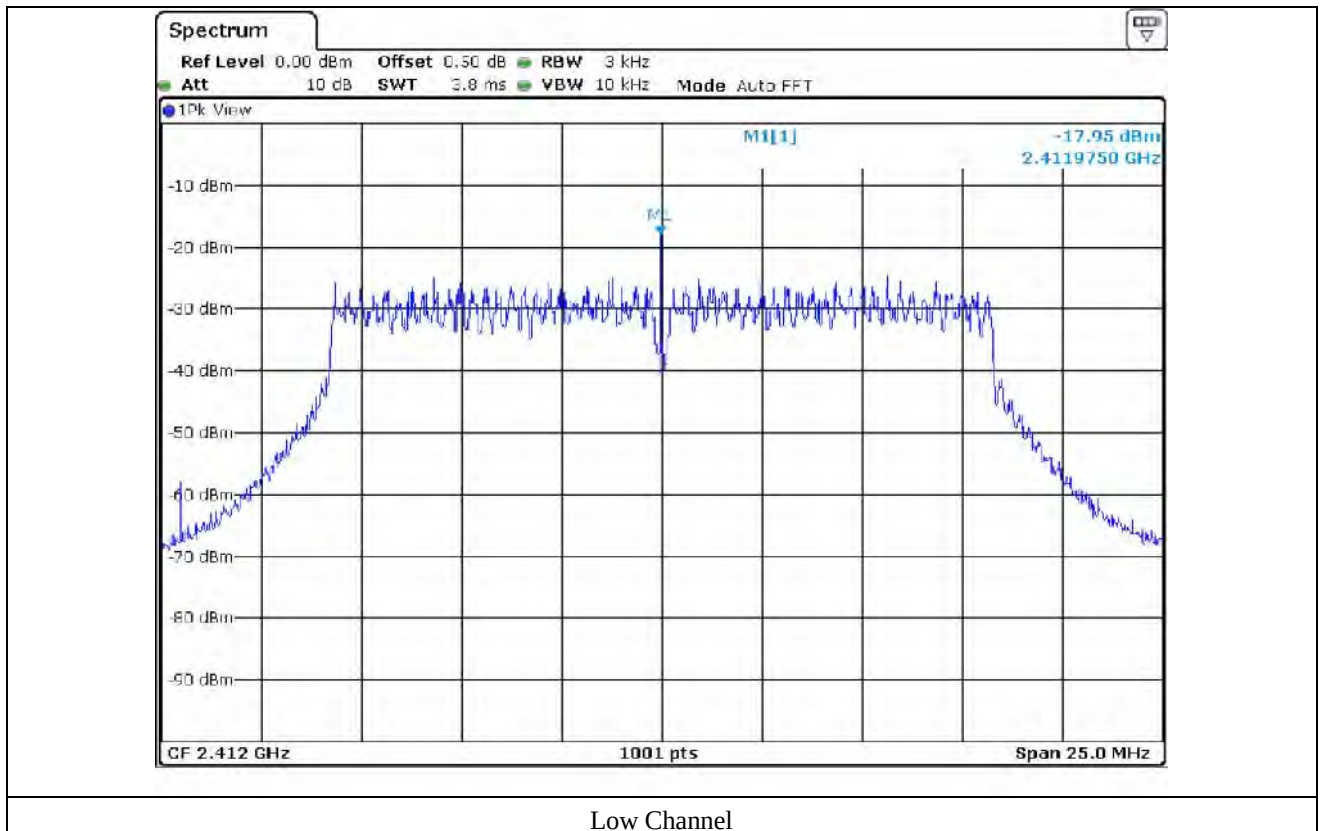

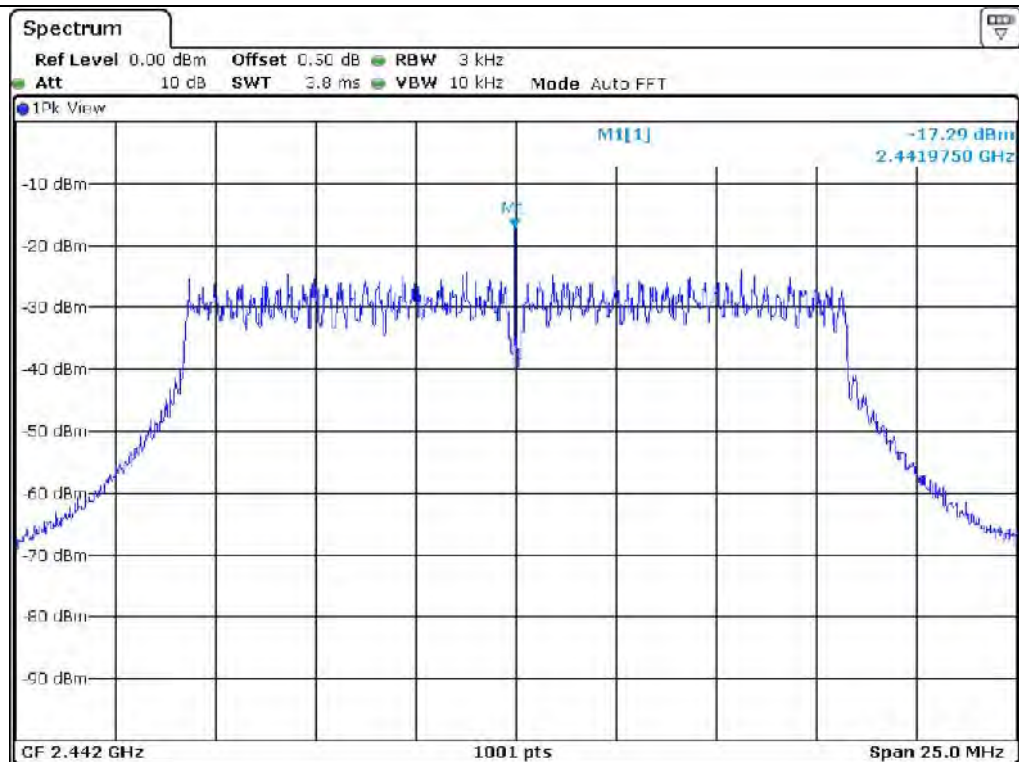

Middle Channel

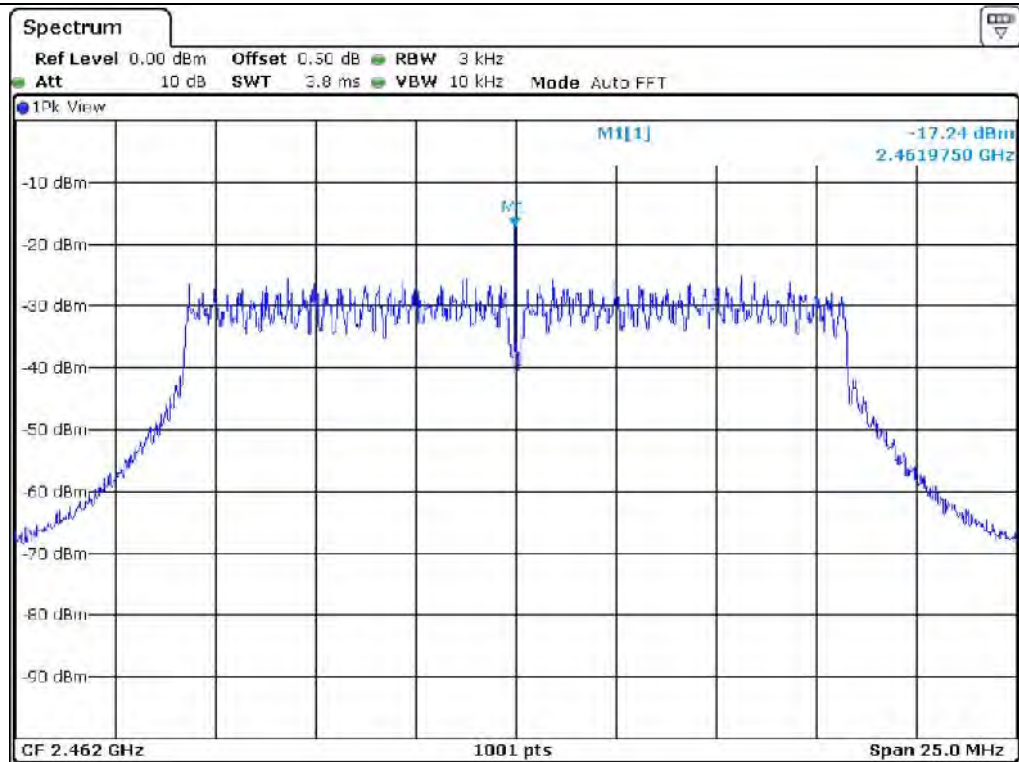

High Channel

10.6 Test data for 802.11n_HT20 WLAN Mode

-. Test Date : September 24, 2019 ~ October 15, 2019


-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 412.00	-17.90	8.00	25.90
Middle	2 442.00	-17.13	8.00	25.13
High	2 462.00	-17.09	8.00	25.09


Remark. Margin = Limit – Measured value

Tested by: Hyung-Kwon, Oh / Assistant Manager

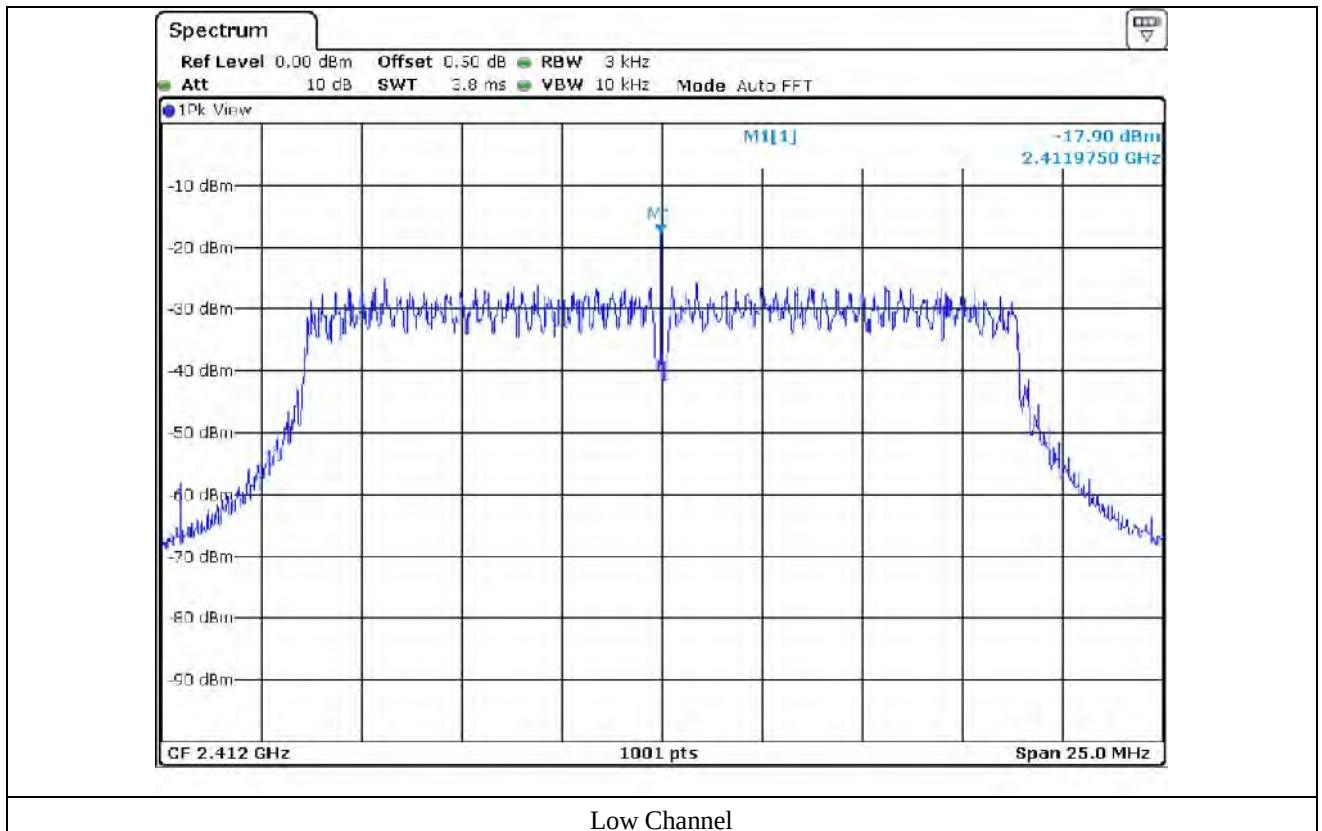

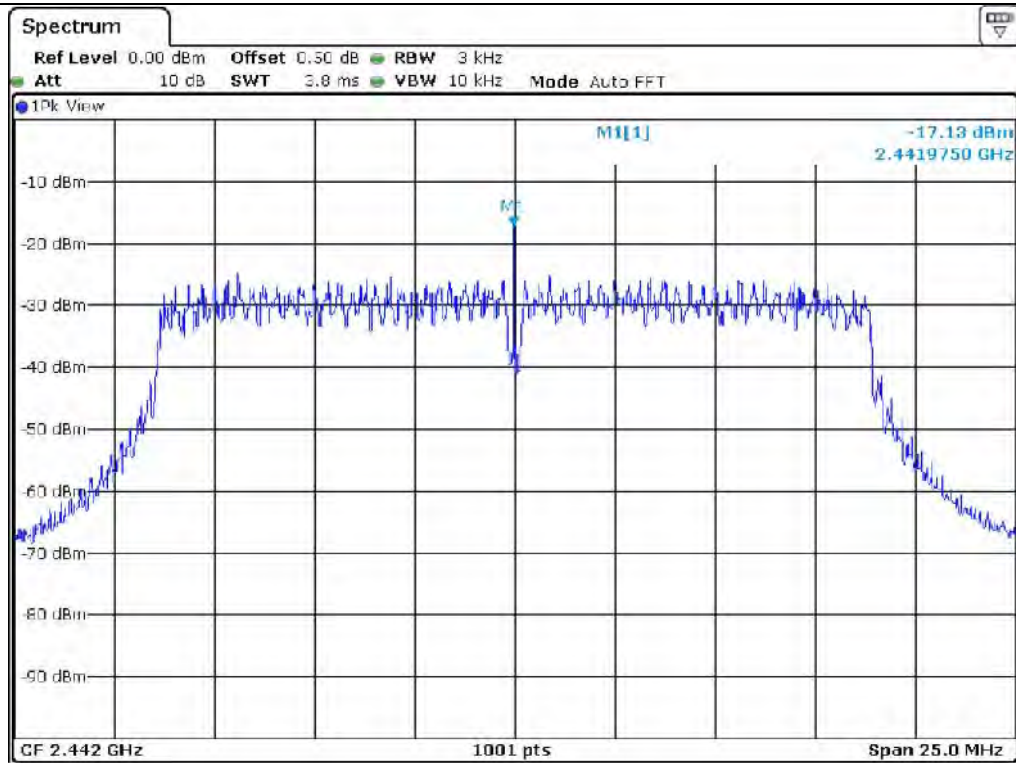

Middle Channel

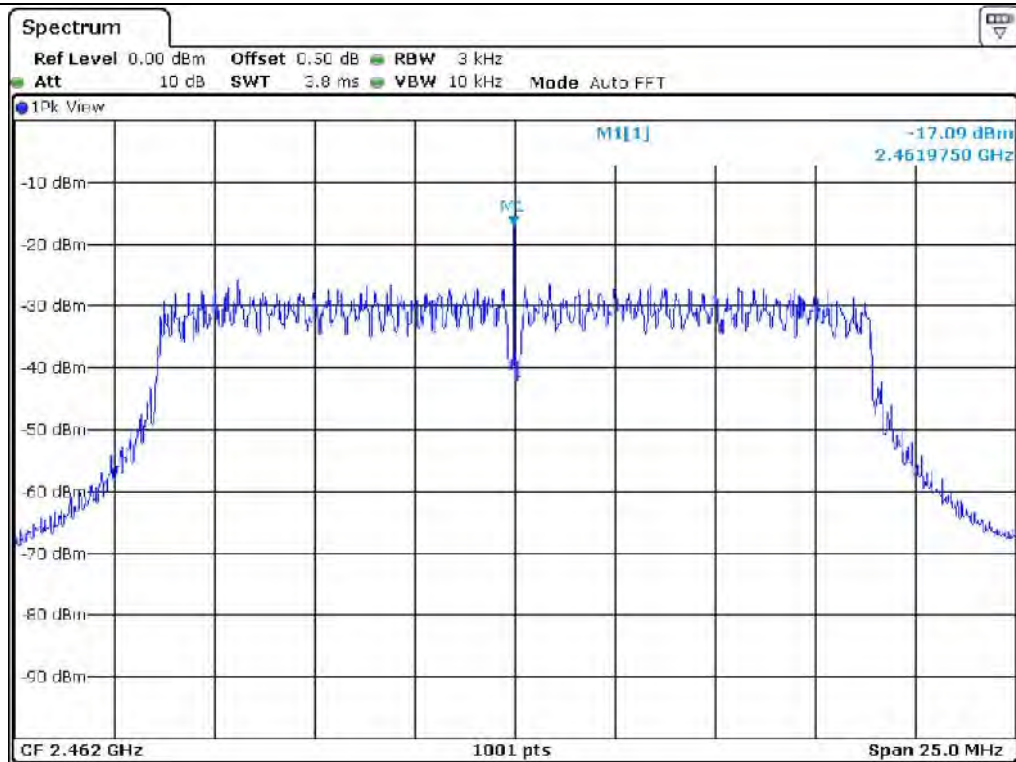

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 24 °C
Relative humidity : 43 % R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 28, 2019 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312545	Mar. 18, 2019 (1Y)
■ - BBV9718	Schwarzbeck	Amplifier	310	Mar. 28, 2019 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	777	Apr. 13, 2018 (2Y)
■ - BBHA 9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 16, 2019 (1Y)
■ - BBHA 9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jan. 16, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data

11.4.1 Test data for 30 MHz ~ 1 GHz

Humidity Level : 43 % R.H.


Temperature: 24 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : NOVO

Date: September 24, 2019 ~ October 15, 2019

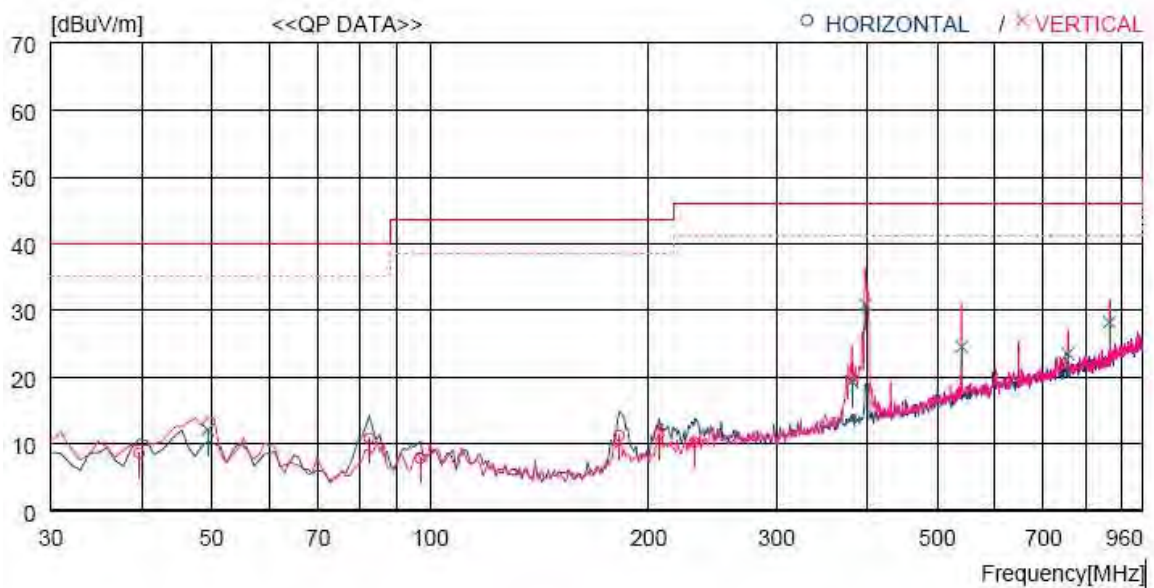Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)


No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	39.700	26.1	14.1	1.5	33.1	8.6	40.0	31.4	200	359
2	82.380	33.4	8.4	2.0	33.0	10.8	40.0	29.2	300	0
3	96.930	26.5	12.1	2.2	33.0	7.8	43.5	35.7	100	0
4	182.290	31.1	10.0	3.1	33.0	11.2	43.5	32.3	400	241
5	206.540	30.0	11.0	3.3	33.0	11.3	43.5	32.2	400	30
6	231.760	27.6	12.0	3.5	32.9	10.2	46.0	35.8	400	359
----- Vertical -----										
7	49.400	29.4	14.1	1.7	33.1	12.1	40.0	27.9	100	227
8	381.140	32.3	15.5	4.5	33.0	19.3	46.0	26.7	200	0
9	397.630	43.5	15.8	4.6	33.1	30.8	46.0	15.2	200	287
10	540.220	34.1	18.3	5.4	33.3	24.5	46.0	21.5	200	0
11	756.523	29.6	20.7	6.4	33.2	23.5	46.0	22.5	100	80
12	864.190	32.1	21.9	6.9	32.7	28.2	46.0	17.8	100	359

Tested by: Hyung-Kwon, Oh / Assistant Manager

11.4.2 Test data for Below 30 MHz

- . Test Date : September 24, 2019 ~ October 15, 2019
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									

11.4.3 Test data for above 1 GHz

- . Test Date : September 24, 2019 ~ October 15, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									


 Tested by: Hyung-Kwon, Oh / Assistant Manager