



FCC Test Report

Report No.: BXK-19AP1353DTSHPB-1

FCC ID: 2AS9U-LY0204A

Product: BT SPEAKER MINI FRIDGE

Model: LY0204A, EFMIS151-PINK, EFMIS151-BLACK, KWC-4 BT

Received Date: Apr.12, 2019

Test Date: Apr.12 to May.15, 2019

Issued Date: May.15, 2019

Applicant: Shaoxing Shangyu North Electron Manufacture co.,ltd

Address: Xingyue Industry Zone, Xiaoyue Town, Shangyu District, Shaoxing City,Zhejiang,
CHINA

Manufacturer: Shaoxing Shangyu North Electron Manufacture co.,ltd

Address: Xingyue Industry Zone, Xiaoyue Town, Shangyu District, Shaoxing City,Zhejiang,
CHINA

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Address: No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

Release Control Record.....	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Test Instruments.....	7
2.2 Measurement Uncertainty	8
2.3 Modification Record	8
3 General Information.....	9
3.1 General Description of EUT.....	9
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability:	10
3.2.2 Test Condition:	12
3.3 Description of Support Units.....	13
3.4 General Description of Applied Standards	13
4 Test Procedure and Results	14
4.1 Conducted Emission Measurement.....	14
4.1.1 Limit.....	14
4.1.2 Test Setup.....	14
4.1.3 Test Procedures	14
4.1.4 Deviation of Test Standard.....	15
4.1.5 Test Results	16
4.2 Number of Hopping Frequency Used	18
4.2.1 Limit.....	18
4.2.2 Test Setup.....	18
4.2.3 Test Procedures	18
4.2.4 Deviation of Test Standard.....	18
4.2.5 Test Results	19
4.3 Dwell Time on Each Channel	20
4.3.1 Limit.....	20
4.3.2 Test Setup.....	20
4.3.3 Test Procedures	20
4.3.4 Deviation of Test Standard.....	20
4.3.5 Test Results	21



4.4	Channel Bandwidth	28
4.4.1	Limit.....	28
4.4.2	Test Setup.....	28
4.4.3	Test Procedures	28
4.4.4	Deviation of Test Standard.....	28
4.4.5	EUT Operating Condition	28
4.4.6	Test Results	29
4.5	Hopping Channel Separation	32
4.5.1	Limit.....	32
4.5.2	Test Setup.....	32
4.5.3	Test Procedures	32
4.5.4	Deviation of Test Standard.....	32
4.5.5	Test Results	33
4.6	Maximum Output Power.....	34
4.6.1	Limit.....	34
4.6.2	Test Setup.....	34
4.6.3	Test Procedures	34
4.6.4	Deviation of Test Standard.....	34
4.6.5	EUT Operating Condition	34
4.6.6	Test Results	35
4.7	Conducted Out of Band Emission Measurement	36
4.7.1	Limit.....	36
4.7.2	Test Procedures	36
4.7.3	Deviation of Test Standard.....	36
4.7.4	Test Results	37
4.8	Radiated Emission Measurement.....	52
4.8.1	Limits	52
4.8.2	Test Procedures	52
4.8.3	Deviation from Test Standard.....	54
4.8.4	Test Setup.....	54
4.8.5	EUT Operating Conditions.....	55
4.8.6	Test Results	55
5	Pictures of Test Arrangements	60



Release Control Record

Issue No.	Description	Date Issued
BXK-19AP1353DTSHPB-1	Original release	May.15, 2019

1 Certificate of Conformity

Product: BT SPEAKER MINI FRIDGE

Brand: --

Model: LY0204A, EFMIS151-PINK, EFMIS151-BLACK, KWC-4 BT

Applicant: Shaoxing Shangyu North Electron Manufacture co.,ltd

Test Date: Apr.12 to May.15, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

Will Yan

, **Date:** May.15, 2019

WILL YAN

Project Engineer

Approved by :



Daniel SUN

RF Supervisor

, **Date:** May.15, 2019

2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

Note: The data shown in the report is the worst case data when the EUT is powered by AC120V, 60Hz.

2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Hybrid antenna(25MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1012	Aug.27,18	Aug.26,19
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Aug.27,18	Aug.26,19
Pre-Amplifier(100kHz-1.3GHz)	Agilent	8447D	E1A2001	Oct.19, 18	Oct.18, 19
Pre-Amplifier(1GHz-26.5GHz)	Agilent	8449B	E1A2002	Mar. 25, 19	Mar. 25, 20
EMI test receiver	R&S	ESR7	E1R1005	Dec.05, 18	Dec.04, 19
Spectrum Analyzer	Keysight	N9030B	E1S1003	Jul.24,18	Jul.23, 19
EMI test receiver	R&S	ESCS30	E1R1001	Mar.26, 19	Mar.25, 20
LISN	R&S	ENV216	E1L1011	Jul.17, 18	Jul.18, 19
Humidity&Temp Tester	Baolima	WS508	E1H1011	Apr. 04, 19	Apr. 03, 20
Test Software	ADT	ADT_COND_V 7.3.1	N/A	N/A	N/A
Test Software	Toscend	JS32-RE	N/A	N/A	N/A
Test Software	Toscend	JS1120	N/A	N/A	N/A

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

2.3 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	BT SPEAKER MINI FRIDGE
Brand	--
Test Model	LY0204A
Series Model	LY0204A, EFMIS151-PINK, EFMIS151-BLACK, KWC-4 BT
Model Difference	These four models are the same product, just for different market and sale purpose.
Power Rating	120V,60Hz
Modulation Type	GFSK, $\pi/4$ -DQPSK
Modulation Technology	BT-EDR, FHSS
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	79
Output Power	-0.02dBm
Antenna Type	PCB antenna
Antenna Connector	--
Antenna Gain	-0.58dBi

Note: For more details, please refer to the User's manual of the EUT.

3.2 Description of Test Modes

79 channels are provided for BT-EDR mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	-	√	-

Where **RE≥1G**: Radiated Emission above 1GHz

RE≤1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1 GHz):

- ☒ ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	$\pi/4$ -DQPSK	2DH5

Radiated Emission Test (Below 1 GHz):

- ☒ ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	78	FHSS	$\pi/4$ -DQPSK	2DH5

Power Line Conducted Emission Test:

- ☐ ☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☐ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	78	FHSS	$\pi/4$ -DQPSK	2DH5

Antenna Port Conducted Measurement

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	$\pi/4$ -DQPSK	2DH5

3.2.2 Test Condition:

Applicable to	Normal Environmental Conditions	Normal Input Power
RE $\geq$ 1G	23deg. C, 58%RH	AC120V 60Hz
RE < 1G	23deg. C, 58%RH	AC120V 60Hz
PLC	22deg. C, 54%RH	AC120V 60Hz
APCM	25deg. C, 60%RH	AC120V 60Hz

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

FCC Part 15, Subpart C (15.247)

FCC DA 00705

ANSI C63.10:2013

All relaxed test items have been performed and recorded as per the above standard.

4 Test Procedure and Results

4.1 Conducted Emission Measurement


4.1.1 Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.1.2 Test Setup

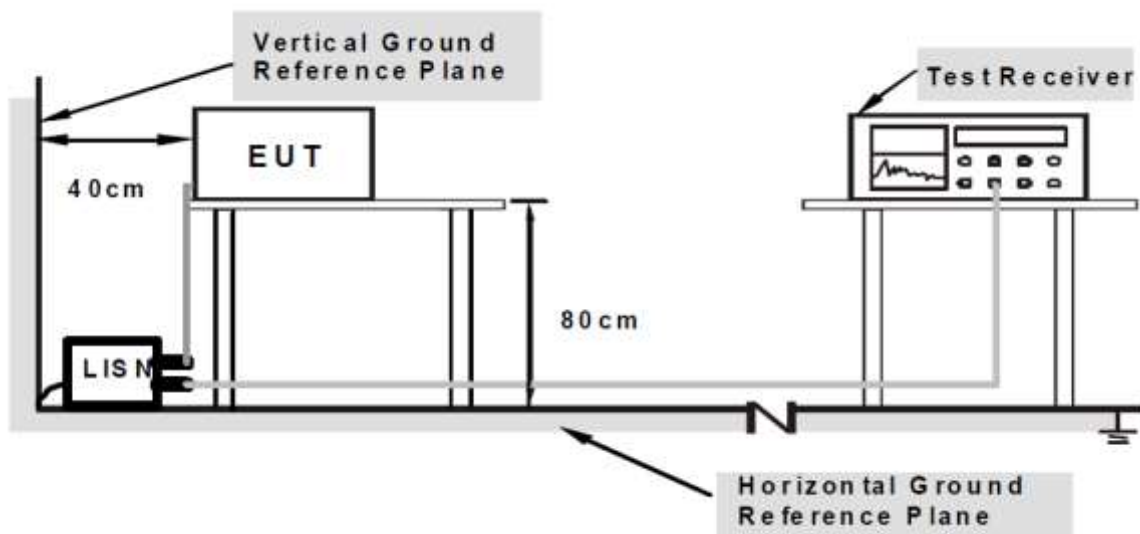

4.1.3 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.1.4 Deviation of Test Standard

No deviation.

4.1.5 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

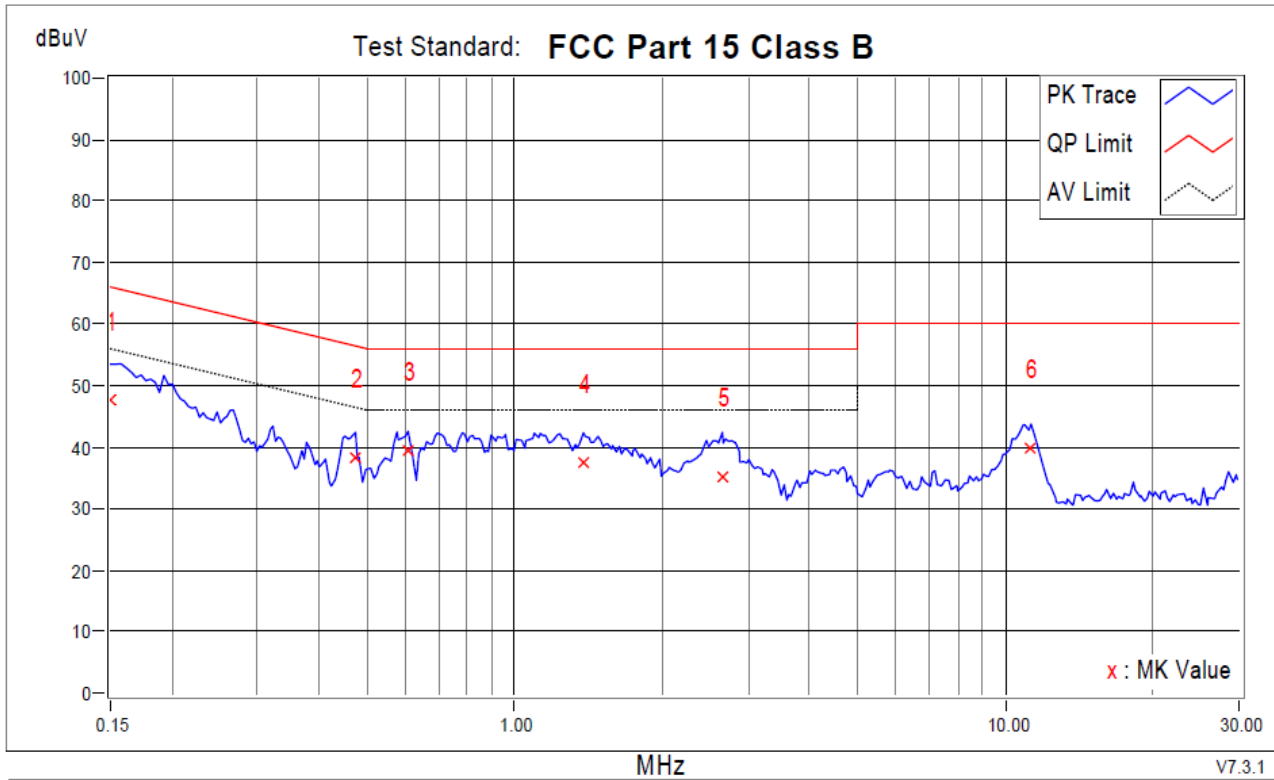


No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.15000	9.87	37.78	11.57	47.65	21.44	66.00	56.00	-18.35	-34.56	
2	0.47453	9.75	28.38	17.48	38.13	27.23	56.43	46.43	-18.30	-19.20	
3	0.60747	9.69	29.70	19.30	39.39	28.99	56.00	46.00	-16.61	-17.01	
4	1.38318	9.69	27.86	19.30	37.55	28.99	56.00	46.00	-18.45	-17.01	
5	2.65393	9.86	25.40	17.39	35.26	27.25	56.00	46.00	-20.74	-18.75	
+6	11.30203	10.40	29.48	23.75	39.88	34.15	60.00	50.00	-20.12	-15.85	

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

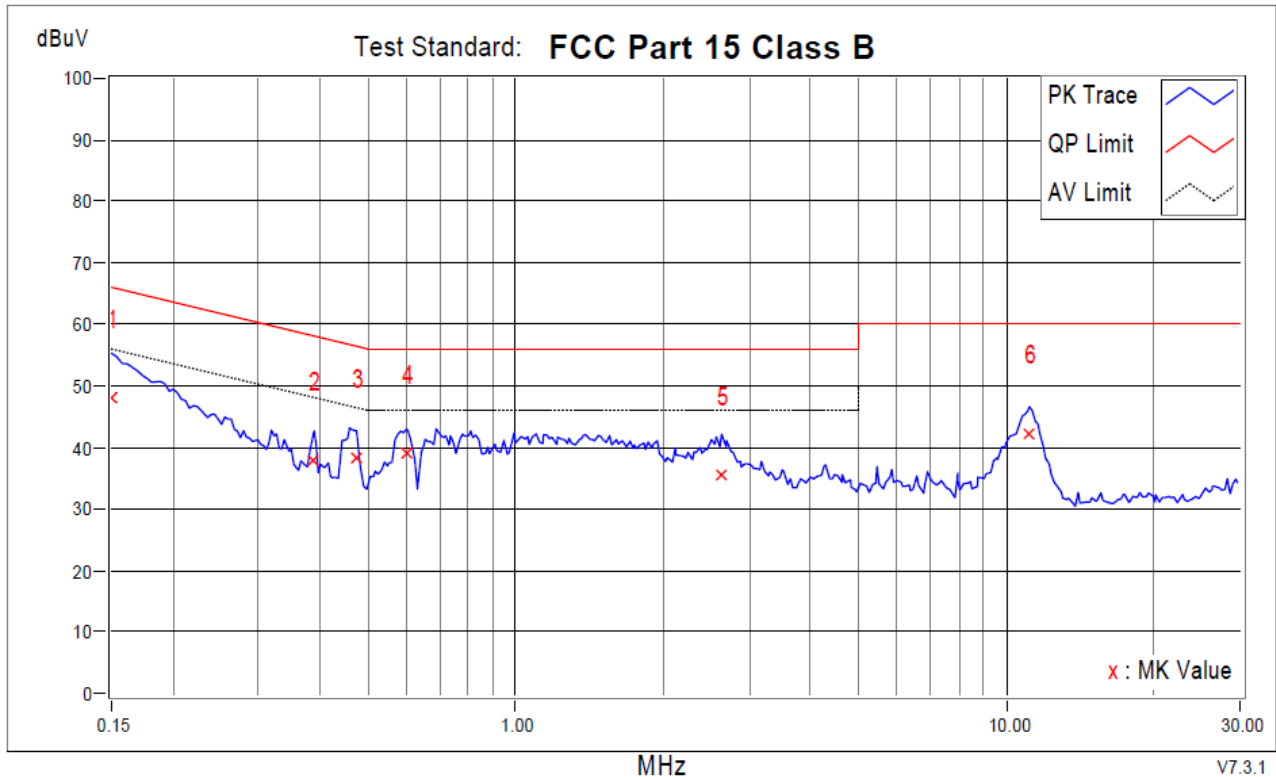

No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.15000	9.88	38.32	10.29	48.20	20.17	66.00	56.00	-17.80	-35.83	
2	0.38851	9.90	28.06	21.63	37.96	31.53	58.10	48.10	-20.14	-16.57	
3	0.47453	9.88	28.58	17.17	38.46	27.05	56.43	46.43	-17.98	-19.39	
4	0.59965	9.86	29.14	20.22	39.00	30.08	56.00	46.00	-17.00	-15.92	
5	2.63047	10.02	25.56	16.61	35.58	26.63	56.00	46.00	-20.42	-19.37	
+6	11.16518	10.51	31.54	26.17	42.05	36.68	60.00	50.00	-17.95	-13.32	

REMARKS:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

4.2 Number of Hopping Frequency Used

4.2.1 Limit

At least 15 channels frequencies, and should be equally spaced.

4.2.2 Test Setup

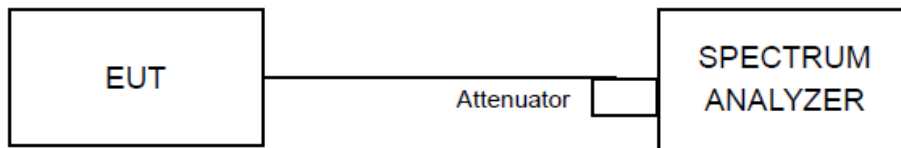

4.2.3 Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.2.4 Deviation of Test Standard

No deviation.

4.2.5 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

GFSK



$\pi/4$ QPSK




4.3 Dwell Time on Each Channel

4.3.1 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.3.2 Test Setup

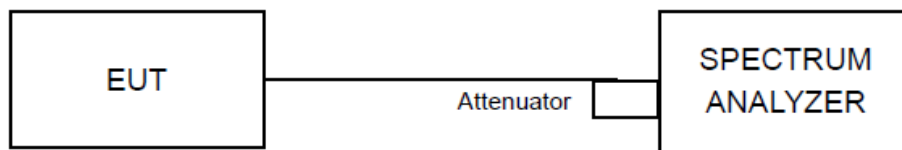

4.3.3 Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

4.3.4 Deviation of Test Standard

No deviation.

4.3.5 Test Results

GFSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (sec)	Limit (sec)
DH1	316	0.37	0.117	0.4
DH3	133	1.60	0.213	0.4
DH5	83	2.90	0.241	0.4


$\pi/4$ DQPSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (sec)	Limit (sec)
DH1	310	0.38	0.118	0.4
DH3	108	1.60	0.173	0.4
DH5	64	2.75	0.176	0.4


NOTE: Test plots of the transmitting time slot are shown on next page.

GFSK


DH1

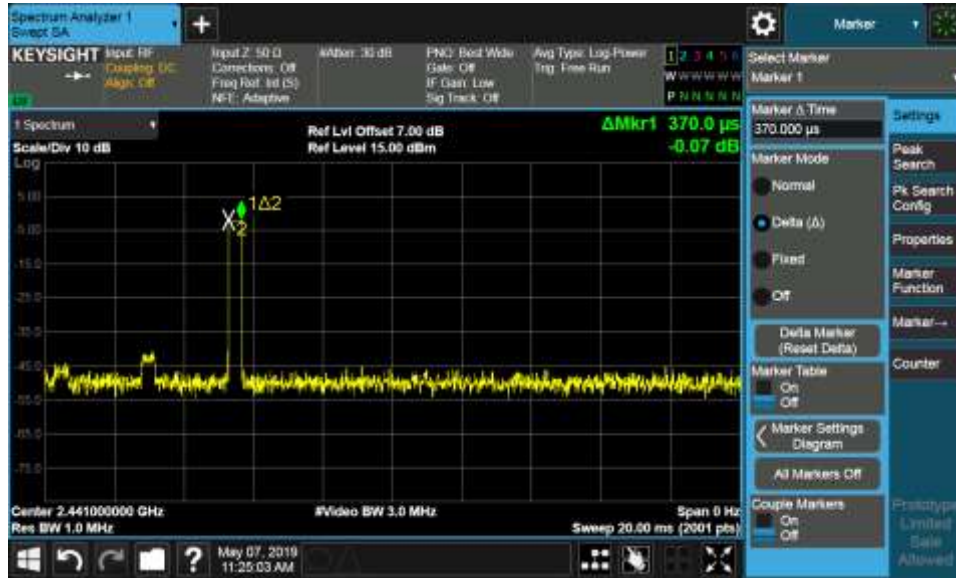

DH3

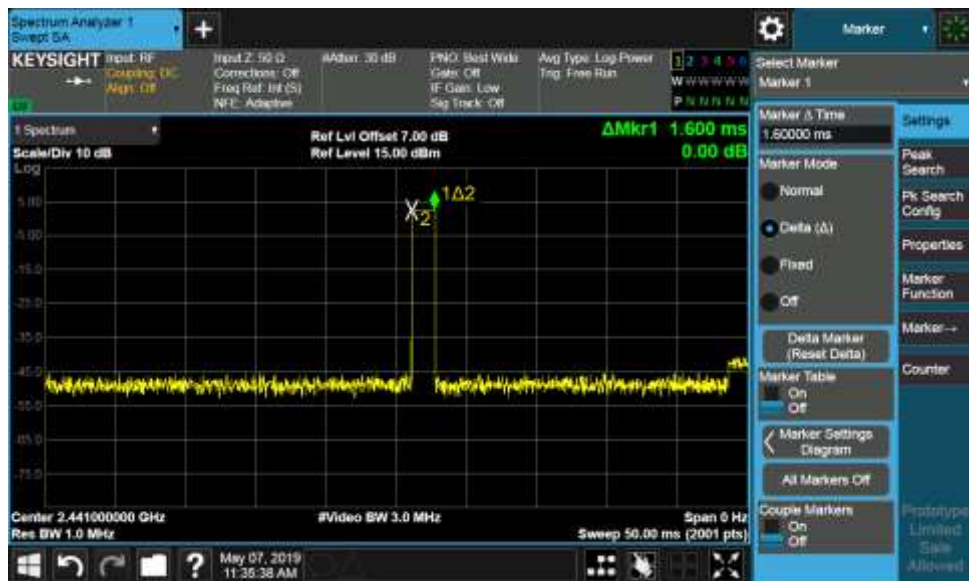

DH5

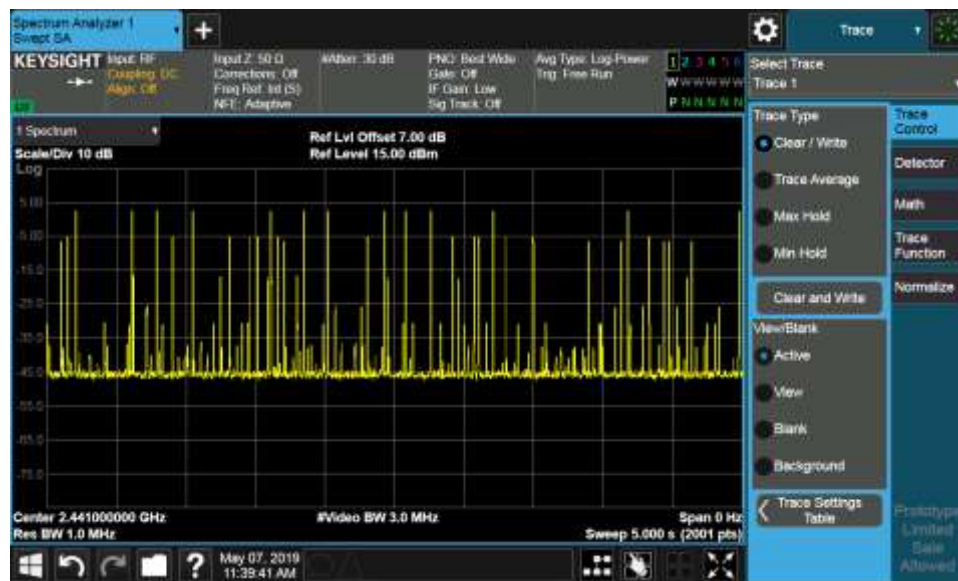


$\pi/4$ DQPSK


2DH1



2DH3

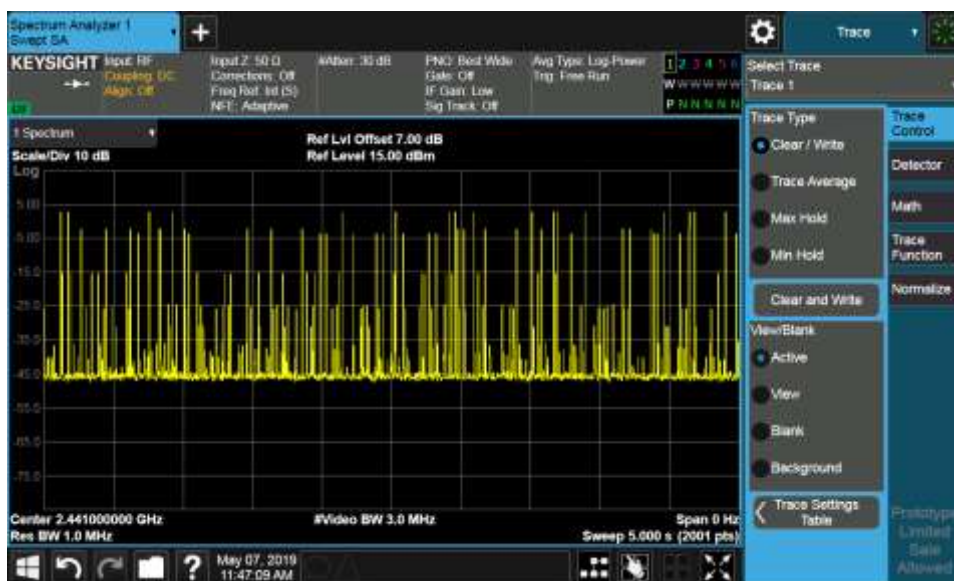

2DH5

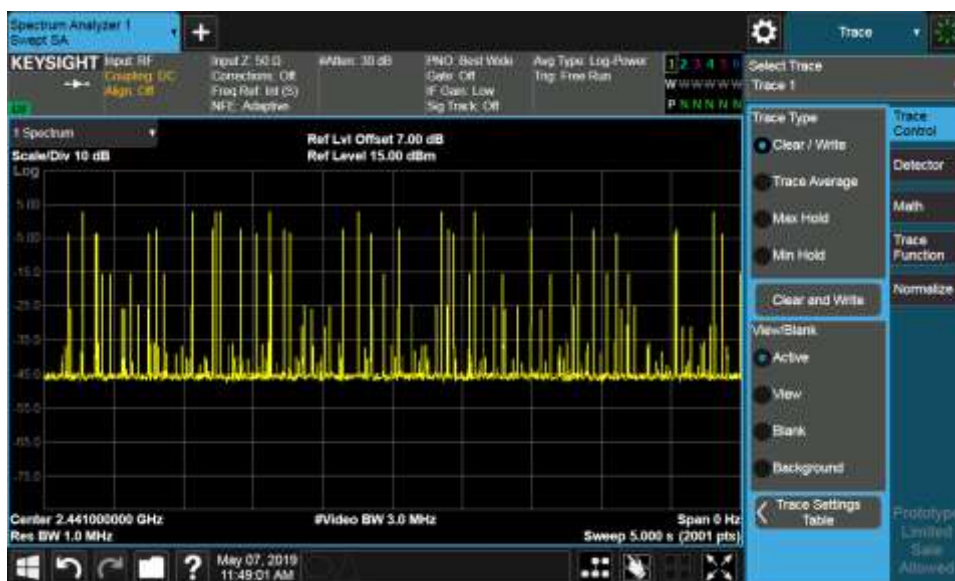


4.4 Channel Bandwidth

4.4.1 Limit

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.4.2 Test Setup

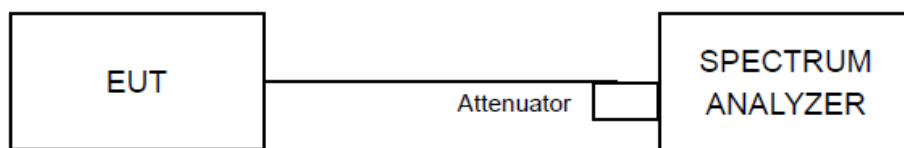

4.4.3 Test Procedures

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.4.4 Deviation of Test Standard

No deviation.

4.4.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	$\pi/4$ DQPSK
0	2402	0.9458	1.301
39	2441	0.9435	1.306
78	2480	0.9444	1.321

Spectrum Plot

GFSK,2402MHz



GFSK,2441MHz



GFSK,2480MHz



π /4DQPSK,2402MHz



π/4DQPSK,2441MHz



π/4DQPSK,2480MHz




4.5 Hopping Channel Separation

4.5.1 Limit

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater)

4.5.2 Test Setup

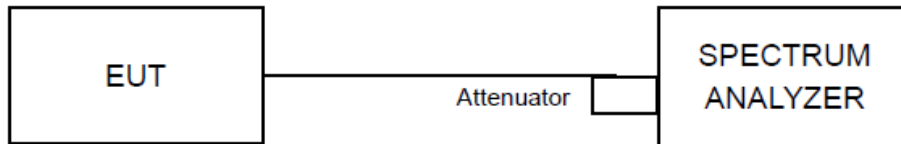

4.5.3 Test Procedures

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.5.4 Deviation of Test Standard

No deviation.

4.5.5 Test Results

Test Mode	Channel	Result	Limit	Pass / Fail
GFSK	HOP	1.010	0.629	PASS
$\pi/4$ DQPSK	HOP	1.020	0.871	PASS

Spectrum Plot

GFSK



$\pi/4$ DQPSK




4.6 Maximum Output Power

4.6.1 Limit

The Maximum Output Power Measurement is 125mW(21dBm).

4.6.2 Test Setup

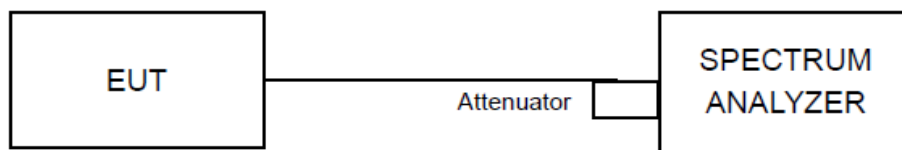

4.6.3 Test Procedures

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

4.6.4 Deviation of Test Standard

No deviation.

4.6.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.6 Test Results

Test Mode	Channel	Result (dBm)	Limit (dBm)	Pass / Fail
GFSK	0	-0.87	21	PASS
GFSK	39	-1.17	21	PASS
GFSK	78	-2.00	21	PASS
$\pi/4$ DQPSK	0	-0.02	21	PASS
$\pi/4$ DQPSK	39	-0.03	21	PASS
$\pi/4$ DQPSK	78	-1.09	21	PASS

Spectrum Plot of Worst Value

GFSK / CH 00



$\pi/4$ DQPSK / CH 00



4.7 Conducted Out of Band Emission Measurement

4.7.1 Limit

Below –20dB of the highest emission level of operating band (in 100kHz RBW).

4.7.2 Test Procedures

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.3 Deviation of Test Standard

No deviation.

4.7.4 Test Result

TestMode	ChName	Channel	Max. Level	Result	Limit	Verdict
DH5	Low	2402	-0.80	-25.53	-20.87	PASS
DH5	High	2480	-1.84	-55.42	-21.84	PASS
DH5	Low	HOP	-0.83	-25.61	-20.83	PASS
DH5	High	HOP	-1.83	-56.06	-21.83	PASS
2DH5	Low	2402	-0.80	-25.53	-20.87	PASS
2DH5	High	2480	-1.84	-55.42	-21.84	PASS
2DH5	Low	HOP	-0.89	-27.60	-20.89	PASS
2DH5	High	HOP	-1.92	-56.05	-21.92	PASS

GFSK

Hopping disabled_ Low Channel




Hopping disabled_ High Channel



Hopping enabled_ Low Channel



Hopping enabled_ High Channel

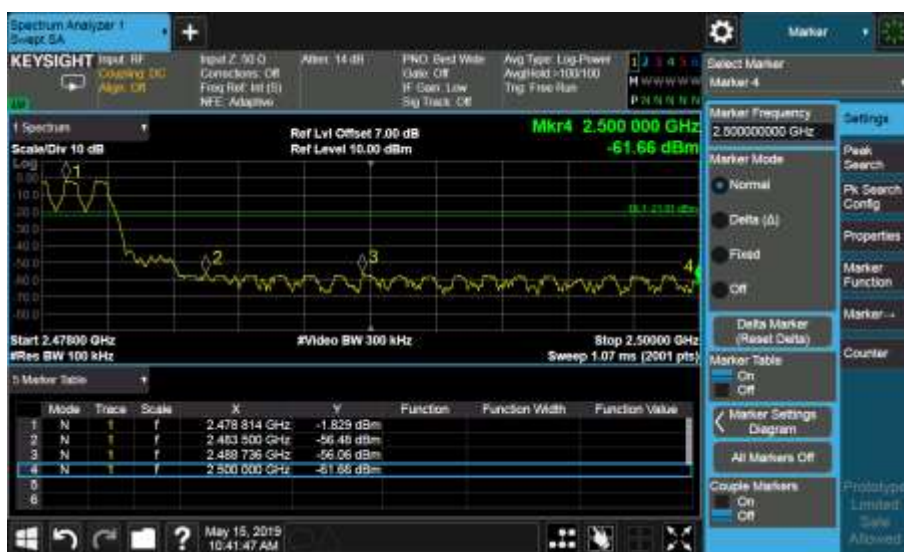

$\pi/4$ DQPSK

Hopping disabled_ Low Channel



Hopping disabled_ High Channel



Hopping enabled_ Low Channel



Hopping enabled_ High Channel



Out of Band Emission

TestMode	Channel	FreqRange	RefLevel	Result	Limit	Verdict
DH5	2402	30~1000	-1.10	-57.01	-21.10	PASS
DH5	2402	1000~26500	-1.10	-47.11	-21.10	PASS
DH5	2441	30~1000	-1.43	-57.46	-21.43	PASS
DH5	2441	1000~26500	-1.43	-51.27	-21.43	PASS
DH5	2480	30~1000	-2.28	-56.26	-22.28	PASS
DH5	2480	1000~26500	-2.28	-52.44	-22.28	PASS
2DH5	2402	30~1000	-1.23	-57.12	-21.23	PASS
2DH5	2402	1000~26500	-1.23	-46.95	-21.23	PASS
2DH5	2441	30~1000	-1.54	-55.01	-21.54	PASS
2DH5	2441	1000~26500	-1.54	-56.89	-31.54	PASS
2DH5	2480	30~1000	-2.36	-57.08	-22.36	PASS
2DH5	2480	1000~26500	-2.36	-51.94	-22.36	PASS

GFSK

2402MHz





2441MHz





2480MHz





$\pi/4$ DQPSK

2402MHz





2441MHz





2480MHz





4.8 Radiated Emission Measurement

4.8.1 Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.8.2 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on a 80cm height table above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotate table was turned from 0 degree to 360 degree to find the maximum reading.

- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on a 80cm height (above 1GHz is 1.5m height) table above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for RMS Average (Duty cycle < 98 %) for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle $\geq$ 98 %) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup


For Radiated emission between 30MHz~1000MHz

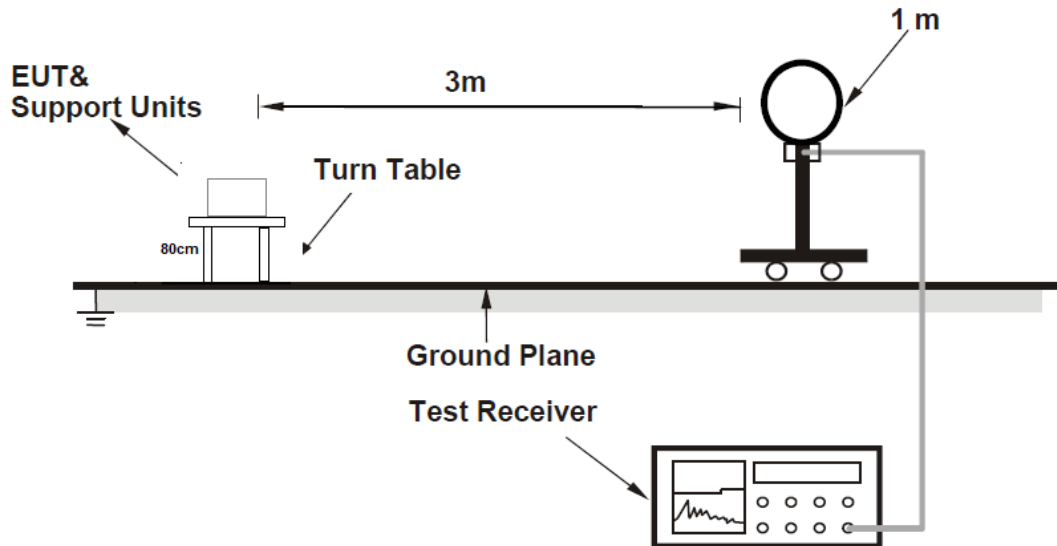

For Radiated emission between 30MHz~1000MHz

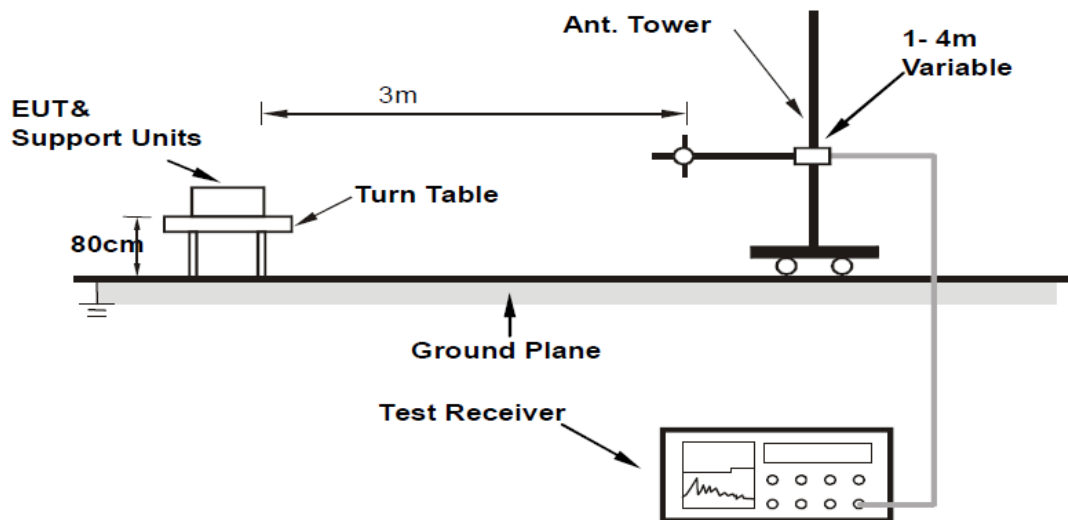

For Radiated emission above 1GHz

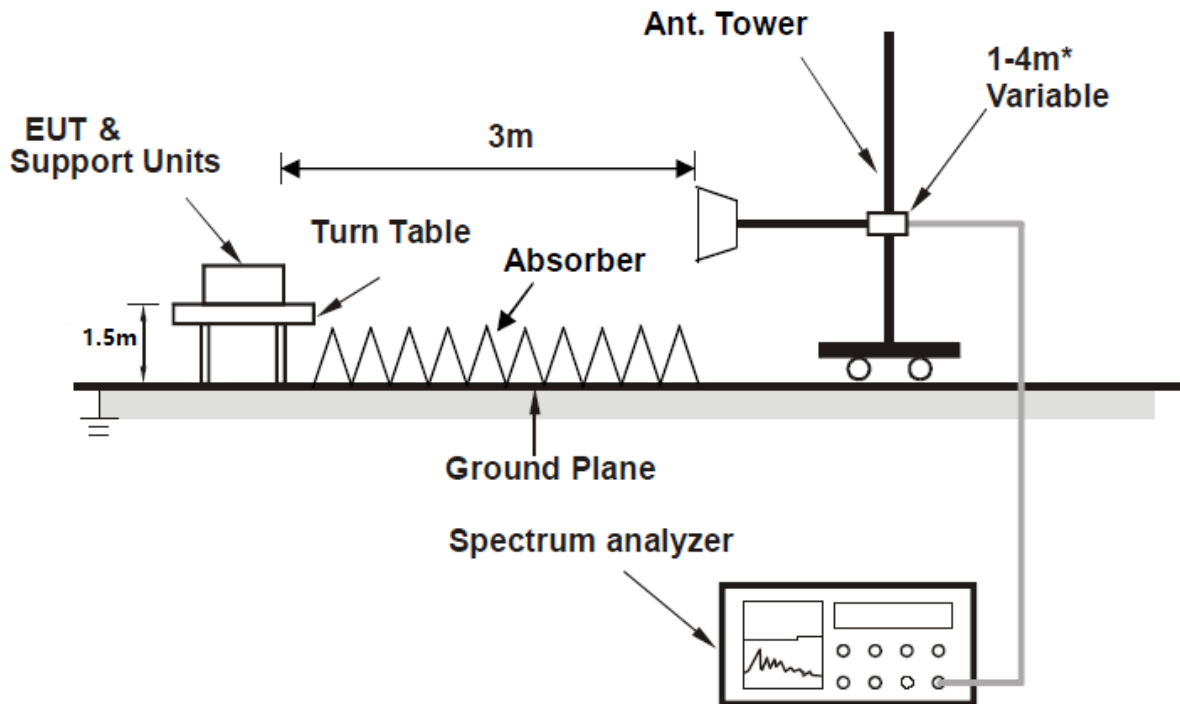

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.8.6 Test Results

Radiated Emissions Range 9kHz~30MHz

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Radiated Emissions Range 30MHz~1GHz

Channel		TX Channel 0		Detector Function		Quasi-Peak (QP)	
Frequency Range		30MHz ~ 1GHz		Antenna Polarity		Horizontal	
Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)		
1	83.9320	28.33	40.00	-11.67	-14.05		
2	95.9600	34.75	43.50	-8.75	-13.88		
3	103.1380	29.26	43.50	-14.24	-13.03		
4	107.9880	34.41	43.50	-9.09	-12.36		
5	120.0160	32.37	43.50	-11.13	-11.71		
6	396.0780	32.15	46.50	-14.35	-7.84		

REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Test Plot:

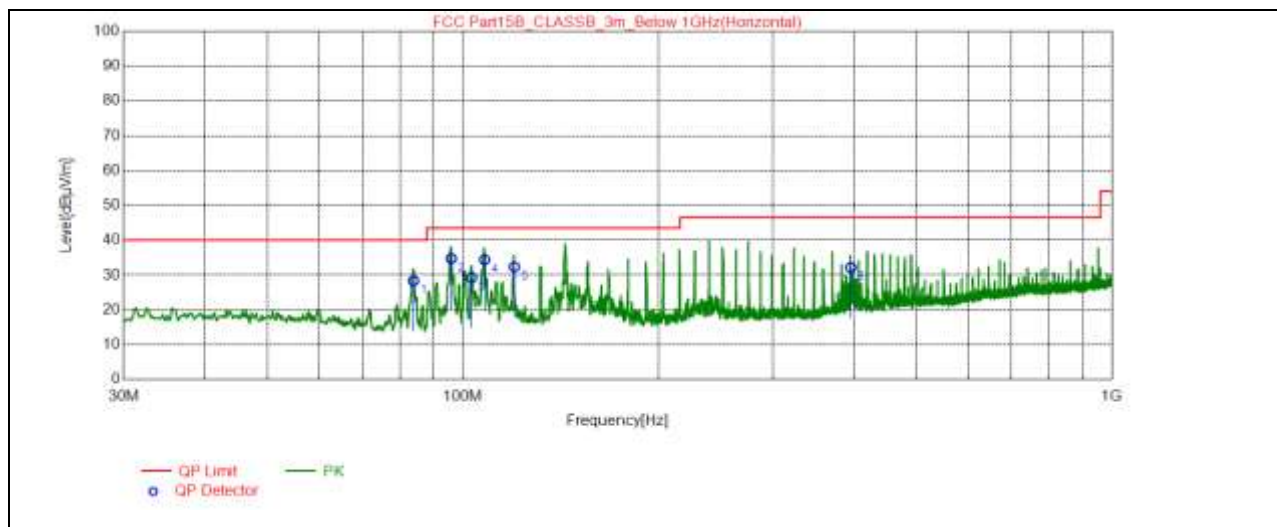


Channel		TX Channel 0		Detector Function		Quasi-Peak (QP)	
Frequency Range		30MHz ~ 1GHz		Antenna Polarity		Vertical	
Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)		
1	83.9320	23.56	40.00	-16.44	-14.05		
2	95.9600	28.18	43.50	-15.32	-13.88		
3	120.0160	24.24	43.50	-19.26	-11.71		
4	239.9080	26.23	46.50	-20.27	-10.78		
5	408.1060	24.77	46.50	-21.73	-7.68		
6	456.0240	27.62	46.50	-18.88	-6.61		

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Test Plot:

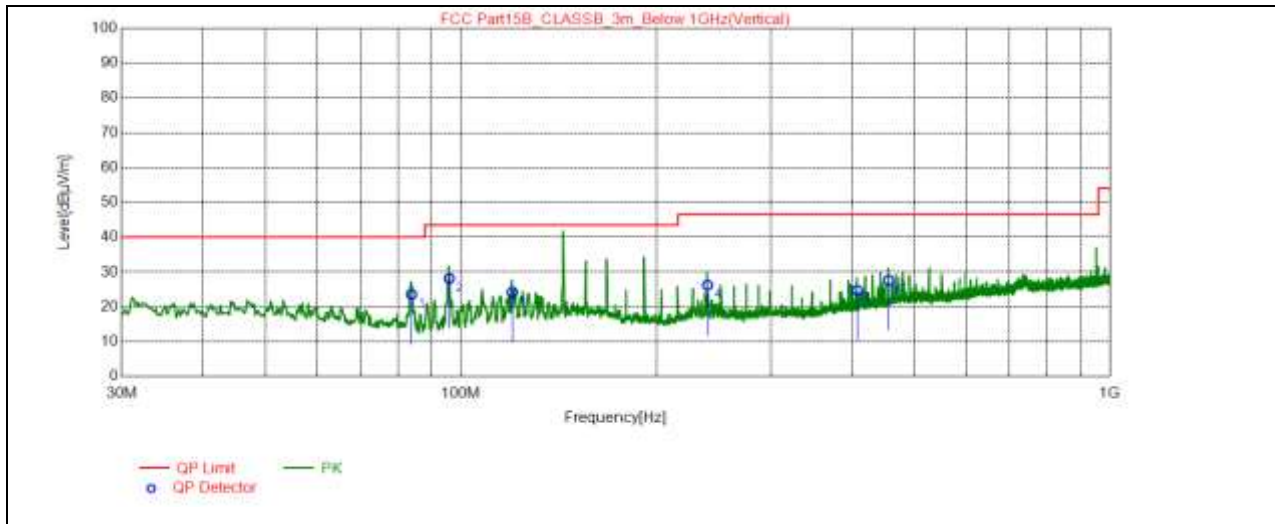

Radiated Emission Range 1GHz~10th Harmonic

GFSK

Channel		TX Channel 0		Detector Function		Peak (PK)	
Frequency Range		1GHz ~ 25GHz				Average (AV)	
Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4804.00	63.33	74.00	-20.09	4.38	H	PK
2	4804.00	61.92	54.00	-1.50	4.38	H	AV
3	4804.00	59.70	74.00	-23.72	4.38	V	PK
4	4804.00	57.96	54.00	-5.46	4.38	V	AV

Channel		TX Channel 39		Detector Function		Peak (PK)	
Frequency Range		1GHz ~ 25GHz				Average (AV)	
Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4884.00	64.15	74.00	-19.17	4.54	H	PK
2	4884.00	63.00	54.00	-0.32	4.54	H	AV
3	4884.00	58.80	74.00	-24.52	4.54	V	PK
4	4884.00	57.15	54.00	-6.17	4.54	V	AV

Channel		TX Channel 78		Detector Function		Peak (PK)	
Frequency Range		1GHz ~ 25GHz				Average (AV)	
Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4960.00	62.83	74.00	-20.40	4.72	H	PK
2	4960.00	60.85	54.00	-2.37	4.72	H	AV
3	4960.00	58.12	74.00	-25.11	4.72	V	PK
4	4960.00	54.97	54.00	-8.26	4.72	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

π/4DQPSK

Channel		TX Channel 0		Detector Function		Peak (PK)	
Frequency Range		1GHz ~ 25GHz				Average (AV)	
Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4804.00	63.33	74.00	-20.09	4.38	H	PK
2	4804.00	59.58	54.00	-3.84	4.38	H	AV
3	4804.00	58.14	74.00	-25.28	4.38	V	PK
4	4804.00	55.56	54.00	-7.86	4.38	V	AV

Channel		TX Channel 39		Detector Function		Peak (PK)	
Frequency Range		1GHz ~ 25GHz				Average (AV)	
Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4884.00	63.42	74.00	-19.90	4.54	H	PK
2	4884.00	60.50	54.00	-2.82	4.54	H	AV
3	4884.00	58.29	74.00	-25.03	4.54	V	PK
4	4884.00	55.69	54.00	-7.63	4.54	V	AV

Channel		TX Channel 78		Detector Function		Peak (PK)	
Frequency Range		1GHz ~ 25GHz				Average (AV)	
Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4960.00	61.44	74.00	-21.79	4.72	H	PK
2	4960.00	59.19	54.00	-4.03	4.72	H	AV
3	4960.00	54.72	74.00	-28.51	4.72	V	PK
4	4960.00	51.40	54.00	-11.82	4.72	V	AV

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

--- END ---