

A

承认书

PPROVAL SHEET

客 户
Customer name

星卡科技

客户料号

1.02.23.0110

Customer P/N

品 名

FPC: L*W=18*9.4MM, 1.13黑色线接一代端子L=65MM,
ROHS

Article Description

同讯料號

KC. IA. 00467

TOXU Part No.

承认书号码

A20231019-001

Approval sheet No.

日 期

2023.10.25

Date

承认填写栏

供应商确认 (供方填写栏)			客户承认 (需方填写栏)		
工程	品质	批准	工程	品质	批准
深圳市同讯精密技术有限公司 2023.10.20 资料发行章					
公司盖章:			公司盖章:		
日期			日期		
客户批示:			☐ 可接受 ☐ 有条件接受		
备注:					

TOXU

同讯技术

深圳市同讯精密技术有限公司

ShenZhen Tongxun Precision Technology Co., Ltd

地址: 深圳市龙华区福城街道茜坑社区茜坑路52号

ADDRESS: 5th floor, No. 52, Xikeng Road, Xikeng community, Fucheng street, Longhua District, Shenzhen

TEL: 0755-28199597

WEB: www.toxutech.com

Mail: sales@toxutech.com/sales01@toxutech.com/sales02@toxutech.com

POST CODE: 518100

KC.IA.00467(DF51)

Antenna Specification

Manufacturer: ShenZhen Tongxun Precision Technology Co. , Ltd
5th floor, No. 52,Xikeng Road , Xikeng community, Fucheng street,
Longhua District, Shenzhen

1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

2.Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig .

2-1. Frequency Band:

Frequency Band	MHz
WiFi/BT	2400-2500MHz

2-2. Impedance

50 ohm nominal

2-3. VSWR

2-3-1.Measurement frequency points and VSWR value


Frequency Band(MHz)	2400	2500
Typical Value: (VSWR)	1.6	1.4

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 TOXU TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.IA.00467 Antenna Specification		SPEC REV. P0

2-3-4 Measuring Method

1. A 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR.
2. Keeping this jig away from metal at least 20 cm

2-3-5 Picture

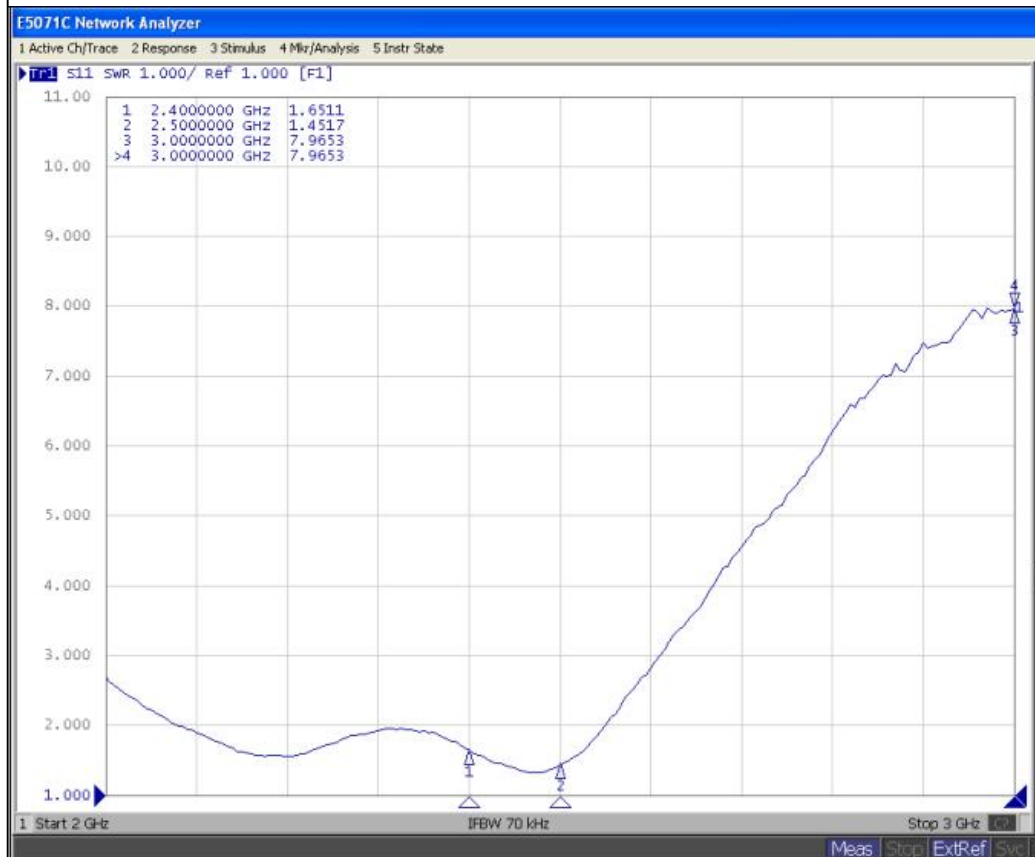


UNLESS OTHER SPECIFIED TOLERANCES ON :			TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.IA.00467 Antenna Specification			SPEC REV.
			P0

2-4. Efficiency and Gain

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition






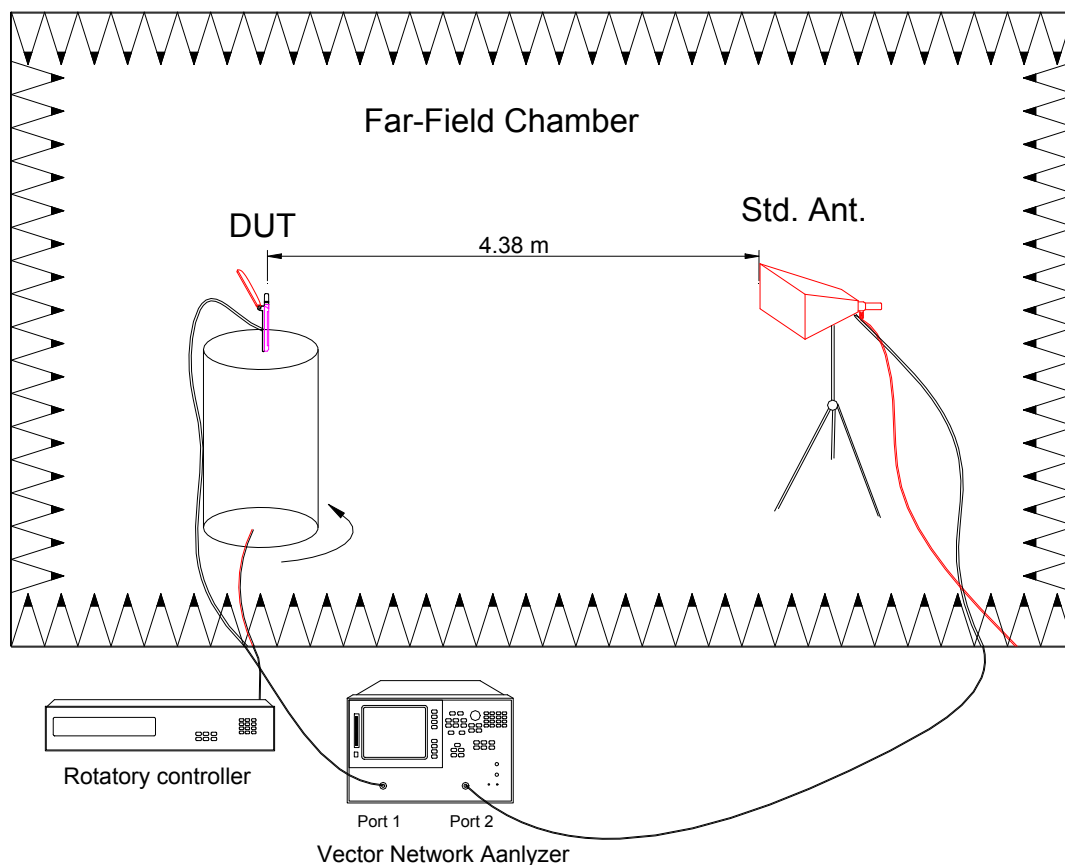


1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :		 同讯技术	TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±		HOLEDIA=±	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.IA.00467 Antenna Specification			SPEC REV.
			P0

2-4-1 Efficiency and Gain and 3D Date

Frequency/MHz	MaxGain/dBi	Efficiency / %
2400	1.05	43.81
2410	1.73	46.39
2420	1.86	47.67
2430	1.95	45.97
2440	1.91	45.56
2450	1.64	44.51
2460	1.68	45.24
2470	1.72	45.08
2480	1.85	46.9
2490	2.18	47.02
2500	2.13	47.55

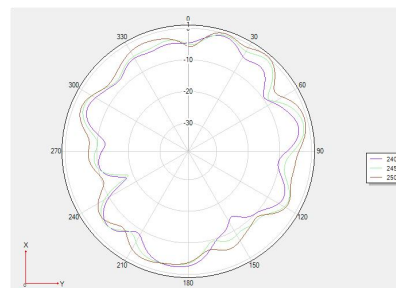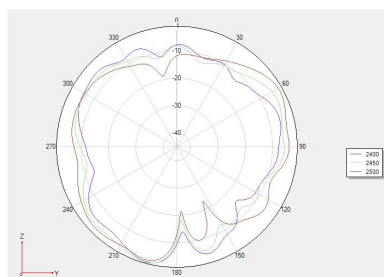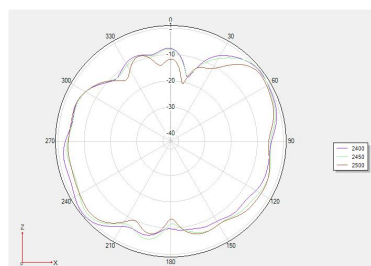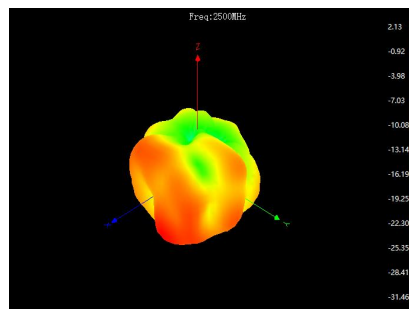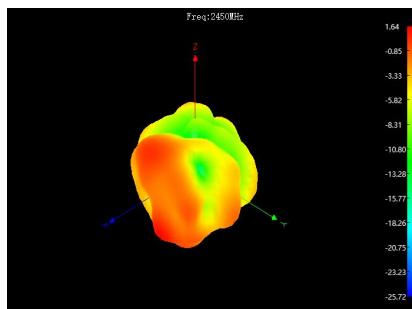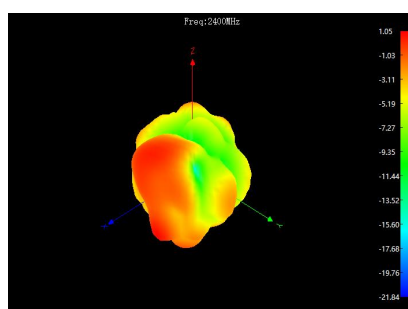


UNLESS OTHER SPECIFIED TOLERANCES ON :			TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :		UNIT : mm	
DRAWN BY: LI		CHECKED BY: YS	
DESIGNED BY: De wen		APPROVED BY: YS	
THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION			
TITLE : KC.IA.00467 Antenna Specification			SPEC REV.
			P0

3. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing

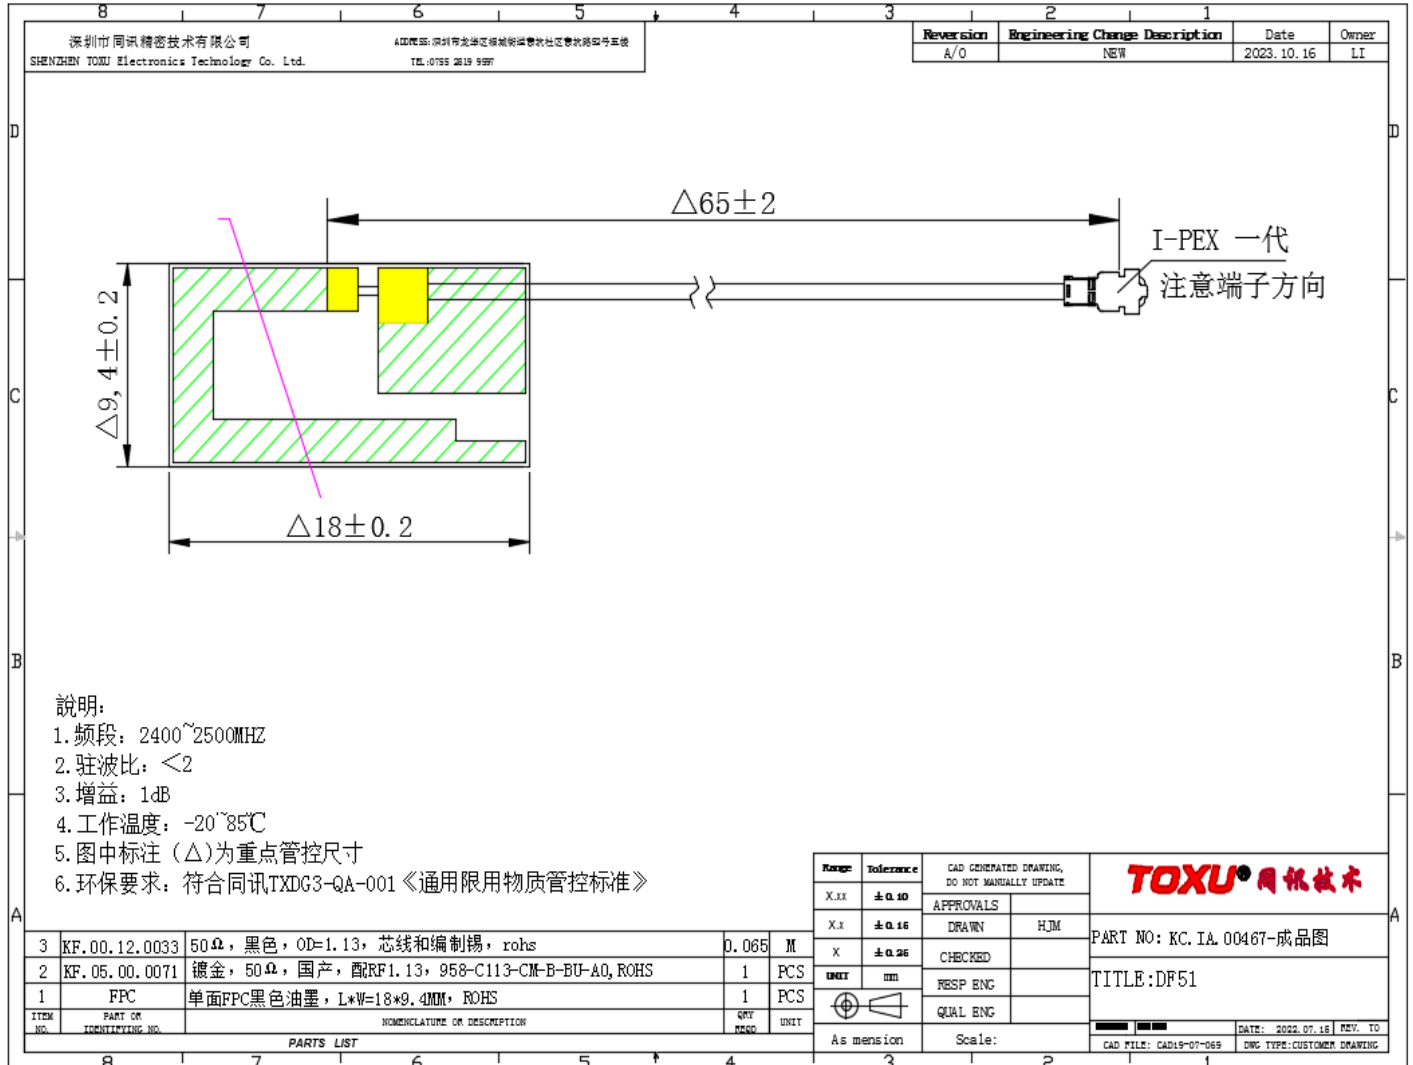


UNLESS OTHER SPECIFIED TOLERANCES ON :			TOXU TECHNOLOGY CO., LTD.
X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.IA.00467 Antenna Specification			SPEC REV. P0

4 .Packaging specification:

Product number: xxxxx			
Product model: xxxxx			
一、 Label requirements:			
Customer	xxx		
supplier	xxxxxx		
Material coding	xx		
Product model	xx		
Number	XXX PCS	Factory date	X X X
Remarks			
二、 Boxing:			
Job description:			
1. Inner packaging:			
XXpcs A bag			
2. External packaging:			
Xx PCS ;			
3. Matters needing attention:			
a. Whether to add partition and pearl cotton;			
b. Label attachments, such as ROHS, etc.;			

PE 袋



UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		TOXU 同讯技术 TOXU TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.IA.00467 Antenna Specification		SPEC REV.
		P0