

Report on the Radio Testing
For
CMR Surgical Limited
on
Versius RFID Section
Report no. TRA-044411-45-02C
6 November 2020


RF914 6.0



Report Number: TRA-044411-45-02C
Issue: C

REPORT ON THE RADIO TESTING OF A
CMR Surgical Limited
Versius RFID Section
WITH RESPECT TO SPECIFICATION
FCC 47CFR 15.225

TEST DATE: 2020-09-24 to 2020-09-29

Tested and
Written by: 

A Tosif
Radio Test Engineer

Approved by:

J Charters
Lab Manager

Date: 6 November 2020

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
[2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	1 October 2020	Original
B	5 November 2020	Section 2 updated
C	6 November 2020	Sections 7.4 and 15.6 updated

2 Summary

TEST REPORT NUMBER:	TRA-044411-45-02C
WORKS ORDER NUMBER:	TRA-044411-08
PURPOSE OF TEST:	Certification
TEST SPECIFICATION:	47CFR15.225
EQUIPMENT UNDER TEST (EUT):	Versius RFID Section
FCC IDENTIFIER:	2ASDBMA-0382-5
MANUFACTURER/AGENT:	CMR Surgical Limited
ADDRESS:	Unit 2, Crome Lea Business Park, Madingley Road, Cambridge, CB23 7PH United Kingdom
CLIENT CONTACT:	Andrew Thompson ☎ +44 (0)7864 922474 ✉ andrew.thompson@cmrsurgical.com
ORDER NUMBER:	PO-017344v2.0
TEST DATE:	2020-09-24 to 2020-09-29
TESTED BY:	A Tosif Element

2.1 Test Summary

<i>Test Method and Description</i>	<i>Requirement Clause, 47CFR15</i>	<i>Applicable to this equipment</i>	<i>Result / Note</i>
Radiated spurious emissions, below 30 MHz	15.225(d)	☒	Pass
Radiated spurious emissions	15.209	☒	Pass
AC power line conducted emissions	15.207	☒	Pass
Occupied bandwidth	15.215(c)	☒	Pass
Field strength of fundamental	15.225(a), (b) and (c)	☒	Pass
Frequency stability	15.225(e)	☒	Pass

Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record	3
2	Summary	4
2.1	Test Summary	5
3	Contents	6
4	Introduction	7
5	Test Specifications	8
5.1	Normative References	8
5.2	Deviations from Test Standards	8
6	Glossary of Terms	9
7	Equipment under Test	10
7.1	EUT Identification	10
7.2	System Equipment	10
7.3	EUT Mode of Operation	10
7.4	EUT Radio Parameters	10
7.5	EUT Description	10
8	Modifications	11
9	EUT Test Setup Photographs	12
10	General Technical Parameters	14
10.1	Normal Conditions	14
10.2	Varying Test Conditions	14
11	Radiated emissions below 30 MHz	15
11.1	Definitions	15
11.2	Test Parameters	15
11.3	Test Limit	15
11.4	Test Method	16
11.5	Test Equipment	16
11.6	Test Results	17
12	Radiated emissions	18
12.1	Definitions	18
12.2	Test Parameters	18
12.3	Test Limit	18
12.4	Test Method	18
12.5	Test Equipment	19
12.6	Test Results	20
13	Occupied Bandwidth	21
13.1	Definition	21
13.2	Test Parameters	21
13.3	Test Limit	21
13.4	Test Method	21
13.5	Test Equipment	22
13.6	Test Results	22
14	Transmitter output power (fundamental radiated emission)	23
14.1	Definition	23
14.2	Test Parameters	23
14.3	Test Limit	23
14.4	Test Method	24
14.5	Test Equipment	24
14.6	Test Results	25
15	Frequency stability	26
15.1	Definition	26
15.2	Test Parameters	26
15.3	Test Limit	26
15.4	Test Method	26
15.5	Test Equipment	27
15.6	Test Results	27
16	AC power-line conducted emissions	28
16.1	Definition	28
16.2	Test Parameters	28
16.3	Test Limit	28
16.4	Test Method	28
16.5	Test Set-up Photograph	29
16.6	Test Equipment	29
16.7	Test Results	30
17	Measurement Uncertainty	31

4 Introduction

This report TRA-044411-45-02C presents the results of the Radio testing on a CMR Surgical Limited, Versius RFID Section to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for CMR Surgical Limited by Element, at the address detailed below.

☒	Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	☐	Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK
-------------------------------------	---	--------------------------	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

The test site requirements of ANSI C63.4-2014 are met up to 1 GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 Normative References

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

5.2 Deviations from Test Standards

There were no deviations from the test standard.

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada (nowISED)
ISED	Innovation, Science and Economic Development Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

7 Equipment under Test

7.1 EUT Identification

- Name: Versius RFID Section
- Serial Number: 0000454
- Model Number: MA-0382
- Software Revision: RN-0418
- Build Level / Revision Number: Rev5

7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

Tag (SN: 011494)

7.3 EUT Mode of Operation

The EUT was transmitting at 13.56 MHz.

7.4 EUT Radio Parameters

Frequency of operation:	13.56 MHz
Nominal Supply Voltage:	20 Vdc
Antenna Type:	PCB Loop, 7 turns, 14.2 x 14.4 mm

7.5 EUT Description


The EUT is a section of medical robot containing 13.56 MHz RFID reader. This report covers modular approval of this section only, and not the whole robot.


8 Modifications

No modifications were performed during this assessment.

9 EUT Test Setup Photographs

The following photograph shows basic EUT radiated set-up:

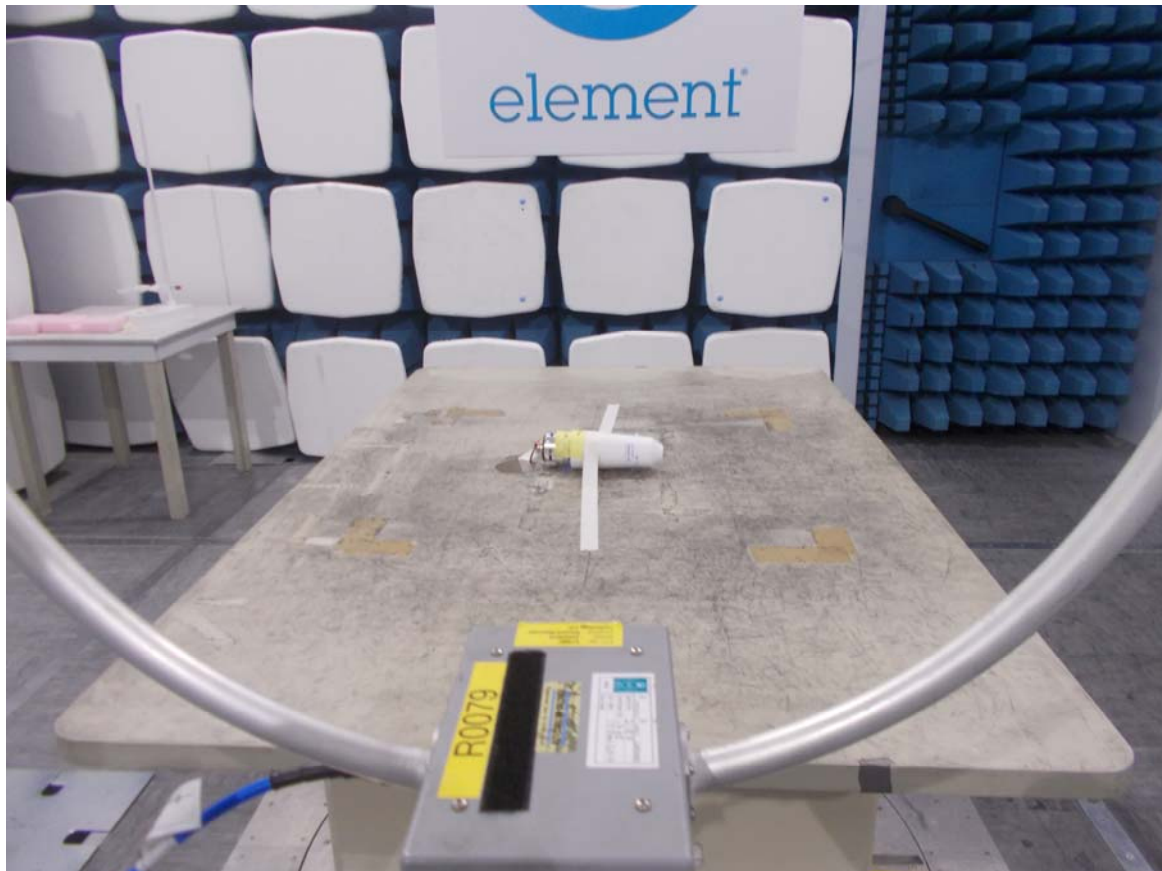

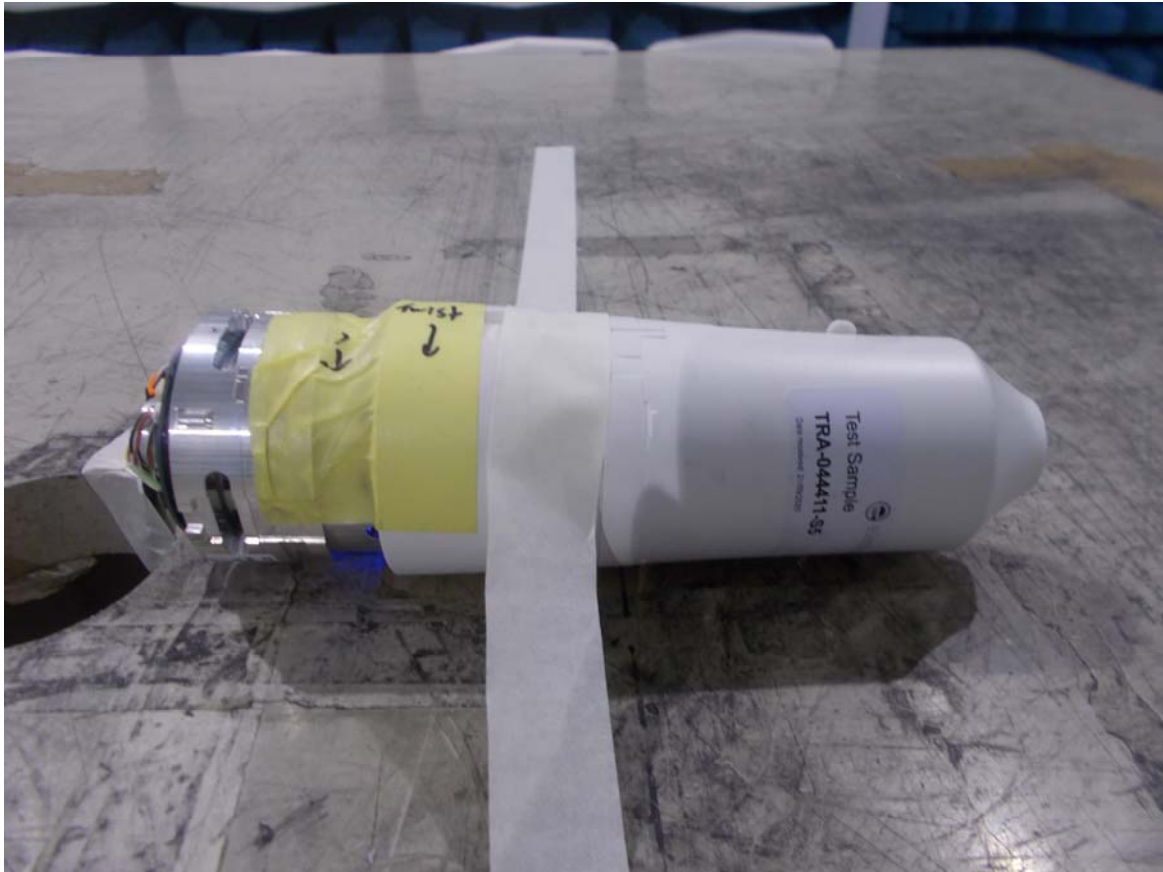

10 General Technical Parameters

10.1 Normal Conditions

The EUT was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 20 Vdc from external power supply.

10.2 Varying Test Conditions

Variation of temperature is required to ensure stability of the declared fundamental frequency. During frequency error testing the following variations were made:

	Nominal	Variation
☒	20 °C	-20 °C to +50 °C in 10 degree steps

Variation of supply voltage is required to ensure stability of the declared output power and frequency. During carrier power and frequency error testing the following variations were made:

	Nominal	Variation
☒	20 Vdc	17 Vdc and 23 Vdc

11 Radiated emissions below 30 MHz

11.1 Definitions

Out-of-band emissions

Emissions on a frequency or frequencies immediately outside the necessary bandwidth which result from the modulation process, but exclude spurious emissions.

Spurious emissions

Emissions on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Wireless Lab 2
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.4
EUT Frequency Measured:	13.56 MHz
Deviations From Standard:	None
Measurement Distance and Site:	1 m
EUT Height:	0.8 m
Measurement Antenna and Height:	60 cm shielded loop; 1 m
Measurement BW:	9 kHz to 150 kHz: 200 Hz; 150 kHz to 30 MHz: 9 kHz
Measurement Detector:	9 kHz to 90 kHz and 110 kHz to 490 kHz: Average, RMS Other frequencies below 30 MHz: Quasi-peak.

Environmental Conditions (Normal Environment)

Temperature: 21 °C	+15 °C to +35 °C (as declared)
Humidity: 43 % RH	20 % RH to 75 % RH (as declared)
Supply: 20 Vdc	As declared

11.3 Test Limit

Emissions from license-exempt transmitters shall comply with the field strength limits shown in the table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**General Field Strength Limits for License-Exempt Transmitters
at Frequencies below 30 MHz**

<i>Frequency, f (kHz)</i>	<i>Field Strength (μV/m)</i>	<i>Measurement Distance (m)</i>
9 to 490	2,400 / f	300
490 to 1,750	24,000 / f	30
1,750 to 30,000	30	30

n.b. Devices operated pursuant to §15.225 are exempt from complying with the restricted band requirements for the 13.36–13.41 MHz band only.

11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the EUT fundamental frequency was maximised by rotating the EUT through 360°, in three orthogonal planes, and adjusting the measurement antenna azimuth.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 9 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 9 kHz and 30 MHz are measured using a calibrated 60cm active loop antenna. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in $\mu\text{V/m}$ at the regulatory distance, using:

$$FS = 10^{(PR - CF) / 20}$$

Where,


PR is the power recorded on the receiver / spectrum analyzer in dB μV and includes any cable loss, antenna factor and pre-amplifier gain;

CF is the distance extrapolation factor in dB (where measurement distance different to limit distance);

Per FCC 47CFR15.31(f)(2), an extrapolation factor of 40 dB per decade was used for measurements at distances closer than specified.

This field strength value is then compared with the regulatory limit.

Figure i Test Setup

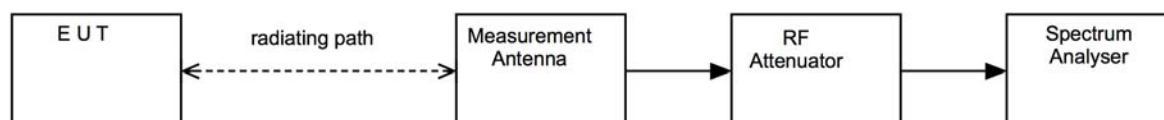


11.5 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Due For Calibration</i>
Ferrite Lined Chamber	Rainford	ATS	REF886	2022-07-29
Active Loop Antenna	EMCO	6502	R0079	2021-06-17
Spectrum Analyser	R&S	FSU50	U544	2021-06-17
Multimeter	Agilent	34405A	REF887	2020-10-07
Power Supply	Thurlby	PL310	REF239	Cal with REF887
Radiated Test Software	Element	Emissions R5	REF9000	Cal not required


11.6 Test Results

Emission Frequency (MHz)	Receiver Level (dBμV/m)	Measurement Distance (m)	Limit Distance (m)	Extrapolation Factor (dB)	Field Strength (μV/m)	Result
No emissions were detected within 20 dB of the limit						

9 kHz – 490 kHz

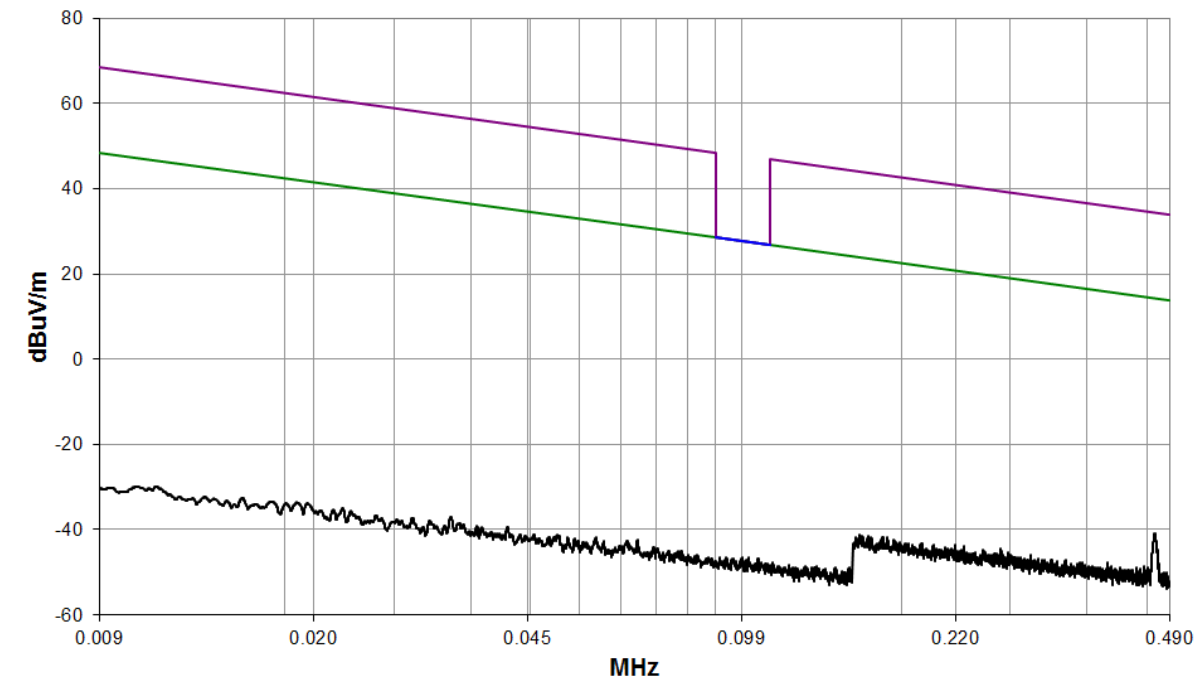

490 kHz – 30 MHz

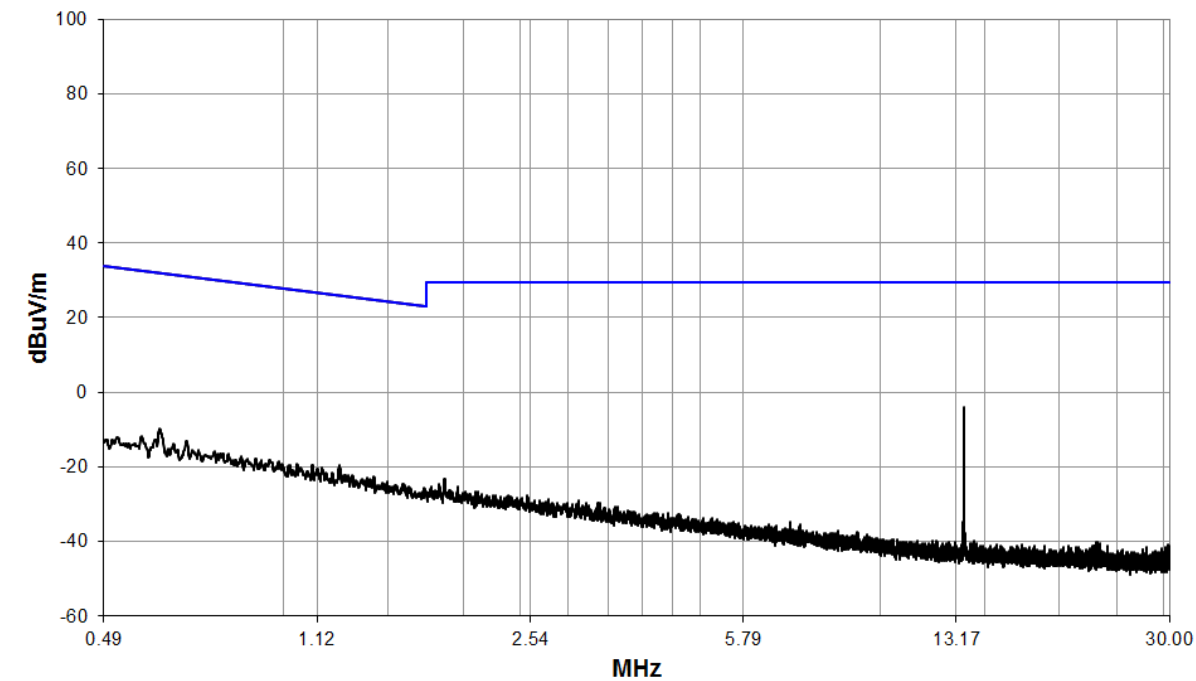

12 Radiated emissions

12.1 Definitions

Out-of-band emissions

Emissions on a frequency or frequencies immediately outside the necessary bandwidth which result from the modulation process, but exclude spurious emissions.

Spurious emissions

Emissions on a frequency or frequencies which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

12.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Wireless Lab 2
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5
EUT Frequency Measured:	13.56 MHz
Deviations From Standard:	None
Measurement BW:	120 kHz
Measurement Detector:	Quasi-peak

Environmental Conditions (Normal Environment)

Temperature: 19 °C	+15 °C to +35 °C (as declared)
Humidity: 43 % RH	20 % RH to 75 % RH (as declared)
Supply: 20 Vdc	As declared

12.3 Test Limit

Emissions from license-exempt transmitters shall comply with the field strength limits shown in the table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**General Field Strength Limits for License-Exempt Transmitters
at Frequencies above 30 MHz**

<i>Frequency (MHz)</i>	<i>Field Strength (μV/m at 3 m)</i>	<i>Field Strength (dBμV/m at 3 m)</i>
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure ii, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dBμV/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dBμV;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance is different to limit distance);

This field strength value is then compared with the regulatory limit.

Figure ii Test Setup

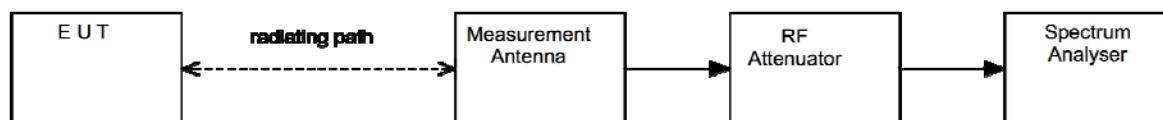


12.5 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Due For Calibration</i>
Ferrite Lined Chamber	Rainford	ATS	REF886	2022-07-29
Bilog Antenna	Chase	CBL6111B	REF2218	2021-10-23
Pre-Amp (9 kHz - 1 GHz)	Sonoma	310	REF927	2021-07-21
Spectrum Analyser	R&S	FSU50	U544	2021-06-17
Multimeter	Agilent	34405A	REF887	2020-10-07
Power Supply	Thurlby	PL310	REF239	Cal with REF887
Radiated Test Software	Element	Emissions R5	REF9000	Cal not required

12.6 Test Results

Detector	Frequency (MHz)	Measured Emission (dB μ V)	Factors (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Result
Quasi-peak	40.7	46.1	-12.0	34.1	40.0	PASS
Quasi-peak	45.7	42.5	-14.6	27.9	40.0	PASS
Quasi-peak	175.0	44.4	-16.2	28.2	43.5	PASS
Quasi-peak	250.0	49.2	-13.4	35.8	46.0	PASS
Quasi-peak	718.7	37.0	-3.6	33.4	46.0	PASS
Quasi-peak	732.3	39.8	-3.1	36.7	46.0	PASS
Quasi-peak	745.8	39.6	-3.1	36.5	46.0	PASS
Quasi-peak	759.4	37.8	-2.9	34.9	46.0	PASS
Quasi-peak	759.4	45.8	-2.9	42.9	46.0	PASS
Quasi-peak	772.9	37.0	-2.8	34.2	46.0	PASS
Quasi-peak	786.5	45.3	-2.9	42.4	46.0	PASS
Quasi-peak	813.6	39.7	-3.1	36.6	46.0	PASS
Quasi-peak	840.7	37.0	-1.8	35.2	46.0	PASS
Quasi-peak	867.8	38.0	-1.6	36.4	46.0	PASS
Quasi-peak	895.0	39.4	-1.6	37.8	46.0	PASS
Quasi-peak	922.1	36.9	-0.7	36.2	46.0	PASS
Quasi-peak	949.2	31.0	1.0	32.0	46.0	PASS

30 MHz – 1000 MHz

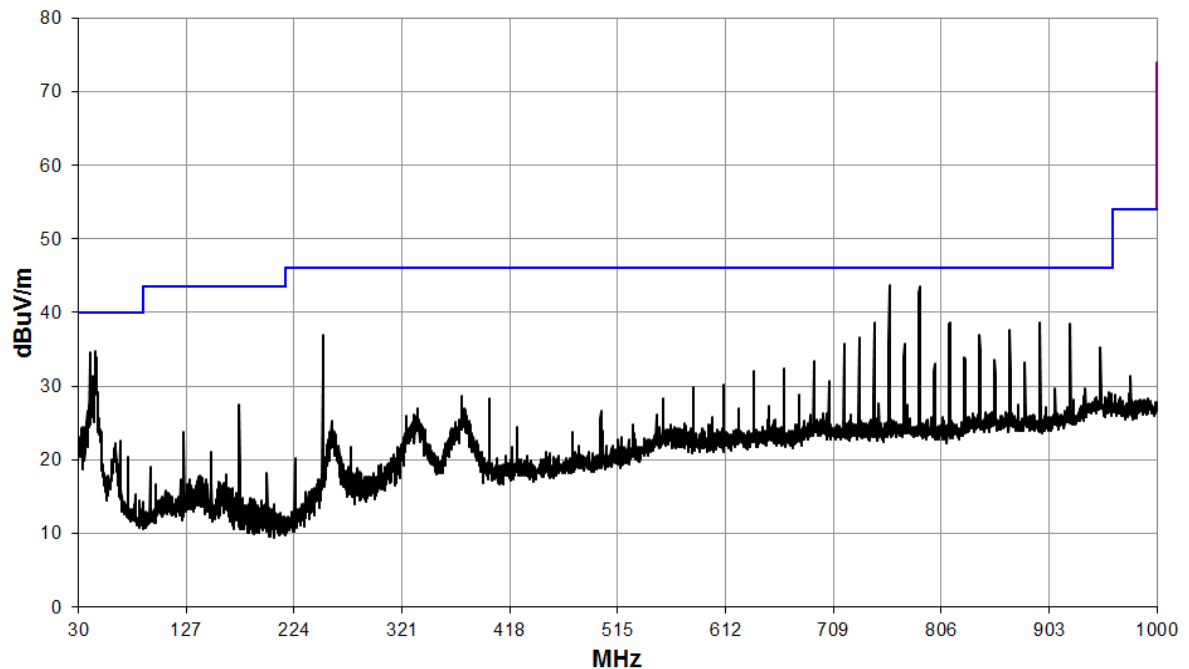

13 Occupied Bandwidth

13.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

13.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Wireless Lab 1
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.9
EUT Frequency Measured:	13.56 MHz
Deviations From Standard:	None
Measurement BW:	1 kHz
Spectrum Analyzer Video BW:	3 kHz
Measurement Span:	20 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 44 % RH	20 % RH to 75 % RH (as declared)
Supply: 20 Vdc	As declared


13.3 Test Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

13.4 Test Method

With the EUT connected as per Figure iv, the bandwidth of the EUT was measured on a spectrum analyser.

Figure iv Test Setup

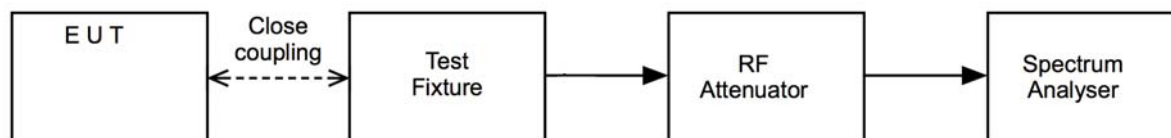


13.5 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Due For Calibration
Spectrum Analyser	R&S	FSU50	U544	2021-06-17
Multimeter	Agilent	34405A	REF887	2020-10-07
Power Supply	Thurlby	PL310	REF239	Cal with REF887

13.6 Test Results

Frequency (MHz)	F_L (MHz)	F_H (MHz)	Bandwidth (kHz)
13.56	13.557372	23.561827	4.455

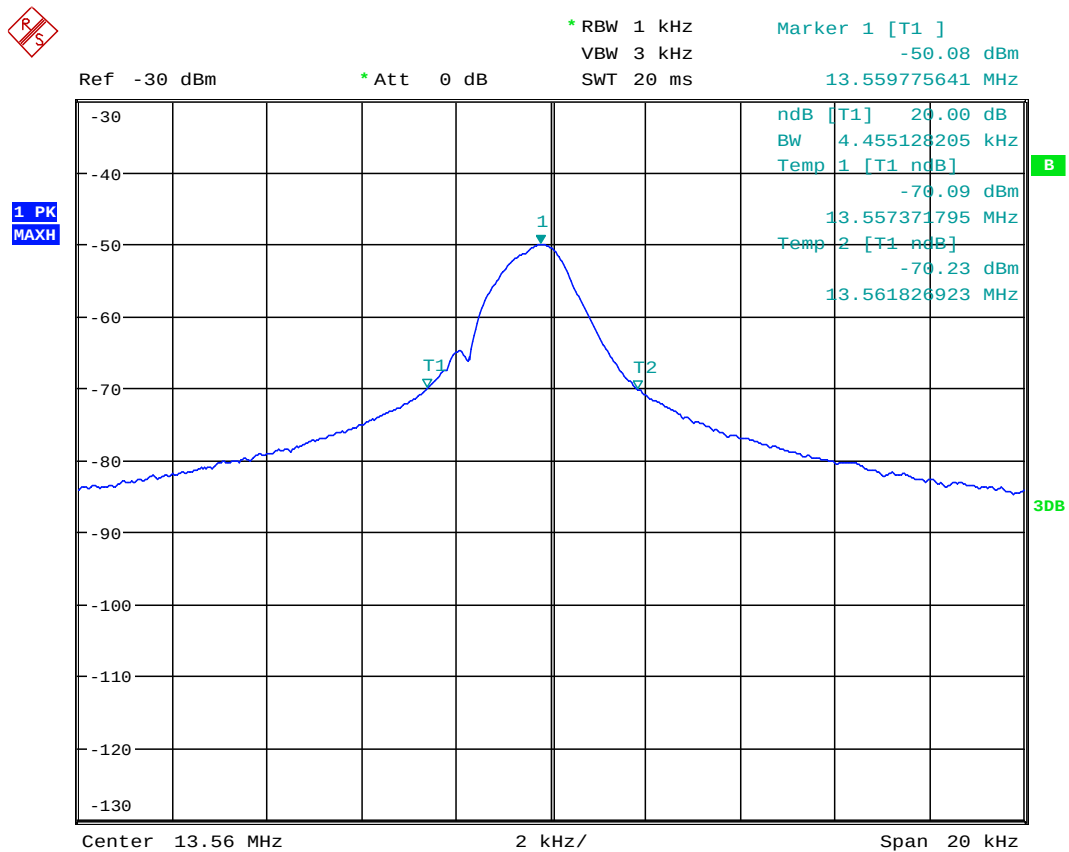

14 Transmitter output power (fundamental radiated emission)

14.1 Definition

The RF power dissipated in the standard output termination when operating under the rated duty cycle selected by the applicant for approval.

14.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Wireless Lab 2
Test Antenna:	Active 60 cm loop
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.3 / 6.4
EUT Frequency Measured:	13.56 MHz
Deviations From Standard:	None
Measurement BW:	9 kHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	17 Vdc to 23 Vdc

Environmental Conditions (Normal Environment)

Temperature: 21 °C	+15 °C to +35 °C (as declared)
Humidity: 43 % RH	20 % RH to 75 % RH (as declared)

14.3 Test Limit

The field strength measured at 30 m shall not exceed the limits in the following table:

Field Strength Limits for License-Exempt Transmitters for Any Application

<i>Frequency range (MHz)</i>	<i>Field strength (μV/m at 30 m)</i>	<i>Field strength (dBμV/m at 30 m)</i>
13.110 – 13.410	106	40.5
13.410 – 13.553	334	50.5
13.553 – 13.567	15,848	84.0
13.567 – 13.710	334	50.5
13.710 – 14.010	106	40.5

14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in $\mu\text{V/m}$ at the regulatory distance, using:

$$FS = 10^{(PR - CF) / 20}$$

Where,


PR is the power recorded on the receiver / spectrum analyzer in $\text{dB}\mu\text{V}$ and includes any cable loss, antenna factor and pre-amplifier gain;

CF is the distance extrapolation factor in dB (where measurement distance different to limit distance);

Per FCC 47CFR15.31(f)(2), an extrapolation factor of 40 dB per decade was used for measurements at distances closer than specified.

This field strength value is then compared with the regulatory limit.

Figure v Test Setup

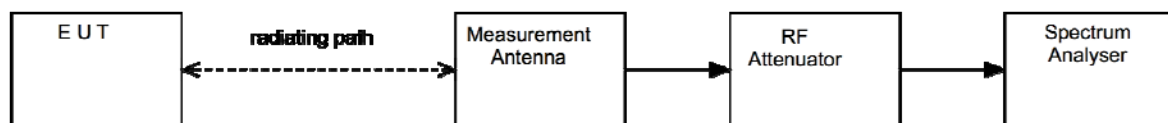


14.5 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Due For Calibration</i>
Ferrite Lined Chamber	Rainford	ATS	REF886	2022-07-29
Active Loop Antenna	EMCO	6502	R0079	2021-06-17
Spectrum Analyser	R&S	FSU50	U544	2021-06-17
Multimeter	Agilent	34405A	REF887	2020-10-07
Power Supply	Thurlby	PL310	REF239	Cal with REF887
Radiated Test Software	Element	Emissions R5	REF9000	Cal not required

14.6 Test Results

Frequency (MHz)	Receiver Level (dBμV/m)	Measurement Distance (m)	Limit Distance (m)	Extrapolation Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Result
13.56	55.8	1.0	30.0	-59.1	-3.3	0.684	PASS

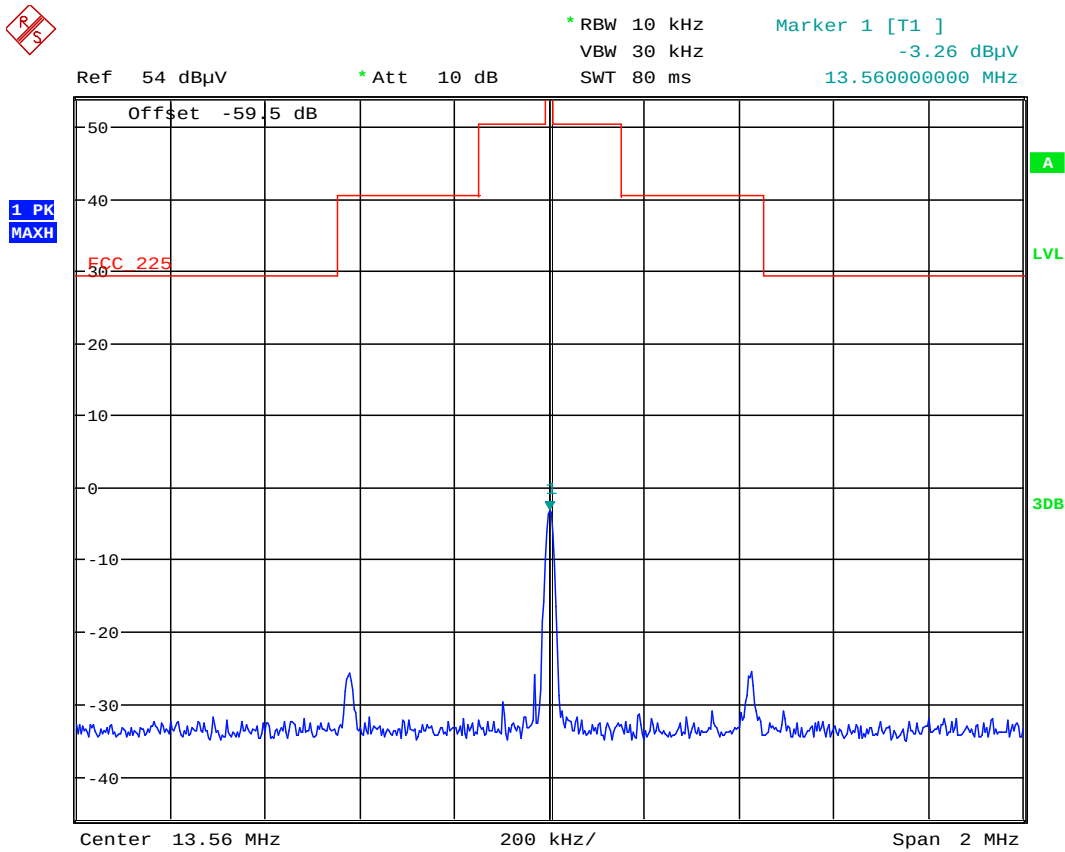

15 Frequency stability

15.1 Definition

Frequency stability is a measure of frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at an appropriate reference temperature and the rated supply voltage.

15.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Wireless Lab 1
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.8
EUT Frequency Measured:	13.56 MHz
Modulation:	Off
Deviations From Standard:	None
Temperature Extreme Environment Test Range:	-20 °C to +50 °C
Voltage Extreme Environment Test Range:	17 Vdc to 23 Vdc

Environmental Conditions (Normal Environment)

Temperature: 20 °C	Standard Requirement: +20 °C
Humidity: 51 %RH	20 % RH to 75 % RH (as declared)

15.3 Test Limit


Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).

15.4 Test Method

With the EUT setup connected as per Figure vi, the frequency was measured under varying conditions of temperature and supply voltage.

The measurements were performed with EUT set in a CW mode of operation. Measurements were made once temperature stability was achieved at each temperature.

Figure vi Test Setup

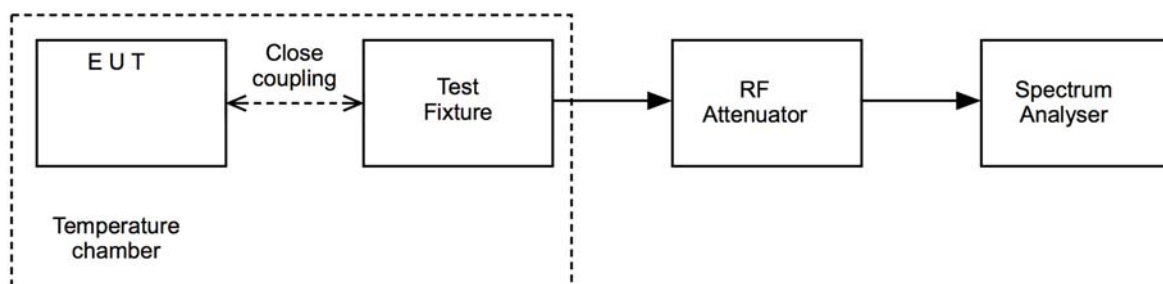

15.5 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Due For Calibration
Spectrum Analyser	R&S	FSU50	U544	2021-06-17
Thermometer	Fluke	53 II B	REF2110	2021-07-24
Multimeter	Agilent	34405A	REF887	2020-10-07
Temperature Chamber	JTS	ETC/JTS/2/01	RFG365	Cal with REF2110
Power Supply	Thurlby	PL310	REF239	Cal with REF887

15.6 Test Results

Test Environment		Measured Frequency (MHz)	Frequency error (kHz)	Frequency error (%)	Result
-20 C	V _{nominal}	13.559727	-0.056000	-0.000413	PASS
-10 C	V _{nominal}	13.559763	-0.020000	-0.000147	PASS
0 C	V _{nominal}	13.559787	0.004000	0.000029	PASS
+10 C	V _{nominal}	13.559783	0.000000	0.000000	PASS
+20 C	V _{minimum}	13.559783	0.000000	0.000000	PASS
	V _{nominal}	13.559783	0.000000	0.000000	PASS
	V _{maximum}	13.559783	0.000000	0.000000	PASS
+30 C	V _{nominal}	13.559743	-0.040000	-0.000295	PASS
+40 C	V _{nominal}	13.559727	-0.056000	-0.000413	PASS
+50 C	V _{nominal}	13.559727	-0.056000	-0.000413	PASS

16 AC power-line conducted emissions

16.1 Definition

Line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network.

16.2 Test Parameters

Test Location:	Element Hull
Test Chamber:	Screen Room 2
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.2
EUT Frequency Measured:	13.56 MHz
Deviations From Standard:	None
Measurement Detectors:	Quasi-Peak and Average

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 44 % RH	20 % RH to 75 % RH (as declared)

16.3 Test Limit

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in Table 3.

Table 3 – AC Power Line Conducted Emission Limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average**
0.15 to 0.5	66 to 56 [*]	56 to 46 [*]
0.5 to 5	56	46
5 to 30	60	50

*The level decreases linearly with the logarithm of the frequency.


**A linear average detector is required.

16.4 Test Method

With the EUT setup in a screened room, as per section 9 of this report and connected as per Figure iii, the power line emissions were measured on a spectrum analyzer / EMI receiver.

AC power line conducted emissions from the EUT are checked first by preview scans with peak and average detectors covering both live and neutral lines. A spectrum analyzer is used to determine if any periodic emissions are present.

Formal measurements using the correct detector(s) and bandwidth are made on frequencies identified from the preview scans. Final measurements were performed with EUT set at its maximum duty in transmit and receive modes.

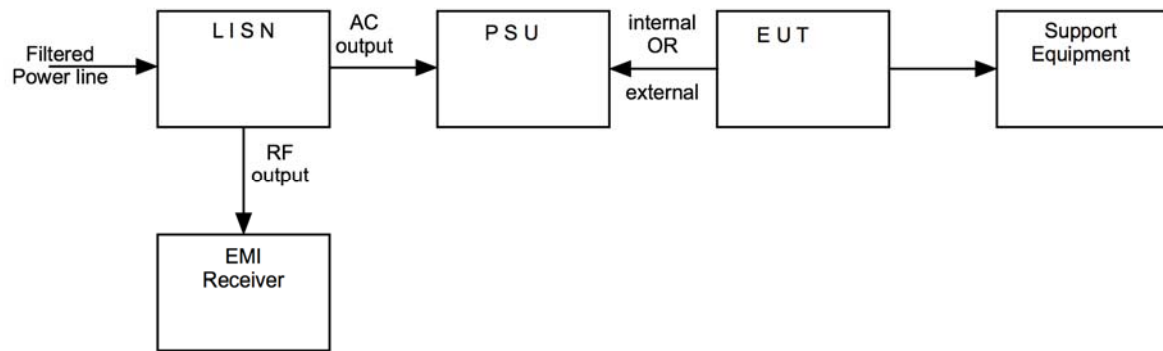
Figure iii Test Setup**16.5 Test Set-up Photograph****16.6 Test Equipment**

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Due For Calibration</i>
Measuring Receiver	R&S	ESC17	RFG715	2021-01-10
LISN	R&S	ESH3-Z5	RFG732	2021-05-18
Pulse Limiter	R&S	ESH3-Z2	RFG674	2021-04-29

16.7 Test Results

Results measured using the average detector						
Reference Number	Frequency (MHz)	Conductor	Result (dBuV)	Specification Limit (dBuV)	Margin (dB)	Result Summary
1	0.150	L1	17.9	56.0	38.1	PASS
2	0.150	N	18.3	56.0	37.7	PASS
3	0.178	L1	15.8	54.6	38.8	PASS
4	0.227	N	12.4	52.6	40.2	PASS
5	0.287	L1	4.3	50.6	46.3	PASS
6	0.464	L1	33.5	46.6	13.1	PASS
7	13.560	N	32.9	50.0	17.1	PASS

Results measured using the quasi-peak detector						
Reference Number	Frequency (MHz)	Conductor	Result (dBuV)	Specification Limit (dBuV)	Margin (dB)	Result Summary
1	0.150	L1	49.3	66.0	16.7	PASS
2	0.150	N	49.6	66.0	16.4	PASS
3	0.178	L1	47.0	64.6	17.6	PASS
4	0.227	N	42.8	62.6	19.8	PASS
5	0.287	L1	33.6	60.6	27.0	PASS
6	0.464	L1	36.8	56.6	19.8	PASS
7	13.560	N	33.1	60.0	26.9	PASS

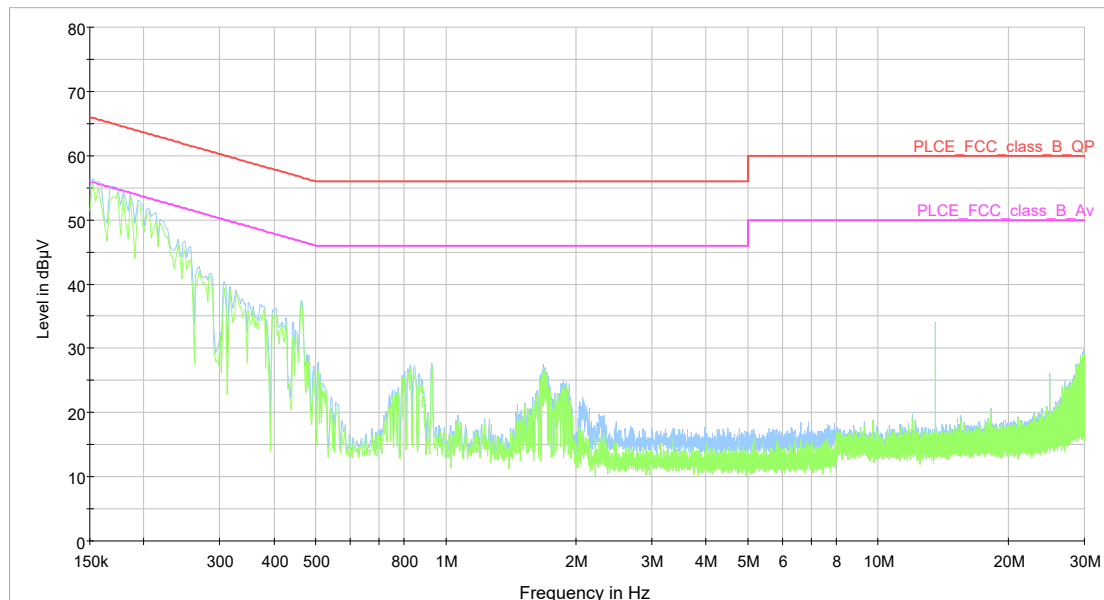

17 Measurement Uncertainty

Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

[1] Radiated emissions below 30 MHz

Uncertainty in test result (9 kHz to 30 MHz) = **2.3 dB**

[2] Spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**

Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

[3] AC power line conducted emissions

Uncertainty in test result = **3.4 dB**

[4] Occupied bandwidth

Uncertainty in test result = **15.5 %**

[5] Maximum frequency error

Uncertainty in test result (Power Meter) = **0.113 ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265 ppm**