

FCC Measurement/Technical Report on WLAN and Bluetooth Module MAYA-W166

FCC ID: XPYMAW166
IC: 8595A-MAYAW166

Test Report Reference: MDE_UBLOX_2110_FCC_03

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-01
D-PL-12140-01-02
D-PL-12140-01-03

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/

Managing Directors:

Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:

Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

Table of Contents

1	Applied Standards and Test Summary	3
1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary	5
2	Revision History / Signatures	14
3	Administrative Data	15
3.1	Testing Laboratory	15
3.2	Project Data	15
3.3	Applicant Data	15
3.4	Manufacturer Data	16
4	Test object Data	17
4.1	General EUT Description	17
4.2	EUT Main components	18
4.3	Ancillary Equipment	19
4.4	Auxiliary Equipment	19
4.5	EUT Setups	20
4.6	Operating Modes / Test Channels	20
4.7	Product labelling	25
5	Test Results	26
5.1	Conducted Emissions at AC Mains	26
5.2	Occupied Bandwidth (6 dB)	29
5.3	Occupied Bandwidth (99%)	36
5.4	Peak Power Output	43
5.5	Spurious RF Conducted Emissions	49
5.6	Transmitter Spurious Radiated Emissions	58
5.7	Band Edge Compliance Conducted	112
5.8	Band Edge Compliance Radiated	125
5.9	Power Density	148
6	Test Equipment	156
7	Antenna Factors, Cable Loss and Sample Calculations	160
7.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	160
7.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	161
7.3	Antenna R&S HL562 (30 MHz – 1 GHz)	162
7.4	Antenna R&S HF907 (1 GHz – 18 GHz)	163
7.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	164
7.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	165
8	Measurement Uncertainties	166
9	Photo Report	167

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-20 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, 558074 D01 15.247 Meas Guidance v05r02, 2019-04-02". ANSI C63.10-2013 is applied.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for DTS (e.g. WLAN 2.4 GHz, BT LE) equipment from FCC and IC

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-247 Issue 2: 5.2 (a)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-247 Issue 2: 5.4 (d)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 5: 6.13 / 8.9/8.10; RSS-247 Issue 2: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 5: 6.13 / 8.9/8.10; RSS-247 Issue 2: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 2: 5.5
Power density	§ 15.247 (e)	RSS-247 Issue 2: 5.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 5: 8.3
Receiver spurious emissions	–	–

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

§ 15.207

Conducted Emissions at AC Mains

The measurement was performed according to ANSI C63.10 6.2

Final Result

OP-Mode	Setup	Date	FCC	IC
Operating mode, Connection to AC mains worst case, via ancillary/auxiliary equipment	S03_166_AE01	2022-06-22	Passed	Passed

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

§ 15.247 (a) (2)

Occupied Bandwidth (6 dB)

The measurement was performed according to ANSI C63.10 11.8.1

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency				
Bluetooth BDR, high	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth BDR, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth BDR, mid	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, high	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, mid	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, high	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, mid	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth LE 1 Mbps, high	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 1 Mbps, low	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 1 Mbps, mid	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, high	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, low	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, mid	S01_166_AB01	2022-06-29	Passed	Passed
WLAN b, high	S01_166_AB01	2022-06-27	Passed	Passed
WLAN b, low	S01_166_AB01	2022-06-27	Passed	Passed
WLAN b, mid	S01_166_AB01	2022-06-27	Passed	Passed
WLAN g, high	S01_166_AB01	2022-06-27	Passed	Passed
WLAN g, low	S01_166_AB01	2022-06-27	Passed	Passed
WLAN g, mid	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 20 MHz, high	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 20 MHz, low	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 20 MHz, mid	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 40 MHz, high	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 40 MHz, low	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 40 MHz, mid	S01_166_AB01	2022-06-27	Passed	Passed

**47 CFR CHAPTER I FCC PART 15
Subpart C §15.247**

IC RSS-Gen & IC TRC-43; Ch. 6.7 & Ch. 8

Occupied Bandwidth (99%)

The measurement was performed according to ANSI C63.10 6.9.3

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency				
Bluetooth BDR, high	S01_166_AB01	2022-07-07	Performed	Performed
Bluetooth BDR, low	S01_166_AB01	2022-07-07	Performed	Performed
Bluetooth BDR, mid	S01_166_AB01	2022-07-07	Performed	Performed
Bluetooth EDR 2, high	S01_166_AB01	2022-07-07	Performed	Performed
Bluetooth EDR 2, low	S01_166_AB01	2022-07-07	Performed	Performed
Bluetooth EDR 2, mid	S01_166_AB01	2022-07-07	Performed	Performed
Bluetooth EDR 3, high	S01_166_AB01	2022-07-07	Performed	Performed
Bluetooth EDR 3, low	S01_166_AB01	2022-07-07	Performed	Performed
Bluetooth EDR 3, mid	S01_166_AB01	2022-07-07	Performed	Performed
Bluetooth LE 1 Mbps, high	S01_166_AB01	2022-06-29	Performed	Performed
Bluetooth LE 1 Mbps, low	S01_166_AB01	2022-06-29	Performed	Performed
Bluetooth LE 1 Mbps, mid	S01_166_AB01	2022-06-29	Performed	Performed
Bluetooth LE 2 Mbps, high	S01_166_AB01	2022-06-29	Performed	Performed
Bluetooth LE 2 Mbps, low	S01_166_AB01	2022-06-29	Performed	Performed
Bluetooth LE 2 Mbps, mid	S01_166_AB01	2022-06-29	Performed	Performed
WLAN b, high	S01_166_AB01	2022-06-27	Performed	Performed
WLAN b, low	S01_166_AB01	2022-06-27	Performed	Performed
WLAN b, mid	S01_166_AB01	2022-06-27	Performed	Performed
WLAN g, high	S01_166_AB01	2022-06-27	Performed	Performed
WLAN g, low	S01_166_AB01	2022-06-27	Performed	Performed
WLAN g, mid	S01_166_AB01	2022-06-27	Performed	Performed
WLAN n 20 MHz, high	S01_166_AB01	2022-06-27	Performed	Performed
WLAN n 20 MHz, low	S01_166_AB01	2022-06-27	Performed	Performed
WLAN n 20 MHz, mid	S01_166_AB01	2022-06-27	Performed	Performed
WLAN n 40 MHz, high	S01_166_AB01	2022-06-27	Performed	Performed
WLAN n 40 MHz, low	S01_166_AB01	2022-06-27	Performed	Performed
WLAN n 40 MHz, mid	S01_166_AB01	2022-06-27	Performed	Performed

47 CFR CHAPTER I FCC PART 15

§ 15.247 (b) (3)

Subpart C §15.247

Peak Power Output

The measurement was performed according to ANSI C63.10

11.9.1.1, 11.9.2.3.2

Final Result

OP-Mode

Radio Technology, Operating Frequency,
Measurement method

Setup

Date

FCC

IC

Bluetooth BDR, high, conducted	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth BDR, low, conducted	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth BDR, mid, conducted	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, high, conducted	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, low, conducted	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, mid, conducted	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, high, conducted	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, low, conducted	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, mid, conducted	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth LE 1 Mbps, high, conducted	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 1 Mbps, low, conducted	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 1 Mbps, mid, conducted	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, high, conducted	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, low, conducted	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, mid, conducted	S01_166_AB01	2022-06-29	Passed	Passed
WLAN b, high, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN b, low, conducted	S01_166_AB01	2022-06-29	Passed	Passed
WLAN b, mid, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN g, high, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN g, low, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN g, mid, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 20 MHz, high, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 20 MHz, low, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 20 MHz, mid, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 40 MHz, high, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 40 MHz, low, conducted	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 40 MHz, mid, conducted	S01_166_AB01	2022-06-27	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10 11.11

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency				
Bluetooth BDR, high	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth BDR, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth BDR, mid	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, high	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, mid	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, high	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, mid	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth LE 1 Mbps, high	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 1 Mbps, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth LE 1 Mbps, mid	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, high	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, low	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, mid	S01_166_AB01	2022-06-29	Passed	Passed
WLAN b, high	S01_166_AB01	2022-07-01	Passed	Passed
WLAN b, low	S01_166_AB01	2022-07-01	Passed	Passed
WLAN b, mid	S01_166_AB01	2022-07-01	Passed	Passed
WLAN g, high	S01_166_AB01	2022-07-01	Passed	Passed
WLAN g, low	S01_166_AB01	2022-07-01	Passed	Passed
WLAN g, mid	S01_166_AB01	2022-07-01	Passed	Passed
WLAN n 20 MHz, high	S01_166_AB01	2022-07-01	Passed	Passed
WLAN n 20 MHz, low	S01_166_AB01	2022-07-01	Passed	Passed
WLAN n 20 MHz, mid	S01_166_AB01	2022-07-01	Passed	Passed
WLAN n 40 MHz, high	S01_166_AB01	2022-07-01	Passed	Passed
WLAN n 40 MHz, low	S01_166_AB01	2022-07-01	Passed	Passed
WLAN n 40 MHz, mid	S01_166_AB01	2022-07-01	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10
6.4, 6.5, 6.6.5

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Measurement range				
Bluetooth BDR, high, 1 GHz - 26 GHz Remark: At final output power	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth BDR, high, 1 GHz - 26 GHz Remark: At final output power	S02_166_AB01	2022-07-15	Passed	Passed
Bluetooth BDR, high, 1 GHz - 26 GHz Remark: At final output power	S02_166_AE01	2022-07-04	Passed	Passed
Bluetooth BDR, high, 30 MHz - 1 GHz Remark: At final output power	S02_166_AB01	2022-07-21	Passed	Passed
Bluetooth BDR, high, 30 MHz - 1 GHz Remark: At initial output power	S02_166_AE01	2022-06-23	Passed	Passed
Bluetooth BDR, high, 30 MHz - 1 GHz Remark: At final output power	S01_166_AB01	2022-07-29	Passed	Passed
Bluetooth BDR, high, 9 kHz - 30 MHz Remark: At final output power	S02_166_AB01	2022-07-21	Passed	Passed
Bluetooth BDR, low, 1 GHz - 26 GHz Remark: At initial output power	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth BDR, low, 1 GHz - 26 GHz Remark: At initial output power	S02_166_AE01	2022-06-28	Passed	Passed
Bluetooth BDR, low, 30 MHz - 1 GHz Remark: At initial output power	S02_166_AE01	2022-06-23	Passed	Passed
Bluetooth BDR, low, 30 MHz - 1 GHz Remark: At final output power	S01_166_AB01	2022-07-29	Passed	Passed
Bluetooth BDR, mid, 1 GHz - 26 GHz Remark: At final output power	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth BDR, mid, 1 GHz - 26 GHz Remark: At initial output power	S02_166_AE01	2022-06-28	Passed	Passed
Bluetooth BDR, mid, 30 MHz - 1 GHz Remark: At initial output power	S02_166_AE01	2022-06-23	Passed	Passed
Bluetooth BDR, mid, 30 MHz - 1 GHz Remark: At initial output power	S01_166_AB01	2022-07-29	Passed	Passed
Bluetooth BDR, mid, 9 kHz - 30 MHz Remark: At initial output power	S02_166_AE01	2022-06-23	Passed	Passed
Bluetooth BDR, mid, 9 kHz - 30 MHz Remark: At final output power	S01_166_AB01	2022-07-29	Passed	Passed
Bluetooth EDR 2, high, 1 GHz - 26 GHz Remark: At final output power	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth EDR 2, low, 1 GHz - 26 GHz Remark: At final output power	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth EDR 2, mid, 1 GHz - 26 GHz Remark: At final output power	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth EDR 3, high, 1 GHz - 26 GHz Remark: At final output power	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth EDR 3, low, 1 GHz - 26 GHz Remark: At final output power	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth EDR 3, mid, 1 GHz - 26 GHz Remark: At final output power	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth LE 1 Mbps, high, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10
6.4, 6.5, 6.6.5

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Measurement range				
Bluetooth LE 1 Mbps, low, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth LE 1 Mbps, mid, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth LE 2 Mbps, high, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth LE 2 Mbps, low, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
Bluetooth LE 2 Mbps, mid, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN b, high, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN b, high, 1 GHz - 26 GHz	S02_166_AB01	2022-06-25	Passed	Passed
WLAN b, high, 1 GHz - 26 GHz	S02_166_AF01	2022-06-25	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz	S02_166_AB01	2022-07-21	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz	S02_166_AE01	2022-06-23	Passed	Passed
WLAN b, high, 30 MHz - 1 GHz	S01_166_AB01	2022-07-29	Passed	Passed
WLAN b, low, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN b, low, 1 GHz - 26 GHz	S02_166_AF01	2022-06-25	Passed	Passed
WLAN b, low, 30 MHz - 1 GHz	S02_166_AE01	2022-06-23	Passed	Passed
WLAN b, low, 30 MHz - 1 GHz	S01_166_AB01	2022-07-29	Passed	Passed
WLAN b, mid, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN b, mid, 1 GHz - 26 GHz	S02_166_AF01	2022-06-25	Passed	Passed
WLAN b, mid, 30 MHz - 1 GHz	S02_166_AE01	2022-06-23	Passed	Passed
WLAN b, mid, 30 MHz - 1 GHz	S01_166_AB01	2022-07-29	Passed	Passed
WLAN b, mid, 9 kHz - 30 MHz	S02_166_AB01	2022-07-21	Passed	Passed
WLAN b, mid, 9 kHz - 30 MHz	S02_166_AE01	2022-06-23	Passed	Passed
WLAN b, mid, 9 kHz - 30 MHz	S01_166_AB01	2022-07-29	Passed	Passed
WLAN g, high, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN g, low, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN g, mid, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN n 20 MHz, high, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN n 20 MHz, low, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN n 20 MHz, mid, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN n 40 MHz, high, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed
WLAN n 40 MHz, low, 1 GHz - 26 GHz	S01_166_AB01	2022-06-28	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10 11.11

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Band Edge				
Bluetooth BDR, high, high	S01_166_AB01	2022-06-22	Passed	Passed
Bluetooth BDR, low, low	S01_166_AB01	2022-06-22	Passed	Passed
Bluetooth EDR 2, high, high	S01_166_AB01	2022-06-22	Passed	Passed
Bluetooth EDR 2, low, low	S01_166_AB01	2022-06-22	Passed	Passed
Bluetooth EDR 3, high, high	S01_166_AB01	2022-06-22	Passed	Passed
Bluetooth EDR 3, low, low	S01_166_AB01	2022-06-22	Passed	Passed
Bluetooth LE 1 Mbps, high, high	S01_166_AB01	2022-07-29	Passed	Passed
Bluetooth LE 1 Mbps, low, low	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, high, high	S01_166_AB01	2022-07-29	Passed	Passed
Bluetooth LE 2 Mbps, low, low	S01_166_AB01	2022-07-29	Passed	Passed
WLAN b, high, high	S01_166_AB01	2022-07-07	Passed	Passed
WLAN b, low, low	S01_166_AB01	2022-07-07	Passed	Passed
WLAN g, high, high	S01_166_AB01	2022-07-07	Passed	Passed
WLAN g, low, low	S01_166_AB01	2022-07-07	Passed	Passed
WLAN n 20 MHz, high, high	S01_166_AB01	2022-07-07	Passed	Passed
WLAN n 20 MHz, low, low	S01_166_AB01	2022-07-07	Passed	Passed
WLAN n 40 MHz, high, high	S01_166_AB01	2022-07-07	Passed	Passed
WLAN n 40 MHz, low, low	S01_166_AB01	2022-07-07	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (d)

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10 6.6.5

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency, Band Edge				
Bluetooth BDR, high, high	S01_166_AB01	2022-07-28	Passed	Passed
Bluetooth BDR, high, high	S02_166_AB01	2022-07-15	Passed	Passed
Bluetooth BDR, high, high	S02_166_AE01	2022-06-28	Passed	Passed
Bluetooth EDR 2, high, high	S01_166_AB01	2022-07-28	Passed	Passed
Bluetooth EDR 2, high, high	S02_166_AE01	2022-06-28	Passed	Passed
Bluetooth EDR 3, high, high	S01_166_AB01	2022-07-28	Passed	Passed
Bluetooth EDR 3, high, high	S02_166_AE01	2022-06-28	Passed	Passed
Bluetooth LE 1 Mbps, high, high	S01_166_AB01	2022-07-28	Passed	Passed
Bluetooth LE 2 Mbps, high, high	S01_166_AB01	2022-07-28	Passed	Passed
Bluetooth LE 2 Mbps, high, high	S02_166_AE01	2022-06-29	Passed	Passed
WLAN b, high, high	S01_166_AB01	2022-07-28	Passed	Passed
WLAN b, high, high	S02_166_AB01	2022-07-13	Passed	Passed
WLAN b, high, high	S02_166_AE01	2022-06-27	Passed	Passed
WLAN g, high, high	S01_166_AB01	2022-07-28	Passed	Passed
WLAN g, high, high	S02_166_AG01	2022-06-28	Passed	Passed
WLAN n 20 MHz, high, high	S01_166_AB01	2022-07-28	Passed	Passed
WLAN n 20 MHz, high, high	S02_166_AG01	2022-06-28	Passed	Passed
WLAN n 40 MHz, high, high	S01_166_AB01	2022-07-28	Passed	Passed
WLAN n 40 MHz, high, high	S02_166_AG01	2022-06-28	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247

§ 15.247 (e)

Power Density

The measurement was performed according to ANSI C63.10
 11.10.2, 11.10.7

Final Result

OP-Mode	Setup	Date	FCC	IC
Radio Technology, Operating Frequency				
Bluetooth BDR, high	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth BDR, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth BDR, mid	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, high	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 2, mid	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, high	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, low	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth EDR 3, mid	S01_166_AB01	2022-07-07	Passed	Passed
Bluetooth LE 1 Mbps, high	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 1 Mbps, low	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 1 Mbps, mid	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, high	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, low	S01_166_AB01	2022-06-29	Passed	Passed
Bluetooth LE 2 Mbps, mid	S01_166_AB01	2022-06-29	Passed	Passed
WLAN b, high	S01_166_AB01	2022-06-27	Passed	Passed
WLAN b, low	S01_166_AB01	2022-06-27	Passed	Passed
WLAN b, mid	S01_166_AB01	2022-06-27	Passed	Passed
WLAN g, high	S01_166_AB01	2022-06-27	Passed	Passed
WLAN g, low	S01_166_AB01	2022-06-27	Passed	Passed
WLAN g, mid	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 20 MHz, high	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 20 MHz, low	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 20 MHz, mid	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 40 MHz, high	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 40 MHz, low	S01_166_AB01	2022-06-27	Passed	Passed
WLAN n 40 MHz, mid	S01_166_AB01	2022-06-27	Passed	Passed

N/A: Not applicable

N/P: Not performed


2 REVISION HISTORY / SIGNATURES

Report version control			
Version	Release date	Change Description	Version validity
initial	2022-08-08	--	valid
--	--	--	--

COMMENT: -



(responsible for accreditation scope)
Dipl.-Ing. Daniel Gall



(responsible for testing and report)
B.Sc. Jens Dörwald



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-01 | -02 | -03
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Daniel Gall
Report Template Version: 2021-09-09

3.2 PROJECT DATA

Responsible for testing and report: B.Sc. Jens Dörwald
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2022-08-08
Testing Period: 2022-06-22 to 2022-07-29

3.3 APPLICANT DATA

Company Name: u-blox AG
Address: Zürcherstrasse 68
8800 Thalwil
Switzerland
Contact Person: Filip Kruzela

3.4 MANUFACTURER DATA

Company Name: please see Applicant Data

Address:

Contact Person:

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Host-based module with WLAN and Bluetooth technology
Product name	MAYA-W166
Type	MAYA-W166-00B-00 MAYA-W166-01B-00
Declared EUT data by the supplier	
Voltage Type	DC
Voltage Level	1.8 V + 3.3 V
Antenna / Gain	MAYA-W166-00B-00: Integral / -3.4 dBi MAYA-W166-01B-00: External / 2 dBi (No antennas were provided for the tests, radiated measurements were performed with 50 Ohm terminations)
Tested Modulation Type	BT Classic: GFSK (BDR), Pi/4 DQPSK (EDR 2), 8DPSK (EDR 3) BT LE: GFSK WLANb: DSSS WLANg/n: OFDM
Specific product description for the EUT	The EUT is a Bluetooth and WLAN module. In the 2.4 GHz band it supports SISO Mode only. Supported technologies are Bluetooth Classic, Bluetooth Low Energy and WLAN b, g, n 20 and 40 MHz bandwidth.
EUT ports (connected cables during testing):	Enclosure Data DC Antenna The EUT is a module with solder pads for surface mounting, so no cables were connected to the EUT itself.
Tested datarates	BT Classic: 1 (BDR), 2 (EDR 2) and 3 Mbps (EDR 3) BT LE: 1 and 2 Mbps WLAN b: 1 Mbps, g: 6 Mbps, n: MCS 0
Special software used for testing	Scripts were provided by the applicant on a laptop that control a board computer, which sets the test modes of the EUT.

Used output power

BT Classic: 8 dBm
BT LE: max. power in Direct Test Mode set by applicant's script
WLAN:

2.4 GHz											
Mode	Ch.1	Ch.2	Ch.3	Ch.4	Ch.5	Ch.6	Ch.7	Ch.8	Ch.9	Ch.10	Ch.11
b	18	18									18
g	16	18	18							17	16
n20	15	16	16							16	15
n40	N/A	N/A	14		15	16	15			N/A	N/A

Note by the laboratory: Testing for Bluetooth Classic started at max power of power control level of test mode and was reduced later on to the final power of 8 dBm. Some radiated spurious emissions tests were not repeated with final power since the original power was worst case.

4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
MAYA W166 AB01	DE1015159ab01	MAYA-W166-01B-00
Sample Parameter	Value	
Serial No.	AK36C1DEB90E4A80400	
HW Version	04	
SW Version	W16.92.21.p22-16.92.21.p22-MXM5X16298_V0	
Comment	Antenna Pin Sample	

Sample Name	Sample Code	Description
MAYA W166 AE01	DE1015159ae01	MAYA-W166-00B-00
Sample Parameter	Value	
Serial No.	M406C1DEB90B93C0400	
HW Version	04	
SW Version	W16.92.21.p22-16.92.21.p22-MXM5X16298_V0	
Comment	Integral antenna sample	

Sample Name	Sample Code	Description
MAYA W166 AF01	DE1015159af01	MAYA-W166-00B-00
Sample Parameter	Value	
Serial No.	M406C1DEB90B8B00400	
HW Version	04	
SW Version	W16.92.21.p22-16.92.21.p22-MXM5X16298_V0	
Comment	Integral antenna sample	

Sample Name	Sample Code	Description
MAYA W166 AG01	DE1015159ag01	MAYA-W166-00B-00
Sample Parameter	Value	
Serial No.	M406C1DEB90B8A40400	
HW Version	04	
SW Version	W16.92.21.p22-16.92.21.p22-MXM5X16298_V0	
Comment	Integral antenna sample	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
AUX10	UBLOX, MAYA-W1 EVK, Rev. A, -, 10000002636490002003	Evaluation Board for module providing ports
AUX20	Toradex, Ixora, V1.2A, -, 10824714	Board Computer connected to Evaluation board for setting modes
AUX21	Toradex, Ixora, V1.2A, -, 10824739	Board Computer connected to Evaluation board for setting modes
AUX22	DELL, Latitude E7250, -, -, 43283371358	Laptop computer with prepared scripts controlling AUX10
AUX23	DELL, Latitude E7270, 2016, -, 14393036990	Laptop computer with prepared scripts controlling AUX11
AUX6	UBLOX, MAYA-W1 EVK, Rev. A, -, 10000002386976004001	Evaluation Board for module providing ports
AUX8	UBLOX, MAYA-W1 EVK, Rev. A, -, 10000002636490002004	Evaluation Board for module providing ports
AUX9	UBLOX, MAYA-W1 EVK, Rev. A, -, 10000002636490001002	Evaluation Board for module providing ports
ACDC1	Agilent, E3631A, -, -, MY40018563	120 V 60 Hz AC laboratory power supply

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S02_166_AE01	MAYA W166 AE01, AUX9,	Radiated Setup
S03_166_AE01	MAYA W166 AE01, AUX9, ACDC1	AC Conducted Setup
S01_166_AB01	MAYA W166 AB01, AUX6, AUX10 + AUX12 or AUX 11 + AUX 13	Conducted Setup
S02_166_AG01	MAYA W166 AG01, AUX10,	Radiated Setup
S02_166_AB01	MAYA W166 AB01, AUX6,	Radiated Setup
S02_166_AF01	MAYA W166 AF01, AUX8,	Radiated Setup

4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

WLAN
20 MHz Test Channels:
Channel:
Frequency [MHz]

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
1	6	11
2412	2437	2462

40 MHz Test Channels:
Channel:
Frequency [MHz]

low	mid	high
3	6	9
2422	2437	2452


BT Test Channels:
Channel:
Frequency [MHz]

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
0	39	78
2402	2441	2480


BT LE Test Channels:
Channel:
Frequency [MHz]

2.4 GHz ISM 2400 - 2483.5 MHz		
low	mid	high
0	19	39
2402	2440	2480


Duty Cycle:

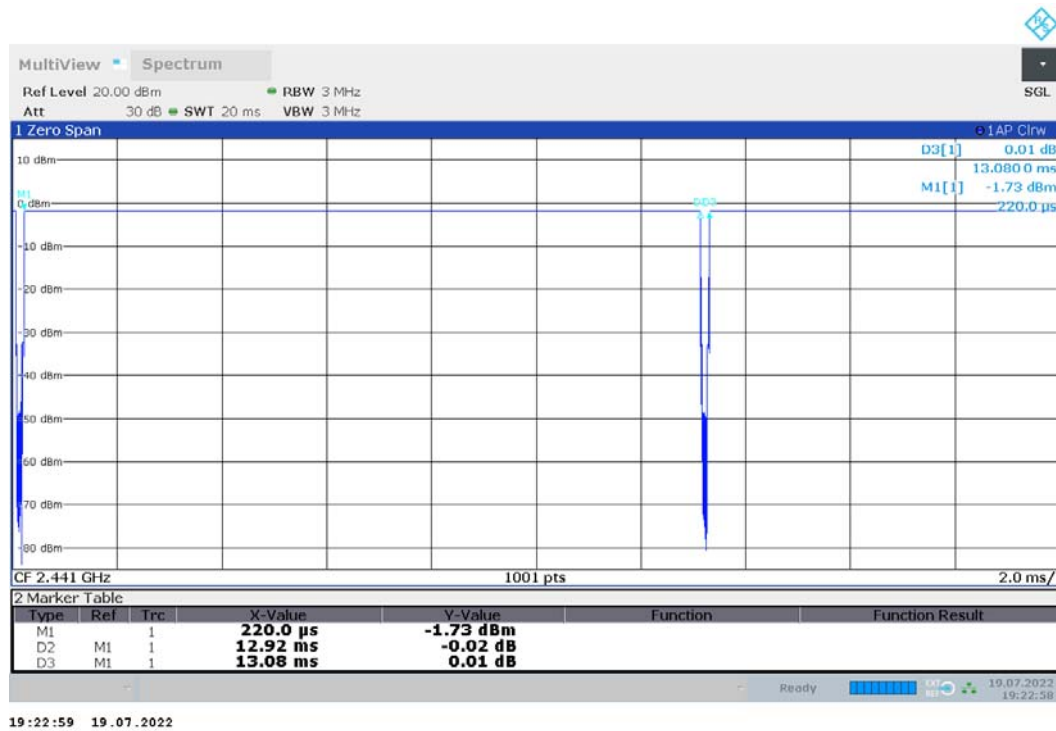


BT GFSK (98.8 %)

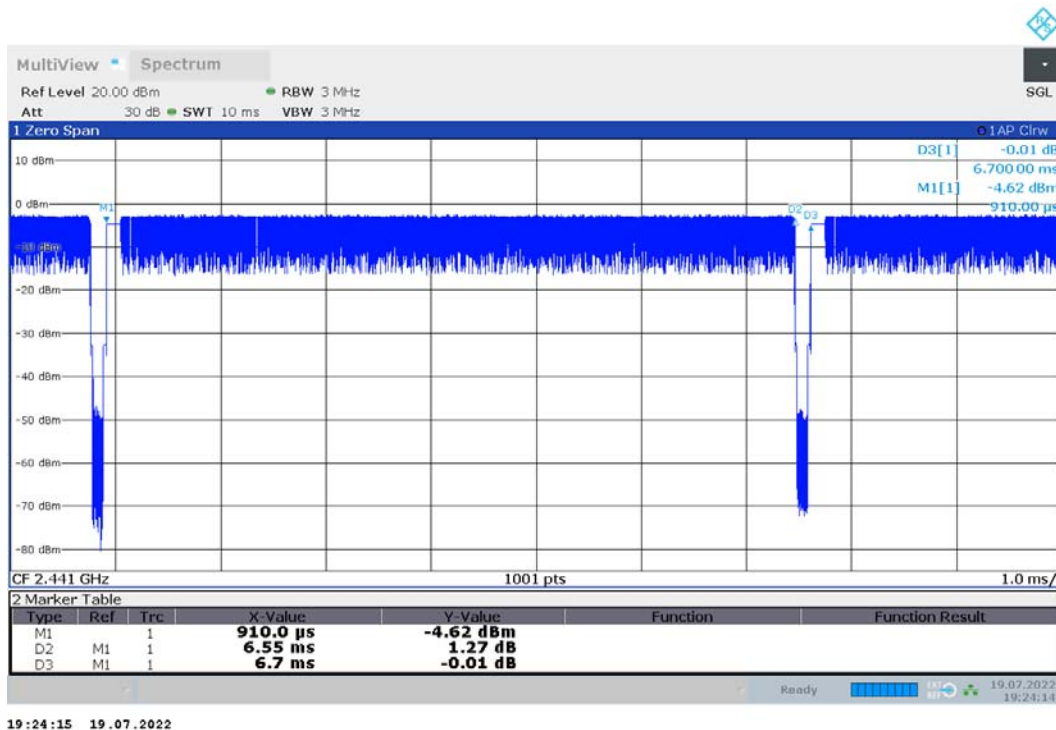


BT Classic Pi/4 DQPSK (97.8 %)

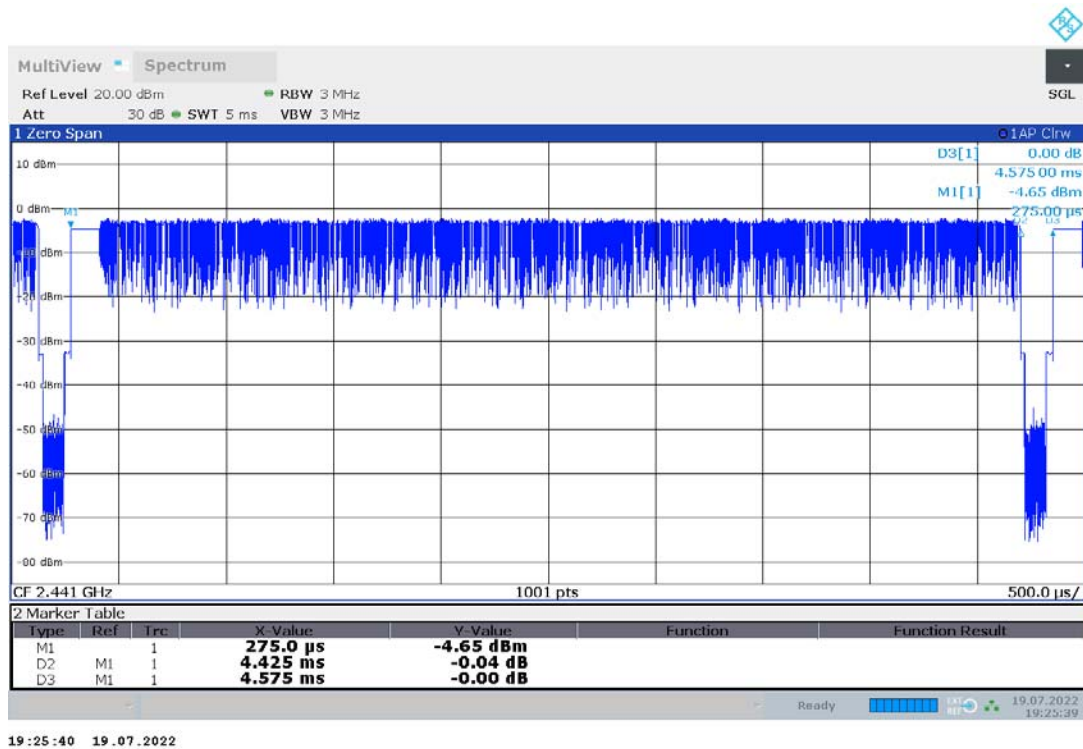


BT Classic 8DPSK (96.7 %)

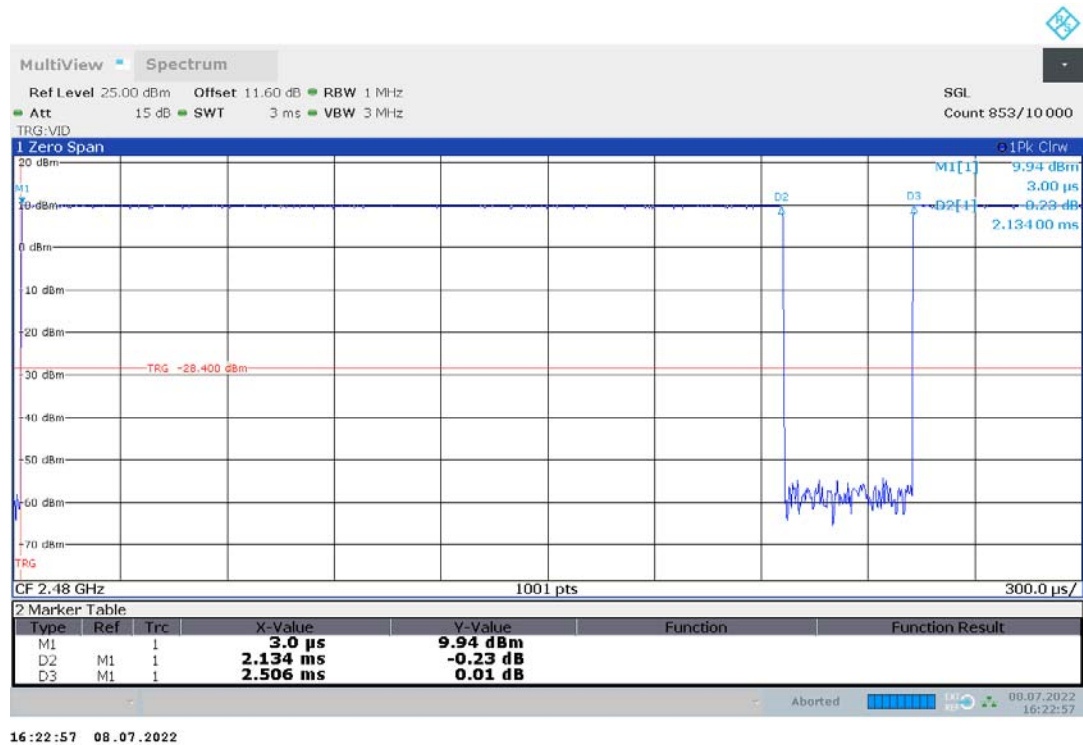

BT LE 1 Mbps (85 %)

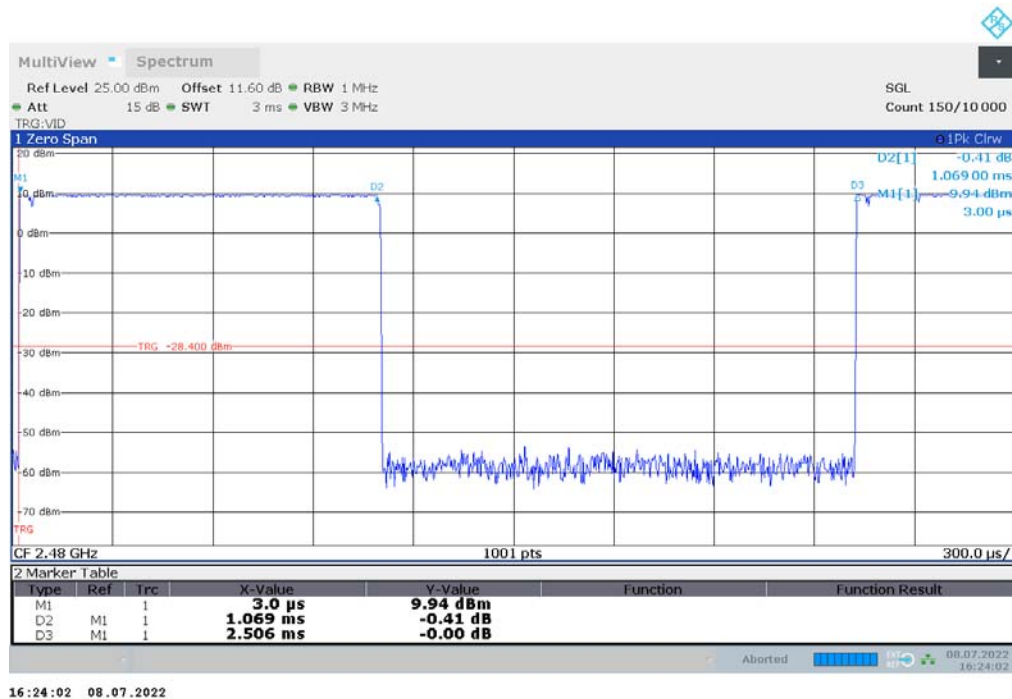


BT LE 2 Mbps (42.7 %)

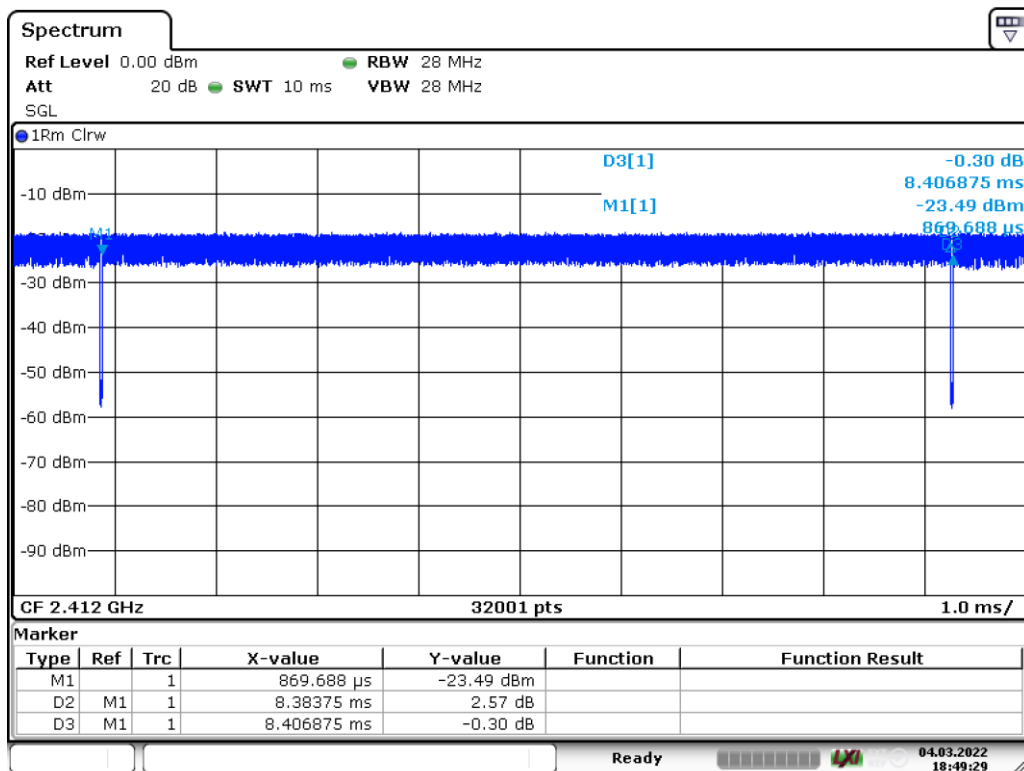


Date: 4.MAR.2022 18:49:29

WLAN b (99.7 %)

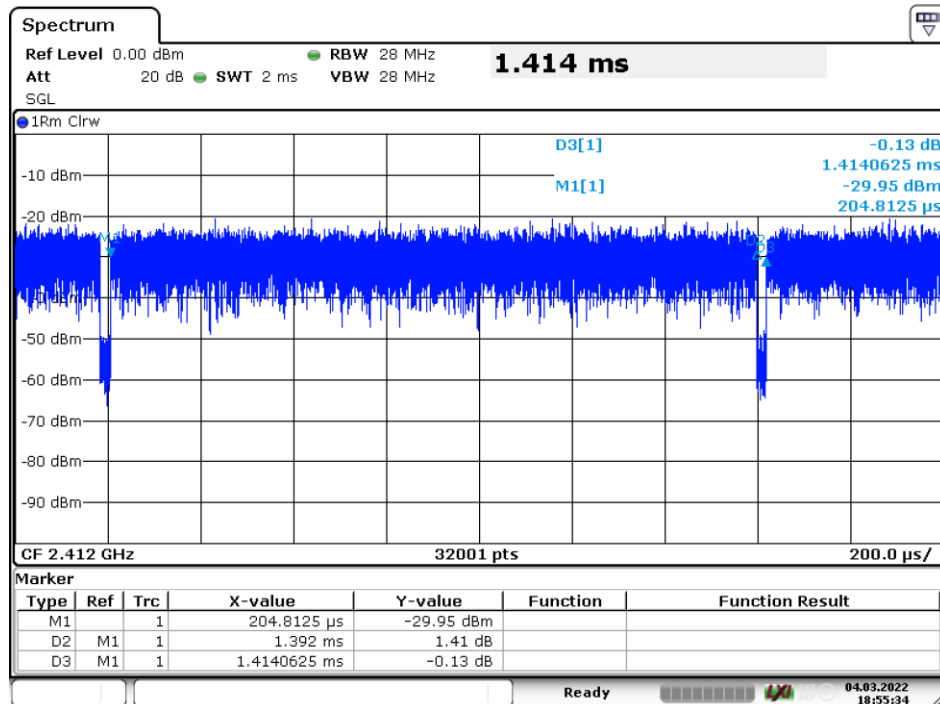


Date: 4.MAR.2022 18:55:34

WLAN g (98.4 %)

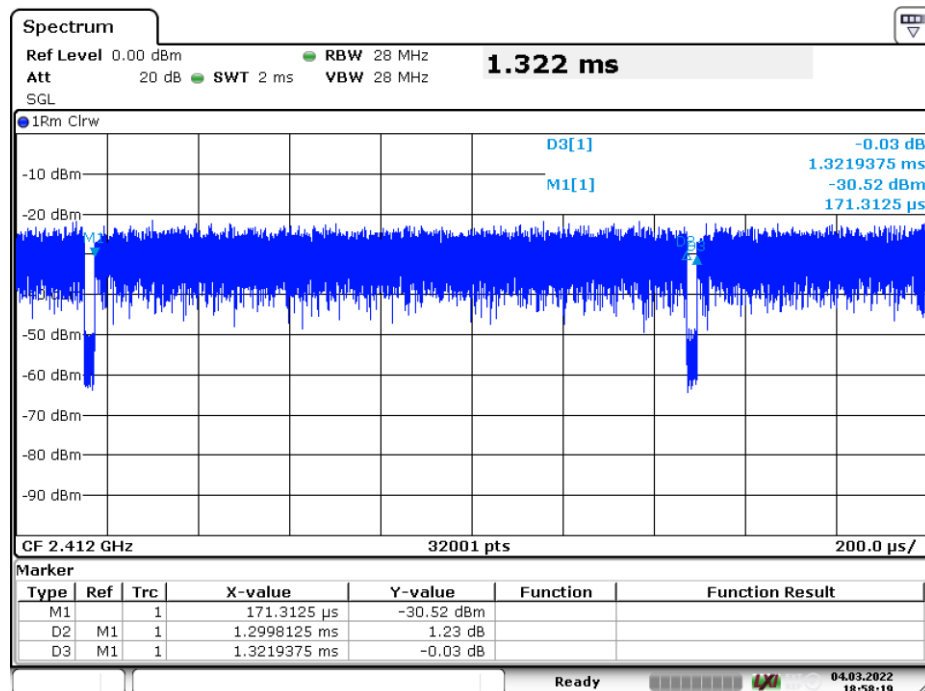

Date: 4.MAR.2022 18:58:20

WLAN n 20 MHz (98.3 %)

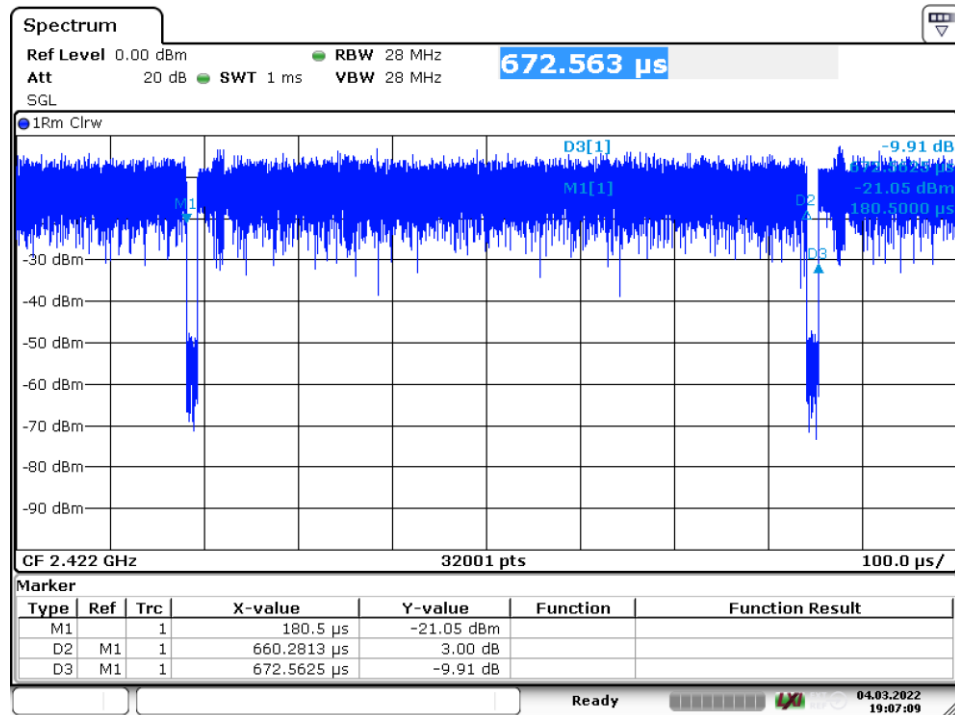

Date: 4.MAR.2022 19:07:09

WLAN n 40 MHz (98.3 %)

4.7 PRODUCT LABELLING

4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS


5.1 CONDUCTED EMISSIONS AT AC MAINS

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10 6.2

5.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

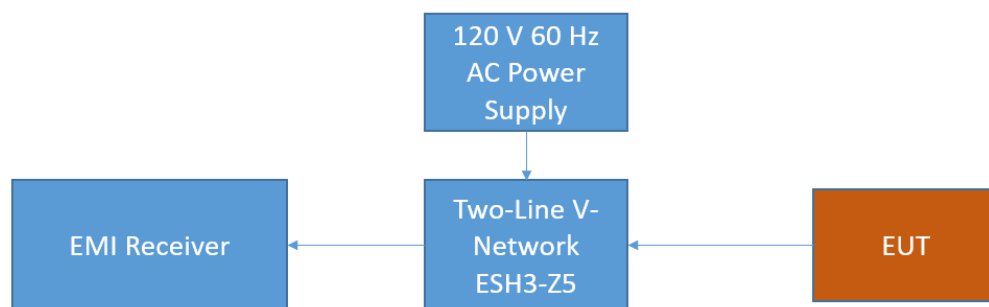

FCC Conducted Emissions on AC

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak & (CISPR) Average

- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.207

Frequency (MHz)	QP Limits (dBμV)	AV Limits (dBμV)
0.15 – 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

Used conversion factor: Limit (dBμV) = 20 log (Limit (μV)/1μV).

5.1.3 TEST PROTOCOL


Temperature: 28 °C
Air Pressure: 1008 hPa
Humidity: 40 %

Power line	PE	Frequency [MHz]	Measured value QP [dBμV]	Measured value AV [dBμV]	Limit [dBμV]	Margin [dB]
N	GND	12.005	45.7	-	60.0	14.3
N	GND	12.005	-	42.0	50.0	8.0
N	FLO	24.009	46.5	-	60.0	13.5
N	FLO	24.009	-	43.7	50.0	6.3

Remark: Please see next sub-clause for the measurement plot.

5.1.4 MEASUREMENT PLOT

Operating mode = worst case, Connection to AC mains = via ancillary/auxiliary equipment (S03_166_AE01)

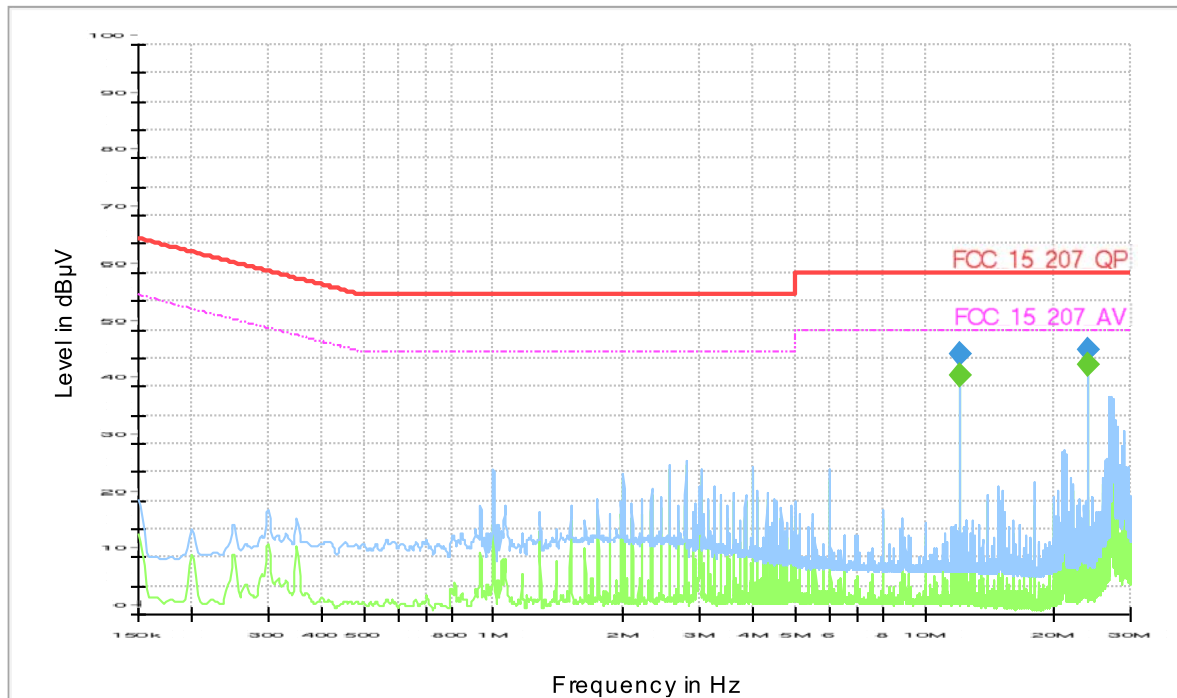

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	PE	Corr. (dB)
12.005250	---	41.97	50.00	8.03	1000.0	9.000	N	GND	10.7
12.005250	45.68	---	60.00	14.32	1000.0	9.000	N	GND	10.7
24.009000	46.46	---	60.00	13.54	1000.0	9.000	N	FLO	11.2
24.009000	---	43.73	50.00	6.27	1000.0	9.000	N	FLO	11.2

5.1.5 TEST EQUIPMENT USED

- Conducted Emissions FCC

5.2 OCCUPIED BANDWIDTH (6 DB)

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10 11.8.1

5.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.


The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: Two times nominal bandwidth
- Trace: Maxhold
- Sweeps: Till stable (min. 500, max. 15000)
- Sweep time: Auto
- Detector: Peak

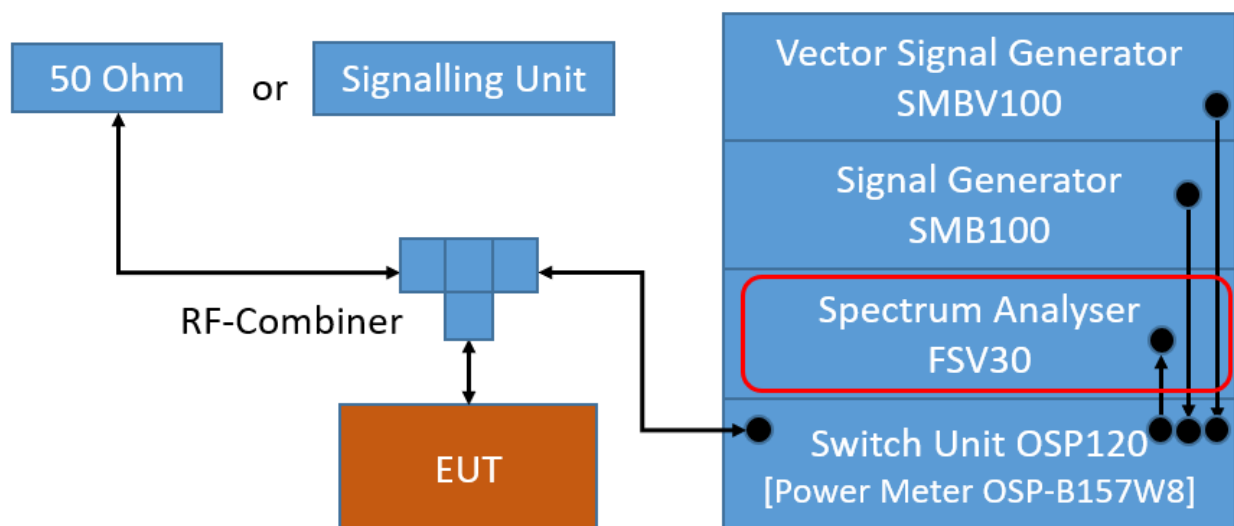

TS8997; Channel Bandwidth

5.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.2.3 TEST PROTOCOL

Ambient temperature: 23 °C
Air Pressure: 1006 hPa
Humidity: 53 %
BT Classic GFSK

Band / Mode	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	0.535	0.5	0.035
	39	2441	0.535	0.5	0.035
	78	2480	0.535	0.5	0.035

BT Classic Pi/4 DQPSK

Band / Mode	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	1.109	0.5	0.609
	39	2441	1.109	0.5	0.609
	78	2480	1.109	0.5	0.609

BT Classic 8DPSK

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	1.109	0.5	0.609
	39	2441	1.089	0.5	0.589
	78	2480	1.089	0.5	0.589

BT LE 1 Mbit/s

Band / Mode	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	0.760	0.5	0.260
	19	2440	0.760	0.5	0.260
	39	2480	0.770	0.5	0.270

BT LE 2 Mbit/s

Band / Mode	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	0	2402	1.440	0.5	0.940
	19	2440	1.410	0.5	0.910
	39	2480	1.410	0.5	0.910

WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	9.2	0.5	8.7
	6	2437	9.2	0.5	8.7
	11	2462	9.2	0.5	8.7

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	16.4	0.5	15.9
	6	2437	16.4	0.5	15.9
	11	2462	16.4	0.5	15.9

WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	17.7	0.5	17.2
	6	2437	17.7	0.5	17.2
	11	2462	17.7	0.5	17.2

WLAN n-Mode; 40 MHz; MCS0


Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	3	2422	35.9	0.5	35.4
	6	2437	35.8	0.5	35.3
	9	2452	35.9	0.5	35.4

Remark: Please see next sub-clause for the measurement plot.

5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = BT Classic GFSK, Operating Frequency = mid (S01_166_AB01)

6 dB Bandwidth

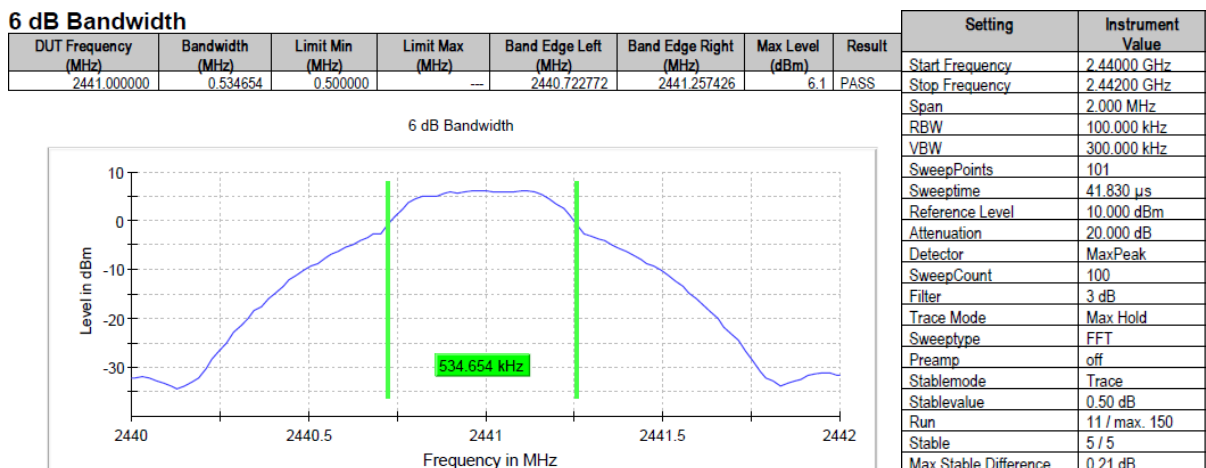

Radio Technology = BT Classic Pi/4 DQPSK, Operating Frequency = mid (S01_166_AB01)


6 dB Bandwidth

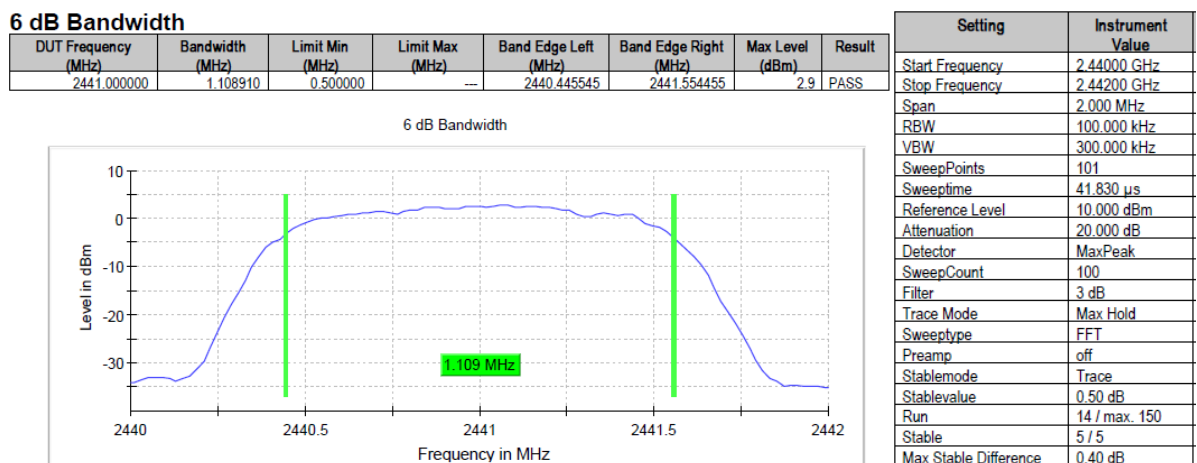

Radio Technology = BT Classic 8DPSK, Operating Frequency = mid
(S01_166_AB01)

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2441.000000	1.089108	0.500000	---	2440.445545	2441.534653	3.1	PASS

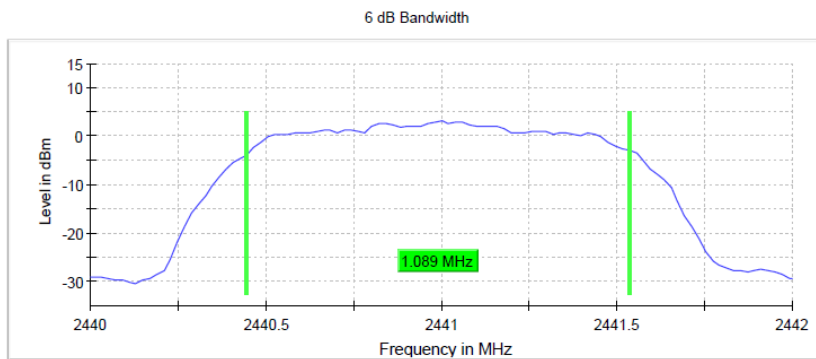


Setting	Instrument Value
Start Frequency	2.44000 GHz
Stop Frequency	2.44200 GHz
Span	2.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	101
SweepTime	41.830 μ s
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamplifier	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	15 / max. 150
Stable	5 / 5
Max Stable Difference	0.06 dB

Radio Technology = Bluetooth LE 1 Mbps, Operating Frequency = low
(S01_166_AB01)

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2402.000000	0.760396	0.500000	---	2401.603960	2402.364356	6.3	PASS

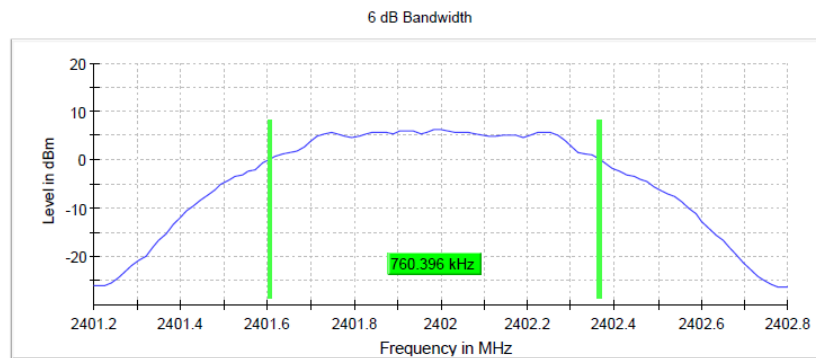


Setting	Instrument Value
Start Frequency	2.40120 GHz
Stop Frequency	2.40280 GHz
Span	1.600 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	101
SweepTime	41.920 μ s
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamplifier	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	10 / max. 150
Stable	5 / 5
Max Stable Difference	0.08 dB

Radio Technology = Bluetooth LE 2 Mbps, Operating Frequency = low
(S01_166_AB01)

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2402.000000	1.441584	0.500000	---	2401.279208	2402.720792	4.3	PASS

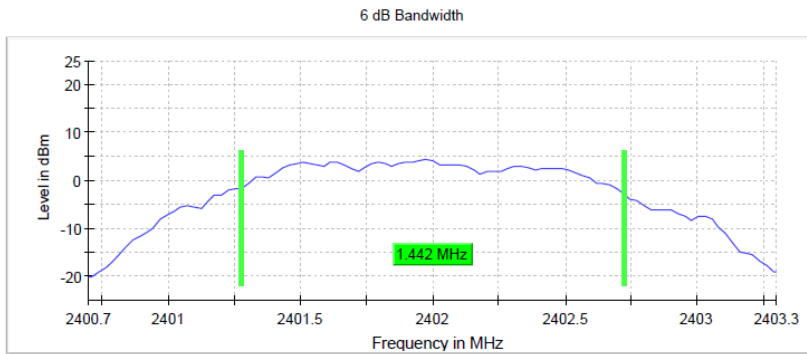


Setting	Instrument Value
Start Frequency	2.40070 GHz
Stop Frequency	2.40330 GHz
Span	2.600 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	101
Sweeptime	41.890 μ s
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	11 / max. 150
Stable	5 / 5
Max Stable Difference	0.16 dB

Radio Technology = WLAN b, Operating Frequency = low
(S01_166_AB01)

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2412.000000	9.200000	0.500000	---	2407.375000	2416.575000	8.0	PASS

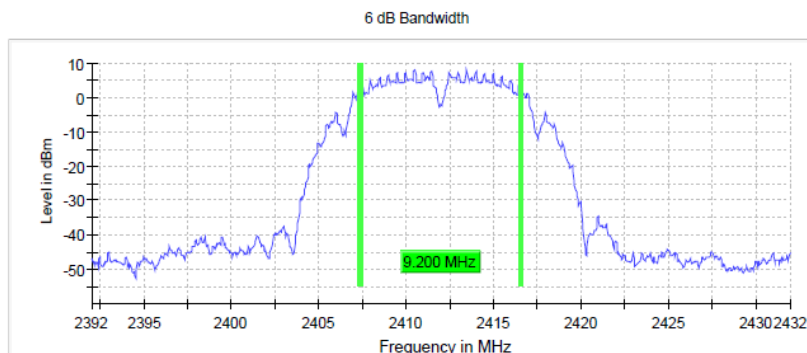


Setting	Instrument Value
Start Frequency	2.39200 GHz
Stop Frequency	2.43200 GHz
Span	40.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	800
Sweeptime	1.040 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	18 / max. 150
Stable	5 / 5
Max Stable Difference	0.35 dB

Radio Technology = WLAN g, Operating Frequency = low
(S01_166_AB01)

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2412.000000	16.400000	0.500000	—	2403.775000	2420.175000	4.0	PASS

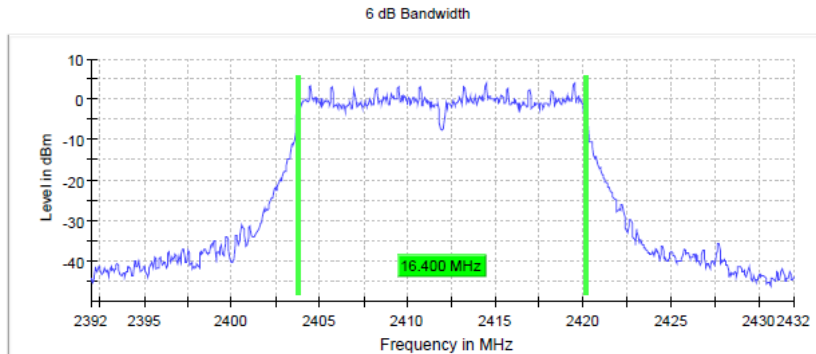


Setting	Instrument Value
Start Frequency	2.39200 GHz
Stop Frequency	2.43200 GHz
Span	40.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	800
SweepTime	1.040 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	40 / max. 150
Stable	5 / 5
Max Stable Difference	0.34 dB

Radio Technology = WLAN n 20 MHz, Operating Frequency = low
(S01_166_AB01)

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2412.000000	17.650000	0.500000	—	2403.125000	2420.775000	2.9	PASS

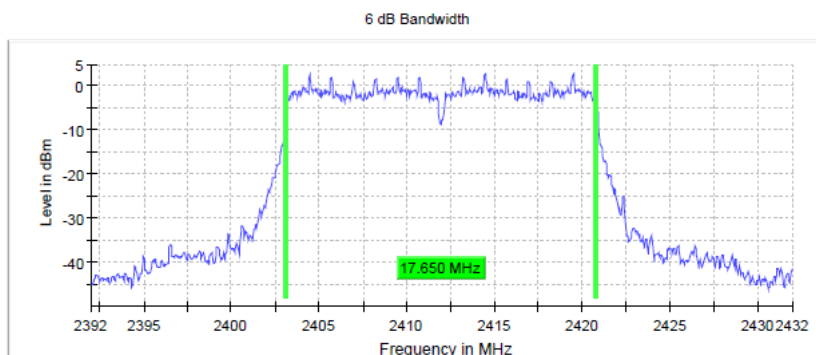


Setting	Instrument Value
Start Frequency	2.39200 GHz
Stop Frequency	2.43200 GHz
Span	40.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	800
SweepTime	1.040 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	41 / max. 150
Stable	5 / 5
Max Stable Difference	0.43 dB

Radio Technology = WLAN n 40 MHz, Operating Frequency = low
(S01_166_AB01)

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
2422.000000	35.900000	0.500000	—	2404.025000	2439.925000	-0.6	PASS

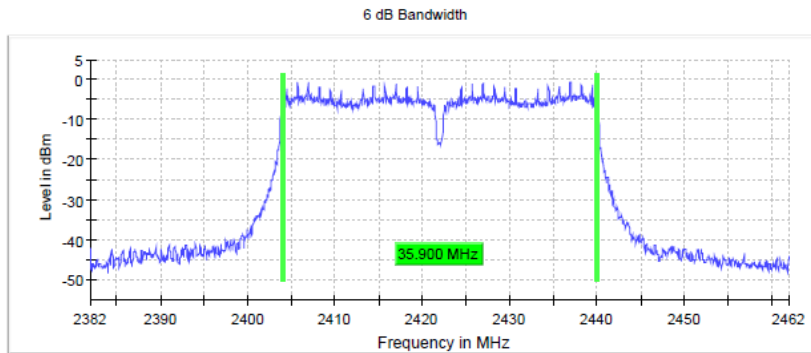

Setting	Instrument Value
Start Frequency	2.38200 GHz
Stop Frequency	2.46200 GHz
Span	80.000 MHz
RBW	100.000 kHz
VBW	300.000 kHz
SweepPoints	1600
SweepTime	1.600 ms
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamplifier	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	62 / max. 150
Stable	5 / 5
Max Stable Difference	0.27 dB

5.2.5 TEST EQUIPMENT USED

- R&S TS8997

5.3 OCCUPIED BANDWIDTH (99%)

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10 6.9.3

5.3.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 1 to 5 % of the OBW
- Video Bandwidth (VBW): ≥ 3 times the RBW
- Span: 1.5 to 5 times the OBW
- Trace: Maxhold
- Sweeps: Till stable (min. 500, max. 75000)
- Sweep time: Auto
- Detector: Peak

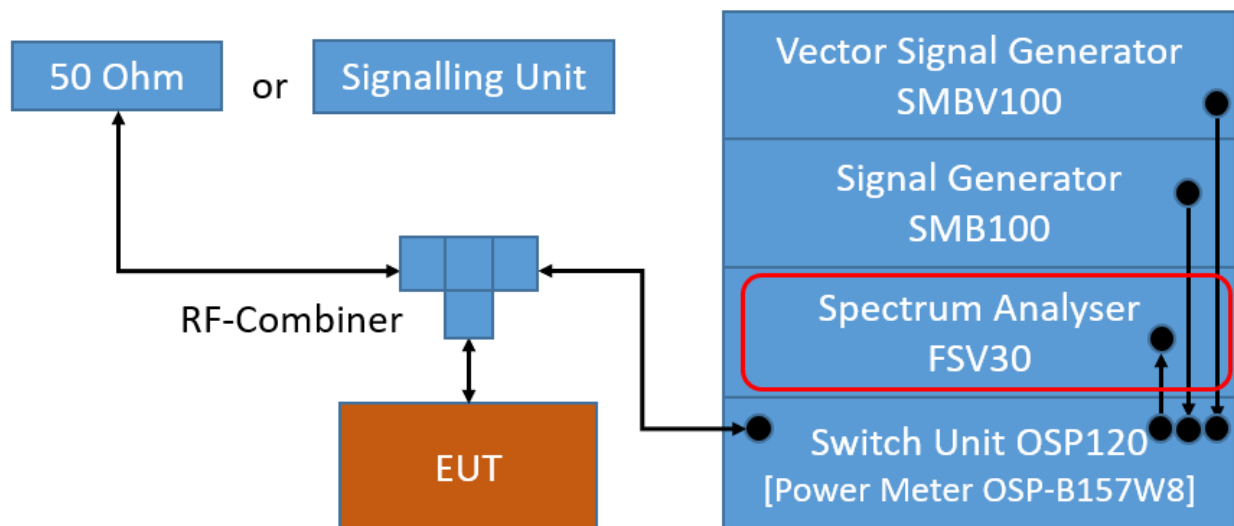

TS8997; Channel Bandwidth

5.3.2 TEST REQUIREMENTS / LIMITS

No applicable limit:

5.3.3 TEST PROTOCOL

Ambient temperature: 23 °C
 Air Pressure: 1006 hPa
 Humidity: 53 %
 BT GFSK

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	0.860
	39	2441	0.850
	78	2480	0.850

BT n/4 DQPSK

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	1.117
	39	2441	1.117
	78	2480	1.117

BT 8-DPSK

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	1.175
	39	2441	1.175
	78	2480	1.175

BT LE 1 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	1.030
	19	2440	1.020
	39	2480	1.030

BT LE 2 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	0	2402	2.025
	19	2440	2.025
	39	2480	2.025

WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	12.0
	6	2437	12.0
	11	2462	12.0

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	16.6
	6	2437	16.7
	11	2462	16.6

WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	17.7
	6	2437	17.7
	11	2462	17.7

WLAN n-Mode; 40 MHz; MCS0

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	3	2422	36.3
	6	2437	36.5
	9	2452	36.5


Remark: Please see next sub-clause for the measurement plot.

5.3.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = Bluetooth BDR, Operating Frequency = low
(S01_166_AB01)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2402.000000	0.865000	---	---	2401.557500	2402.422500	PASS

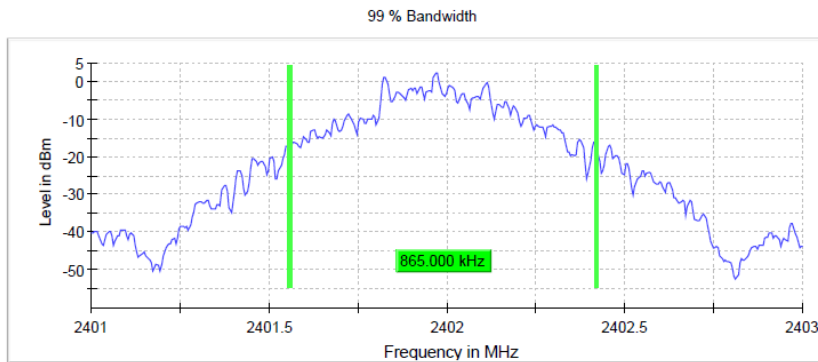


Setting	Instrument Value
Start Frequency	2.40100 GHz
Stop Frequency	2.40300 GHz
Span	2.000 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	400
SweepTime	419.000 μ s
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	500
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	5 / max. 150
Stable	3 / 3
Max Stable Difference	0.07 dB

Radio Technology = Bluetooth EDR 2, Operating Frequency = low
(S01_166_AB01)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2402.000000	1.170000	---	---	2401.407500	2402.577500	PASS

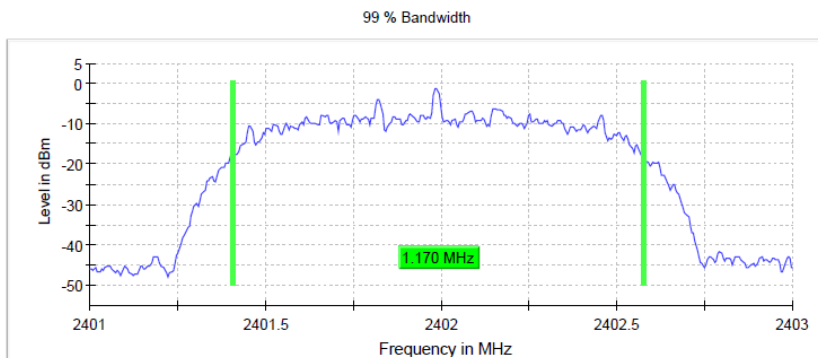


Setting	Instrument Value
Start Frequency	2.40100 GHz
Stop Frequency	2.40300 GHz
Span	2.000 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	400
SweepTime	419.000 μ s
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	500
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	6 / max. 150
Stable	3 / 3
Max Stable Difference	0.08 dB

Radio Technology = Bluetooth EDR 3, Operating Frequency = low
(S01_166_AB01)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2402.000000	1.175000	---	---	2401.407500	2402.582500	PASS

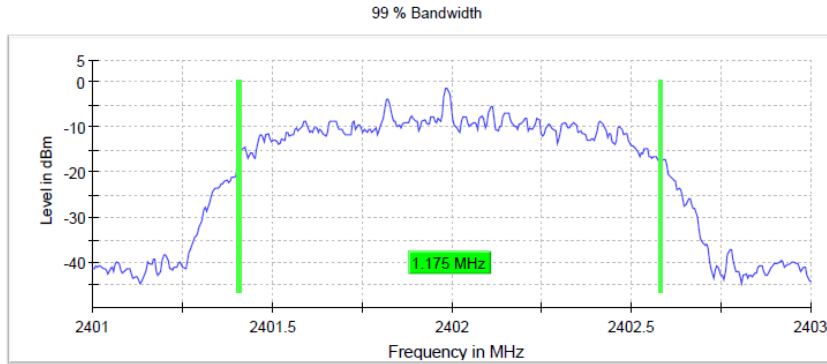


Setting	Instrument Value
Start Frequency	2.40100 GHz
Stop Frequency	2.40300 GHz
Span	2.000 MHz
RBW	10.000 kHz
VBW	30.000 kHz
SweepPoints	400
SweepTime	419.000 μ s
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	500
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamplifier	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	6 / max. 150
Stable	3 / 3
Max Stable Difference	0.07 dB

Radio Technology = Bluetooth LE 1 Mbps, Operating Frequency = low
(S01_166_AB01)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2402.000000	1.030000	---	---	2401.485000	2402.515000	PASS

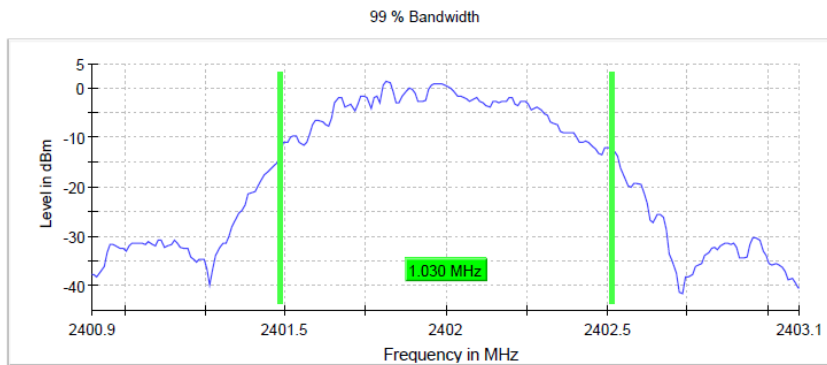


Setting	Instrument Value
Start Frequency	2.40090 GHz
Stop Frequency	2.40310 GHz
Span	2.200 MHz
RBW	20.000 kHz
VBW	100.000 kHz
SweepPoints	220
SweepTime	210.000 μ s
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamplifier	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	7 / max. 150
Stable	3 / 3
Max Stable Difference	0.10 dB

Radio Technology = Bluetooth LE 2 Mbps, Operating Frequency = low
(S01_166_AB01)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2402.000000	2.025000	---	---	2401.002500	2403.027500	PASS

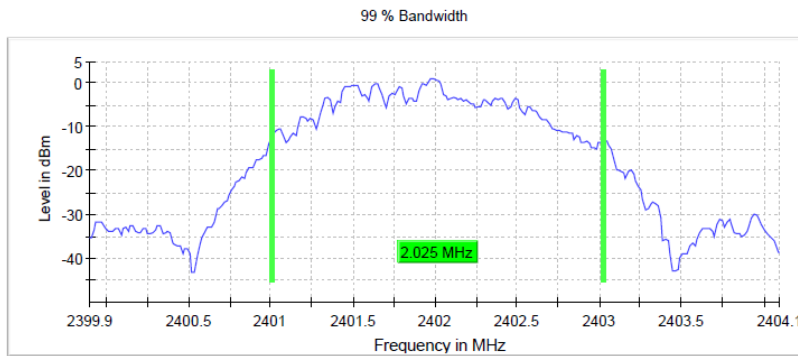


Setting	Instrument Value
Start Frequency	2.39990 GHz
Stop Frequency	2.40410 GHz
Span	4.200 MHz
RBW	30.000 kHz
VBW	100.000 kHz
SweepPoints	280
SweepTime	140.000 μs
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamplifier	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	10 / max. 150
Stable	3 / 3
Max Stable Difference	0.05 dB

Radio Technology = WLAN b, Operating Frequency = mid
(S01_166_AB01)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2437.000000	12.000000	---	---	2430.950000	2442.950000	PASS

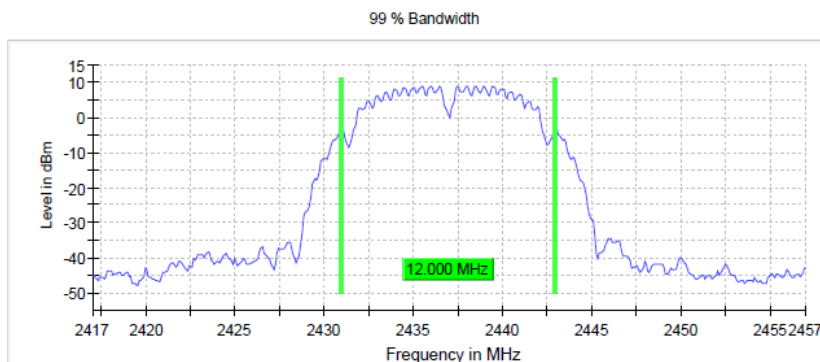


Setting	Instrument Value
Start Frequency	2.41700 GHz
Stop Frequency	2.45700 GHz
Span	40.000 MHz
RBW	200.000 kHz
VBW	1.000 MHz
SweepPoints	400
SweepTime	1.000 ms
Reference Level	0.000 dBm
Attenuation	10.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamplifier	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	16 / max. 150
Stable	3 / 3
Max Stable Difference	0.20 dB

Radio Technology = WLAN g, Operating Frequency = mid
(S01_166_AB01)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2437.000000	16.700000	---	---	2428.650000	2445.350000	PASS

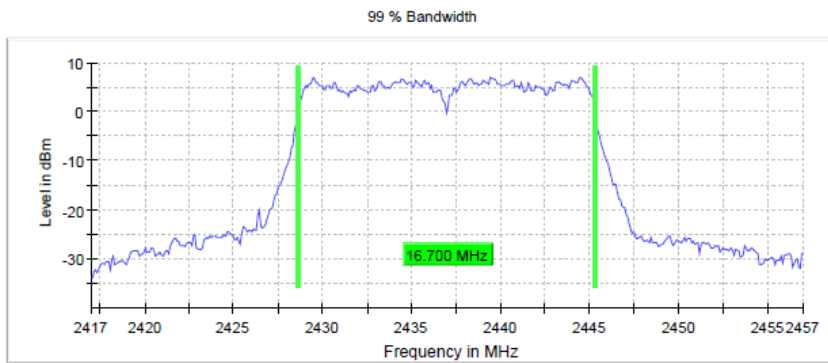


Setting	Instrument Value
Start Frequency	2.41700 GHz
Stop Frequency	2.45700 GHz
Span	40.000 MHz
RBW	200.000 kHz
VBW	1.000 MHz
SweepPoints	400
SweepTime	1.000 ms
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamplifier	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	35 / max. 150
Stable	3 / 3
Max Stable Difference	0.25 dB

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid
(S01_166_AB01)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2437.000000	17.700000	---	---	2428.150000	2445.850000	PASS

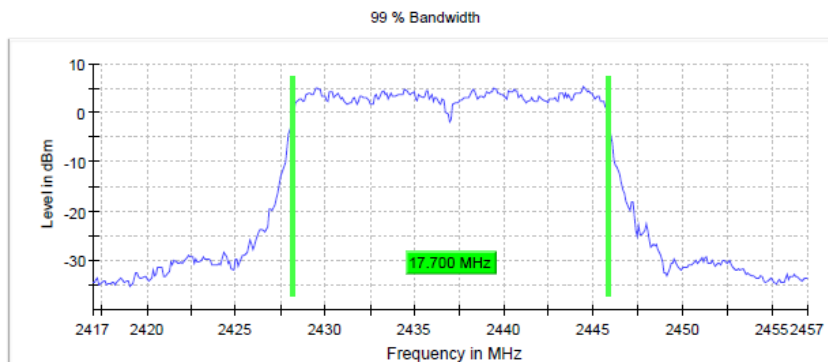


Setting	Instrument Value
Start Frequency	2.41700 GHz
Stop Frequency	2.45700 GHz
Span	40.000 MHz
RBW	200.000 kHz
VBW	1.000 MHz
SweepPoints	400
SweepTime	1.000 ms
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamplifier	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	51 / max. 150
Stable	3 / 3
Max Stable Difference	0.29 dB

Radio Technology = WLAN n 40 MHz, Operating Frequency = mid
(S01_166_AB01)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
2437.000000	36.500000	---	---	2418.625000	2455.125000	PASS

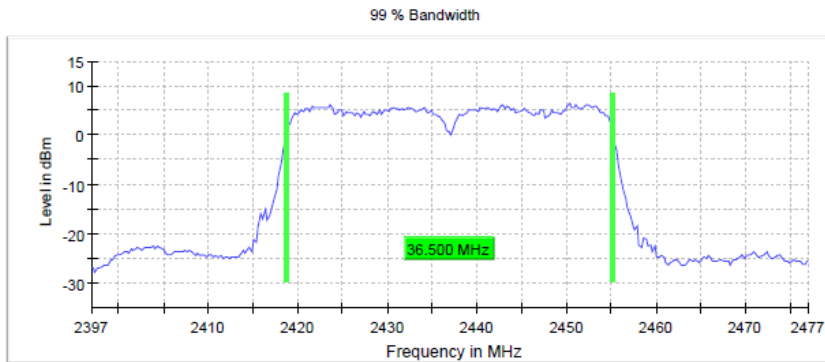

Setting	Instrument Value
Start Frequency	2.39700 GHz
Stop Frequency	2.47700 GHz
Span	80.000 MHz
RBW	500.000 kHz
VBW	2.000 MHz
SweepPoints	320
SweepTime	1.000 ms
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamplifier	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	65 / max. 150
Stable	3 / 3
Max Stable Difference	0.22 dB

5.3.5 TEST EQUIPMENT USED

- R&S TS8997

5.4 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10 11.9.1.1, 11.9.2.3.2

5.4.1 TEST DESCRIPTION

DTS EQUIPMENT:

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power.

Maximum peak conducted output power (e.g. Bluetooth Low Energy):


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered. The reference level of the spectrum analyser was set higher than the output power of the EUT.

Analyser settings:


- Resolution Bandwidth (RBW): $\geq$ DTS bandwidth
- Video Bandwidth (VBW): $\geq$ 3 times RBW or maximum of analyzer
- Span: $\geq$ 3 times RBW
- Trace: Maxhold
- Sweeps: Till stable (min. 300, max. 15000)
- Sweep time: Auto
- Detector: Peak

Maximum conducted average output power (e.g. WLAN):


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered. Measurement is performed using the gated RF average power meter integrated in the OSP 120 module OSP-B157W8 with signal bandwidth > 300 MHz.

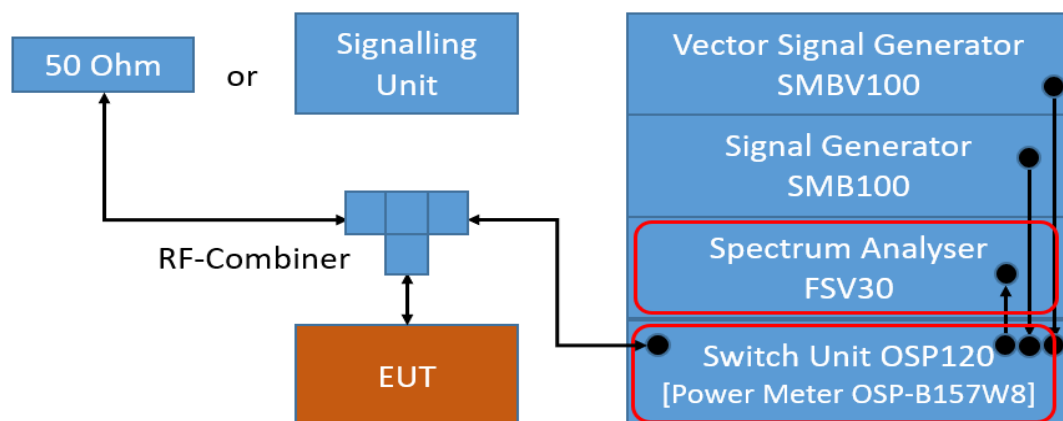

TS8997; Output Power

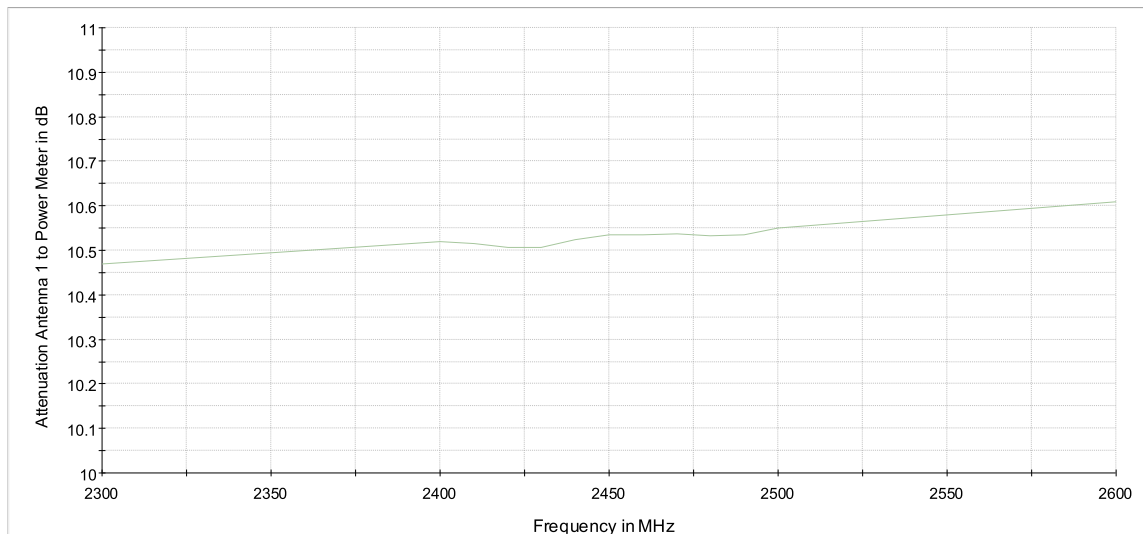

Attenuation of the measurement path to Power Meter

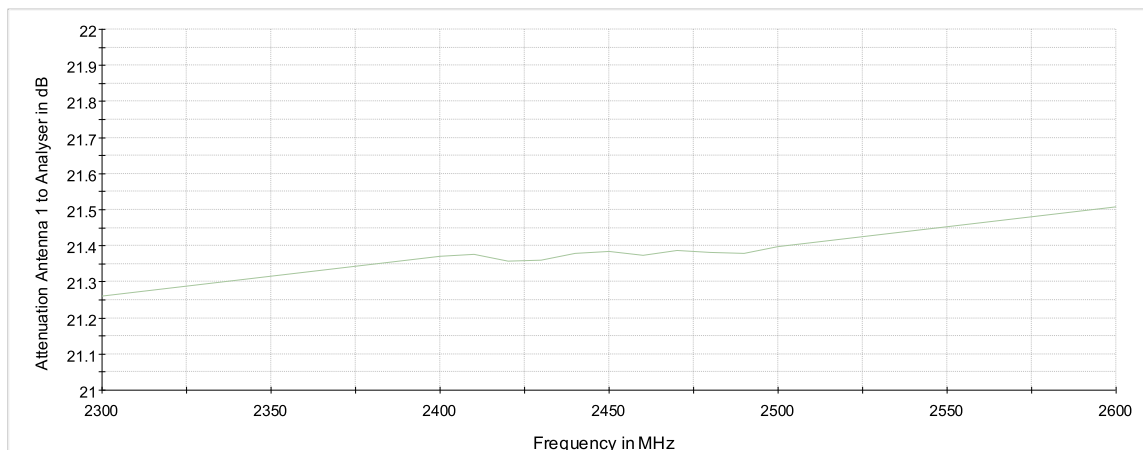

Attenuation of the measurement path to Analyser

5.4.2 TEST REQUIREMENTS / LIMITS

DTS devices:

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Frequency Hopping Systems:

FCC Part 15, Subpart C, §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

FCC Part 15, Subpart C, §15.247 (b) (2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

5.4.3 TEST PROTOCOL

Ambient temperature: 23 °C
Air Pressure: 1006 hPa
Humidity: 53 %
BT GFSK (1-DH1)

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	7.9	30.0	22.1	9.9
	39	2441	6.6	30.0	23.4	8.6
	78	2480	6.6	30.0	23.4	8.6

BT π/4 DQPSK (2-DH1)

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	6.1	30.0	23.9	8.1
	39	2441	6.0	30.0	24.0	8.0
	78	2480	5.8	30.0	24.2	7.8

BT 8-DPSK (3-DH1)

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	6.4	30.0	23.6	8.4
	39	2441	6.2	30.0	23.8	8.2
	78	2480	6.5	30.0	23.5	8.5

BT LE 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	7.8	30.0	22.2	9.8
	19	2440	7.6	30.0	22.4	9.6
	39	2480	7.6	30.0	22.4	9.6

BT LE 2 Mbit/s

Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	0	2402	7.8	30.0	22.2	9.8
	19	2440	7.8	30.0	22.2	9.8
	39	2480	7.6	30.0	22.4	9.6

WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	17.5	30.0	12.5	19.5
	6	2437	17.5	30.0	12.5	19.5
	11	2462	17.6	30.0	12.4	19.6

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	15.2	30.0	14.8	17.2
	6	2437	17.3	30.0	12.7	19.3
	11	2462	15.4	30.0	14.6	17.4

WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	14.4	30.0	15.6	16.4
	6	2437	15.5	30.0	14.5	17.5
	11	2462	14.6	30.0	15.4	16.6

WLAN n-Mode; 40 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Maximum Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	3	2422	13.3	30.0	16.7	15.3
	6	2437	15.3	30.0	14.7	17.3
	9	2452	14.5	30.0	15.5	16.5


Remark: Please see next sub-clause for the measurement plot.

No plots are provided for WLAN since a power meter was used for measurement.

5.4.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = Bluetooth BDR, Operating Frequency = low, Measurement method = conducted
(S01_166_AB01)


DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	7.9	21.0	PASS

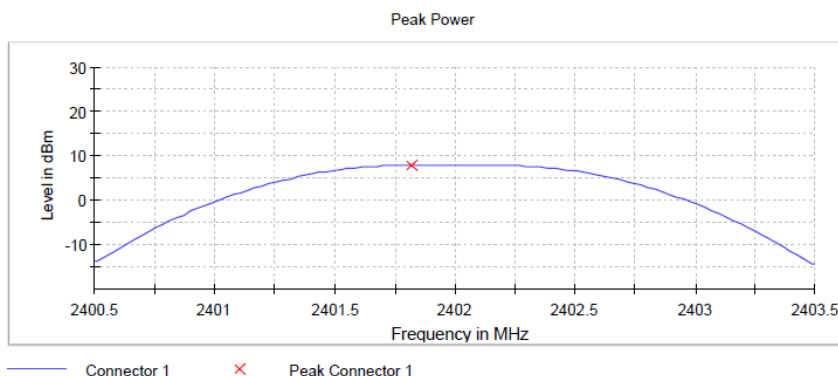

Setting	Instrument Value
Start Frequency	2.40050 GHz
Stop Frequency	2.40350 GHz
Span	3.000 MHz
RBW	1.000 MHz
VBW	3.000 MHz
SweepPoints	101
Sweeptime	4.210 μ s
Reference Level	20.000 dBm
Attenuation	30.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	FFT
Preamplifier	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.00 dB

Radio Technology = Bluetooth EDR 2, Operating Frequency = low, Measurement method = conducted
(S01_166_AB01)


DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	6.1	21.0	PASS

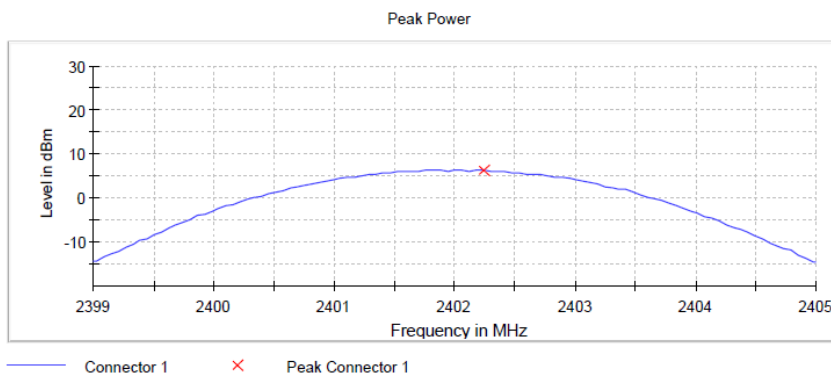

Setting	Instrument Value
Start Frequency	2.39900 GHz
Stop Frequency	2.40500 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	1.000 ms
Reference Level	20.000 dBm
Attenuation	30.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamplifier	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.15 dB

Radio Technology = Bluetooth EDR 3, Operating Frequency = low, Measurement method = conducted
(S01_166_AB01)

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	6.4	21.0	PASS

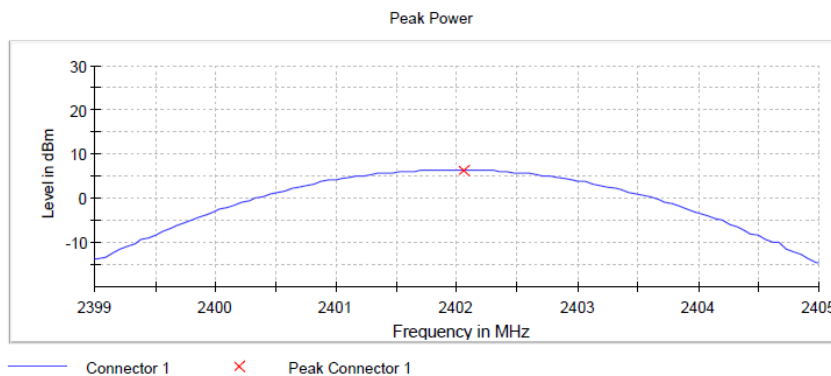


Setting	Instrument Value
Start Frequency	2.39900 GHz
Stop Frequency	2.40500 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	1.000 ms
Reference Level	20.000 dBm
Attenuation	30.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamplifier	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.12 dB

Radio Technology = Bluetooth LE 1 Mbps, Operating Frequency = low, Measurement method = conducted
(S01_166_AB01)

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	7.8	30.0	PASS

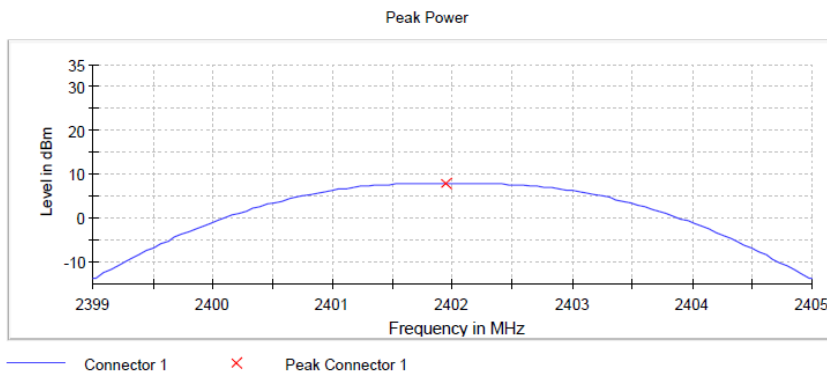


Setting	Instrument Value
Start Frequency	2.39900 GHz
Stop Frequency	2.40500 GHz
Span	6.000 MHz
RBW	2.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	1.000 ms
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.02 dB

Radio Technology = Bluetooth LE 2 Mbps, Operating Frequency = low, Measurement method = conducted
(S01_166_AB01)

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	7.8	30.0	PASS

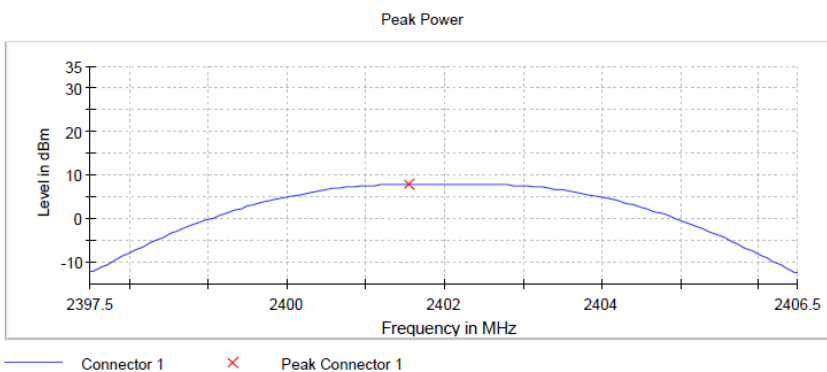

Setting	Instrument Value
Start Frequency	2.39750 GHz
Stop Frequency	2.40650 GHz
Span	9.000 MHz
RBW	3.000 MHz
VBW	10.000 MHz
SweepPoints	101
SweepTime	1.000 ms
Reference Level	10.000 dBm
Attenuation	20.000 dB
Detector	MaxPeak
SweepCount	100
Filter	3 dB
Trace Mode	Max Hold
SweepType	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.50 dB
Run	4 / max. 150
Stable	3 / 3
Max Stable Difference	0.02 dB

5.4.5 TEST EQUIPMENT USED

- R&S TS8997

5.5 SPURIOUS RF CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10 11.11

5.5.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Analyser settings:

- Frequency range: 30 – 26000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: Till Stable (max. 120)
- Sweep Time: Auto
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance conducted". This value is used to calculate the 20 dBc or 30 dBc limit.

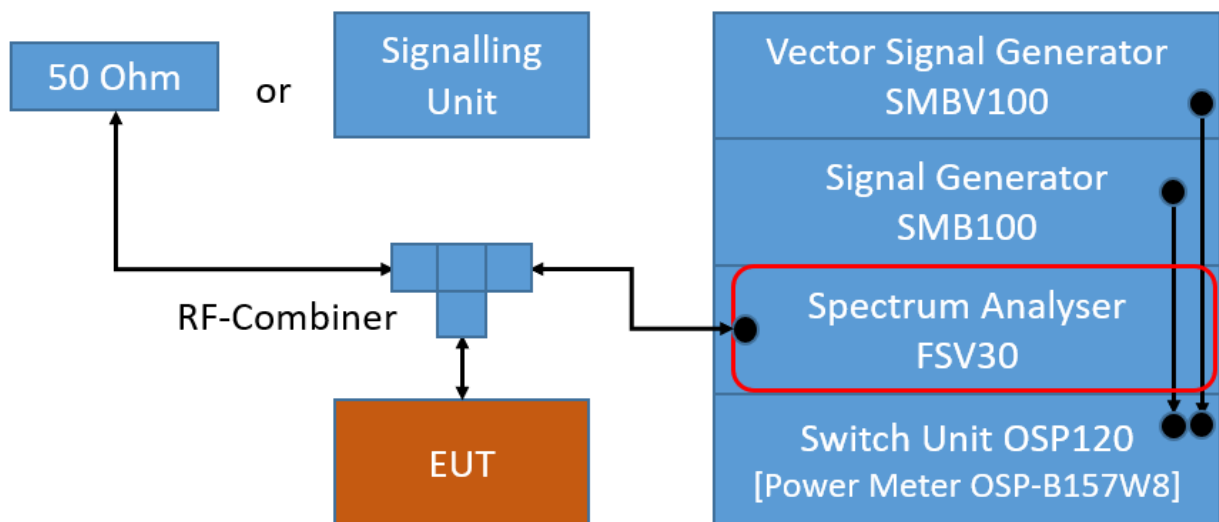

TS8997; Spurious RF Conducted Emissions

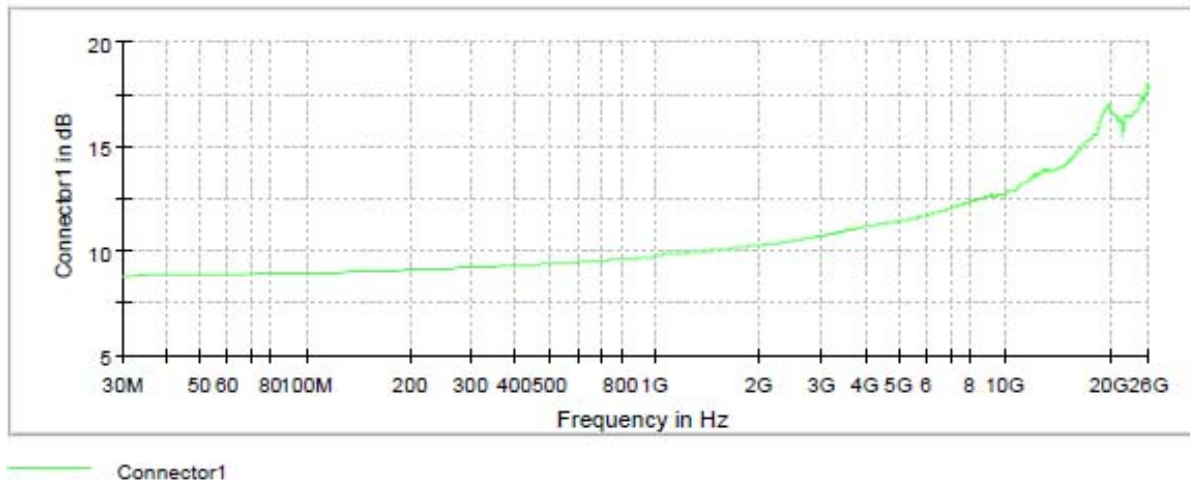

Attenuation of the measurement part

5.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.5.3 TEST PROTOCOL

Ambient temperature: 23 °C
 Air Pressure: 1006 hPa
 Humidity: 53 %
 BT GFSK

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2395.0	-53.7	PEAK	100	6.7	-13.3	40.4
39	2441	841.6	-44.7	PEAK	100	6.4	-13.6	31.1
78	2480	2488.5	-55.9	PEAK	100	6.4	-13.6	42.3

BT π/4 DQPSK

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2395.0	-48.6	PEAK	100	4.7	-15.3	33.3
39	2441	7325.7	-62.2	PEAK	100	2.4	-17.6	44.6
78	2480	2884.5	-56.2	PEAK	100	4.3	-15.7	40.5

BT 8-DPSK

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2395.0	-46.8	PEAK	100	4.1	-15.9	30.9
39	2441	7325.7	-59.4	PEAK	100	3.0	-17.0	42.4
78	2480	2488.5	-55.8	PEAK	100	2.0	-18.0	37.8

BT LE 1 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	881.4	-40.6	PEAK	100	5.6	-14.4	26.2
19	2440	891.4	-56.0	PEAK	100	6.3	-13.7	42.3
39	2480	881.4	-43.1	PEAK	100	6.7	-13.3	29.8

BT LE 2 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
0	2402	2395.0	-27.0	PEAK	100	4.3	-15.7	11.3
19	2440	881.4	-44.5	PEAK	100	6.9	-13.1	31.4
39	2480	881.4	-44.3	PEAK	100	6.7	-13.3	31.0

WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2395.0	-38.7	PEAK	100	8.0	-22.0	16.7
6	2437	1628.3	-45.0	PEAK	100	8.0	-22.0	23.0
11	2462	25855.1	-39.1	PEAK	100	8.0	-22.0	17.1

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2395.0	-38.1	PEAK	100	3.9	-26.1	12.0
6	2437	3248.1	-44.2	PEAK	100	5.9	-24.1	20.1
11	2462	24915.6	-39.9	PEAK	100	4.1	-25.9	14.0

WLAN n-Mode; 20 MHz; MCS0

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2395.0	-36.8	PEAK	100	2.8	-27.2	9.6
6	2437	2688.4	-47.8	PEAK	100	4.0	-26.0	21.8
11	2462	24865.7	-40.3	PEAK	100	3.1	-26.9	13.4

WLAN n-Mode; 40 MHz; MCS0

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
3	2422	2395.0	-39.7	PEAK	100	0.3	-29.7	10.0
6	2437	2488.5	-44.2	PEAK	100	0.1	-29.9	14.3
9	2452	2488.5	-36.5	PEAK	100	1.1	-28.9	7.6

Remark: Please see next sub-clause for the measurement plot.

5.5.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = Bluetooth BDR, Operating Frequency = low
(S01_166_AB01)

