



element

SonicSensory, Inc.

Jonah

FCC 15.247:2019

Bluetooth (FHSS) TI CC2564C Radio

Report # DROP0009.2



NVLAP LAB CODE: 200676-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST



Last Date of Test: June 10, 2019

SonicSensory, Inc.

Model: Jonah

Radio Equipment Testing

Standards

Specification	Method
FCC 15.207:2019	ANSI C63.10:2013
FCC 15.247:2019	

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	Yes	Pass	
6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
7.5	Duty Cycle	Yes	Pass	
7.8.2	Carrier Frequency Separation	Yes	Pass	
7.8.3	Number of Hopping Frequencies	Yes	Pass	
7.8.4	Dwell Time	Yes	Pass	
7.8.5	Output Power	Yes	Pass	
7.8.5	Equivalent Isotropic Radiated Power	Yes	Pass	
7.8.6	Band Edge Compliance	Yes	Pass	
7.8.6	Band Edge Compliance - Hopping Mode	Yes	Pass	
7.8.7	Occupied Bandwidth	Yes	Pass	
7.8.8	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Victor Ratinoff, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
BSMI				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157



MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.1 dB	-5.1 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Test Setup Block Diagrams


Antenna Port Conducted Measurements

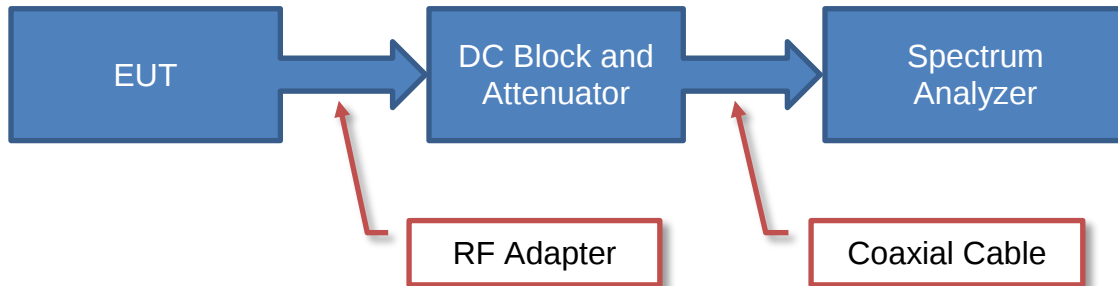

Near Field Test Fixture Measurements

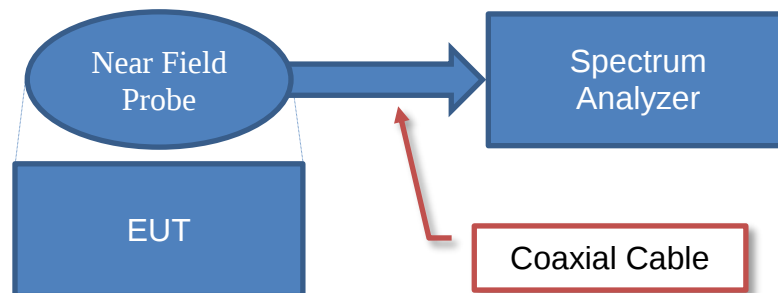

Spurious Radiated Emissions

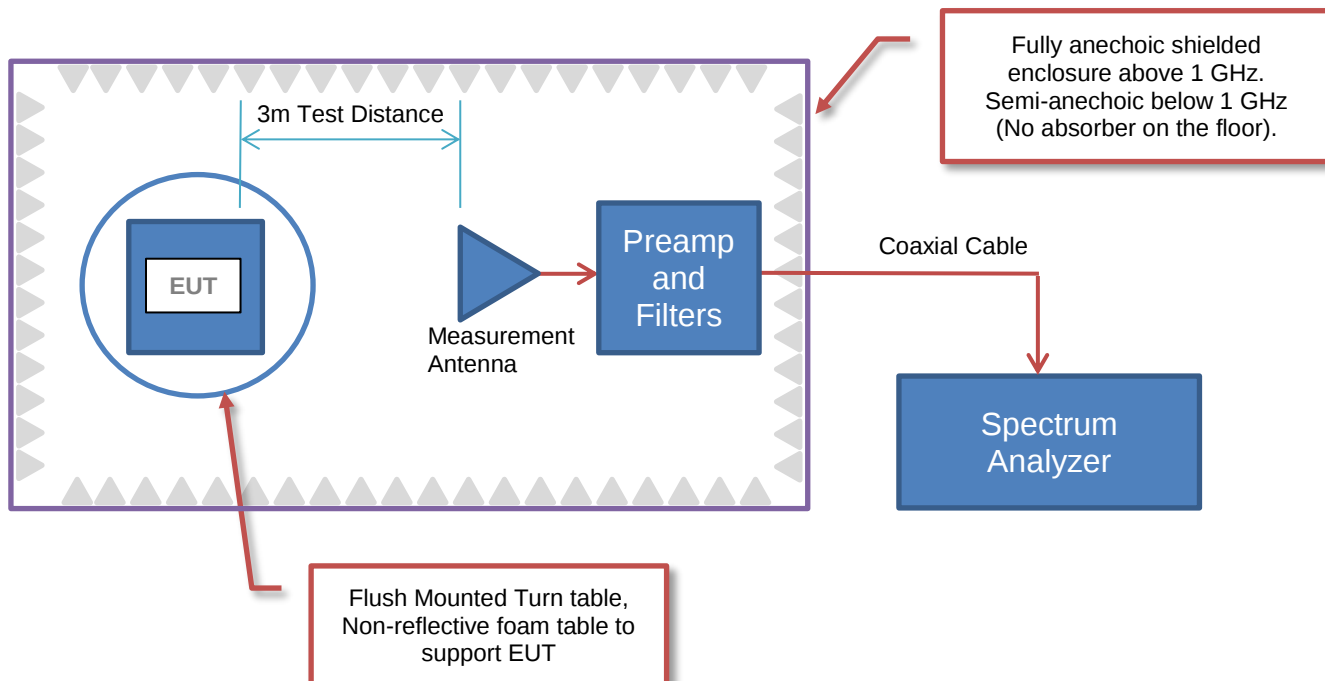

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	SonicSensory, Inc.
Address:	1163 Logan St
City, State, Zip:	Los Angeles, CA 90026
Test Requested By:	Mimi Liu
Model:	Jonah
First Date of Test:	June 5, 2019
Last Date of Test:	June 10, 2019
Receipt Date of Samples:	June 5, 2019
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

Jonah is a radio enabled footwear device with audio processing devices and low frequency transducers, which transmit vibrational energy received from multimedia and environmental sources. The transducers are located under the arch area. Jonah comes with built in rechargeable Lithium-ion batteries and custom programmable options via the SonicSensory app.

Testing Objective:

To demonstrate compliance of the Bluetooth radio to FCC 15.247 requirements.

CONFIGURATIONS

Configuration DROP0009- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Jonah	SonicSensory, Inc.	PVT- Jonah	PL1919P10041
Jonah	SonicSensory, Inc.	PVT- Jonah	PR1919P10030

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Power supply	Asian Power Devices	WB-24J12FU	S9510999000058

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC cable	Yes	1.8m	Yes	Power supply	Jonah

Configuration DROP0009- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Jonah	SonicSensory, Inc.	PVT- Jonah	PL1919P10041

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Power supply	Asian Power Devices	WB-24J12FU	S9510999000058

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC cable	Yes	1.8m	Yes	Power supply	Jonah

CONFIGURATIONS



Configuration DROP0009- 3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Jonah	SonicSensory, Inc.	PVT- Jonah	PL191910034

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Power supply	Asian Power Devices	WB-24J12FU	S9510999000058

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	HP	XPS159560	25058299006
USB-SPI Converter	CSR	1324	398772

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC cable	Yes	1.8m	Yes	Power supply	Jonah
Ethernet	No	1.5m	No	Laptop	USB-SPI
Ethernet	Yes	1m	No	USB-SPI	Ribbon
Ribbon	No	0.05m	No	Ethernet	Jonah

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2019-06-05	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2019-06-06	Carrier Frequency Separation	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2019-06-06	Number of Hopping Channels	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2019-06-06	Dwell Time	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2019-06-06	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2019-06-06	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2019-06-06	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2019-06-10	Band Edge Compliance - Hopping Mode	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
9	2019-06-06	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
10	2019-06-06	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
11	2019-06-10	Powerline Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

AC POWERLINE CONDUCTED EMISSIONS



TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Per the standard, an insulating material was also added to ground plane between the EUT's power and remote I/O cables. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Receiver	Rohde & Schwarz	ESCI	ARG	2018-07-05	2019-07-05
Cable - Conducted Cable Assembly	Northwest EMC	OCP, HFP, AWC	OCPA	2018-10-05	2019-10-05
LISN	Solar Electronics	9252-50-24-BNC	LIA	2019-01-08	2020-01-08

MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	2.4 dB	-2.4 dB

CONFIGURATIONS INVESTIGATED

DROP0009-3

MODES INVESTIGATED

TI Radio: Mid Channel 2440 MHz, 1MHz DH5

AC POWERLINE CONDUCTED EMISSIONS



EUT:	Jonah	Work Order:	DROP0009
Serial Number:	PL1919P10034	Date:	2019-06-10
Customer:	SonicSensory, Inc.	Temperature:	26.6°C
Attendees:	Daniel Quiros	Relative Humidity:	43%
Customer Project:	None	Bar. Pressure:	1015 mb
Tested By:	Mark Baytan	Job Site:	OC06
Power:	110VAC/60Hz	Configuration:	DROP0009-3

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2019	ANSI C63.10:2013

TEST PARAMETERS

Run #:	9	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	---	-------	-----------	-----------------------------	---

COMMENTS

None


EUT OPERATING MODES

TI Radio: Mid Channel 2440 MHz, 1MHz DH5


DEVIATIONS FROM TEST STANDARD

None

Peak Data - vs - Quasi Peak Limit

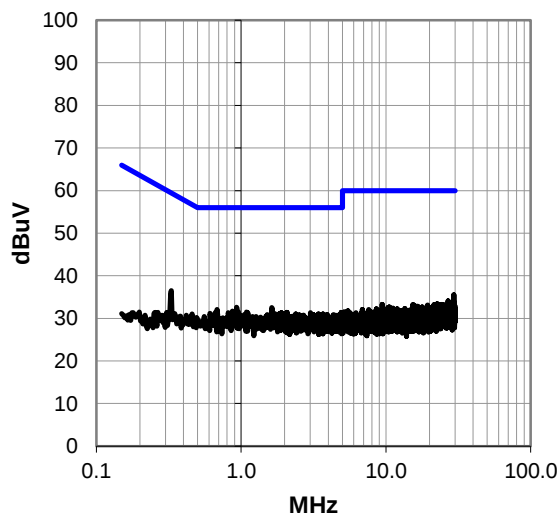

Peak Data - vs - Average Limit

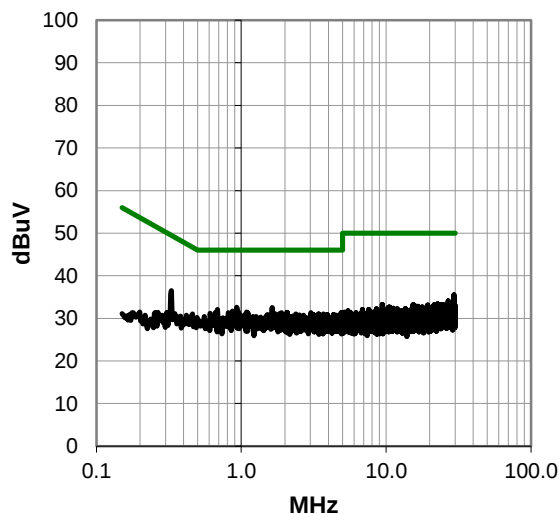

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #9

Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.329	16.4	20.1	36.5	59.5	-23.0
0.930	12.6	20.0	32.6	56.0	-23.4
1.631	12.4	20.1	32.5	56.0	-23.5
0.684	12.1	20.0	32.1	56.0	-23.9
0.870	11.7	20.0	31.7	56.0	-24.3
0.956	11.5	20.0	31.5	56.0	-24.5
1.090	11.5	20.0	31.5	56.0	-24.5
29.403	13.4	22.1	35.5	60.0	-24.5
2.068	11.3	20.1	31.4	56.0	-24.6
4.914	11.1	20.3	31.4	56.0	-24.6
0.661	11.3	20.0	31.3	56.0	-24.7
0.814	11.3	20.0	31.3	56.0	-24.7
1.113	11.3	20.0	31.3	56.0	-24.7
1.896	11.2	20.1	31.3	56.0	-24.7
3.019	11.0	20.3	31.3	56.0	-24.7
1.709	11.0	20.1	31.1	56.0	-24.9
1.840	11.0	20.1	31.1	56.0	-24.9
4.881	10.8	20.3	31.1	56.0	-24.9
2.385	10.8	20.2	31.0	56.0	-25.0
3.422	10.7	20.3	31.0	56.0	-25.0
3.679	10.7	20.3	31.0	56.0	-25.0
1.053	10.9	20.0	30.9	56.0	-25.1
1.515	10.8	20.1	30.9	56.0	-25.1
3.153	10.6	20.3	30.9	56.0	-25.1
3.926	10.6	20.3	30.9	56.0	-25.1
4.336	10.6	20.3	30.9	56.0	-25.1

Peak Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.329	16.4	20.1	36.5	49.5	-13.0
0.930	12.6	20.0	32.6	46.0	-13.4
1.631	12.4	20.1	32.5	46.0	-13.5
0.684	12.1	20.0	32.1	46.0	-13.9
0.870	11.7	20.0	31.7	46.0	-14.3
0.956	11.5	20.0	31.5	46.0	-14.5
1.090	11.5	20.0	31.5	46.0	-14.5
29.403	13.4	22.1	35.5	50.0	-14.5
2.068	11.3	20.1	31.4	46.0	-14.6
4.914	11.1	20.3	31.4	46.0	-14.6
0.661	11.3	20.0	31.3	46.0	-14.7
0.814	11.3	20.0	31.3	46.0	-14.7
1.113	11.3	20.0	31.3	46.0	-14.7
1.896	11.2	20.1	31.3	46.0	-14.7
3.019	11.0	20.3	31.3	46.0	-14.7
1.709	11.0	20.1	31.1	46.0	-14.9
1.840	11.0	20.1	31.1	46.0	-14.9
4.881	10.8	20.3	31.1	46.0	-14.9
2.385	10.8	20.2	31.0	46.0	-15.0
3.422	10.7	20.3	31.0	46.0	-15.0
3.679	10.7	20.3	31.0	46.0	-15.0
1.053	10.9	20.0	30.9	46.0	-15.1
1.515	10.8	20.1	30.9	46.0	-15.1
3.153	10.6	20.3	30.9	46.0	-15.1
3.926	10.6	20.3	30.9	46.0	-15.1
4.336	10.6	20.3	30.9	46.0	-15.1

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS



EUT:	Jonah	Work Order:	DROP0009
Serial Number:	PL1919P10034	Date:	2019-06-10
Customer:	SonicSensory, Inc.	Temperature:	26.6°C
Attendees:	Daniel Quiros	Relative Humidity:	43%
Customer Project:	None	Bar. Pressure:	1015 mb
Tested By:	Mark Baytan	Job Site:	OC06
Power:	110VAC/60Hz	Configuration:	DROP0009-3

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2019	ANSI C63.10:2013

TEST PARAMETERS

Run #:	10	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	----	-------	---------	-----------------------------	---

COMMENTS

None


EUT OPERATING MODES

TI Radio: Mid Channel 2440 MHz, 1MHz DH5


DEVIATIONS FROM TEST STANDARD

None

Peak Data - vs - Quasi Peak Limit

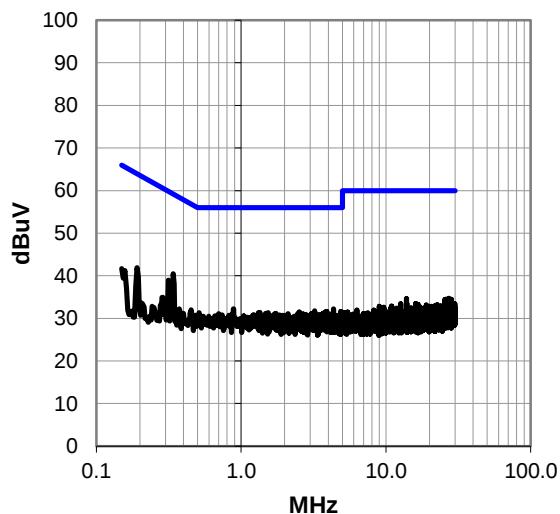

Peak Data - vs - Average Limit

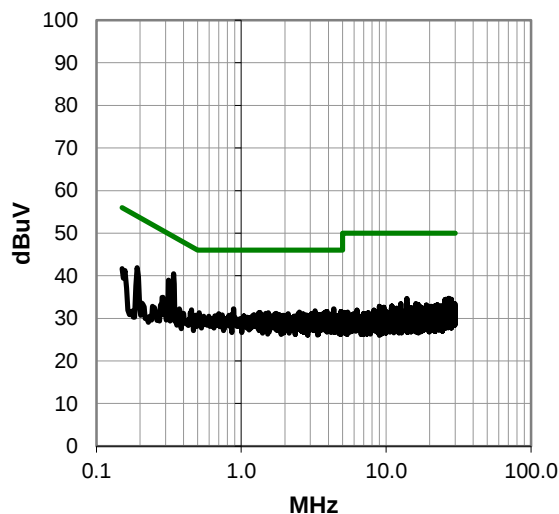

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #10

Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.340	20.4	20.1	40.5	59.2	-18.7
0.314	18.9	20.1	39.0	59.9	-20.9
0.329	17.6	20.1	37.7	59.5	-21.8
0.191	21.7	20.2	41.9	64.0	-22.1
0.885	12.2	20.0	32.2	56.0	-23.8
4.351	11.9	20.3	32.2	56.0	-23.8
3.224	11.5	20.3	31.8	56.0	-24.2
0.150	21.4	20.3	41.7	66.0	-24.3
3.855	11.3	20.3	31.6	56.0	-24.4
3.903	11.3	20.3	31.6	56.0	-24.4
4.881	11.3	20.3	31.6	56.0	-24.4
2.523	11.3	20.2	31.5	56.0	-24.5
1.348	11.4	20.0	31.4	56.0	-24.6
0.512	11.3	20.0	31.3	56.0	-24.7
1.318	11.3	20.0	31.3	56.0	-24.7
1.534	11.2	20.1	31.3	56.0	-24.7
3.769	11.0	20.3	31.3	56.0	-24.7
0.452	12.0	20.0	32.0	56.8	-24.8
1.474	11.1	20.1	31.2	56.0	-24.8
1.743	11.1	20.1	31.2	56.0	-24.8
3.679	10.9	20.3	31.2	56.0	-24.8
0.698	11.1	20.0	31.1	56.0	-24.9
2.105	11.0	20.1	31.1	56.0	-24.9
2.463	10.9	20.2	31.1	56.0	-24.9
2.478	10.9	20.2	31.1	56.0	-24.9
3.071	10.8	20.3	31.1	56.0	-24.9

Peak Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.340	20.4	20.1	40.5	49.2	-8.7
0.314	18.9	20.1	39.0	49.9	-10.9
0.329	17.6	20.1	37.7	49.5	-11.8
0.191	21.7	20.2	41.9	54.0	-12.1
0.885	12.2	20.0	32.2	46.0	-13.8
4.351	11.9	20.3	32.2	46.0	-13.8
3.224	11.5	20.3	31.8	46.0	-14.2
0.150	21.4	20.3	41.7	56.0	-14.3
3.855	11.3	20.3	31.6	46.0	-14.4
3.903	11.3	20.3	31.6	46.0	-14.4
4.881	11.3	20.3	31.6	46.0	-14.4
2.523	11.3	20.2	31.5	46.0	-14.5
1.348	11.4	20.0	31.4	46.0	-14.6
0.512	11.3	20.0	31.3	46.0	-14.7
1.318	11.3	20.0	31.3	46.0	-14.7
1.534	11.2	20.1	31.3	46.0	-14.7
3.769	11.0	20.3	31.3	46.0	-14.7
0.452	12.0	20.0	32.0	46.8	-14.8
1.474	11.1	20.1	31.2	46.0	-14.8
1.743	11.1	20.1	31.2	46.0	-14.8
3.679	10.9	20.3	31.2	46.0	-14.8
0.698	11.1	20.0	31.1	46.0	-14.9
2.105	11.0	20.1	31.1	46.0	-14.9
2.463	10.9	20.2	31.1	46.0	-14.9
2.478	10.9	20.2	31.1	46.0	-14.9
3.071	10.8	20.3	31.1	46.0	-14.9

CONCLUSION

Pass



Tested By

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.05.10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Low CH. 2402 MHz, Mid Ch. 2440 MHz, High Ch. 2480 MHz. Data Rates - DH5, 2DH5, 3DH5

POWER SETTINGS INVESTIGATED

110VAC/60Hz

CONFIGURATIONS INVESTIGATED

DROP0009 - 2

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	24 GHz
-----------------	--------	----------------	--------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	Fairview Microwave	SA18H-20	TKQ	NCR	0 mo
Cable	Northwest EMC	8-18GHz RE Cables	OCO	10-Jan-2019	12 mo
Cable	Northwest EMC	18-26GHz RE Cables	OCK	19-Dec-2018	12 mo
Cable	Northwest EMC	1-8GHz RE Cables	OCJ	10-Jan-2019	12 mo
Cable	Northwest EMC	10kHz-1GHz RE Cables	OCH	20-Sep-2018	12 mo
Cable	ESM Cable Corp.	KMKM-72	OC1	19-Dec-2018	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	HHX	16-Jul-2018	12 mo
Antenna - Biconilog	Teseq	CBL 6141A	AYE	7-Nov-2017	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1402	AOZ	10-Jul-2018	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-4D-010120-30-10P-1	AOP	10-Jan-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AOI	19-Dec-2018	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AOF	10-Jan-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AOE	10-Jan-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AHT	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AHR	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHN	NCR	0 mo
Antenna - Double Ridge	EMCO	3115	AHB	28-Mar-2018	24 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFJ	18-Dec-2018	12 mo

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These “pre-scans” are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.


SPURIOUS RADIATED EMISSIONS



Work Order:	DROP0009	Date:	5-Jun-2019	EmiRS 2018.09.26	PSA-ESCI 2019.05.10
Project:	None	Temperature:	22.6 °C		
Job Site:	OC10	Humidity:	49.3% RH		
Serial Number:	PL1919P10041	Barometric Pres.:	1016 mbar	Tested by:	Sal Solorzano
EUT:	Jonah				
Configuration:	2				
Customer:	SonicSensory, Inc.				
Attendees:	Daniel Quiros				
EUT Power:	110VAC/60Hz				
Operating Mode:	Transmitting Bluetooth: Low Channel 2402 MHz, Mid Channel 2440 MHz, High Channel 2480 MHz, Data Rates: DH5, 2DH5, 3DH5				
Deviations:	None				
Comments:	2nd Jonah SN: PR1919P10030, Band Edge Worst Case Duty Cycle: pi/4-DQPSK = 8.64% DCCF = pi/4-DQPSK Tx relaxation of -21.3 dB From Dwell Time: DCCF= 20*LOG (Pulse Width 2.8ms*3(pulses) / 100ms) = -21.3dB				

Test Specifications	Test Method
FCC 15.247:2019	ANSI C63.10:2013

Run #	12	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

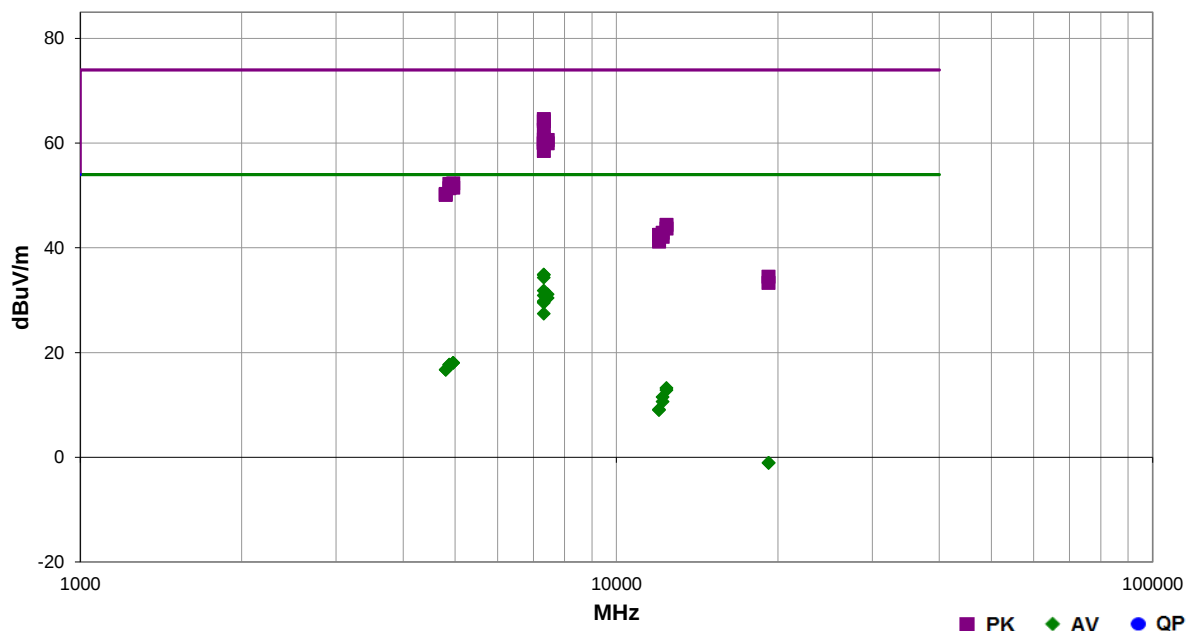

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7320.040	46.2	18.4	1.1	233.0	0.0	0.0	Vert	PK	0.0	64.6	74.0	-9.4	Mid Ch, EUT Horz, 3DH5
7319.510	45.8	18.4	1.0	232.0	0.0	0.0	Vert	PK	0.0	64.2	74.0	-9.8	Mid Ch, EUT Horz, 2DH5
7319.600	44.2	18.4	1.1	231.0	0.0	0.0	Vert	PK	0.0	62.6	74.0	-11.4	Mid Ch, EUT Horz
7319.620	42.3	18.4	1.6	245.0	0.0	0.0	Horz	PK	0.0	60.7	74.0	-13.3	Mid Ch, EUT Vert
7439.700	42.1	18.5	1.0	241.0	0.0	0.0	Vert	PK	0.0	60.6	74.0	-13.4	High Ch, EUT Horz
7320.545	41.7	18.4	1.2	344.0	0.0	0.0	Horz	PK	0.0	60.1	74.0	-13.9	Mid Ch, EUT on side
7320.090	41.6	18.4	1.2	43.0	0.0	0.0	Horz	PK	0.0	60.0	74.0	-14.0	Mid Ch, EUT Horz
7319.555	41.6	18.4	3.7	113.0	0.0	0.0	Vert	PK	0.0	60.0	74.0	-14.0	Mid Ch, EUT on side
7440.305	41.5	18.5	1.6	274.0	0.0	0.0	Horz	PK	0.0	60.0	74.0	-14.0	High Ch, EUT Vert
7320.365	40.1	18.4	1.2	185.0	0.0	0.0	Vert	PK	0.0	58.5	74.0	-15.5	Mid Ch, EUT Vert
7320.000	37.8	18.4	1.0	232.0	-21.3	0.0	Vert	AV	0.0	34.9	54.0	-19.1	Mid Ch, EUT Horz, 2DH5
7320.025	37.7	18.4	1.1	233.0	-21.3	0.0	Vert	AV	0.0	34.8	54.0	-19.2	Mid Ch, EUT Horz, 3DH5
7320.020	37.2	18.4	1.1	231.0	-21.3	0.0	Vert	AV	0.0	34.3	54.0	-19.7	Mid Ch, EUT Horz
4960.915	38.8	13.5	1.0	54.0	0.0	0.0	Vert	PK	0.0	52.3	74.0	-21.7	High Ch, EUT Horz
4879.730	38.9	13.3	1.0	31.0	0.0	0.0	Horz	PK	0.0	52.2	74.0	-21.8	Mid Ch, EUT Vert
7320.005	34.7	18.4	1.6	245.0	-21.3	0.0	Horz	AV	0.0	31.8	54.0	-22.2	Mid Ch, EUT Vert
4958.805	38.0	13.5	2.0	196.0	0.0	0.0	Horz	PK	0.0	51.5	74.0	-22.5	High Ch, EUT Vert

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4879.520	38.1	13.3	2.4	338.0	0.0	0.0	Vert	PK	0.0	51.4	74.0	-22.6	Mid Ch, EUT Horz
7440.010	33.9	18.5	1.0	241.0	-21.3	0.0	Vert	AV	0.0	31.1	54.0	-22.9	High Ch, EUT Horz
7320.030	33.8	18.4	1.2	344.0	-21.3	0.0	Horz	AV	0.0	30.9	54.0	-23.1	Mid Ch, EUT on side
7440.035	33.2	18.5	1.6	274.0	-21.3	0.0	Horz	AV	0.0	30.4	54.0	-23.6	High Ch, EUT Vert
4805.095	37.6	12.7	1.5	44.0	0.0	0.0	Horz	PK	0.0	50.3	74.0	-23.7	Low Ch, EUT Vert
4803.870	37.4	12.7	1.0	351.0	0.0	0.0	Vert	PK	0.0	50.1	74.0	-23.9	Low Ch, EUT Horz
7320.005	32.7	18.4	3.7	113.0	-21.3	0.0	Vert	AV	0.0	29.8	54.0	-24.2	Mid Ch, EUT on side
7320.025	32.4	18.4	1.2	43.0	-21.3	0.0	Horz	AV	0.0	29.5	54.0	-24.5	Mid Ch, EUT Horz
7320.025	30.3	18.4	1.2	185.0	-21.3	0.0	Vert	AV	0.0	27.4	54.0	-26.6	Mid Ch, EUT Vert
12399.350	47.1	-2.7	1.0	254.0	0.0	0.0	Horz	PK	0.0	44.4	74.0	-29.6	High Ch, EUT Vert
12399.210	46.4	-2.7	1.0	237.0	0.0	0.0	Vert	PK	0.0	43.7	74.0	-30.3	High Ch, EUT Horz
12199.300	45.4	-2.5	1.0	234.0	0.0	0.0	Vert	PK	0.0	42.9	74.0	-31.1	Mid Ch, EUT Horz
12009.280	46.2	-3.7	1.0	117.0	0.0	0.0	Vert	PK	0.0	42.5	74.0	-31.5	Low Ch, EUT Horz
12199.040	44.6	-2.5	1.0	250.0	0.0	0.0	Horz	PK	0.0	42.1	74.0	-31.9	Mid Ch, EUT Vert
12009.240	44.9	-3.7	1.0	249.0	0.0	0.0	Horz	PK	0.0	41.2	74.0	-32.8	Low Ch, EUT Vert
4958.610	25.8	13.5	1.0	54.0	-21.3	0.0	Vert	AV	0.0	18.0	54.0	-36.0	High Ch, EUT Horz
4958.525	25.8	13.5	2.0	196.0	-21.3	0.0	Horz	AV	0.0	18.0	54.0	-36.0	High Ch, EUT Vert
4879.970	25.7	13.3	1.0	31.0	-21.3	0.0	Horz	AV	0.0	17.7	54.0	-36.3	Mid Ch, EUT Vert
4879.985	25.6	13.3	2.4	338.0	-21.3	0.0	Vert	AV	0.0	17.6	54.0	-36.4	Mid Ch, EUT Horz
4805.485	25.3	12.7	1.5	44.0	-21.3	0.0	Horz	AV	0.0	16.7	54.0	-37.3	Low Ch, EUT Vert
4803.920	25.3	12.7	1.0	351.0	-21.3	0.0	Vert	AV	0.0	16.7	54.0	-37.3	Low Ch, EUT Horz
19214.810	39.1	-4.6	1.5	306.0	0.0	0.0	Horz	PK	0.0	34.5	74.0	-39.5	Low Ch, EUT Vert
19215.030	37.9	-4.6	1.5	50.0	0.0	0.0	Vert	PK	0.0	33.3	74.0	-40.7	Low Ch, EUT Vert
12399.390	37.2	-2.7	1.0	254.0	-21.3	0.0	Horz	AV	0.0	13.2	54.0	-40.8	High Ch, EUT Vert
12399.390	36.8	-2.7	1.0	237.0	-21.3	0.0	Vert	AV	0.0	12.8	54.0	-41.2	High Ch, EUT Horz
12199.410	35.3	-2.5	1.0	234.0	-21.3	0.0	Vert	AV	0.0	11.5	54.0	-42.5	Mid Ch, EUT Horz
12199.410	34.4	-2.5	1.0	250.0	-21.3	0.0	Horz	AV	0.0	10.6	54.0	-43.4	Mid Ch, EUT Vert
12009.370	34.1	-3.7	1.0	117.0	-21.3	0.0	Vert	AV	0.0	9.1	54.0	-44.9	Low Ch, EUT Horz
12009.380	34.0	-3.7	1.0	249.0	-21.3	0.0	Horz	AV	0.0	9.0	54.0	-45.0	Low Ch, EUT Vert
19216.440	24.8	-4.6	1.5	306.0	-21.3	0.0	Horz	AV	0.0	-1.1	54.0	-55.1	Low Ch, EUT Vert
19218.490	24.8	-4.6	1.5	50.0	-21.3	0.0	Vert	AV	0.0	-1.1	54.0	-55.1	Low Ch, EUT Vert

SPURIOUS RADIATED EMISSIONS




EmiRS 2018.09.26 PSA-ESCI 2019.05.10

Work Order:	DROP0009	Date:	5-Jun-2019	
Project:	None	Temperature:	24.6 °C	
Job Site:	OC10	Humidity:	46.1% RH	
Serial Number:	PL1919P10041	Barometric Pres.:	1016 mbar	Tested by: Sal Solorzano
EUT:	Jonah			
Configuration:	2			
Customer:	SonicSensory, Inc.			
Attendees:	Daniel Quiros			
EUT Power:	110VAC/60Hz			
Operating Mode:	Transmitting Bluetooth: Low Channel 2402 MHz and High Channel 2480 MHz, Date Rates: DH5, 2DH5, 3DH5			
Deviations:	None			
Comments:	2nd Jonah SN: PR1919P10030, Band Edge Worst Case Duty Cycle: pi/4-DQPSK = 8.64% DCCF = pi/4-DQPSK Tx relaxation of -21.3 dB From Dwell Time: DCCF= 20*LOG (Pulse Width 2.8ms*3(pulses) / 100ms) = -21.3dB			

Test Specifications	Test Method
FCC 15.247:2019	ANSI C63.10:2013

Run #	20	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

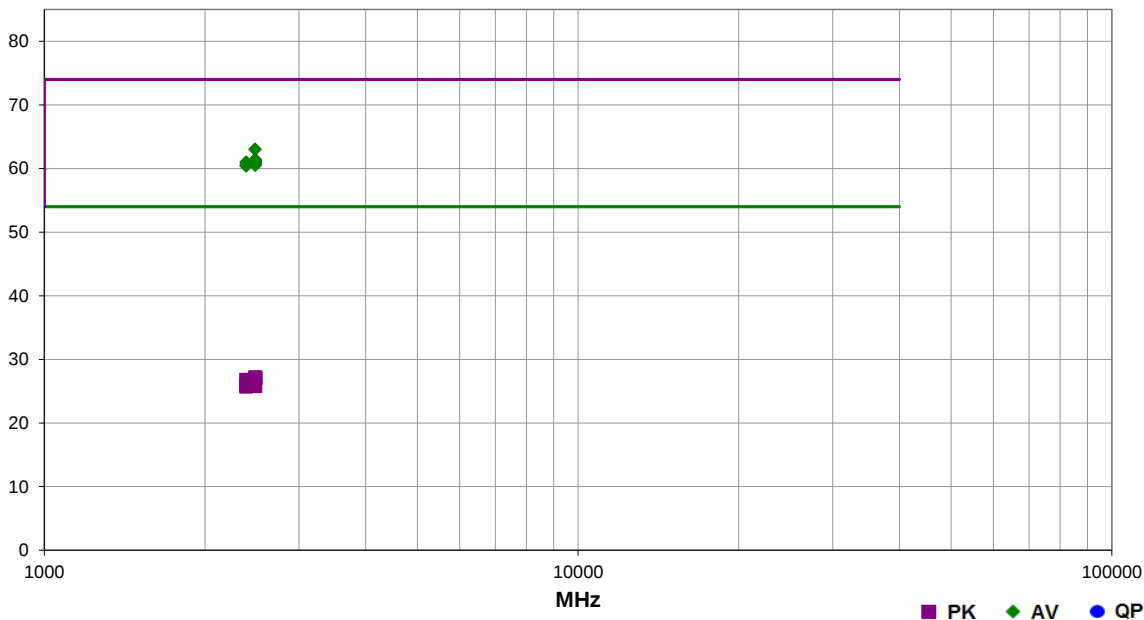

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.637	39.6	3.4	1.0	319.0	0.0	20.0	Horz	PK	0.0	63.0	74.0	-11.0	High Ch, EUT Vert, DH5
2484.013	38.0	3.4	1.7	293.0	0.0	20.0	Horz	PK	0.0	61.4	74.0	-12.6	High Ch, EUT Vert, 2DH5
2484.153	37.9	3.4	1.0	69.0	0.0	20.0	Vert	PK	0.0	61.3	74.0	-12.7	High Ch, EUT Horz, DH5
2484.823	37.7	3.4	1.0	0.0	0.0	20.0	Horz	PK	0.0	61.1	74.0	-12.9	High Ch, EUT Vert, 3DH5
2483.947	37.6	3.4	1.0	35.0	0.0	20.0	Vert	PK	0.0	61.0	74.0	-13.0	High Ch, EUT Vert, DH5
2485.140	37.6	3.4	2.6	255.0	0.0	20.0	Horz	PK	0.0	61.0	74.0	-13.0	High Ch, EUT on Side, DH5
2389.943	37.8	3.2	1.0	327.0	0.0	20.0	Horz	PK	0.0	61.0	74.0	-13.0	Low Ch, EUT Vert, DH5
2484.540	37.3	3.4	1.0	176.0	0.0	20.0	Horz	PK	0.0	60.7	74.0	-13.3	High Ch, EUT Horz, DH5
2388.927	37.4	3.2	1.4	160.0	0.0	20.0	Horz	PK	0.0	60.6	74.0	-13.4	Low Ch, EUT Vert, 2DH5
2485.080	37.1	3.4	1.0	199.0	0.0	20.0	Vert	PK	0.0	60.5	74.0	-13.5	High Ch, EUT on Side, DH5
2389.167	37.2	3.2	1.5	123.0	0.0	20.0	Horz	PK	0.0	60.4	74.0	-13.6	Low Ch, EUT Vert, 3DH5
2484.100	25.1	3.4	1.0	319.0	-21.3	20.0	Horz	AV	0.0	27.2	54.0	-26.8	High Ch, EUT Vert, DH5
2484.033	24.9	3.4	1.0	35.0	-21.3	20.0	Vert	AV	0.0	27.0	54.0	-27.0	High Ch, EUT Vert, DH5
2483.807	24.9	3.4	1.0	176.0	-21.3	20.0	Horz	AV	0.0	27.0	54.0	-27.0	High Ch, EUT Horz, DH5
2483.680	24.9	3.4	1.0	69.0	-21.3	20.0	Vert	AV	0.0	27.0	54.0	-27.0	High Ch, EUT Horz, DH5
2484.073	24.9	3.4	2.6	255.0	-21.3	20.0	Horz	AV	0.0	27.0	54.0	-27.0	High Ch, EUT on Side, DH5
2483.543	24.9	3.4	1.0	199.0	-21.3	20.0	Vert	AV	0.0	27.0	54.0	-27.0	High Ch, EUT on Side, DH5
2388.457	24.9	3.2	1.0	327.0	-21.3	20.0	Horz	AV	0.0	26.8	54.0	-27.2	Low Ch, EUT Vert, DH5
2483.613	24.9	3.4	1.7	293.0	-21.3	20.0	Horz	AV	0.0	26.2	54.0	-27.8	High Ch, EUT Vert, 2DH5

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2388.347	24.9	3.2	1.4	160.0	-21.3	20.0	Horz	AV	0.0	26.0	54.0	-28.0	Low Ch, EUT Vert, 2DH5
2484.080	24.9	3.4	1.0	0.0	-21.3	20.0	Horz	AV	0.0	25.8	54.0	-28.2	High Ch, EUT Vert, 3DH5
2388.273	25.0	3.2	1.5	123.0	-21.3	20.0	Horz	AV	0.0	25.7	54.0	-28.3	Low Ch, EUT Vert, 3DH5

DUTY CYCLE



XMIT 2019.05.15

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	13-Jun-18	13-Jun-19
Block - DC	Fairview Microwave	SD3379	AMV	3-Jan-19	3-Jan-20
Attenuator	Fairview Microwave	SA18H-20	TKR	20-Dec-18	20-Dec-19
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	13-Jun-18	13-Jun-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The test software provided for operation in a fixed, single channel mode allows the EUT to operate continuously at 100% Duty Cycle.

CARRIER FREQUENCY SEPARATION



XMit 2019.05.15

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMV	3-Jan-19	3-Jan-20
Attenuator	Fairview Microwave	SA18H-20	TKR	20-Dec-18	20-Dec-19
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	15-Feb-18	15-Feb-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	13-Jun-18	13-Jun-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The channel carrier frequencies in the 2400-2483.5MHz band must be separated by 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Or, if the output power is less than 125 mW, the channel separation can be 25 kHz or 2/3 of the 20dB bandwidth. The EUT was operated in pseudorandom hopping mode. The spectrum was scanned across two adjacent peaks. The separation between the peaks of these channels was measured.

CARRIER FREQUENCY SEPARATION



TbTx 2018.09.13 XMi 2019.05.15


EUT: Jonah		Work Order: DROP0009	
Serial Number: PL1919P10034		Date: 6-Jun-19	
Customer: SonicSensory, Inc.		Temperature: 25 °C	
Attendees: Daniel Quiros		Humidity: 45.3% RH	
Project: None		Barometric Pres.: 1016 mbar	
Tested by: Salvador Solorzano		Job Site: OC13	
Power: 110VAC/60Hz			
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
DC Block + 20dB attenuator + Coax Cable + patch cable = 24.07 dB Total Offset			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Value	Limit (z) Results
Hopping Mode (All Channels)			
DH5, GFSK			
Mid Channel, 2440 MHz		1.0 MHz	909 kHz Pass

CARRIER FREQUENCY SEPARATION



TMTx 2018.09.13 XMI 2019.05.15

Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2440 MHz						
Value				Limit	Results	
				(≥)		
1.0 MHz				909 kHz	Pass	

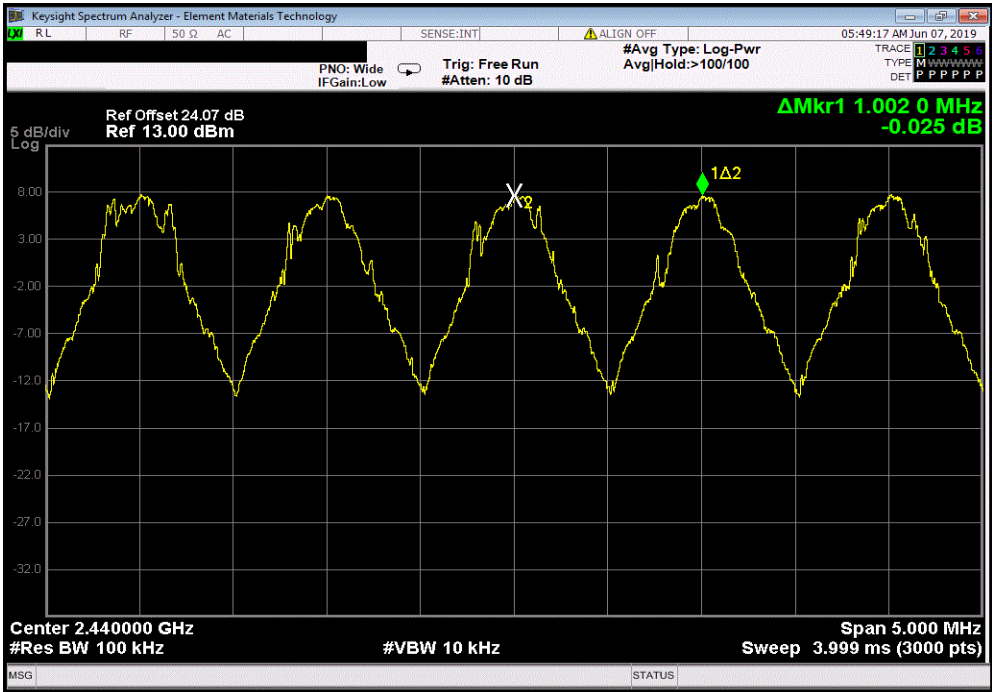

NUMBER OF HOPPING FREQUENCIES



XMIT 2019.05.15

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA18H-20	TKR	20-Dec-18	20-Dec-19
Block - DC	Fairview Microwave	SD3379	AMV	3-Jan-19	3-Jan-20
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	15-Feb-18	15-Feb-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	13-Jun-18	13-Jun-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The number of hopping frequencies was measured across the authorized band. The hopping function of the EUT was enabled.

NUMBER OF HOPPING FREQUENCIES



TbT v 2018.09.13 XMe 2019.05.15


EUT: Jonah		Work Order: DROP0009	
Serial Number: PL1919P10034		Date: 6-Jun-19	
Customer: SonicSensory, Inc.		Temperature: 25 °C	
Attendees: Daniel Quiros		Humidity: 45.3% RH	
Project: None		Barometric Pres.: 1016 mbar	
Tested by: Salvador Solorzano		Power: Battery	Job Site: OC13
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
DC Block + 20dB attenuator + Coax Cable + patch cable = 24.07 dB Total Offset			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Number of Channels	Limit (≥)
Hopping Mode (All Channels)			Results
DH5, GFSK			
Mid Channel, 2440 MHz		79	15
			Pass

NUMBER OF HOPPING FREQUENCIES



TMTx 2018.09.13 XMI 2019.05.15

Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2440 MHz						
				Number of Channels	Limit (≥)	Results
				79	15	Pass

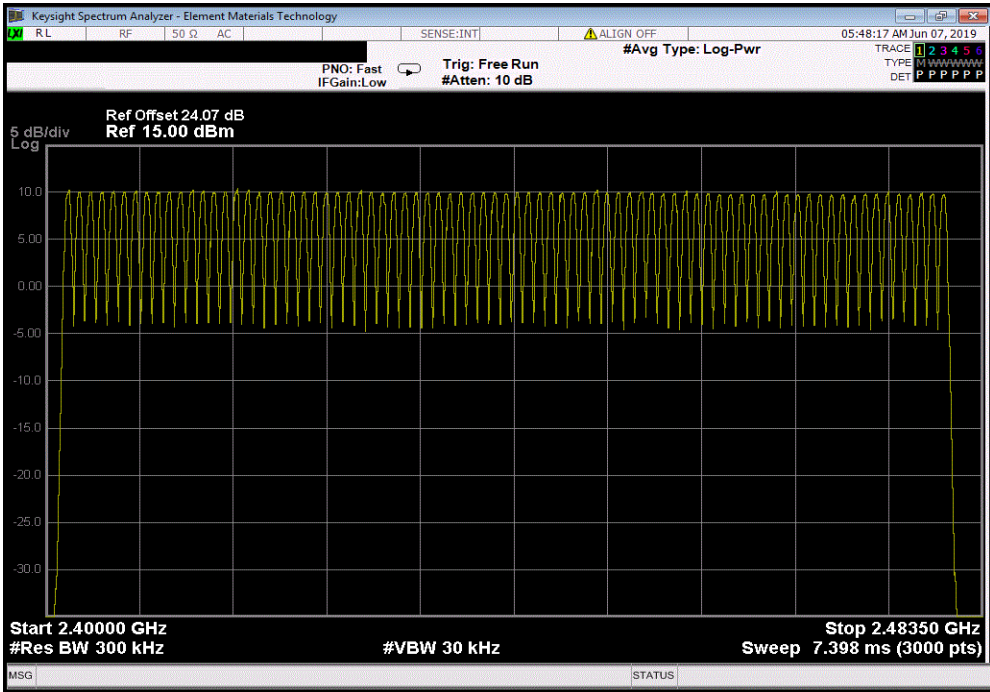

DWELL TIME



XMIT 2019.05.15

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA18H-20	TKR	20-Dec-18	20-Dec-19
Block - DC	Fairview Microwave	SD3379	AMV	3-Jan-19	3-Jan-20
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	15-Feb-18	15-Feb-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	13-Jun-18	13-Jun-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The average dwell time per hopping channel was measured at one hopping channel in the middle of the authorized band. The hopping function of the EUT was enabled.

The dwell time limit is based on the Number of Hopping Channels * 400 mS. For Bluetooth this would be 79 Channels * 400mS = 31.6 Sec.

On Time During 31.6 Sec = Pulse Width * Average Number of Pulses * Scale Factor

➤Average Number of Pulses is based on 4 samples.

➤Scale Factor = 31.6 Sec / Screen Capture Sweep Time = 31.6 Sec / 6.32 Sec = 5

DWELL TIME



THxTx 2018.09.13 XMt 2019.05.15


EUT: Jonah		Work Order: DROP0009	
Serial Number: PL1919P10034		Date: 6-Jun-19	
Customer: SonicSensory, Inc.		Temperature: 24.5 °C	
Attendees: Daniel Quiros		Humidity: 47.2% RH	
Project: None		Barometric Pres.: 1016 mbar	
Tested by: Salvador Solorzano		Power: 110VAC/60Hz	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
DC Block + 20dB attenuator + Coax Cable + patch cable = 24.07 dB Total Offset			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature	
		Pulse Width (ms)	Number of Pulses
		Average No. of Pulses	Scale Factor
		On Time (ms) During 31.6 s	Limit (ms)
			Results
Hopping Mode (All Channels)			
DH5, GFSK			
	Mid Channel, 2440 MHz	2.88	N/A
	Mid Channel, 2440 MHz	N/A	21
	Mid Channel, 2440 MHz	N/A	23
	Mid Channel, 2440 MHz	N/A	19
	Mid Channel, 2440 MHz	N/A	22
	Mid Channel, 2440 MHz	2.88	N/A
	Mid Channel, 2440 MHz		21.25
			5
			306
			400
			Pass
2DH5, pi/4-DQPSK			
	Mid Channel, 2440 MHz	2.883	N/A
	Mid Channel, 2440 MHz	N/A	21
	Mid Channel, 2440 MHz	N/A	27
	Mid Channel, 2440 MHz	N/A	21
	Mid Channel, 2440 MHz	N/A	20
	Mid Channel, 2440 MHz	2.883	N/A
	Mid Channel, 2440 MHz		22.25
			5
			320.73
			400
			Pass
3DH5, 8-DPSK			
	Mid Channel, 2440 MHz	2.883	N/A
	Mid Channel, 2440 MHz	N/A	17
	Mid Channel, 2440 MHz	N/A	23
	Mid Channel, 2440 MHz	N/A	24
	Mid Channel, 2440 MHz	N/A	16
	Mid Channel, 2440 MHz	2.883	N/A
	Mid Channel, 2440 MHz		20
			5
			288.3
			400
			Pass

DWELL TIME




TMTx 2018.09.13 XMI 2019.05.15

Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
2.88	N/A	N/A	N/A	N/A	N/A	N/A

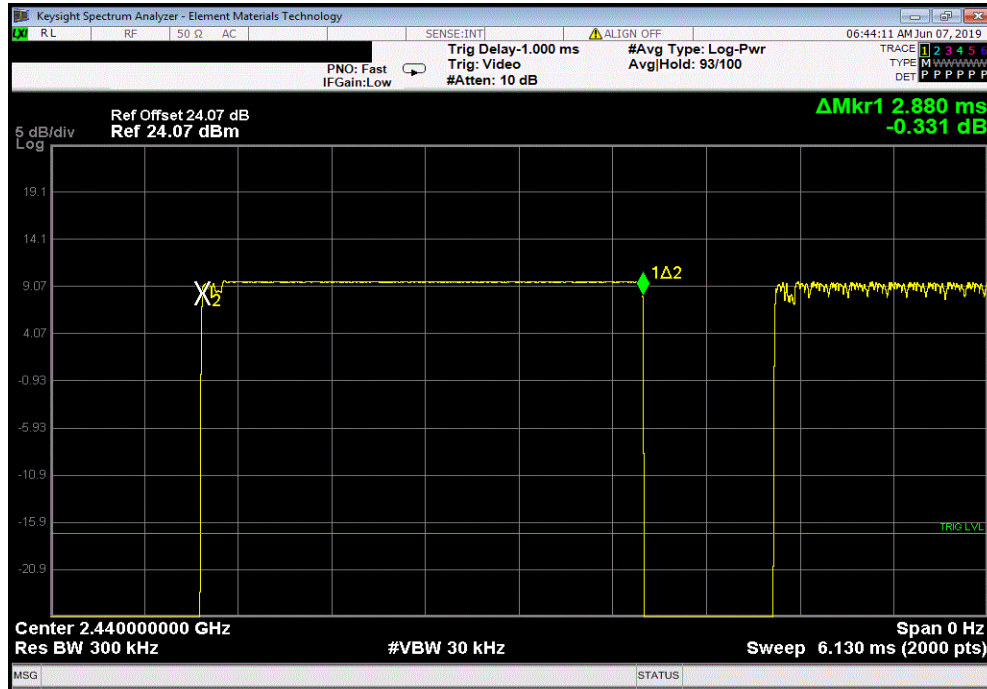

Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	21	N/A	N/A	N/A	N/A	N/A

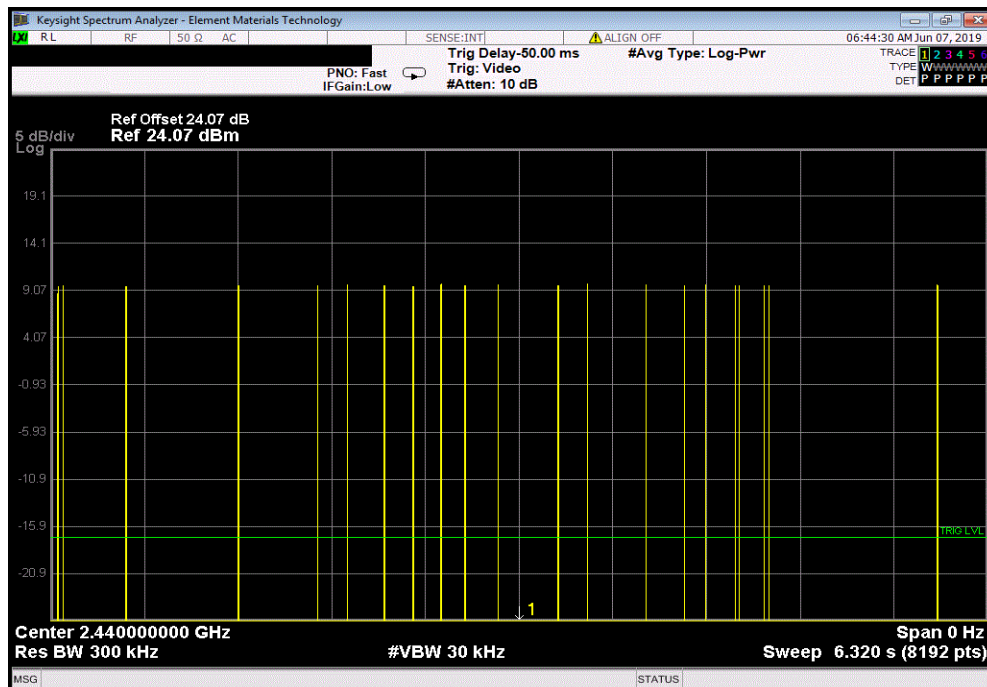


DWELL TIME




TMTx 2018.09.13 XMt 2019.05.15

Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	23	N/A	N/A	N/A	N/A	N/A

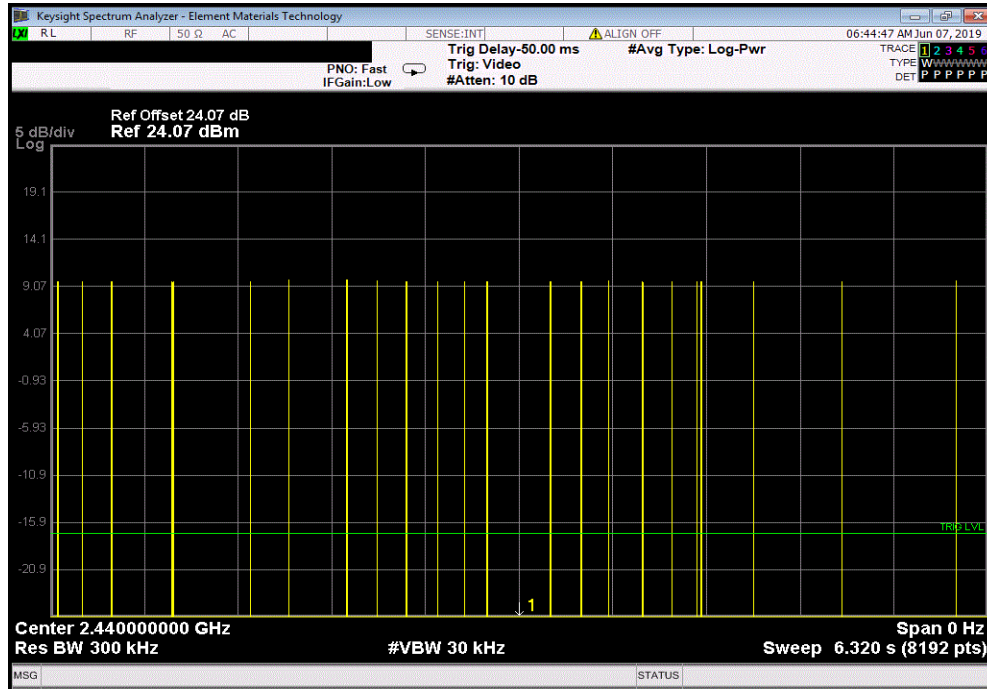

Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	19	N/A	N/A	N/A	N/A	N/A

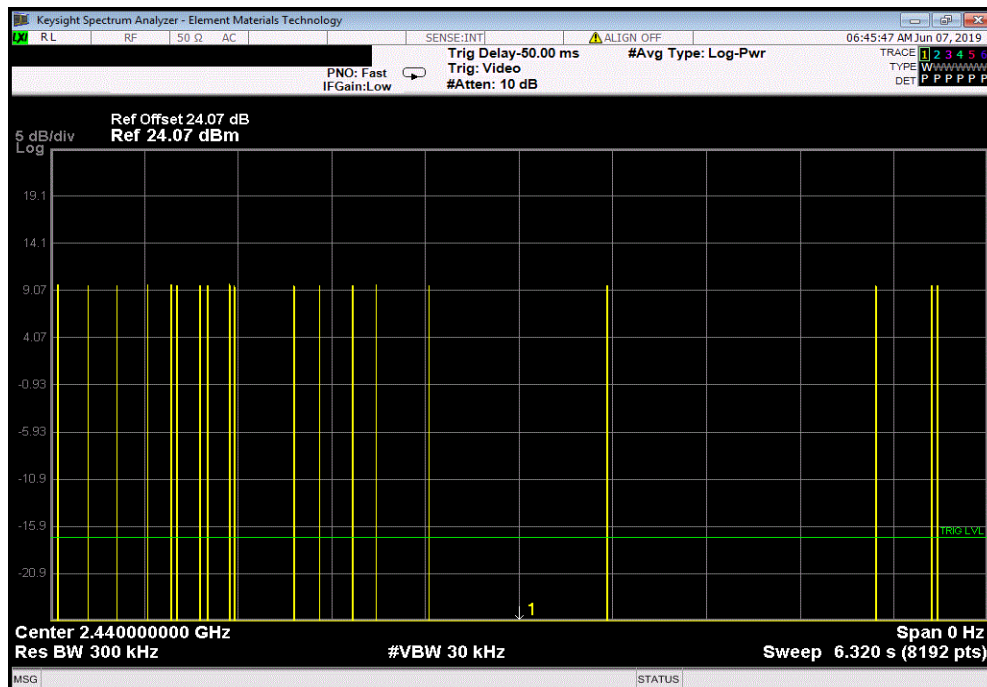


DWELL TIME



TMTx 2018.09.13 XMt 2019.05.15

Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	22	N/A	N/A	N/A	N/A	N/A

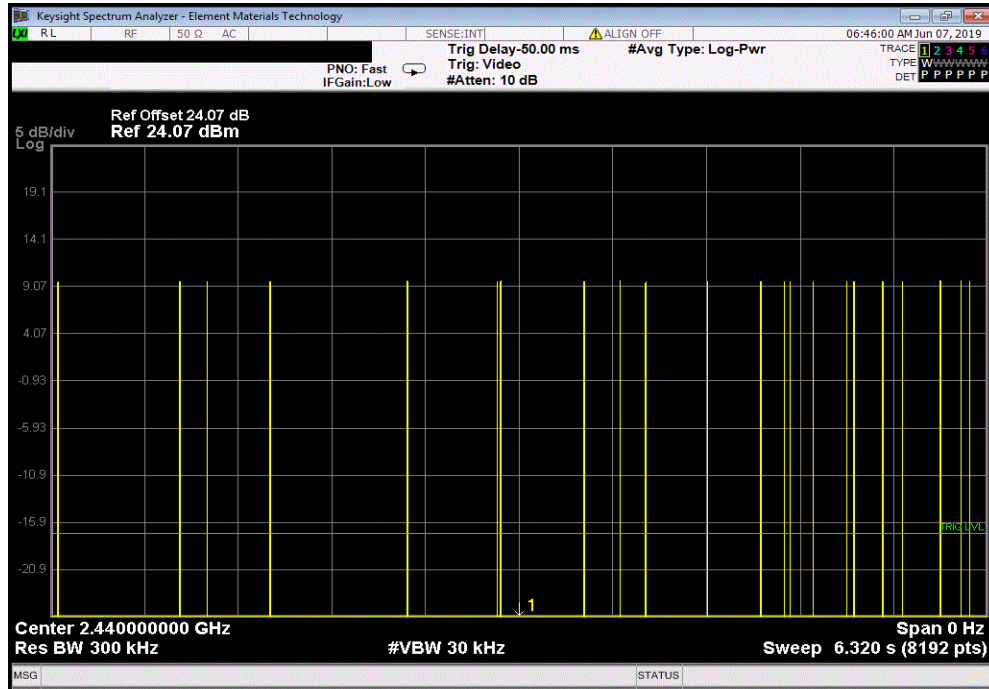

Hopping Mode (All Channels), DH5, GFSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
2.88	N/A	21.25	5	306	400	Pass

Calculation Only


No Screen Capture Required

DWELL TIME




TMTx 2018.09.13 XMI 2019.05.15

Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
2.883	N/A	N/A	N/A	N/A	N/A	N/A

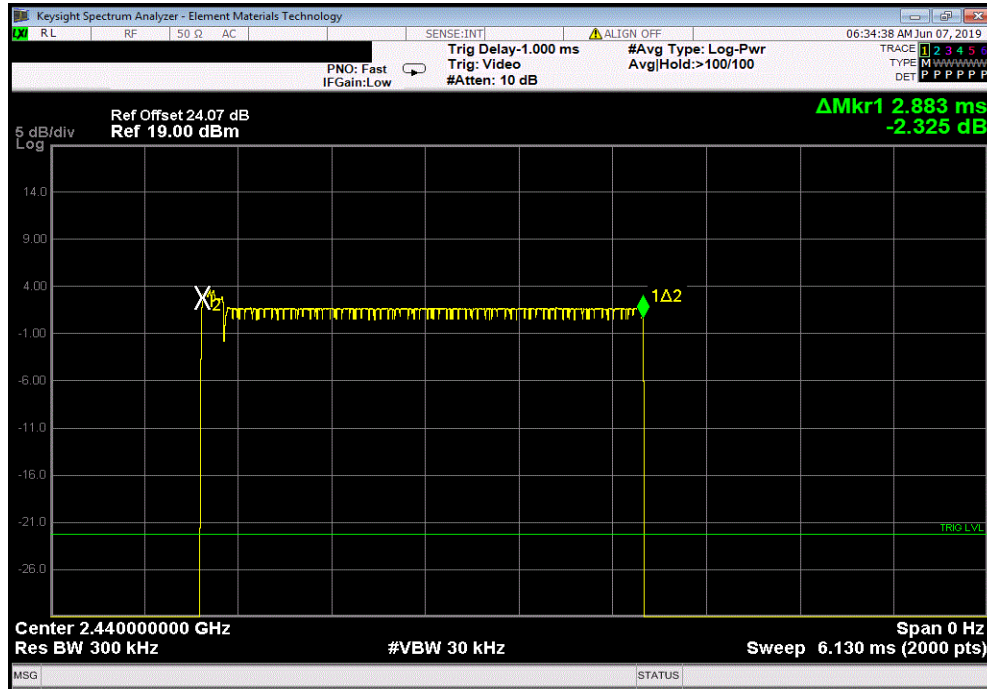

Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	21	N/A	N/A	N/A	N/A	N/A

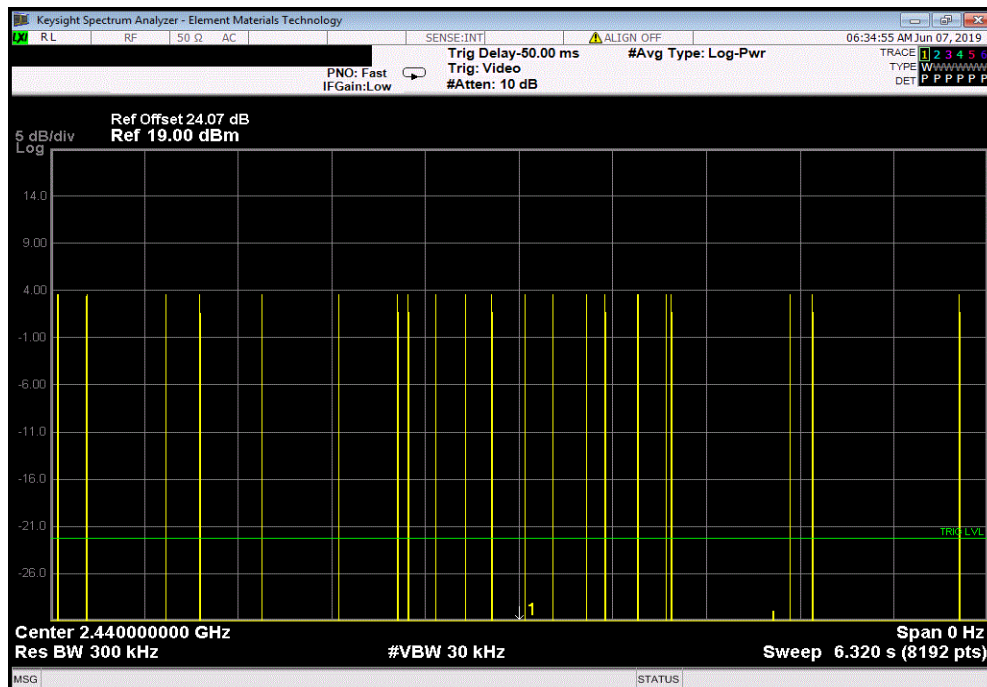


DWELL TIME




TMTx 2018.09.13 XMt 2019.05.15

Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	27	N/A	N/A	N/A	N/A	N/A

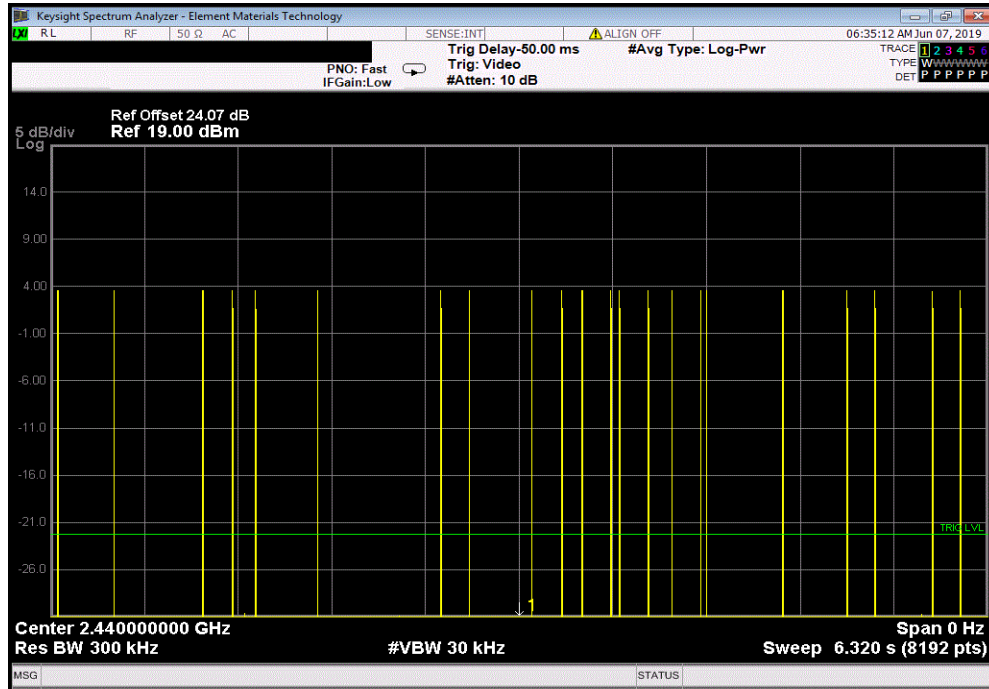

Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	21	N/A	N/A	N/A	N/A	N/A

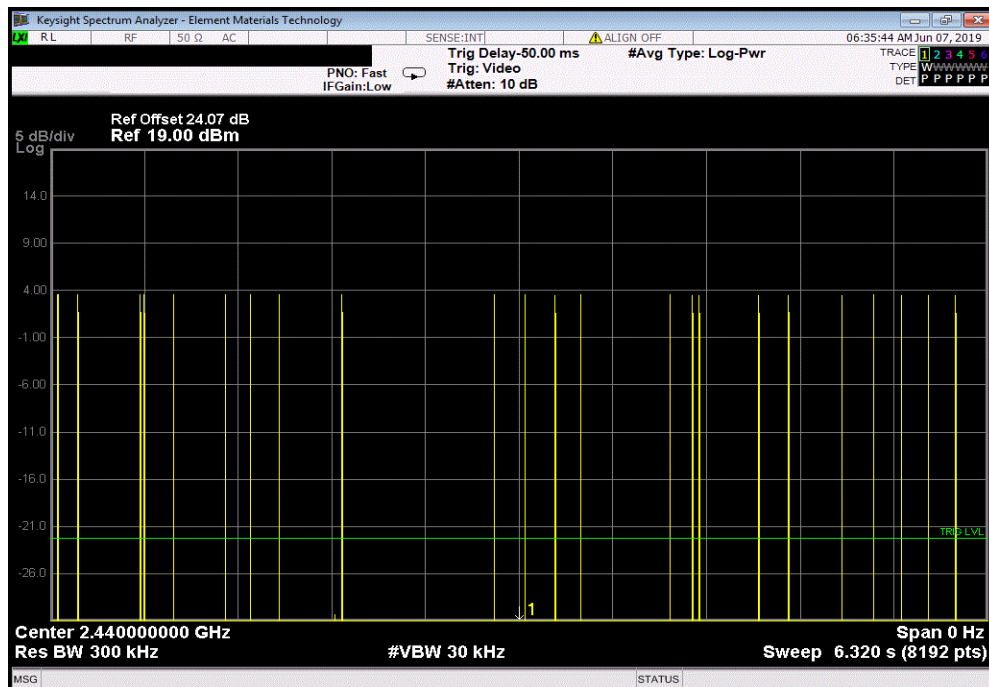


DWELL TIME



TMTx 2018.09.13 XMt 2019.05.15

Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	20	N/A	N/A	N/A	N/A	N/A

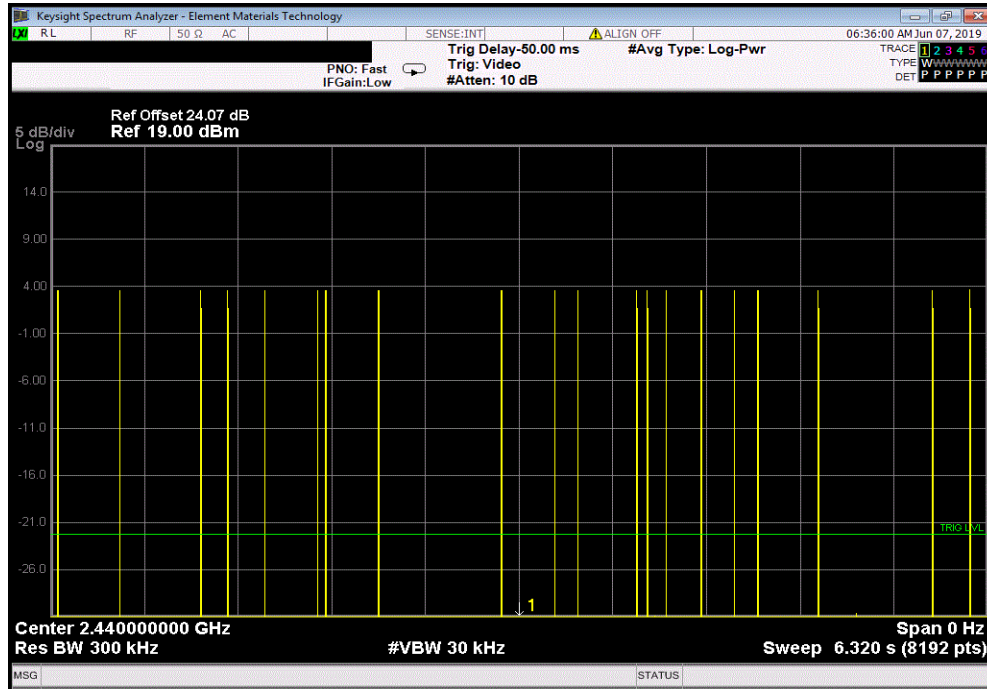

Hopping Mode (All Channels), 2DH5, pi/4-DQPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
2.883	N/A	22.25	5	320.73	400	Pass

Calculation Only


No Screen Capture Required

DWELL TIME




TMTx 2018.09.13 XMI 2019.05.15

Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
2.883	N/A	N/A	N/A	N/A	N/A	N/A

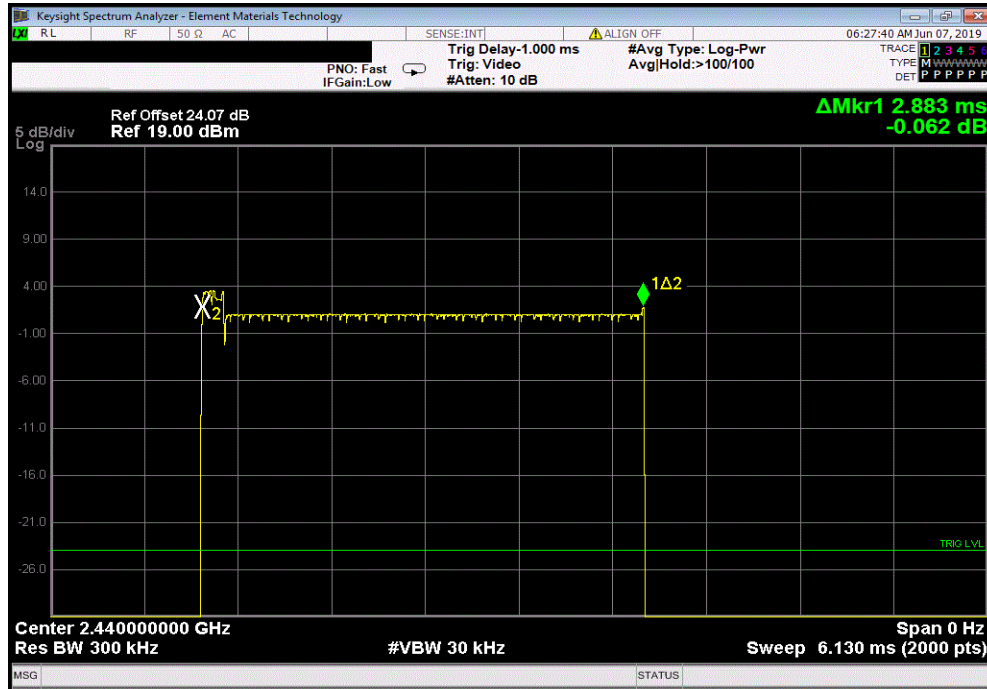

Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	17	N/A	N/A	N/A	N/A	N/A

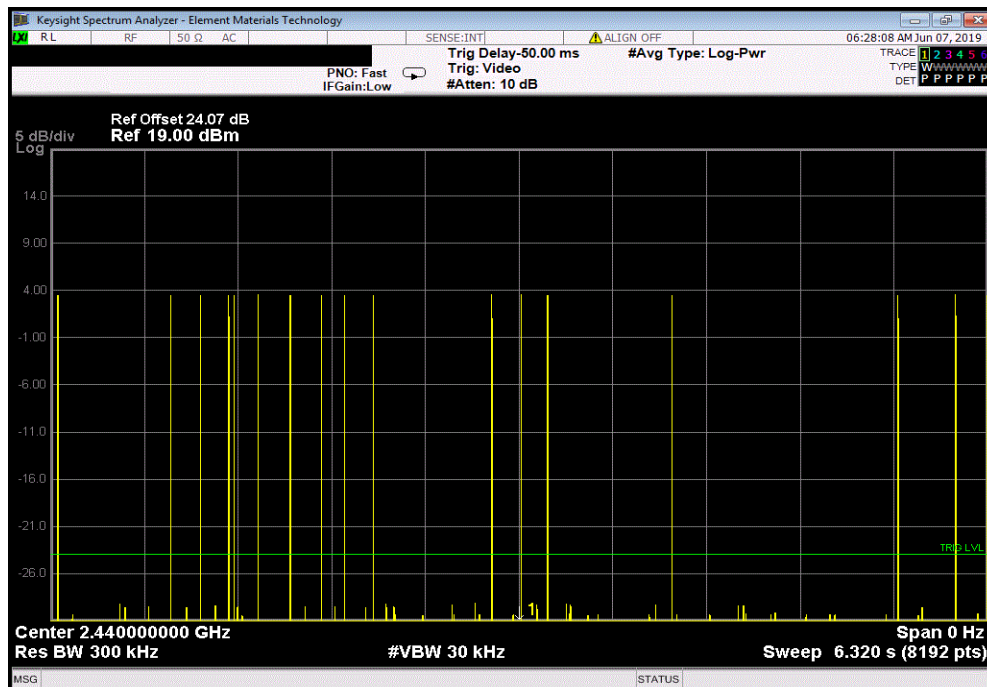


DWELL TIME




TMTx 2018.09.13 XMI 2019.05.15

Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	23	N/A	N/A	N/A	N/A	N/A

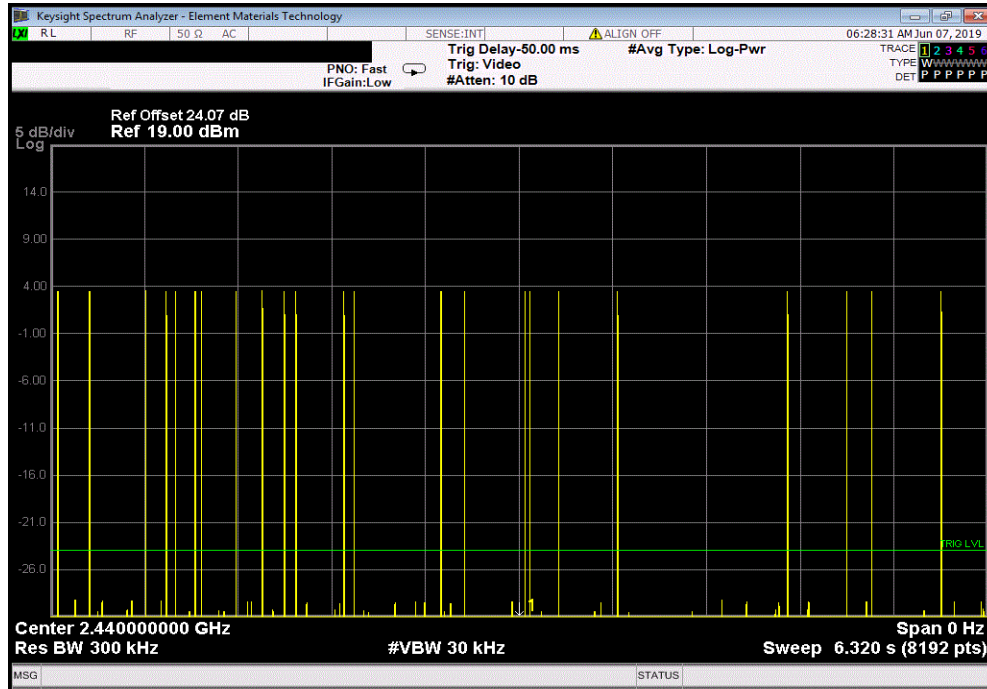

Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	24	N/A	N/A	N/A	N/A	N/A

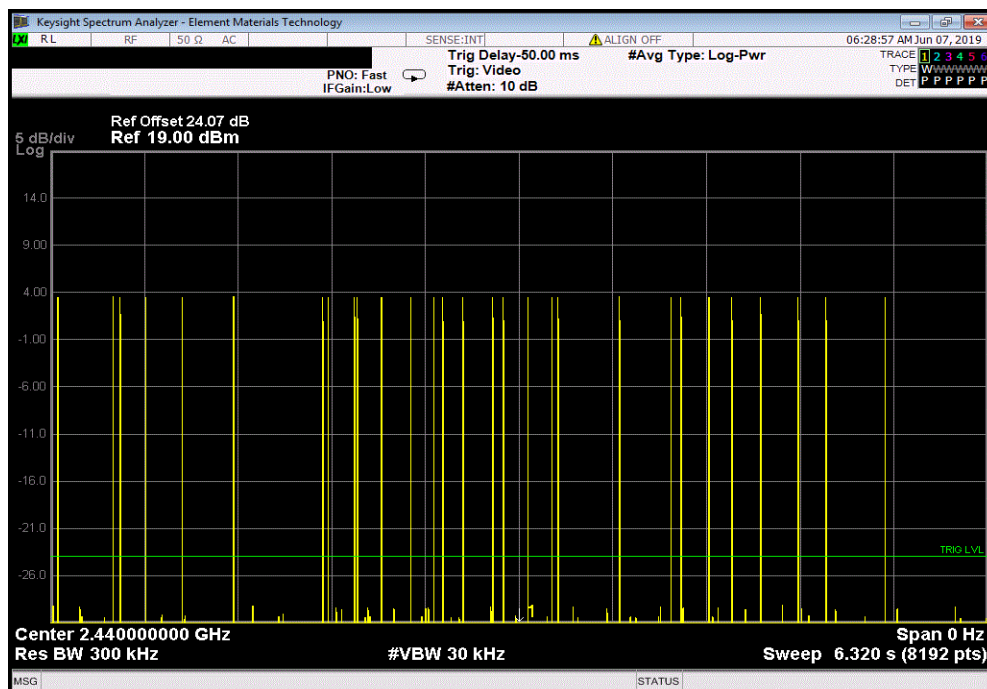


DWELL TIME



TMTx 2018.09.13 XMt 2019.05.15

Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
N/A	16	N/A	N/A	N/A	N/A	N/A

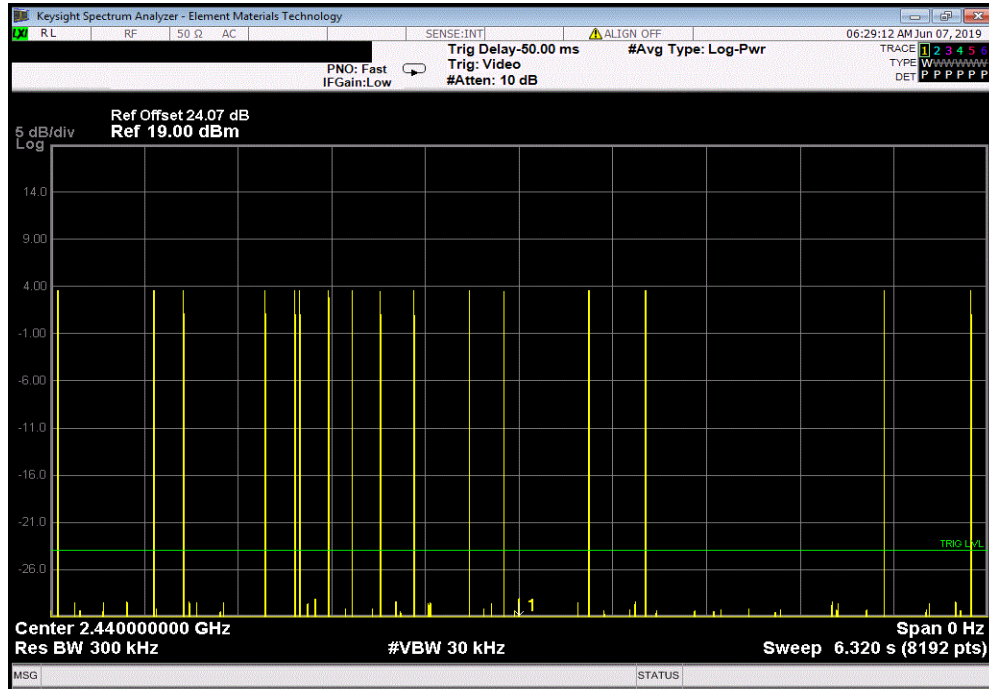

Hopping Mode (All Channels), 3DH5, 8-DPSK, Mid Channel, 2440 MHz						
Pulse Width (ms)	Number of Pulses	Average No. of Pulses	Scale Factor	On Time (ms) During 31.6 s	Limit (ms)	Results
2.883	N/A	20	5	288.3	400	Pass

Calculation Only

No Screen Capture Required

OUTPUT POWER



XMIT 2019.06.11

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA18H-20	TKR	20-Dec-18	20-Dec-19
Block - DC	Fairview Microwave	SD3379	AMV	3-Jan-19	3-Jan-20
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	15-Feb-18	15-Feb-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	2-Jul-19	2-Jul-20

TEST DESCRIPTION

The peak output power was measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting in a no hop mode at the data rate(s) listed in the datasheet.

The method found in ANSI C63.10:2013 Section 7.8.5 was used for a FHSS radio.

OUTPUT POWER



TMTx 2018.09.13 XMt 2019.06.11


EUT: Jonah		Work Order: DROP0009	
Serial Number: PL1919P10034		Date: 21-Aug-19	
Customer: SonicSensory, Inc.		Temperature: 23.9 °C	
Attendees: Daniel Quiros		Humidity: 46.8% RH	
Project: None		Barometric Pres.: 1014 mbar	
Tested by: Johnny Candelas		Power: 110VAC/60Hz	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
DC Block + 20 dB attenuator + Coax Cable + patch cable = 24.07 dB Total Offset			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Out Pwr (dBm)	Limit (dBm)
			Result
DH5, GFSK			
	Low Channel	-0.715	21
	Mid Channel	-1.092	21
	High Channel	-1.773	21
2DH5, pi/4-DQPSK			
	Low Channel	5.237	21
	Mid Channel	4.569	21
	High Channel	4.602	21
3DH5, 8-DPSK			
	Low Channel	6.066	21
	Mid Channel	5.06	21
	High Channel	5.125	21

OUTPUT POWER




TMTx 2018.09.13 XMt 2019.06.11

DH5, GFSK, Low Channel						
				Out Pwr (dBm)	Limit (dBm)	Result
				-0.715	21	Pass

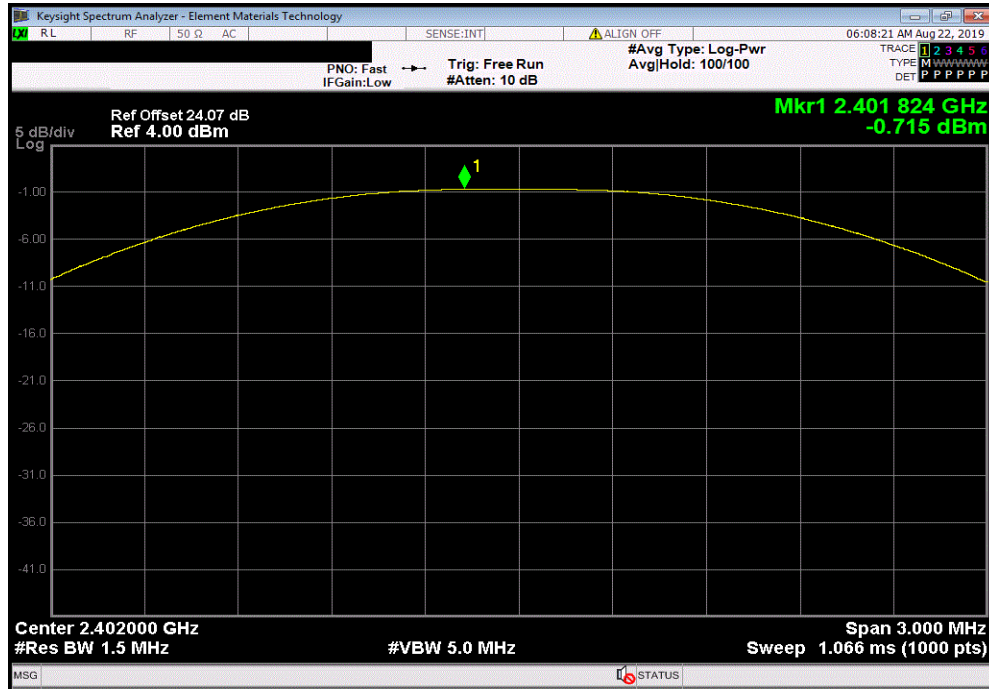

DH5, GFSK, Mid Channel						
				Out Pwr (dBm)	Limit (dBm)	Result
				-1.092	21	Pass

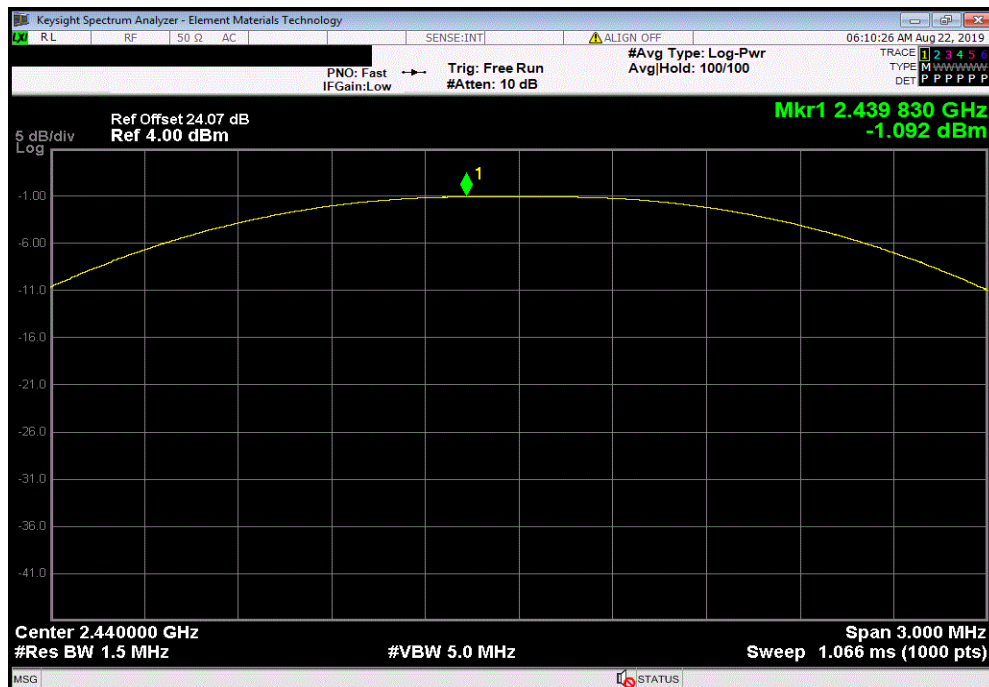


OUTPUT POWER




TMTx 2018.09.13 XMt 2019.06.11

DH5, GFSK, High Channel						
				Out Pwr (dBm)	Limit (dBm)	Result
				-1.773	21	Pass

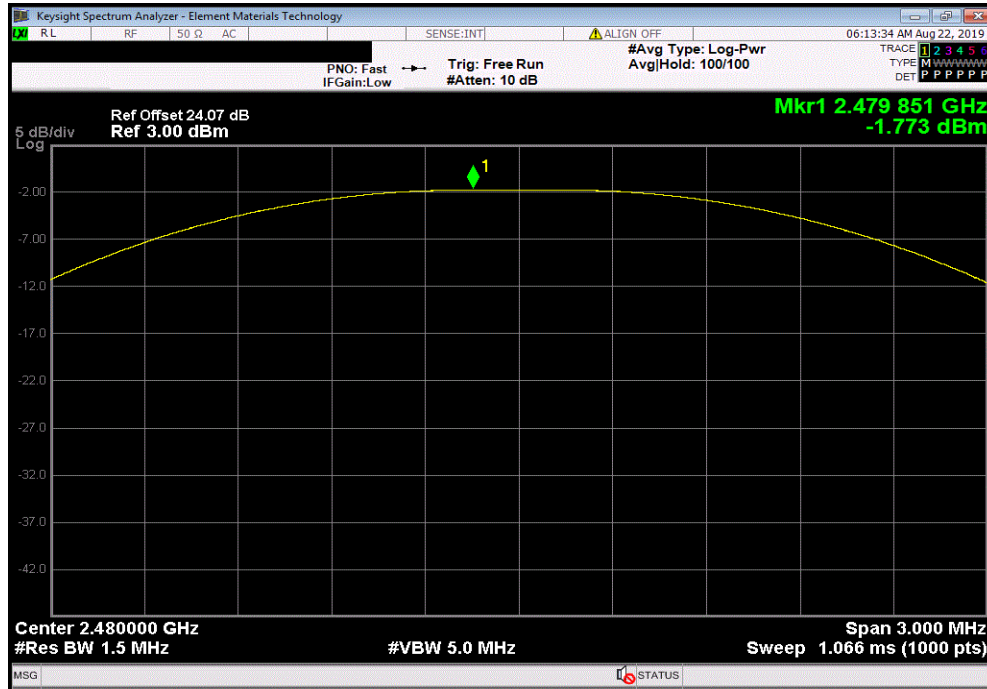

2DH5, pi/4-DQPSK, Low Channel						
				Out Pwr (dBm)	Limit (dBm)	Result
				5.237	21	Pass

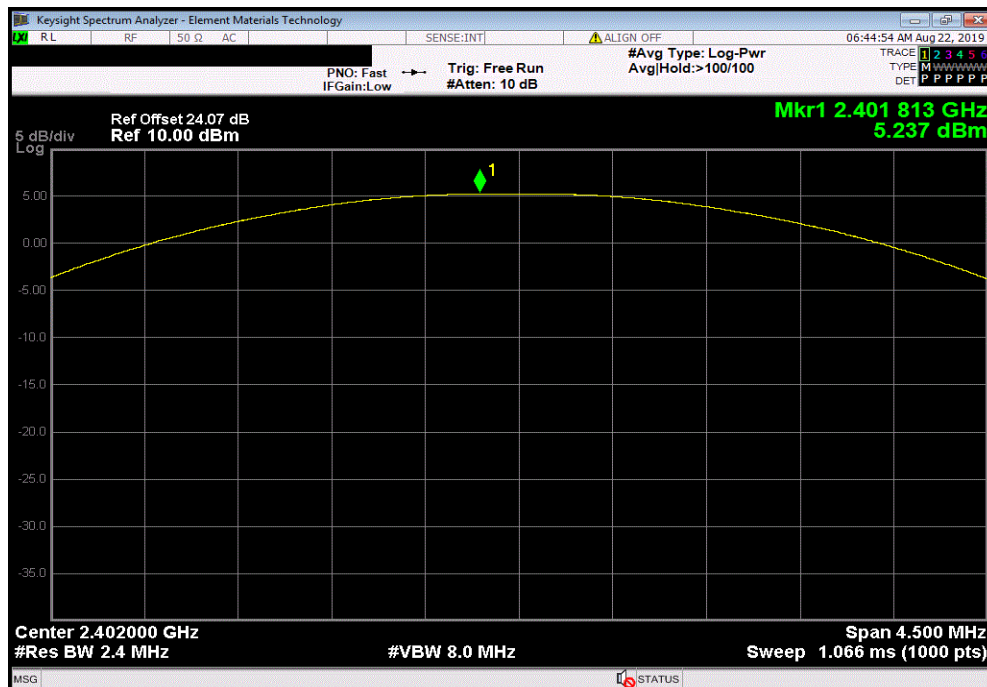


OUTPUT POWER




TMTx 2018.09.13 XMt 2019.06.11

2DH5, pi/4-DQPSK, Mid Channel						
				Out Pwr (dBm)	Limit (dBm)	Result
				4.569	21	Pass

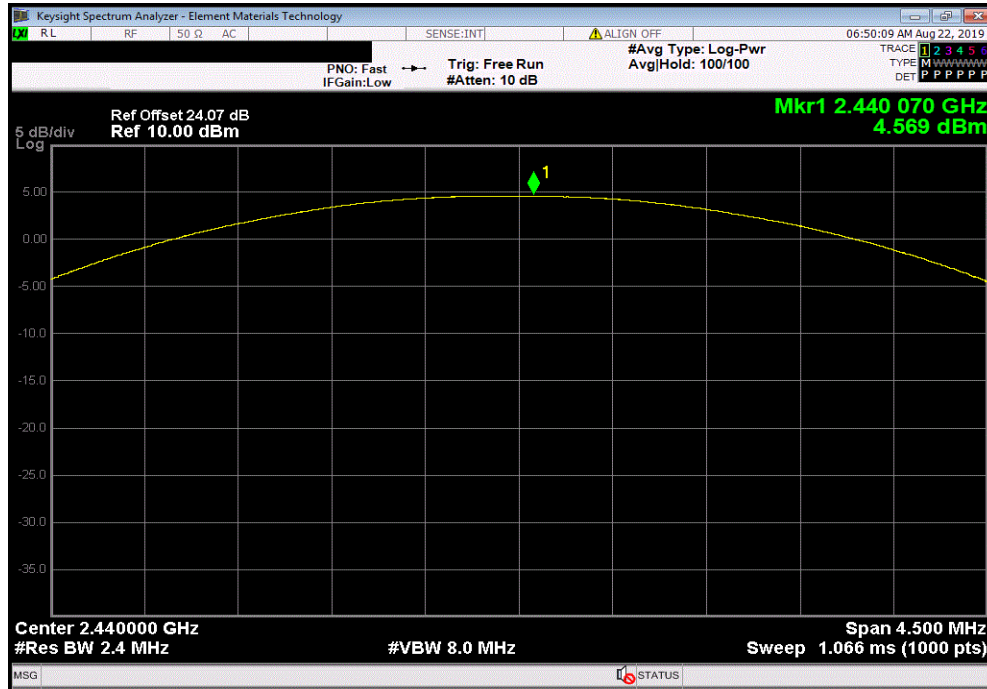

2DH5, pi/4-DQPSK, High Channel						
				Out Pwr (dBm)	Limit (dBm)	Result
				4.602	21	Pass

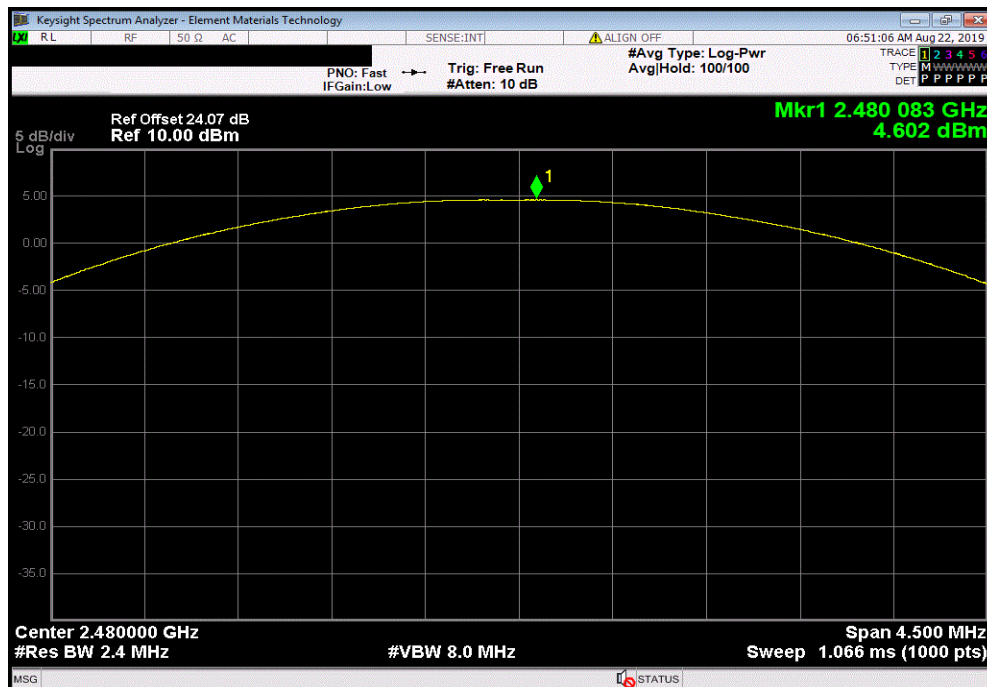


OUTPUT POWER




TMTx 2018.09.13 XMt 2019.06.11

3DH5, 8-DPSK, Low Channel						
				Out Pwr (dBm)	Limit (dBm)	Result
				6.066	21	Pass

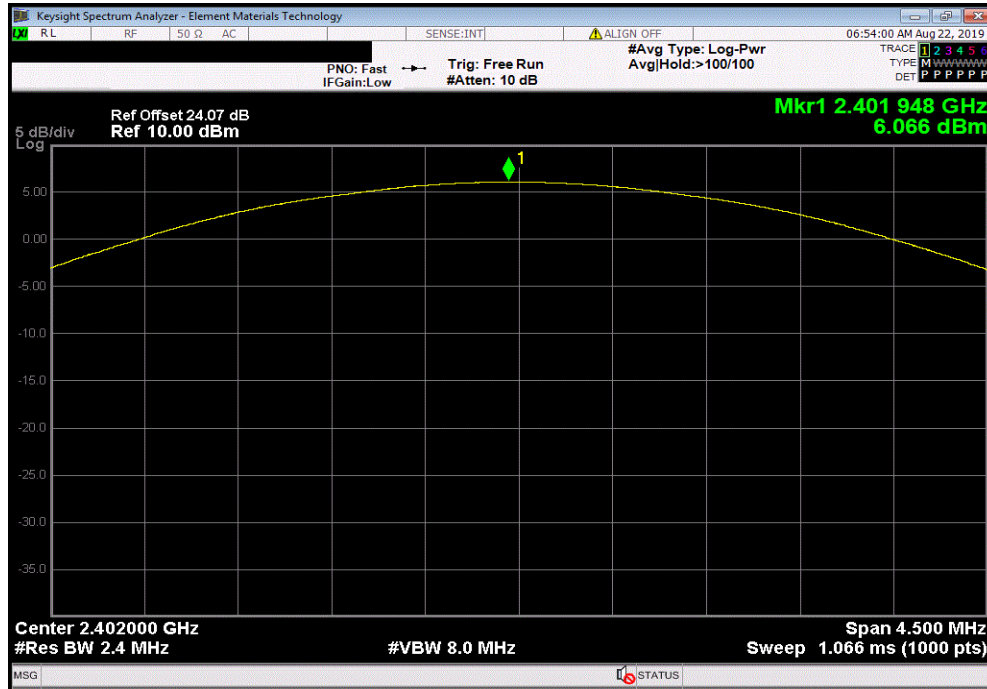

3DH5, 8-DPSK, Mid Channel						
				Out Pwr (dBm)	Limit (dBm)	Result
				5.06	21	Pass

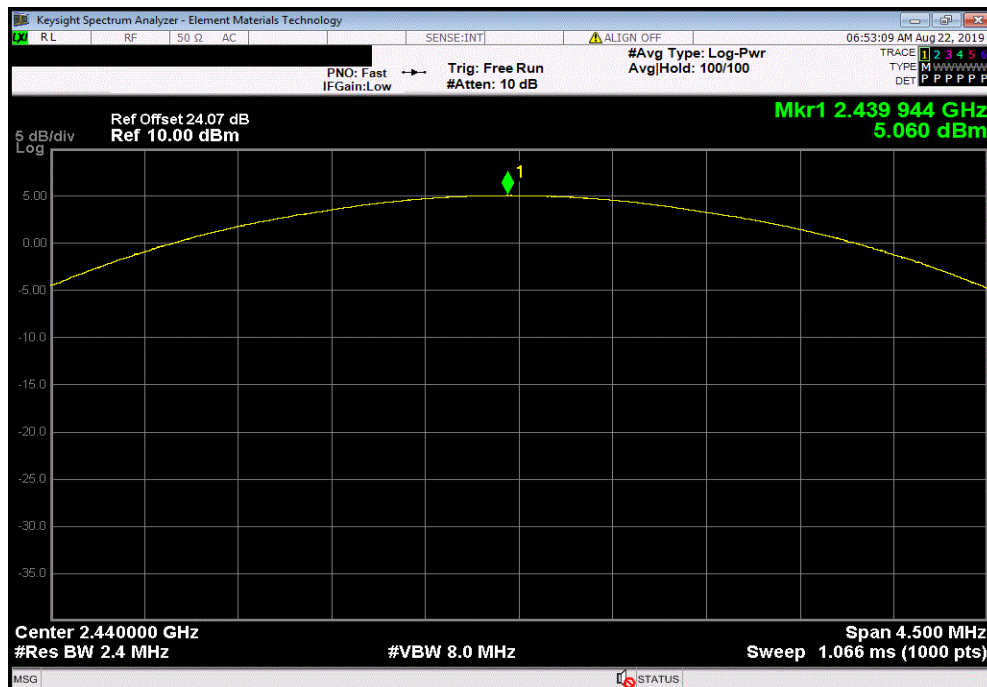


OUTPUT POWER



TMTx 2018.09.13 XMt 2019.06.11

3DH5, 8-DPSK, High Channel						
				Out Pwr (dBm)	Limit (dBm)	Result
				5.125	21	Pass

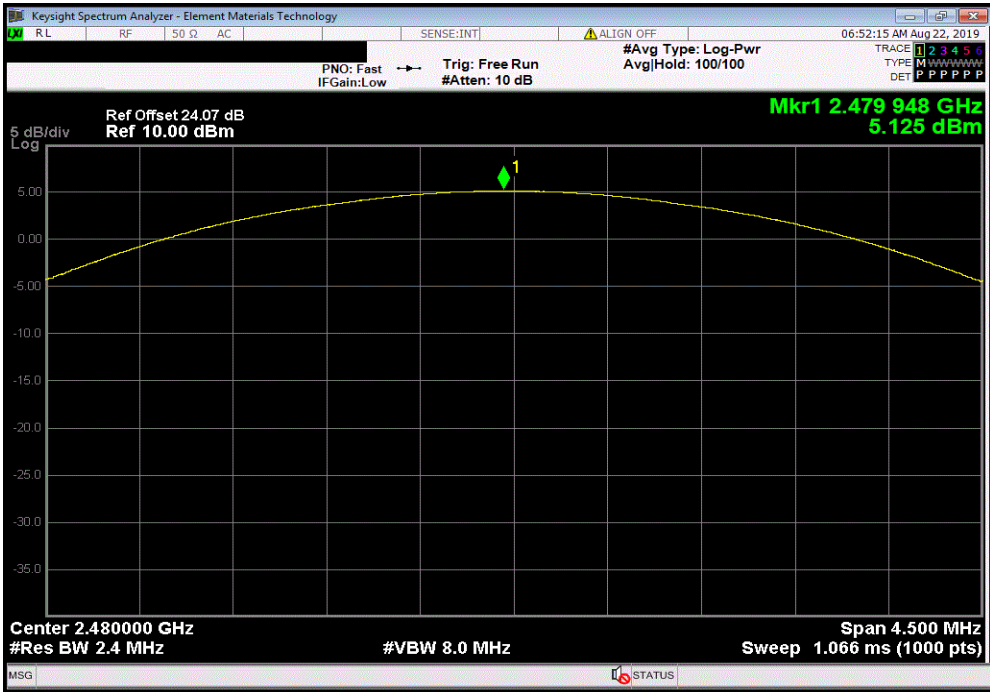

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMI 2019.06.11

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA18H-20	TKR	20-Dec-18	20-Dec-19
Block - DC	Fairview Microwave	SD3379	AMV	3-Jan-19	3-Jan-20
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	15-Feb-18	15-Feb-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	2-Jul-19	2-Jul-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum. The radio was operated in the modes as shown in the following data sheets.

Prior to measuring maximum transmit power; the 99% emission bandwidth (B) and the transmission pulse duration (T) were measured. The method of measuring the emission bandwidth and the associated data are found elsewhere in this test report. The transmission pulse duration (T) was measured using a zero span on the spectrum analyzer to see the pulses in the time domain.

The maximum conducted output power was measured using ANSI C63.10, Method SA-1 (RMS detection with the EUT Transmitting at full power throughout each sweep). Note per ANSI C63.10 continuous transmit is defined as operation > 98% duty Cycle.

The spectrum analyzer settings were set per the guidance as well as the following specifics:

RMS Detector

Trace average 100 traces in power averaging mode.

Power was integrated across "B", by using the channel power function of the analyzer.

EIRP = Max Measured Power + Antenna gain (dBi)

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2019.08.02 XMt 2019.06.11


EUT: Jonah		Work Order: DROP0009	
Serial Number: PL1919P10034		Date: 21-Aug-19	
Customer: SonicSensory, Inc.		Temperature: 23.3 °C	
Attendees: Daniel Quiros		Humidity: 45.1% RH	
Project: None		Barometric Pres.: 1015 mbar	
Tested by: Johnny Candelas		Power: 110VAC/60Hz	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
DC Block + 20 dB attenuator + Coax Cable + patch cable = 24.07 dB Total Offset			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Out Pwr (dBm)	Antenna Gain (dBi)
		EIRP (dBm)	EIRP Limit (dBm)
			Result
DH5, GFSK			
	Low Channel	-0.715	2.9
	Mid Channel	-1.092	2.78
	High Channel	-1.773	3.86
2DH5, pi/4-DQPSK			
	Low Channel	5.237	2.9
	Mid Channel	4.569	2.78
	High Channel	4.602	3.86
3DH5, 8-DPSK			
	Low Channel	6.066	2.9
	Mid Channel	5.06	2.78
	High Channel	5.125	3.86

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TMTx 2019.08.02 XMI 2019.06.11

DH5, GFSK, Low Channel						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	-0.715	2.9	2.185	27	Pass	

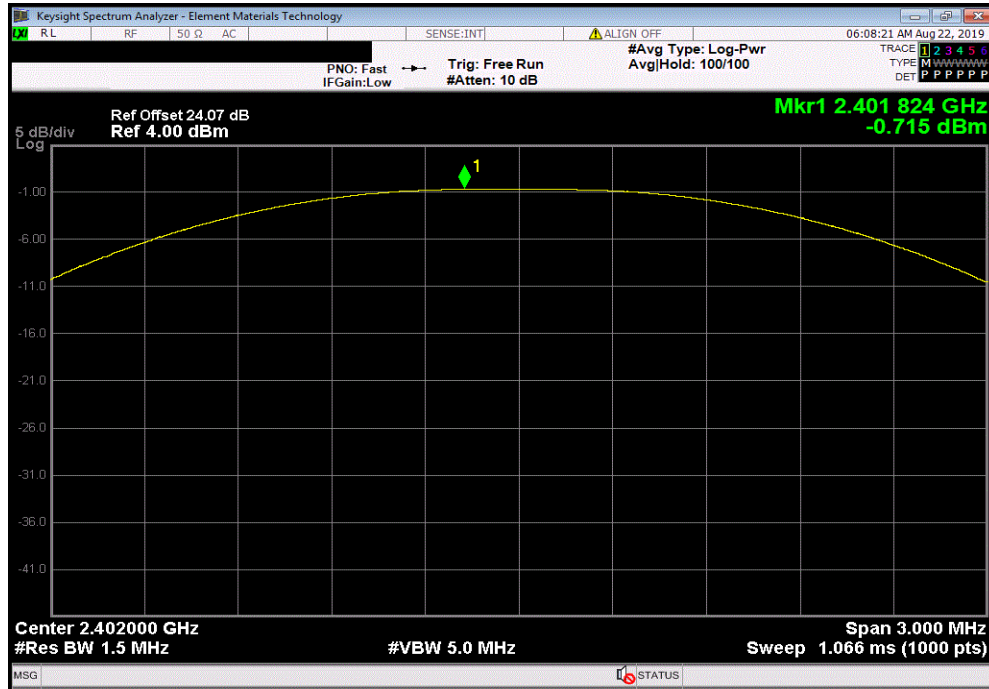

DH5, GFSK, Mid Channel						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	-1.092	2.78	1.688	27	Pass	

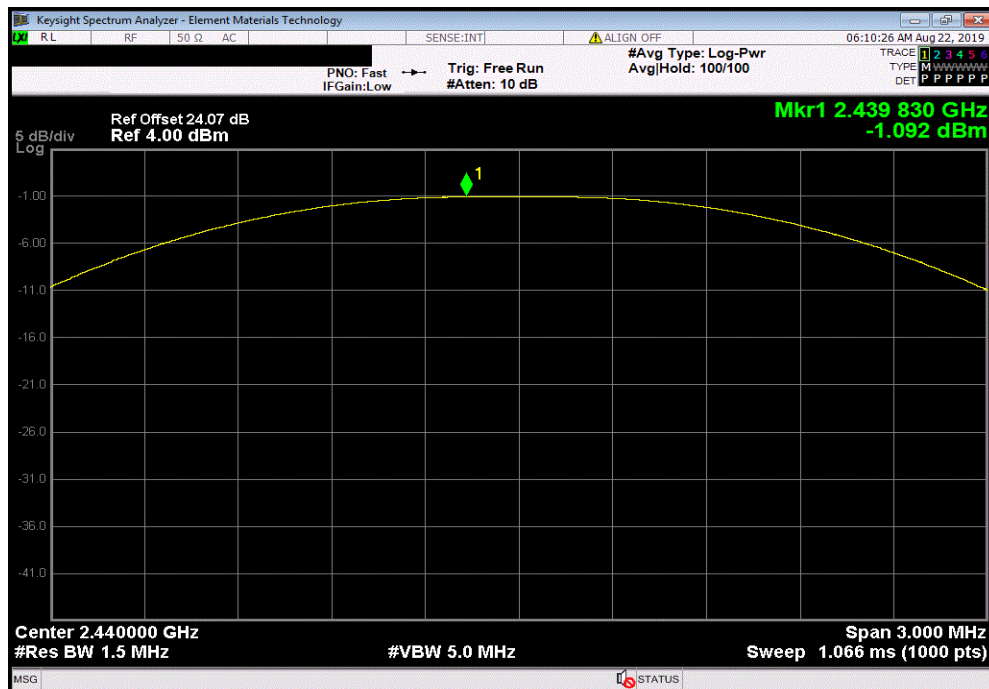


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TMTx 2019.08.02 XMI 2019.06.11

DH5, GFSK, High Channel						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	-1.773	3.86	2.087	27	Pass	

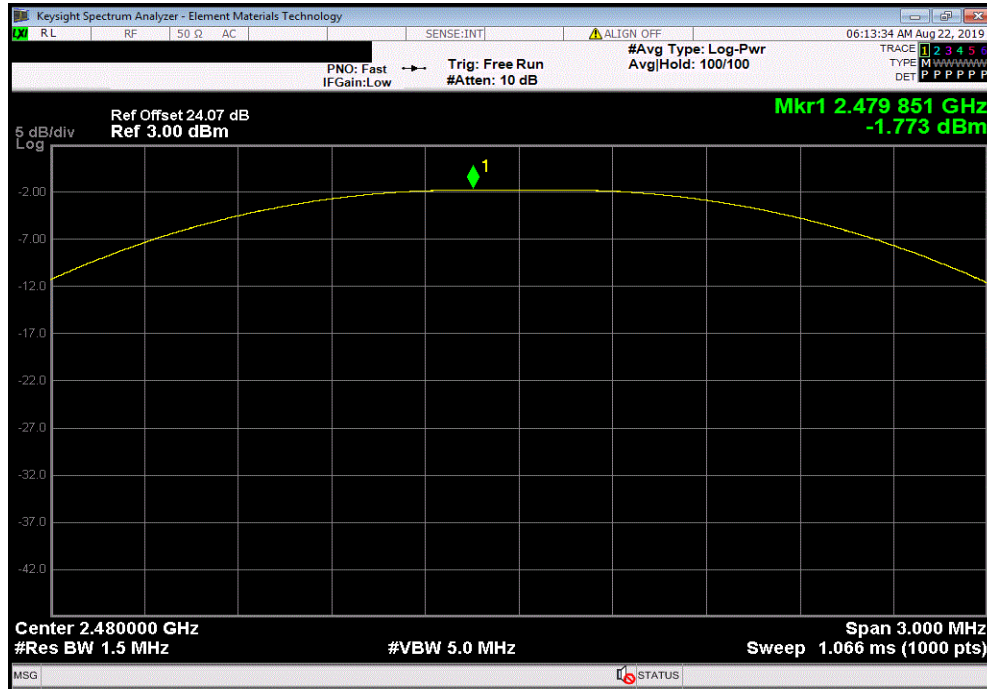

2DH5, pi/4-DQPSK, Low Channel						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	5.237	2.9	8.137	27	Pass	

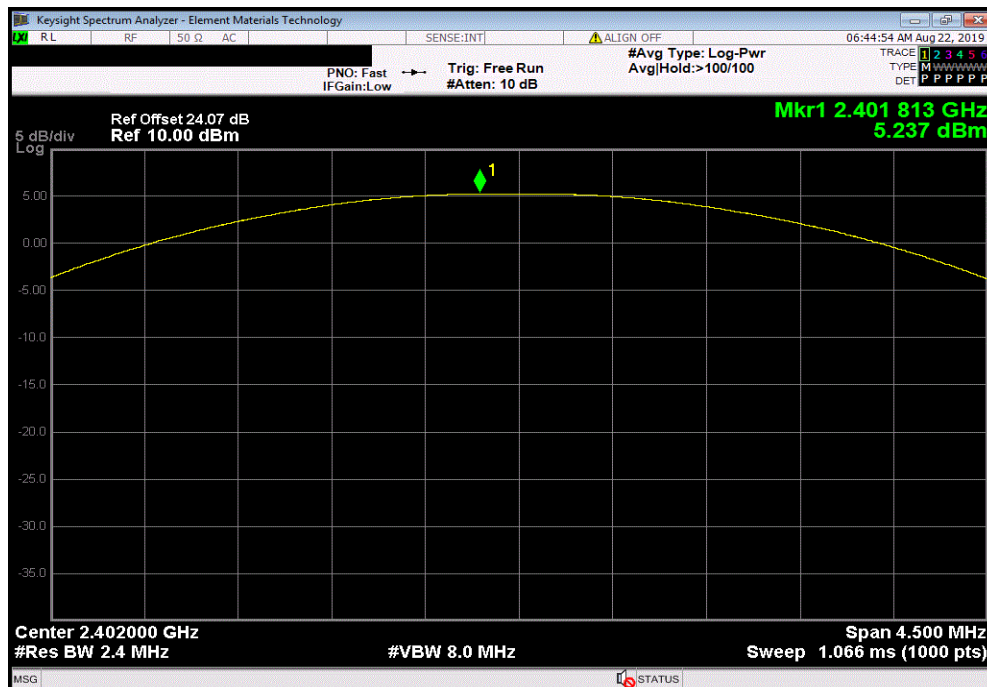


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TMTx 2019.08.02 XMI 2019.06.11

2DH5, pi/4-DQPSK, Mid Channel						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	4.569	2.78	7.349	27	Pass	

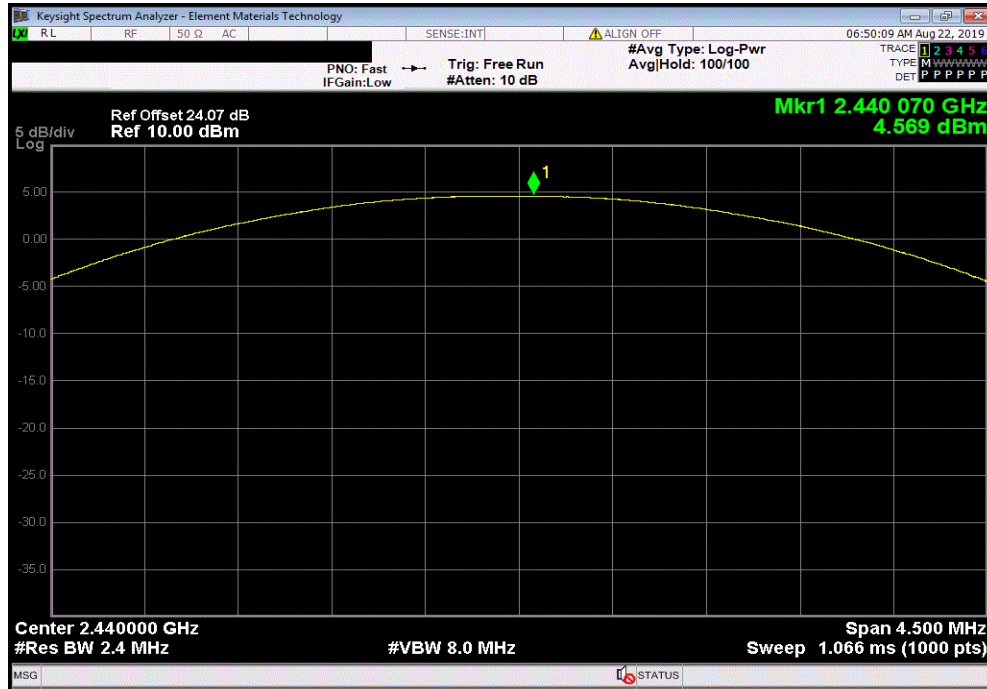

2DH5, pi/4-DQPSK, High Channel						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	4.602	3.86	8.462	27	Pass	

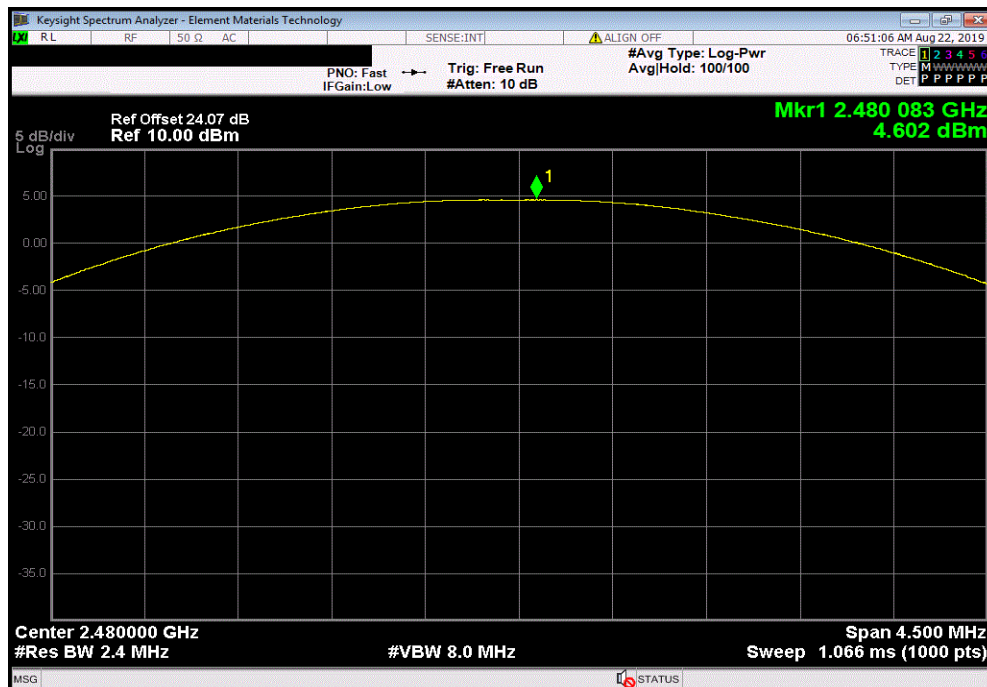


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TMTx 2019.08.02 XMI 2019.06.11

3DH5, 8-DPSK, Low Channel						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	6.066	2.9	8.966	27	Pass	

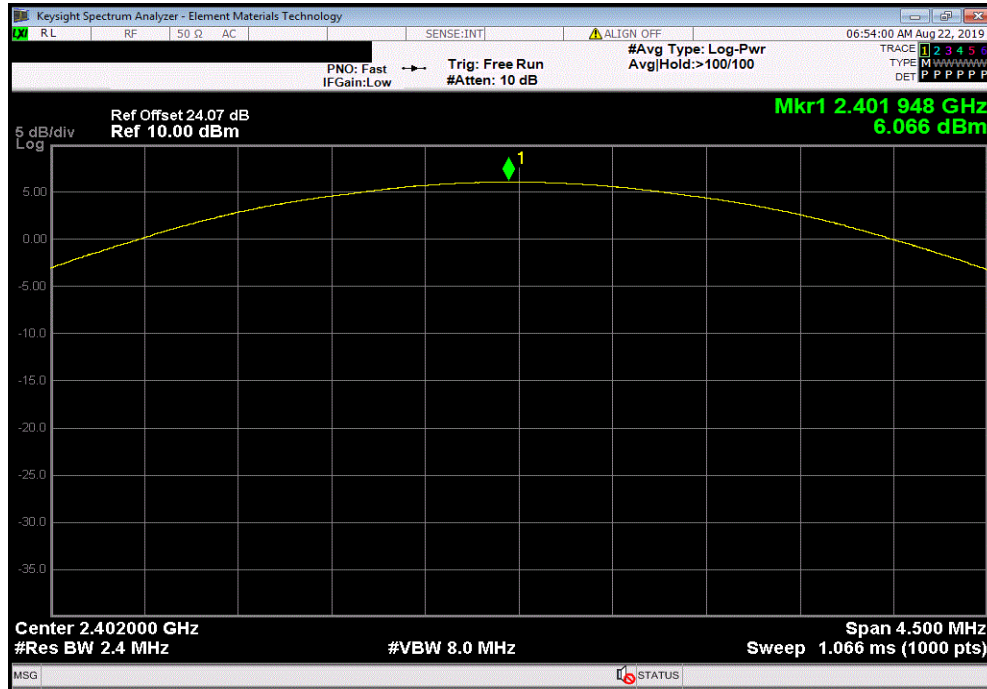

3DH5, 8-DPSK, Mid Channel						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	5.06	2.78	7.84	27	Pass	

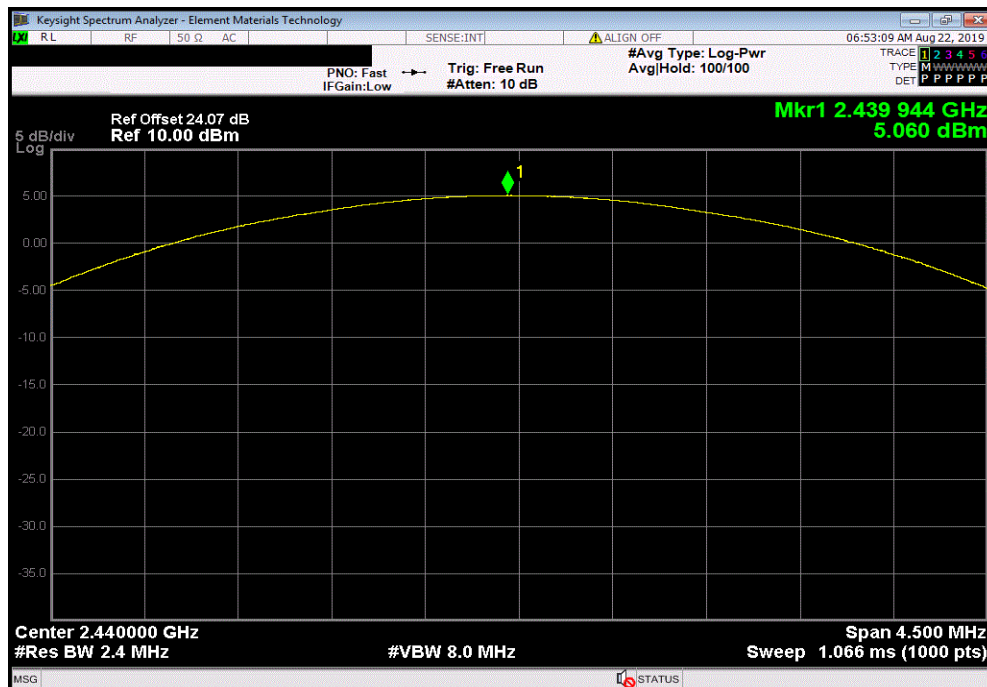


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TMTx 2019.08.02 XMI 2019.06.11

3DH5, 8-DPSK, High Channel					
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
5.125	3.86	8.985	27	Pass	

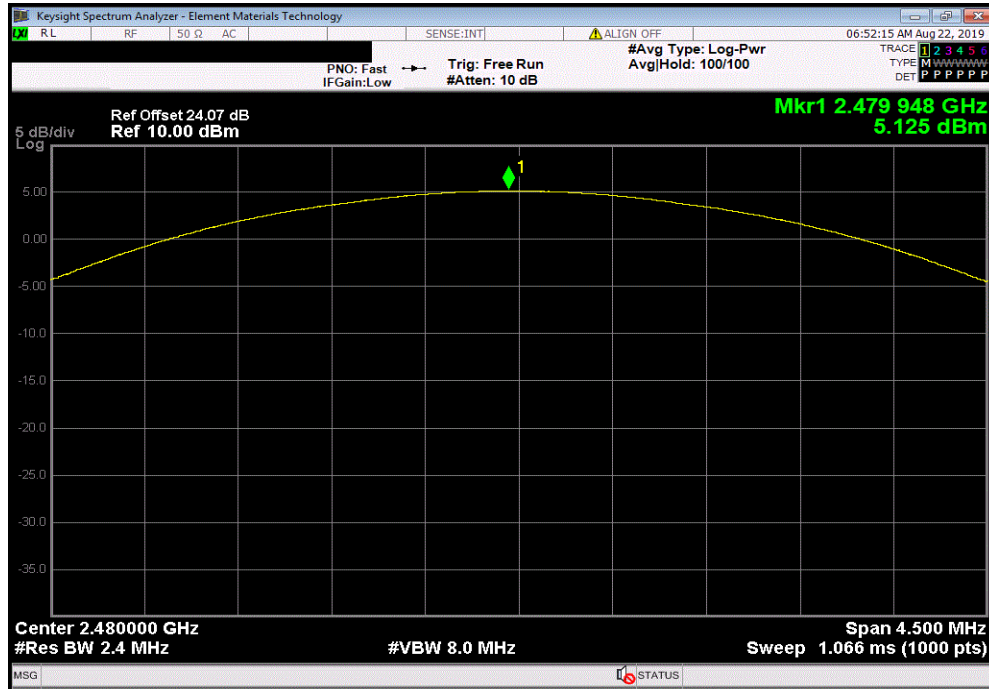

BAND EDGE COMPLIANCE



XMIT 2019.06.11

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA18H-20	TKR	20-Dec-18	20-Dec-19
Block - DC	Fairview Microwave	SD3379	AMV	3-Jan-19	3-Jan-20
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Generator - Signal	Agilent	E8257D	TGU	15-Feb-18	15-Feb-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	2-Jul-19	2-Jul-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet in a no hop mode. The channels closest to the band edges were selected.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



TbTx 2018.09.13 XMt 2019.06.11


EUT: Jonah		Work Order: DROP0009	
Serial Number: PL1919P10034		Date: 21-Aug-19	
Customer: SonicSensory, Inc.		Temperature: 23.4 °C	
Attendees: Daniel Quiros		Humidity: 45.1% RH	
Project: None		Barometric Pres.: 1015 mbar	
Tested by: Johnny Candelas		Power: 110VAC/60Hz	
		Job Site: OC13	
TEST SPECIFICATIONS			
FCC 15.247:2019		Test Method	
		ANSI C63.10:2013	
COMMENTS			
DC Block + 20 dB attenuator + Coax Cable + patch cable = 24.07 dB Total Offset			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Value (dBc)	Limit ≤ (dBc) Result
DH5, GFSK			
	Low Channel	-51.94	-20 Pass
	High Channel	-51.45	-20 Pass
2DH5, pi/4-DQPSK			
	Low Channel	-45.83	-20 Pass
	High Channel	-54.17	-20 Pass
3DH5, 8-DPSK			
	Low Channel	-45.41	-20 Pass
	High Channel	-53.00	-20 Pass

BAND EDGE COMPLIANCE




TMTx 2018.09.13 XMI 2019.06.11

DH5, GFSK, Low Channel						
				Value (dBc)	Limit ≤ (dBc)	Result
				-51.94	-20	Pass

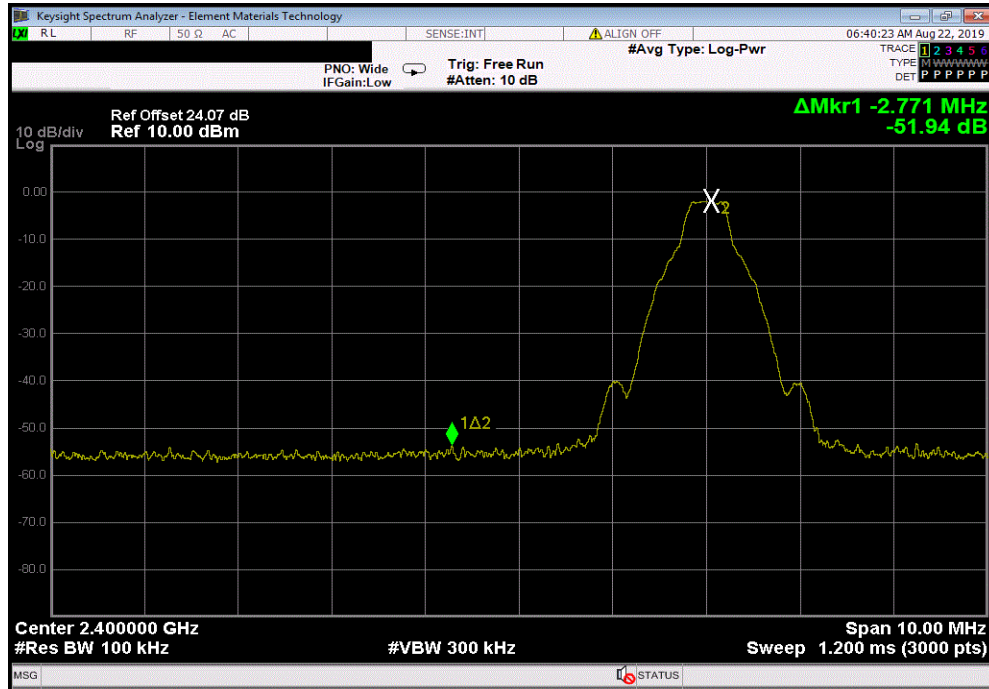

DH5, GFSK, High Channel						
				Value (dBc)	Limit ≤ (dBc)	Result
				-51.45	-20	Pass

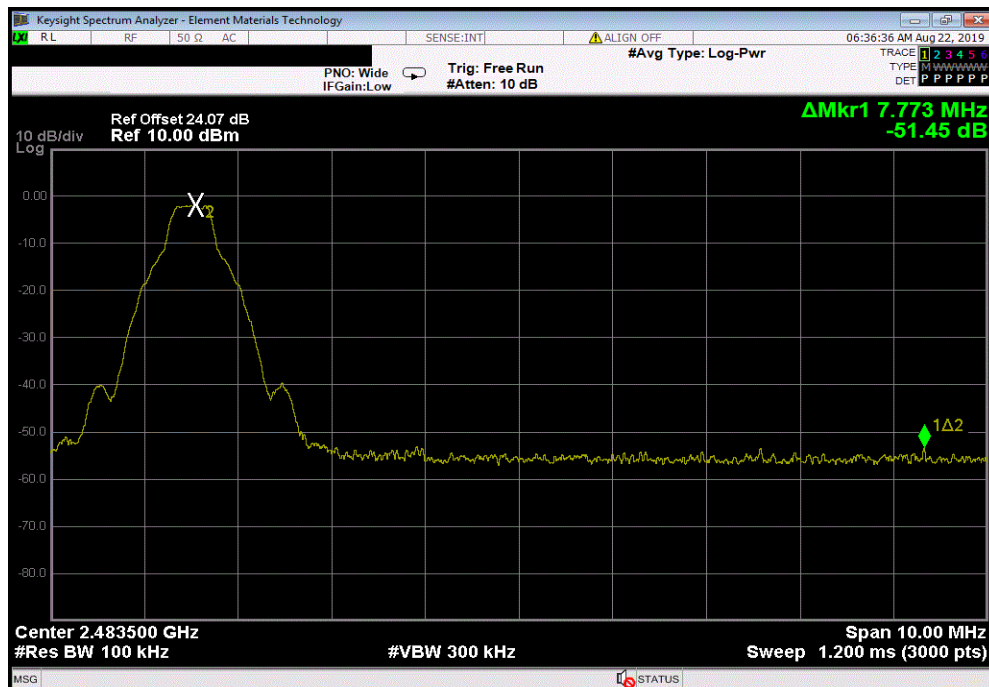


BAND EDGE COMPLIANCE




TMTx 2018.09.13 XMt 2019.06.11

2DH5, pi/4-DQPSK, Low Channel						
				Value (dBc)	Limit ≤ (dBc)	Result
				-45.83	-20	Pass

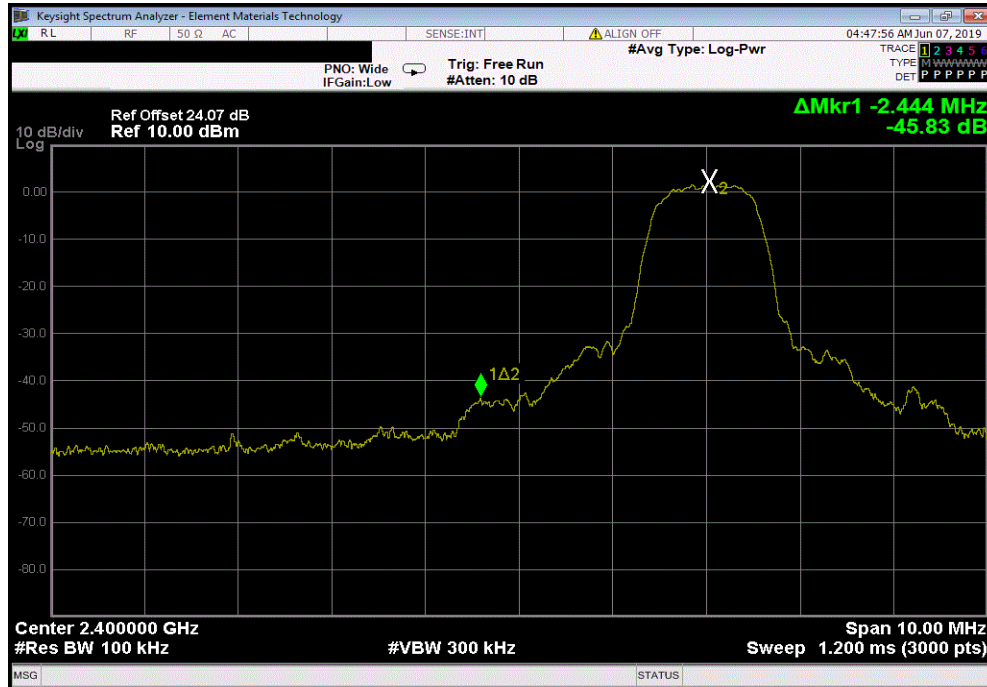

2DH5, pi/4-DQPSK, High Channel						
				Value (dBc)	Limit ≤ (dBc)	Result
				-54.17	-20	Pass

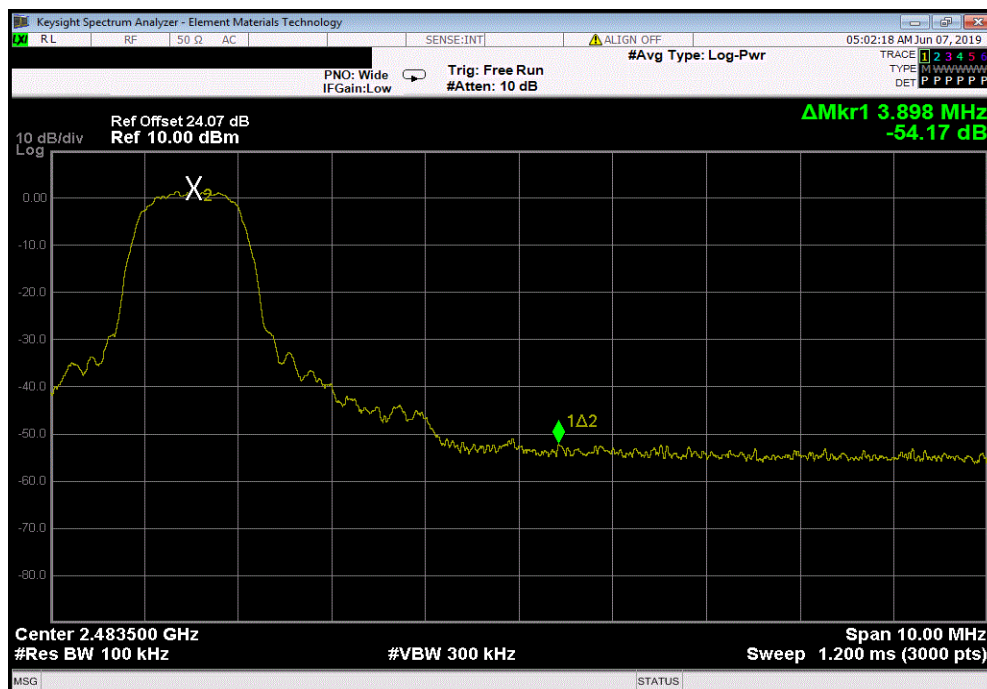


BAND EDGE COMPLIANCE



TMTx 2018.09.13 XMI 2019.06.11

3DH5, 8-DPSK, Low Channel						
				Value (dBc)	Limit ≤ (dBc)	Result
				-45.41	-20	Pass

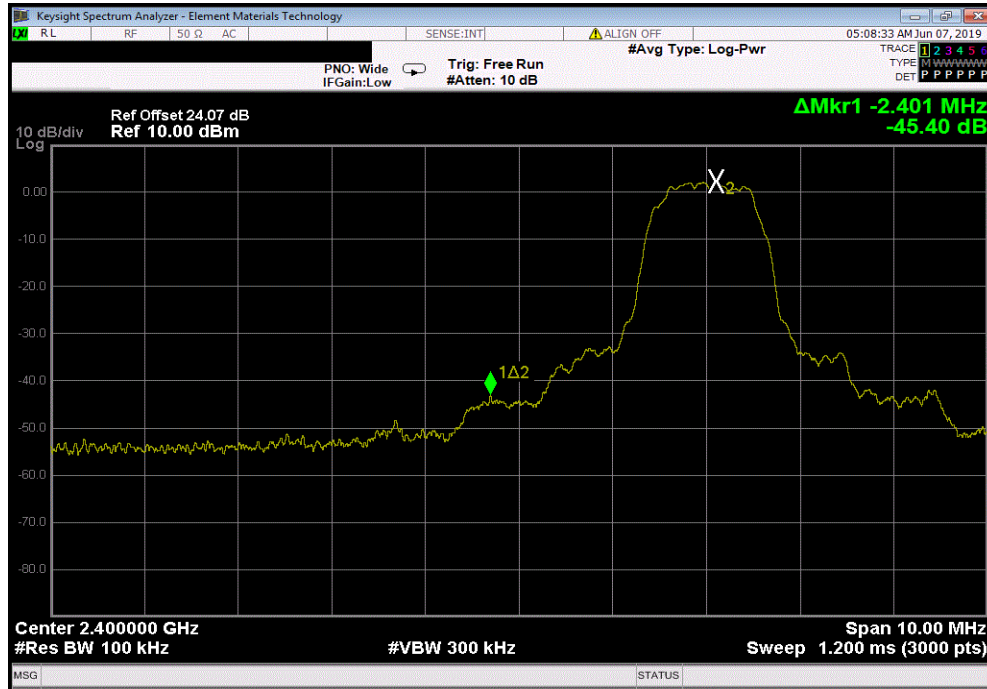

3DH5, 8-DPSK, High Channel						
				Value (dBc)	Limit ≤ (dBc)	Result
				-53.00	-20	Pass

