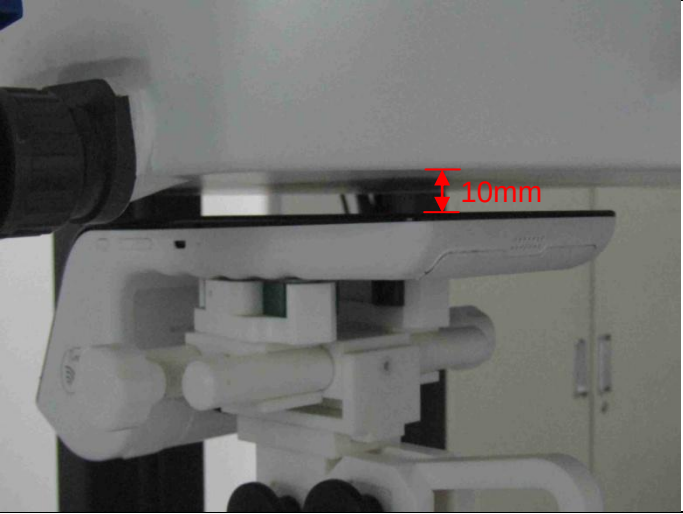
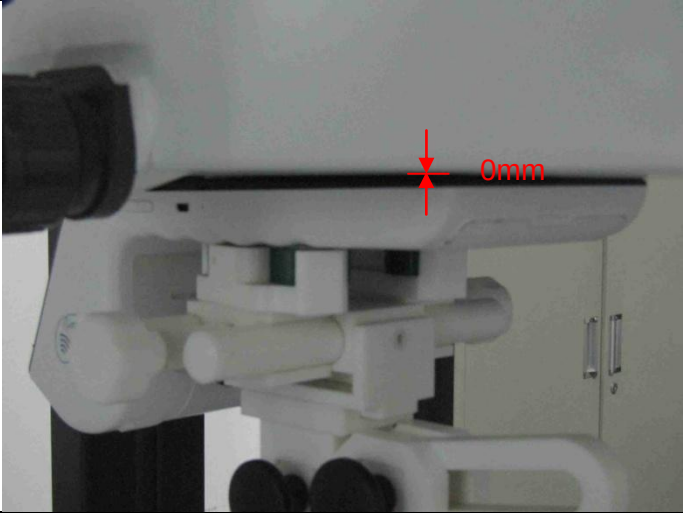
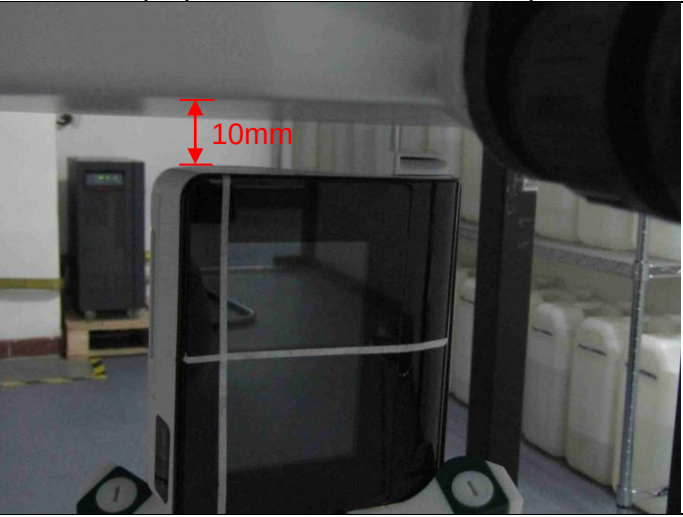
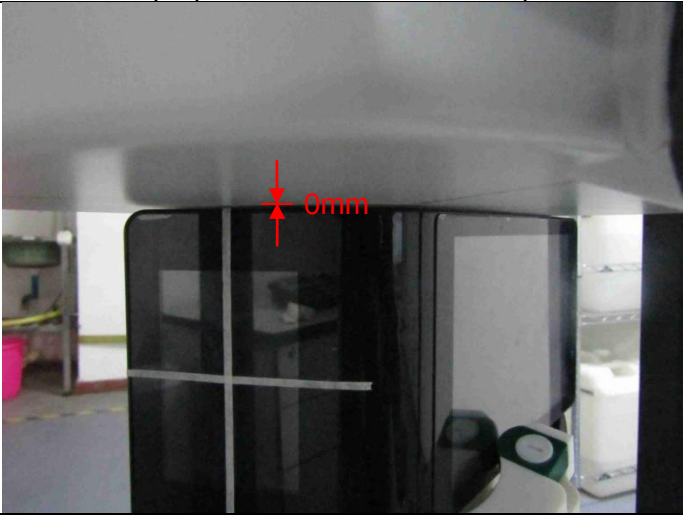
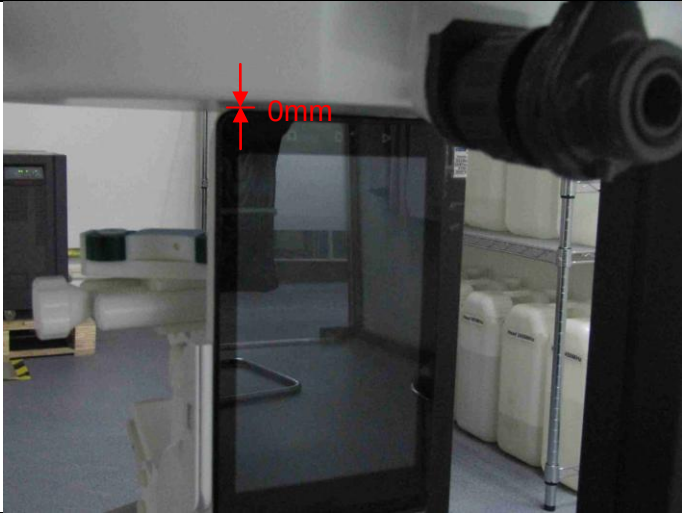


Model No.: PT7003

Test Positions

Front Side (Separation distance of 10mm)	Front Side (Separation distance of 0mm)
	
Back Side (Separation distance of 10mm)	Back Side (Separation distance of 0mm)
	
Right Side (Separation distance of 10mm)	Right Side (Separation distance of 0mm)
	

Top Side (Separation distance of 10mm)	Top Side (Separation distance of 0mm)
 A photograph showing the top side of a white electronic device, possibly a mobile phone, held by a black mechanical fixture. A red double-headed arrow indicates a vertical separation distance of 10mm between the device and the fixture. The device has a circular logo with a hand icon on its back.	 A photograph showing the top side of the same white electronic device, held by the same black mechanical fixture. A red double-headed arrow indicates a vertical separation distance of 0mm, meaning the device is in direct contact with the fixture.
Bottom Side (Separation distance of 10mm)  A photograph showing the bottom side of the white electronic device, which is a tablet, held by the black mechanical fixture. A red double-headed arrow indicates a vertical separation distance of 10mm.	Bottom Side (Separation distance of 0mm)  A photograph showing the bottom side of the white electronic device, held by the black mechanical fixture. A red double-headed arrow indicates a vertical separation distance of 0mm.

Liquid depth

Body 850MHz depth (15.2cm) 	Body 2450MHz depth (15.2cm) 
Body 2600MHz depth (15.0cm) 	Body 5000MHz depth (15.3cm) 