

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : POS Terminal

Trademark : N/A

Model Name : PT7003

Family Model : PT7003S, PT7003M, PT7003MS

Report No. : S18110702302E008

FCC ID : 2ASHJPT7003

Prepared for

Tousei Anlinx Co.,Ltd.

2nd floor, No.248, HuaQing road, QingHu, LongHua district,
Shenzhen City, China 518109

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name**: Tousei Anlinx Co.,Ltd.Address.....: 2nd floor, No.248, HuaQing road, QingHu, LongHua district,
Shenzhen City, China 518109**Manufacturer's Name**: Tousei Anlinx Co.,Ltd.Address.....: 2nd floor, No.248, HuaQing road, QingHu, LongHua district,
Shenzhen City, China 518109**Product description**

Product name.....: POS Terminal

Trademark: N/A

Model Name: PT7003

Family Model.....: PT7003S, PT7003M, PT7003MS

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

Standards: IEEE Std 1528-2013

Published RF exposure KDB procedures



This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: Nov. 09, 2018 ~ Nov. 21, 2018

Date of Issue: Feb. 20, 2019

Test Result.....: **Pass**Prepared By
(Test Engineer): 
(Cheng Jiawen)Approved By
(Lab Manager): 
(Sam Chen)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Feb. 20, 2019	Cheng Jiawen

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits	6
1.2. Statement of Compliance.....	7
1.3. EUT Description	8
1.4. Test specification(s)	9
1.5. Ambient Condition	9
2. SAR Measurement System	10
2.1. SATIMO SAR Measurement Set-up Diagram	10
2.2. Robot	11
2.3. E-Field Probe	12
2.3.1. E-Field Probe Calibration.....	12
2.4. SAM phantoms	13
2.4.1. Technical Data	14
2.5. Device Holder	15
2.6. Test Equipment List	16
3. SAR Measurement Procedures	18
3.1. Power Reference.....	18
3.2. Area scan & Zoom scan	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure.....	21
4.1. Tissue Verification.....	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results	24
5. SAR Measurement variability and uncertainty	25
5.1. SAR measurement variability	25
5.2. SAR measurement uncertainty.....	25
6. RF Exposure Positions	26
6.1. Extremity exposure conditions.....	26
6.2. Wireless Router Devices	26
7. RF Output Power	27
7.1. Maximum Tune-up Limit	27
7.2. GSM Conducted Power	28
7.3. WCDMA Conducted Power.....	28
7.4. CDMA Conducted Power	29
7.5. LTE Conducted Power.....	29
7.6. WLAN & Bluetooth Output Power	35

7.6.1. Output Power Results Of WLAN 2.4G	35
7.6.2. Output Power Results Of WLAN 5.2G	36
7.6.3. Output Power Results Of WLAN 5.8G	36
7.6.4. Output Power Results Of Bluetooth	36
8. Antenna Location	37
9. Stand-alone SAR test exclusion	38
10. SAR Results	39
10.1. SAR measurement results	39
10.1.1. SAR measurement Result of GSM850	39
10.1.2. SAR measurement Result of WCDMA Band V	40
10.1.3. SAR measurement Result of CDMA2000 BC0	41
10.1.4. SAR measurement Result of LTE Band V	42
10.1.5. SAR measurement Result of LTE Band VII	44
10.1.6. SAR measurement Result of LTE Band XLI	45
10.1.7. SAR measurement Result of WLAN 2.4G	46
10.1.8. SAR measurement Result of WLAN 5.2G	46
10.1.9. SAR measurement Result of WLAN 5.8G	47
10.2. SAR Summation Scenario	47
11. Appendix A. Photo documentation	54
12. Appendix B. System Check Plots	55
13. Appendix C. Plots of High SAR Measurement	66
14. Appendix D. Calibration Certificate	103

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE

Extremity for Limit 4.0W/kg And Trunk for Limit 1.6 W/kg

Applied To This EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for PT7003 are as follows.

Band	Max Reported SAR Value(W/kg)	
	10-g Extremity (Separation distance of 0mm)	1-g Hotspot (Separation distance of 10mm)
GSM 850	2.235	0.920
WCDMA Band V	2.723	1.394
CDMA2000 BC0	0.312	0.155
LTE Band V	1.849	1.321
LTE Band VII	3.109	1.113
LTE Band XLI	1.331	0.658
WLAN 2.4G	0.122	0.054
WLAN 5.2G	0.183	N/A
WLAN 5.8G	0.182	N/A
Max Simultaneous Tx	3.292	1.448

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (extremity for 4.0W/kg and trunk for 1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information			
Product Name		POS Terminal	
Trade Name		N/A	
Model Name		PT7003	
Family Model		PT7003S, PT7003M, PT7003MS	
FCC ID		2ASHJPT7003	
Device Phase		Identical Prototype	
Exposure Category		General population / Uncontrolled environment	
Antenna		PIFA Antenna	
Battery Information		DC 7.4V, 3900mAh	
Device Operating Configurations			
Supporting Mode(s)		GSM 850, WCDMA Band V, CDMA2000 BC0, LTE Band V/VII/XLI, WLAN 2.4G/5.2G/5.8G, Bluetooth, NFC	
Test Modulation		GSM(GMSK/8PSK), WCDMA(QPSK), CDMA2000(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK)	
Device Class		B	
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	WCDMA Band V	824-849	869-894
	CDMA2000 BC0	824-849	869-894
	LTE Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
	LTE Band XLI	2555-2655	
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	
	NFC	13.56	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	3, tested with power control “all 1”(WCDMA Band V)		
	3, tested with power control “all Up”(CDMA2000 BC0)		

Test Channels (low-mid-high)	3, tested with power control all Max.(LTE Band V)
	3, tested with power control all Max.(LTE Band VII)
	3, tested with power control all Max.(LTE Band XLI)
	128-189-251(GSM 850)
	4132-4182-4233(WCDMA Band V)
	1013-384-777(CDMA2000 BC0)
	20407-20525-20643(LTE Band V BW=1.4MHz)
	20415-20525-20635(LTE Band V BW=3MHz)
	20425-20525-20625(LTE Band V BW=5MHz)
	20450-20525-20600(LTE Band V BW=10MHz)
	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
	20825-21100-21375(LTE Band VII BW=15MHz)
	20850-21100-21350(LTE Band VII BW=20MHz)
	40440-40620-41040(LTE Band XLI BW=5MHz)
	40465-40620-41015(LTE Band XLI BW=10MHz)
	40490-40620-40990(LTE Band XLI BW=15MHz)
	40515-40620-40965(LTE Band XLI BW=20MHz)
	1-3-6-9-11(WLAN 2.4G)
	36-38-40-46-48(WLAN 5.2G)
	149-151-157-159-165(WLAN 5.8G)

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

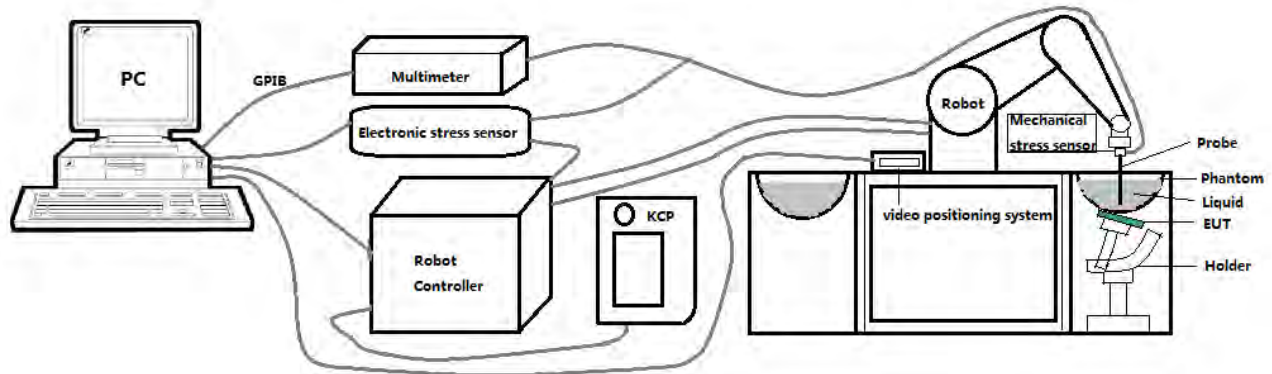

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter: 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: 0.06 dB
 - Hemispherical Isotropy: 0.08 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 7mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

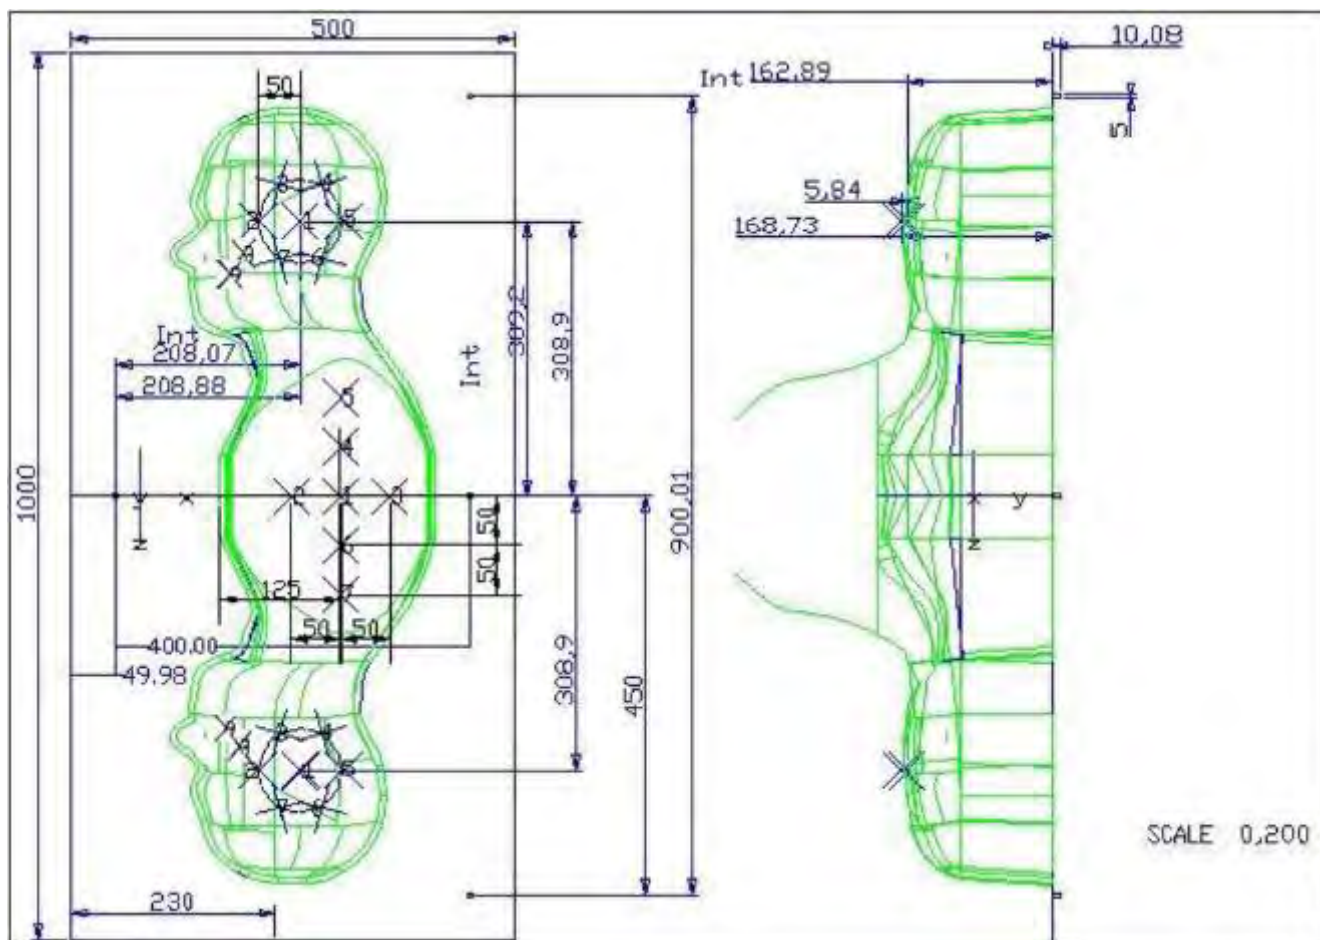


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μm .

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

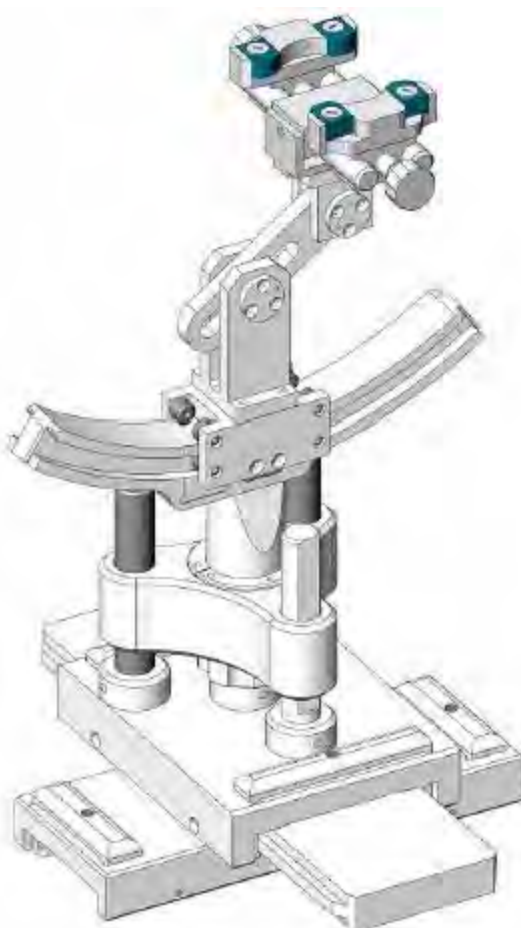

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Sep. 17, 2018	Sep. 16, 2019
☐	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication tester	CMU200	117858	Aug. 05, 2018	Aug. 04, 2019
☒	R&S	Wideband radio communication tester	CMW500	103917	Oct. 08, 2018	Oct. 07, 2019
☒	HP	Network Analyzer	8753D	3410J01136	Aug. 05, 2018	Aug. 04, 2019
☒	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Aug. 05, 2018	Aug. 04, 2019

☒	Agilent	Power meter	E4419B	MY45102538	Aug. 05, 2018	Aug. 04, 2019
☒	Agilent	Power sensor	E9301A	MY41495644	Aug. 05, 2018	Aug. 04, 2019
☒	Agilent	Power sensor	E9301A	US39212148	Aug. 05, 2018	Aug. 04, 2019
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Aug. 05, 2018	Aug. 04, 2019

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful form multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is define in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23
Ingredients (% of weight)	Body Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	50.30	50.30	50.30	69.91	69.91	71.88	71.88	71.88	79.54	79.54
NaCl	0.60	0.60	0.60	0.13	0.13	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	49.10	49.10	49.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	9.99	9.99	19.97	19.97	19.97	11.24	11.24
DGBE	0.00	0.00	0.00	19.97	19.97	7.99	7.99	7.99	9.22	9.22

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r (\pm 5\%)$	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Body 850	835	55.20 (52.44~57.96)	0.97 (0.92~1.01)	54.83	1.00	21.4 °C	Nov. 21, 2018
Body 2450	2450	52.70 (50.07~55.33)	1.95 (1.85~2.04)	52.67	1.99	21.7 °C	Nov. 09, 2018
Body 2600	2600	52.50 (49.88~55.13)	2.16 (2.05~2.27)	53.39	2.19	21.6 °C	Nov. 16, 2018
Body 5000	5200	49.00 (46.55~51.45)	5.30 (5.04~5.57)	49.95	5.26	21.5 °C	Nov. 12, 2018
Body 5000	5800	48.20 (45.79~50.61)	6.00 (5.70~6.30)	48.64	6.04	21.8 °C	Nov. 12, 2018

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

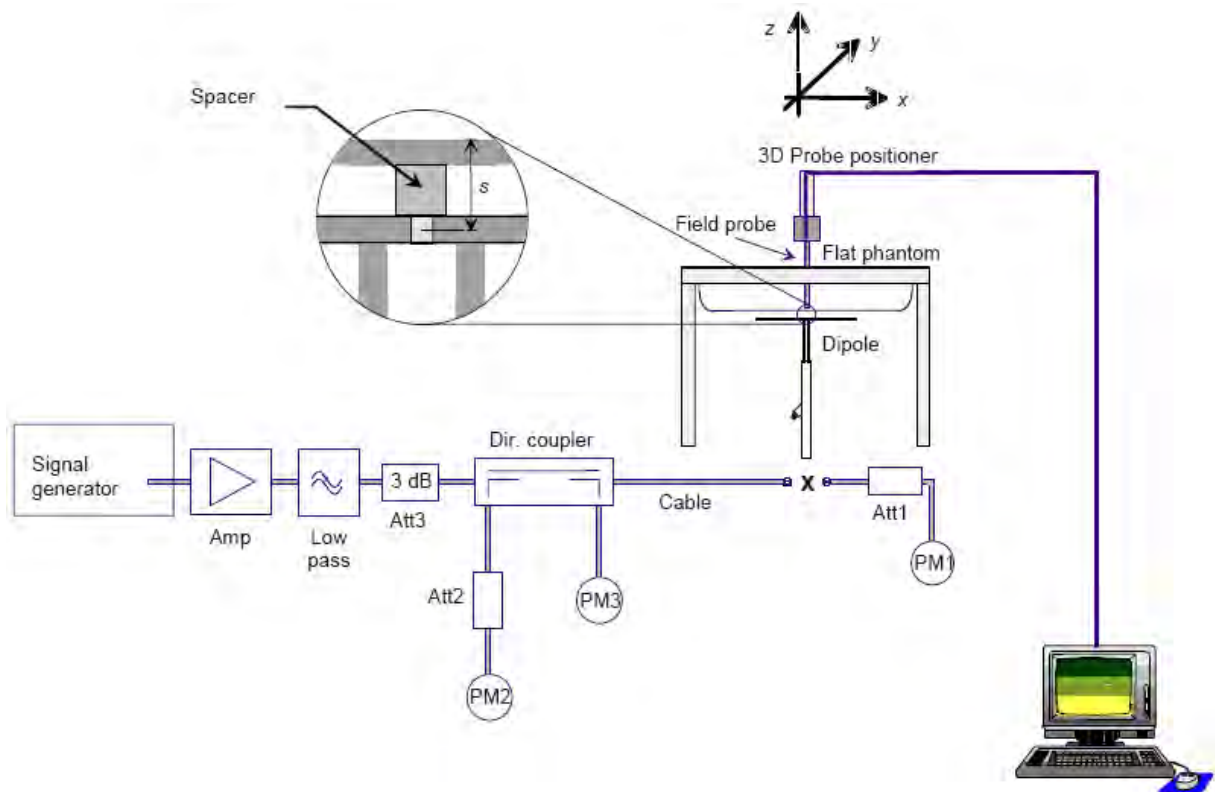

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
835MHz Body	9.48 (8.53~10.42)	6.29 (5.66~6.91)	9.46	6.27	21.4 °C	Nov. 21, 2018
2450MHz Body	49.32 (44.39~54.25)	22.89 (20.60~25.17)	48.48	23.32	21.7 °C	Nov. 09, 2018
2600MHz Body	52.95 (47.66~58.25)	23.64 (21.28~26.00)	55.01	24.16	21.6 °C	Nov. 16, 2018
5200MHz Body	156.85 (141.17~172.54)	55.20 (49.68~60.72)	154.98	54.28	21.5 °C	Nov. 12, 2018
5800MHz Body	169.30 (152.37~186.23)	58.49 (52.64~64.34)	168.00	58.38	21.8 °C	Nov. 12, 2018

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Extremity exposure conditions

Devices that are designed or intended for use on extremities, or mainly operated in extremity only exposure conditions, i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation.

6.2. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. Maximum Tune-up Limit

Band	Mode	The Tune-up Maximum Power (Customer Declared)(dBm)	Range	Measured Maximum Output Power(dBm)
GSM 850	GSM Voice	30.5±1	29.5~31.5	31.45
	GPRS	30.5±1	29.5~31.5	31.44
	EDGE	24.5±1	23.5~25.5	25.48
WCDMA Band V	RMC 12.2Kbps	21±1	20~22	21.78
	HSDPA	20±1	19~21	20.78
	HSUPA	20±1	19~21	20.79
CDMA2000 BC0	1xRTT	22.5±1	21.5~23.5	23.44
	1xEVDO Rev. 0	22.5±1	21.5~23.5	23.41
	1xEVDO Rev. A	22.5±1	21.5~23.5	23.45
LTE Band V	QPSK	23±1	22~24	23.88
	16QAM	23±1	22~24	23.55
LTE Band VII	QPSK	22±1	21~23	22.86
	16QAM	21±1	20~22	21.74
LTE Band XLI	QPSK	22.5±1	21.5~23.5	23.19
	16QAM	21.5±1	20.5~22.5	22.35
WLAN 2.4G	802.11b	12.5±1	11.5~13.5	13.3
	802.11g	11.5±1	10.5~12.5	12.2
	802.11n (HT20)	11.5±1	10.5~12.5	12.2
	802.11n (HT40)	11.5±1	10.5~12.5	12.2
WLAN 5.2G	802.11a	10.5±1	9.5~11.5	11.5
	802.11n (HT20)	10.5±1	9.5~11.5	11.4
	802.11n (HT40)	10.5±1	9.5~11.5	11.2
WLAN 5.8G	802.11a	10.5±1	9.5~11.5	11.3
	802.11n (HT20)	10.5±1	9.5~11.5	11.3
	802.11n (HT40)	10.5±1	9.5~11.5	11.1
Bluetooth	BR	2.5±1	1.5~3.5	3.47
	EDR(2M)	1.5±1	0.5~2.5	2.50
	EDR(3M)	1.8±1	0.8~2.8	2.77
	BLE	2.5±1	1.5~3.5	3.46

7.2. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	31.50	31.45	31.44	31.42	22.47	22.42	22.41	22.39
GPRS(GMSK, 1 TS)	31.50	31.44	31.43	31.41	22.47	22.41	22.40	22.38
GPRS(GMSK, 2 TS)	30.50	30.46	30.45	30.42	24.48	24.44	24.43	24.40
GPRS(GMSK, 3 TS)	28.50	28.45	28.42	28.43	24.24	24.19	24.16	24.17
GPRS(GMSK, 4 TS)	27.50	27.49	27.45	27.42	24.49	24.48	24.44	24.41
EDGE(8PSK, 1 TS)	25.50	25.48	25.44	25.41	16.47	16.45	16.41	16.38
EDGE(8PSK, 2 TS)	23.50	23.45	23.42	23.43	17.48	17.43	17.40	17.41
EDGE(8PSK, 3 TS)	21.50	21.49	21.48	21.45	17.24	17.23	17.22	17.19
EDGE(8PSK, 4 TS)	20.50	20.48	20.47	20.43	17.49	17.47	17.46	17.42

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

7.3. WCDMA Conducted Power

Band	WCDMA Band V			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC 12.2Kbps	22.00	21.75	21.78	21.77
HSDPA Subtest-1	21.00	20.75	20.76	20.78
HSDPA Subtest-2	20.00	19.84	19.87	19.89
HSDPA Subtest-3	20.00	19.83	19.83	19.84
HSDPA Subtest-4	20.00	19.82	19.80	19.86
HSUPA Subtest-1	20.00	19.79	19.84	19.83
HSUPA Subtest-2	20.00	19.82	19.88	19.81
HSUPA Subtest-3	20.00	19.84	19.85	19.78
HSUPA Subtest-4	20.00	19.77	19.81	19.80
HSUPA Subtest-5	21.00	20.79	20.78	20.75

7.4. CDMA Conducted Power

CDMA2000 BC0		Averaged output Power (dBm)			
Tx Channel		Tune-up	1013	384	777
Frequency (MHz)			824.7	836.5	848.3
1xRTT	RC1 SO55 (Loopback)	23.50	23.17	23.41	23.27
	RC3 SO55 (Loopback)	23.50	23.21	23.44	23.20
	RC3 SO32 (+F-SCH)	23.50	23.09	23.39	23.25
1xEVDO Rev. 0	FTAP Rate: 307.2 kbps(2 slot, QPSK) RTAP Rate: 153.6 kbps	23.50	23.14	23.41	23.31
1xEVDO Rev. A	FETAP: 307.2k, QPSK/ ACK RETAP: 4096	23.50	23.24	23.45	23.35

7.5. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band V	1.4MHz	QPSK	1	0	24.00	23.73	23.73	23.68
			1	2	24.00	23.77	23.82	23.66
			1	5	24.00	23.72	23.77	23.76
			3	0	24.00	23.88	23.85	23.82
			3	1	24.00	23.87	23.86	23.84
			3	2	24.00	23.85	23.37	23.86
			6	0	23.00	22.70	22.77	22.66
		16QAM	1	0	23.00	22.83	22.80	22.92
			1	2	23.00	22.87	22.89	22.91
			1	5	23.00	22.83	22.85	22.93
			3	0	23.00	22.97	22.98	22.90
			3	1	23.00	22.98	22.97	22.96
			3	2	23.00	22.99	22.99	22.89
			6	0	22.00	21.80	21.77	21.77

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band V	3MHz	QPSK	1	0	24.00	23.71	23.75	23.66
			1	7	24.00	23.67	23.76	23.69
			1	14	24.00	23.63	23.74	23.71
			8	0	23.00	22.78	22.81	22.78
			8	4	23.00	22.77	22.82	22.77
			8	7	23.00	22.76	22.83	22.76
			15	0	23.00	22.78	22.86	22.78
		16QAM	1	0	23.00	22.98	22.80	22.91
			1	7	23.00	22.97	22.84	22.93
			1	14	23.00	22.96	22.85	22.94
			8	0	22.00	21.98	21.93	21.86
			8	4	22.00	21.97	21.92	21.85
			8	7	22.00	21.99	21.94	21.83
			15	0	22.00	21.91	21.90	21.83
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band V	5MHz	QPSK	1	0	24.00	23.84	23.83	23.86
			1	12	24.00	23.80	23.81	23.81
			1	24	24.00	23.76	23.77	23.81
			12	0	23.00	22.84	22.86	22.94
			12	6	23.00	22.83	22.85	22.93
			12	11	23.00	22.82	22.86	22.90
			25	0	23.00	22.79	22.83	22.90
		16QAM	1	0	23.00	22.81	22.95	22.99
			1	12	23.00	22.75	22.92	22.98
			1	24	23.00	22.74	22.91	22.97
			12	0	23.00	21.90	21.88	22.99
			12	6	22.00	21.89	21.87	21.97
			12	11	22.00	21.88	21.85	21.98
			25	0	22.00	21.89	21.87	21.97

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band V	10MHz	QPSK	1	0	24.00	23.79	23.79	23.83
			1	24	24.00	23.73	23.77	23.79
			1	49	24.00	23.74	23.79	23.85
			25	0	23.00	22.84	22.80	22.87
			25	12	23.00	22.83	22.82	22.89
			25	24	23.00	22.82	22.83	22.90
			50	0	23.00	22.85	22.86	22.90
		16QAM	1	0	24.00	23.54	23.49	22.92
			1	24	24.00	23.46	23.46	22.92
			1	49	24.00	23.43	23.55	22.95
			25	0	23.00	21.96	21.95	22.45
			25	12	23.00	21.95	21.96	22.46
			25	24	23.00	21.93	21.96	22.47
			50	0	22.00	21.87	21.86	21.99

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band VII	5MHz	QPSK	1	0	23.00	22.86	22.84	21.90
			1	12	23.00	22.42	22.71	21.87
			1	24	23.00	22.31	21.87	21.80
			12	0	22.00	21.83	21.15	20.94
			12	6	22.00	21.70	21.21	20.91
			12	11	22.00	21.56	21.26	20.88
			25	0	22.00	21.53	21.07	20.86
		16QAM	1	0	22.00	21.71	21.34	21.20
			1	12	22.00	21.16	21.31	21.14
			1	24	22.00	21.26	21.14	21.06
			12	0	21.00	20.70	20.89	19.97
			12	6	21.00	20.65	20.78	19.94
			12	11	21.00	20.53	20.72	19.92
			25	0	21.00	20.63	20.20	19.86

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band VII	10MHz	QPSK	1	0	23.00	21.84	22.21	21.90
			1	24	23.00	21.98	22.21	21.89
			1	49	23.00	21.79	22.22	21.86
			25	0	22.00	20.82	21.18	20.91
			25	12	22.00	20.83	21.18	20.92
			25	24	22.00	20.85	21.19	20.94
			50	0	22.00	20.86	21.19	20.93
		16QAM	1	0	22.00	21.28	21.18	21.04
			1	24	22.00	21.21	21.16	21.07
			1	49	22.00	21.16	21.17	20.97
			25	0	21.00	19.89	20.22	19.99
			25	12	21.00	19.90	20.25	19.96
			25	24	21.00	19.88	20.27	19.94
			50	0	21.00	19.89	20.18	19.95
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band VII	15MHz	QPSK	1	0	23.00	22.06	22.20	22.11
			1	37	23.00	21.70	22.25	21.99
			1	74	23.00	22.18	21.96	21.94
			36	0	22.00	21.19	21.27	21.08
			36	18	22.00	21.21	21.29	21.05
			36	37	22.00	21.23	21.30	21.04
			75	0	22.00	21.19	21.27	21.04
		16QAM	1	0	22.00	21.39	21.55	21.13
			1	37	22.00	21.22	21.53	21.12
			1	74	22.00	21.34	21.44	21.02
			36	0	21.00	20.10	20.20	20.07
			36	18	21.00	20.12	20.23	20.05
			36	37	21.00	20.15	20.24	20.02
			75	0	21.00	20.13	20.19	20.04

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band VII	20MHz	QPSK	1	0	23.00	22.24	22.25	22.29
			1	49	23.00	22.22	22.25	22.24
			1	99	23.00	22.14	22.21	22.23
			50	0	22.00	21.12	21.27	21.15
			50	24	22.00	21.15	21.26	21.13
			50	49	22.00	21.18	21.25	21.11
			100	0	22.00	21.05	21.24	21.01
		16QAM	1	0	22.00	21.26	21.74	21.13
			1	49	22.00	20.99	21.70	21.20
			1	99	22.00	21.32	21.58	21.09
			50	0	21.00	20.02	20.27	20.07
			50	24	21.00	20.05	20.27	20.05
			50	49	21.00	20.07	20.28	20.06
			100	0	21.00	20.05	20.23	20.07

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40440/2575	40620/2593	41040/2635
LTE Band XLI	5MHz	QPSK	1	0	23.50	22.96	23.10	23.11
			1	12	23.50	22.97	23.10	23.15
			1	24	23.50	22.92	23.04	23.07
			12	0	22.50	21.99	22.12	22.04
			12	6	22.50	21.98	22.11	22.03
			12	11	22.50	21.98	22.11	22.01
			25	0	22.50	21.93	22.08	21.97
		16QAM	1	0	22.50	21.99	22.18	22.08
			1	12	22.50	22.02	22.22	22.13
			1	24	22.50	21.99	22.17	22.04
			12	0	21.50	20.96	21.10	21.13
			12	6	21.50	20.98	21.09	21.14
			12	11	21.50	20.95	21.06	20.98
			25	0	21.50	20.92	21.15	20.94

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40465/2577.5	40620/2593	41015/2632.5
LTE Band XLI	10MHz	QPSK	1	0	23.50	22.99	23.16	23.18
			1	24	23.50	23.00	23.10	23.16
			1	49	23.50	23.02	23.14	23.15
			25	0	22.50	21.97	22.05	22.05
			25	12	22.50	21.99	22.04	22.03
			25	24	22.50	22.00	22.00	22.02
			50	0	22.50	22.00	22.02	22.01
		16QAM	1	0	22.50	21.98	22.35	21.95
			1	24	22.50	22.06	22.32	21.95
			1	49	22.50	22.11	22.35	21.92
			25	0	21.50	20.97	21.03	20.99
			25	12	21.50	20.99	21.05	20.98
			25	24	21.50	21.01	21.06	21.00
			50	0	21.50	20.96	21.01	20.94
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40490/2580	40620/2593	40990/2630
LTE Band XLI	15MHz	QPSK	1	0	23.50	23.01	23.17	23.02
			1	37	23.50	23.07	23.18	23.03
			1	74	23.50	23.05	23.11	23.00
			36	0	22.50	22.06	22.10	22.16
			36	18	22.50	22.05	22.11	22.14
			36	37	22.50	22.08	22.10	22.13
			75	0	22.50	22.07	22.09	22.18
		16QAM	1	0	22.50	22.02	22.16	21.90
			1	37	22.50	22.16	22.20	21.90
			1	74	22.50	21.93	22.05	21.87
			36	0	21.50	20.98	21.14	21.04
			36	18	21.50	20.99	21.15	21.03
			36	37	21.50	21.01	21.16	21.02
			75	0	21.50	21.00	21.09	21.06

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		40515/2582.5	40620/2593	40965/2627.5
LTE Band XLI	20MHz	QPSK	1	0	23.50	23.10	23.19	23.05
			1	49	23.50	23.14	23.17	23.11
			1	99	23.50	23.17	23.15	23.12
			50	0	22.50	22.01	22.16	22.04
			50	24	22.50	22.05	22.09	22.03
			50	49	22.50	22.08	22.15	22.00
			100	0	22.50	22.03	22.09	22.02
		16QAM	1	0	22.50	22.10	22.23	21.94
			1	49	22.50	22.21	22.32	21.92
			1	99	22.50	22.35	22.28	21.99
			50	0	21.50	20.96	21.05	21.01
			50	24	21.50	20.99	21.10	21.00
			50	49	21.50	21.00	21.13	20.96
			100	0	21.50	20.98	21.06	20.98

7.6. WLAN & Bluetooth Output Power

7.6.1. Output Power Results Of WLAN 2.4G

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	13.5	13.1
	6	2437	13.5	12.9
	11	2462	13.5	13.3
802.11g	1	2412	12.5	12.0
	6	2437	12.5	12.2
	11	2462	12.5	12.2
802.11n (HT20)	1	2412	12.5	12.2
	6	2437	12.5	12.2
	11	2462	12.5	12.2
802.11n (HT40)	3	2422	12.5	11.9
	6	2437	12.5	11.9
	9	2452	12.5	12.2

7.6.2. Output Power Results Of WLAN 5.2G

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	36	5180	11.5	10.8
	40	5200	11.5	10.8
	48	5240	11.5	11.5
802.11n (HT20)	36	5180	11.5	10.8
	40	5200	11.5	10.8
	48	5240	11.5	11.4
802.11n (HT40)	38	5190	11.5	10.6
	46	5230	11.5	11.2

7.6.3. Output Power Results Of WLAN 5.8G

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	149	5745	11.5	10.3
	157	5785	11.5	11.0
	165	5825	11.5	11.3
802.11n (HT20)	149	5745	11.5	11.0
	157	5785	11.5	10.6
	165	5825	11.5	11.3
802.11n (HT40)	151	5755	11.5	10.8
	159	5795	11.5	11.1


7.6.4. Output Power Results Of Bluetooth

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			0CH	39CH	78CH
	1M	3.50	1.58	3.16	3.47
	2M	2.50	0.58	2.25	2.50
	3M	2.80	0.86	2.46	2.77

BLE	Channel	Tune-up	Output Power (dBm)
	0CH	3.50	1.56
	19CH	3.50	3.41
	39CH	3.50	3.46

8. Antenna Location

Left Side

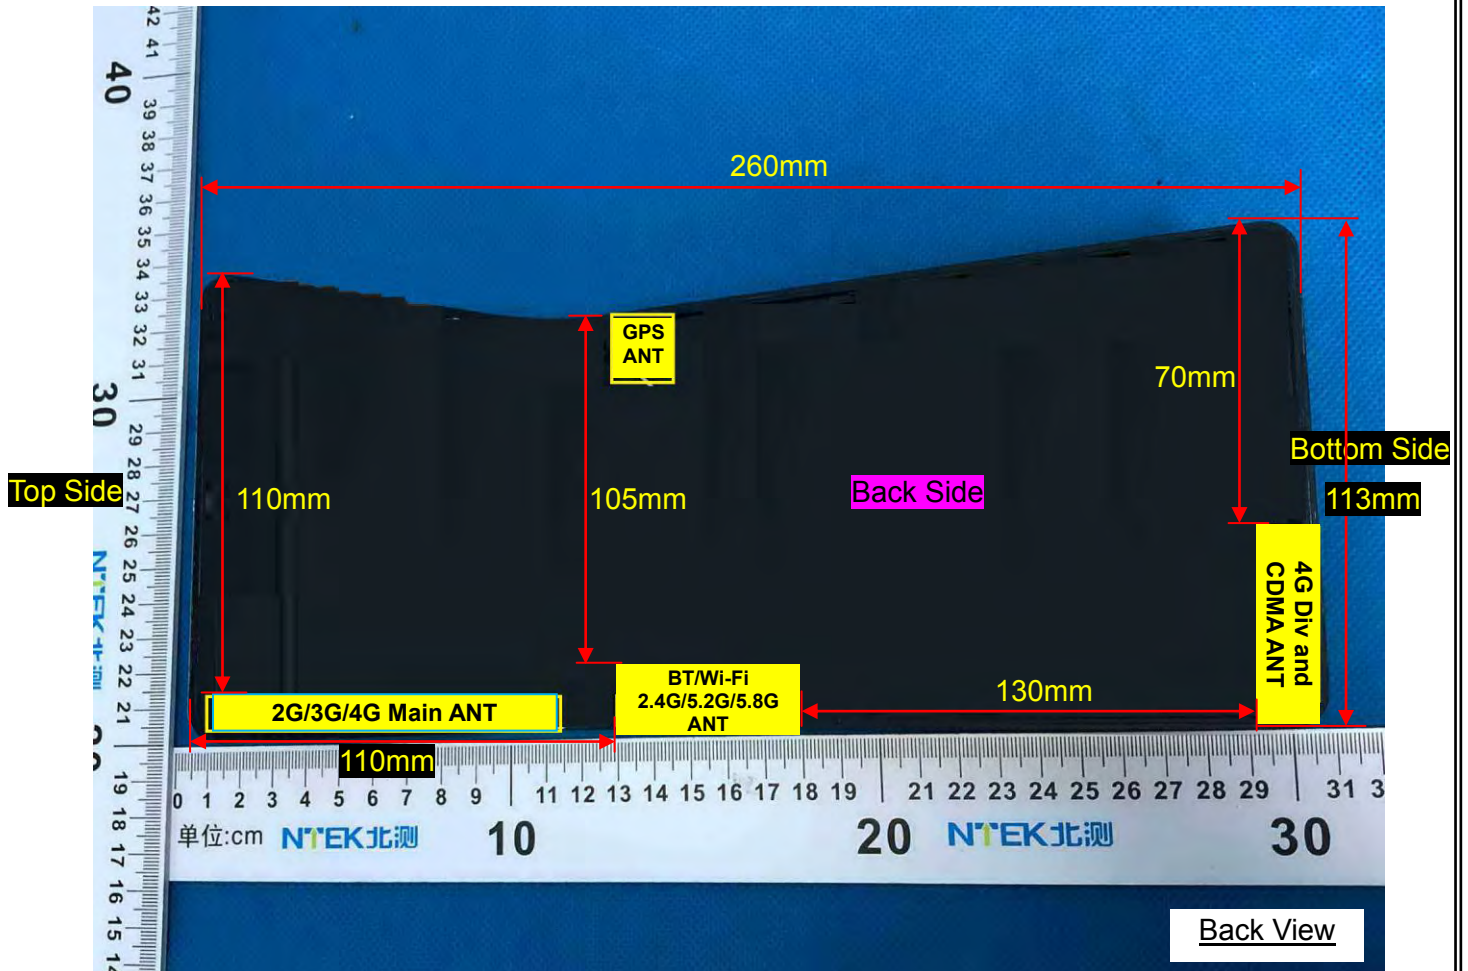

Right Side

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{\text{(GHz)}}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	3.5	2.24	10	2.480	0.35	3.0	Yes
Bluetooth	3.5	2.24	5	2.480	0.71	7.5	Yes

NOTE: Standalone SAR test exclusion for Bluetooth

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{f_{\text{(GHz)}}}/x] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Extremity	3.5	2.24	5	2.480	18.75	0.038
Bluetooth	Hotspot	3.5	2.24	10	2.480	7.5	0.047

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement results

10.1.1. SAR measurement Result of GSM850

Test Position of Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 10-g (W/Kg)
			1-g	10-g				
Front Side	189/836.4	GPRS(GMSK 4TS)	1.145	0.678	0.25	27.45	27.50	0.686
Back Side	189/836.4	GPRS(GMSK 4TS)	1.201	0.692	3.21	27.45	27.50	0.700
Right Side	189/836.4	GPRS(GMSK 4TS)	4.327	2.209	-3.63	27.45	27.50	2.235
Right Side - Repeated	189/836.4	GPRS(GMSK 4TS)	4.320	2.203	0.27	27.45	27.50	2.229
Top Side	189/836.4	GPRS(GMSK 4TS)	1.002	0.660	-1.54	27.45	27.50	0.668
Right Side	128/824.2	GPRS(GMSK 4TS)	4.310	2.154	3.16	27.49	27.50	2.159
Right Side	251/848.8	GPRS(GMSK 4TS)	4.123	2.002	2.54	27.42	27.50	2.039

NOTE: Extremity SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1-g (W/Kg)
			1-g	10-g				
Front Side	189/836.4	GPRS(GMSK 4TS)	0.210	0.114	2.47	27.45	27.50	0.212
Back Side	189/836.4	GPRS(GMSK 4TS)	0.231	0.124	1.32	27.45	27.50	0.234
Right Side	189/836.4	GPRS(GMSK 4TS)	0.909	0.569	0.96	27.45	27.50	0.920
Right Side - Repeated	189/836.4	GPRS(GMSK 4TS)	0.902	0.565	2.14	27.45	27.50	0.912
Top Side	189/836.4	GPRS(GMSK 4TS)	0.203	0.109	-4.10	27.45	27.50	0.205
Right Side	128/824.2	GPRS(GMSK 4TS)	0.638	0.398	-1.11	27.49	27.50	0.639
Right Side	251/848.8	GPRS(GMSK 4TS)	0.847	0.450	0.21	27.42	27.50	0.863

NOTE: Hotspot SAR test results of GSM850

10.1.2. SAR measurement Result of WCDMA Band V

Test Position of Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 10-g (W/Kg)
			1-g	10-g				
Front Side	4182/836.4	RMC12.2K	1.321	0.712	1.20	21.78	22.00	0.749
Back Side	4182/836.4	RMC12.2K	1.214	0.703	0.31	21.78	22.00	0.740
Right Side	4182/836.4	RMC12.2K	4.775	2.583	-0.05	21.78	22.00	2.717
Right Side - Repeated	4182/836.4	RMC12.2K	4.770	2.580	-1.52	21.78	22.00	2.714
Top Side	4182/836.4	RMC12.2K	1.108	0.697	1.47	21.78	22.00	0.733
Right Side	4132/826.4	RMC12.2K	4.765	2.571	2.10	21.75	22.00	2.723
Right Side	4233/846.6	RMC12.2K	4.741	2.554	0.74	21.77	22.00	2.693

NOTE: Extremity SAR test results of WCDMA Band V

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1-g (W/Kg)
			1-g	10-g				
Front Side	4182/836.4	RMC12.2K	0.112	0.062	2.57	21.78	22.00	0.118
Back Side	4182/836.4	RMC12.2K	0.129	0.071	3.21	21.78	22.00	0.136
Right Side	4182/836.4	RMC12.2K	0.935	0.572	-0.23	21.78	22.00	0.984
Top Side	4182/836.4	RMC12.2K	0.102	0.056	0.45	21.78	22.00	0.107
Right Side	4132/826.4	RMC12.2K	0.616	0.381	-0.23	21.75	22.00	0.653
Right Side	4233/846.6	RMC12.2K	1.322	0.801	-4.85	21.77	22.00	1.394
Right Side - Repeated	4233/846.6	RMC12.2K	1.268	0.766	-2.66	21.77	22.00	1.337

NOTE: Hotspot SAR test results of WCDMA Band V

10.1.3. SAR measurement Result of CDMA2000 BC0

Test Position of Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 10-g (W/Kg)
			1-g	10-g				
Front Side	384/836.5	1xRTT RC3 SO32 (+F-SCH)	0.542	0.304	-0.23	23.39	23.50	0.312
Back Side	384/836.5	1xRTT RC3 SO32 (+F-SCH)	0.152	0.095	-0.76	23.39	23.50	0.097
Right Side	384/836.5	1xRTT RC3 SO32 (+F-SCH)	0.272	0.144	-0.49	23.39	23.50	0.148
Bottom Side	384/836.5	1xRTT RC3 SO32 (+F-SCH)	0.573	0.298	0.15	23.39	23.50	0.306

NOTE: Extremity SAR test results of CDMA2000 BC0

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1-g (W/Kg)
			1-g	10-g				
Front Side	384/836.5	1xRTT RC3 SO32 (+F-SCH)	0.151	0.092	-0.64	23.39	23.50	0.155
Back Side	384/836.5	1xRTT RC3 SO32 (+F-SCH)	0.148	0.089	0.32	23.39	23.50	0.152
Right Side	384/836.5	1xRTT RC3 SO32 (+F-SCH)	0.140	0.082	1.28	23.39	23.50	0.144
Bottom Side	384/836.5	1xRTT RC3 SO32 (+F-SCH)	0.142	0.083	-0.17	23.39	23.50	0.146

NOTE: Hotspot SAR test results of CDMA2000 BC0

10.1.4. SAR measurement Result of LTE Band V

Test Position of Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 10-g (W/Kg)
			1-g	10-g				
1RB								
Front Side	20525/836.5	10M QPSK(1,49)	0.945	0.789	1.24	23.79	24.00	0.828
Back Side	20525/836.5	10M QPSK(1,49)	0.921	0.774	0.31	23.79	24.00	0.812
Right Side	20525/836.5	10M QPSK(1,49)	3.133	1.762	-0.12	23.79	24.00	1.849
Top Side	20525/836.5	10M QPSK(1,49)	0.909	0.763	-4.02	23.79	24.00	0.801
50%RB								
Front Side	20525/836.5	1.4M QPSK(3,0)	0.925	0.781	1.41	23.85	24.00	0.808
Back Side	20525/836.5	1.4M QPSK(3,0)	0.918	0.769	0.37	23.85	24.00	0.796
Right Side	20525/836.5	1.4M QPSK(3,0)	3.128	1.754	1.43	23.85	24.00	1.816
Top Side	20525/836.5	1.4M QPSK(3,0)	0.902	0.760	2.17	23.85	24.00	0.787

NOTE: Extremity SAR test results of LTE Band V

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1-g (W/Kg)
			1-g	10-g				
1RB								
Front Side	20525/836.5	10M QPSK(1,49)	0.354	0.206	0.35	23.79	24.00	0.372
Back Side	20525/836.5	10M QPSK(1,49)	0.381	0.219	1.24	23.79	24.00	0.400
Right Side	20525/836.5	10M QPSK(1,49)	1.223	0.738	-0.22	23.79	24.00	1.284
Top Side	20525/836.5	10M QPSK(1,49)	0.330	0.194	0.54	23.79	24.00	0.346
Right Side	20450/829	10M QPSK(1,49)	0.962	0.589	-0.29	23.74	24.00	1.021
Right Side	20600/844	10M QPSK(1,49)	1.276	0.951	-0.24	23.85	24.00	1.321

Right Side - Repeated	20600/844	10M QPSK(1,49)	1.271	0.945	-0.06	23.85	24.00	1.316
50%RB								
Front Side	20525/836.5	1.4M QPSK(3,0)	0.124	0.078	0.31	23.85	24.00	0.128
Back Side	20525/836.5	1.4M QPSK(3,0)	0.164	0.089	2.51	23.85	24.00	0.170
Right Side	20525/836.5	1.4M QPSK(3,0)	0.968	0.561	-1.41	23.85	24.00	1.002
Top Side	20525/836.5	1.4M QPSK(3,0)	0.103	0.068	3.02	23.85	24.00	0.107
Right Side	20407/824.7	1.4M QPSK(3,0)	0.951	0.553	-0.51	23.88	24.00	0.978
Right Side	20643/848.3	1.4M QPSK(3,0)	0.987	0.579	3.26	23.82	24.00	1.029
Right Side - Repeated	20643/848.3	1.4M QPSK(3,0)	0.981	0.570	0.57	23.82	24.00	1.023
100%RB								
Right Side	20525/836.5	10M QPSK(50,0)	0.621	0.354	1.47	22.86	23.00	0.641

NOTE: Hotspot SAR test results of LTE Band V

10.1.5. SAR measurement Result of LTE Band VII

Test Position of Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 10-g (W/Kg)
			1-g	10-g				
1RB								
Front Side	21100/2535	20M QPSK(1,0)	2.201	0.874	2.51	22.25	23.00	1.039
Back Side	21100/2535	20M QPSK(1,0)	2.231	0.897	0.34	22.25	23.00	1.066
Right Side	21100/2535	20M QPSK(1,0)	6.550	2.611	1.20	22.25	23.00	3.103
Top Side	21100/2535	20M QPSK(1,0)	2.204	0.841	-0.17	22.25	23.00	1.000
Right Side	20850/2510	20M QPSK(1,0)	6.521	2.592	0.21	22.24	23.00	3.088
Right Side	21350/2560	20M QPSK(1,0)	6.568	2.640	-1.52	22.29	23.00	3.109
Right Side - Repeated	21350/2560	20M QPSK(1,0)	6.553	2.631	0.23	22.29	23.00	3.098
50%RB								
Front Side	21100/2535	20M QPSK(50,0)	2.005	0.841	0.25	21.27	22.00	0.995
Back Side	21100/2535	20M QPSK(50,0)	2.103	0.850	0.37	21.27	22.00	1.006
Right Side	21100/2535	20M QPSK(50,0)	5.412	2.145	3.18	21.27	22.00	2.538
Top Side	21100/2535	20M QPSK(50,0)	1.987	0.802	2.64	21.27	22.00	0.949
Right Side	20850/2510	20M QPSK(50,0)	5.446	2.159	0.27	21.12	22.00	2.644
Right Side	21350/2560	20M QPSK(50,0)	5.815	2.339	-0.77	21.15	22.00	2.845
Right Side - Repeated	21350/2560	20M QPSK(50,0)	5.802	2.320	1.57	21.15	22.00	2.822
100%RB								
Right Side	21100/2535	20M QPSK(100,0)	4.123	1.892	0.57	21.24	22.00	2.254

NOTE: Extremity SAR test results of LTE Band VII

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1-g (W/Kg)
			1-g	10-g				
1RB								
Front Side	21100/2535	20M QPSK(1,0)	0.116	0.064	0.81	22.25	23.00	0.138
Back Side	21100/2535	20M QPSK(1,0)	0.119	0.067	-3.25	22.25	23.00	0.141
Right Side	21100/2535	20M QPSK(1,0)	0.886	0.462	-4.50	22.25	23.00	1.053
Top Side	21100/2535	20M QPSK(1,0)	0.102	0.058	0.24	22.25	23.00	0.121
Right Side	20850/2510	20M QPSK(1,0)	0.630	0.343	-1.91	22.24	23.00	0.750
Right Side	21350/2560	20M QPSK(1,0)	0.945	0.491	1.67	22.29	23.00	1.113

Right Side - Repeated	21350/2560	20M QPSK(1,0)	0.939	0.485	1.39	22.29	23.00	1.106
50%RB								
Front Side	21100/2535	20M QPSK(50,0)	0.102	0.054	0.21	21.27	22.00	0.121
Back Side	21100/2535	20M QPSK(50,0)	0.106	0.057	1.27	21.27	22.00	0.125
Right Side	21100/2535	20M QPSK(50,0)	0.759	0.395	0.02	21.27	22.00	0.898
Right Side - Repeated	21100/2535	20M QPSK(50,0)	0.751	0.390	1.41	21.27	22.00	0.888
Top Side	21100/2535	20M QPSK(50,0)	0.092	0.041	-0.31	21.27	22.00	0.109
Right Side	20850/2510	20M QPSK(50,0)	0.712	0.380	3.21	21.12	22.00	0.872
Right Side	21350/2560	20M QPSK(50,0)	0.703	0.375	-0.23	21.15	22.00	0.855
100%RB								
Right Side	21100/2535	20M QPSK(100,0)	0.602	0.321	0.28	21.24	22.00	0.717

NOTE: Hotspot SAR test results of LTE Band VII

10.1.6. SAR measurement Result of LTE Band XLI

Test Position of Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 10-g (W/Kg)
			1-g	10-g				
1RB								
Front Side	40620/2593	20M QPSK(1,0)	0.945	0.312	0.32	23.19	23.50	0.335
Back Side	40620/2593	20M QPSK(1,0)	0.956	0.320	1.47	23.19	23.50	0.344
Right Side	40620/2593	20M QPSK(1,0)	3.039	1.239	-0.63	23.19	23.50	1.331
Top Side	40620/2593	20M QPSK(1,0)	0.910	0.305	-0.17	23.19	23.50	0.328
50%RB								
Front Side	40620/2593	20M QPSK(50,0)	0.910	0.294	3.21	22.16	22.50	0.318
Back Side	40620/2593	20M QPSK(50,0)	0.921	0.301	0.25	22.16	22.50	0.326
Right Side	40620/2593	20M QPSK(50,0)	2.387	0.976	-0.54	22.16	22.50	1.055
Top Side	40620/2593	20M QPSK(50,0)	0.901	0.286	-3.52	22.16	22.50	0.309

NOTE: Extremity SAR test results of LTE Band XLI

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1-g (W/Kg)
			1-g	10-g				
1RB								
Front Side	40620/2593	20M QPSK(1,0)	0.110	0.031	0.25	23.19	23.50	0.118
Back Side	40620/2593	20M QPSK(1,0)	0.116	0.034	-3.14	23.19	23.50	0.125

Right Side	40620/2593	20M QPSK(1,0)	0.613	0.315	0.09	23.19	23.50	0.658
Top Side	40620/2593	20M QPSK(1,0)	0.102	0.027	2.51	23.19	23.50	0.110
50%RB								
Front Side	40620/2593	20M QPSK(50,0)	0.101	0.026	0.27	22.16	22.50	0.109
Back Side	40620/2593	20M QPSK(50,0)	0.103	0.028	3.14	22.16	22.50	0.111
Right Side	40620/2593	20M QPSK(50,0)	0.507	0.262	-0.83	22.16	22.50	0.548
Top Side	40620/2593	20M QPSK(50,0)	0.094	0.024	-1.84	22.16	22.50	0.102

NOTE: Hotspot SAR test results of LTE Band XLI

10.1.7. SAR measurement Result of WLAN 2.4G

Test Position of Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 10-g (W/Kg)
			1-g	10-g				
Front Side	6/2437	802.11 b	0.035	0.012	0.55	12.9	13.5	0.014
Back Side	6/2437	802.11 b	0.039	0.014	0.21	12.9	13.5	0.016
Right Side	6/2437	802.11 b	0.230	0.106	-2.97	12.9	13.5	0.122
Top Side	6/2437	802.11 b	0.030	0.010	1.48	12.9	13.5	0.011

NOTE: Extremity SAR test results of WLAN 2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1-g (W/Kg)
			1-g	10-g				
Front Side	6/2437	802.11 b	0.023	0.011	0.27	12.9	13.5	0.026
Back Side	6/2437	802.11 b	0.024	0.013	3.21	12.9	13.5	0.028
Right Side	6/2437	802.11 b	0.047	0.031	-4.01	12.9	13.5	0.054
Top Side	6/2437	802.11 b	0.020	0.010	-0.48	12.9	13.5	0.023

NOTE: Hotspot SAR test results of WLAN 2.4G

10.1.8. SAR measurement Result of WLAN 5.2G

Test Position of Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 10-g (W/Kg)
			1-g	10-g				
Front Side	40/5200	802.11 a	0.196	0.101	-2.09	10.8	11.5	0.119
Back Side	40/5200	802.11 a	0.203	0.112	0.31	10.8	11.5	0.132
Right Side	40/5200	802.11 a	0.469	0.156	-4.47	10.8	11.5	0.183
Top Side	40/5200	802.11 a	0.185	0.094	2.51	10.8	11.5	0.110

NOTE: Extremity SAR test results of WLAN 5.2G

10.1.9. SAR measurement Result of WLAN 5.8G

Test Position of Extremity with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 10-g (W/Kg)
			1-g	10-g				
Front Side	157/5785	802.11 a	0.100	0.085	-4.49	11.00	11.50	0.095
Back Side	157/5785	802.11 a	0.109	0.088	3.61	11.00	11.50	0.099
Right Side	157/5785	802.11 a	0.429	0.162	-0.87	11.00	11.50	0.182
Top Side	157/5785	802.11 a	0.091	0.081	0.27	11.00	11.50	0.091

NOTE: Extremity SAR test results of WLAN 5.8G

10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation $< 1.6\text{W/kg}$.
- 2) $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$ for 1-g SAR and $\text{SPLSR} \leq 0.10$ for 10-g SAR, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 2.4G			
Extremity	Front Side	0.686	0.014	0.700	N/A	N/A
	Back Side	0.700	0.016	0.716	N/A	N/A
	Right Side	2.235	0.122	2.356	N/A	N/A
	Top Side	0.668	0.011	0.679	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 2.4G			
Hotspot	Front Side	0.212	0.026	0.239	N/A	N/A
	Back Side	0.234	0.028	0.261	N/A	N/A
	Right Side	0.920	0.054	0.973	N/A	N/A
	Top Side	0.205	0.023	0.228	N/A	N/A

NOTE: Simultaneous Tx Combination of GSM850 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	WLAN 2.4G			
Extremity	Front Side	0.749	0.014	0.763	N/A	N/A
	Back Side	0.740	0.016	0.756	N/A	N/A

	Right Side	2.723	0.122	2.845	N/A	N/A
	Top Side	0.733	0.011	0.745	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	WLAN 2.4G			
Hotspot	Front Side	0.118	0.026	0.144	N/A	N/A
	Back Side	0.136	0.028	0.163	N/A	N/A
	Right Side	1.394	0.054	1.448	N/A	N/A
	Top Side	0.107	0.023	0.130	N/A	N/A

NOTE: Simultaneous Tx Combination of WCDMA Band V and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		CDMA2000 BC0	WLAN 2.4G			
Extremity	Front Side	0.312	0.014	0.326	N/A	N/A
	Back Side	0.097	0.016	0.114	N/A	N/A
	Right Side	0.148	0.122	0.269	N/A	N/A
	Top Side	N/A	0.011	0.011	N/A	N/A
	Bottom Side	0.306	N/A	0.306	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		CDMA2000 BC0	WLAN 2.4G			
Hotspot	Front Side	0.155	0.026	0.181	N/A	N/A
	Back Side	0.152	0.028	0.179	N/A	N/A
	Right Side	0.144	0.054	0.198	N/A	N/A
	Top Side	N/A	0.023	0.023	N/A	N/A
	Bottom Side	0.146	N/A	0.146	N/A	N/A

NOTE: Simultaneous Tx Combination of CDMA2000 BC0 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	WLAN 2.4G			
Extremity	Front Side	0.828	0.014	0.842	N/A	N/A
	Back Side	0.812	0.016	0.828	N/A	N/A
	Right Side	1.849	0.122	1.971	N/A	N/A
	Top Side	0.801	0.011	0.812	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	WLAN 2.4G			
Hotspot	Front Side	0.372	0.026	0.398	N/A	N/A
	Back Side	0.400	0.028	0.428	N/A	N/A
	Right Side	1.321	0.054	1.375	N/A	N/A

	Top Side	0.346	0.023	0.369	N/A	N/A
--	----------	-------	-------	-------	-----	-----

NOTE: Simultaneous Tx Combination of LTE Band V and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	WLAN 2.4G			
Extremity	Front Side	1.039	0.014	1.053	N/A	N/A
	Back Side	1.066	0.016	1.082	N/A	N/A
	Right Side	3.109	0.122	3.231	N/A	N/A
	Top Side	1.000	0.011	1.011	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	WLAN 2.4G			
Hotspot	Front Side	0.138	0.026	0.164	N/A	N/A
	Back Side	0.141	0.028	0.169	N/A	N/A
	Right Side	1.113	0.054	1.167	N/A	N/A
	Top Side	0.121	0.023	0.144	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band VII and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	WLAN 2.4G			
Extremity	Front Side	0.335	0.014	0.349	N/A	N/A
	Back Side	0.344	0.016	0.360	N/A	N/A
	Right Side	1.331	0.122	1.452	N/A	N/A
	Top Side	0.328	0.011	0.339	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	WLAN 2.4G			
Hotspot	Front Side	0.118	0.026	0.145	N/A	N/A
	Back Side	0.125	0.028	0.152	N/A	N/A
	Right Side	0.658	0.054	0.712	N/A	N/A
	Top Side	0.110	0.023	0.133	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band XLI and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	Bluetooth			
Extremity	Front Side	0.686	0.038	0.723	N/A	N/A
	Back Side	0.700	0.038	0.738	N/A	N/A
	Right Side	2.235	0.038	2.272	N/A	N/A
	Top Side	0.668	0.038	0.705	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	Bluetooth			
Hotspot	Front Side	0.212	0.047	0.259	N/A	N/A
	Back Side	0.234	0.047	0.281	N/A	N/A
	Right Side	0.920	0.047	0.967	N/A	N/A
	Top Side	0.205	0.047	0.252	N/A	N/A

NOTE: Simultaneous Tx Combination of GSM850 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	Bluetooth			
Extremity	Front Side	0.749	0.038	0.787	N/A	N/A
	Back Side	0.740	0.038	0.777	N/A	N/A
	Right Side	2.723	0.038	2.761	N/A	N/A
	Top Side	0.733	0.038	0.771	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	Bluetooth			
Hotspot	Front Side	0.118	0.047	0.165	N/A	N/A
	Back Side	0.136	0.047	0.183	N/A	N/A
	Right Side	1.394	0.047	1.441	N/A	N/A
	Top Side	0.107	0.047	0.154	N/A	N/A

NOTE: Simultaneous Tx Combination of WCDMA Band V and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		CDMA2000 BC0	Bluetooth			
Extremity	Front Side	0.312	0.038	0.349	N/A	N/A
	Back Side	0.097	0.038	0.135	N/A	N/A
	Right Side	0.148	0.038	0.185	N/A	N/A
	Top Side	N/A	0.038	0.038	N/A	N/A
	Bottom Side	0.306	N/A	0.306	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		CDMA2000 BC0	Bluetooth			
Hotspot	Front Side	0.155	0.047	0.202	N/A	N/A
	Back Side	0.152	0.047	0.199	N/A	N/A
	Right Side	0.144	0.047	0.191	N/A	N/A
	Top Side	N/A	0.047	0.047	N/A	N/A
	Bottom Side	0.146	N/A	0.146	N/A	N/A

NOTE: Simultaneous Tx Combination of CDMA2000 BC0 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	Bluetooth			
Extremity	Front Side	0.828	0.038	0.866	N/A	N/A
	Back Side	0.812	0.038	0.850	N/A	N/A
	Right Side	1.849	0.038	1.887	N/A	N/A
	Top Side	0.801	0.038	0.838	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	Bluetooth			
Hotspot	Front Side	0.372	0.047	0.419	N/A	N/A
	Back Side	0.400	0.047	0.447	N/A	N/A
	Right Side	1.321	0.047	1.368	N/A	N/A
	Top Side	0.346	0.047	0.393	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band V and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	Bluetooth			
Extremity	Front Side	1.039	0.038	1.076	N/A	N/A
	Back Side	1.066	0.038	1.104	N/A	N/A
	Right Side	3.109	0.038	3.147	N/A	N/A
	Top Side	1.000	0.038	1.037	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	Bluetooth			
Hotspot	Front Side	0.138	0.047	0.185	N/A	N/A
	Back Side	0.141	0.047	0.188	N/A	N/A
	Right Side	1.113	0.047	1.160	N/A	N/A
	Top Side	0.121	0.047	0.168	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band VII and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	Bluetooth			
Extremity	Front Side	0.335	0.038	0.373	N/A	N/A
	Back Side	0.344	0.038	0.381	N/A	N/A
	Right Side	1.331	0.038	1.368	N/A	N/A
	Top Side	0.328	0.038	0.365	N/A	N/A
Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	Bluetooth			

Hotspot	Front Side	0.118	0.047	0.165	N/A	N/A
	Back Side	0.125	0.047	0.172	N/A	N/A
	Right Side	0.658	0.047	0.705	N/A	N/A
	Top Side	0.110	0.047	0.157	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band XLI and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.2G			
Extremity	Front Side	0.686	0.119	0.805	N/A	N/A
	Back Side	0.700	0.132	0.832	N/A	N/A
	Right Side	2.235	0.183	2.418	N/A	N/A
	Top Side	0.668	0.110	0.778	N/A	N/A

NOTE: Simultaneous Tx Combination of GSM850 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	WLAN 5.2G			
Extremity	Front Side	0.749	0.119	0.868	N/A	N/A
	Back Side	0.740	0.132	0.871	N/A	N/A
	Right Side	2.723	0.183	2.907	N/A	N/A
	Top Side	0.733	0.110	0.844	N/A	N/A

NOTE: Simultaneous Tx Combination of WCDMA Band V and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		CDMA2000 BC0	WLAN 5.2G			
Extremity	Front Side	0.312	0.119	0.430	N/A	N/A
	Back Side	0.097	0.132	0.229	N/A	N/A
	Right Side	0.148	0.183	0.331	N/A	N/A
	Top Side	N/A	0.110	0.110	N/A	N/A
	Bottom Side	0.306	N/A	0.306	N/A	N/A

NOTE: Simultaneous Tx Combination of CDMA2000 BC0 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	WLAN 5.2G			
Extremity	Front Side	0.828	0.119	0.947	N/A	N/A
	Back Side	0.812	0.132	0.944	N/A	N/A
	Right Side	1.849	0.183	2.033	N/A	N/A
	Top Side	0.801	0.110	0.911	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band V and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	WLAN 5.2G			
Extremity	Front Side	1.039	0.119	1.157	N/A	N/A
	Back Side	1.066	0.132	1.198	N/A	N/A
	Right Side	3.109	0.183	3.292	N/A	N/A
	Top Side	1.000	0.110	1.110	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band VII and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	WLAN 5.2G			
Extremity	Front Side	0.335	0.119	0.454	N/A	N/A
	Back Side	0.344	0.132	0.475	N/A	N/A
	Right Side	1.331	0.183	1.514	N/A	N/A
	Top Side	0.328	0.110	0.438	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band XLI and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.8G			
Extremity	Front Side	0.686	0.095	0.781	N/A	N/A
	Back Side	0.700	0.099	0.799	N/A	N/A
	Right Side	2.235	0.182	2.416	N/A	N/A
	Top Side	0.668	0.091	0.759	N/A	N/A

NOTE: Simultaneous Tx Combination of GSM850 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	WLAN 5.8G			
Extremity	Front Side	0.749	0.095	0.844	N/A	N/A
	Back Side	0.740	0.099	0.838	N/A	N/A
	Right Side	2.723	0.182	2.905	N/A	N/A
	Top Side	0.733	0.091	0.824	N/A	N/A

NOTE: Simultaneous Tx Combination of WCDMA Band V and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		CDMA2000 BC0	WLAN 5.8G			
Extremity	Front Side	0.312	0.095	0.407	N/A	N/A
	Back Side	0.097	0.099	0.196	N/A	N/A
	Right Side	0.148	0.182	0.330	N/A	N/A

	Top Side	N/A	0.091	0.091	N/A	N/A
	Bottom Side	0.306	N/A	0.306	N/A	N/A

NOTE: Simultaneous Tx Combination of CDMA2000 BC0 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	WLAN 5.8G			
Extremity	Front Side	0.828	0.095	0.923	N/A	N/A
	Back Side	0.812	0.099	0.911	N/A	N/A
	Right Side	1.849	0.182	2.031	N/A	N/A
	Top Side	0.801	0.091	0.892	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band V and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	WLAN 5.8G			
Extremity	Front Side	1.039	0.095	1.134	N/A	N/A
	Back Side	1.066	0.099	1.165	N/A	N/A
	Right Side	3.109	0.182	3.291	N/A	N/A
	Top Side	1.000	0.091	1.091	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band VII and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 10-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	WLAN 5.8G			
Extremity	Front Side	0.335	0.095	0.430	N/A	N/A
	Back Side	0.344	0.099	0.443	N/A	N/A
	Right Side	1.331	0.182	1.513	N/A	N/A
	Top Side	0.328	0.091	0.419	N/A	N/A

NOTE: Simultaneous Tx Combination of LTE Band XLI and WLAN 5.8G.

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - SID835 - Body
MEASUREMENT 2 System Performance Check - SID2450 - Body
MEASUREMENT 3 System Performance Check - SID2600 - Body
MEASUREMENT 4 System Performance Check - SID5200 - Body
MEASUREMENT 5 System Performance Check - SID5800 - Body

MEASUREMENT 1


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW835</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	54.829426
Relative permittivity (imaginary part)	21.593465
Conductivity (S/m)	1.001594
Variation (%)	-0.200000

SURFACE SAR

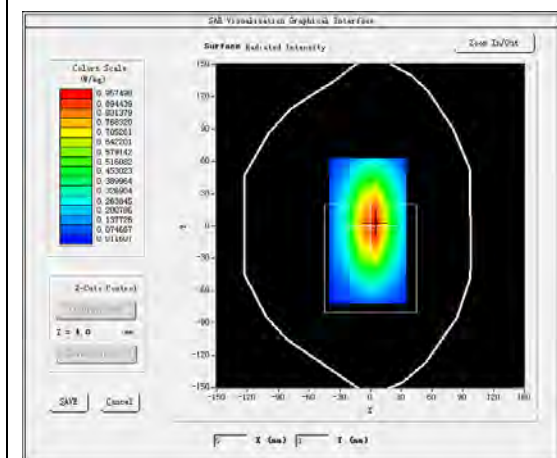



VOLUME SAR

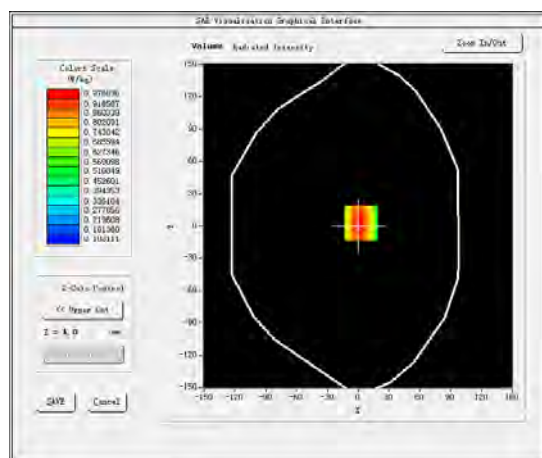

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.32 W/kg

SAR 10g (W/Kg)	0.627457
SAR 1g (W/Kg)	0.945698

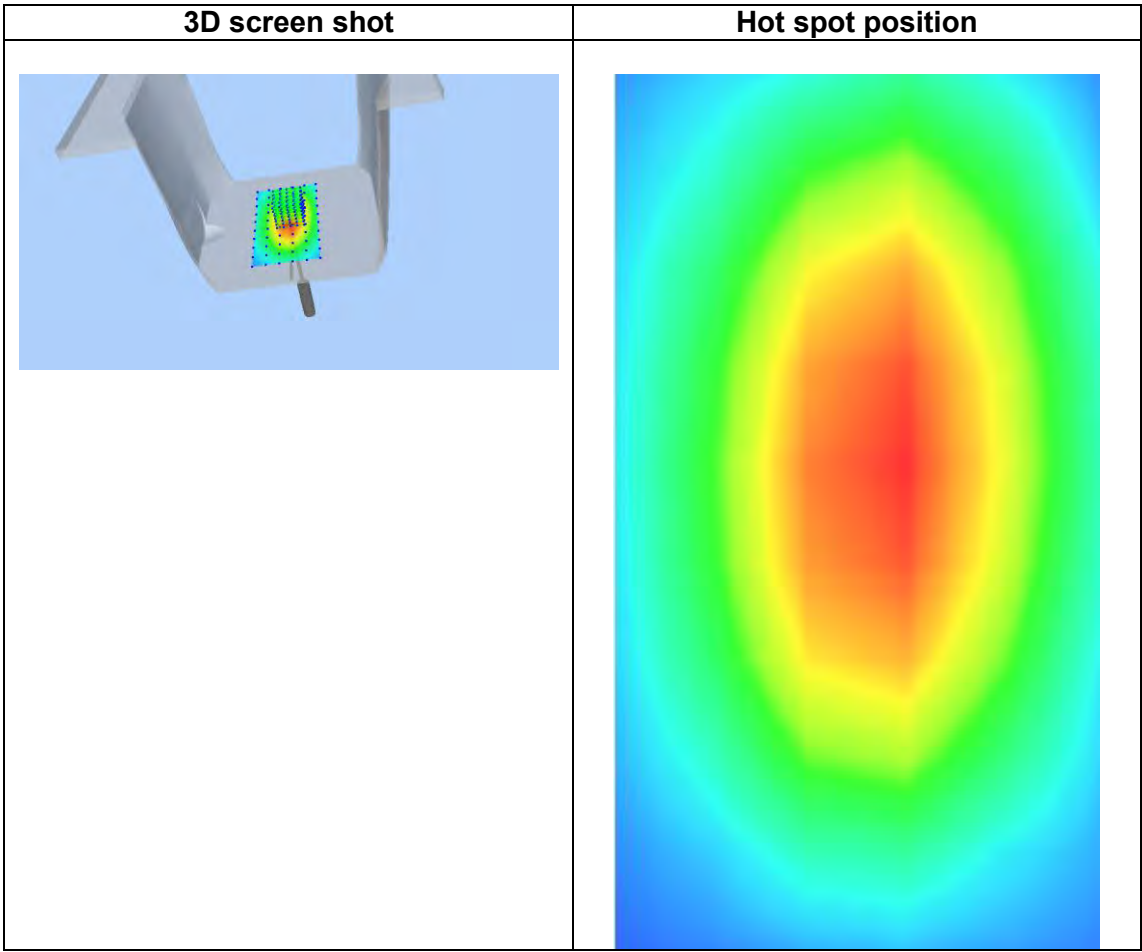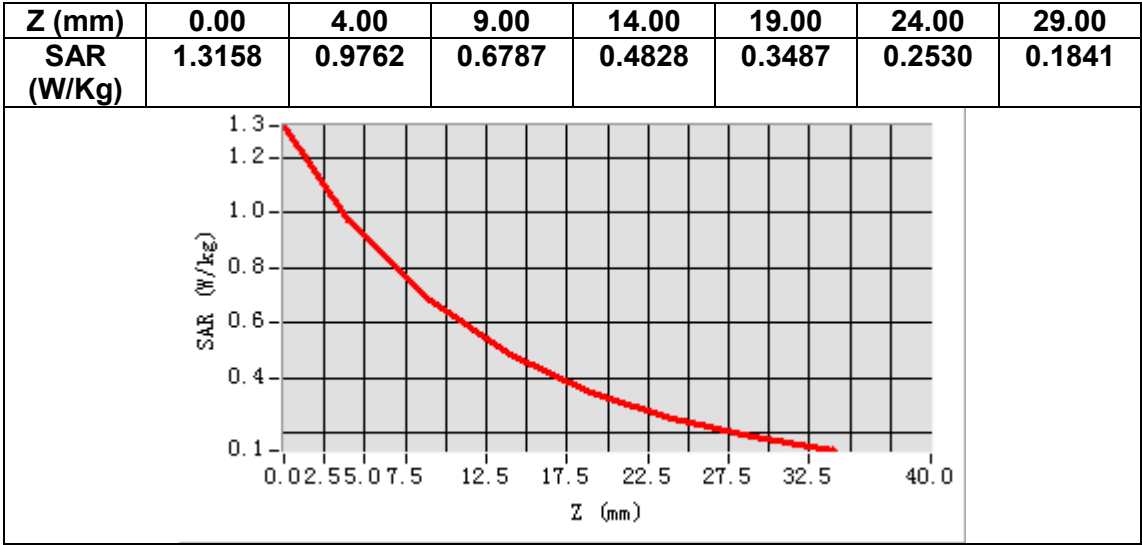

MEASUREMENT 2


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.674097
Relative permittivity (imaginary part)	14.610933
Conductivity (S/m)	1.986738
Variation (%)	2.670000

SURFACE SAR

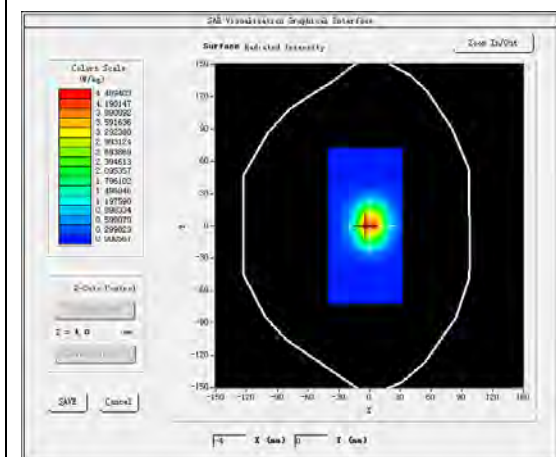



VOLUME SAR

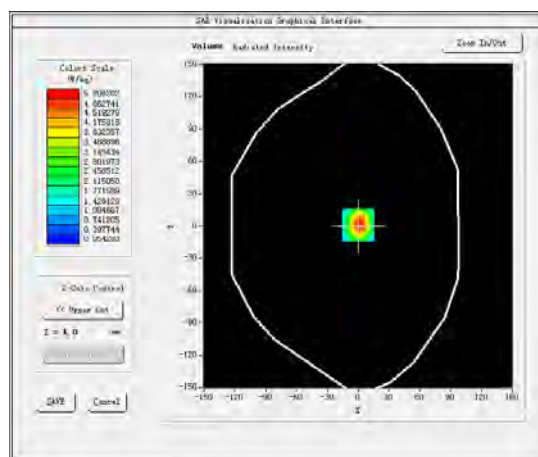

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.46 W/kg

SAR 10g (W/Kg)	2.332246
SAR 1g (W/Kg)	4.848431

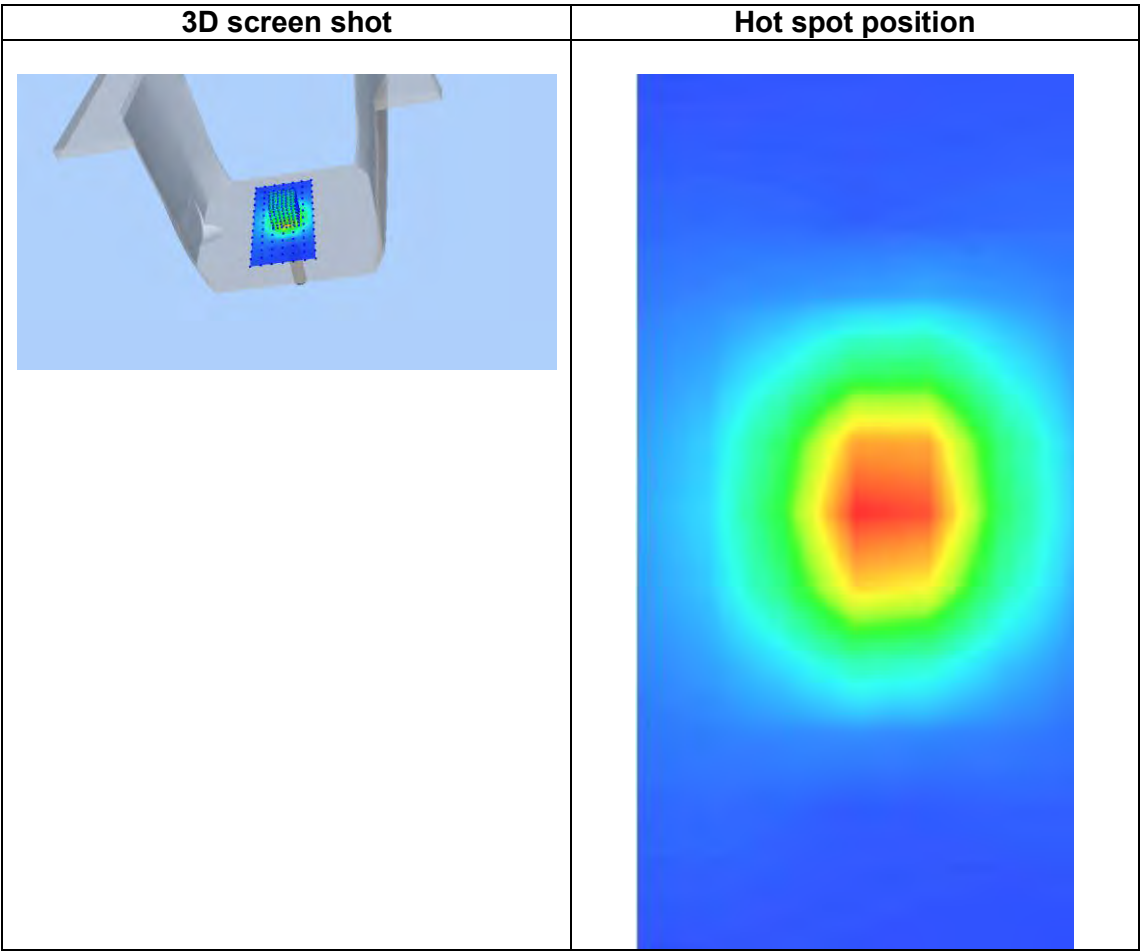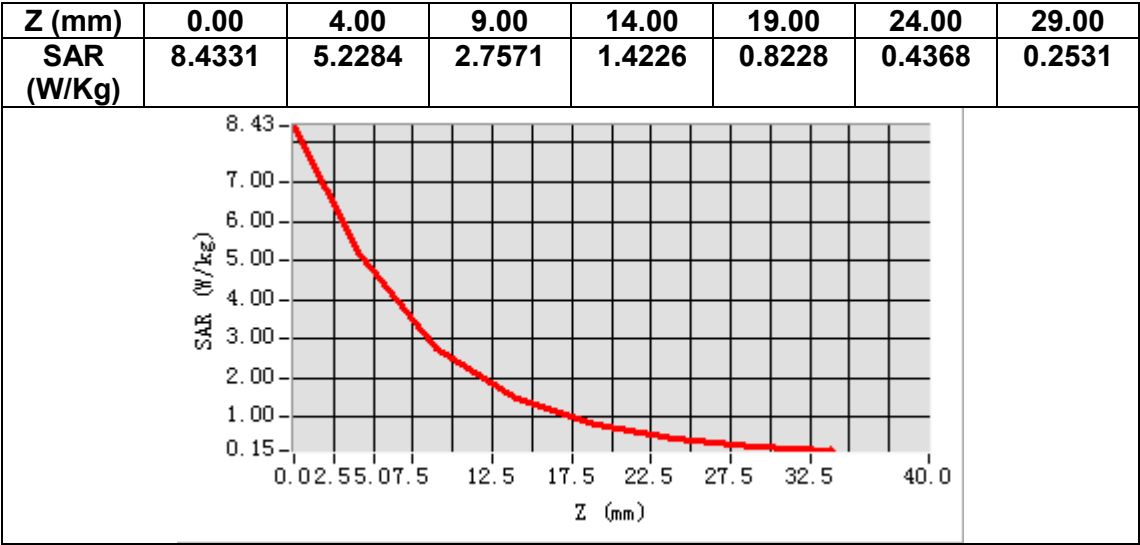

MEASUREMENT 3


A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW2600</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	53.391712
Relative permittivity (imaginary part)	15.132559
Conductivity (S/m)	2.191408
Variation (%)	0.040000

SURFACE SAR

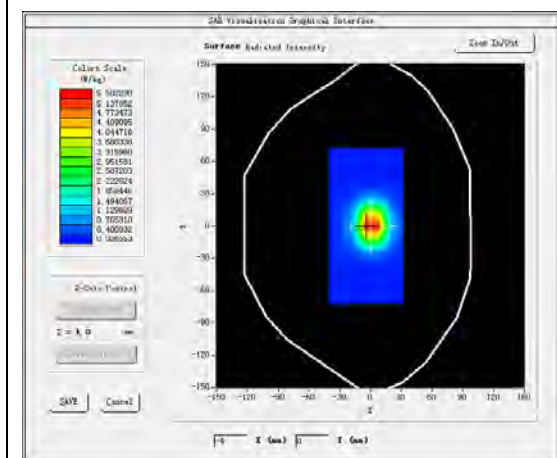



VOLUME SAR

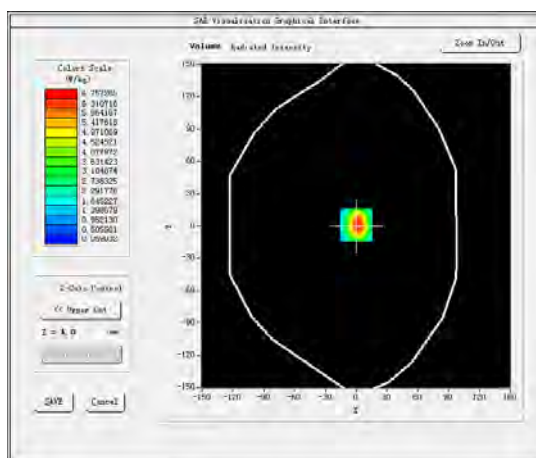

Maximum location: X=0.00, Y=1.00

SAR Peak: 12.00 W/kg

SAR 10g (W/Kg)	2.416211
SAR 1g (W/Kg)	5.501326

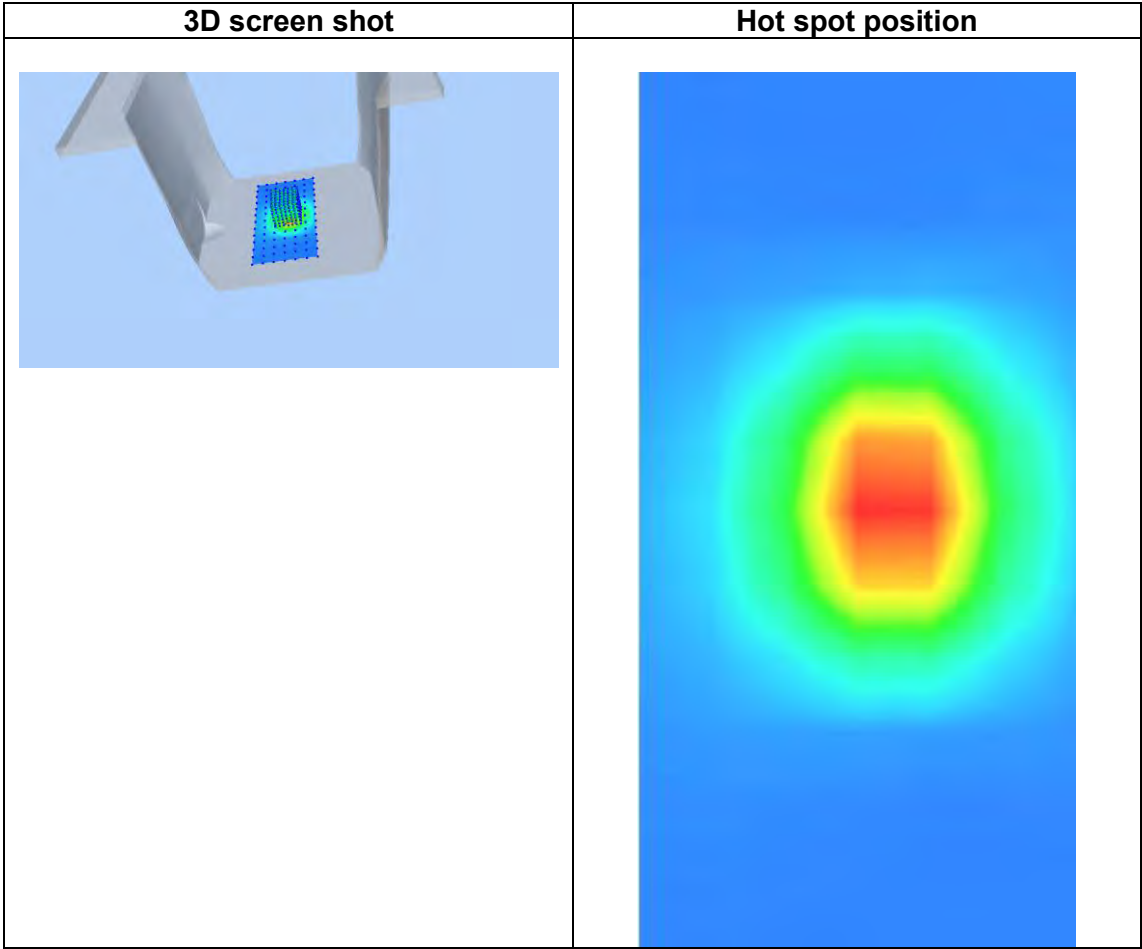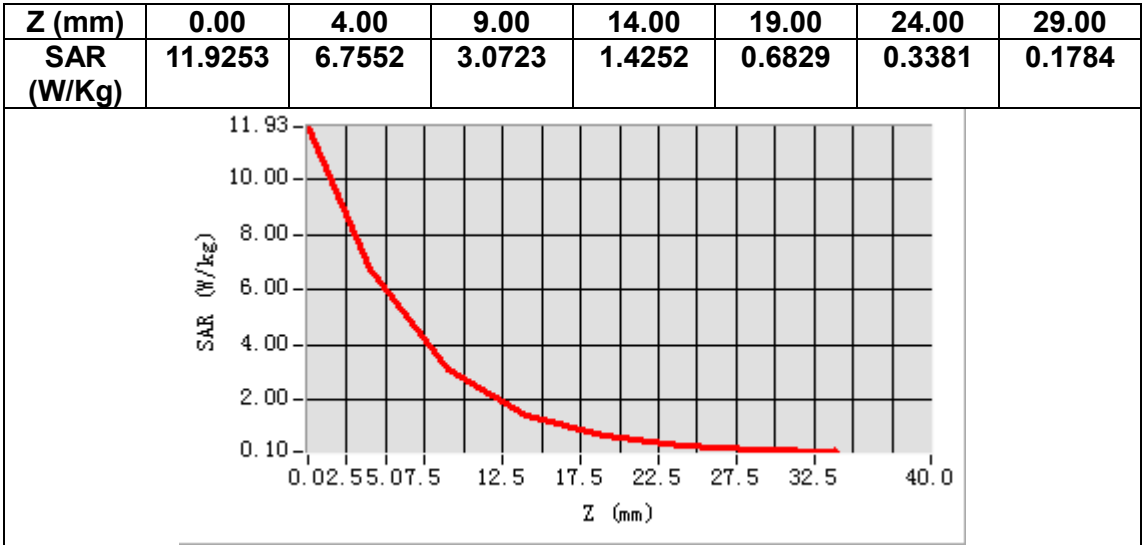

MEASUREMENT 4


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	49.954251
Relative permittivity (imaginary part)	18.204510
Conductivity (S/m)	5.263375
Variation (%)	-0.590000

SURFACE SAR

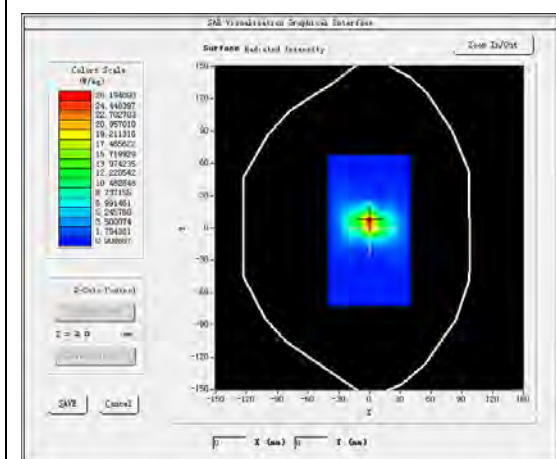



VOLUME SAR

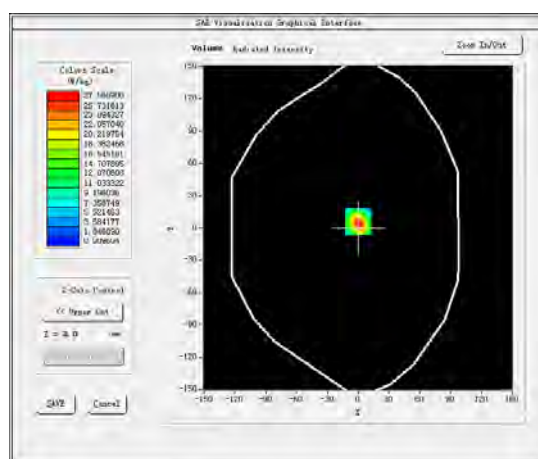

Maximum location: X=0.00, Y=6.00

SAR Peak: 49.61 W/kg

SAR 10g (W/Kg)	5.428463
SAR 1g (W/Kg)	15.498104

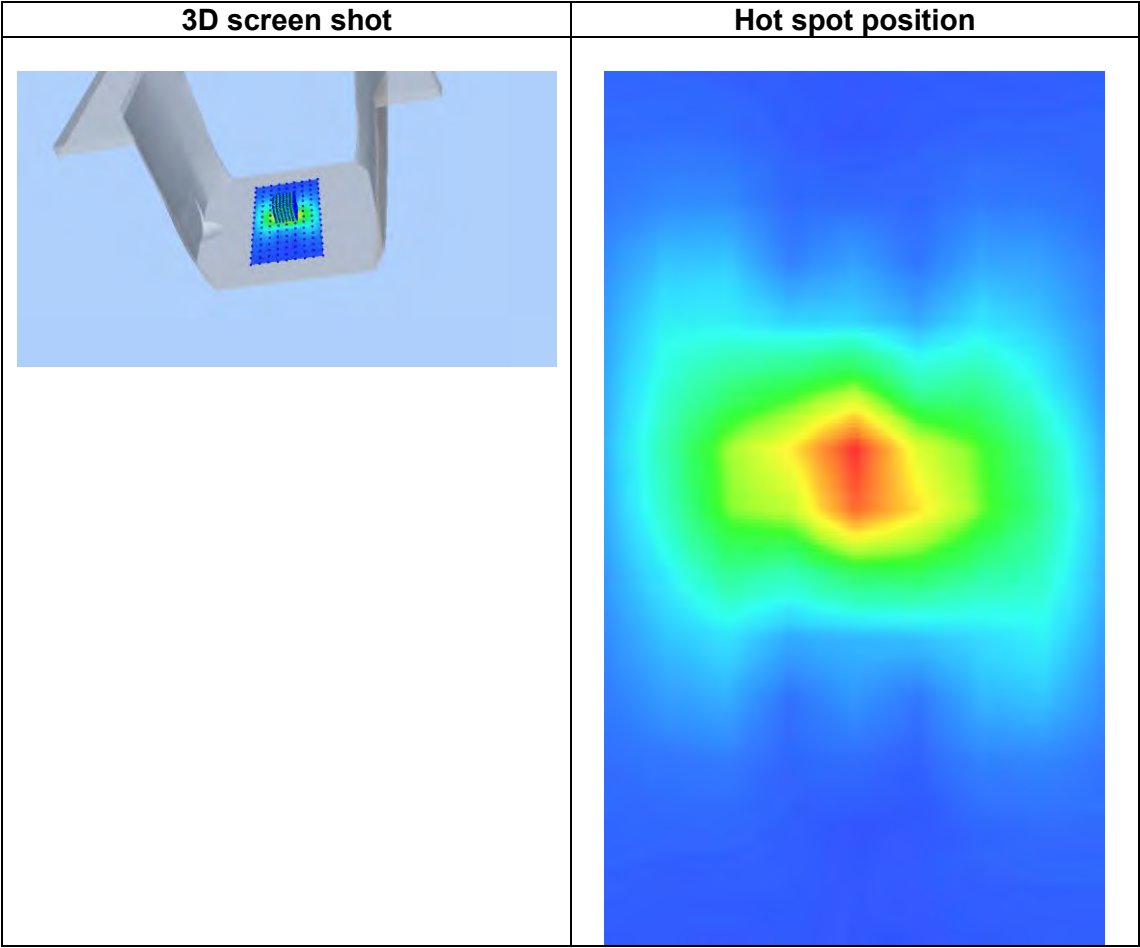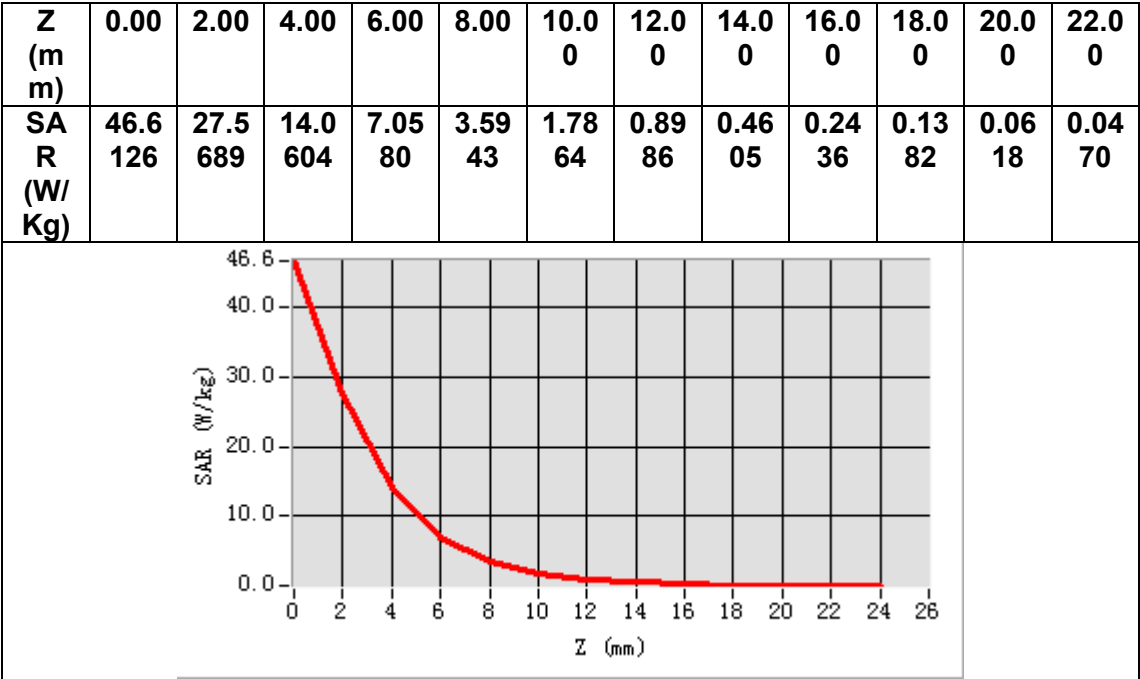

MEASUREMENT 5


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	48.635861
Relative permittivity (imaginary part)	18.738841
Conductivity (S/m)	6.044222
Variation (%)	-0.450000

SURFACE SAR

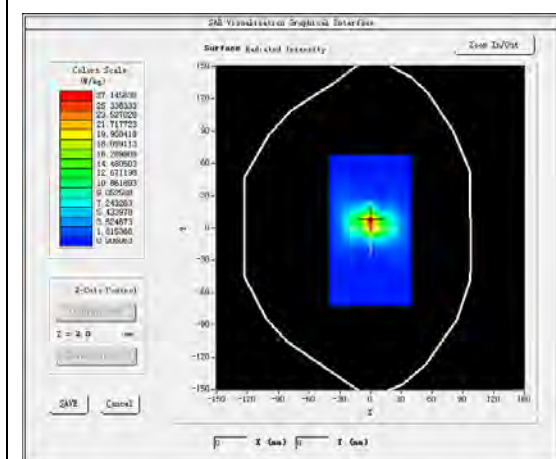



VOLUME SAR

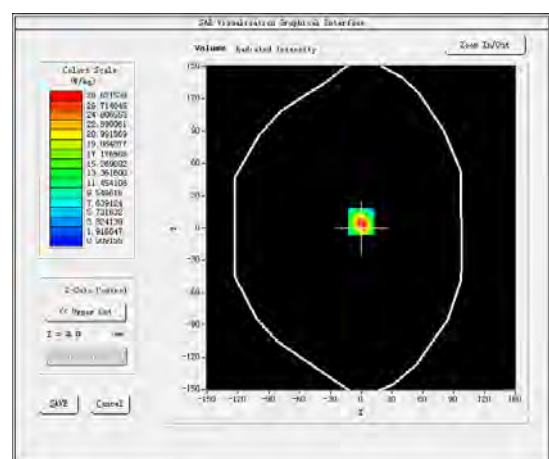

Maximum location: X=0.00, Y=6.00

SAR Peak: 51.30 W/kg

SAR 10g (W/Kg)	5.837744
SAR 1g (W/Kg)	16.799757

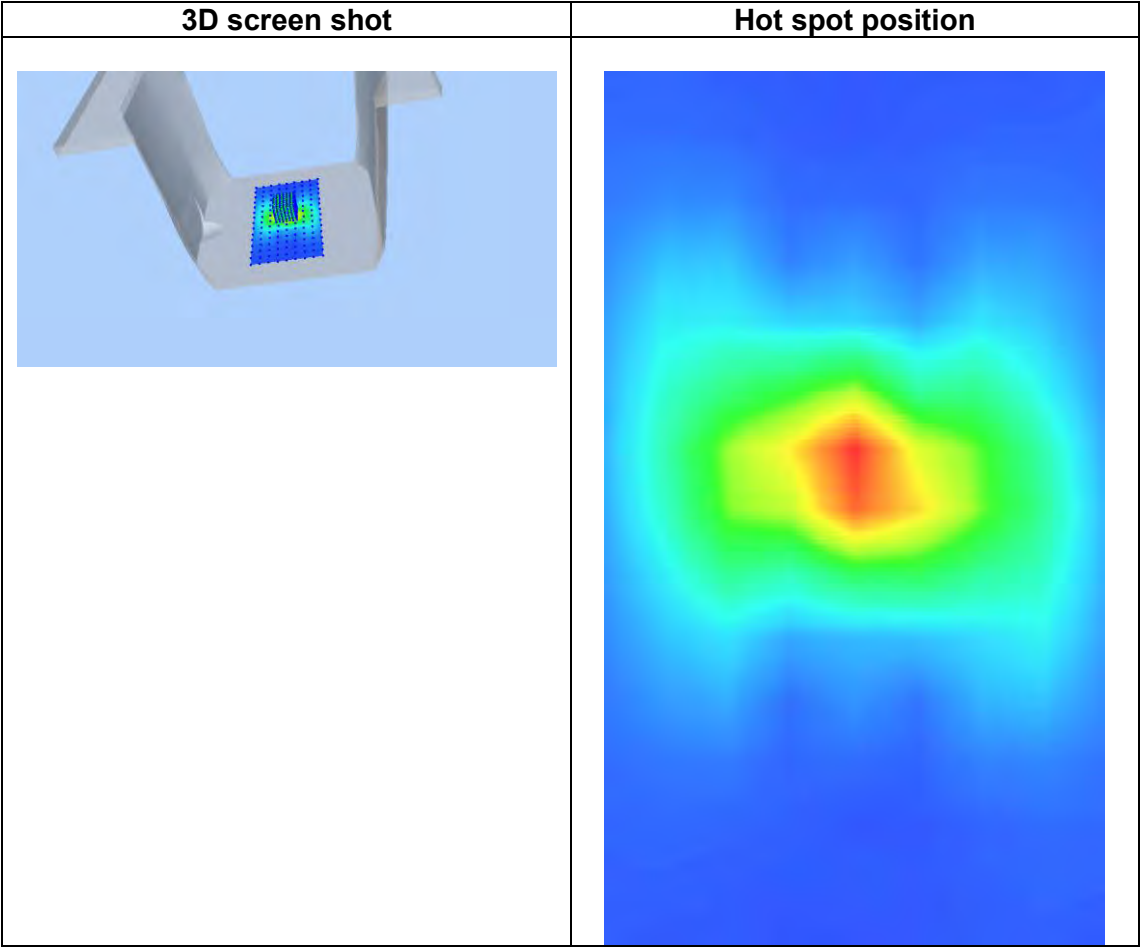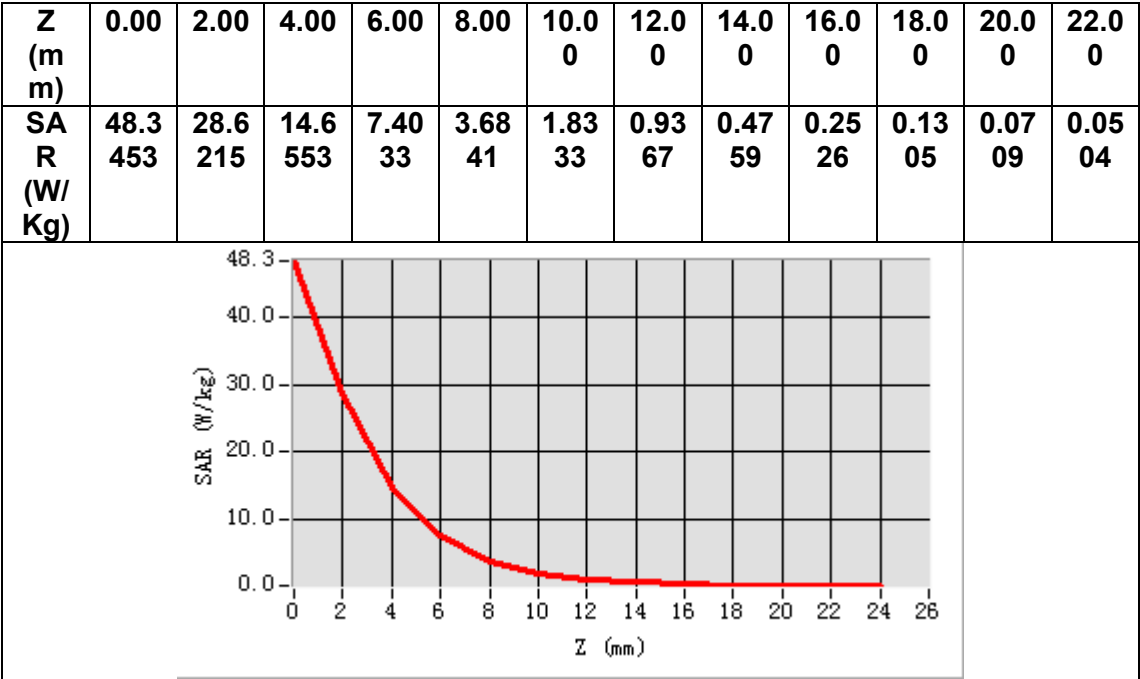

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Extremity
MEASUREMENT 2 GSM 850 Hotspot
MEASUREMENT 3 WCDMA Band V Extremity
MEASUREMENT 4 WCDMA Band V Hotspot
MEASUREMENT 5 CDMA2000 BC0 Extremity
MEASUREMENT 6 CDMA2000 BC0 Hotspot
MEASUREMENT 7 WLAN 5.2G Extremity
MEASUREMENT 8 WLAN 5.2G Hotspot
MEASUREMENT 9 WLAN 5.8G Extremity
MEASUREMENT 10 WLAN 5.8G Hotspot
MEASUREMENT 11 WLAN 2.4G Extremity
MEASUREMENT 12 WLAN 2.4G Hotspot
MEASUREMENT 13 LTE Band V Extremity
MEASUREMENT 14 LTE Band V Hotspot
MEASUREMENT 15 LTE Band VII Extremity
MEASUREMENT 16 LTE Band VII Hotspot
MEASUREMENT 17 LTE Band XLI Extremity
MEASUREMENT 18 LTE Band XLI Hotspot

MEASUREMENT 1


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.839581
Relative permittivity (imaginary part)	21.572741
Conductivity (S/m)	1.002413
Variation (%)	-3.630000

SURFACE SAR

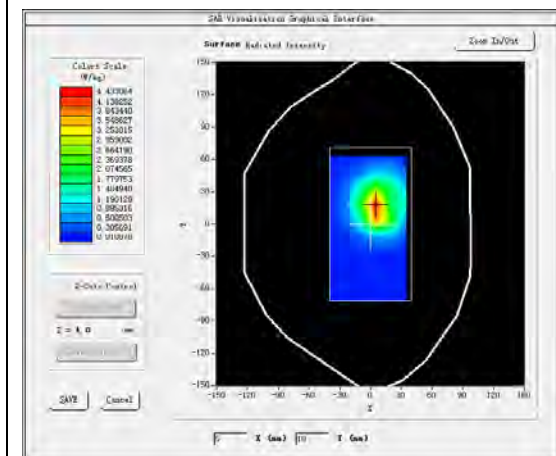



VOLUME SAR

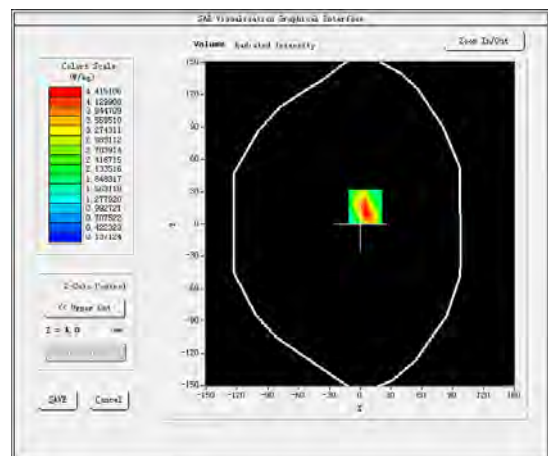

Maximum location: X=5.00, Y=16.00

SAR Peak: 7.41 W/kg

SAR 10g (W/Kg)	2.208916
SAR 1g (W/Kg)	4.327326

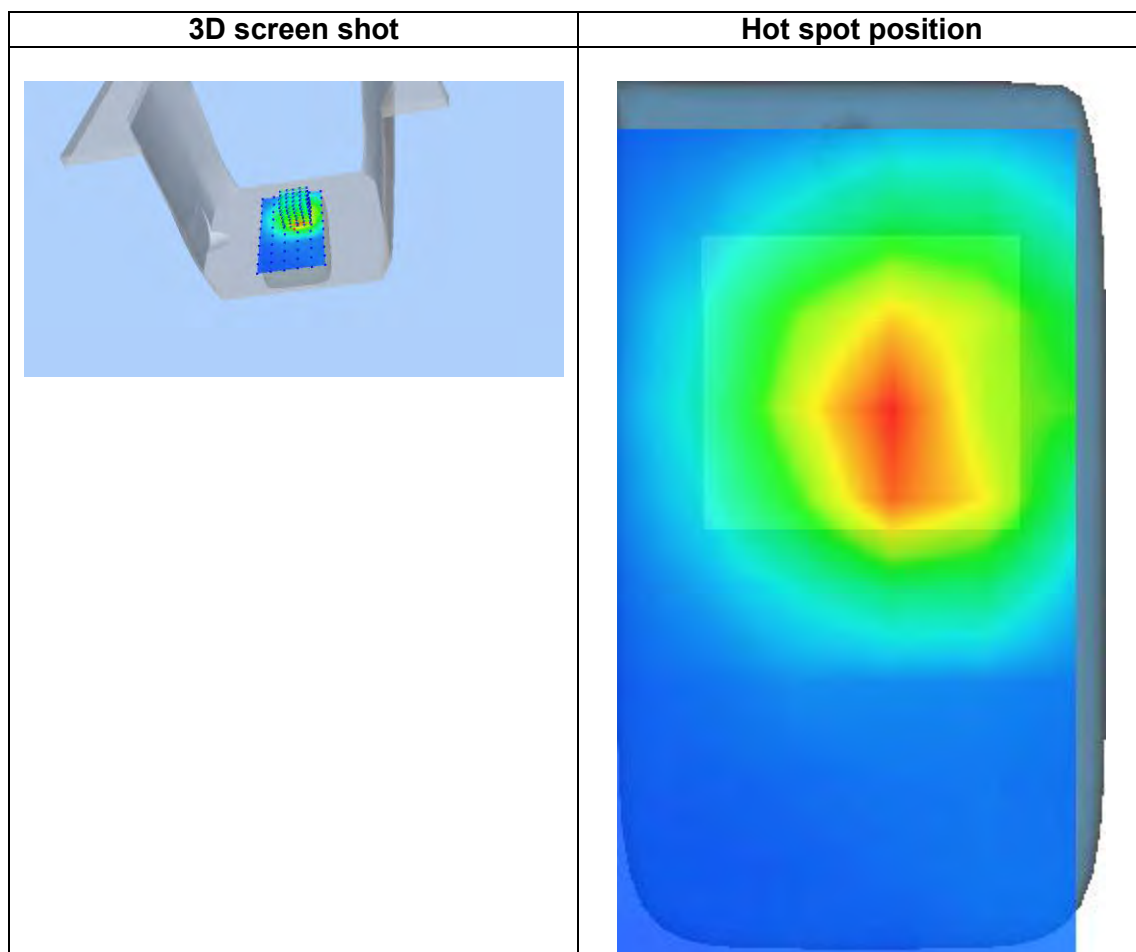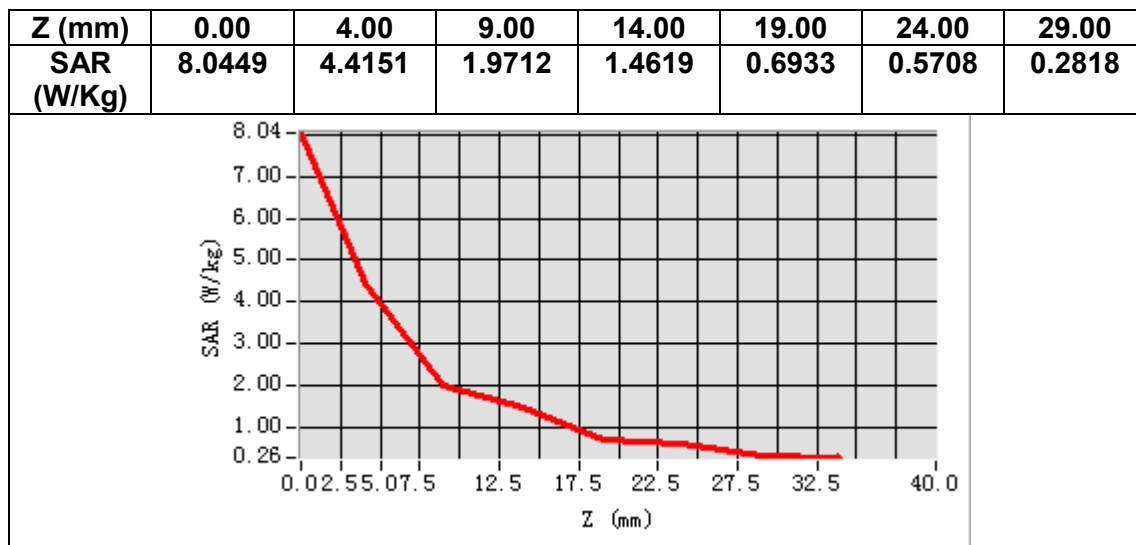

MEASUREMENT 2


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>GSM850</u>
Channels	<u>Middle</u>
Signal	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.839581
Relative permittivity (imaginary part)	21.572741
Conductivity (S/m)	1.002413
Variation (%)	0.960000

SURFACE SAR

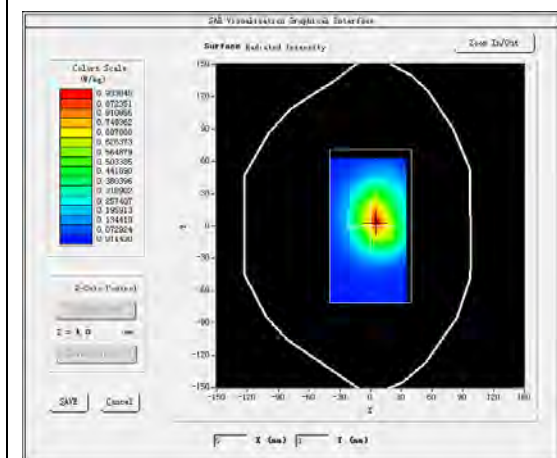



VOLUME SAR

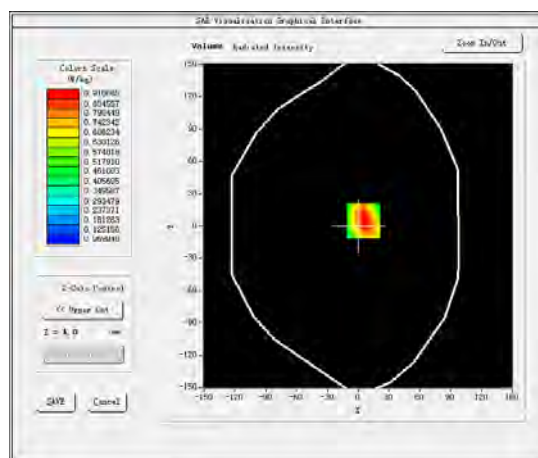

Maximum location: X=5.00, Y=5.00

SAR Peak: 1.28 W/kg

SAR 10g (W/Kg)	0.569081
SAR 1g (W/Kg)	0.908716

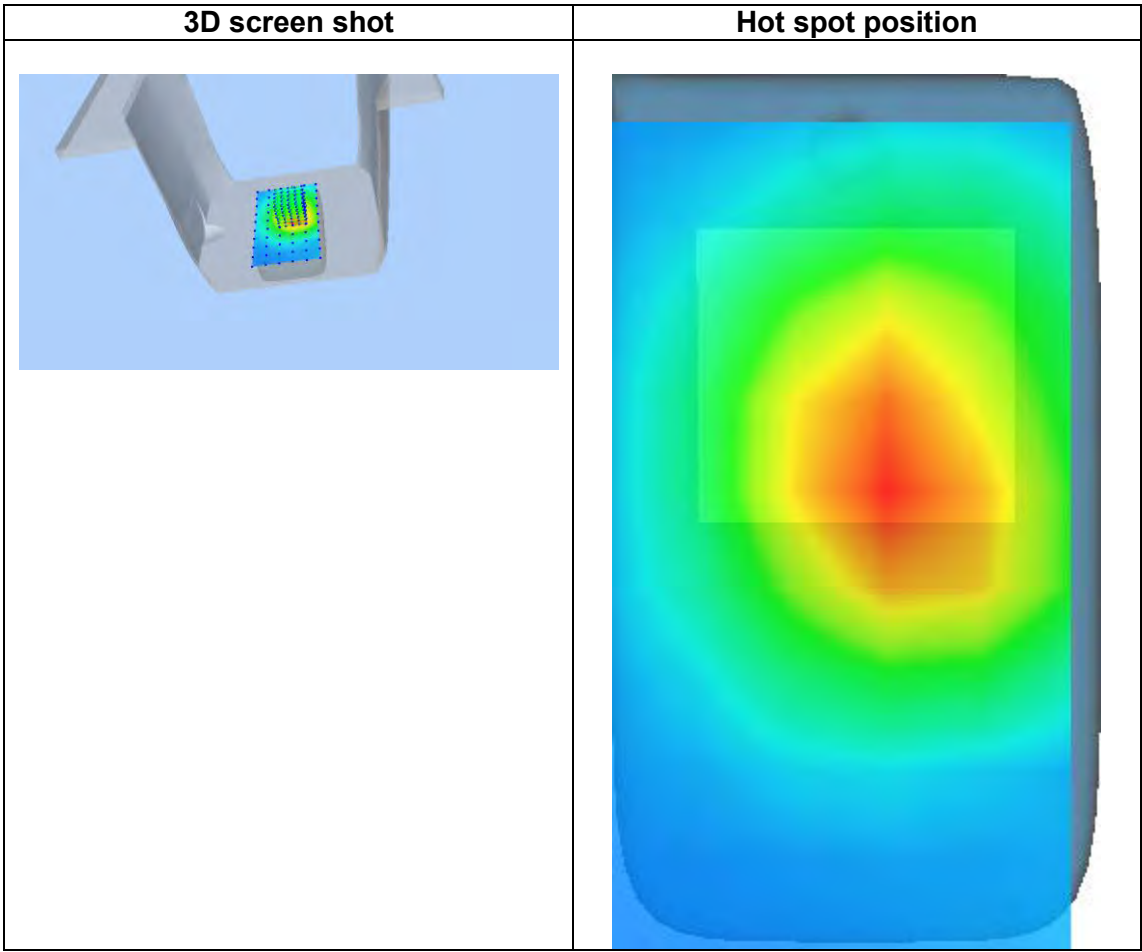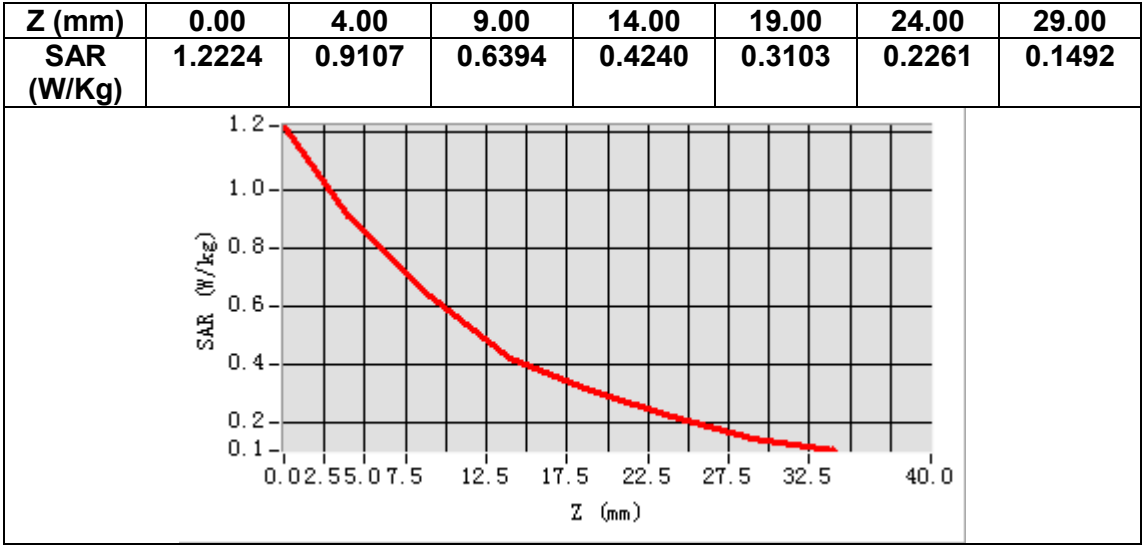

MEASUREMENT 3


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>Band5_WCDMA850</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400024
Relative permittivity (real part)	54.839581
Relative permittivity (imaginary part)	21.572741
Conductivity (S/m)	1.002413
Variation (%)	-0.050000

SURFACE SAR

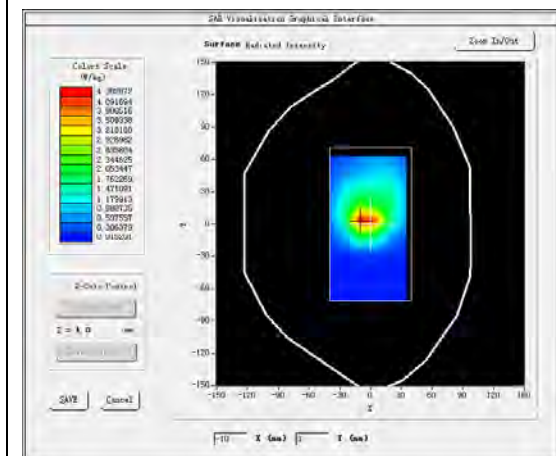



VOLUME SAR

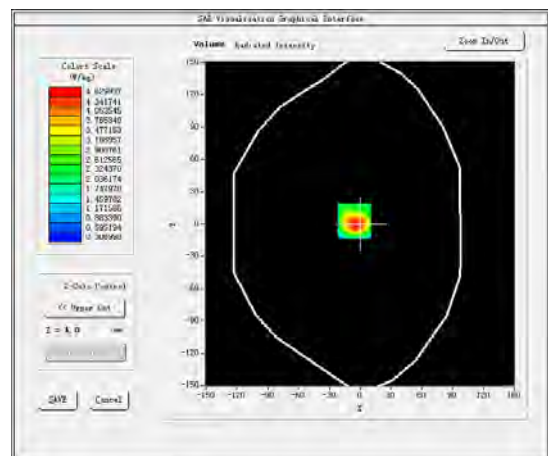

Maximum location: X=-6.00, Y=3.00

SAR Peak: 7.63 W/kg

SAR 10g (W/Kg)	2.583085
SAR 1g (W/Kg)	4.774702

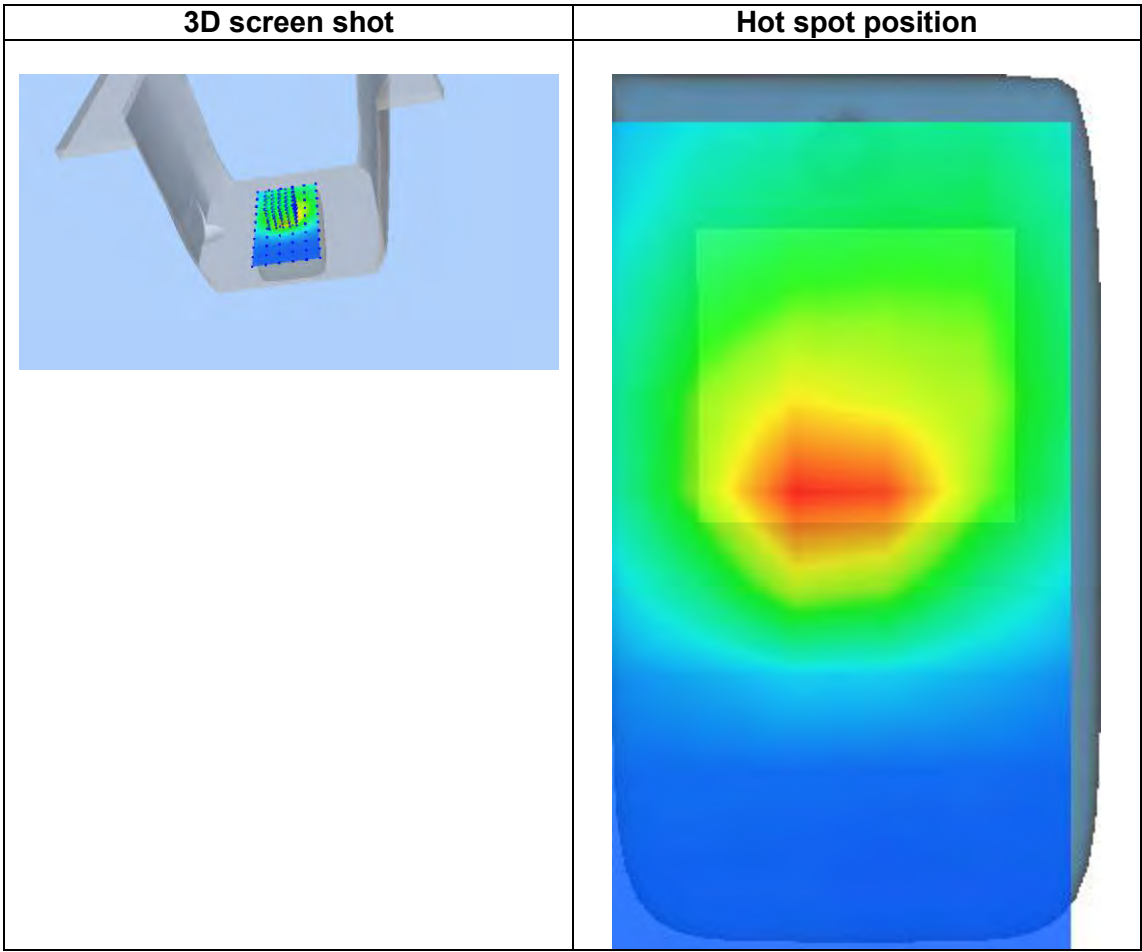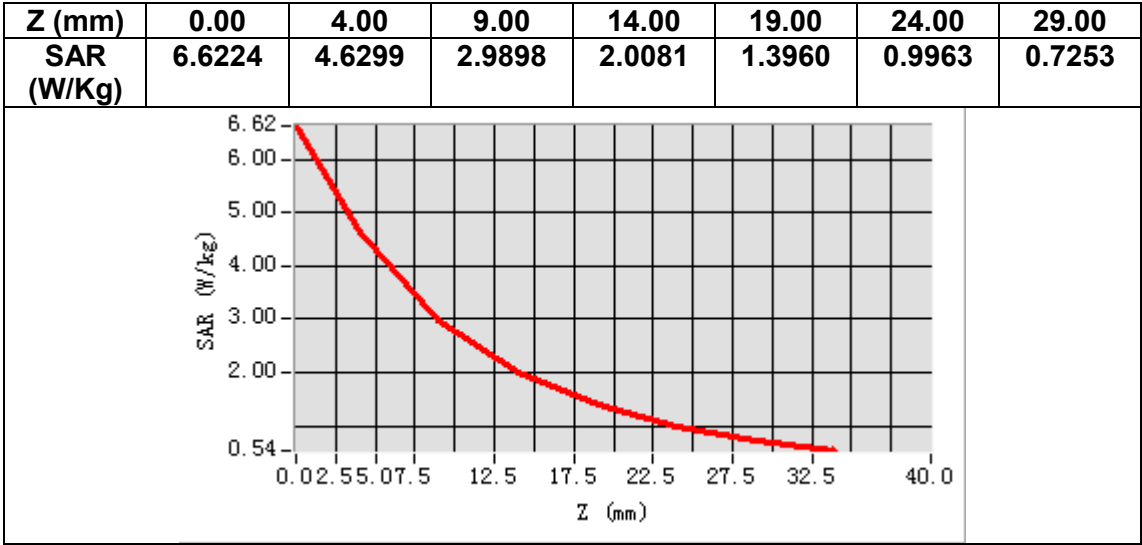

MEASUREMENT 4


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>Band5_WCDMA850</u>
Channels	<u>High</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative permittivity (real part)	54.796879
Relative permittivity (imaginary part)	21.595020
Conductivity (S/m)	1.015686
Variation (%)	-4.850000

SURFACE SAR

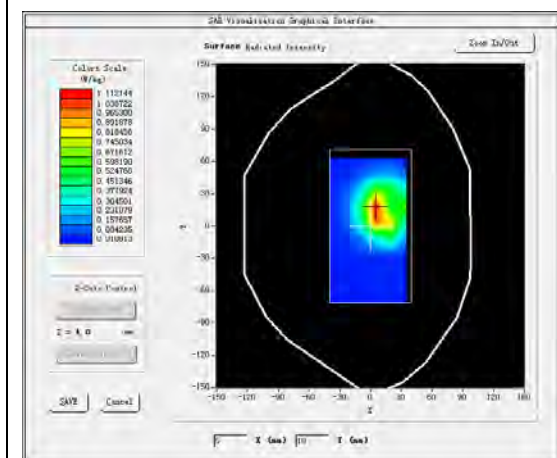



VOLUME SAR

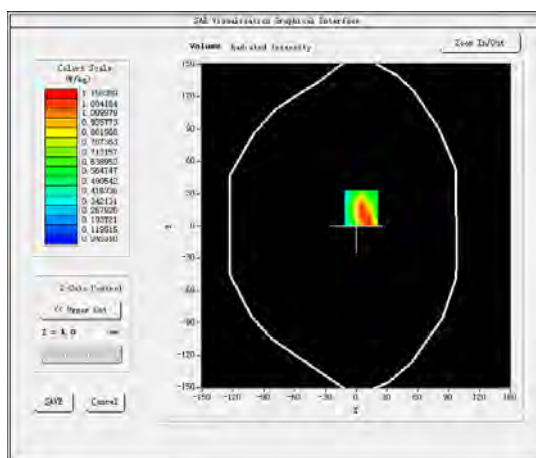

Maximum location: X=5.00, Y=17.00

SAR Peak: 1.81 W/kg

SAR 10g (W/Kg)	0.801290
SAR 1g (W/Kg)	1.321942

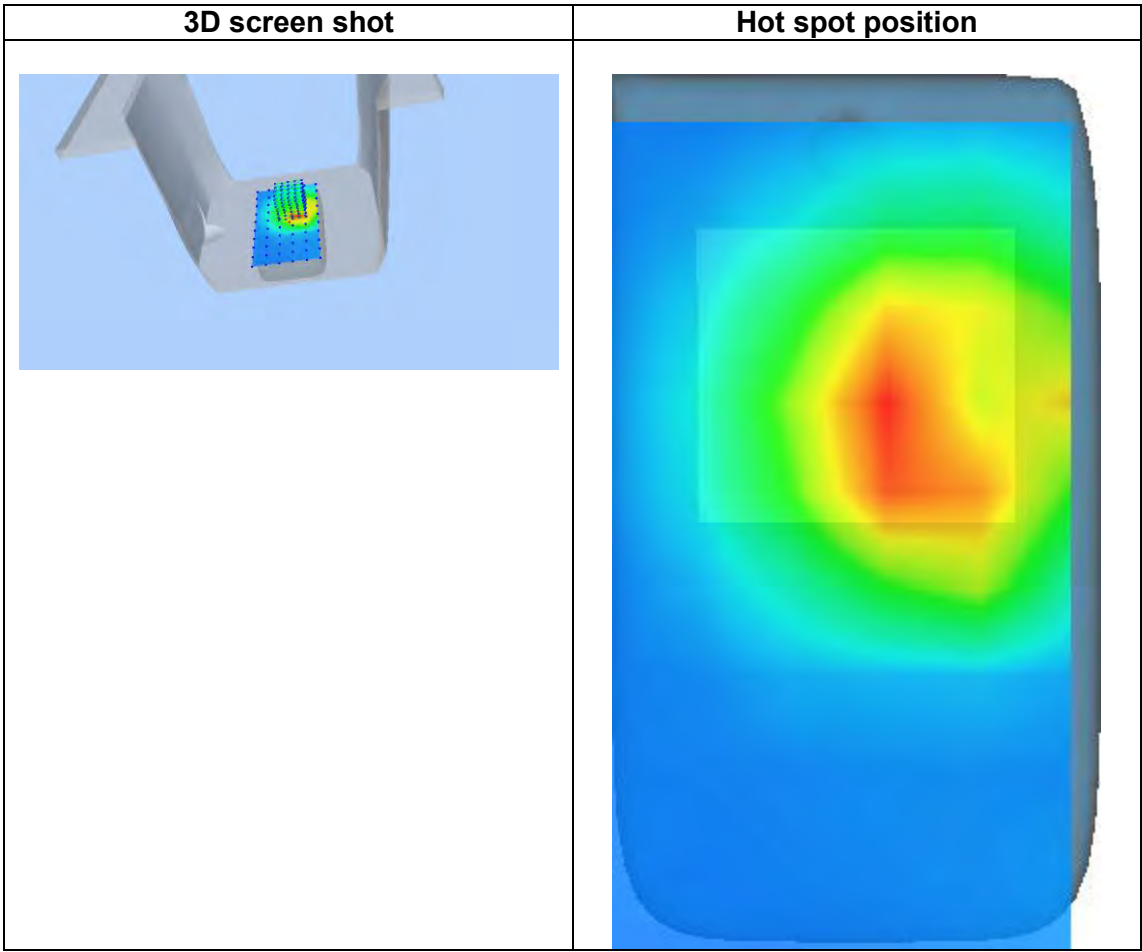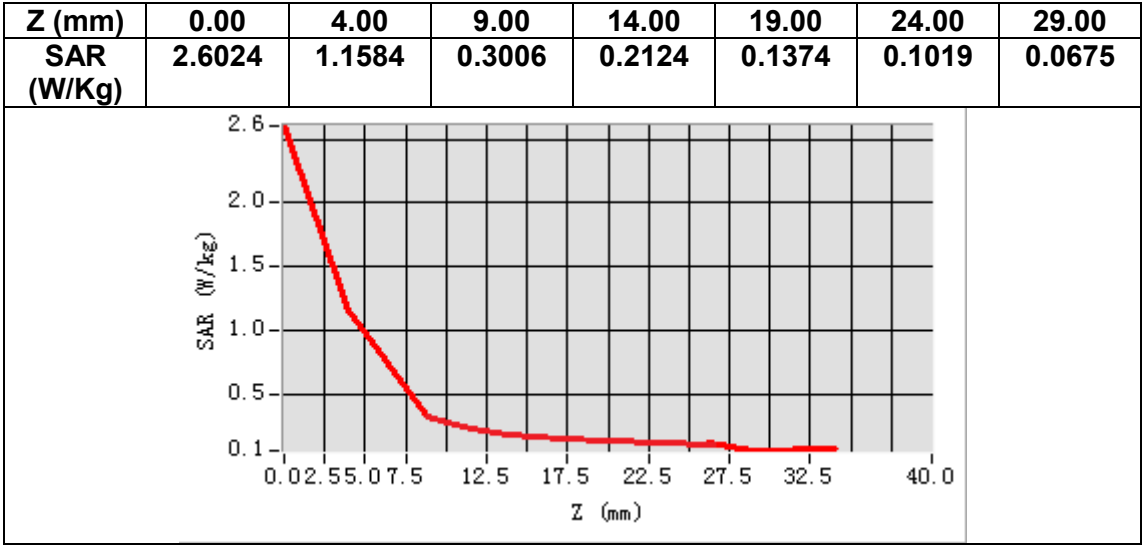

MEASUREMENT 5


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>BC0 US Cellular</u>
Channels	<u>Middle</u>
Signal	<u>CDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	54.844284
Relative permittivity (imaginary part)	21.565851
Conductivity (S/m)	1.002237
Variation (%)	-0.230000

SURFACE SAR

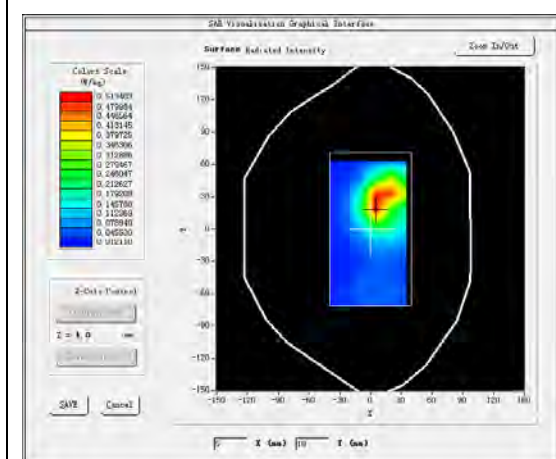



VOLUME SAR

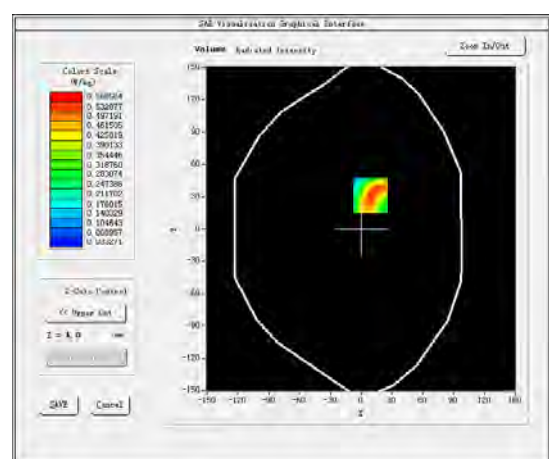

Maximum location: X=9.00, Y=31.00

SAR Peak: 0.93 W/kg

SAR 10g (W/Kg)	0.303733
SAR 1g (W/Kg)	0.542404

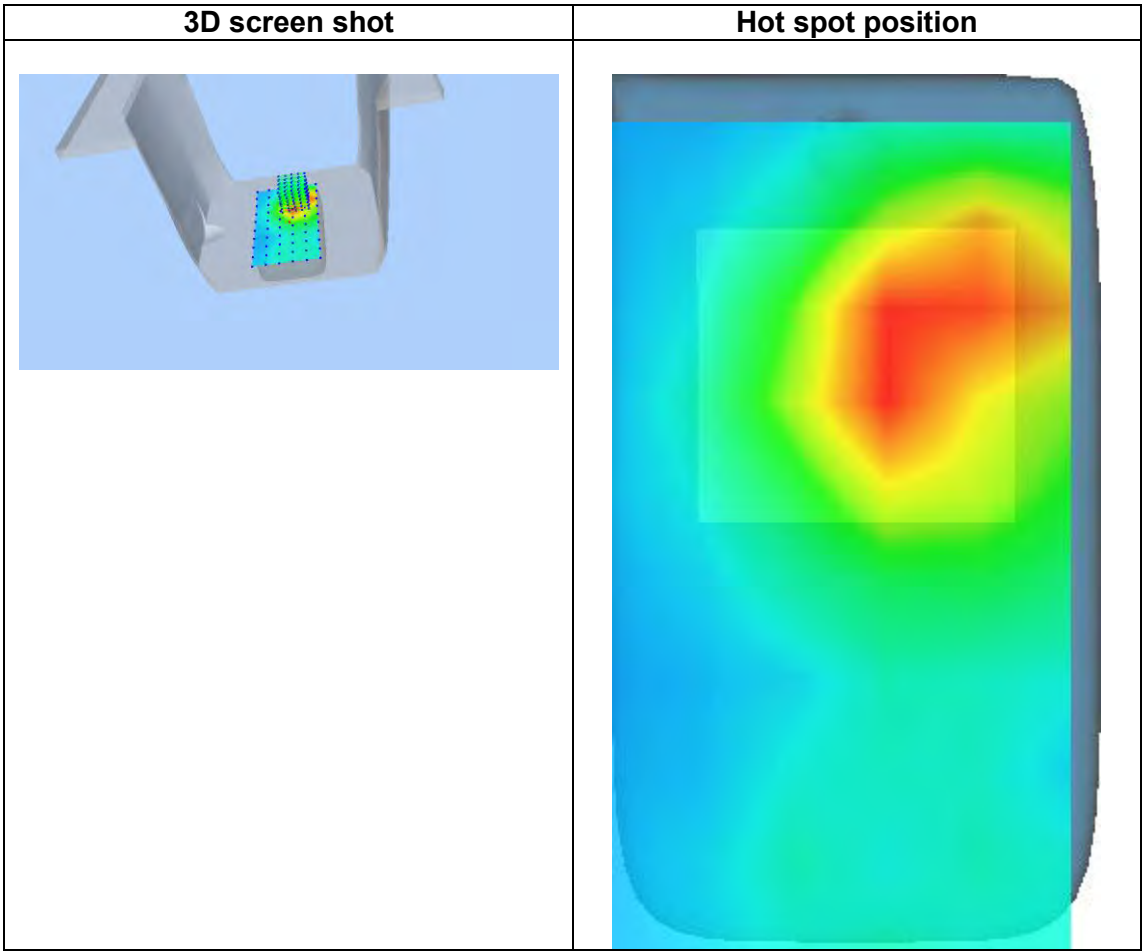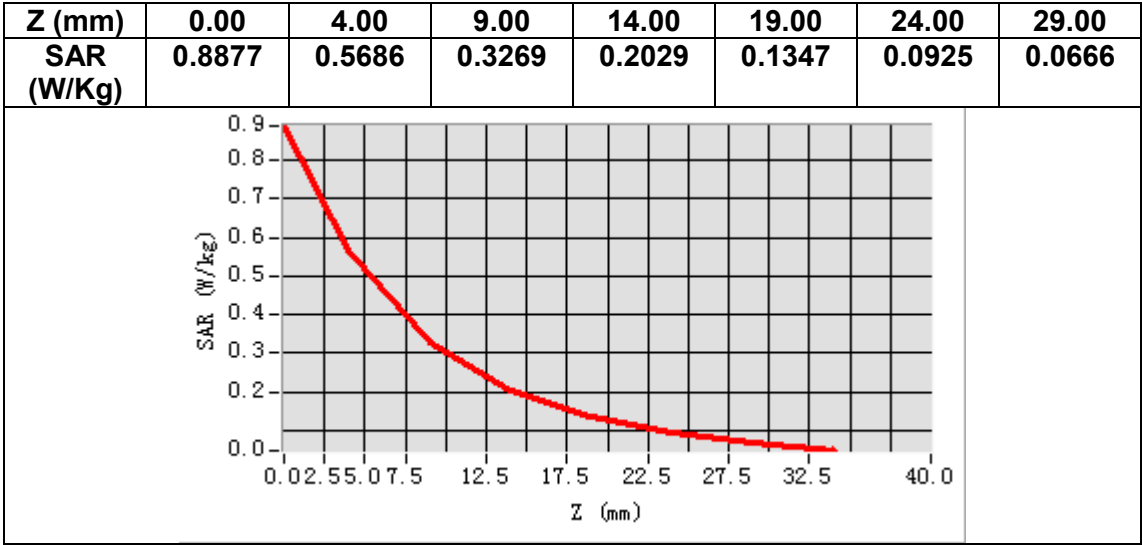

MEASUREMENT 6


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>BC0 US Cellular</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	54.844284
Relative permittivity (imaginary part)	21.565851
Conductivity (S/m)	1.002237
Variation (%)	-0.640000

SURFACE SAR

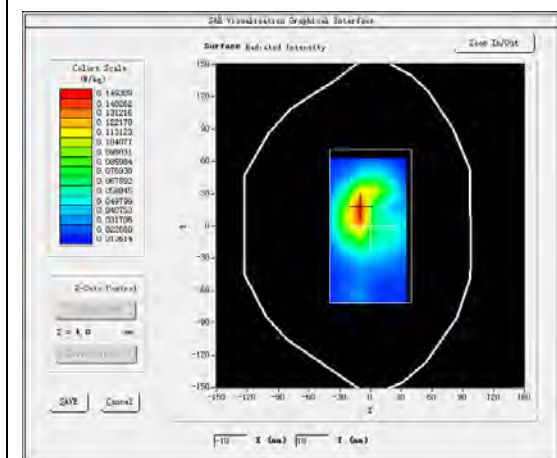



VOLUME SAR

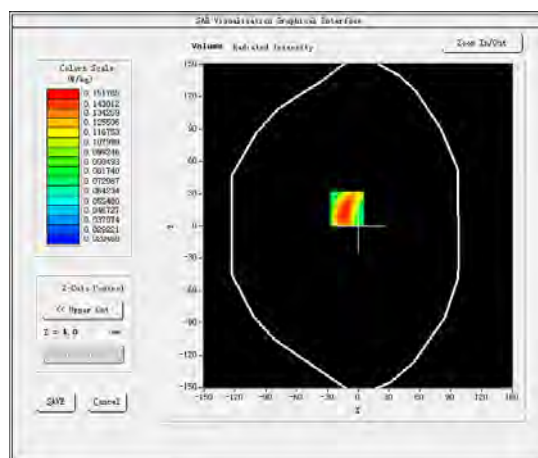

Maximum location: X=-11.00, Y=16.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.092028
SAR 1g (W/Kg)	0.150855

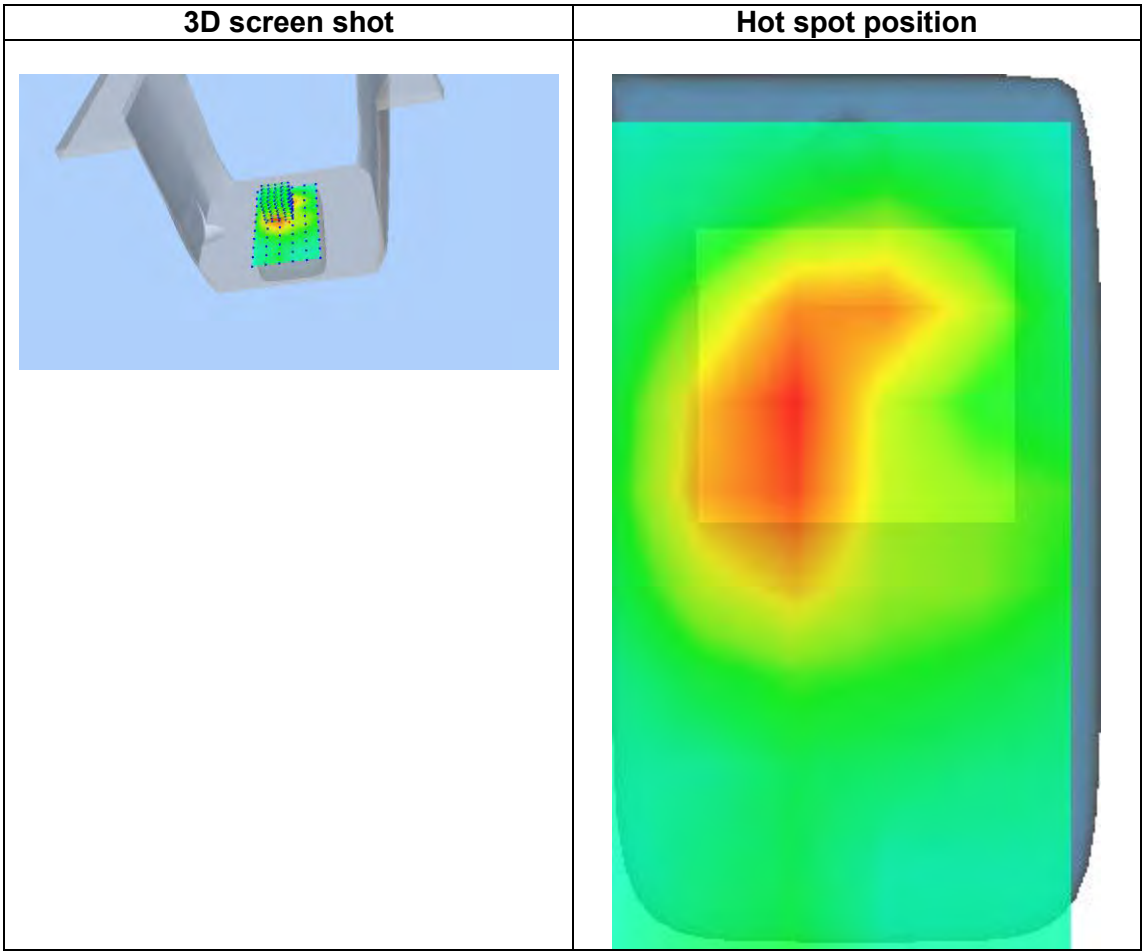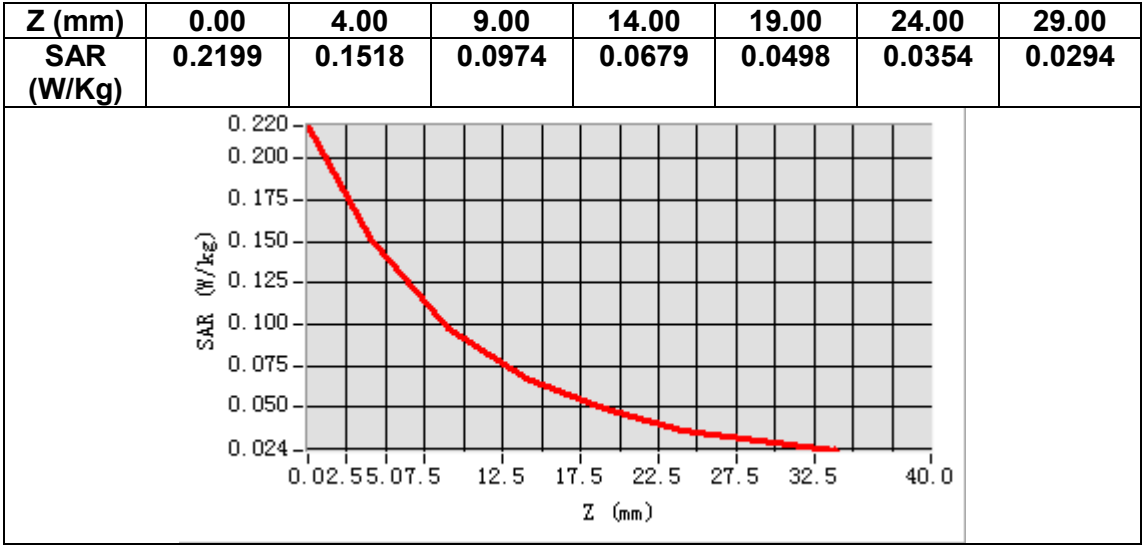

MEASUREMENT 7


A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11a U-NII</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	49.949535
Relative permittivity (imaginary part)	18.195509
Conductivity (S/m)	5.256480
Variation (%)	-4.470000

SURFACE SAR

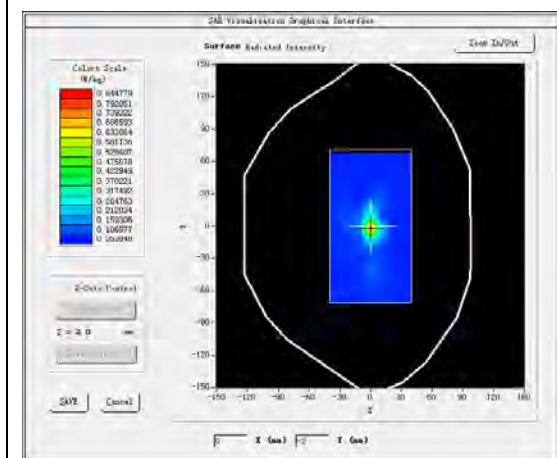



VOLUME SAR

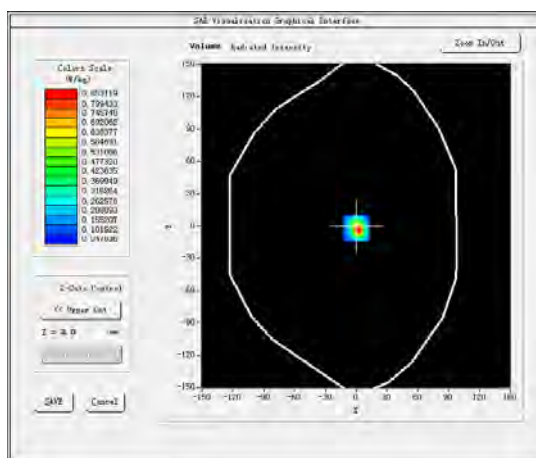

Maximum location: X=0.00, Y=-2.00

SAR Peak: 1.60 W/kg

SAR 10g (W/Kg)	0.155512
SAR 1g (W/Kg)	0.469412

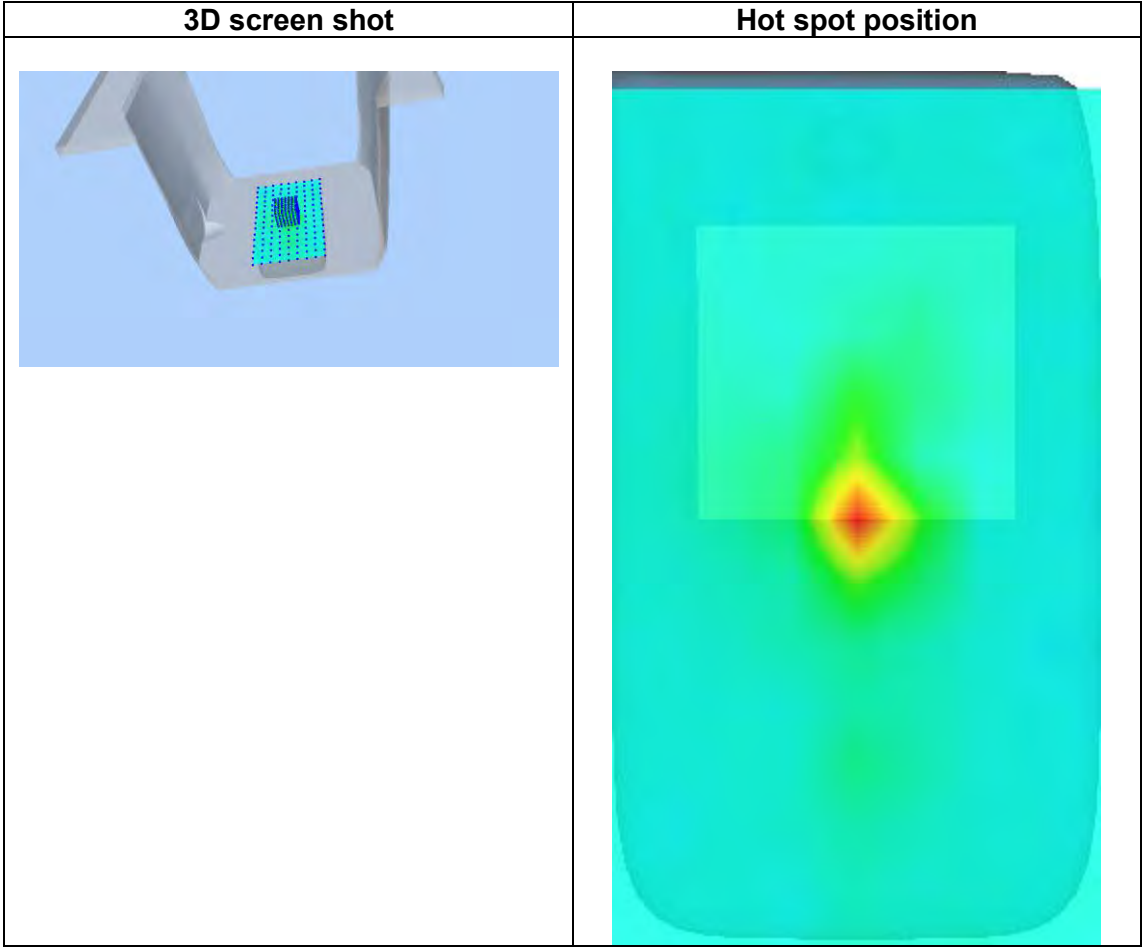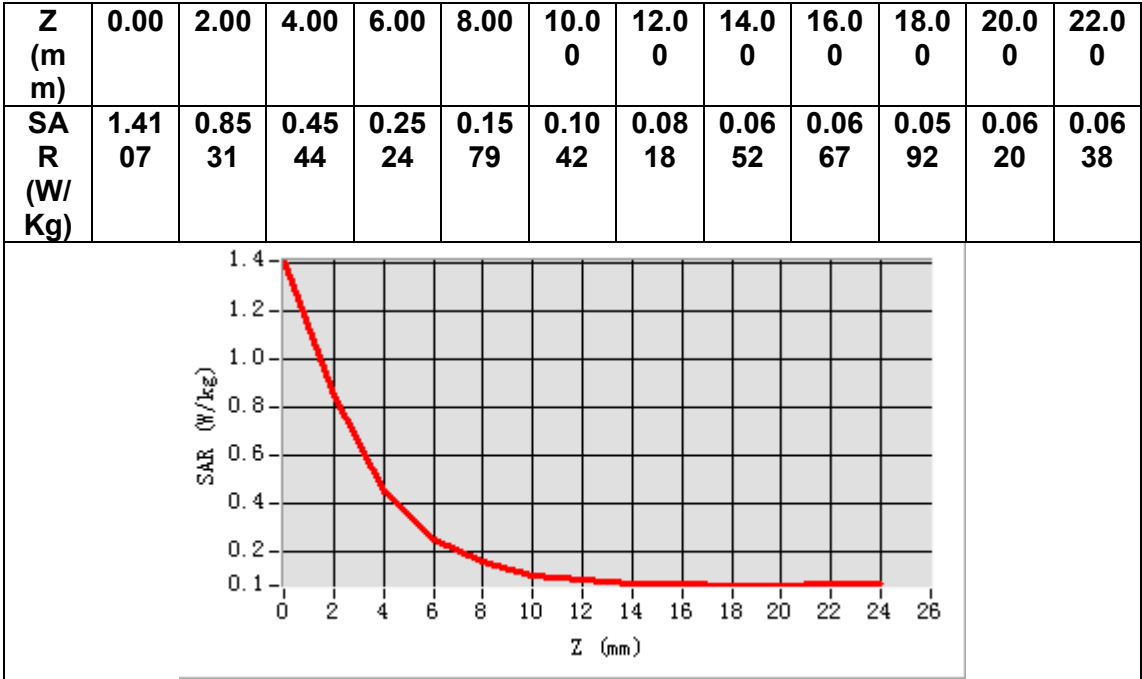

MEASUREMENT 8


A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11a U-NII</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	49.949535
Relative permittivity (imaginary part)	18.195509
Conductivity (S/m)	5.256480
Variation (%)	-1.400000

SURFACE SAR

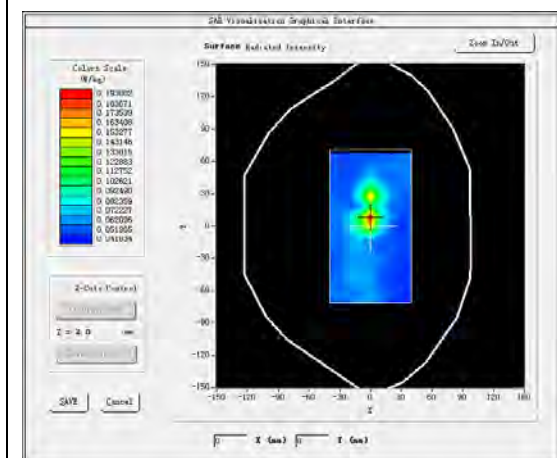

VOLUME SAR

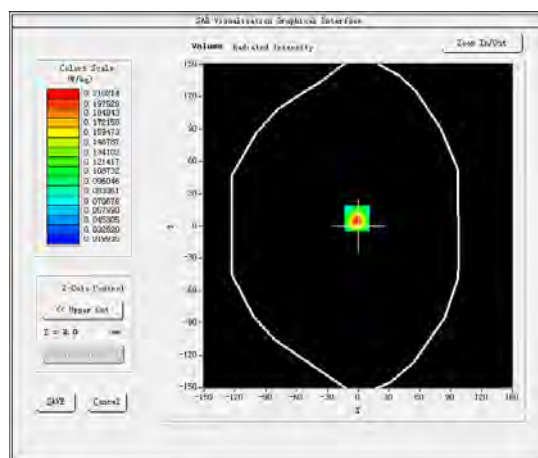


Maximum location: X=-1.00, Y=7.00


SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.074950
SAR 1g (W/Kg)	0.136453


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SA R (W/ Kg)	0.31 61	0.21 02	0.12 77	0.09 41	0.07 33	0.06 15	0.04 84	0.05 69	0.04 88	0.05 09	0.04 49	0.05 08

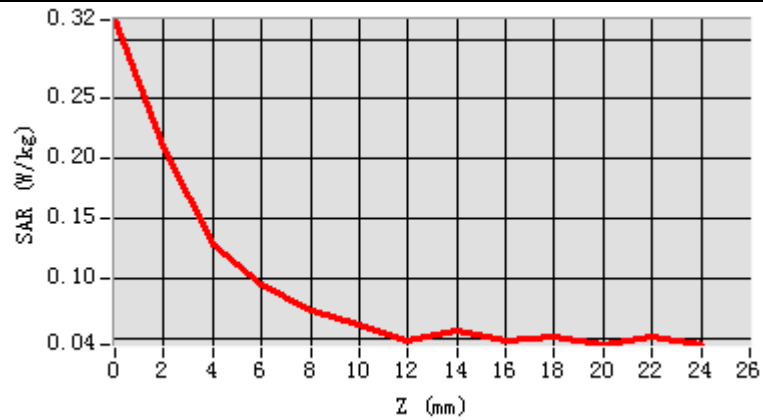

3D screen shot

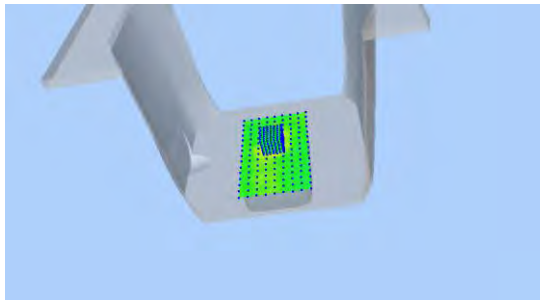

Hot spot position

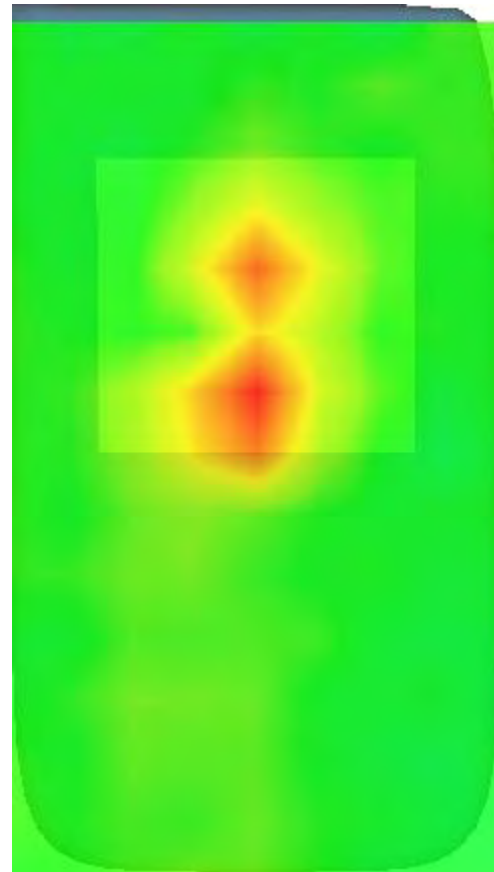

MEASUREMENT 9


A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11a U-NII</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	48.718700
Relative permittivity (imaginary part)	18.616766
Conductivity (S/m)	5.983222
Variation (%)	-0.870000

SURFACE SAR

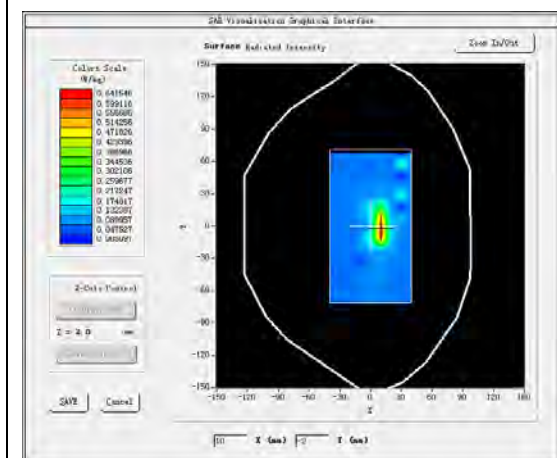



VOLUME SAR

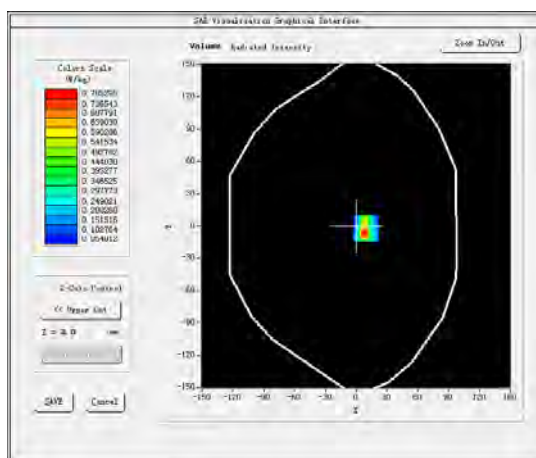

Maximum location: X=10.00, Y=-2.00

SAR Peak: 1.58 W/kg

SAR 10g (W/Kg)	0.161573
SAR 1g (W/Kg)	0.429426

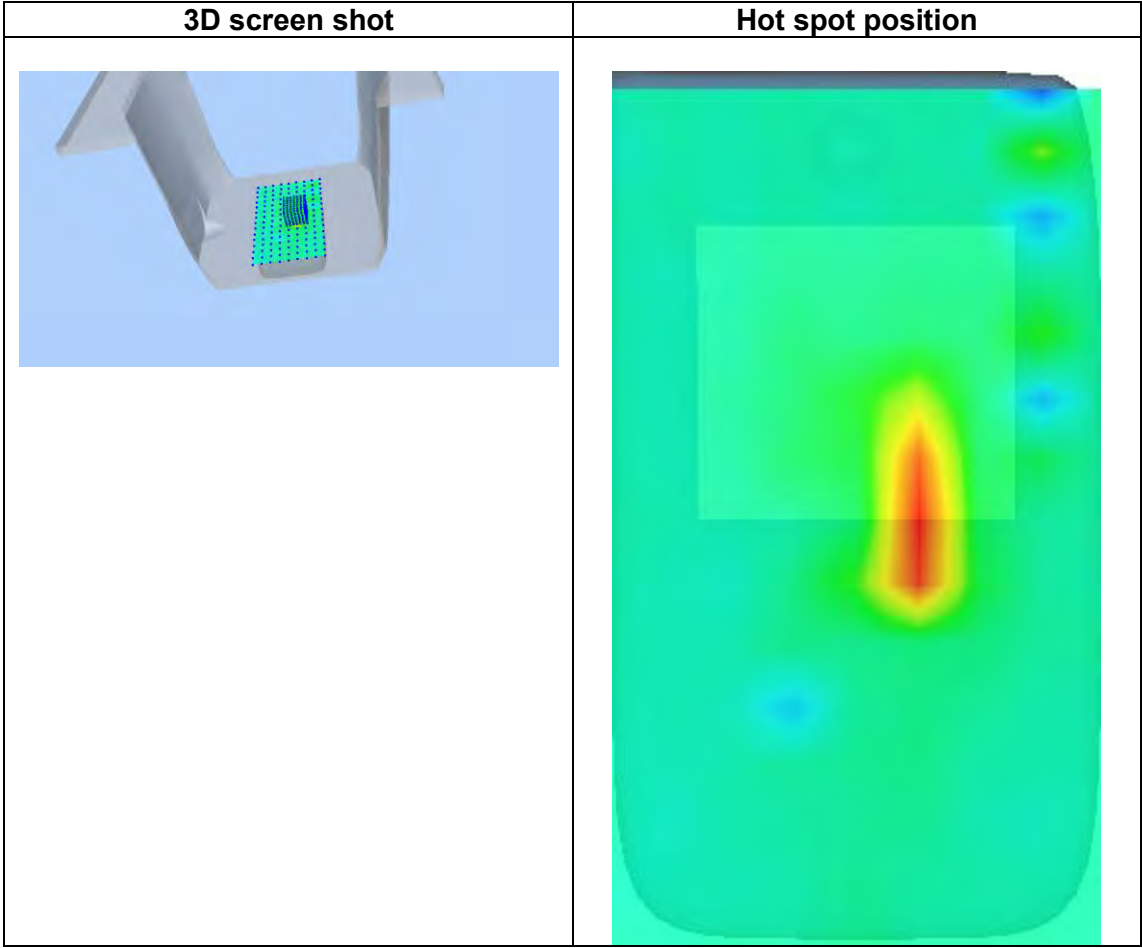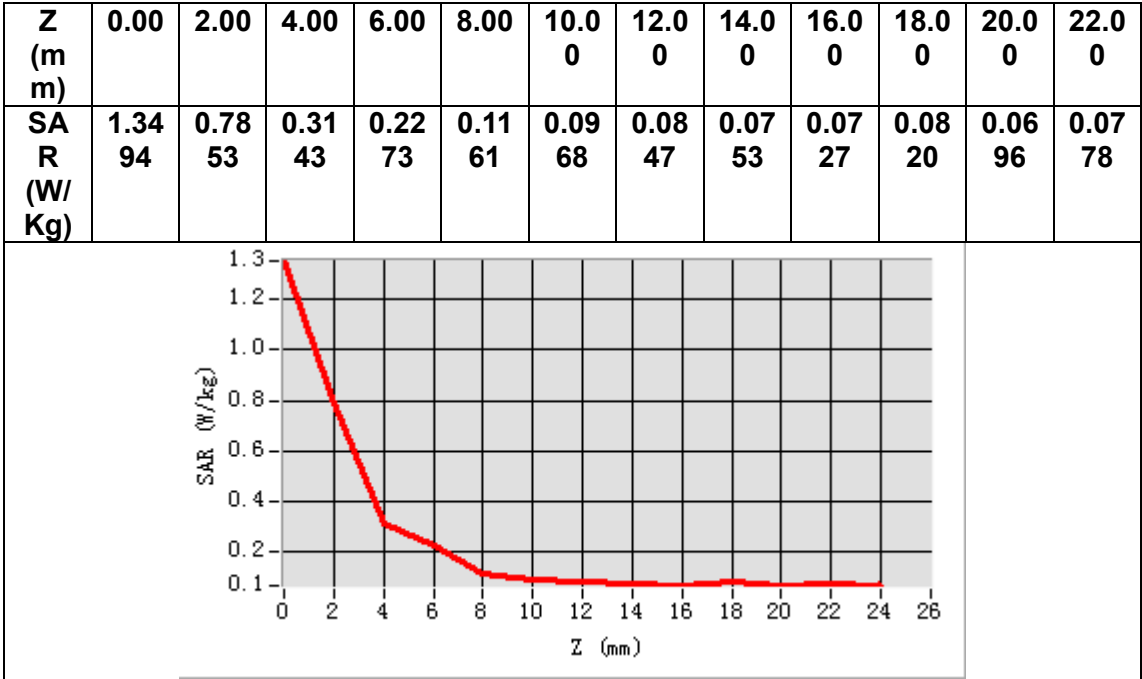

MEASUREMENT 10


A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11a U-NII</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	48.718700
Relative permittivity (imaginary part)	18.616766
Conductivity (S/m)	5.983222
Variation (%)	-0.510000

SURFACE SAR

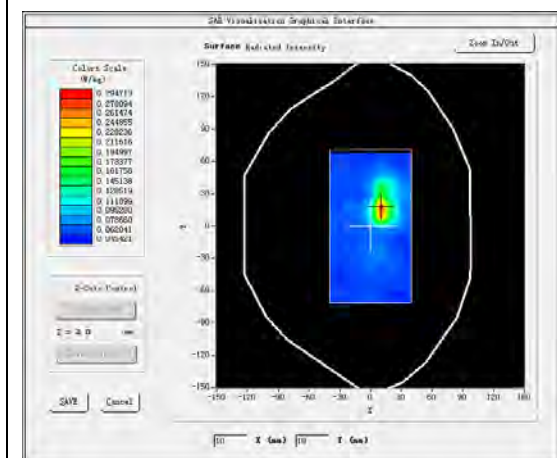

VOLUME SAR

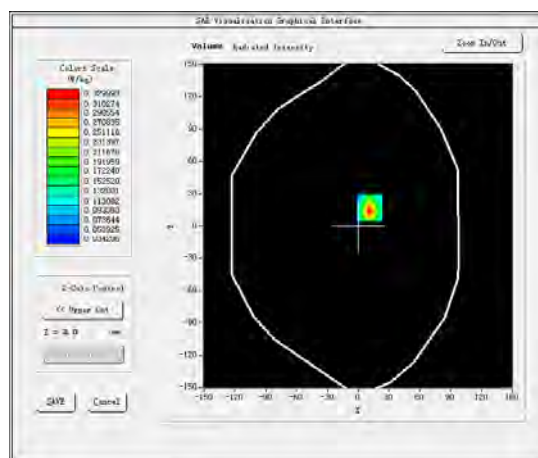




Maximum location: X=11.00, Y=17.00

SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.095920
SAR 1g (W/Kg)	0.196568

Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SA R (W/ Kg)	0.54 33	0.33 00	0.14 72	0.10 80	0.09 44	0.06 15	0.05 91	0.05 68	0.05 24	0.05 63	0.04 68	0.05 27

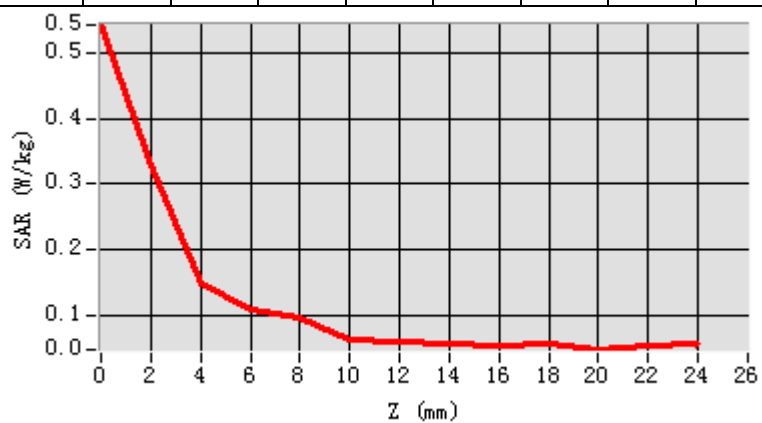

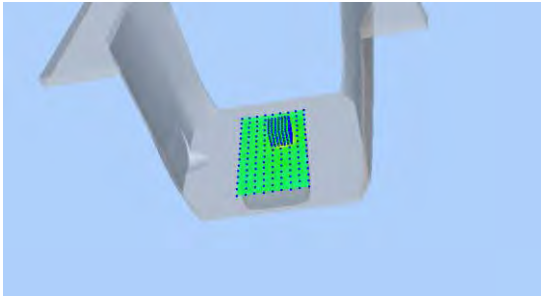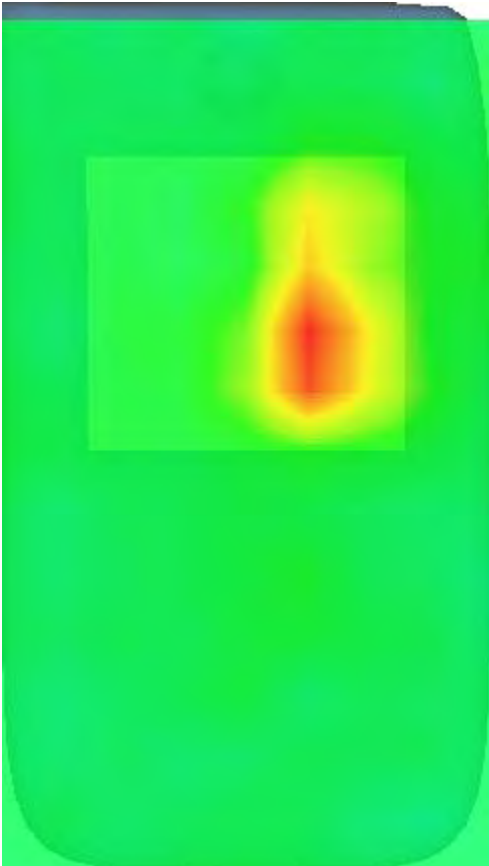3D screen shot	Hot spot position
	

MEASUREMENT 11


A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11b ISM</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11b (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.731602
Relative permittivity (imaginary part)	14.565620
Conductivity (S/m)	1.972023
Variation (%)	-2.970000

SURFACE SAR

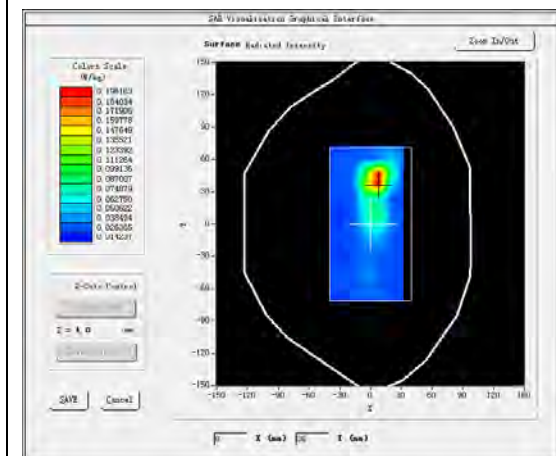



VOLUME SAR

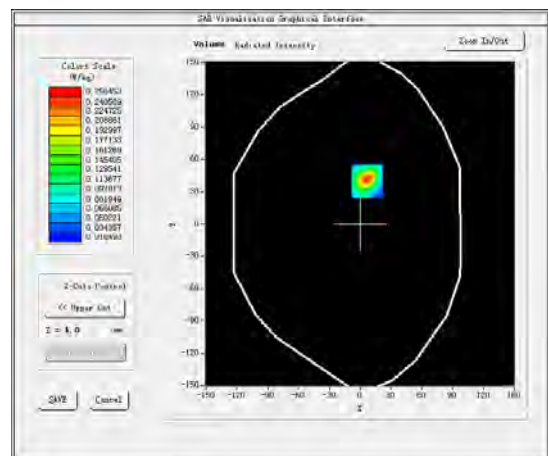

Maximum location: X=7.00, Y=40.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.105773
SAR 1g (W/Kg)	0.230066

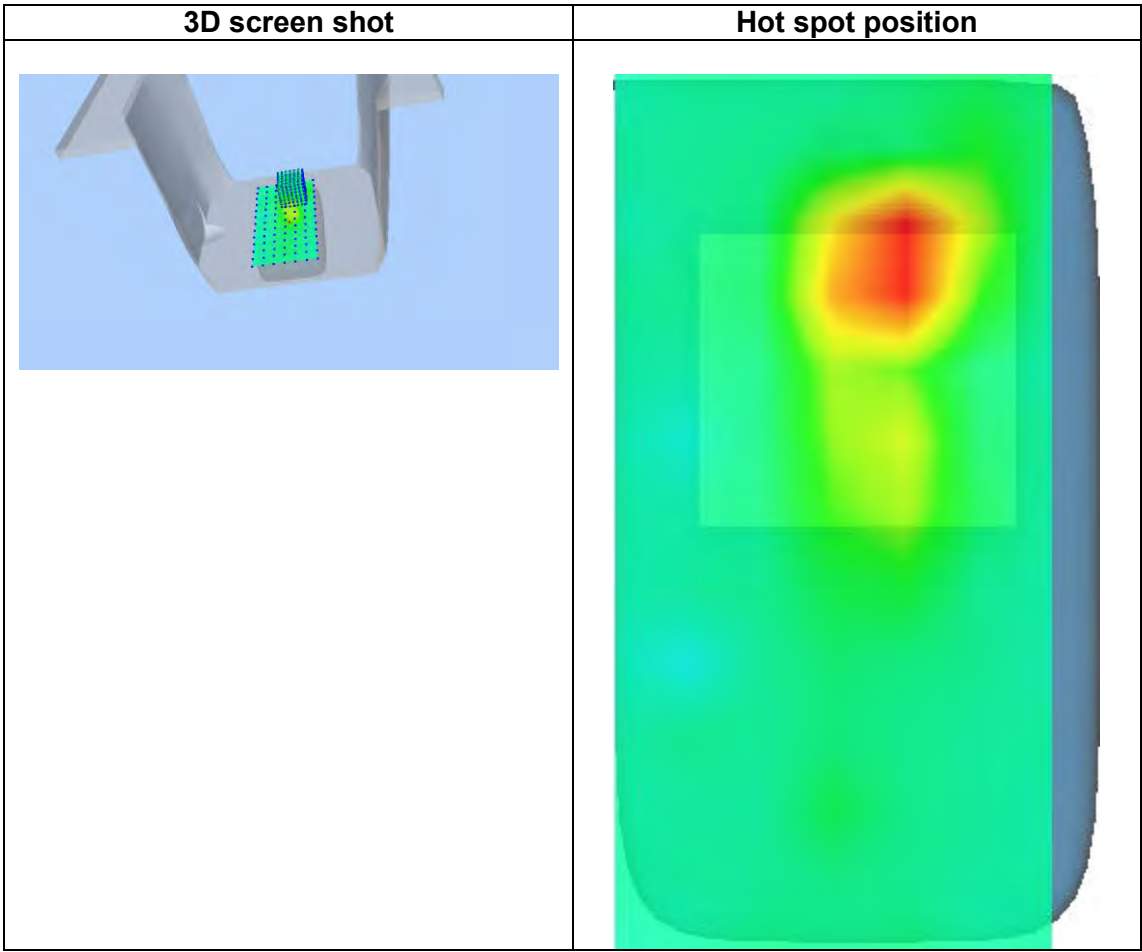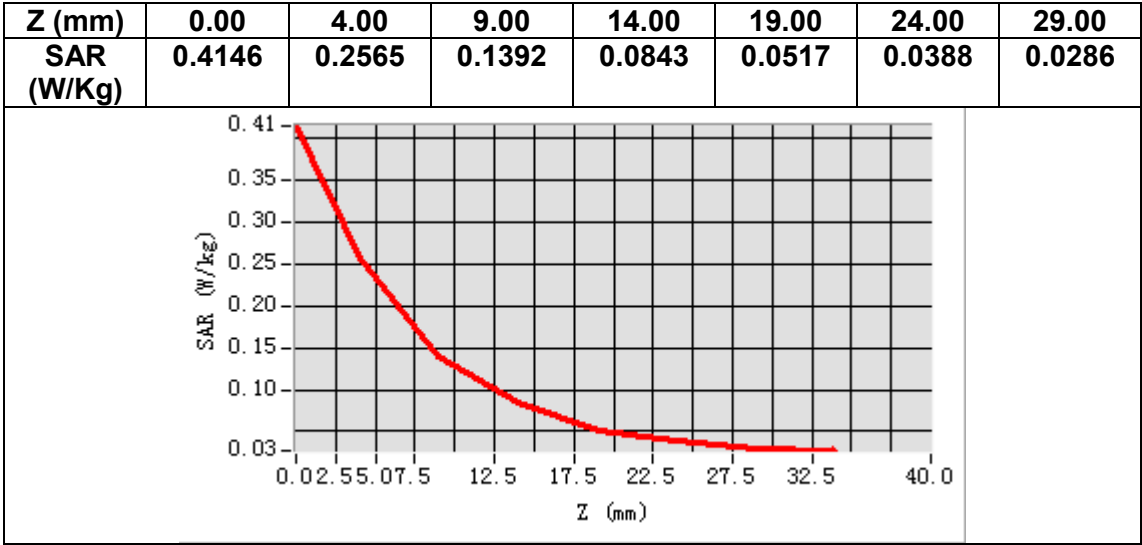

MEASUREMENT 12


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.731602
Relative permittivity (imaginary part)	14.565620
Conductivity (S/m)	1.972023
Variation (%)	-4.010000

SURFACE SAR

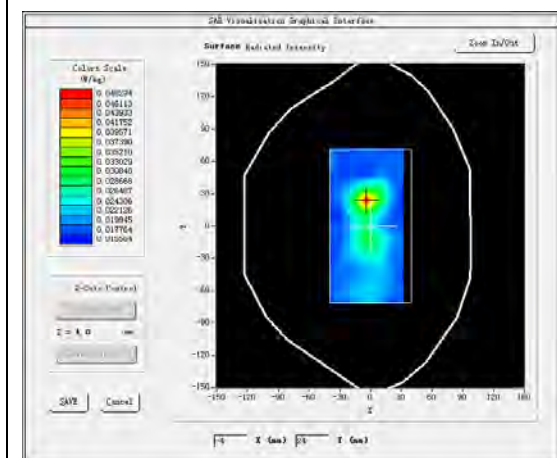



VOLUME SAR

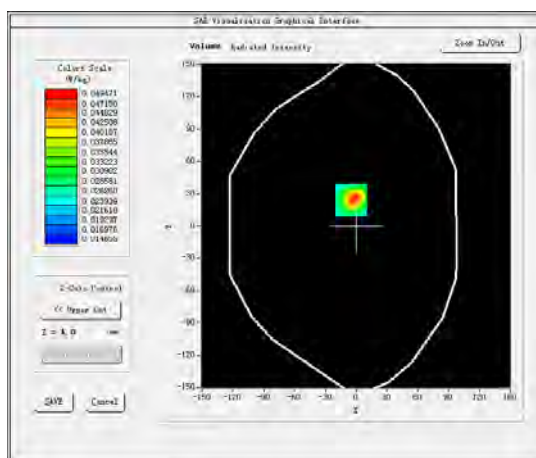

Maximum location: X=-5.00, Y=24.00

SAR Peak: 0.07 W/kg

SAR 10g (W/Kg)	0.031082
SAR 1g (W/Kg)	0.046907

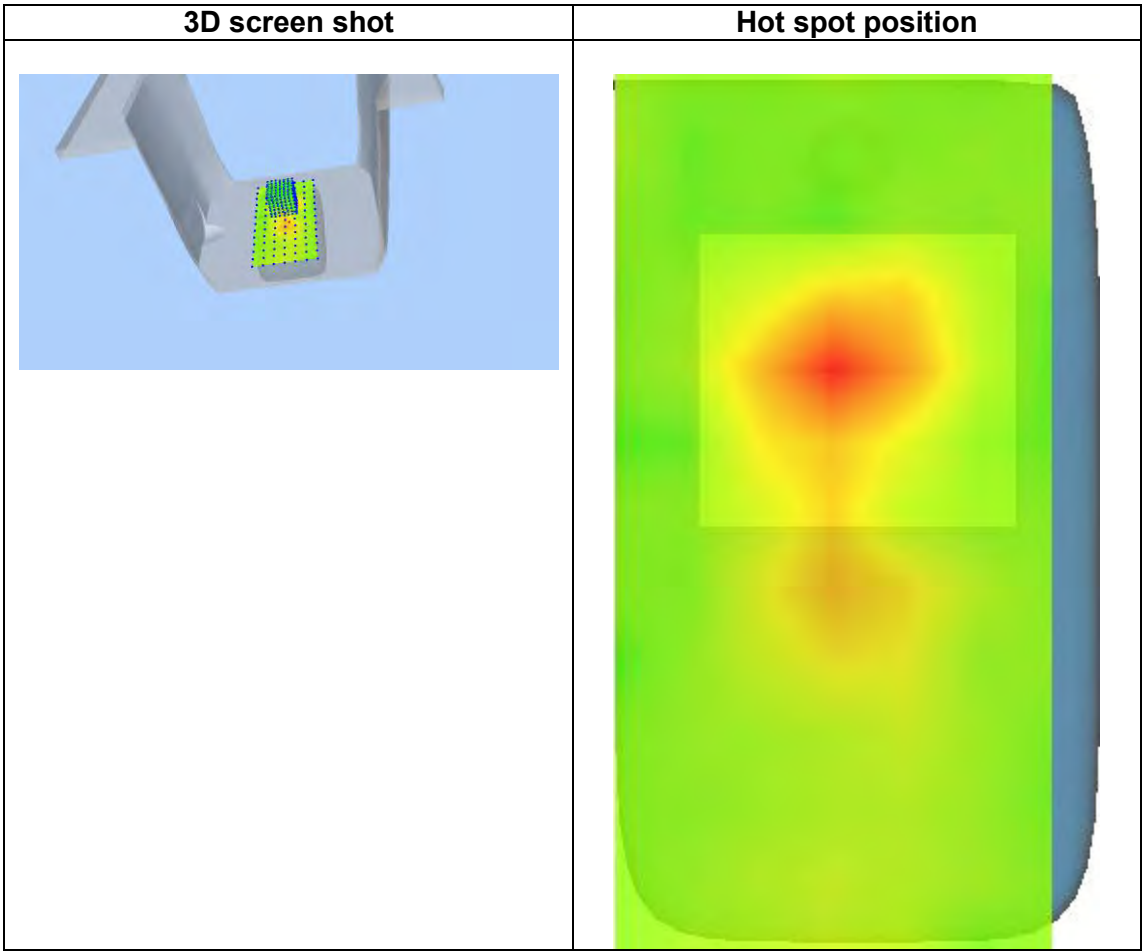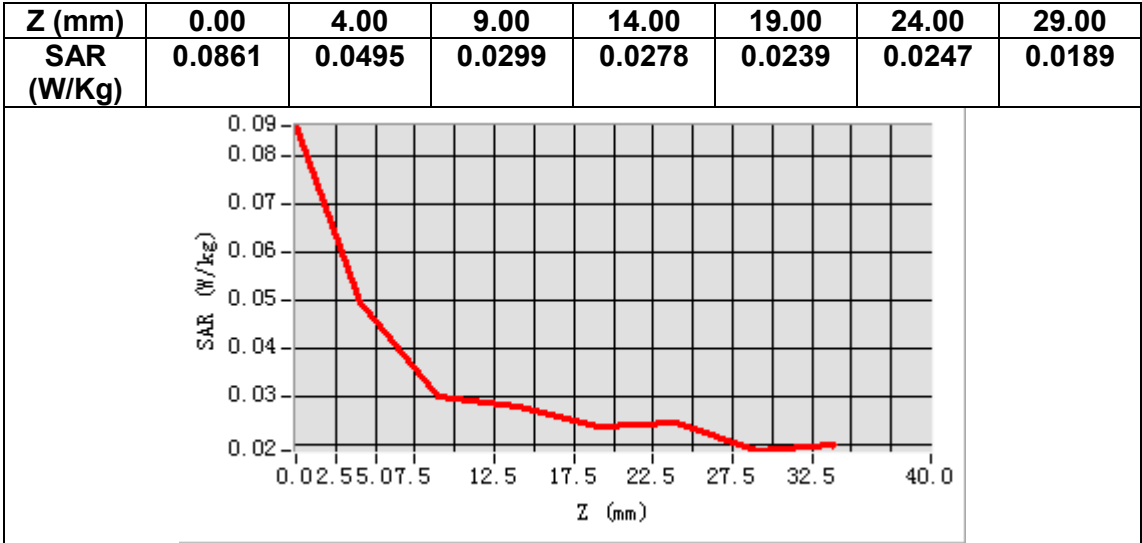

MEASUREMENT 13


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 5</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	54.843498
Relative permittivity (imaginary part)	21.566999
Conductivity (S/m)	1.002266
Variation (%)	-0.120000

SURFACE SAR

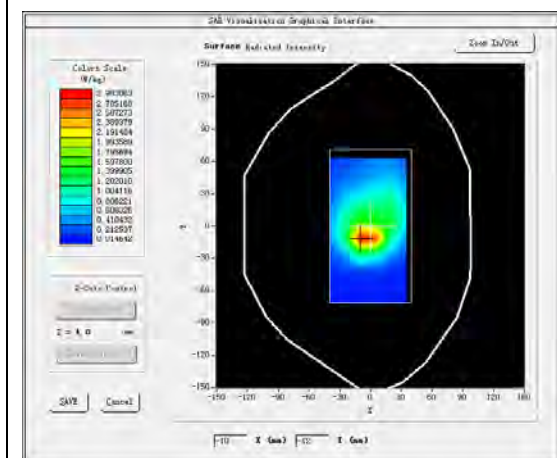



VOLUME SAR

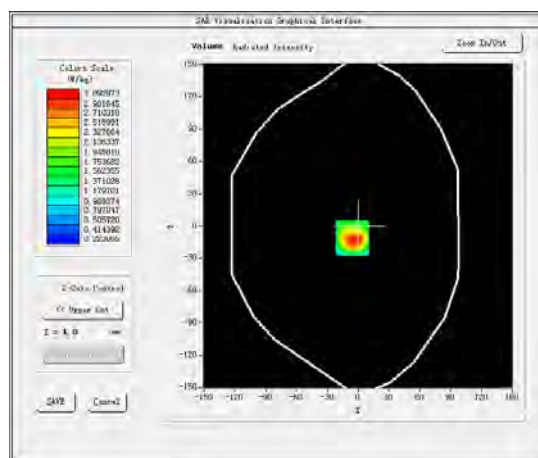

Maximum location: X=-6.00, Y=-11.00

SAR Peak: 4.88 W/kg

SAR 10g (W/Kg)	1.762029
SAR 1g (W/Kg)	3.132557

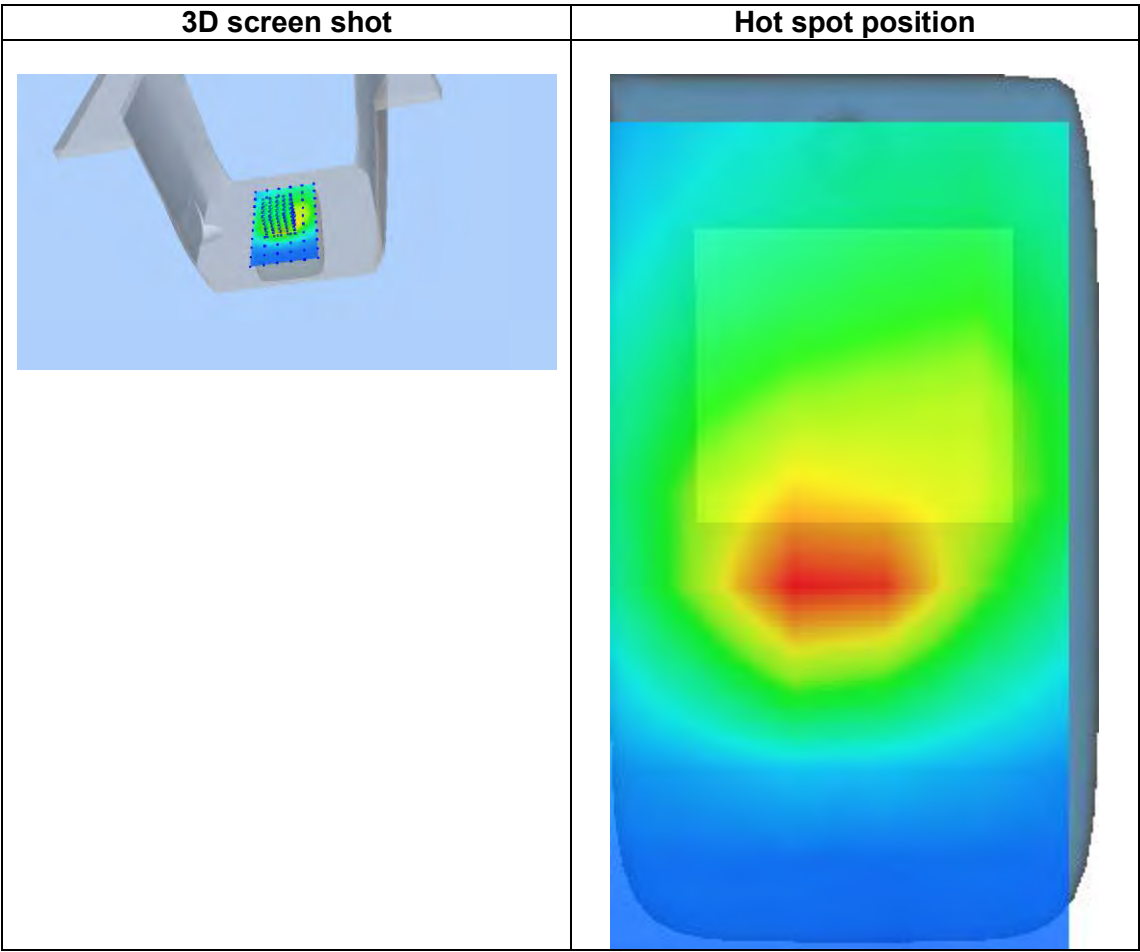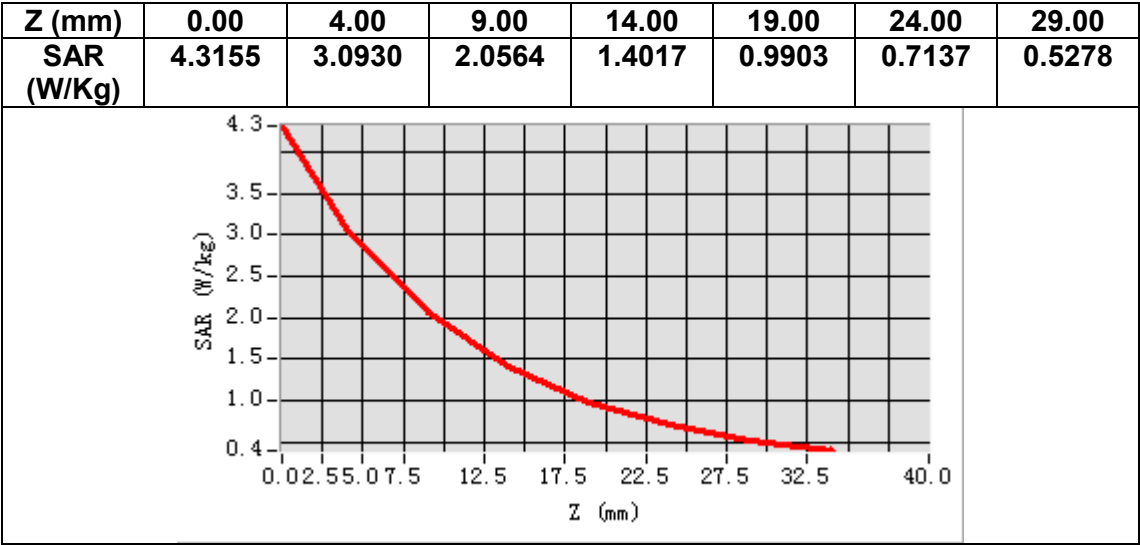

MEASUREMENT 14


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 5</u>
Channels	<u>High</u>
Signal	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	844.000000
Relative permittivity (real part)	54.797451
Relative permittivity (imaginary part)	21.603350
Conductivity (S/m)	1.012357
Variation (%)	-0.240000

SURFACE SAR

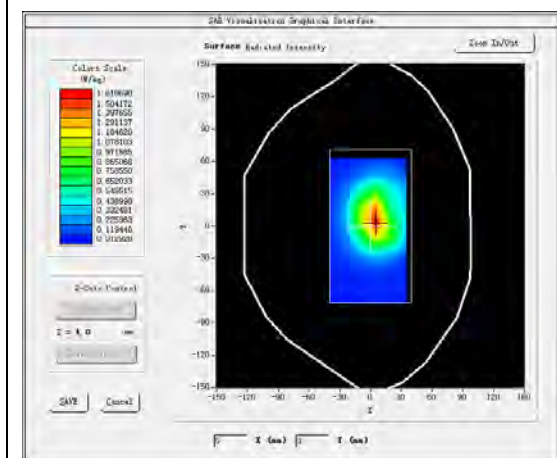



VOLUME SAR

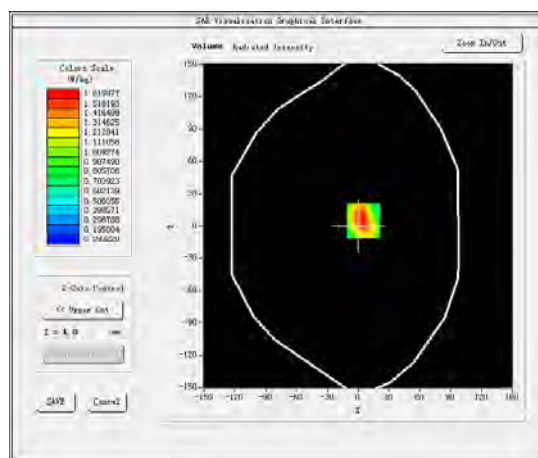

Maximum location: X=5.00, Y=5.00

SAR Peak: 2.31 W/kg

SAR 10g (W/Kg)	0.950856
SAR 1g (W/Kg)	1.276396

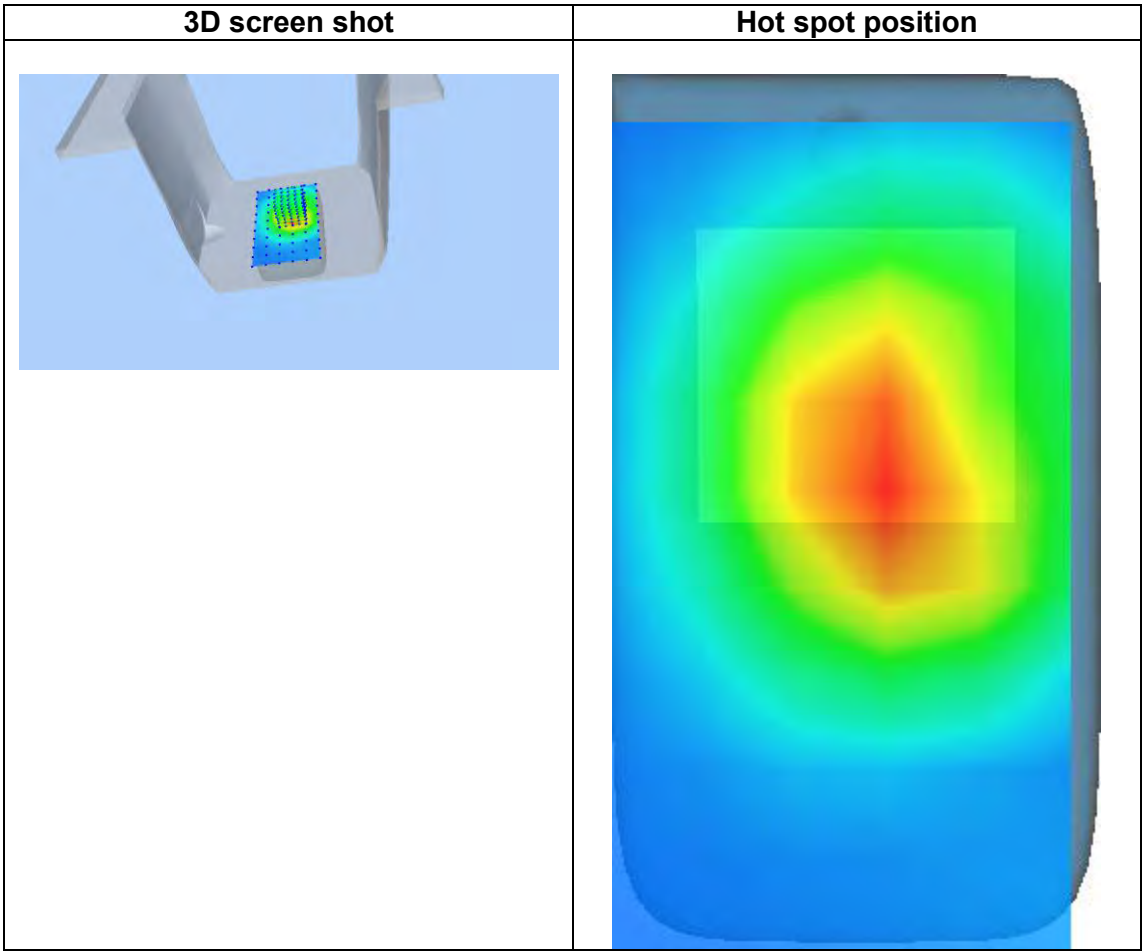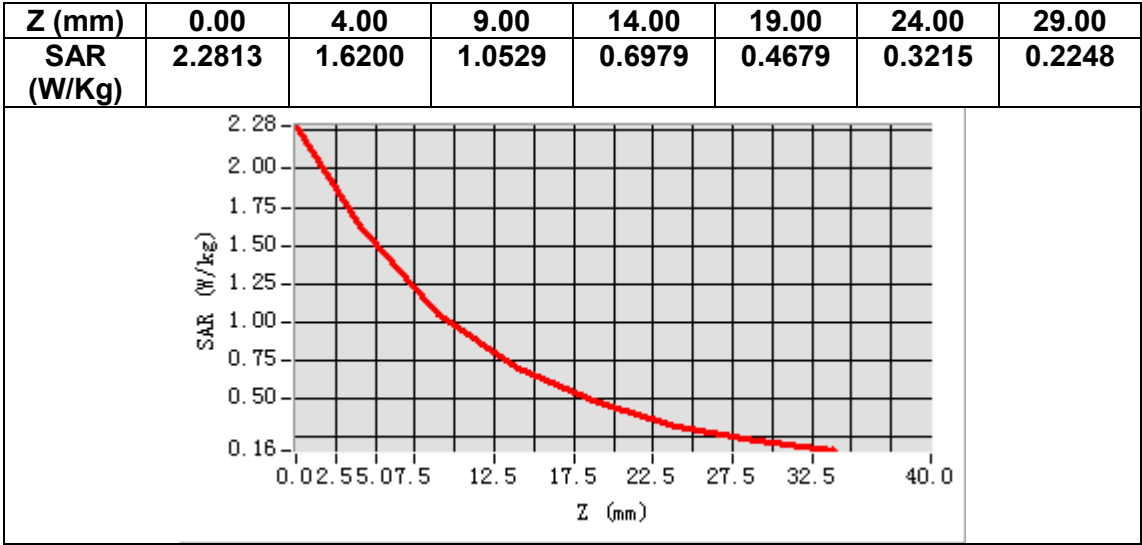

MEASUREMENT 15


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2560.000000
Relative permittivity (real part)	53.568447
Relative permittivity (imaginary part)	15.069540
Conductivity (S/m)	2.143223
Variation (%)	-1.520000

SURFACE SAR

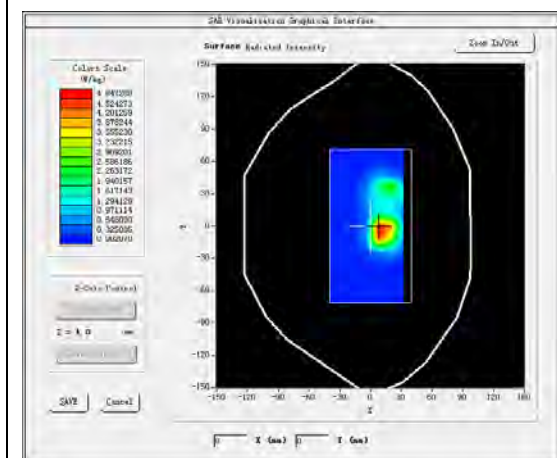



VOLUME SAR

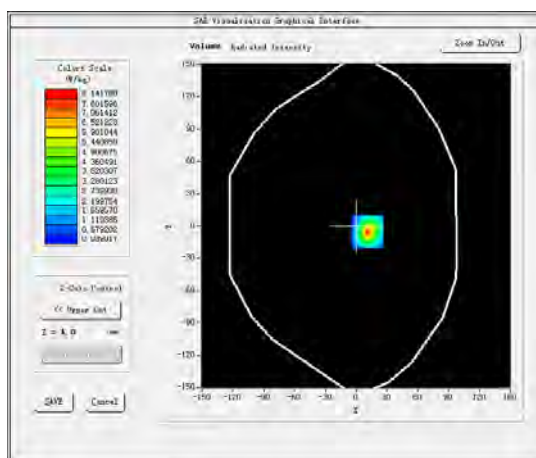

Maximum location: X=11.00, Y=-5.00

SAR Peak: 13.70 W/kg

SAR 10g (W/Kg)	2.639601
SAR 1g (W/Kg)	6.568239

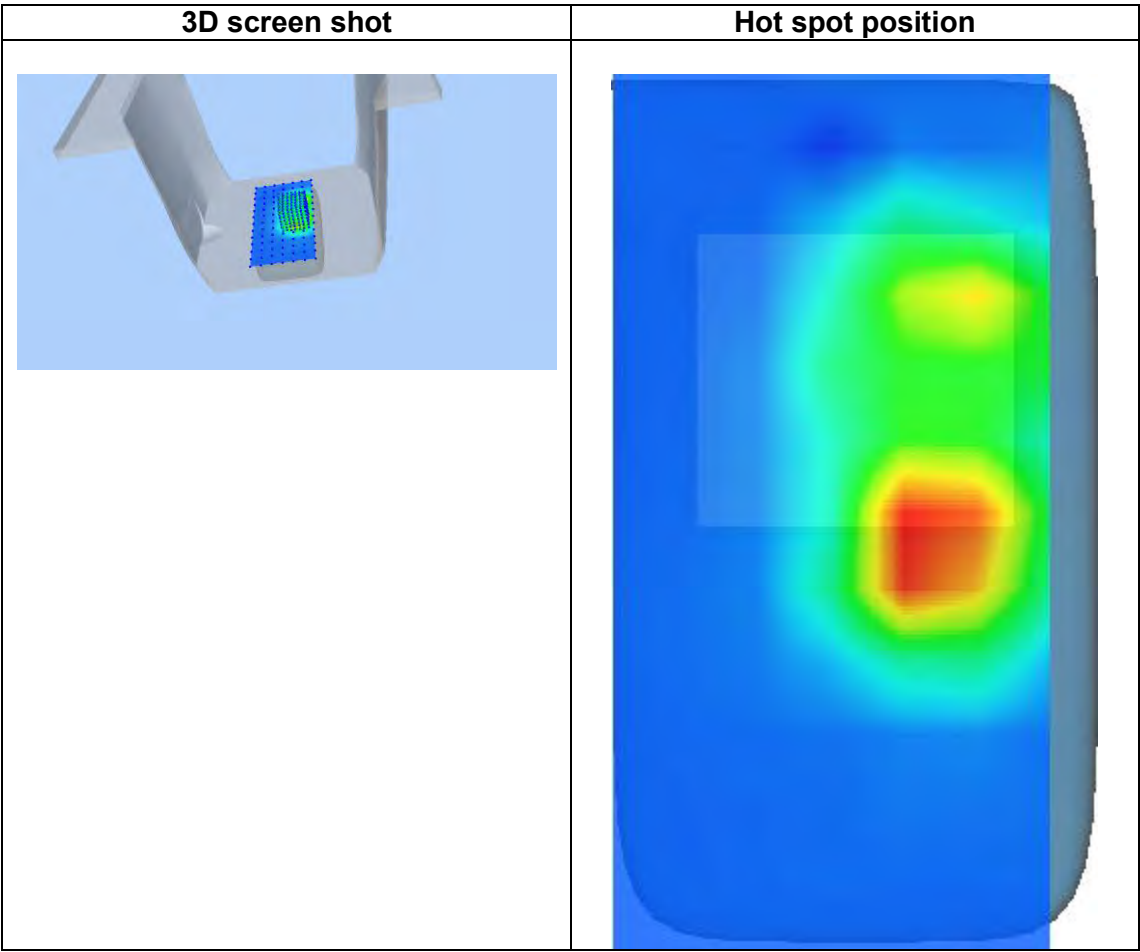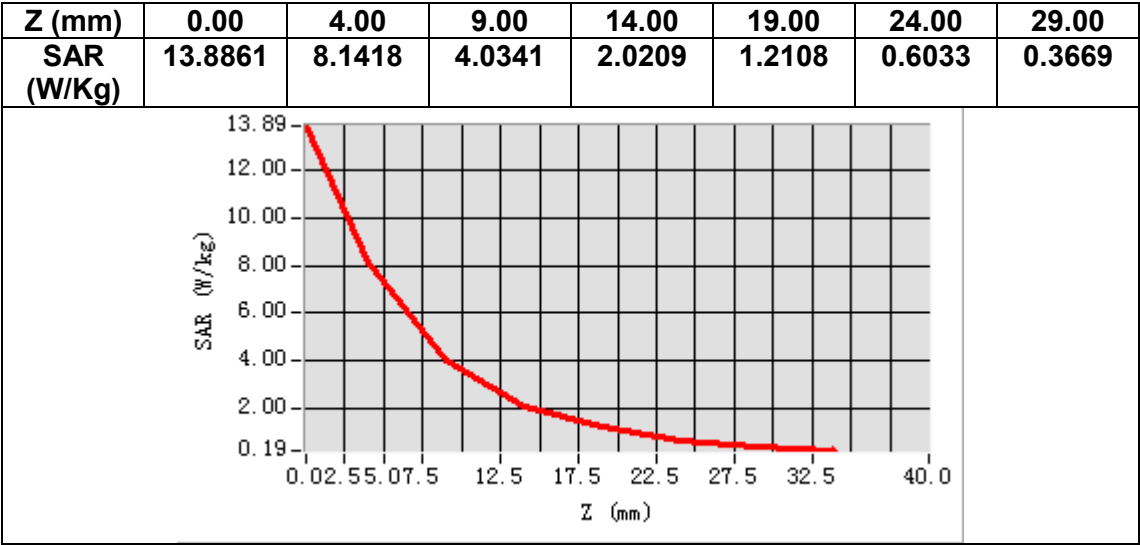

MEASUREMENT 16


A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 7</u>
Channels	<u>High</u>
Signal	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2560.000000
Relative permittivity (real part)	53.568447
Relative permittivity (imaginary part)	15.069540
Conductivity (S/m)	2.143223
Variation (%)	1.670000

SURFACE SAR

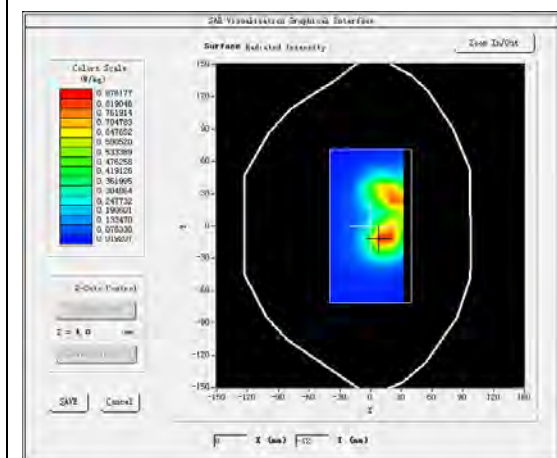



VOLUME SAR

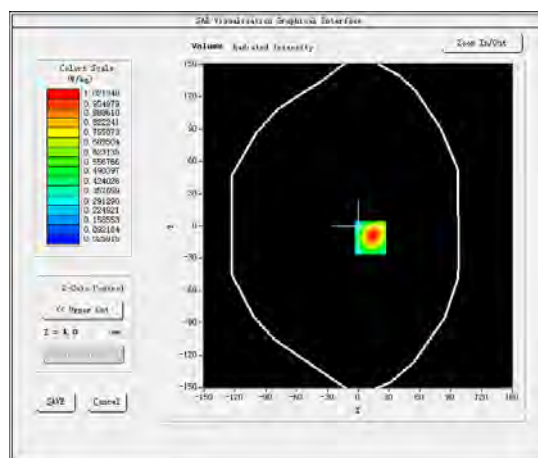

Maximum location: X=12.00, Y=-11.00

SAR Peak: 1.57 W/kg

SAR 10g (W/Kg)	0.491459
SAR 1g (W/Kg)	0.944775

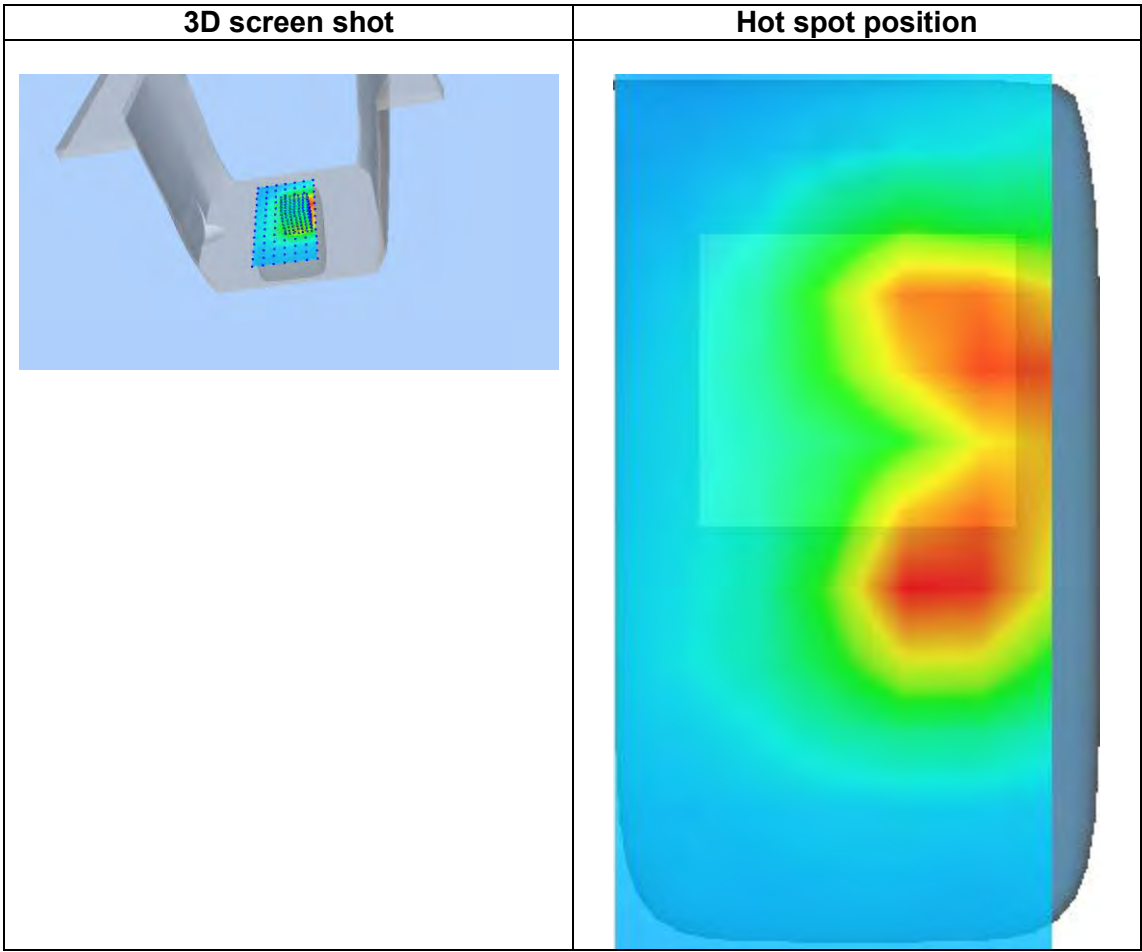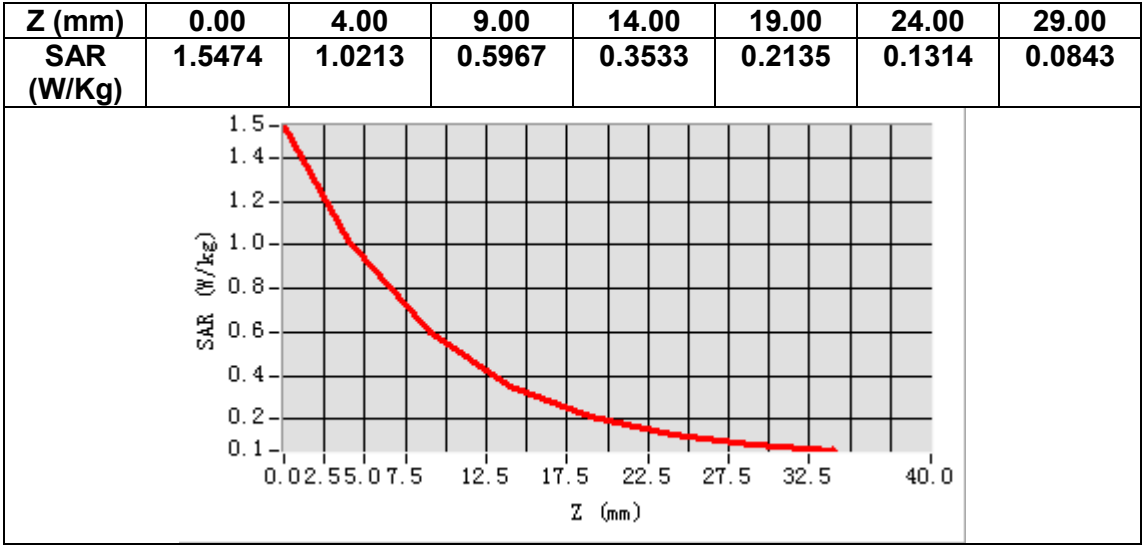

MEASUREMENT 17


A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 41</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative permittivity (real part)	53.439445
Relative permittivity (imaginary part)	15.165440
Conductivity (S/m)	2.184666
Variation (%)	-0.630000

SURFACE SAR

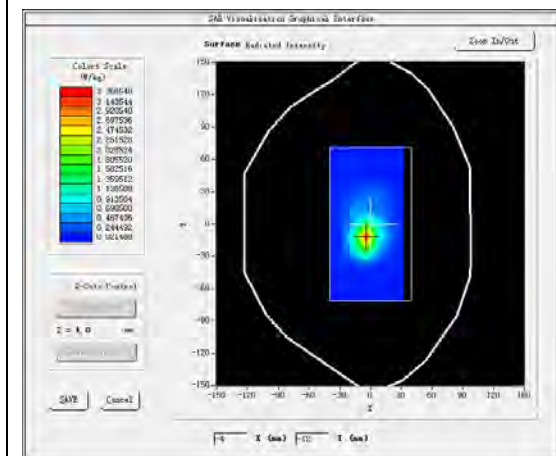



VOLUME SAR

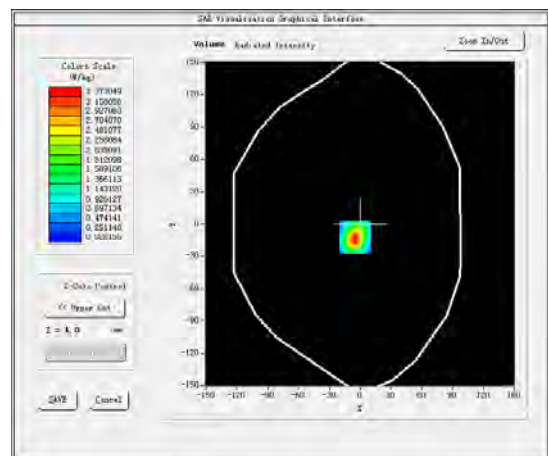

Maximum location: X=-5.00, Y=-12.00

SAR Peak: 5.92 W/kg

SAR 10g (W/Kg)	1.238555
SAR 1g (W/Kg)	3.038975

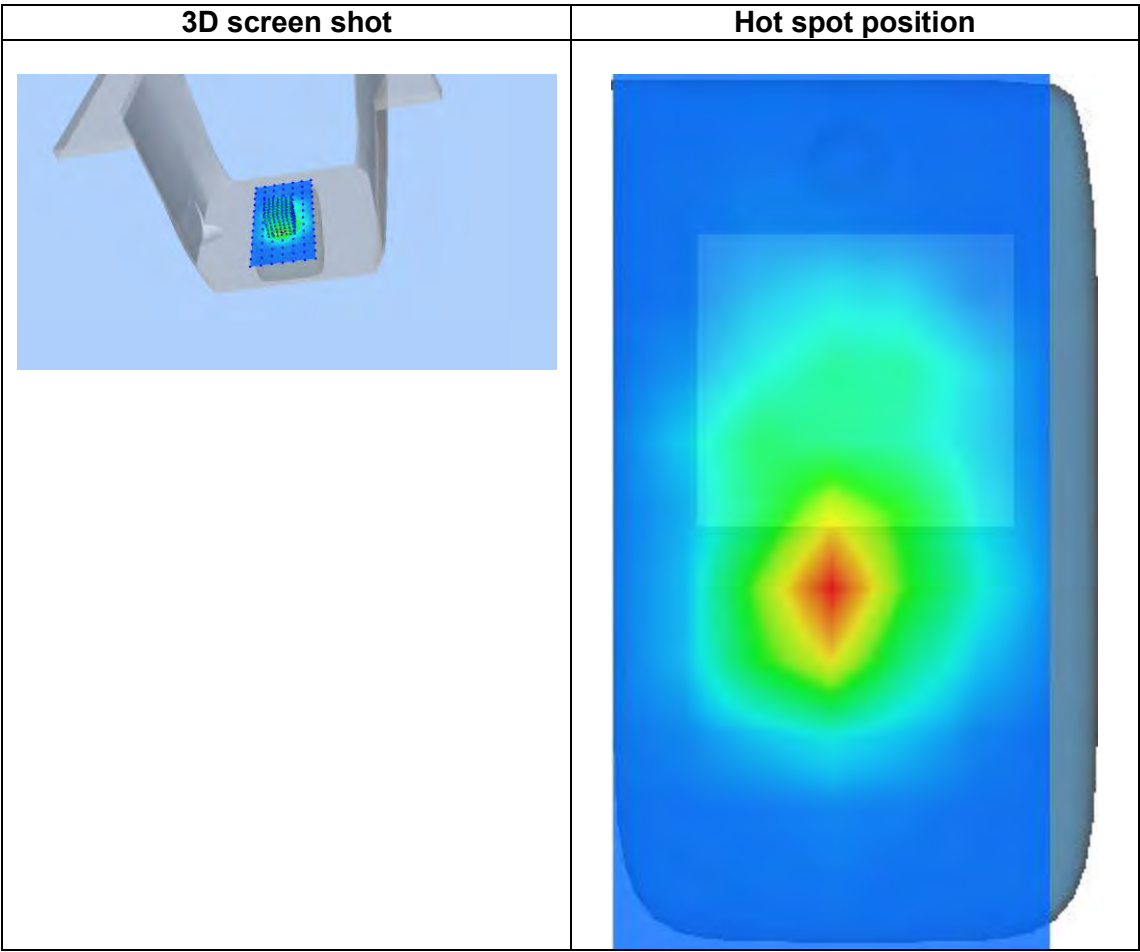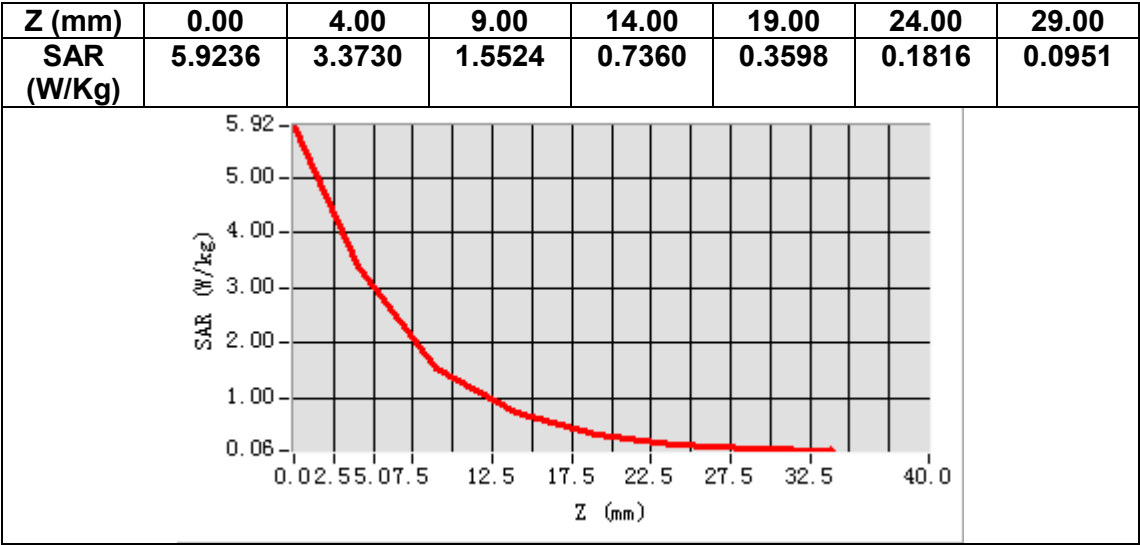

MEASUREMENT 18


A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 41</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative permittivity (real part)	53.439445
Relative permittivity (imaginary part)	15.165440
Conductivity (S/m)	2.184666
Variation (%)	0.090000

SURFACE SAR

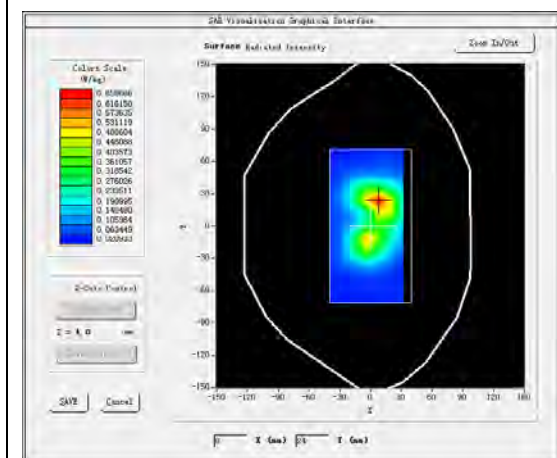


VOLUME SAR

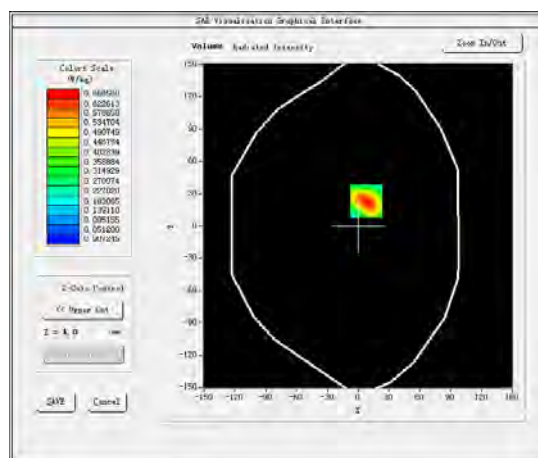


Maximum location: X=8.00, Y=23.00

SAR Peak: 1.06 W/kg


SAR 10g (W/Kg)	0.315287
SAR 1g (W/Kg)	0.612895

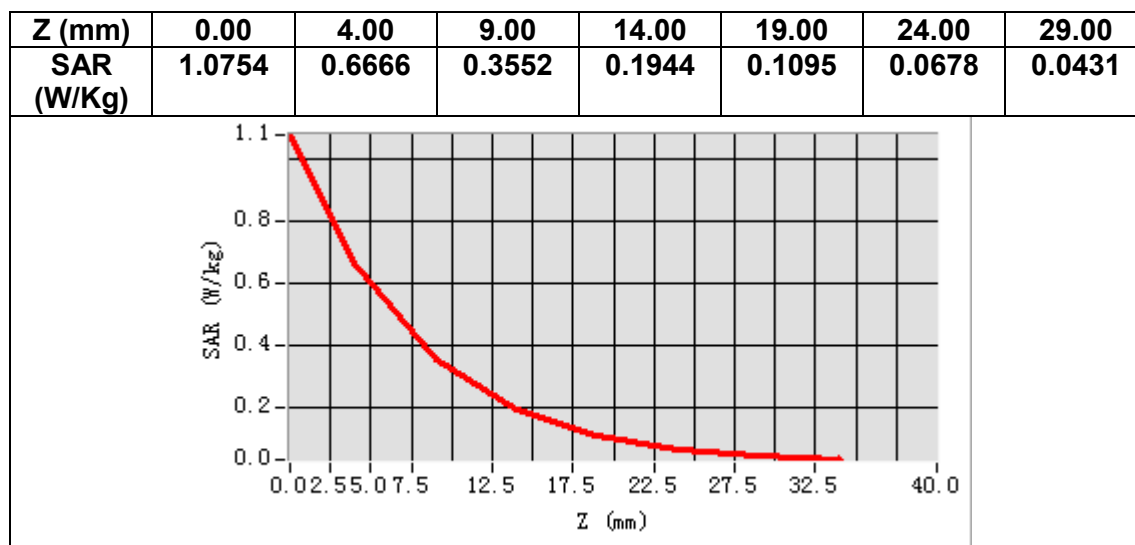

3D screen shot

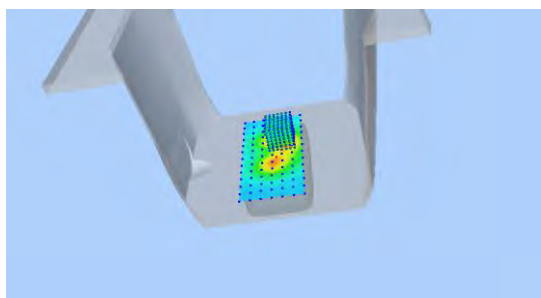

Hot spot position

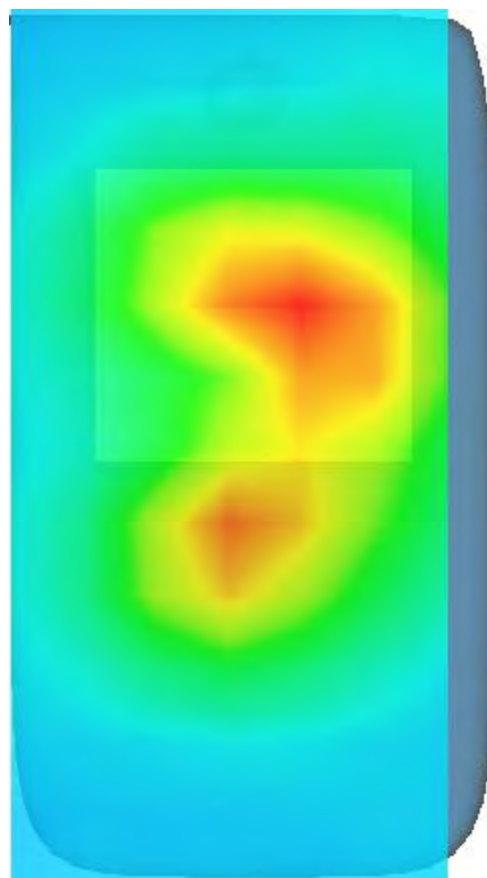

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe - SN 08/16 EPGO287
835 MHz Dipole - SN 03/15 DIP 0G835-347
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
5000-6000 MHz Dipole - SN 13/14 WGA 33



COMOSAR E-Field Probe Calibration Report

Ref : ACR.260.1.18.SATU.A

**SHENZHEN NTEK TESTING TECHNOLOGY
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 08/16 EPGO287**

**Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144**



Calibration Date: 09/17/2018

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	9/17/2018	
<i>Checked by :</i>	Jérôme LUC	Product Manager	9/17/2018	
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	9/17/2018	

	<i>Customer Name</i>
<i>Distribution :</i>	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	9/17/2018	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.5	Boundary Effect	5
4	Measurement Uncertainty	5
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	7
5.4	Isotropy	8
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 08/16 EPGO287
Product Condition (new / used)	Used
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.209 MΩ Dipole 2: R2=0.196 MΩ Dipole 3: R3=0.197 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION**2.1 GENERAL INFORMATION**

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Reflected power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Liquid conductivity	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1	2.309%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Combined standard uncertainty					5.831%
Expanded uncertainty 95 % confidence level k = 2					12.0%

Page: 5/10

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %


5.1 SENSITIVITY IN AIR

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.66	0.75	0.58

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
93	93	98

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

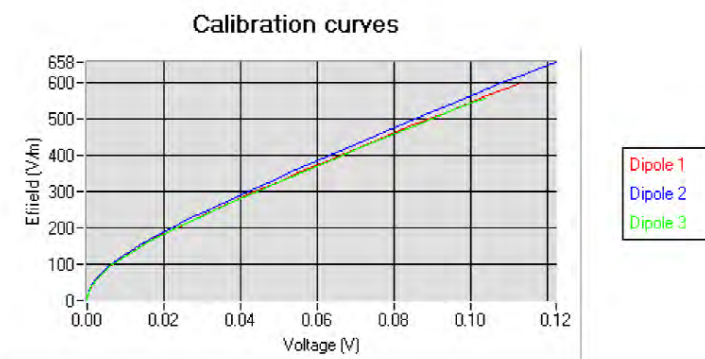




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

5.2 LINEARITY

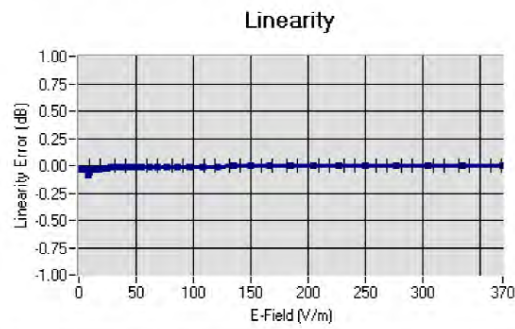Linearity: $\pm 1.89\%$ ($\pm 0.08\text{dB}$)

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz $\pm$ 100MHz)	Permittivity	Epsilon (S/m)	ConvF
HL750	750	40.03	0.93	1.45
BL750	750	56.83	1.00	1.49
HL850	835	42.19	0.90	1.50
BL850	835	54.67	1.01	1.56
HL900	900	42.08	1.01	1.51
HL1800	1800	41.68	1.46	1.71
BL1800	1800	53.86	1.46	1.77
HL1900	1900	38.45	1.45	2.03
BL1900	1900	53.32	1.56	2.07
HL2000	2000	38.26	1.38	1.76
HL2450	2450	37.50	1.80	2.00
BL2450	2450	53.22	1.89	2.08
HL2600	2600	39.80	1.99	2.12
BL2600	2600	52.52	2.23	2.19
HL5200	5200	35.64	4.67	2.55
BL5200	5200	48.64	5.51	2.62
HL5400	5400	36.44	4.87	2.53
BL5400	5400	46.52	5.77	2.59
HL5600	5600	36.66	5.17	2.64
BL5600	5600	46.79	5.77	2.73
HL5800	5800	35.31	5.31	2.72
BL5800	5800	47.04	6.10	2.81

LOWER DETECTION LIMIT: 7mW/kg

Page: 7/10

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

5.4 ISOTROPY


HL900 MHz

- Axial isotropy: 0.04 dB
- Hemispherical isotropy: 0.07 dB

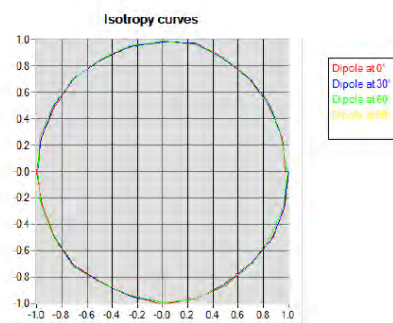

HL1800 MHz

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.08 dB

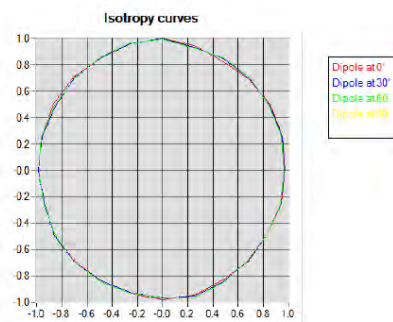




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

HL5600 MHz

- Axial isotropy: 0.06 dB
- Hemispherical isotropy: 0.08 dB

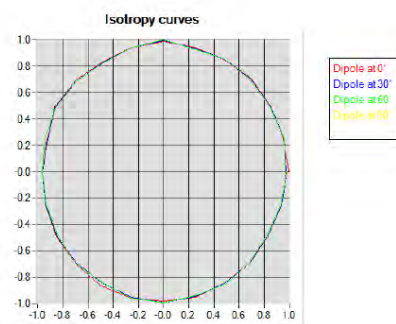



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.260.1.18.SATU.A

6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2016	02/2019
Reference Probe	MVG	EP 94 SN 37/08	10/2017	10/2018
Multimeter	Keithley 2000	1188656	01/2017	01/2020
Signal Generator	Agilent E4438C	MY49070581	01/2017	01/2020
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	01/2017	01/2020
Power Sensor	HP ECP-E26A	US37181460	01/2017	01/2020
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Control Company	150798832	11/2017	11/2020



SAR Reference Dipole Calibration Report

Ref : ACR.109.2.18.SATU.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 835 MHZ

SERIAL NO.: SN 03/15 DIP 0G835-347

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 04/19/2018

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.2.18.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	4/19/2018	
Checked by :	Jérôme LUC	Product Manager	4/19/2018	
Approved by :	Kim RUTKOWSKI	Quality Manager	4/19/2018	

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Date	Modifications
A	4/19/2018	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.2.18.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.2.18.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 835 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID835
Serial Number	SN 03/15 DIP 0G835-347
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.2.18.SATU.A

4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.109.2.18.SATU.A

10 g

20.1 %


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

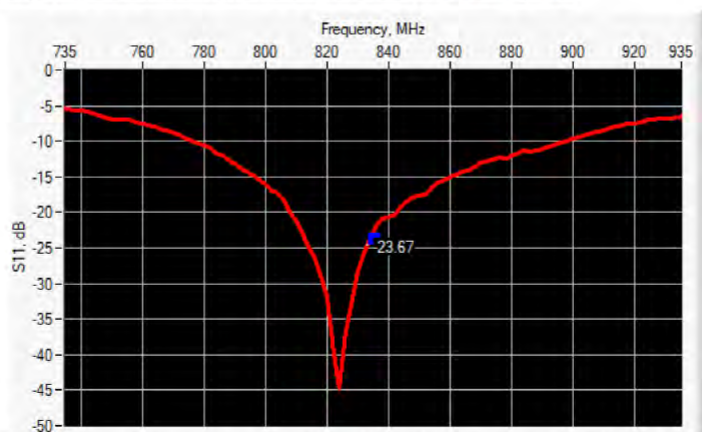

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
835	-23.67	-20	56.8 Ω - 1.5 j Ω

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

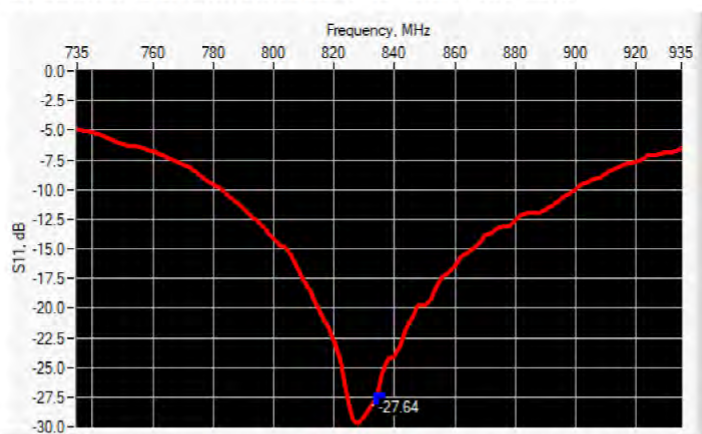

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
835	-27.64	-20	53.5 Ω + 2.3 j Ω

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 $\pm$ 1 %.		250.0 $\pm$ 1 %.		6.35 $\pm$ 1 %.	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.2.18.SATU.A

450	290.0 ±1 %		166.7 ±1 %		6.35 ±1 %	
750	176.0 ±1 %		100.0 ±1 %		6.35 ±1 %	
835	161.0 ±1 %	PASS	89.8 ±1 %	PASS	3.6 ±1 %	PASS
900	149.0 ±1 %		83.3 ±1 %		3.6 ±1 %	
1450	89.1 ±1 %		51.7 ±1 %		3.6 ±1 %	
1500	80.5 ±1 %		50.0 ±1 %		3.6 ±1 %	
1640	79.0 ±1 %		45.7 ±1 %		3.6 ±1 %	
1750	75.2 ±1 %		42.9 ±1 %		3.6 ±1 %	
1800	72.0 ±1 %		41.7 ±1 %		3.6 ±1 %	
1900	68.0 ±1 %		39.5 ±1 %		3.6 ±1 %	
1950	66.3 ±1 %		38.5 ±1 %		3.6 ±1 %	
2000	64.5 ±1 %		37.5 ±1 %		3.6 ±1 %	
2100	61.0 ±1 %		35.7 ±1 %		3.6 ±1 %	
2300	55.5 ±1 %		32.6 ±1 %		3.6 ±1 %	
2450	51.5 ±1 %		30.4 ±1 %		3.6 ±1 %	
2600	48.5 ±1 %		28.8 ±1 %		3.6 ±1 %	
3000	41.5 ±1 %		25.0 ±1 %		3.6 ±1 %	
3500	37.0 ±1 %		26.4 ±1 %		3.6 ±1 %	
3700	34.7 ±1 %		26.4 ±1 %		3.6 ±1 %	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %	PASS	0.90 ±5 %	PASS
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.2.18.SATU.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: ϵ_p : 40.0 σ : 0.90
Distance between dipole center and liquid	15.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	835 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56	9.55 (0.95)	6.22	6.10 (0.61)
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11



This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.2.18.SATU.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	
3700	67.4		24.2	

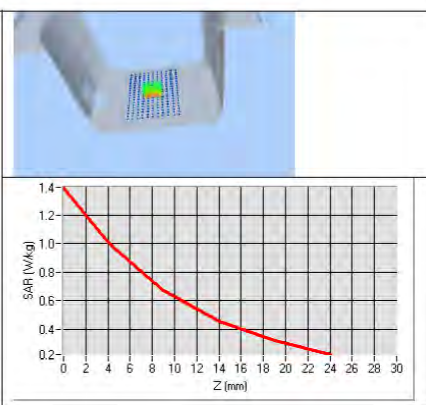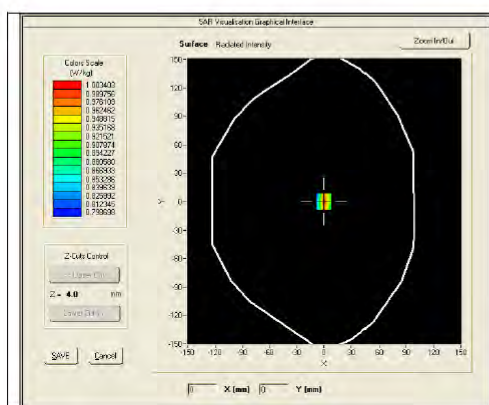

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 $\pm$ 5 %		0.80 $\pm$ 5 %	
300	58.2 $\pm$ 5 %		0.92 $\pm$ 5 %	
450	56.7 $\pm$ 5 %		0.94 $\pm$ 5 %	
750	55.5 $\pm$ 5 %		0.96 $\pm$ 5 %	
835	55.2 $\pm$ 5 %	PASS	0.97 $\pm$ 5 %	PASS
900	55.0 $\pm$ 5 %		1.05 $\pm$ 5 %	
915	55.0 $\pm$ 5 %		1.06 $\pm$ 5 %	
1450	54.0 $\pm$ 5 %		1.30 $\pm$ 5 %	
1610	53.8 $\pm$ 5 %		1.40 $\pm$ 5 %	
1800	53.3 $\pm$ 5 %		1.52 $\pm$ 5 %	
1900	53.3 $\pm$ 5 %		1.52 $\pm$ 5 %	
2000	53.3 $\pm$ 5 %		1.52 $\pm$ 5 %	
2100	53.2 $\pm$ 5 %		1.62 $\pm$ 5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.109.2.18.SATU.A

2300	52.9 ±5 %		1.81 ±5 %	
2450	52.7 ±5 %		1.95 ±5 %	
2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
3700	51.0 ±5 %		3.55 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: ϵ_p : 57.5 σ : 0.96
Distance between dipole center and liquid	15.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	835 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
835	9.83 (0.98)	6.45 (0.64)

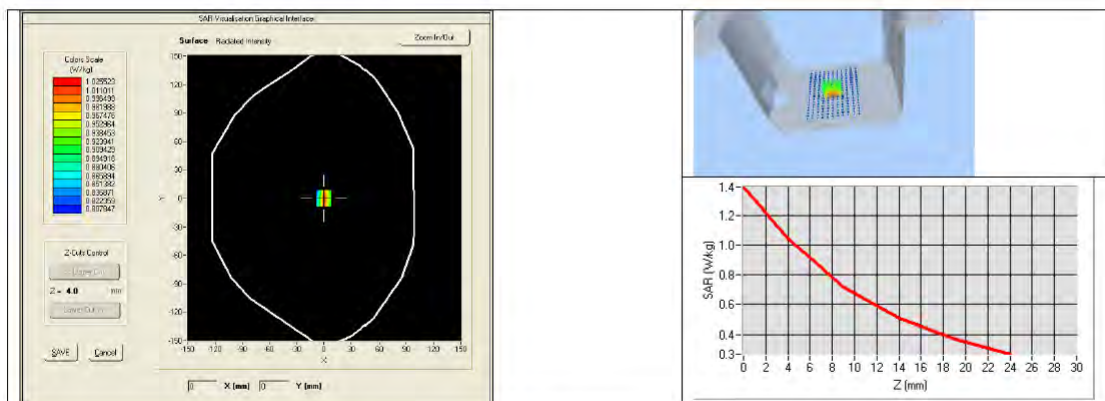

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.2.18.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2016	02/2019
Calipers	Carrera	CALIPER-01	01/2017	01/2020
Reference Probe	MVG	EPG122 SN 18/11	10/2017	10/2018
Multimeter	Keithley 2000	1188656	01/2017	01/2020
Signal Generator	Agilent E4438C	MY49070581	01/2017	01/2020
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	01/2017	01/2020
Power Sensor	HP ECP-E26A	US37181460	01/2017	01/2020
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	150798832	11/2017	11/2020



SAR Reference Dipole Calibration Report

Ref : ACR.109.7.18.SATU.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA

MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 2450 MHZ

SERIAL NO.: SN 03/15 DIP 2G450-352

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 04/19/2018

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.7.18.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	4/19/2018	
Checked by :	Jérôme LUC	Product Manager	4/19/2018	
Approved by :	Kim RUTKOWSKI	Quality Manager	4/19/2018	

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Date	Modifications
A	4/19/2018	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.7.18.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.7.18.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2450 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2450
Serial Number	SN 03/15 DIP 2G450-352
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.109.7.18.SATU.A

4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.109.7.18.SATU.A

10 g

20.1 %


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

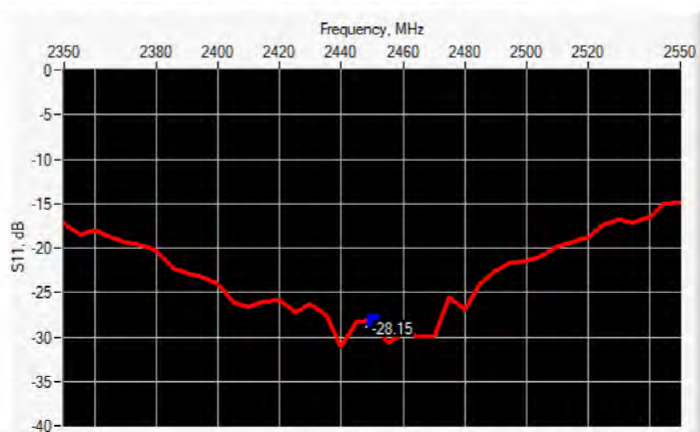

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2450	-28.15	-20	$53.9 \Omega + 0.3 j\Omega$

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

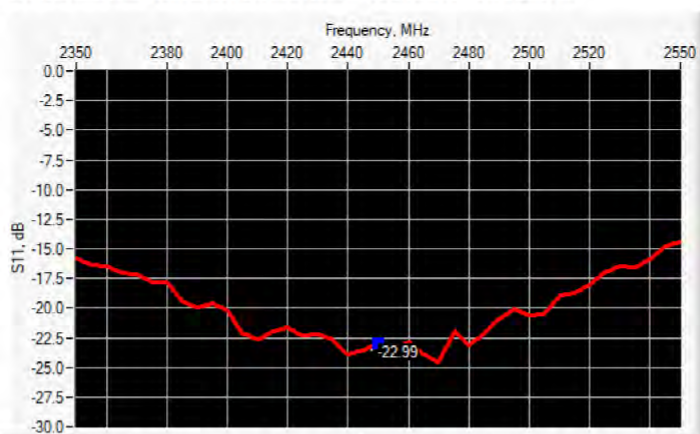

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2450	-22.99	-20	$57.6 \Omega - 0.8 j\Omega$

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	$420.0 \pm 1 \%$		$250.0 \pm 1 \%$		$6.35 \pm 1 \%$	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.