

FCC RADIO TEST REPORT

FCC ID: 2ASILWIFIWALL5

Product : Wifiwall

Trade Mark : N/A

Model Name : Wifiwall 5GHZ Dome

Family Model : Wifiwall 5GHZ Traveller

Report No. : S19102502305004

Prepared for

Wifi wall Ltd

ShlomoTouboulBe'er ha-Mayim 9 City Kfar Haim,4294500 Israel

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an

District Shenzhen, Guangdong, China

Tel.: +86-755-6115 6588

Fax.: +86-755-6115 6599

Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name** : Wifi wall Ltd

Address : ShlomoTouboulBe'er ha-Mayim 9 City Kfar Haim,4294500 Israel

Manufacturer's Name : Shenzhen Xunlong Software CO.,LimitedAddress : Room 201, 218-223, Area 2, Block B, Shenzhen-Mingyou
Purchasing Certer,Baoyuan Road, XixiangStreet,Bao'an,
Shenzhen, Guangdong, China**Product description**

Product name..... : Wifiwall

Model and/or type reference : Wifiwall 5GHZ Dome

Family Model..... : Wifiwall 5GHZ Traveller

Standards : FCC Part15.407Test procedure ANSI C63.10-2013 and KDB 789033 D02 General UNII Test
Procedures New Rules v02r01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.


Date of Test

Date (s) of performance of tests..... 14 Nov. 2019 ~ 19 Dec. 2019

Date of Issue..... 20 Dec. 2019


Test Result..... **Pass**

Testing Engineer : _____




(Mary Hu)

Technical Manager : _____



(Jason Chen)

Authorized Signatory : _____



(Sam Chen)

Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	5
1.1 FACILITIES AND ACCREDITATIONS	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . TEST REQUIREMENTS	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	19
3.3 POWER SPECTRAL DENSITY TEST	46
3.4 26DB & 99% EMISSION BANDWIDTH	49
3.5 MINIMUM 6 DB BANDWIDTH	52
3.6 MAXIMUM CONDUCTED OUTPUT POWER	54
3.7 OUT OF BAND EMISSIONS	57
3.8 SPURIOUS RF CONDUCTED EMISSIONS	59
3.9 FREQUENCY STABILITY MEASUREMENT	60
4 . ANTENNA REQUIREMENT	66
4.1 STANDARD REQUIREMENT	66
4.2 EUT ANTENNA	66
5 . TEST RESULTS	67
5.1 DUTY CYCLE	67
5.2 MAXIMUM CONDUCTED OUTPUT POWER	83
5.3 OCCUPIED CHANNEL BANDWIDTH	84
5.4 -6DB EMISSION BANDWIDTH	114
5.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL	122
5.6 BAND EDGE	138
5.7CONDUCTED RF SPURIOUS EMISSION	152

Revision History

Report No.	Version	Description	Issued Date
S19102502305004	Rev.01	Initial issue of report	20 Dec. 2019

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen
518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and
CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A.

CAB identifier:CN0074

FCC- Accredited Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized
International Standard ISO/IEC 17025:2005 General requirements for the
competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined
scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R. China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a
standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of
approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wifiwall	
Trade Mark	N/A	
Model Name	Wifiwall 5GHZ Dome	
Family Model	Wifiwall 5GHZ Traveller	
Model Difference	All models are the same circuit and RF module, except the antenna, antenna type and power supply.	
FCC ID	2ASILWIFIWALL5	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac(20MHz channel bandwidth) ☒ 802.11n/ac(40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; ☒ 5745-5825 MHz for 802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40; 5775MHz for 802.11 ac80;
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band 1 channels for 802.11 ac80 in the 5775MHz band ;
	Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P ☒ Client device
	Antenna Type	Wifiwall 5GHZ Dome: SMA Male Reverse Antenna Wifiwall 5GHZ Traveller: FPCB Antenna
	Antenna Gain	Wifiwall 5GHZ Dome: 5dBi Wifiwall 5GHZ Traveller: 3dBi
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Ratings	Wifiwall 5GHZ Dome: DC 5V from USB Port Wifiwall 5GHZ Traveller: DC 3.7V/1200mAh from battery or DC 5V from USB port	
Adapter	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	wifiwall A50 v1.2	
SW Version	wifiwall ubuntu 16.04 v1.7	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11a/n(20MHz) band I (5180-5240MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11n(40MHz) band I (5190-5230MHz):

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

Frequency and Channel list for 802.11ac(80MHz) band I (5210MHz):

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

Frequency and Channel list for 802.11a/n(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n(40MHz) band IV (5755-5795MHz):

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

Frequency and Channel list for 802.11ac(80MHz) band IV (5775MHz):

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 4	802.11 ac80 CH 42/CH 155


For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 4	802.11 ac80 CH 42/CH 155

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

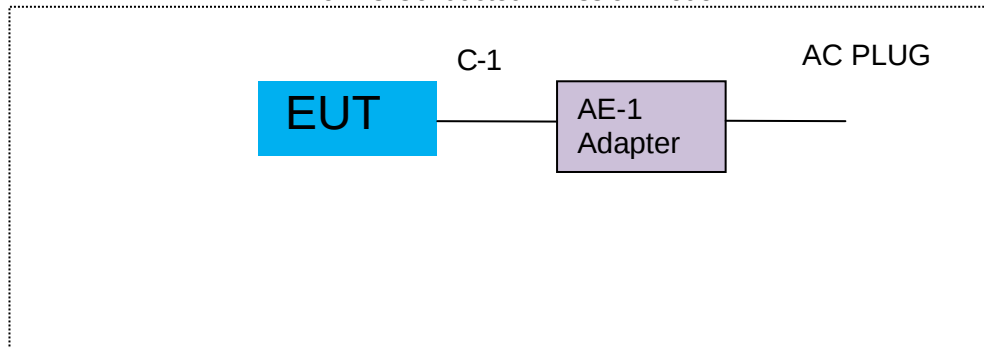

For Radiated Test Cases

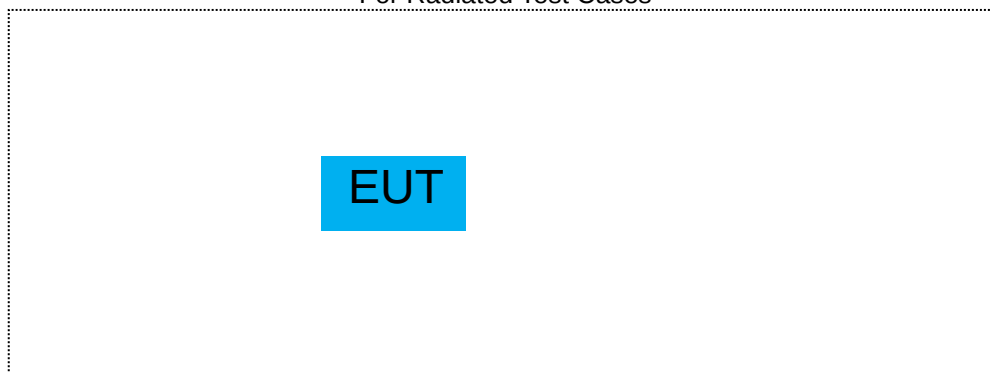

For Conducted Test Cases

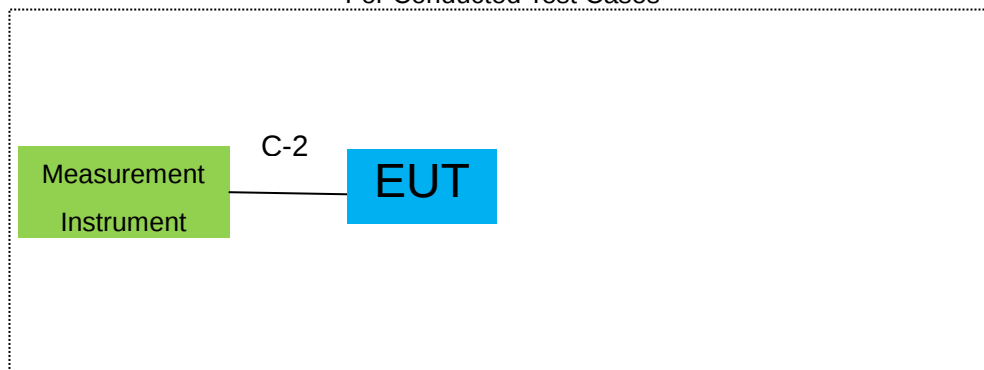

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.
EUT built-in battery-powered, the battery is fully-charged.

2.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	Power Cable	NO	YES	1.5m	C-1
C-2	RF Cable	YES	NO	0.1m	C-2

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2019.05.13	2020.05.12	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2019.08.28	2020.08.27	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2019.08.28	2020.08.27	1 year
4	Test Receiver	R&S	ESPI7	101318	2019.05.13	2020.05.12	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2019.04.15	2020.04.14	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2018.05.19	2020.05.18	2 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2019.04.15	2020.04.14	1 year
8	Amplifier	EMC	EMC051835SE	980246	2019.08.06	2020.08.05	1 year
9	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2019.11.18	2020.11.17	1 year
10	Power Meter	DARE	RPR3006W	15100041SN084	2019.08.06	2020.08.05	1 year
11	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
12	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
13	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2017.04.21	2020.04.20	3 year
15	Filter	TRILTHIC	2400MHz	29	2017.04.19	2020.04.18	3 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A
17	Low Noise Amplifier	B&Z	BZ-P540-550850-452727	16476-11729	2019.04.15	2020.04.14	1 year
18	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2019.11.18	2020.11.17	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2019.05.13	2020.05.12	1 year
2	LISN	R&S	ENV216	101313	2019.04.15	2020.04.14	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2019.05.13	2020.05.12	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2018.05.19	2020.05.18	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

3. TEST REQUIREMENTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 Applicable Standard


According to FCC Part 15.207(a).

3.1.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.3 Test Configuration

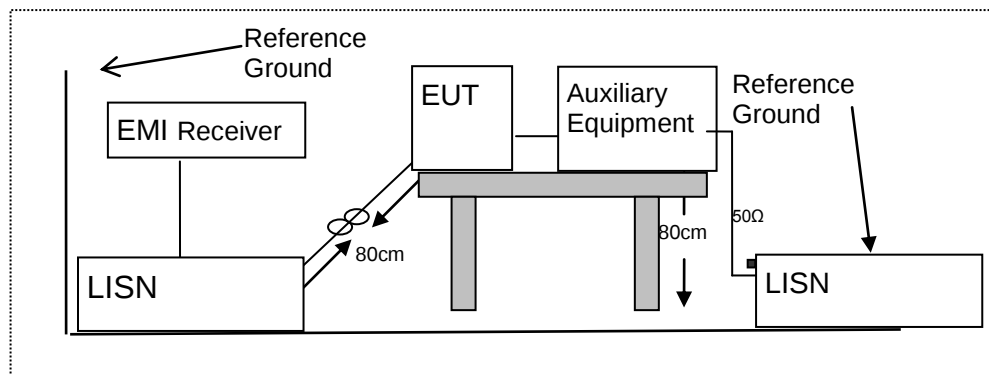

3.1.4 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Margin=Measure-ment-Limits, Measure-ment=Reading level+Correct Factor


Note: The two models(Wifiwall 5GHZ Dome and model Wifiwall 5GHZ Traveller) have been tested, the model Wifiwall 5GHZ Traveller is worst result that it was report as below:

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Traveller
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.4737	20.61	9.74	30.35	56.45	-26.10	QP
0.4737	6.34	9.74	16.08	46.45	-30.37	AVG
0.5655	24.03	9.74	33.77	56.00	-22.23	QP
0.5655	10.11	9.74	19.85	46.00	-26.15	AVG
1.9979	16.72	9.78	26.50	56.00	-29.50	QP
1.9979	4.65	9.78	14.43	46.00	-31.57	AVG
2.7219	18.64	9.80	28.44	56.00	-27.56	QP
2.7219	6.86	9.80	16.66	46.00	-29.34	AVG
3.4580	16.17	9.84	26.01	56.00	-29.99	QP
3.4580	5.61	9.84	15.45	46.00	-30.55	AVG
4.3059	15.16	9.86	25.02	56.00	-30.98	QP
4.3059	5.93	9.86	15.79	46.00	-30.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

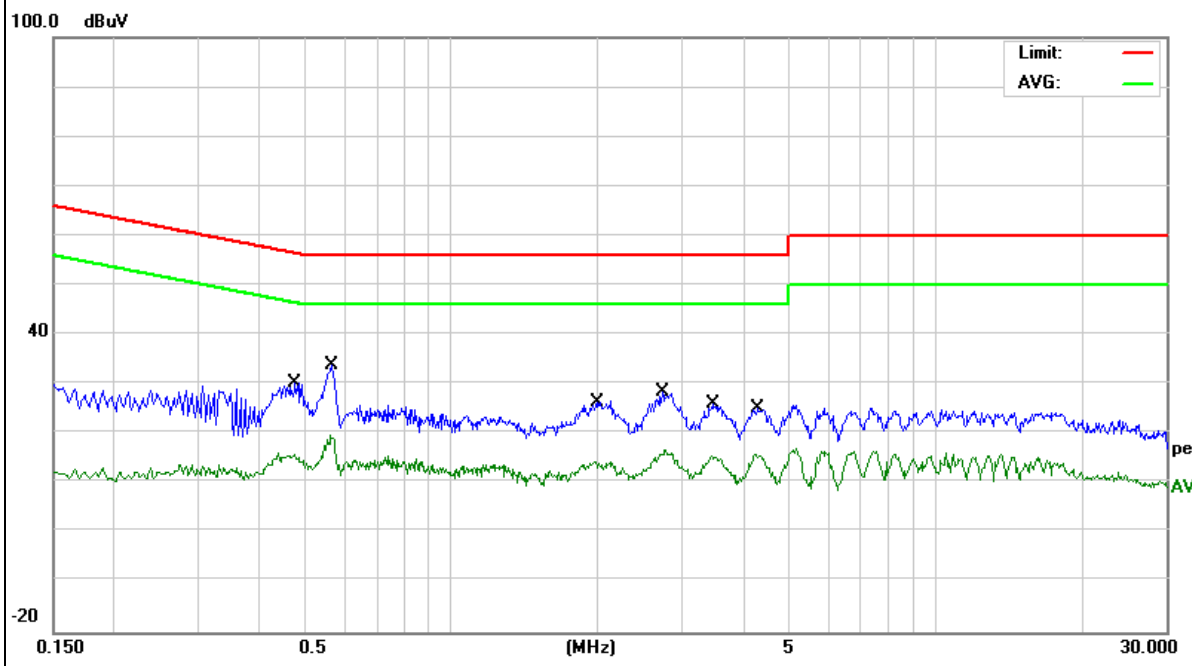


EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Traveller
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.4661	25.63	9.75	35.38	56.58	-21.20	QP
0.4661	22.16	9.75	31.91	46.58	-14.67	AVG
0.5655	28.52	9.75	38.27	56.00	-17.73	QP
0.5655	24.80	9.75	34.55	46.00	-11.45	AVG
0.9340	23.36	9.75	33.11	56.00	-22.89	QP
0.9340	18.10	9.75	27.85	46.00	-18.15	AVG
1.2459	22.57	9.75	32.32	56.00	-23.68	QP
1.2459	18.03	9.75	27.78	46.00	-18.22	AVG
1.9616	21.73	9.79	31.52	56.00	-24.48	QP
1.9616	17.37	9.79	27.16	46.00	-18.84	AVG
2.6299	20.09	9.83	29.92	56.00	-26.08	QP
2.6299	16.47	9.83	26.30	46.00	-19.70	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

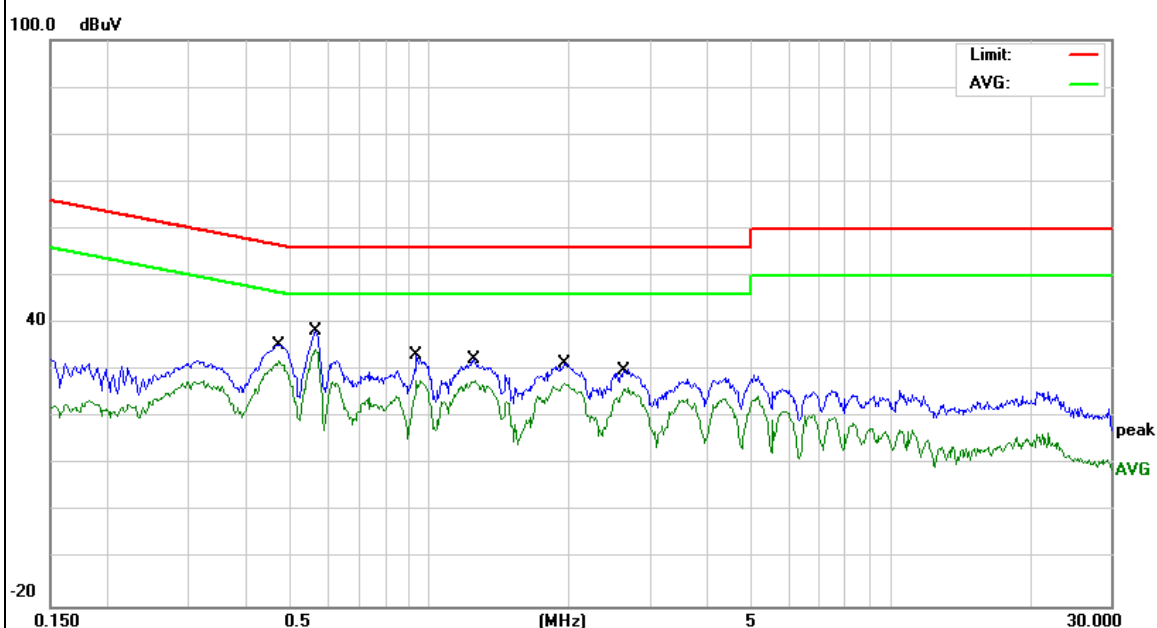


EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.4737	18.11	9.74	27.85	56.45	-28.60	QP
0.4737	3.47	9.74	13.21	46.45	-33.24	AVG
0.5655	20.53	9.74	30.27	56.00	-25.73	QP
0.5655	7.11	9.74	16.85	46.00	-29.15	AVG
1.9979	16.72	9.78	26.50	56.00	-29.50	QP
1.9979	5.15	9.78	14.93	46.00	-31.07	AVG
2.7219	15.14	9.80	24.94	56.00	-31.06	QP
2.7219	3.36	9.80	13.16	46.00	-32.84	AVG
3.4580	15.67	9.84	25.51	56.00	-30.49	QP
3.4580	4.95	9.84	14.79	46.00	-31.21	AVG
4.3059	14.16	9.86	24.02	56.00	-31.98	QP
4.3059	4.93	9.86	14.79	46.00	-31.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

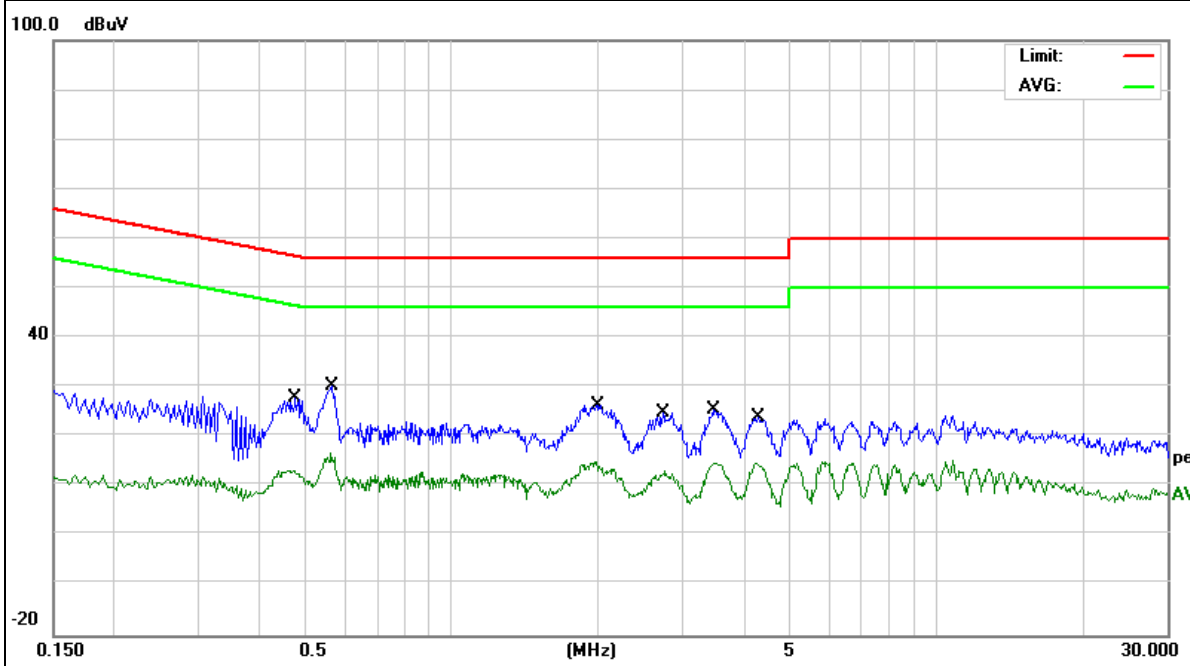


EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.3339	22.58	9.74	32.32	59.35	-27.03	QP
0.3339	18.05	9.74	27.79	49.35	-21.56	AVG
0.4620	23.00	9.75	32.75	56.66	-23.91	QP
0.4620	19.06	9.75	28.81	46.66	-17.85	AVG
0.5655	25.02	9.75	34.77	56.00	-21.23	QP
0.5655	21.33	9.75	31.08	46.00	-14.92	AVG
0.9415	23.05	9.75	32.80	56.00	-23.20	QP
0.9415	17.67	9.75	27.42	46.00	-18.58	AVG
2.0539	19.44	9.79	29.23	56.00	-26.77	QP
2.0539	15.37	9.79	25.16	46.00	-20.84	AVG
3.6179	19.68	9.90	29.58	56.00	-26.42	QP
3.6179	15.49	9.90	25.39	46.00	-20.61	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

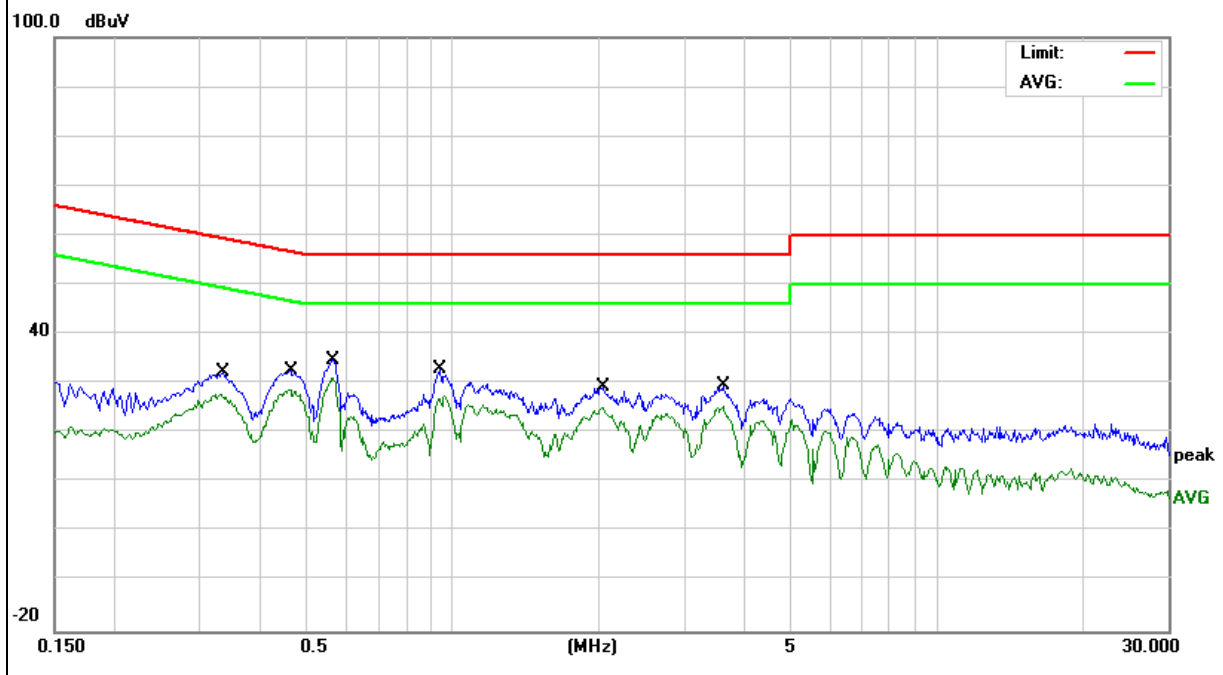

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 Applicable Standard

According to FCC Part 15.407(d) and 15.209

3.2.2 Conformance Limit

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 Test Configuration


(a) For radiated emissions below 30MHz

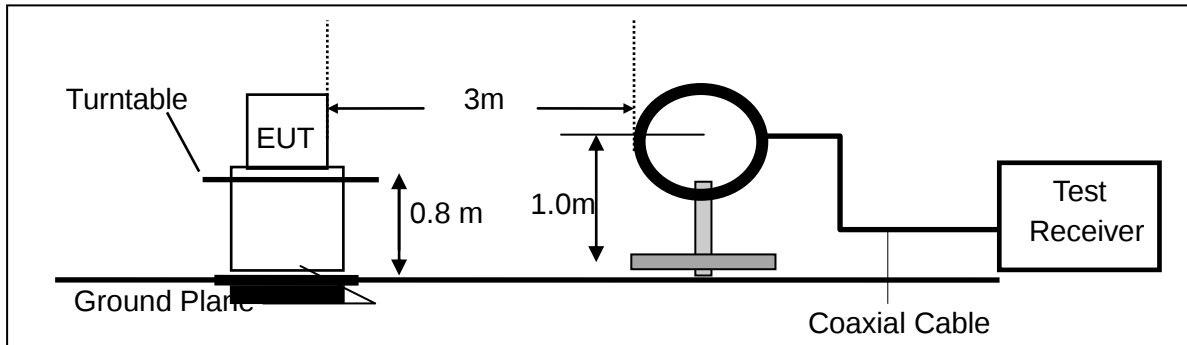

(b) For radiated emissions from 30MHz to 1000MHz

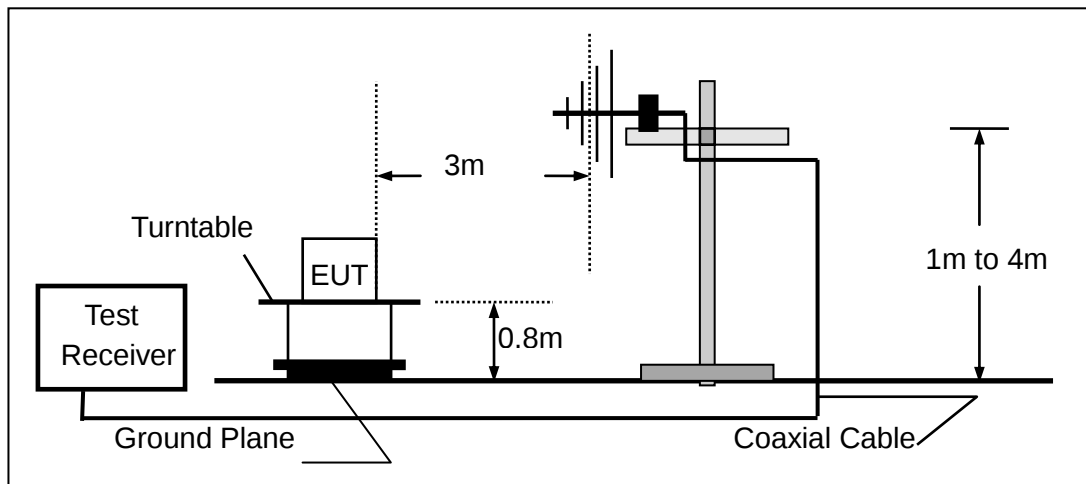

(c) For radiated emissions above 1000MHz

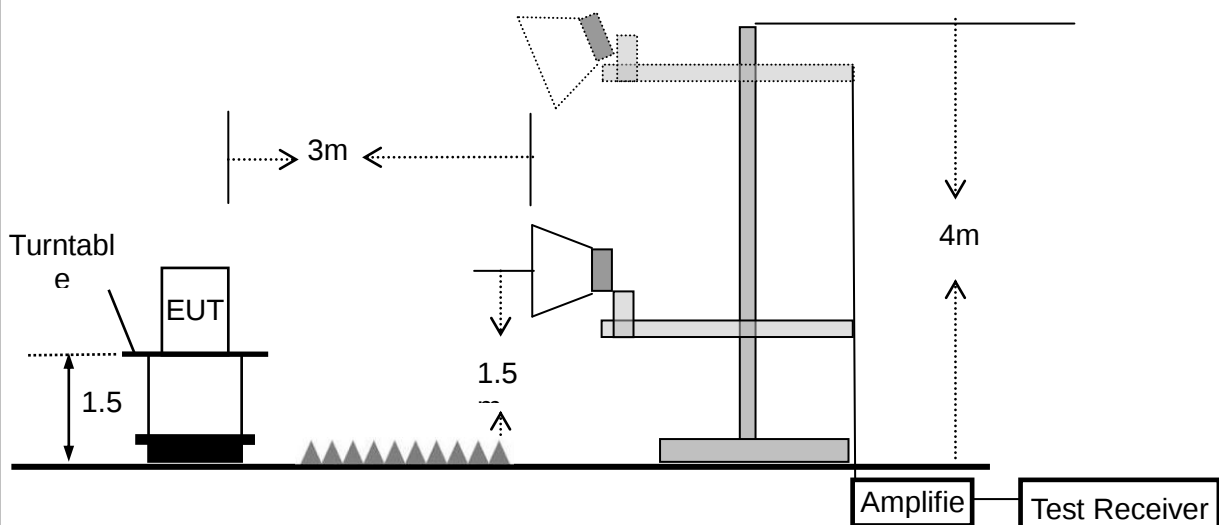

3.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (9KHz – 30 MHz)

EUT:	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


3.2.7 TEST RESULTS (30MHz – 1GHz)

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.2G)- 802.11a (Mid CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	49.1865	15.32	9.68	25.00	40.00	-15.00	QP
V	101.6443	15.28	11.18	26.46	43.50	-17.04	QP
V	202.1005	20.41	8.89	29.30	43.50	-14.20	QP
V	550.9479	8.45	22.50	30.95	46.00	-15.05	QP
V	651.9415	10.47	22.32	32.79	46.00	-13.21	QP
V	851.0353	9.63	25.78	35.41	46.00	-10.59	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

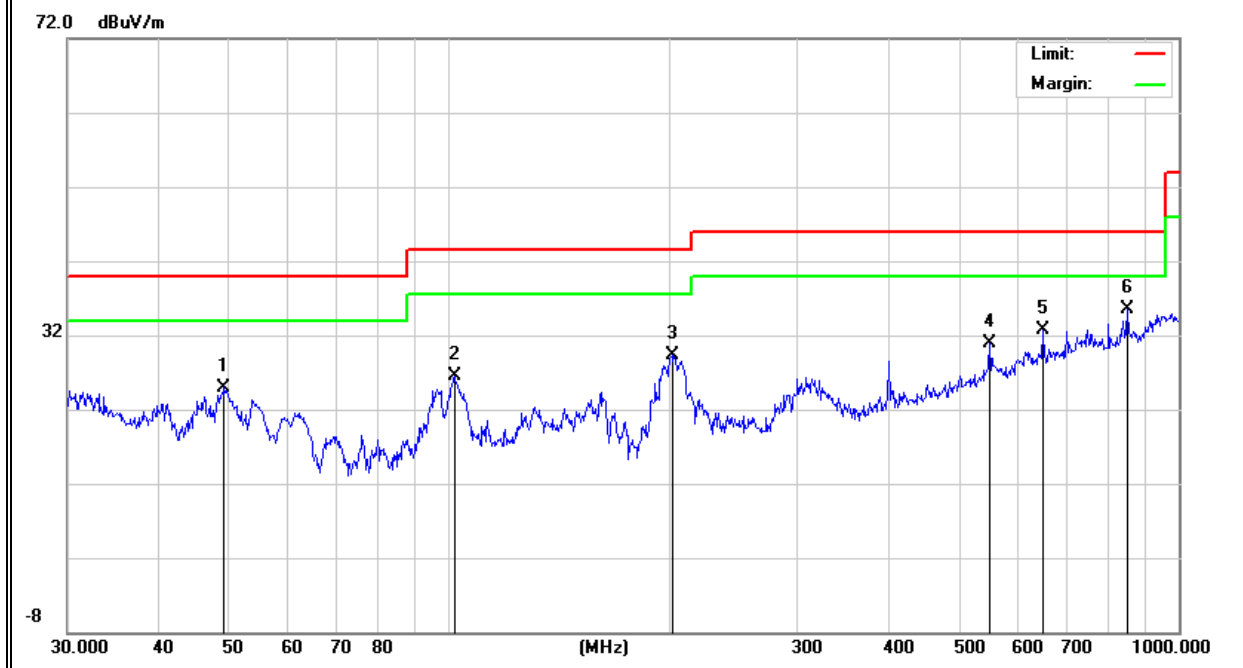

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	31.6202	5.54	17.99	23.53	40.00	-16.47	QP
H	325.5957	16.17	15.10	31.27	46.00	-14.73	QP
H	400.4318	17.53	17.90	35.43	46.00	-10.57	QP
H	651.9415	10.22	22.32	32.54	46.00	-13.46	QP
H	750.1082	8.51	24.95	33.46	46.00	-12.54	QP
H	851.0353	8.74	25.78	34.52	46.00	-11.48	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

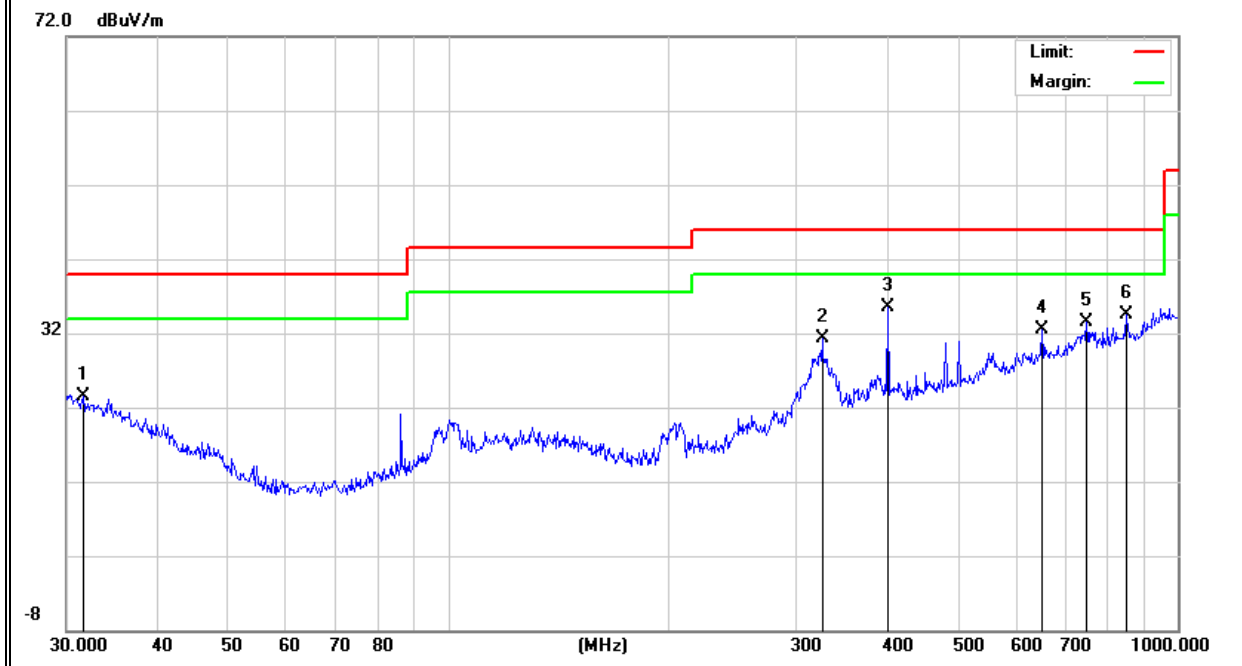


EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Traveller
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX(5.2G)- 802.11a (Mid CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	92.7870	20.89	10.22	31.11	43.50	-12.39	QP
V	100.9338	19.86	11.14	31.00	43.50	-12.50	QP
V	191.0738	24.42	8.88	33.30	43.50	-10.20	QP
V	327.8872	18.34	15.15	33.49	46.00	-12.51	QP
V	550.9479	10.25	22.50	32.75	46.00	-13.25	QP
V	739.6603	7.94	25.11	33.05	46.00	-12.95	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

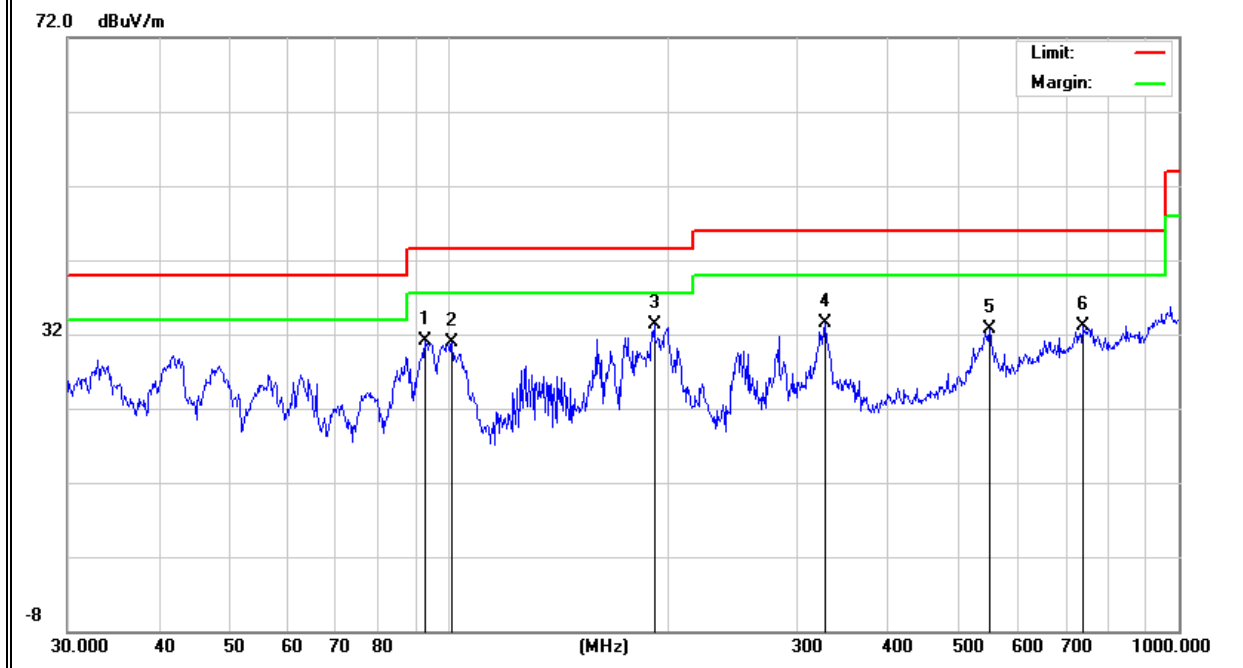

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	98.8324	17.62	10.78	28.40	43.50	-15.10	QP
H	325.5957	18.24	15.10	33.34	46.00	-12.66	QP
H	387.9920	10.33	17.20	27.53	46.00	-18.47	QP
H	543.2740	8.62	21.85	30.47	46.00	-15.53	QP
H	716.6820	7.13	23.86	30.99	46.00	-15.01	QP
H	922.5157	6.83	27.24	34.07	46.00	-11.93	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

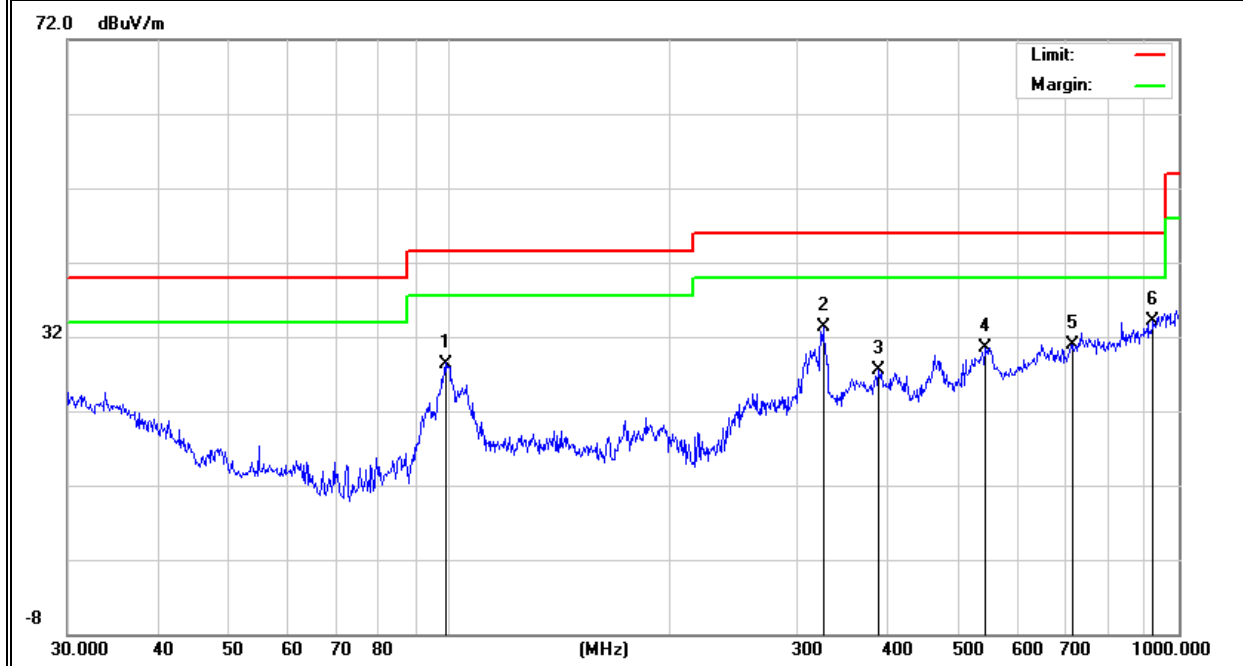


EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.8G) - 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	49.1865	19.32	9.68	29.00	40.00	-11.00	QP
V	101.6443	17.28	11.18	28.46	43.50	-15.04	QP
V	202.1005	21.91	8.89	30.80	43.50	-12.70	QP
V	308.9125	13.94	14.82	28.76	46.00	-17.24	QP
V	651.9415	12.47	22.32	34.79	46.00	-11.21	QP
V	851.0353	10.63	25.78	36.41	46.00	-9.59	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

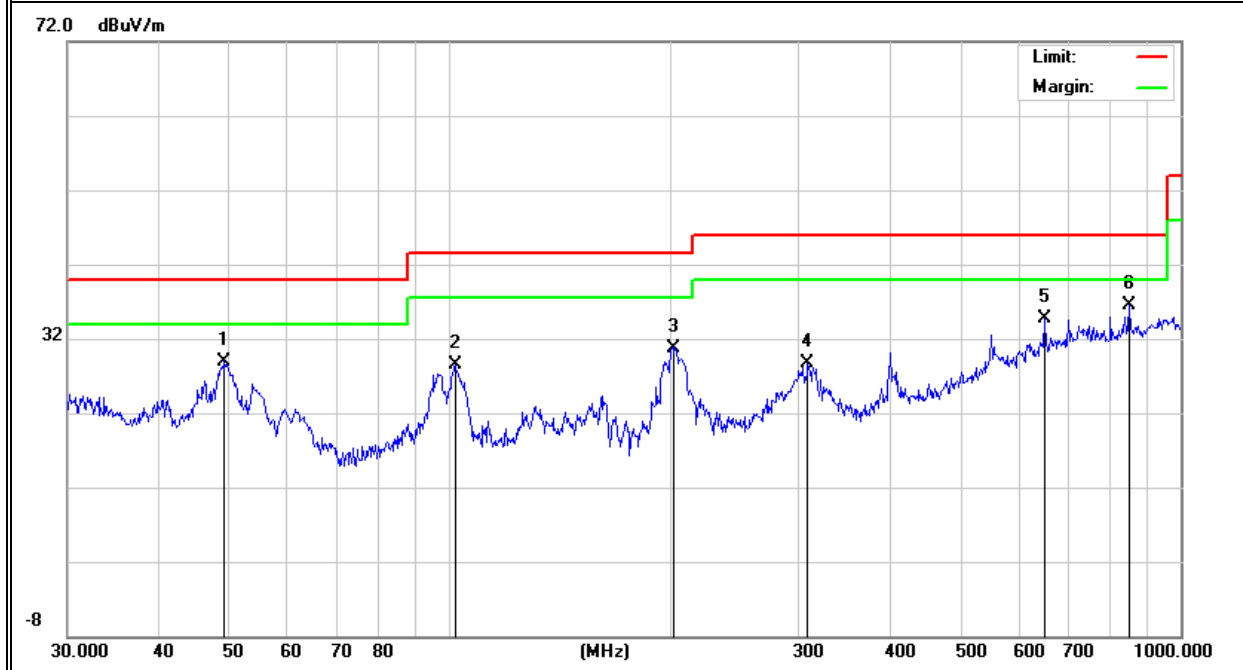

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	31.6202	7.54	17.99	25.53	40.00	-14.47	QP
H	325.5957	17.67	15.10	32.77	46.00	-13.23	QP
H	400.4318	19.03	17.90	36.93	46.00	-9.07	QP
H	651.9415	11.72	22.32	34.04	46.00	-11.96	QP
H	750.1082	10.01	24.95	34.96	46.00	-11.04	QP
H	925.7563	8.25	27.45	35.70	46.00	-10.30	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

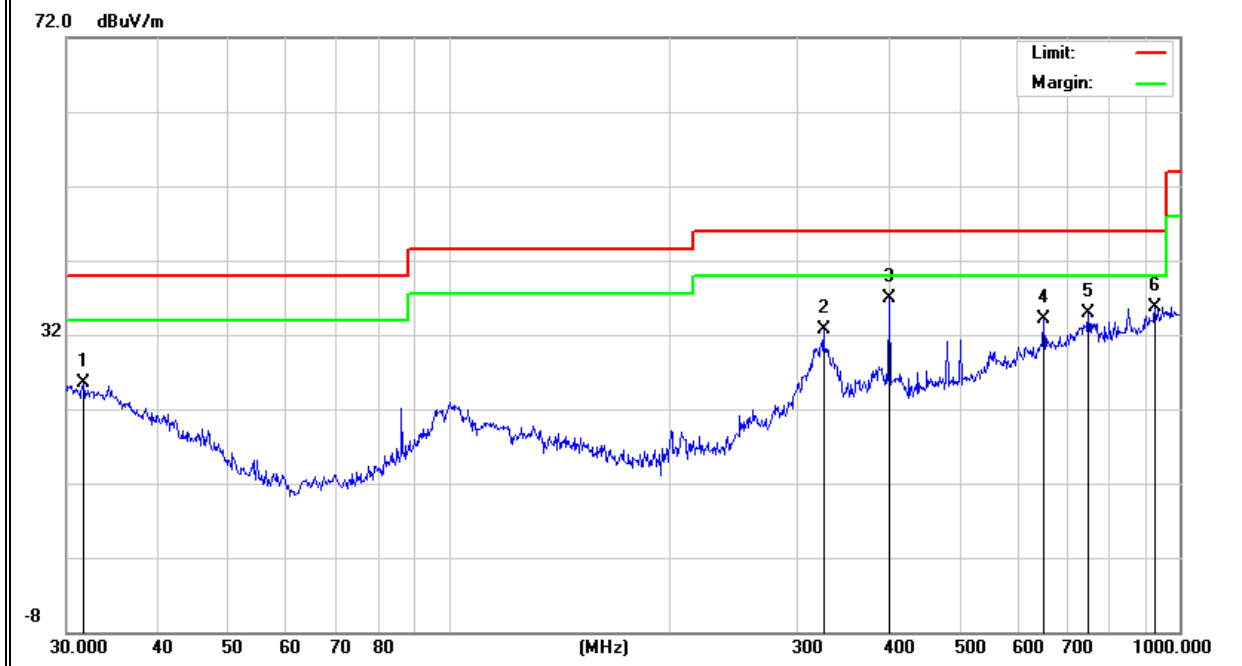


EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Traveller
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX(5.8G) - 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	34.1561	12.47	16.65	29.12	40.00	-10.88	QP
V	100.9338	22.86	11.14	34.00	43.50	-9.50	QP
V	159.2247	21.92	10.86	32.78	43.50	-10.72	QP
V	191.0738	24.92	8.88	33.80	43.50	-9.70	QP
V	282.9852	20.37	14.83	35.20	46.00	-10.80	QP
V	539.4773	10.61	21.46	32.07	46.00	-13.93	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

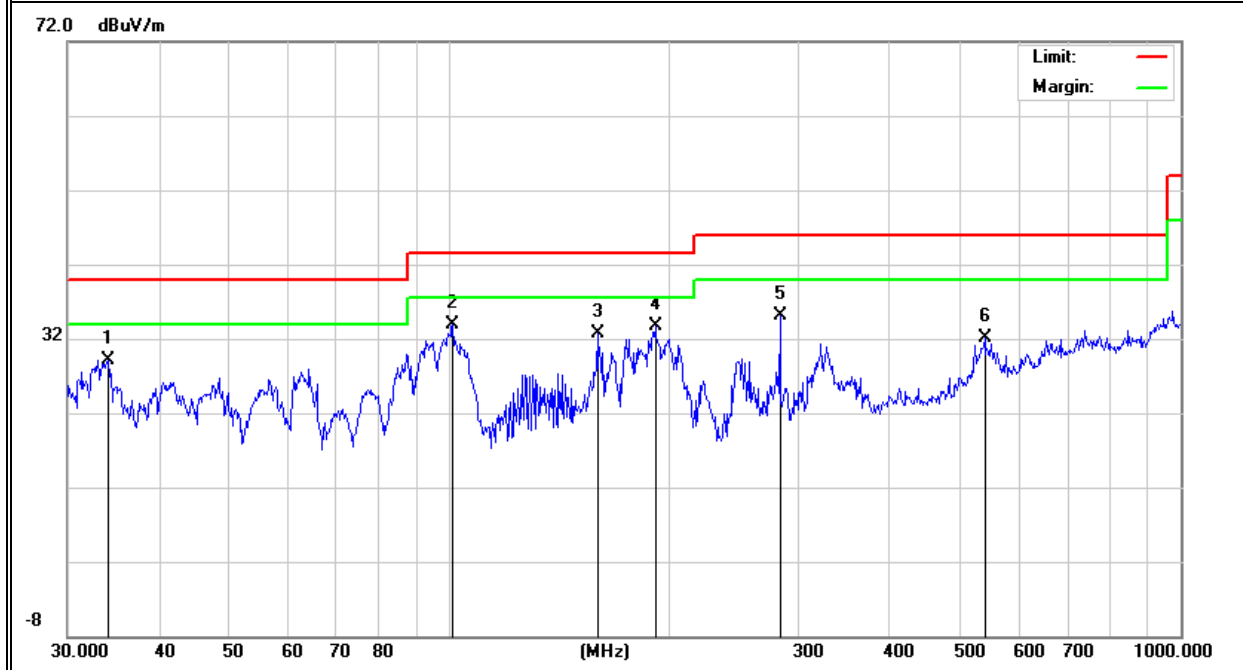

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	49.1865	15.32	9.68	25.00	40.00	-15.00	QP
H	101.6443	15.28	11.18	26.46	43.50	-17.04	QP
H	202.1005	20.41	8.89	29.30	43.50	-14.20	QP
H	550.9479	8.45	22.50	30.95	46.00	-15.05	QP
H	651.9415	10.47	22.32	32.79	46.00	-13.21	QP
H	851.0353	9.63	25.78	35.41	46.00	-10.59	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

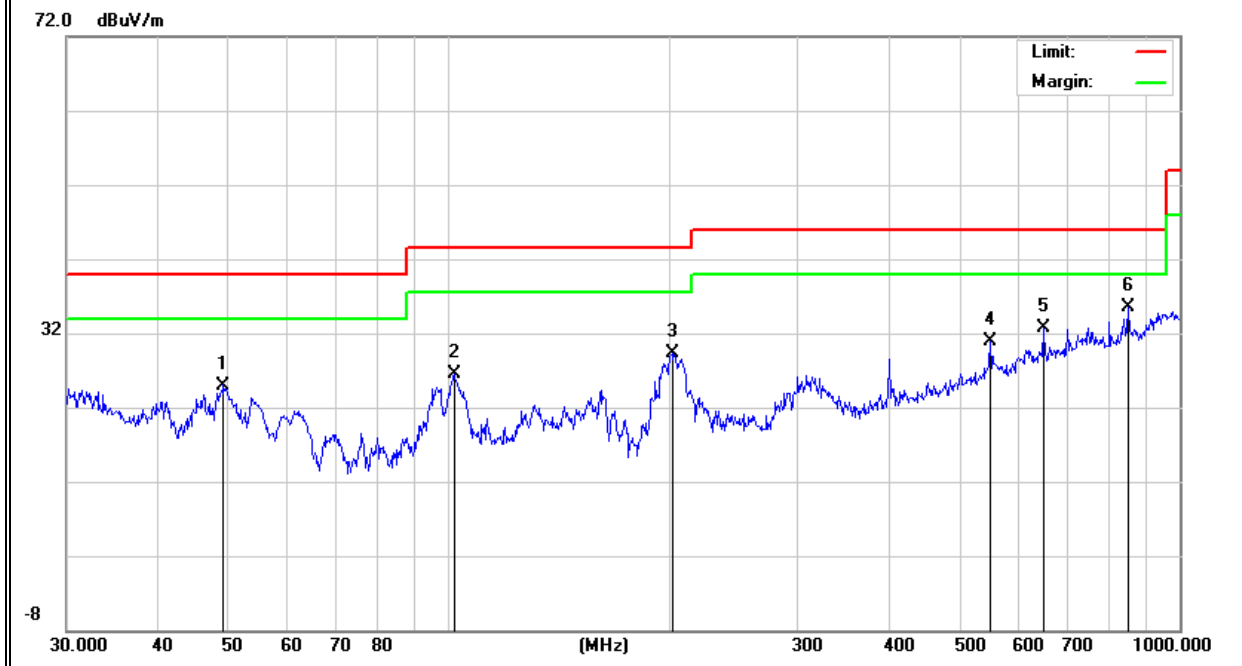

3.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX(5.2G) - 802.11a_5150~5250MHz		

Polar	Frequency	Meter Reading	Cable Loss	Antenn Factor	Pream Factor	Emission Level	Limits	Margin	Detect Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	2061.41	60.00	5.94	35.4	44	57.34	74	-16.66	Pk
Vertical	2061.41	44.02	5.94	35.4	44	41.36	54	-12.64	AV
Vertical	10360	58.33	8.46	39.75	44.5	62.04	74	-11.96	Pk
Vertical	10360	39.90	8.46	39.75	44.5	43.61	54	-10.39	AV
Vertical	15540	56.81	10.12	38.8	44.1	61.63	74	-12.37	Pk
Vertical	15540	39.09	10.12	38.8	42.7	45.31	54	-8.69	AV
Horizontal	2648.84	57.00	5.94	35.18	44	54.12	74	-19.88	Pk
Horizontal	2648.84	41.77	5.94	35.18	44	38.89	54	-15.11	AV
Horizontal	10360	57.00	8.46	38.71	44.5	59.67	74	-14.33	Pk
Horizontal	10360	36.45	8.46	38.71	44.5	39.12	54	-14.88	AV
Horizontal	15540	57.02	10.12	38.38	44.1	61.42	74	-12.58	Pk
Horizontal	15540	38.56	10.12	38.38	44.1	42.96	54	-11.04	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	2063.3	59.89	7.1	37.24	43.5	60.73	74	-13.27	Pk
Vertical	2063.3	43.57	7.1	37.24	43.5	44.41	54	-9.59	AV
Vertical	10400	58.83	8.46	37.68	44.5	60.47	74	-13.53	Pk
Vertical	10400	40.80	8.46	37.68	44.5	42.44	54	-11.56	AV
Vertical	15600	57.48	10.12	38.8	44.1	62.30	74	-11.70	Pk
Vertical	15600	38.08	10.12	38.8	42.7	44.30	54	-9.70	AV
Horizontal	2741.15	60.22	7.1	37.24	43.5	61.06	74	-12.94	Pk
Horizontal	2741.15	42.55	7.1	37.24	43.5	43.39	54	-10.61	AV
Horizontal	10400	58.37	8.46	38.57	44.5	60.90	74	-13.10	Pk
Horizontal	10400	43.76	8.46	38.57	44.5	46.29	54	-7.71	AV
Horizontal	15600	57.38	10.12	38.38	44.1	61.78	74	-12.22	Pk
Horizontal	15600	39.80	10.12	38.38	44.1	44.20	54	-9.80	AV
High Channel (5240 MHz)-Above 1G									
Vertical	2063.46	60.02	7.1	37.24	43.5	60.86	74	-13.14	Pk
Vertical	2063.46	45.50	7.1	37.24	43.5	46.34	54	-7.66	AV
Vertical	10480	59.17	8.46	37.68	44.5	60.81	74	-13.19	Pk
Vertical	10480	40.11	8.46	37.68	44.5	41.75	54	-12.25	AV
Vertical	15720	56.89	10.12	38.8	44.1	61.71	74	-12.29	Pk
Vertical	15720	38.72	10.12	38.8	42.7	44.94	54	-9.06	AV
Horizontal	2743.63	64.08	7.1	37.24	43.5	64.92	74	-9.08	Pk
Horizontal	2746.63	41.93	7.1	37.24	43.5	42.77	54	-11.23	AV
Horizontal	10480	60.41	8.46	38.57	44.5	62.94	74	-11.06	Pk
Horizontal	10480	39.74	8.46	38.57	44.5	42.27	54	-11.73	AV
Horizontal	15720	58.76	10.12	38.38	44.1	63.16	74	-10.84	Pk
Horizontal	15720	40.85	10.12	38.38	44.1	45.25	54	-8.75	AV

Note:"802.11a(5.2G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Traveller
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX(5.2G) - 802.11a _5150~5250MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	2061.41	59.41	5.94	35.4	44	56.75	74	-17.25	Pk
Vertical	2061.41	43.62	5.94	35.4	44	40.96	54	-13.04	AV
Vertical	10360	57.84	8.46	39.75	44.5	61.55	74	-12.45	Pk
Vertical	10360	38.85	8.46	39.75	44.5	42.56	54	-11.44	AV
Vertical	15540	55.41	10.12	38.8	44.1	60.23	74	-13.77	Pk
Vertical	15540	38.85	10.12	38.8	42.7	45.07	54	-8.93	AV
Horizontal	2648.84	56.96	5.94	35.18	44	54.08	74	-19.92	Pk
Horizontal	2648.84	40.11	5.94	35.18	44	37.23	54	-16.77	AV
Horizontal	10360	55.41	8.46	38.71	44.5	58.08	74	-15.92	Pk
Horizontal	10360	35.58	8.46	38.71	44.5	38.25	54	-15.75	AV
Horizontal	15540	56.47	10.12	38.38	44.1	60.87	74	-13.13	Pk
Horizontal	15540	38.41	10.12	38.38	44.1	42.81	54	-11.19	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	2063.3	58.94	7.1	37.24	43.5	59.78	74	-14.22	Pk
Vertical	2063.3	42.51	7.1	37.24	43.5	43.35	54	-10.65	AV
Vertical	10400	57.59	8.46	37.68	44.5	59.23	74	-14.77	Pk
Vertical	10400	39.96	8.46	37.68	44.5	41.6	54	-12.4	AV
Vertical	15600	55.57	10.12	38.8	44.1	60.39	74	-13.61	Pk
Vertical	15600	37.74	10.12	38.8	42.7	43.96	54	-10.04	AV
Horizontal	2741.15	59.98	7.1	37.24	43.5	60.82	74	-13.18	Pk
Horizontal	2741.15	42.51	7.1	37.24	43.5	43.35	54	-10.65	AV
Horizontal	10400	57.74	8.46	38.57	44.5	60.27	74	-13.73	Pk
Horizontal	10400	42.26	8.46	38.57	44.5	44.79	54	-9.21	AV
Horizontal	15600	56.98	10.12	38.38	44.1	61.38	74	-12.62	Pk
Horizontal	15600	38.95	10.12	38.38	44.1	43.35	54	-10.65	AV
High Channel (5240 MHz)-Above 1G									
Vertical	2063.46	58.84	7.1	37.24	43.5	59.68	74	-14.32	Pk
Vertical	2063.46	44.51	7.1	37.24	43.5	45.35	54	-8.65	AV
Vertical	10480	57.95	8.46	37.68	44.5	59.59	74	-14.41	Pk
Vertical	10480	38.62	8.46	37.68	44.5	40.26	54	-13.74	AV
Vertical	15720	56.61	10.12	38.8	44.1	61.43	74	-12.57	Pk
Vertical	15720	37.74	10.12	38.8	42.7	43.96	54	-10.04	AV
Horizontal	2743.63	62.28	7.1	37.24	43.5	63.12	74	-10.88	Pk
Horizontal	2746.63	41.22	7.1	37.24	43.5	42.06	54	-11.94	AV
Horizontal	10480	58.95	8.46	38.57	44.5	61.48	74	-12.52	Pk
Horizontal	10480	38.96	8.46	38.57	44.5	41.49	54	-12.51	AV
Horizontal	15720	57.41	10.12	38.38	44.1	61.81	74	-12.19	Pk
Horizontal	15720	38.95	10.12	38.38	44.1	43.35	54	-10.65	AV

Note:"802.11a(5.2G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.8G) -- 802.11a_5725~5850MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	2603.31	67.88	5.94	35.40	44.00	65.22	74.00	-8.78	Pk
Vertical	2603.31	47.06	5.94	35.40	44.00	44.40	54.00	-9.60	AV
Vertical	11490	59.53	8.46	39.75	44.50	63.24	74.00	-10.76	Pk
Vertical	11490	42.86	8.46	39.75	44.50	46.57	54.00	-7.43	AV
Vertical	17235	57.56	10.12	38.80	44.10	62.38	74.00	-11.62	Pk
Vertical	17235	40.99	10.12	38.80	42.70	47.21	54.00	-6.79	AV
Horizontal	2941.16	64.52	5.94	35.18	44.00	61.64	74.00	-12.36	Pk
Horizontal	2941.16	42.63	5.94	35.18	44.00	39.75	54.00	-14.25	AV
Horizontal	11490	64.87	8.46	38.71	44.50	67.54	74.00	-6.46	Pk
Horizontal	11490	45.38	8.46	38.71	44.50	48.05	54.00	-5.95	AV
Horizontal	17235	60.25	10.12	38.38	44.10	64.65	74.00	-9.35	Pk
Horizontal	17235	45.18	10.12	38.38	44.10	49.58	54.00	-4.42	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	2601.58	63.69	6.48	36.35	44.05	62.47	74.00	-11.53	Pk
Vertical	2601.58	44.06	6.48	36.35	44.05	42.84	54.00	-11.16	AV
Vertical	11570	63.13	8.47	37.88	44.51	64.97	74.00	-9.03	Pk
Vertical	11570	44.83	8.47	37.88	44.51	46.67	54.00	-7.33	AV
Vertical	17355	59.86	10.12	38.8	44.10	64.68	74.00	-9.32	Pk
Vertical	17355	41.77	10.12	38.8	42.70	47.99	54.00	-6.01	AV
Horizontal	2906.63	57.69	6.48	36.37	44.05	56.49	74.00	-17.51	Pk
Horizontal	2906.63	41.59	6.48	36.37	44.05	40.39	54.00	-13.61	AV
Horizontal	11570	58.23	8.47	38.64	44.50	60.84	74.00	-13.16	Pk
Horizontal	11570	45.02	8.47	38.64	44.50	47.63	54.00	-6.37	AV
Horizontal	17355	61.41	10.12	38.38	44.10	65.81	74.00	-8.19	Pk
Horizontal	17355	44.73	10.12	38.38	44.10	49.13	54.00	-4.87	AV
High Channel (5825 MHz)-Above 1G									
Vertical	2607.44	62.94	7.10	37.24	43.50	63.78	74.00	-10.22	Pk
Vertical	2607.44	42.46	7.10	37.24	43.50	43.30	54.00	-10.70	AV
Vertical	11650	63.52	8.46	37.68	44.50	65.16	74.00	-8.84	Pk
Vertical	11650	47.23	8.46	37.68	44.50	48.87	54.00	-5.13	AV
Vertical	17475	61.74	10.12	38.8	44.10	66.56	74.00	-7.44	Pk
Vertical	17475	44.82	10.12	38.8	42.70	51.04	54.00	-2.96	AV
Horizontal	2852.25	65.87	7.10	37.24	43.50	66.71	74.00	-7.29	Pk
Horizontal	2852.25	44.66	7.10	37.24	43.50	45.50	54.00	-8.50	AV
Horizontal	11650	65.39	8.46	38.57	44.50	67.92	74.00	-6.08	Pk
Horizontal	11650	44.00	8.46	38.57	44.50	46.53	54.00	-7.47	AV
Horizontal	17475	63.67	10.12	38.38	44.10	68.07	74.00	-5.93	Pk
Horizontal	17475	41.57	10.12	38.38	44.10	45.97	54.00	-8.03	AV

Note:"802.11a(5.8G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Traveller
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.8G) -- 802.11a_5725~5850MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	2603.31	66.29	5.94	35.40	44.00	63.63	74.00	-10.37	Pk
Vertical	2603.31	47.03	5.94	35.40	44.00	44.37	54.00	-9.63	AV
Vertical	11490	60.97	8.46	39.75	44.50	64.68	74.00	-9.32	Pk
Vertical	11490	41.51	8.46	39.75	44.50	45.22	54.00	-8.78	AV
Vertical	17235	56.08	10.12	38.80	44.10	60.90	74.00	-13.10	Pk
Vertical	17235	41.90	10.12	38.80	42.70	48.12	54.00	-5.88	AV
Horizontal	2941.16	64.86	5.94	35.18	44.00	61.98	74.00	-12.02	Pk
Horizontal	2941.16	42.13	5.94	35.18	44.00	39.25	54.00	-14.75	AV
Horizontal	11490	64.46	8.46	38.71	44.50	67.13	74.00	-6.87	Pk
Horizontal	11490	44.67	8.46	38.71	44.50	47.34	54.00	-6.66	AV
Horizontal	17235	63.63	10.12	38.38	44.10	68.03	74.00	-5.97	Pk
Horizontal	17235	43.62	10.12	38.38	44.10	48.02	54.00	-5.98	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	2601.58	63.19	6.48	36.35	44.05	61.97	74.00	-12.03	Pk
Vertical	2601.58	46.63	6.48	36.35	44.05	45.41	54.00	-8.59	AV
Vertical	11570	66.21	8.47	37.88	44.51	68.05	74.00	-5.95	Pk
Vertical	11570	42.31	8.47	37.88	44.51	44.15	54.00	-9.85	AV
Vertical	17355	63.49	10.12	38.8	44.10	68.31	74.00	-5.69	Pk
Vertical	17355	43.66	10.12	38.8	42.70	49.88	54.00	-4.12	AV
Horizontal	2906.63	57.04	6.48	36.37	44.05	55.84	74.00	-18.16	Pk
Horizontal	2906.63	44.58	6.48	36.37	44.05	43.38	54.00	-10.62	AV
Horizontal	11570	60.70	8.47	38.64	44.50	63.31	74.00	-10.69	Pk
Horizontal	11570	44.25	8.47	38.64	44.50	46.86	54.00	-7.14	AV
Horizontal	17355	61.11	10.12	38.38	44.10	65.51	74.00	-8.49	Pk
Horizontal	17355	44.66	10.12	38.38	44.10	49.06	54.00	-4.94	AV
High Channel (5825 MHz)-Above 1G									
Vertical	2607.44	58.92	7.10	37.24	43.50	59.76	74.00	-14.24	Pk
Vertical	2607.44	43.60	7.10	37.24	43.50	44.44	54.00	-9.56	AV
Vertical	11650	59.55	8.46	37.68	44.50	61.19	74.00	-12.81	Pk
Vertical	11650	42.96	8.46	37.68	44.50	44.60	54.00	-9.40	AV
Vertical	17475	61.04	10.12	38.8	44.10	65.86	74.00	-8.14	Pk
Vertical	17475	40.32	10.12	38.8	42.70	46.54	54.00	-7.46	AV
Horizontal	2852.25	63.94	7.10	37.24	43.50	64.78	74.00	-9.22	Pk
Horizontal	2852.25	42.26	7.10	37.24	43.50	43.10	54.00	-10.90	AV
Horizontal	11650	62.47	8.46	38.57	44.50	65.00	74.00	-9.00	Pk
Horizontal	11650	43.12	8.46	38.57	44.50	45.65	54.00	-8.35	AV
Horizontal	17475	60.56	10.12	38.38	44.10	64.96	74.00	-9.04	Pk
Horizontal	17475	41.92	10.12	38.38	44.10	46.32	54.00	-7.68	AV

Note:"802.11a(5.8G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


3.2.9 TEST RESULTS (18GHz-40GHz)

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5.2G)-802.11a 5150MHz~5250MHz, TX (5.8G)-802.11a 5725MHz~5850MHz		

All the modulation modes have been tested, and the worst result was report as below:

Low Channel (5180 MHz)-Above 1G


Horizontal

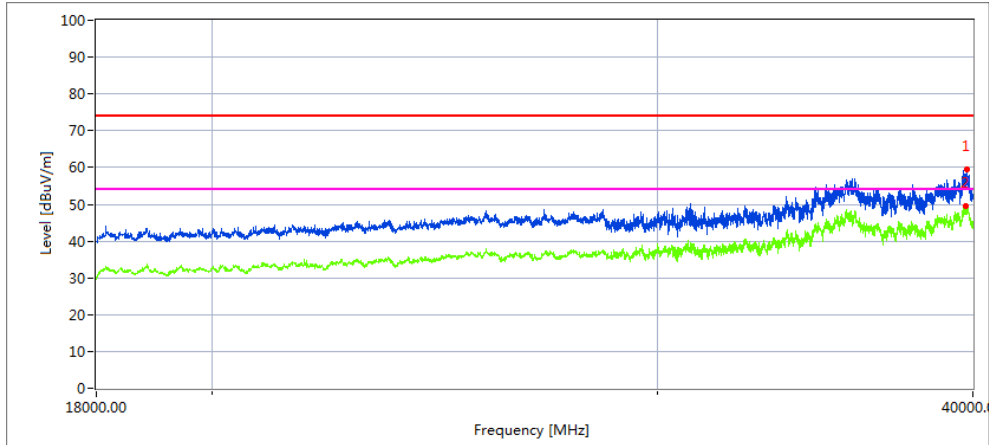

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39769.356	35.66	20.09	44.07	43.22	56.6	74	-17.4	Peak
39761.125	35.14	20.09	44.07	43.22	45.3	54	-8.7	AVG

Vertical

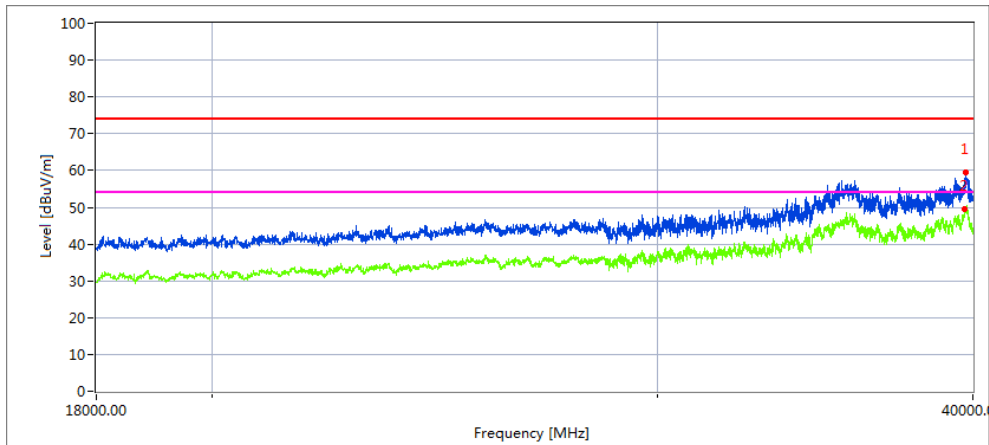


Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39728.144	34.21	20.09	44.07	43.22	55.15	74	-18.9	Peak
39736.139	35.2	20.09	44.07	43.22	45.36	54	-8.6	AVG

High Channel (5240 MHz)-Above 1G


Horizontal

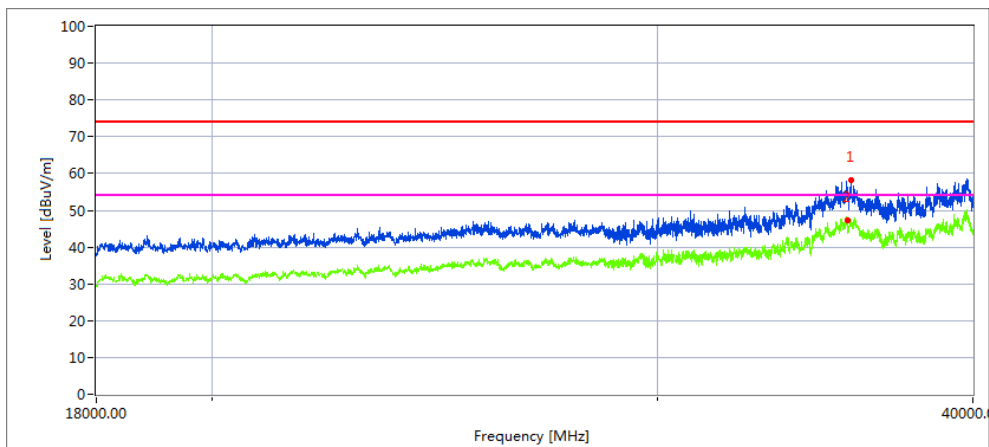

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
35628.154	40.78	18.98	42.15	45.01	56.9	74	-17.1	Peak
35636.142	40.17	18.98	42.15	45.01	47.3	54	-6.7	AVG

Vertical

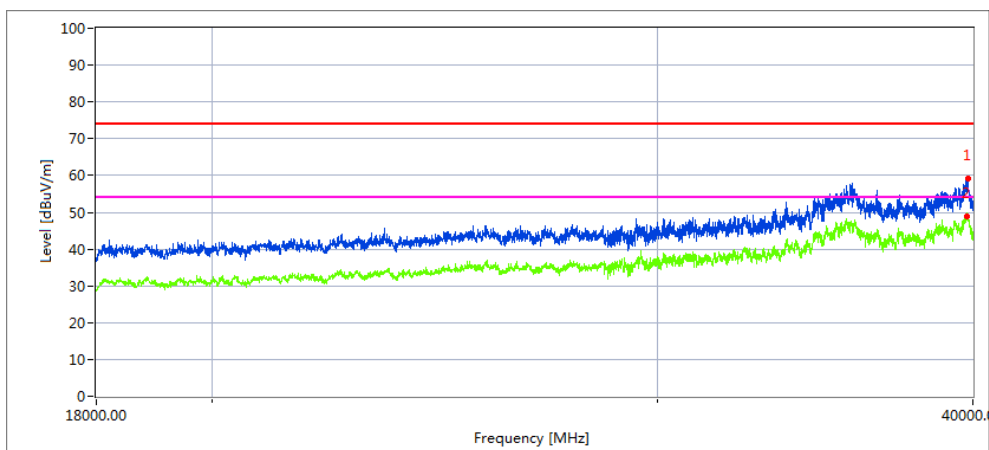


Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39628.219	36.34	20.09	44.07	43.48	57.02	74	-17.0	Peak
39636.305	37.53	20.09	44.07	43.48	47.69	54	-6.3	AVG

Low Channel (5745 MHz)-Above 1G


Horizontal

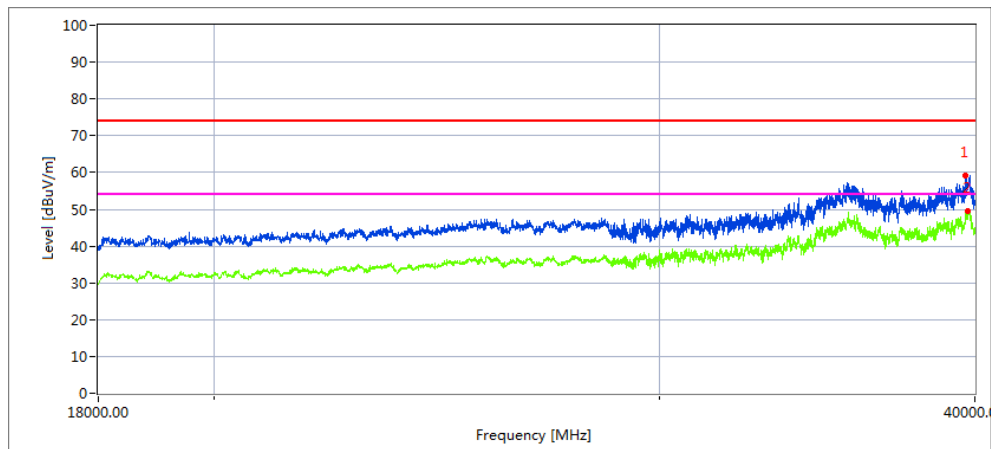

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39628.105	40.23	20.09	42.15	43.48	58.99	74	-15.0	Peak
39636.409	40.38	20.09	42.15	43.48	46.62	54	-7.4	AVG

Vertical

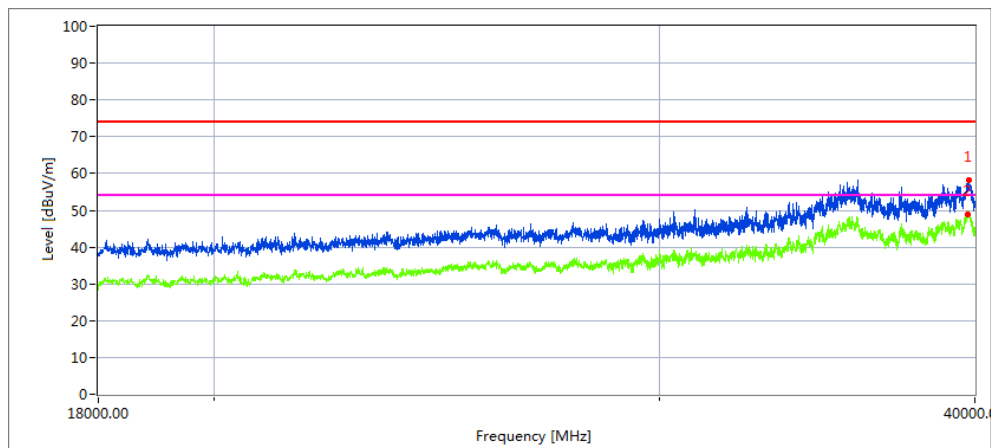


Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39628.387	41.69	20.09	42.15	43.48	60.45	74	-13.6	Peak
39636.293	38.61	20.09	42.15	43.48	46.85	54	-7.2	AVG

Low Channel (5785 MHz)-Above 1G


Horizontal

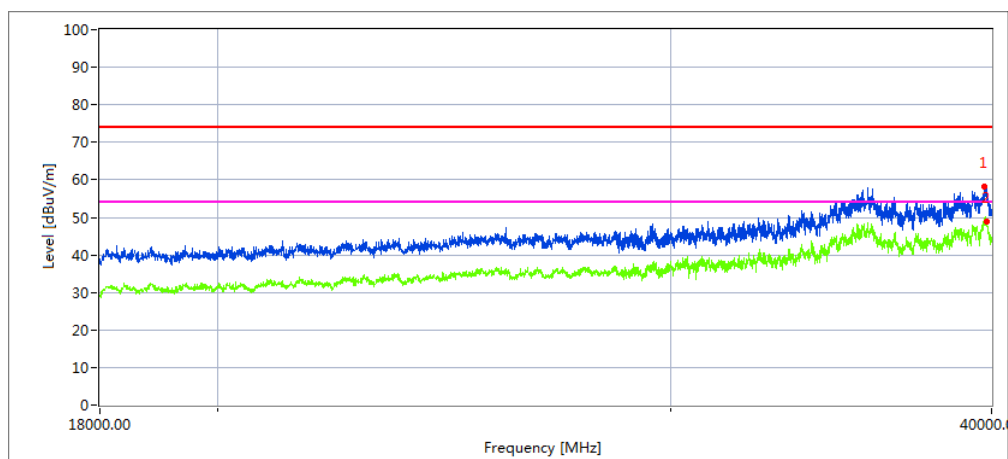

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39745.986	39.24	20.09	42.15	43.48	58	74	-16.0	Peak
39815.072	37.36	20.09	42.15	43.48	45.6	54	-8.4	AVG

Vertical

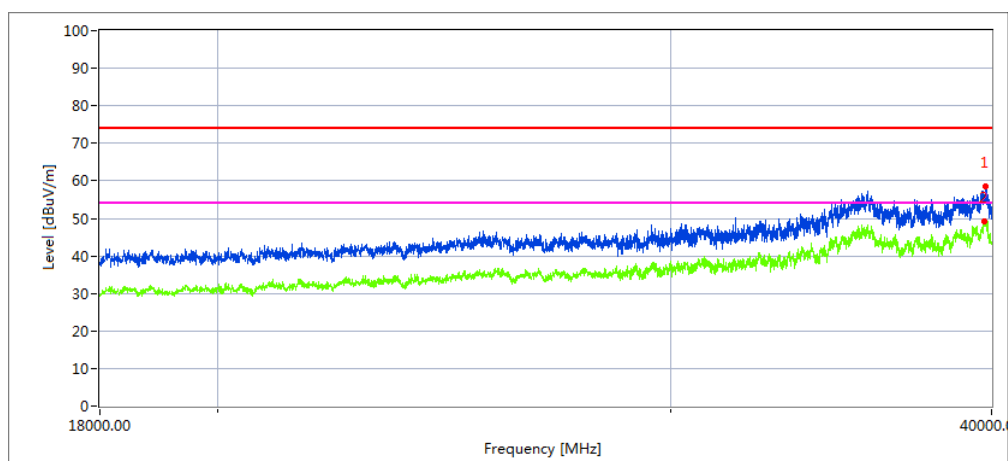


Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39787.004	34.74	20.09	42.15	43.48	53.5	74	-20.5	Peak
39728.984	36.56	20.09	42.15	43.48	44.8	54	-9.2	AVG

High Channel (5825 MHz)-Above 1G


Horizontal

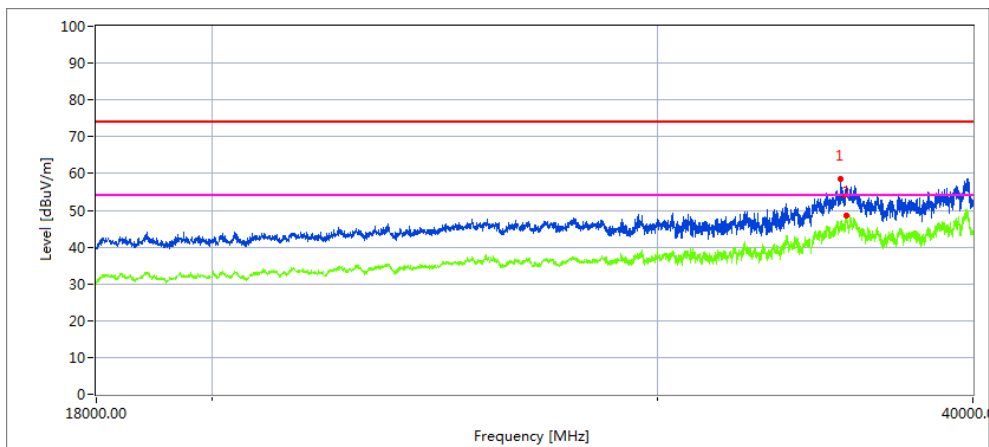

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
35628.132	36.57	20.09	42.15	43.48	55.33	74	-18.7	Peak
35636.871	40.02	18.98	42.15	45.01	47.15	54	-6.9	AVG

Vertical

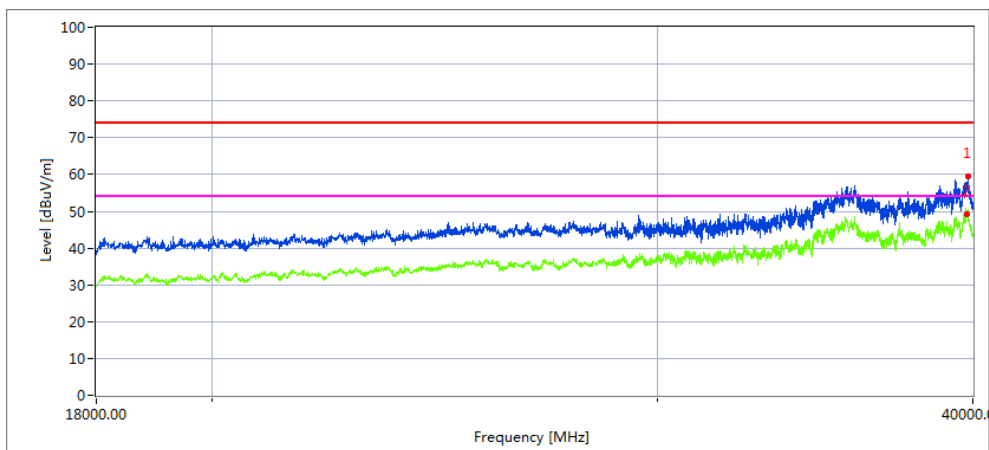

Measurement Result:


Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39628.125	41.26	20.09	42.15	43.48	60.02	74	-14.0	Peak
39636.198	36.94	20.09	42.15	43.48	45.18	54	-8.8	AVG

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Traveller
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.2G)-802.11a 5150MHz~5250MHz, TX (5.8G)-802.11a 5725MHz~5850MHz		

All the modulation modes have been tested, and the worst result was report as below:

Low Channel (5180 MHz)-Above 1G


Horizontal

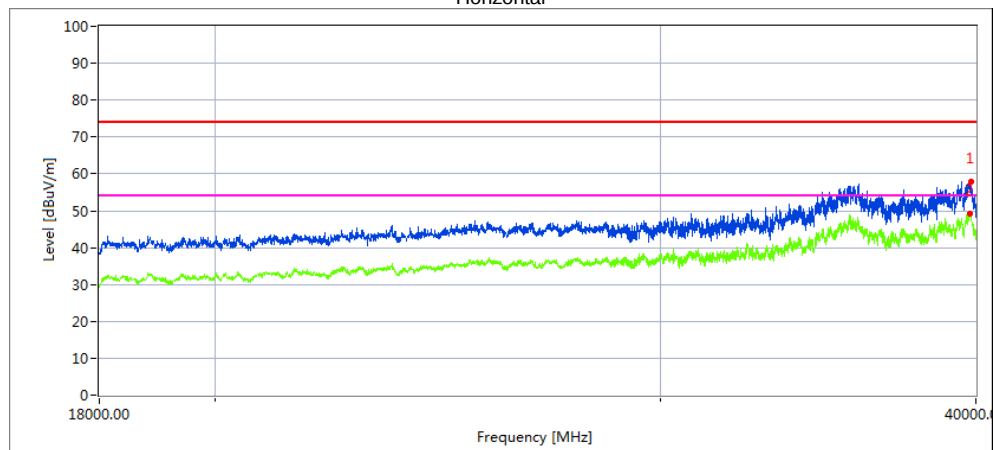

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39815.502	36.56	20.09	44.07	43.22	57.5	74	-16.5	Peak
39766.132	34.84	20.09	44.07	43.22	45	54	-9.0	AVG


Vertical

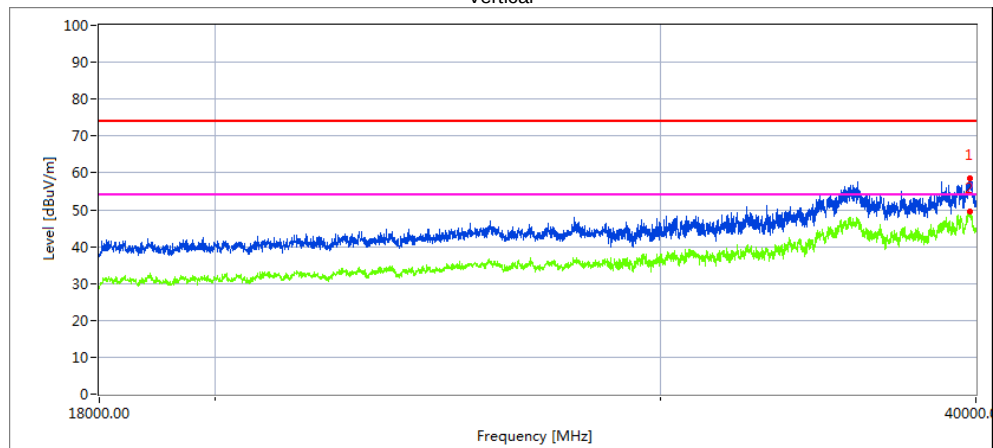

Measurement Result:


Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39776.004	37.56	20.09	44.07	43.22	58.5	74	-15.5	Peak
39798.004	35.24	20.09	44.07	43.22	45.4	54	-8.6	AVG

High Channel (5240 MHz)-Above 1G

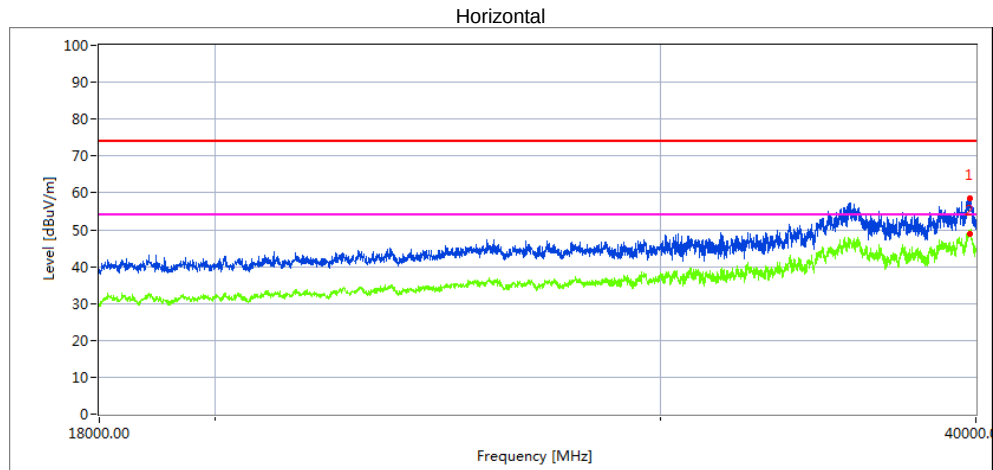

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39771.976	41.68	18.98	42.15	45.01	57.8	74	-16.2	Peak
39794.182	38.97	18.98	42.15	45.01	46.1	54	-7.9	AVG

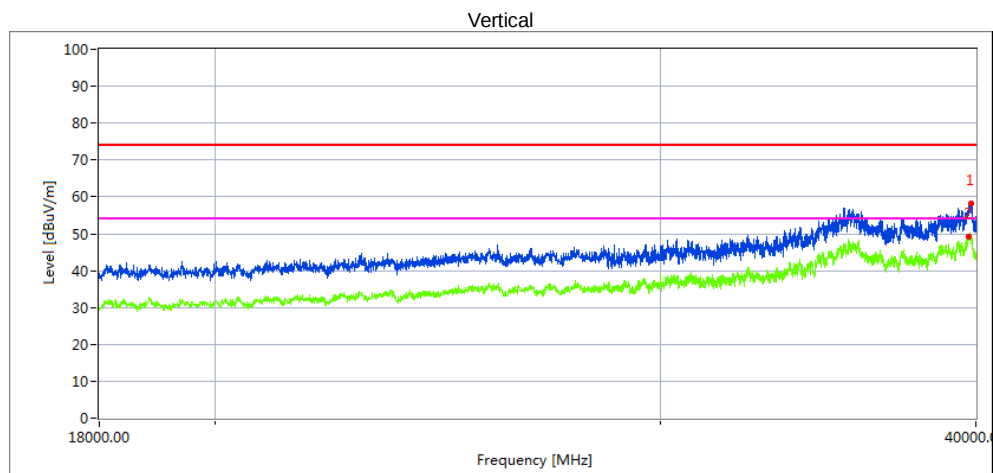


Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39831.686	36.62	20.09	44.07	43.48	57.3	74	-16.7	Peak
39722.754	34.14	20.09	44.07	43.48	44.3	54	-9.7	AVG

Low Channel (5745 MHz)-Above 1G


Horizontal

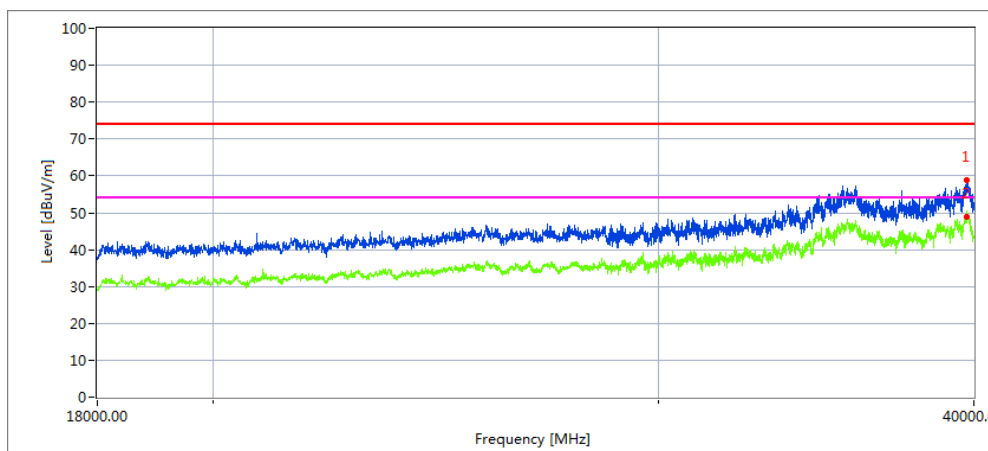

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39724.810	35.74	20.09	42.15	43.48	54.5	74	-19.5	Peak
39750.454	37.96	20.09	42.15	43.48	46.2	54	-7.8	AVG

Vertical

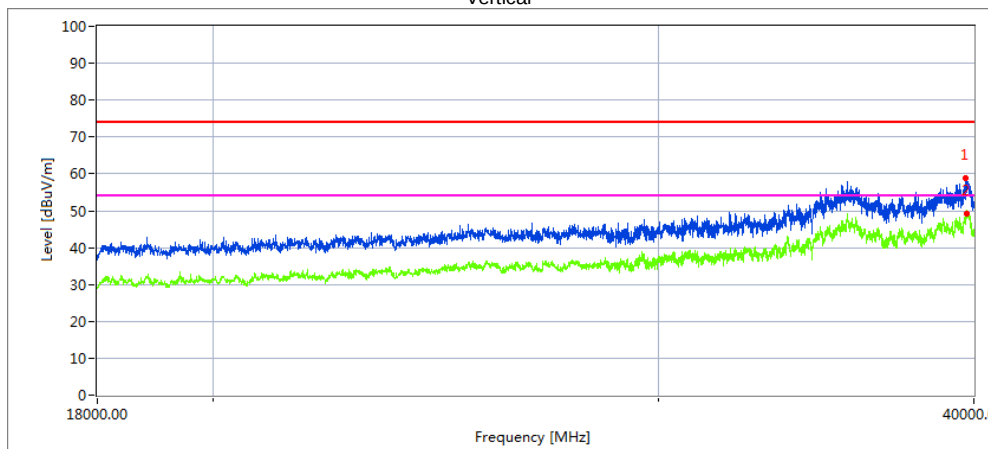


Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39724.810	38.94	20.09	42.15	43.48	57.7	74	-16.3	Peak
39750.454	35.76	20.09	42.15	43.48	44	54	-10.0	AVG

High Channel (5825 MHz)-Above 1G


Horizontal

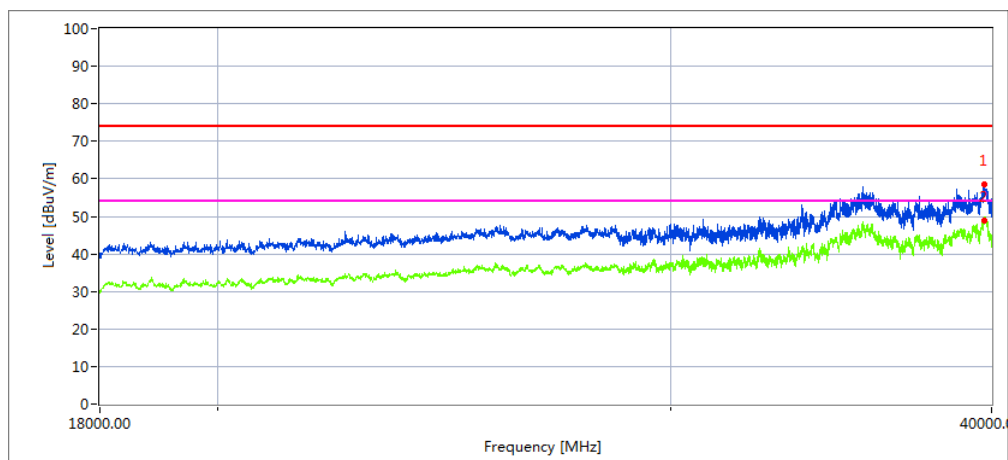

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39735.252	37.84	20.09	42.15	43.48	56.6	74	-17.4	Peak
39726.994	32.46	20.09	42.15	43.48	40.7	54	-13.3	AVG

Vertical

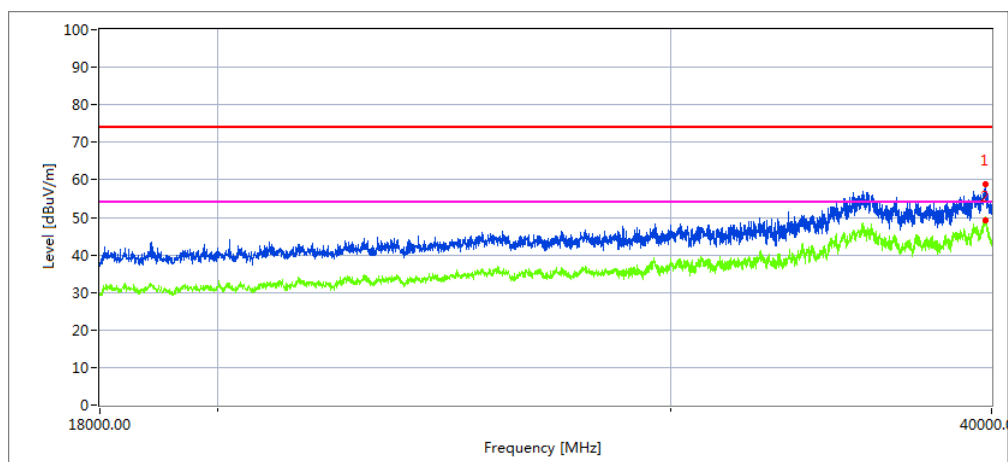

Measurement Result:

Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamplifier Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
39794.598	37.54	20.09	42.15	43.48	56.3	74	-17.7	37.54
39776.004	35.56	20.09	42.15	43.48	43.8	54	-10.2	35.56

3.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz& 5.350GHz~5460GHz

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.2G)-802.11a 5150MHz~5250MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequen cy	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detec tor	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
5.2G WIFI-802.11ac40 Mode									
4500	46.23	5.2	35.6	44.2	42.83	68.2	-25.37	Pk	Horizontal
4500	33.72	5.2	35.6	44.2	30.32	54	-23.68	AV	Horizontal
4500	50.07	5.2	35.6	44.2	46.67	68.2	-21.53	Pk	Vertical
4500	38.17	5.2	35.6	44.2	34.77	54	-19.23	AV	Vertical
5150	73.01	5.36	35.66	44.22	69.81	74	-4.19	Pk	Horizontal
5150	49.81	5.36	35.66	44.22	46.61	54	-7.39	AV	Horizontal
5150	72.61	5.36	35.66	44.22	69.41	74	-4.59	Pk	Vertical
5150	49.56	5.36	35.66	44.22	46.36	54	-7.64	AV	Vertical
5350	59.21	5.68	35.68	44.22	56.35	74	-17.65	Pk	Vertical
5350	39.24	5.68	35.68	44.22	36.38	54	-17.62	AV	Vertical
5350	51.91	5.68	35.68	44.22	49.05	74	-24.95	Pk	Horizontal
5350	37.48	5.68	35.68	44.22	34.62	54	-19.38	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac40 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Traveller
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5.2G)-802.11a 5150MHz~5250MHz,		

All the modulation modes have been tested, The report just record the worst data mode.

Frequen cy	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detec tor	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
5.2G WIFI-802.11ac40 Mode									
4500	47.19	5.2	35.6	44.2	43.79	68.2	-24.41	Pk	Horizontal
4500	32.44	5.2	35.6	44.2	29.04	54	-24.96	AV	Horizontal
4500	49.67	5.2	35.6	44.2	46.27	68.2	-21.93	Pk	Vertical
4500	37.45	5.2	35.6	44.2	34.05	54	-19.95	AV	Vertical
5150	73.19	5.36	35.66	44.22	69.99	74	-4.01	Pk	Horizontal
5150	46.68	5.36	35.66	44.22	43.48	54	-10.52	AV	Horizontal
5150	71.51	5.36	35.66	44.22	68.31	74	-5.69	Pk	Vertical
5150	48.13	5.36	35.66	44.22	44.93	54	-9.07	AV	Vertical
5350	56.56	5.68	35.68	44.22	53.70	74	-20.30	Pk	Vertical
5350	38.74	5.68	35.68	44.22	35.88	54	-18.12	AV	Vertical
5350	52.05	5.68	35.68	44.22	49.19	74	-24.81	Pk	Horizontal
5350	37.71	5.68	35.68	44.22	34.85	54	-19.15	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac40 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

3.3 POWER SPECTRAL DENSITY TEST

3.3.1 Applied procedures / limit

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

3.3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

3.3.3 DEVIATION FROM STANDARD

No deviation.

3.3.4 TEST SETUP



3.3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULTS

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band I (5150-5250MHz)/ TX Frequency Band IV (5725-5850MHz)		

Test data reference attachment.

3.4 26DB & 99% EMISSION BANDWIDTH

3.4.1 Applied procedures / limit


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

3.4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

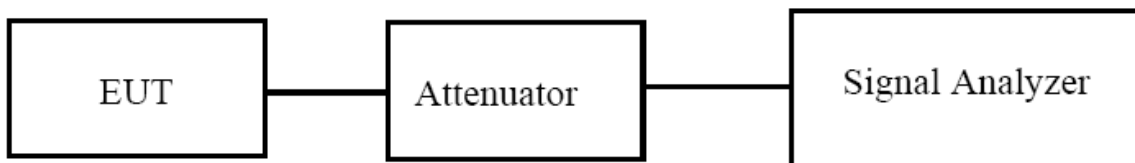

3.4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.4 TEST RESULTS

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX Frequency Band I (5150-5250MHz)/ TX Frequency Band IV(5725-5850MHz)		

Test data reference attachment.

3.5 MINIMUM 6 DB BANDWIDTH

3.5.1 Applied procedures / limit

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.5.3 DEVIATION FROM STANDARD

No deviation.

3.5.4 TEST SETUP

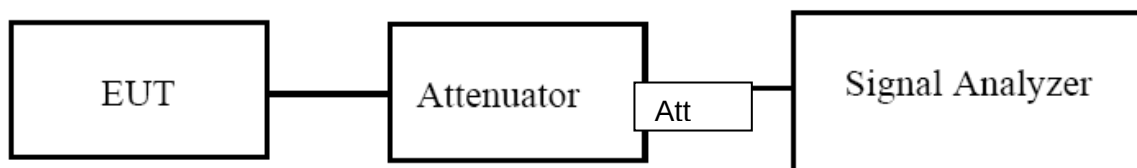

3.5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.5.5 TEST RESULTS

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX (5G) Mode Frequency Band IV (5725-5850MHz)		

Test data reference attachment.

3.6 MAXIMUM CONDUCTED OUTPUT POWER

3.6.1 Applied procedures / limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

The maximum e.i.r.p should not exceed:

Frequency Band(MHz)	Limit
5150~5250	N/A
5725~5850	N/A

3.6.2 TEST PROCEDURE

- Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".


(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

3.6.3 DEVIATION FROM STANDARD

No deviation.

3.6.4 TEST SETUP

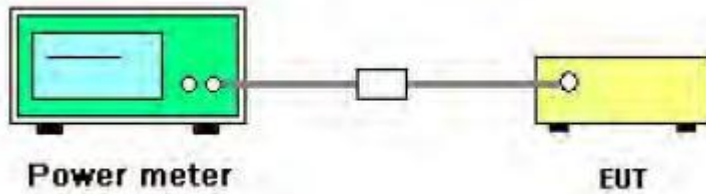

3.6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6.5 TEST RESULTS

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX (5G) Mode Frequency Band I (5150-5250MHz)/ TX (5G) Mode Frequency Band IV (5725-5850MHz)		

Test data reference attachment.

3.7 OUT OF BAND EMISSIONS

3.7.1 Applicable Standard

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


3.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

3.7.3 DEVIATION FROM STANDARD

No deviation.

3.7.4 TEST SETUP

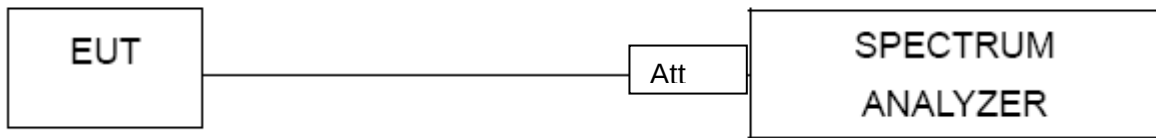

3.7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.7.5 TEST RESULTS

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V

Test data reference attachment.

3.8 SPURIOUS RF CONDUCTED EMISSIONS

3.8.1. Conformance Limit

According to FCC §15.407(b)(1) (2) (3)

3.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

3.8.3 Test Setup

Please refer to Section 6.1 of this test report.

3.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=1MHz and VBW= 3MHz to measure the peak field strength , and measure frequency range from 30MHz to 40GHz.

3.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test data reference attachment.

3.9 Frequency Stability Measurement

3.9.1 Limit


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

3.9.2 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

3.9.3 Test Setup Layout

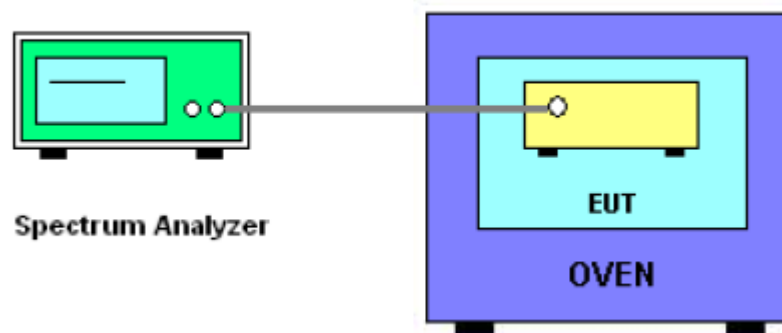

3.9.4 EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

3.9.5 TEST RESULTS

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5180.0000	5180	0.0000	0.0000
		V max (V)	5.75	5180.0040	5180	0.0040	0.7722
		V min (V)	4.25	5180.0017	5180	0.0017	0.3282
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5180.0062	5180	0.0062	1.1969
		T (°C)	-10	5180.0024	5180	0.0024	0.4633
		T (°C)	0	5180.0074	5180	0.0074	1.4286
		T (°C)	10	5180.0114	5180	0.0114	2.2008
		T (°C)	20	5180.0062	5180	0.0062	1.1969
		T (°C)	30	5180.0032	5180	0.0032	0.6178
		T (°C)	40	5180.0013	5180	0.0013	0.2510
		T (°C)	50	5180.0024	5180	0.0024	0.4633
		T (°C)	60	5180.0047	5180	0.0047	0.9073
		T (°C)	70	5180.0066	5180	0.0066	1.2741
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5200.0400	5200	0.0400	7.6923
		V max (V)	5.75	5200.0520	5200	0.0520	10.0000
		V min (V)	4.25	5200.0412	5200	0.0412	7.9231
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5200.0365	5200	0.0365	7.0192
		T (°C)	-10	5200.0361	5200	0.0361	6.9423
		T (°C)	0	5200.0417	5200	0.0417	8.0192
		T (°C)	10	5200.0681	5200	0.0681	13.0962
		T (°C)	20	5200.0182	5200	0.0182	3.5000
		T (°C)	30	5200.0232	5200	0.0232	4.4615
		T (°C)	40	5200.0198	5200	0.0198	3.8077
		T (°C)	50	5200.0248	5200	0.0248	4.7692
		T (°C)	60	5200.0124	5200	0.0124	2.3846
		T (°C)	70	5200.0348	5200	0.0348	6.6923
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5239.9600	5240	0.0400	-7.6336
		V max (V)	5.75	5239.9614	5240	0.0386	-7.3664
		V min (V)	4.25	5239.9584	5240	0.0416	-7.9389
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5240.0244	5240	0.0244	4.6584
		T (°C)	-10	5239.9741	5240	0.0259	-4.9427
		T (°C)	0	5239.9602	5240	0.0398	-7.5954
		T (°C)	10	5239.9603	5240	0.0397	-7.5763
		T (°C)	20	5239.9641	5240	0.0359	-6.8511
		T (°C)	30	5239.9681	5240	0.0319	-6.0878
		T (°C)	40	5239.9605	5240	0.0395	-7.5382
		T (°C)	50	5239.9628	5240	0.0372	-7.0992
		T (°C)	60	5239.9611	5240	0.0389	-7.4237
		T (°C)	70	5239.9673	5240	0.0327	-6.2405
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Wifiwall	Model Name. :	Wifiwall 5GHZ Dome
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency(5725-5850MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5755MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5755.00000	5755	0.00000	0.0000
		V max (V)	5.75	5755.00060	5755	0.00060	-0.1043
		V min (V)	4.25	5755.00120	5755	0.00120	-0.2085
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5755MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5755.00630	5755	0.00630	-1.0947
		T (°C)	-10	5755.00090	5755	0.00090	-0.1564
		T (°C)	0	5755.00040	5755	0.00040	-0.0695
		T (°C)	10	5755.00018	5755	0.00018	-0.0313
		T (°C)	20	5755.00070	5755	0.00070	-0.1216
		T (°C)	30	5755.00009	5755	0.00009	-0.0156
		T (°C)	40	5755.00013	5755	0.00013	-0.0226
		T (°C)	50	5755.00025	5755	0.00025	-0.0434
		T (°C)	60	5755.00006	5755	0.00006	-0.0104
		T (°C)	70	5755.00019	5755	0.00019	-0.0330
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5795MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	5.00	5794.88000	5795	0.12000	20.7075
		V max (V)	5.75	5794.89740	5795	0.10260	17.7049
		V min (V)	4.25	5794.94112	5795	0.05888	10.1605
Limits				Within 5745-5850MHz			
Result				Complies			

TEST CONDITIONS				Reference Frequency: 5795MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5795.00012	5795	0.00012	-0.0207
		T (°C)	-10	5794.89006	5795	0.10994	18.9710
		T (°C)	0	5794.89740	5795	0.10260	17.7047
		T (°C)	10	5794.91052	5795	0.08948	15.4409
		T (°C)	20	5794.90062	5795	0.09938	17.1493
		T (°C)	30	5794.88941	5795	0.11059	19.0833
		T (°C)	40	5794.89526	5795	0.10474	18.0742
		T (°C)	50	5794.89632	5795	0.10368	17.8913
		T (°C)	60	5794.89415	5795	0.10585	18.2657
		T (°C)	70	5794.90062	5795	0.09938	17.1493
Limits				Within 5745-5850MHz			
Result				Complies			

4. ANTENNA REQUIREMENT

4.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

4.2 EUT ANTENNA

The EUT antenna is permanent attached Wifiwall 5GHZ Dome: SMA Male Reverse Antenna
Wifiwall 5GHZ Traveller: FPCB Antenna (antenna gain: Wifiwall 5GHZ Dome: 5dBi
Wifiwall 5GHZ Traveller: 3dBi). It comply with the standard requirement.


5. TEST RESULTS

5.1 DUTY CYCLE


5.2G:

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	802.11a	5180	100	0
NVNT	802.11a	5200	100	0
NVNT	802.11a	5240	100	0
NVNT	802.11ac20	5180	100	0
NVNT	802.11ac20	5200	100	0
NVNT	802.11ac20	5240	100	0
NVNT	802.11ac40	5190	100	0
NVNT	802.11ac40	5230	99.89	0
NVNT	802.11ac80	5210	100	0
NVNT	802.11n(HT20)	5180	100	0
NVNT	802.11n(HT20)	5200	100	0
NVNT	802.11n(HT20)	5240	100	0
NVNT	802.11n(HT40)	5190	100	0
NVNT	802.11n(HT40)	5230	100	0


Duty Cycle NVNT 802.11a 5180MHz

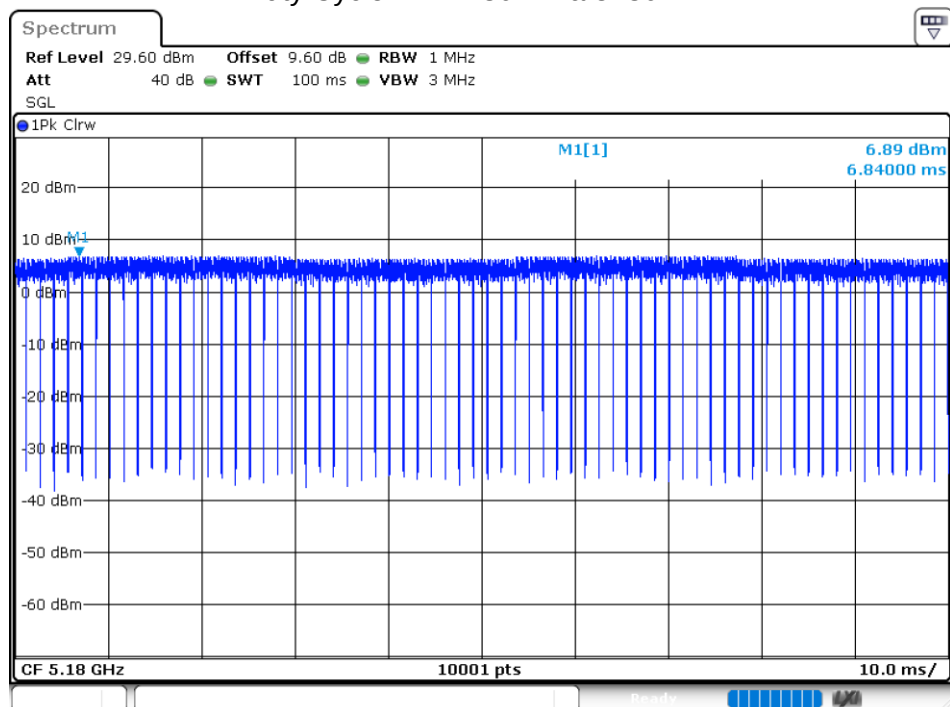


Duty Cycle NVNT 802.11a 5200MHz

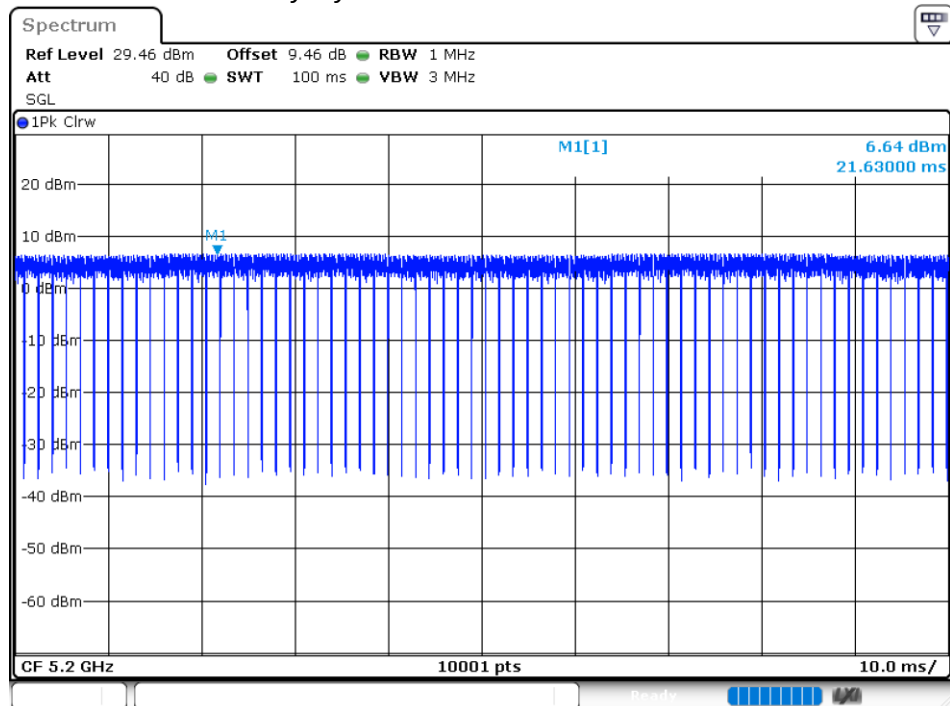


Duty Cycle NVNT 802.11a 5240MHz

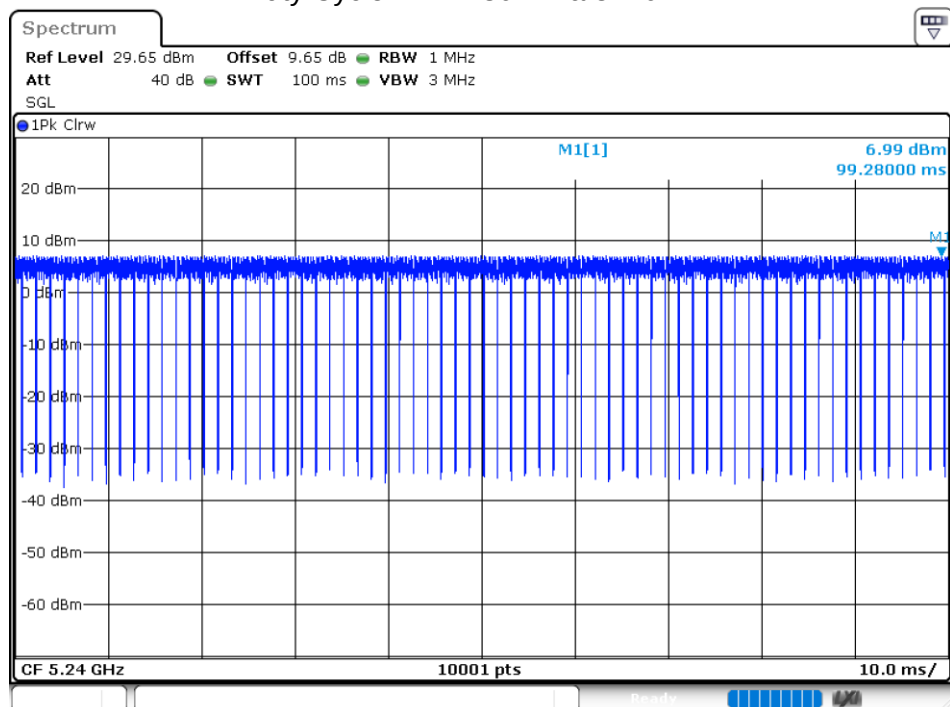


Duty Cycle NVNT 802.11ac20 5180MHz

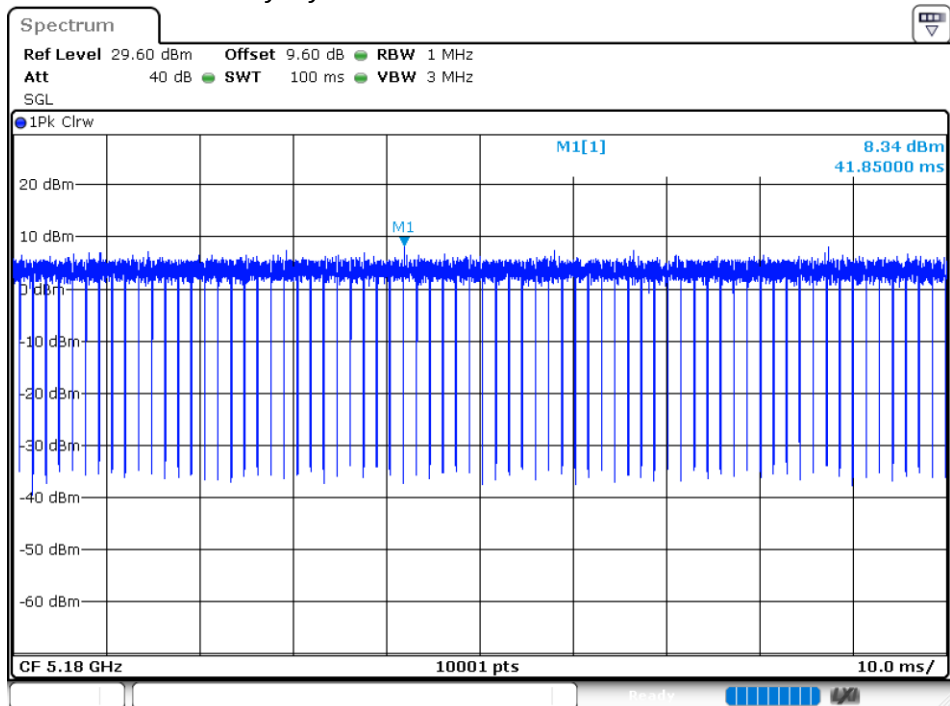


Duty Cycle NVNT 802.11ac20 5200MHz

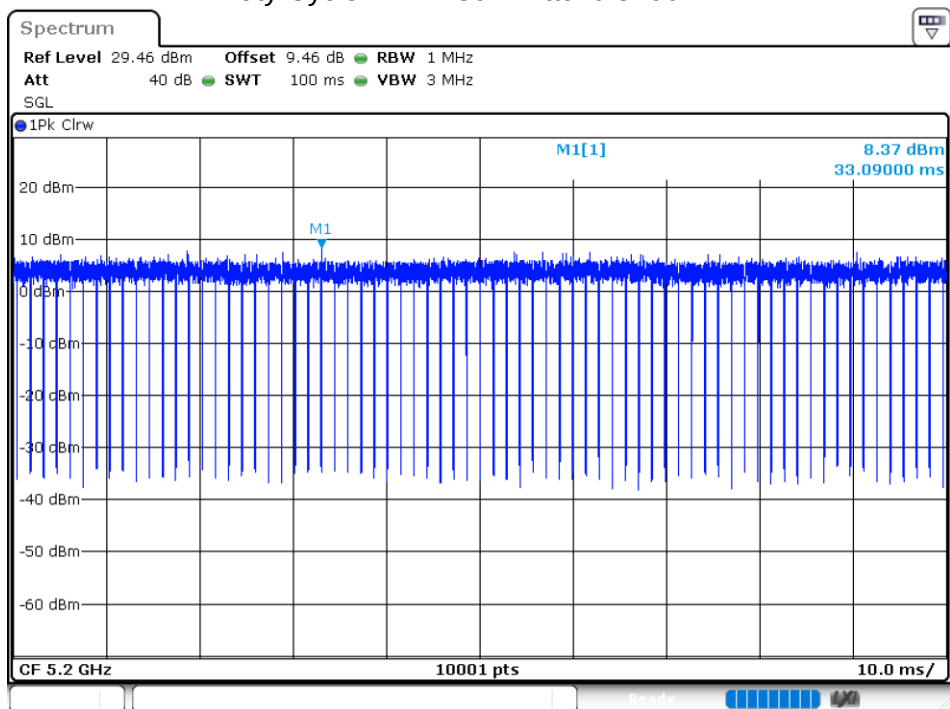


Duty Cycle NVNT 802.11ac20 5240MHz

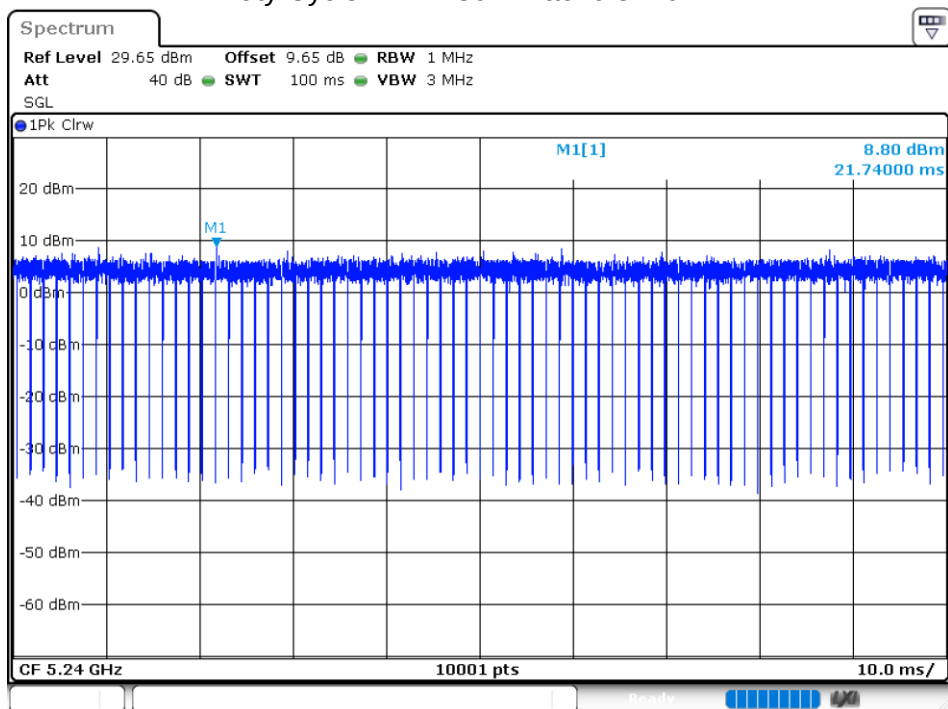


Duty Cycle NVNT 802.11ac40 5190MHz

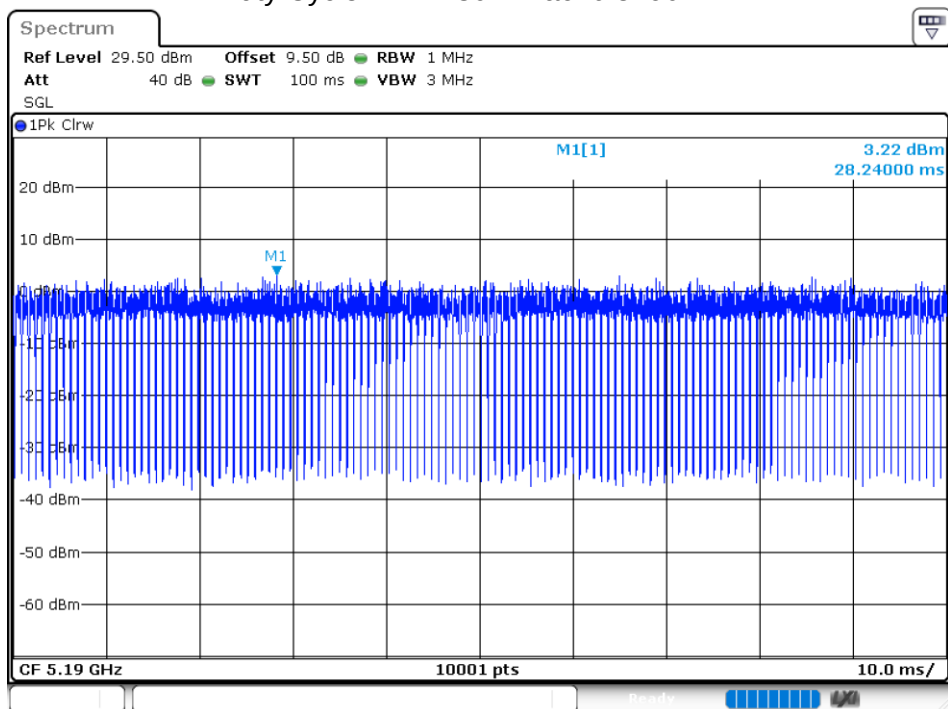


Duty Cycle NVNT 802.11ac40 5230MHz

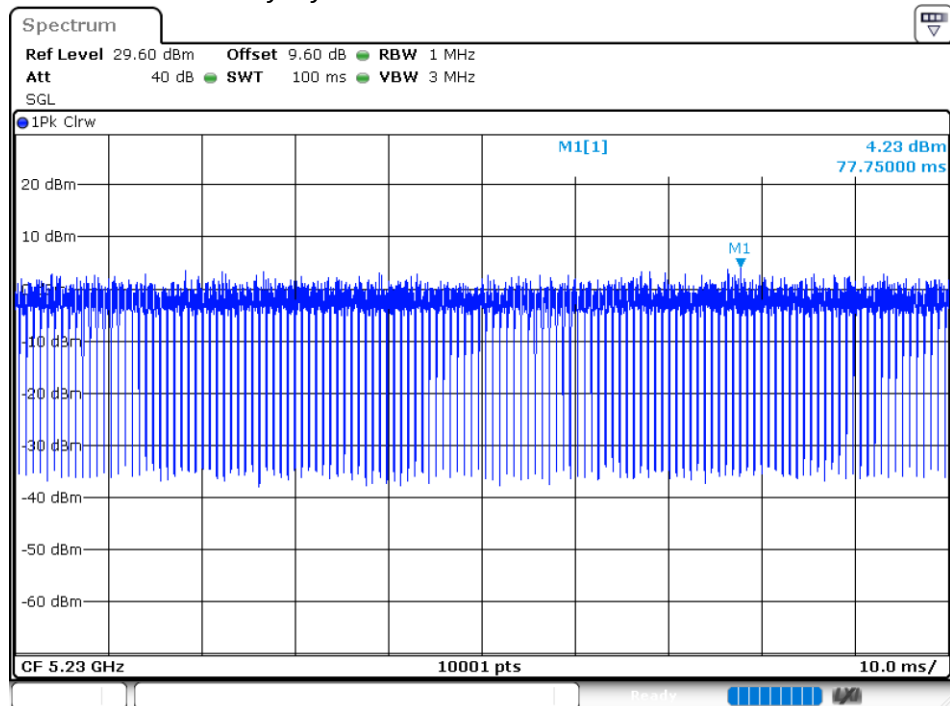


Duty Cycle NVNT 802.11ac80 5210MHz

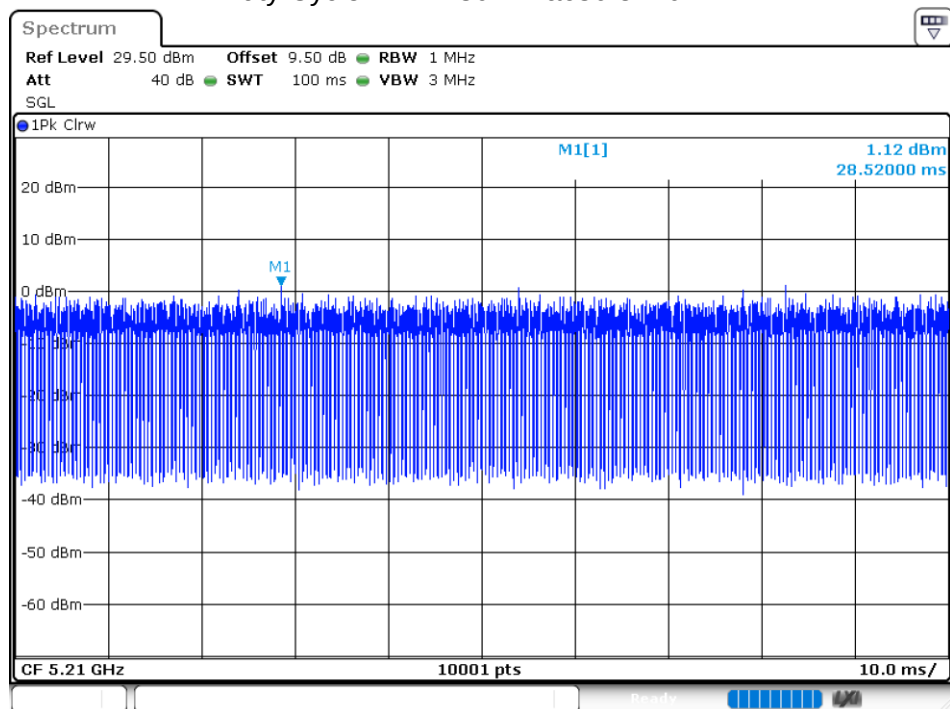


Duty Cycle NVNT 802.11n(HT20) 5180MHz

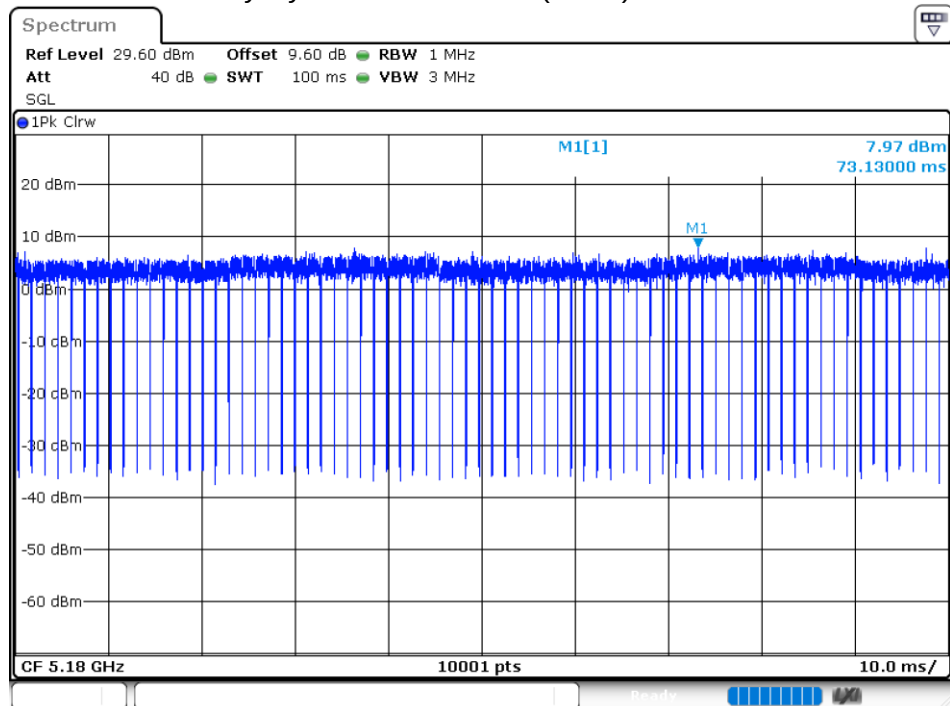


Duty Cycle NVNT 802.11n(HT20) 5200MHz

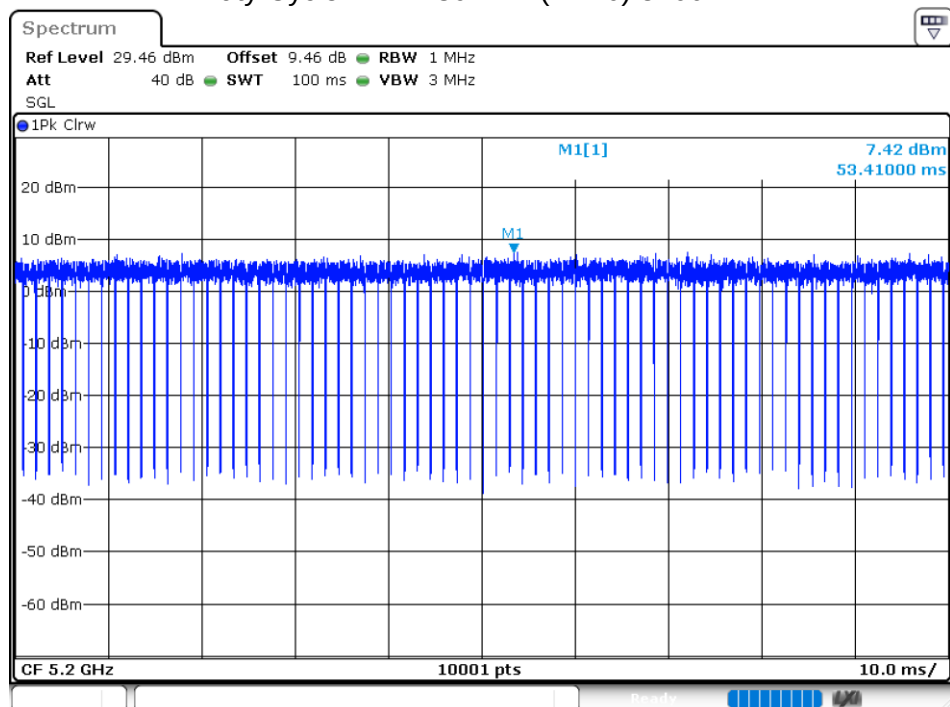


Duty Cycle NVNT 802.11n(HT20) 5240MHz

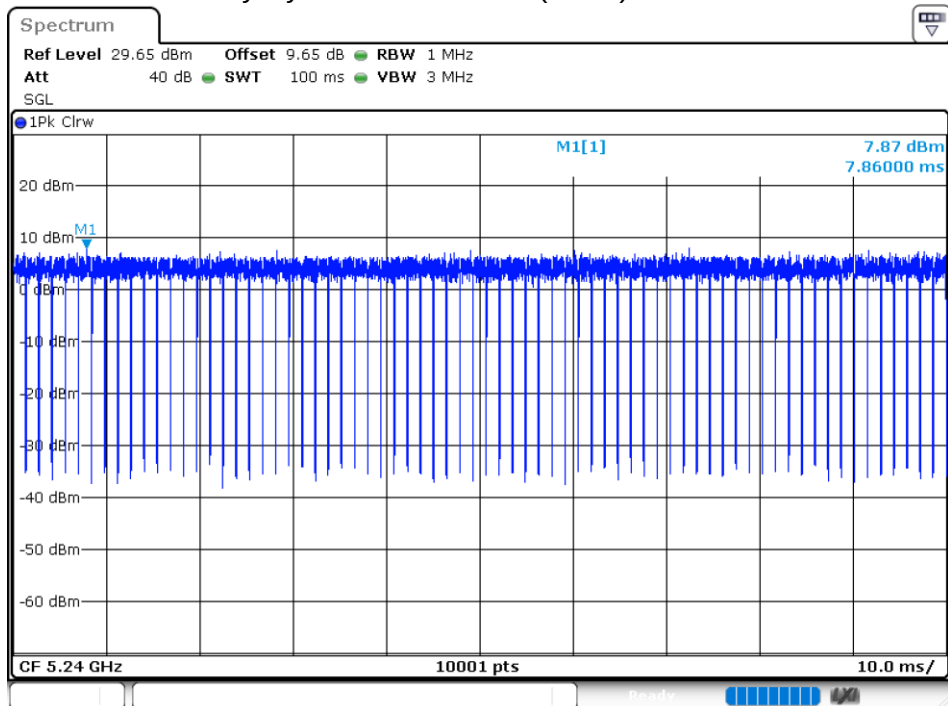

Duty Cycle NVNT 802.11n(HT40) 5190MHz

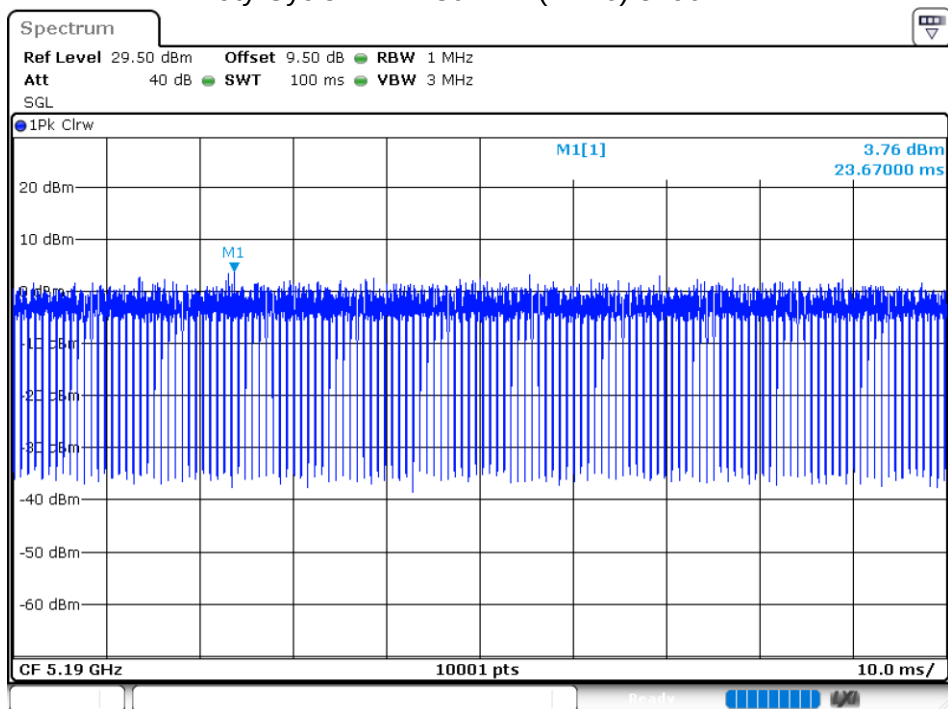


Duty Cycle NVNT 802.11n(HT40) 5230MHz

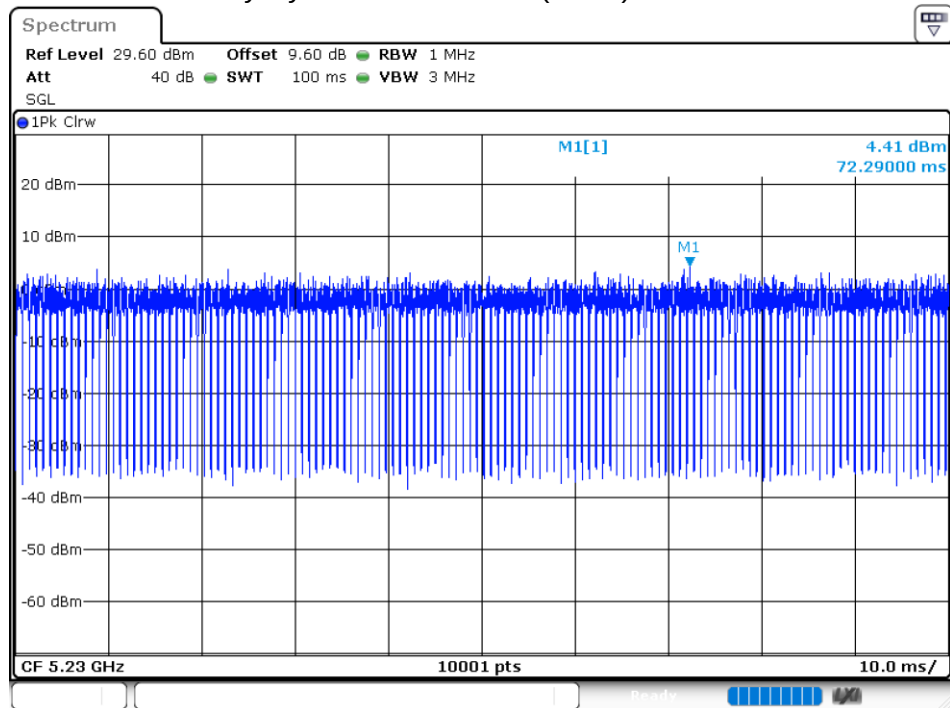


5.8G:

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	802.11a	5745	100	0
NVNT	802.11a	5785	100	0
NVNT	802.11a	5825	100	0
NVNT	802.11ac20	5745	100	0
NVNT	802.11ac20	5785	100	0
NVNT	802.11ac20	5825	100	0
NVNT	802.11ac40	5755	100	0
NVNT	802.11ac40	5795	100	0
NVNT	802.11ac80	5775	100	0
NVNT	802.11n(HT20)	5745	100	0
NVNT	802.11n(HT20)	5785	100	0
NVNT	802.11n(HT20)	5825	100	0
NVNT	802.11n(HT40)	5755	100	0
NVNT	802.11n(HT40)	5795	100	0


Duty Cycle NVNT 802.11a 5745MHz

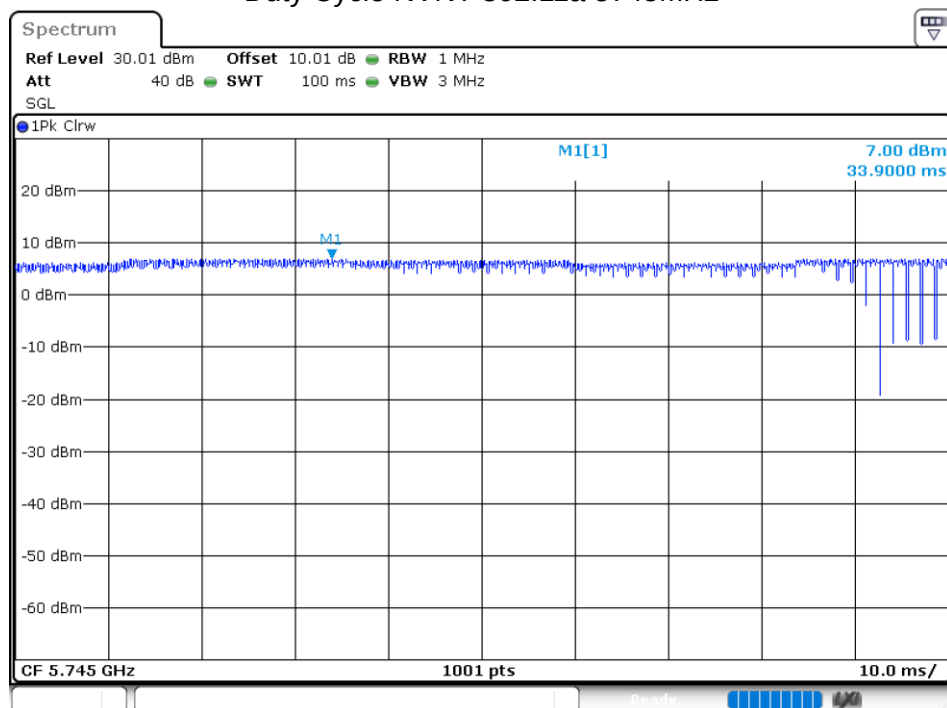


Duty Cycle NVNT 802.11a 5785MHz

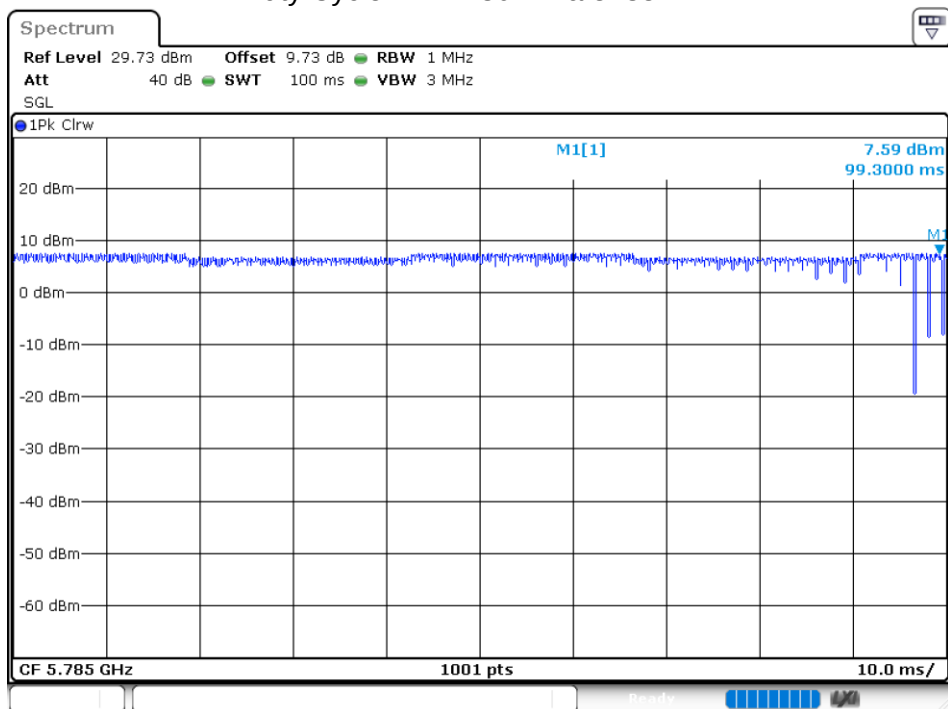


Duty Cycle NVNT 802.11a 5825MHz

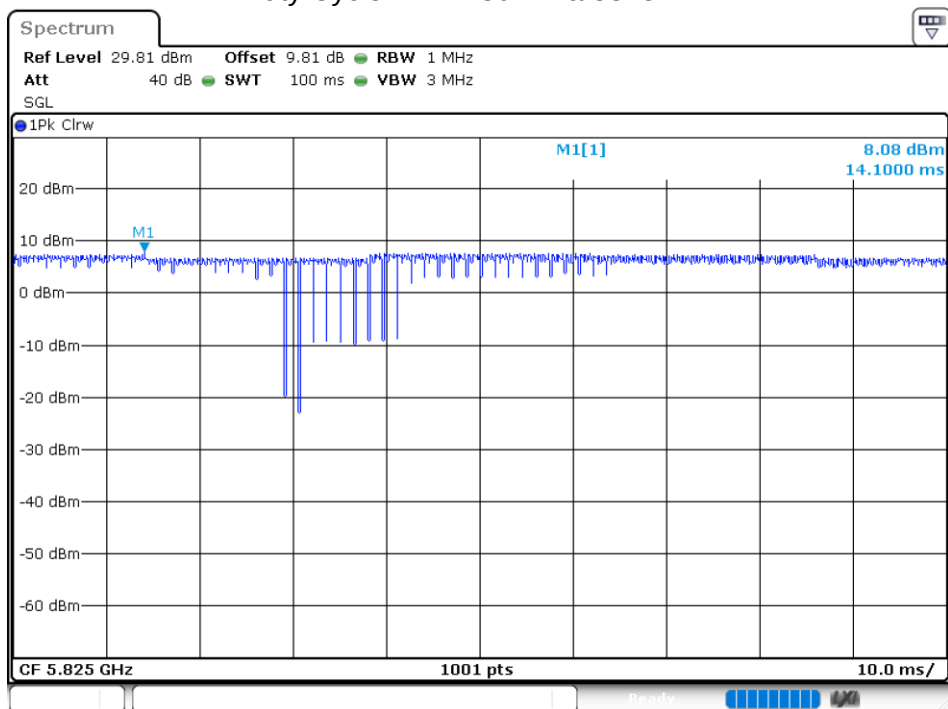


Duty Cycle NVNT 802.11ac20 5745MHz

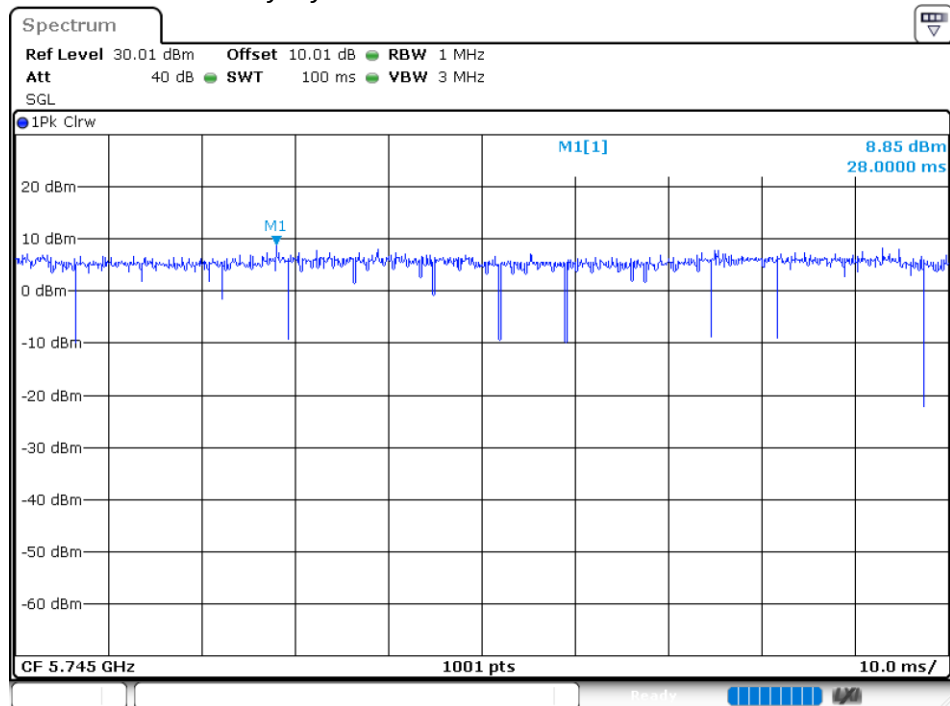


Duty Cycle NVNT 802.11ac20 5785MHz

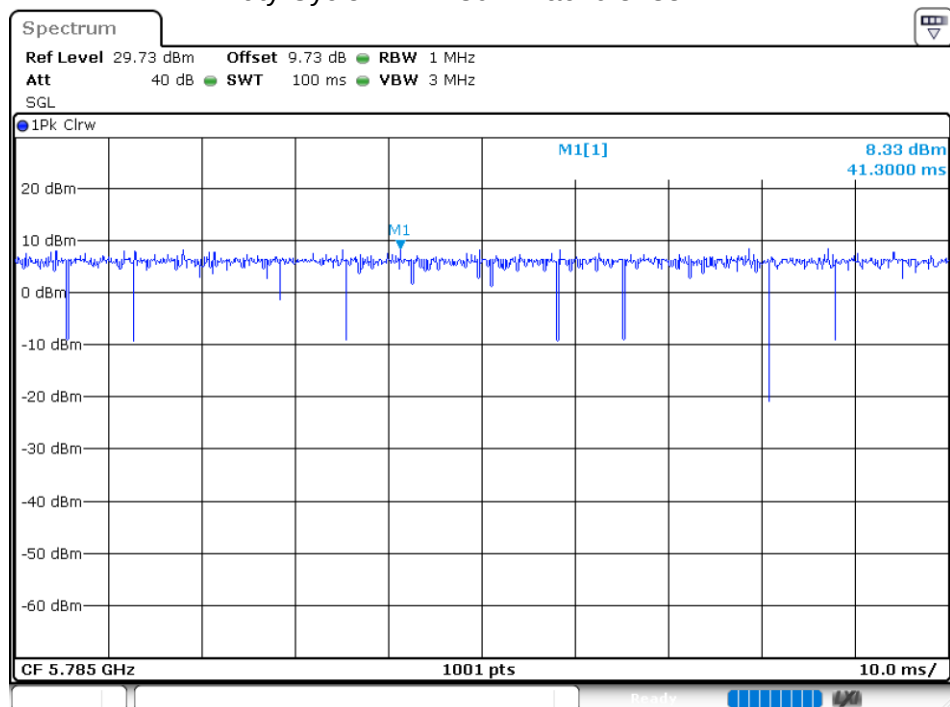


Duty Cycle NVNT 802.11ac20 5825MHz

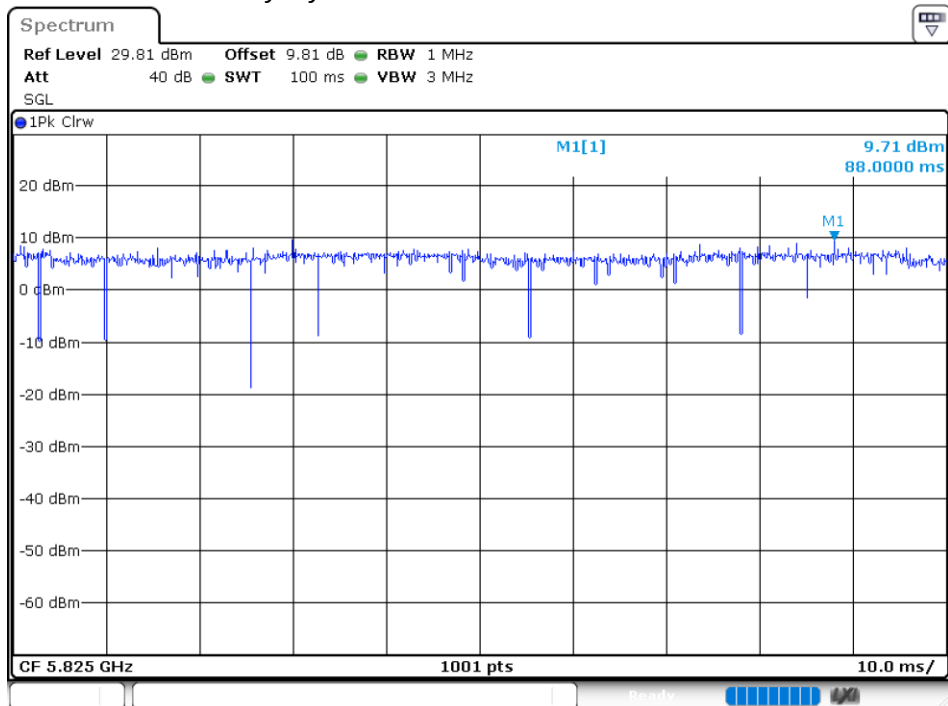


Duty Cycle NVNT 802.11ac40 5755MHz

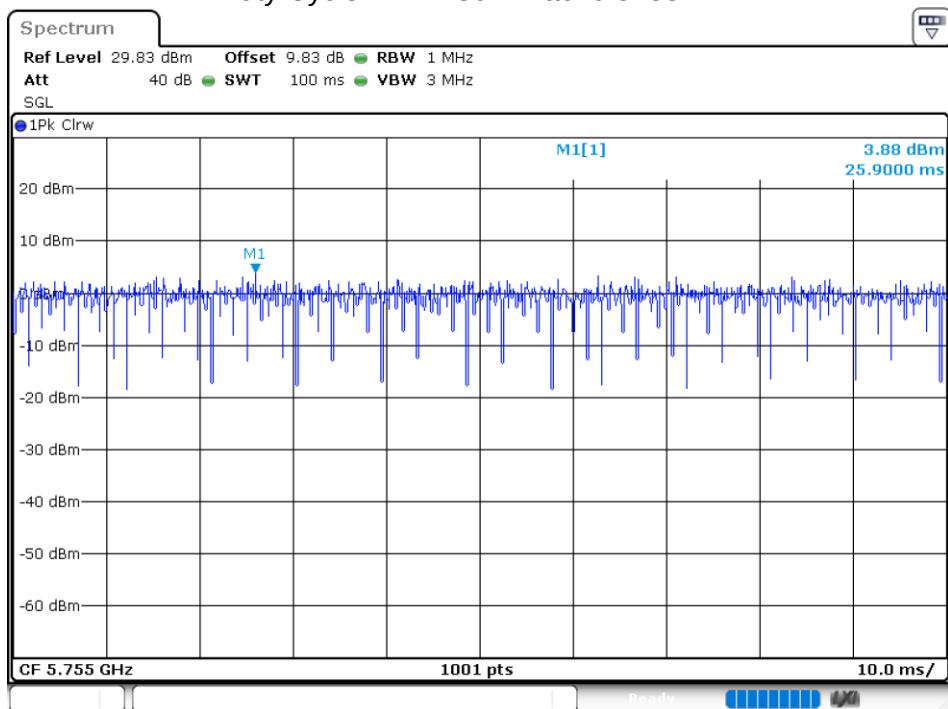


Duty Cycle NVNT 802.11ac40 5795MHz

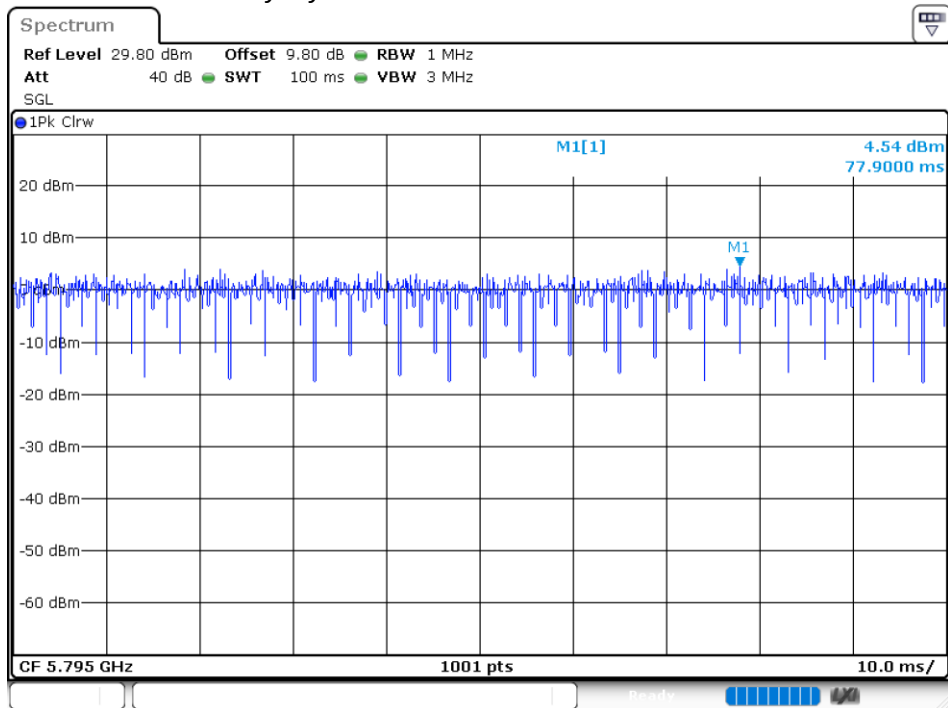


Duty Cycle NVNT 802.11ac80 5775MHz

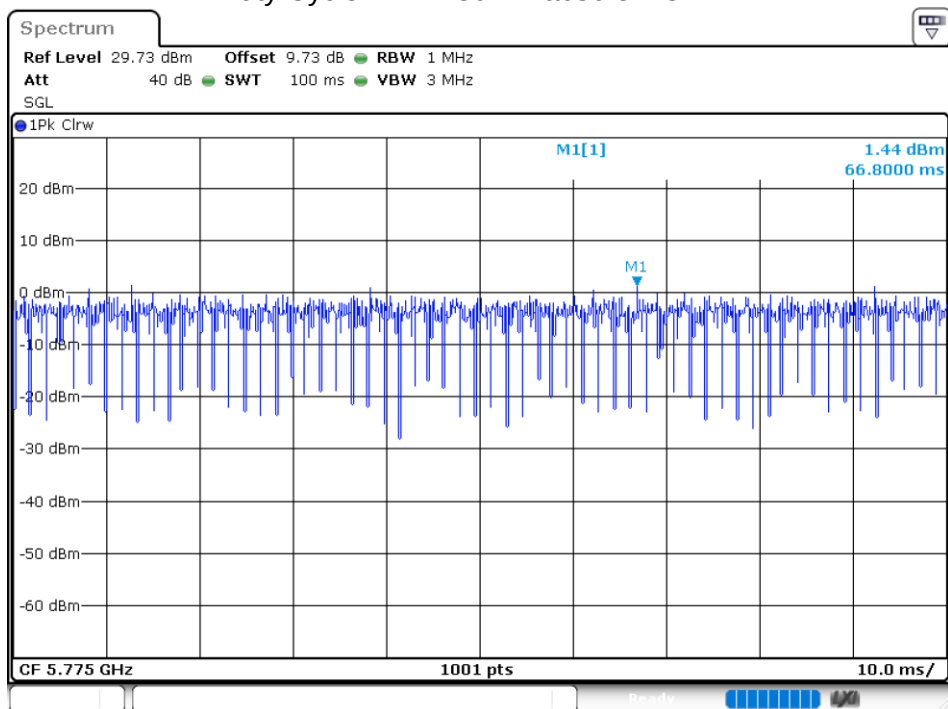


Duty Cycle NVNT 802.11n(HT20) 5745MHz

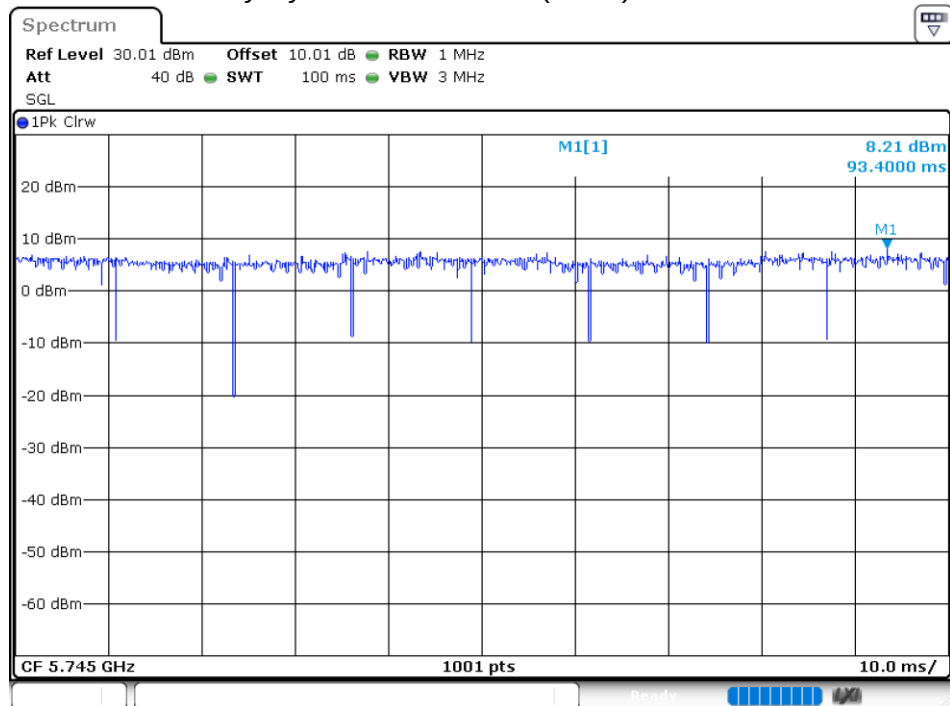


Duty Cycle NVNT 802.11n(HT20) 5785MHz

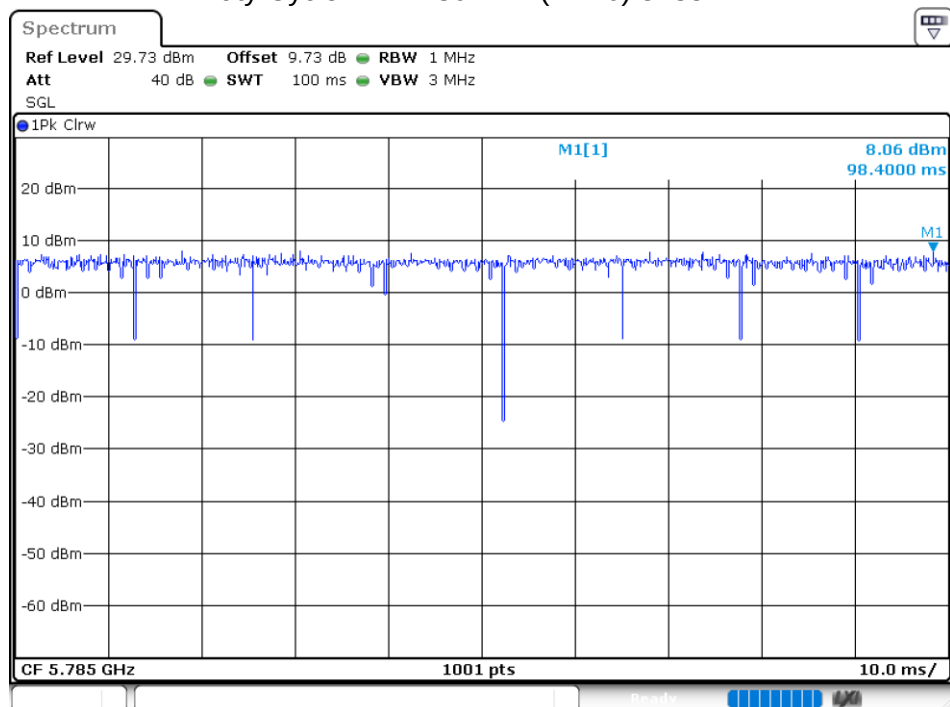


Duty Cycle NVNT 802.11n(HT20) 5825MHz

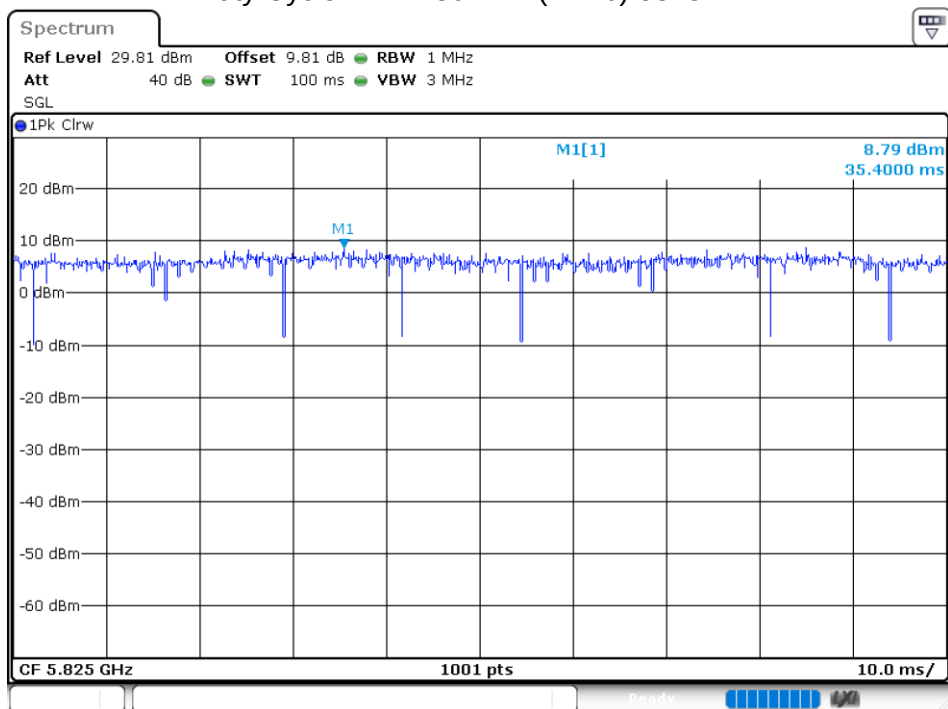

Duty Cycle NVNT 802.11n(HT40) 5755MHz

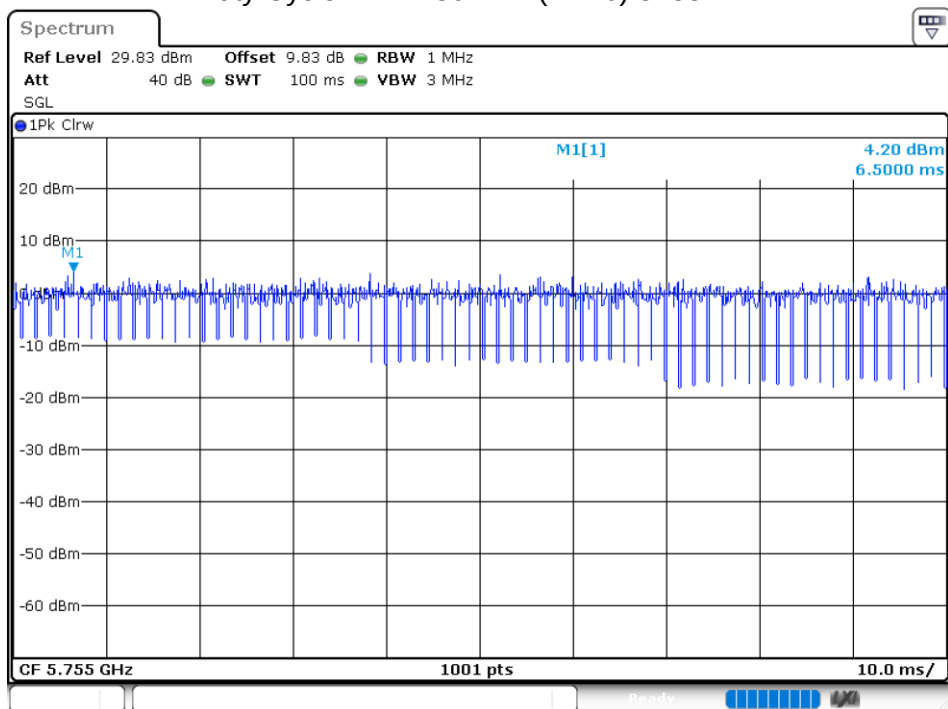

Duty Cycle NVNT 802.11n(HT40) 5795MHz

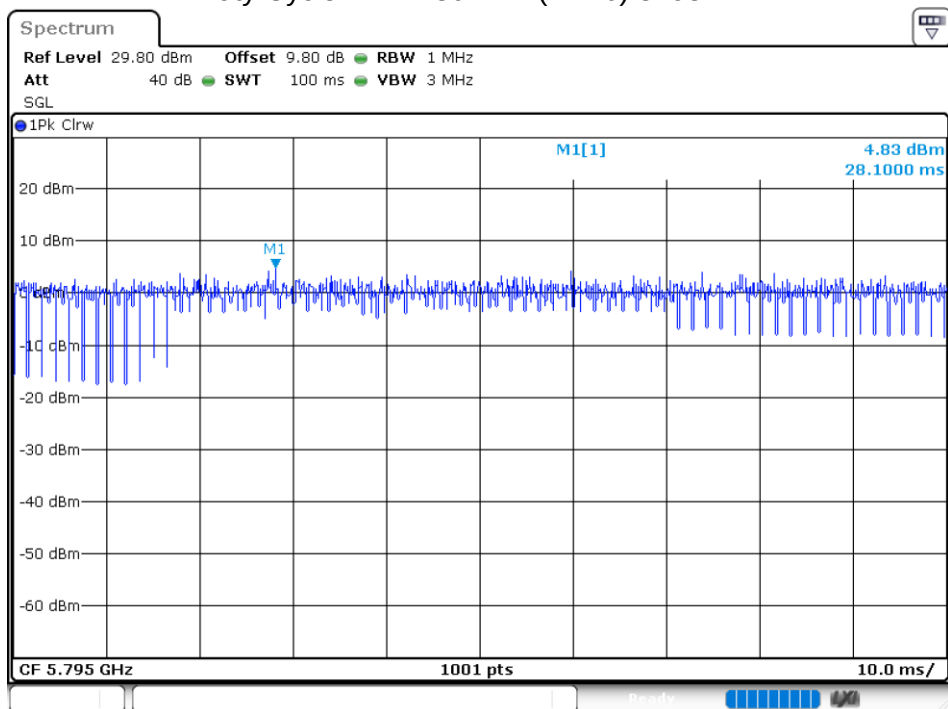

5.2 MAXIMUM CONDUCTED OUTPUT POWER

5.2G:

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5180	Ant 1	9.75	0	9.75	24	Pass
NVNT	802.11a	5200	Ant 1	9.57	0	9.57	24	Pass
NVNT	802.11a	5240	Ant 1	9.98	0	9.98	24	Pass
NVNT	802.11ac20	5180	Ant 1	8.88	0	8.88	24	Pass
NVNT	802.11ac20	5200	Ant 1	9.23	0	9.23	24	Pass
NVNT	802.11ac20	5240	Ant 1	9.53	0	9.53	24	Pass
NVNT	802.11ac40	5190	Ant 1	9.19	0	9.19	24	Pass
NVNT	802.11ac40	5230	Ant 1	9.66	0	9.66	24	Pass
NVNT	802.11ac80	5210	Ant 1	9	0	9	24	Pass
NVNT	802.11n(HT20)	5180	Ant 1	9.45	0	9.45	24	Pass
NVNT	802.11n(HT20)	5200	Ant 1	9.21	0	9.21	24	Pass
NVNT	802.11n(HT20)	5240	Ant 1	9.53	0	9.53	24	Pass
NVNT	802.11n(HT40)	5190	Ant 1	8.91	0	8.91	24	Pass
NVNT	802.11n(HT40)	5230	Ant 1	9.66	0	9.66	24	Pass

5.8G:


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5745	Ant 1	9.49	0	9.49	30	Pass
NVNT	802.11a	5785	Ant 1	10.42	0	10.42	30	Pass
NVNT	802.11a	5825	Ant 1	10.62	0	10.62	30	Pass
NVNT	802.11ac20	5745	Ant 1	9.54	0	9.54	30	Pass
NVNT	802.11ac20	5785	Ant 1	9.91	0	9.91	30	Pass
NVNT	802.11ac20	5825	Ant 1	10.46	0	10.46	30	Pass
NVNT	802.11ac40	5755	Ant 1	9.48	0	9.48	30	Pass
NVNT	802.11ac40	5795	Ant 1	10.1	0	10.1	30	Pass
NVNT	802.11ac80	5775	Ant 1	9.35	0	9.35	30	Pass
NVNT	802.11n(HT20)	5745	Ant 1	9.58	0	9.58	30	Pass
NVNT	802.11n(HT20)	5785	Ant 1	9.71	0	9.71	30	Pass
NVNT	802.11n(HT20)	5825	Ant 1	10.41	0	10.41	30	Pass
NVNT	802.11n(HT40)	5755	Ant 1	9.53	0	9.53	30	Pass
NVNT	802.11n(HT40)	5795	Ant 1	10.08	0	10.08	30	Pass

5.3 OCCUPIED CHANNEL BANDWIDTH


5.2G:

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	802.11a	5180	Ant 1	16.6663	21.292	Pass
NVNT	802.11a	5200	Ant 1	16.8343	21.416	Pass
NVNT	802.11a	5240	Ant 1	16.7103	21.2	Pass
NVNT	802.11ac20	5180	Ant 1	17.8902	21.66	Pass
NVNT	802.11ac20	5200	Ant 1	17.8102	21.424	Pass
NVNT	802.11ac20	5240	Ant 1	17.7062	20.952	Pass
NVNT	802.11ac40	5190	Ant 1	36.2764	40.312	Pass
NVNT	802.11ac40	5230	Ant 1	36.2604	40.2	Pass
NVNT	802.11ac80	5210	Ant 1	75.4485	85.888	Pass
NVNT	802.11n(HT20)	5180	Ant 1	17.8222	21.076	Pass
NVNT	802.11n(HT20)	5200	Ant 1	17.8822	21.116	Pass
NVNT	802.11n(HT20)	5240	Ant 1	17.9142	21.092	Pass
NVNT	802.11n(HT40)	5190	Ant 1	36.2844	39.96	Pass
NVNT	802.11n(HT40)	5230	Ant 1	36.2604	39.952	Pass


OBW NVNT 802.11a 5180MHz Ant1

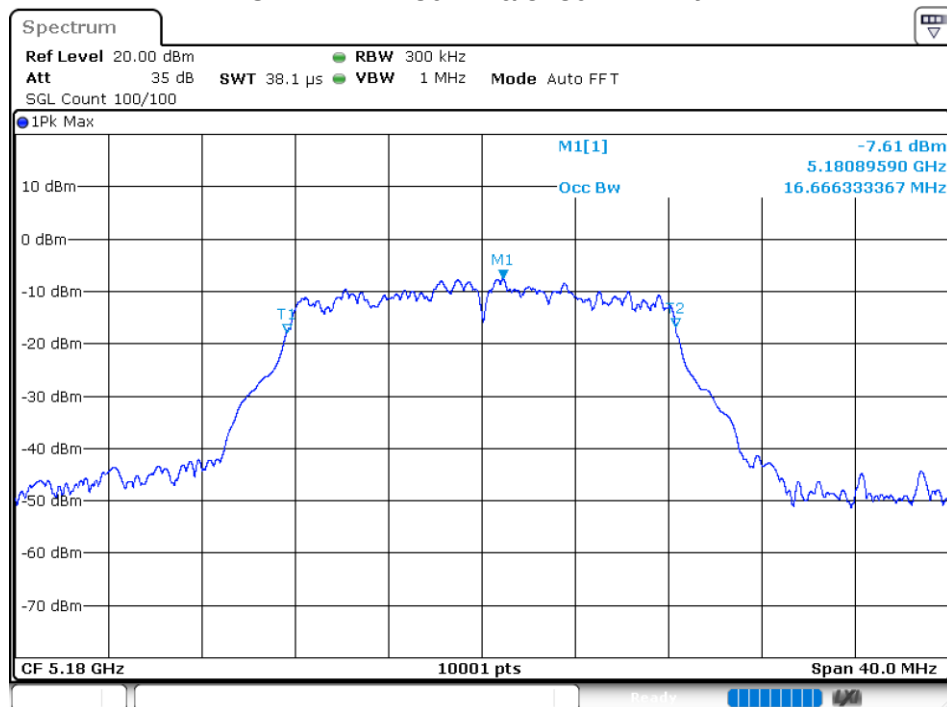


-26 dB BW NVNT 802.11a 5180MHz Ant1

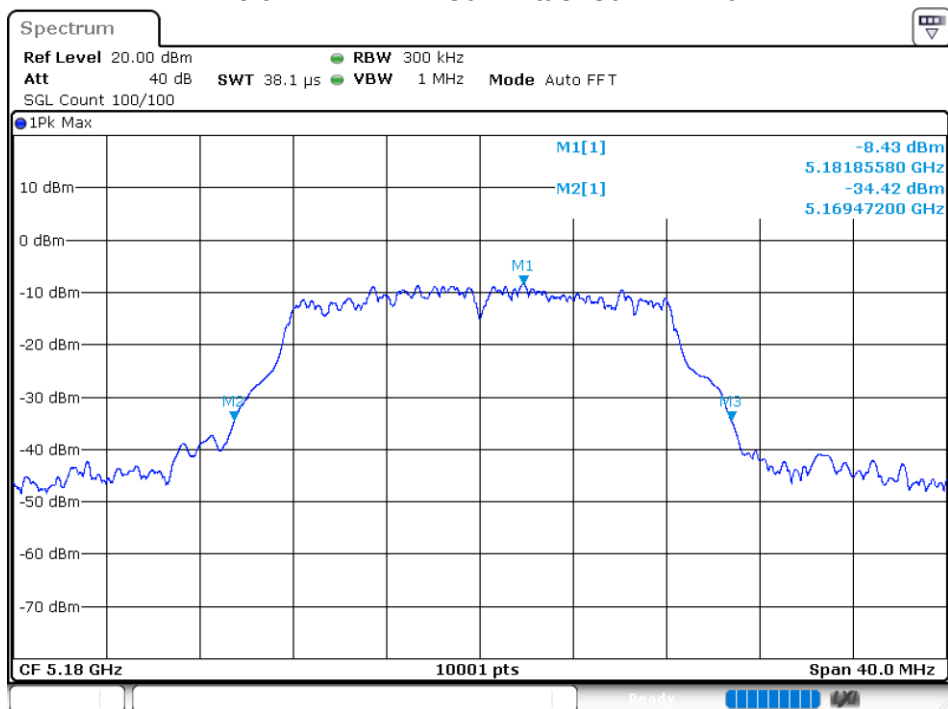


OBW NVNT 802.11a 5200MHz Ant1

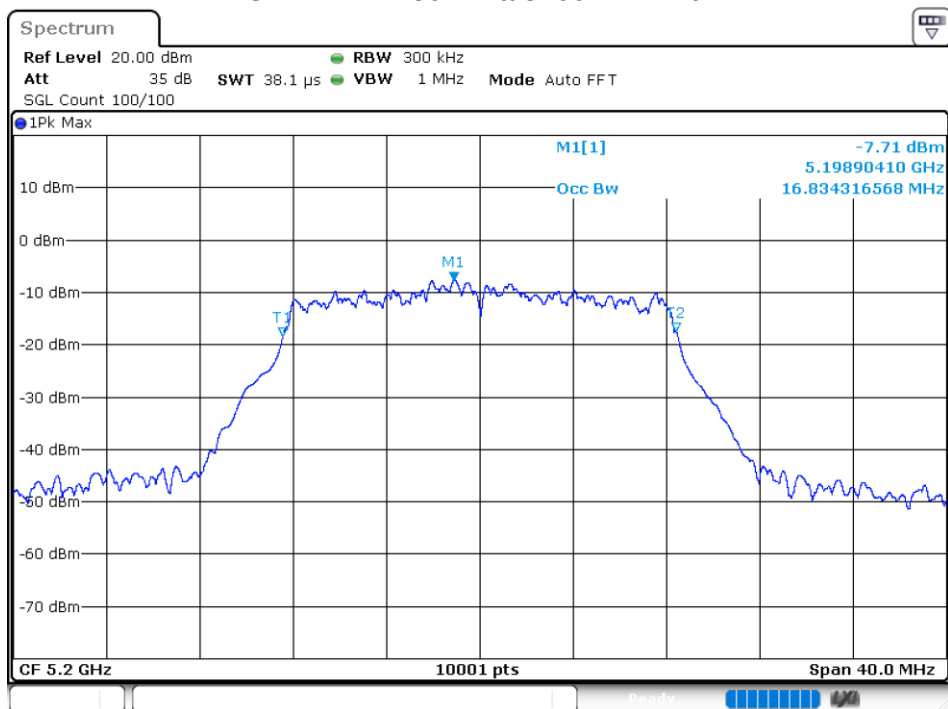


-26 dB BW NVNT 802.11a 5200MHz Ant1

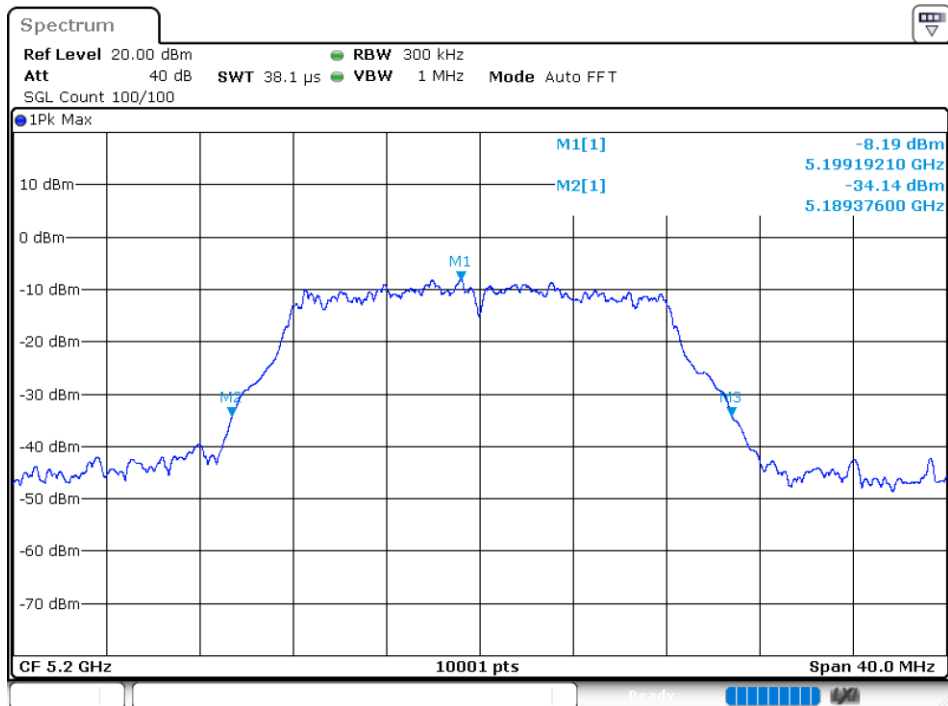


OBW NVNT 802.11a 5240MHz Ant1

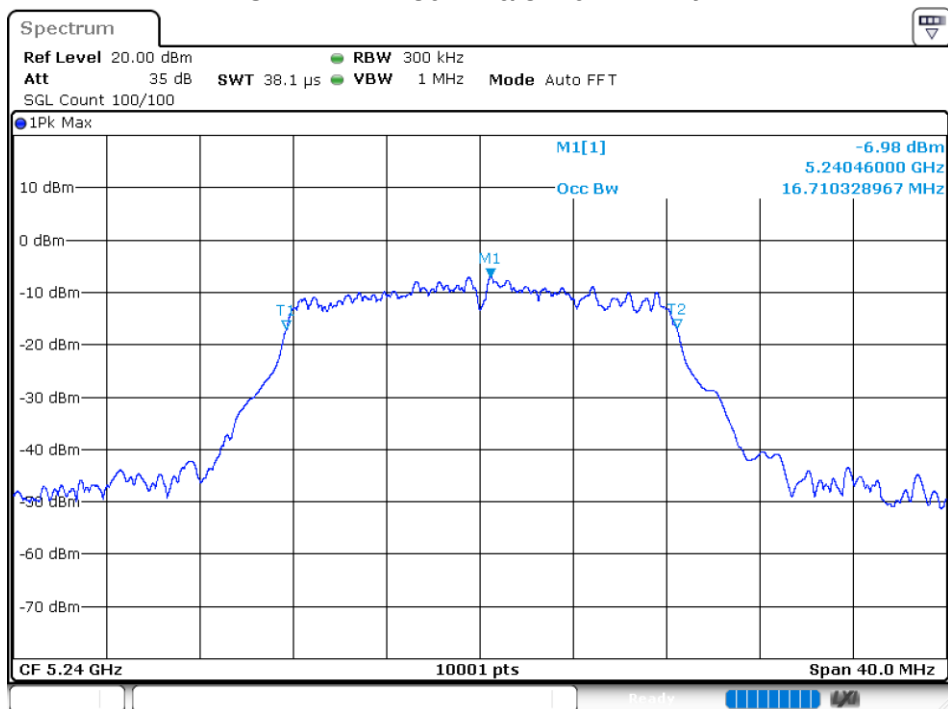


-26 dB BW NVNT 802.11a 5240MHz Ant1

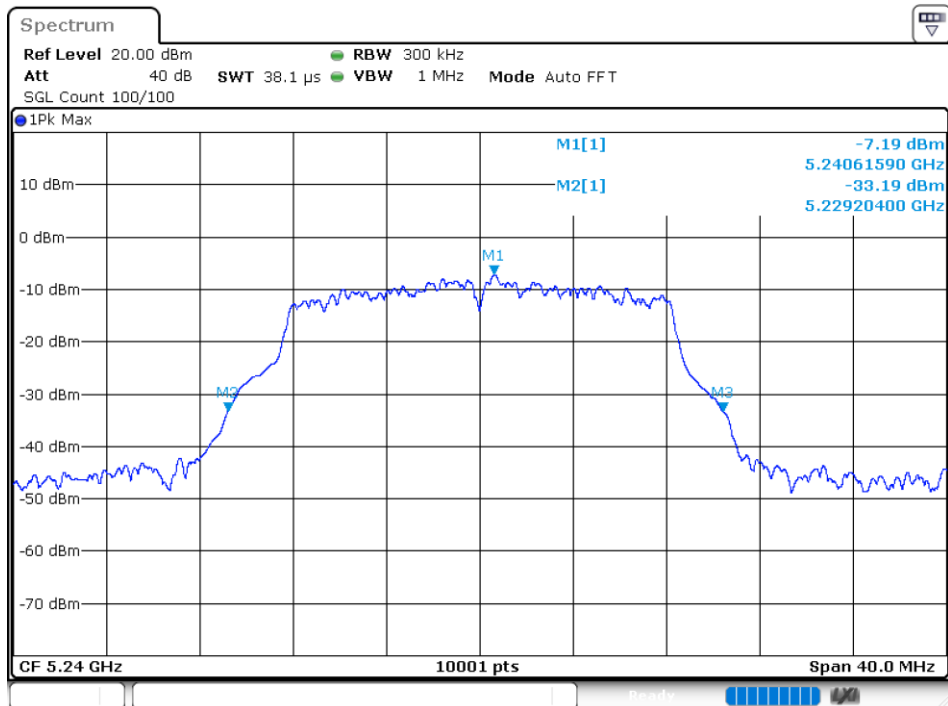


OBW NVNT 802.11ac20 5180MHz Ant1

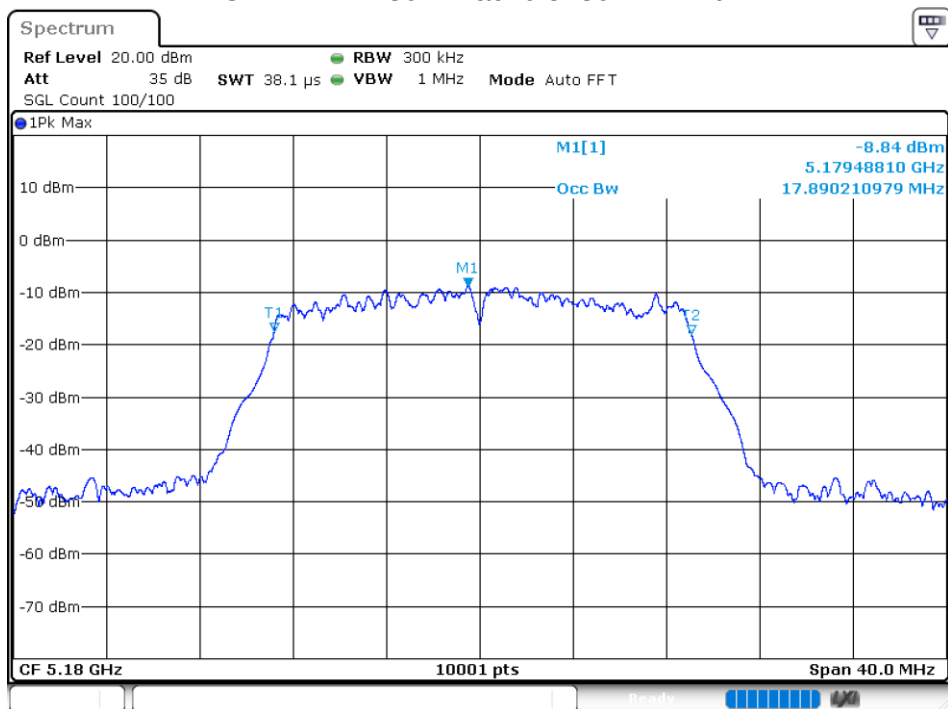


-26 dB BW NVNT 802.11ac20 5180MHz Ant1

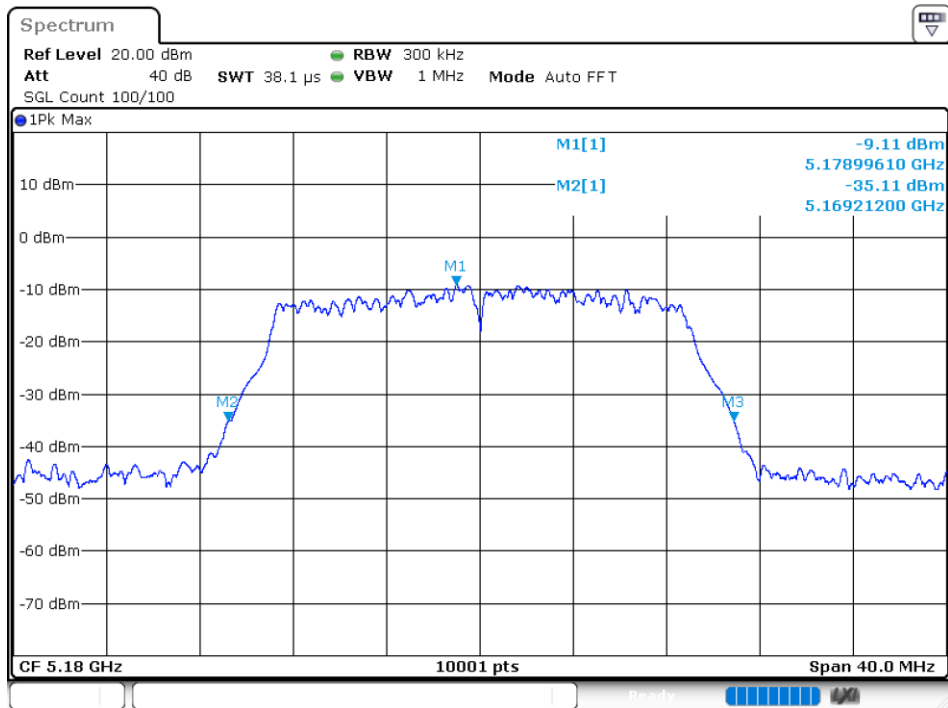


OBW NVNT 802.11ac20 5200MHz Ant1

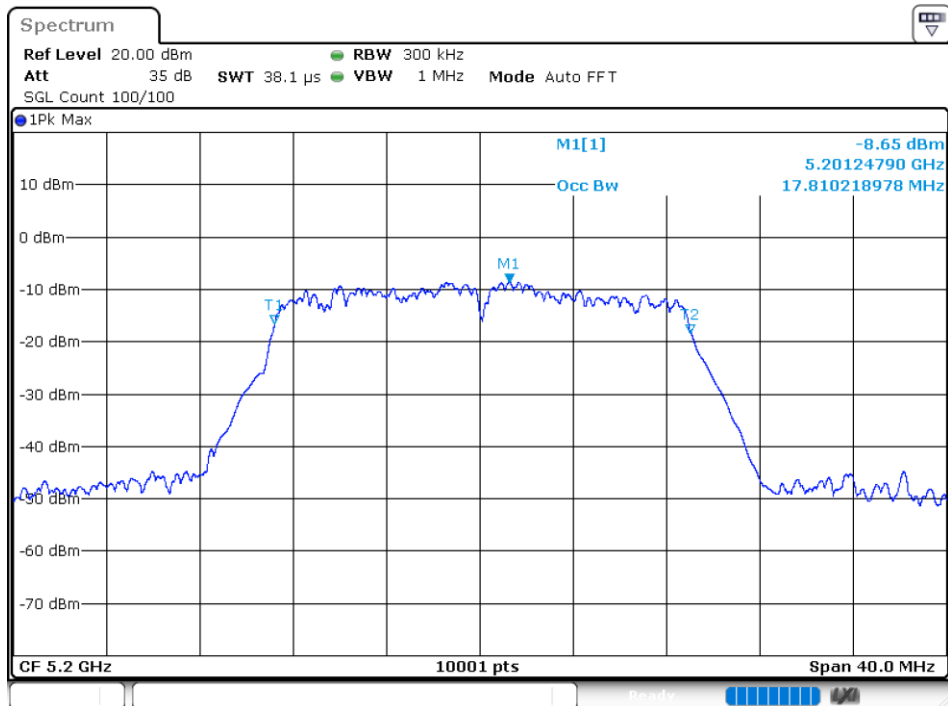


-26 dB BW NVNT 802.11ac20 5200MHz Ant1

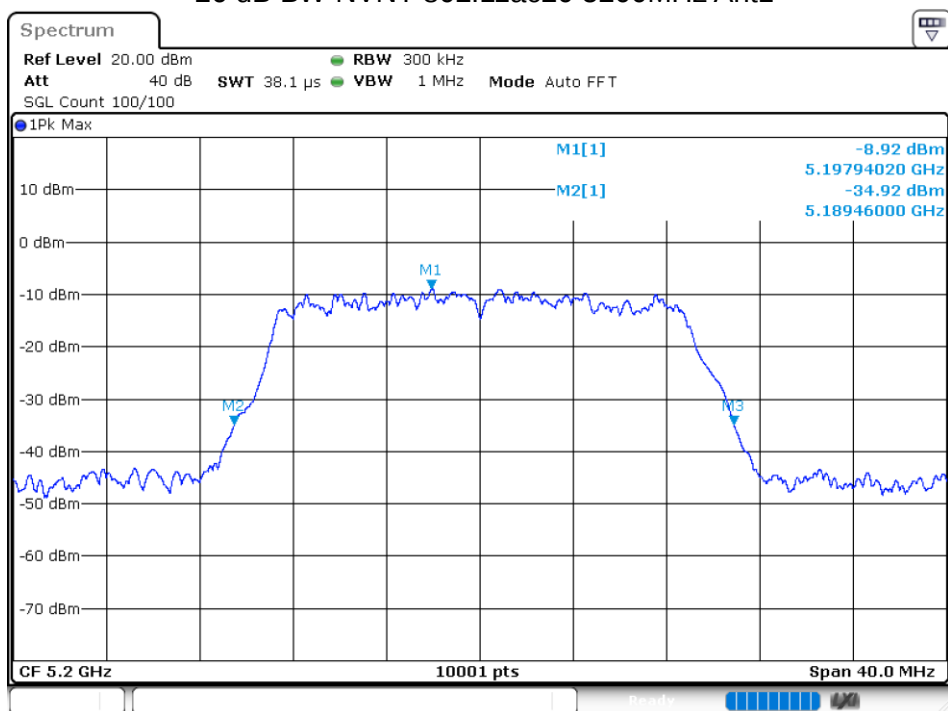


OBW NVNT 802.11ac20 5240MHz Ant1

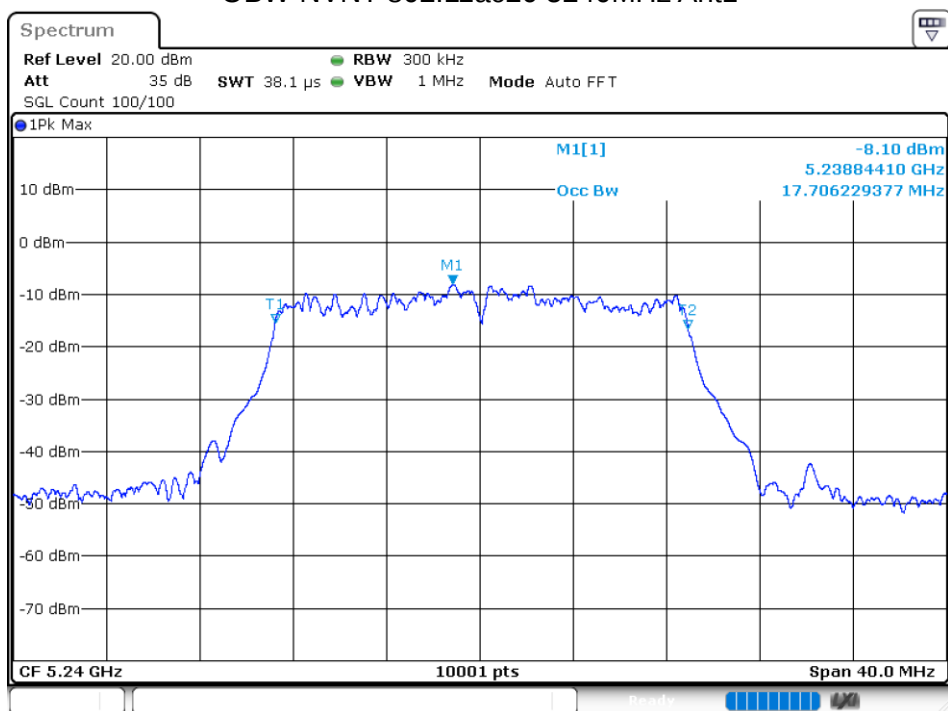


-26 dB BW NVNT 802.11ac20 5240MHz Ant1

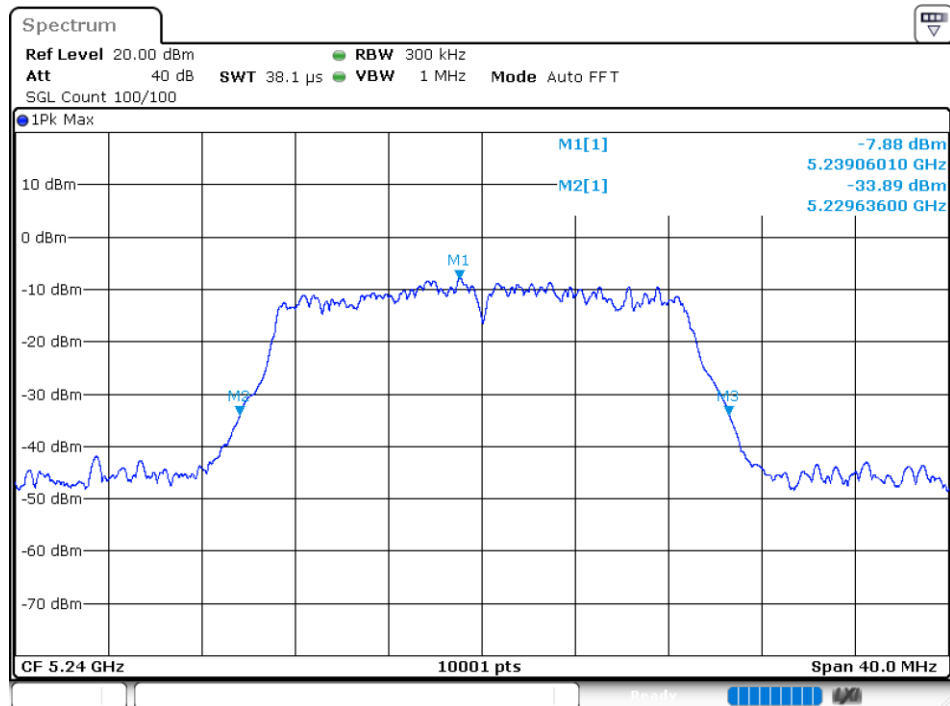


OBW NVNT 802.11ac40 5190MHz Ant1

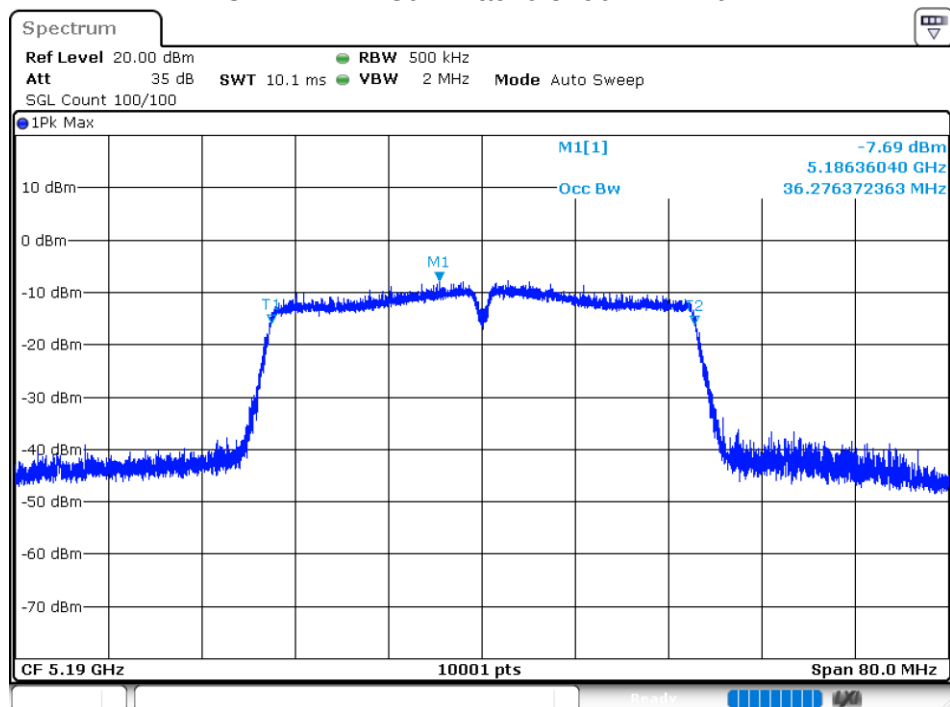


-26 dB BW NVNT 802.11ac40 5190MHz Ant1

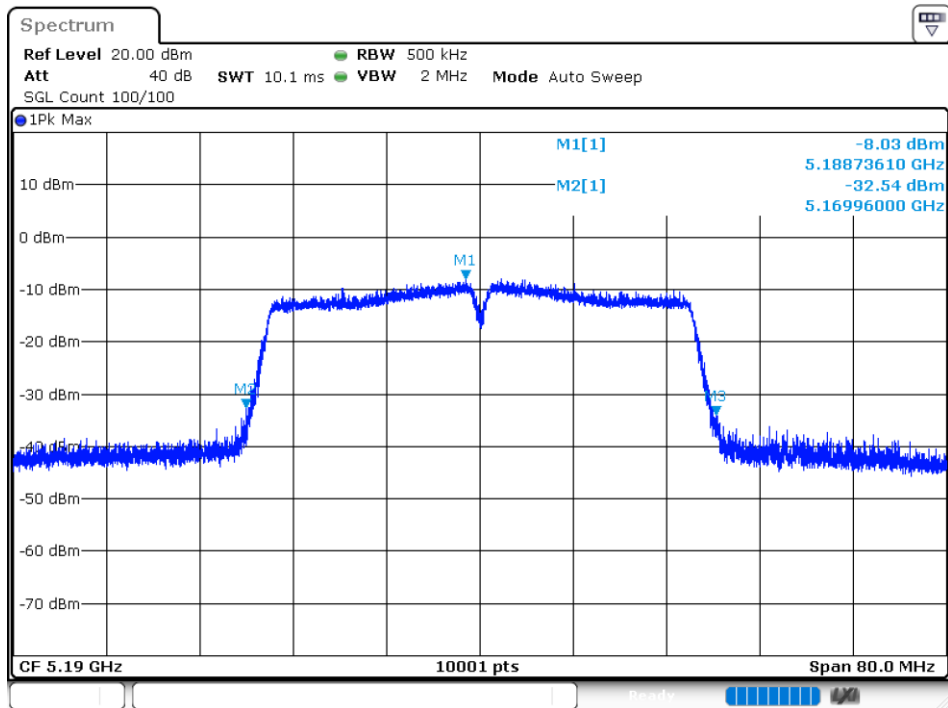


OBW NVNT 802.11ac40 5230MHz Ant1

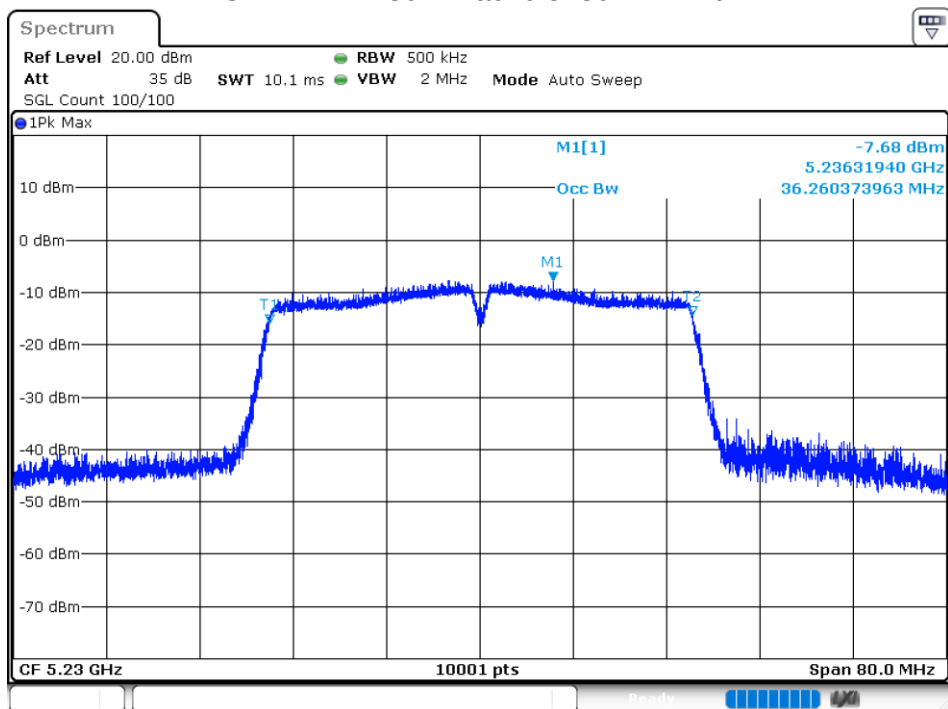


-26 dB BW NVNT 802.11ac40 5230MHz Ant1

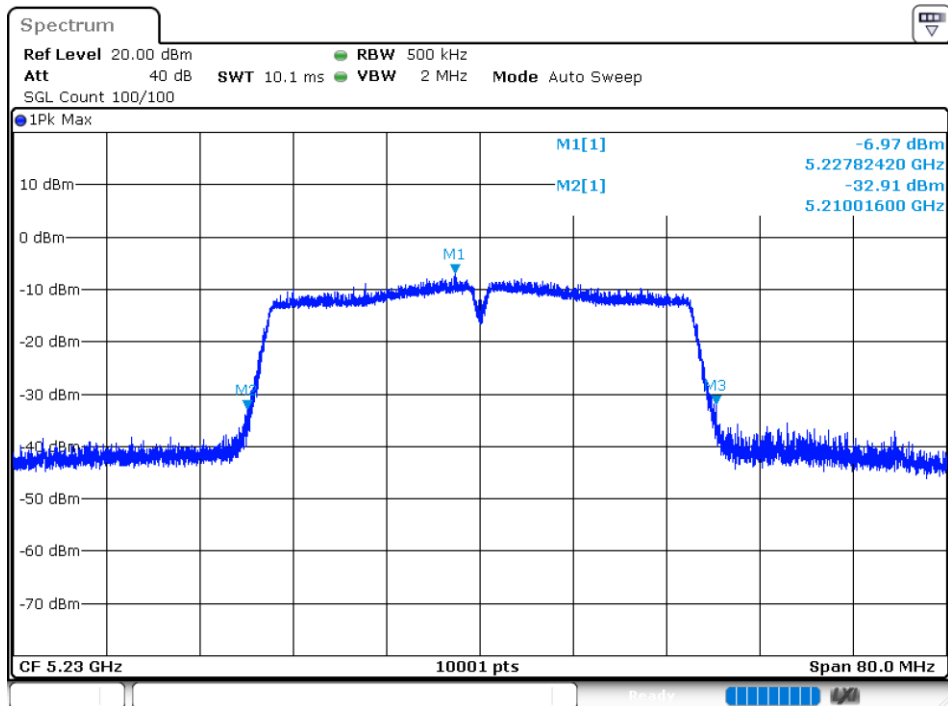


OBW NVNT 802.11ac80 5210MHz Ant1

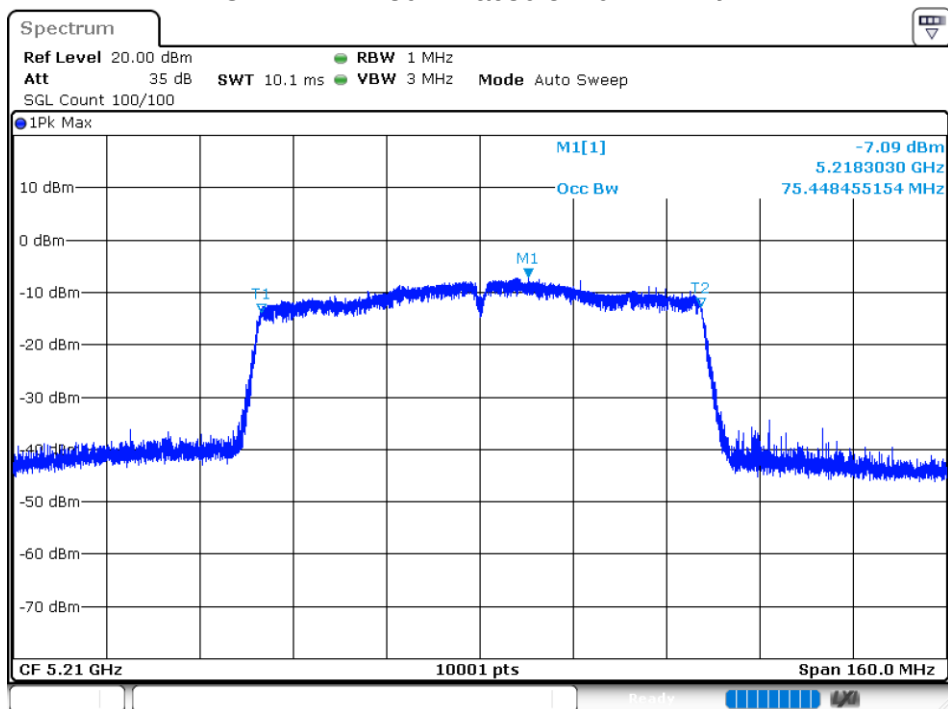


-26 dB BW NVNT 802.11ac80 5210MHz Ant1

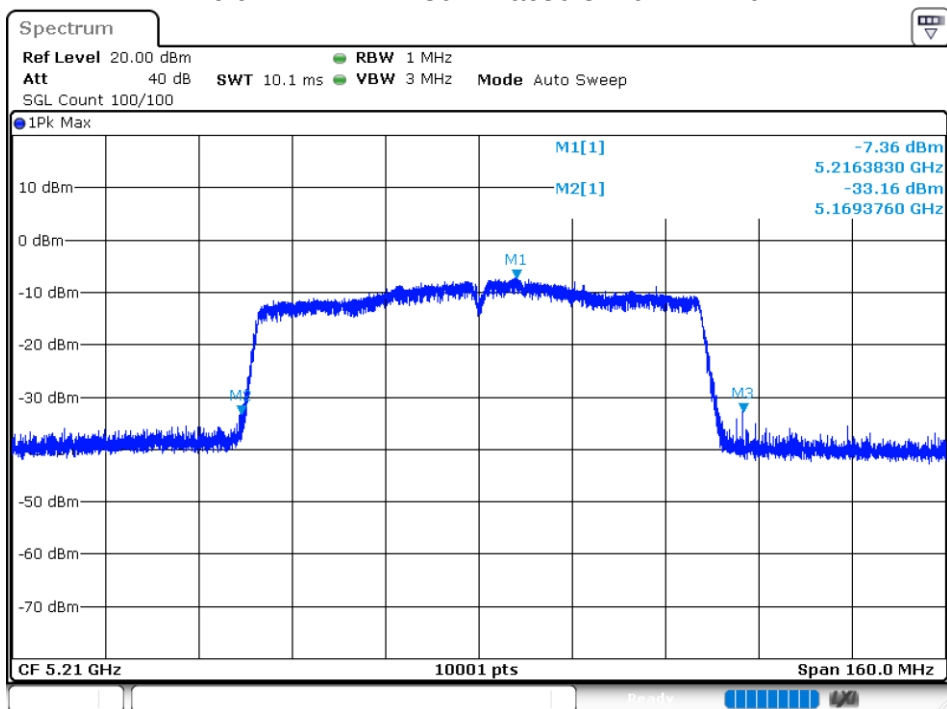


OBW NVNT 802.11n(HT20) 5180MHz Ant1

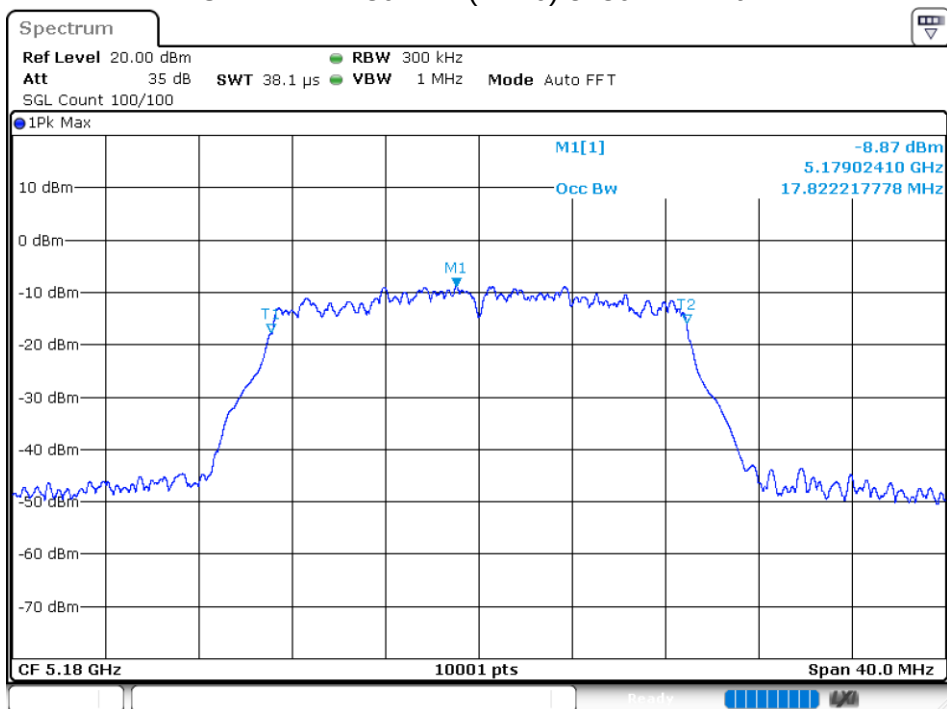


-26 dB BW NVNT 802.11n(HT20) 5180MHz Ant1

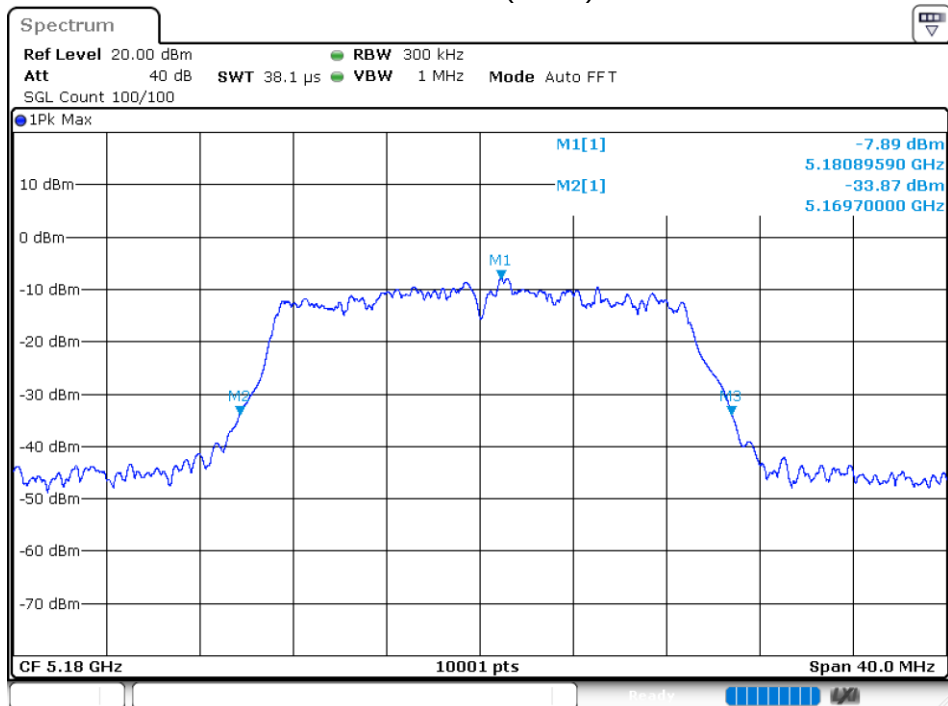


OBW NVNT 802.11n(HT20) 5200MHz Ant1

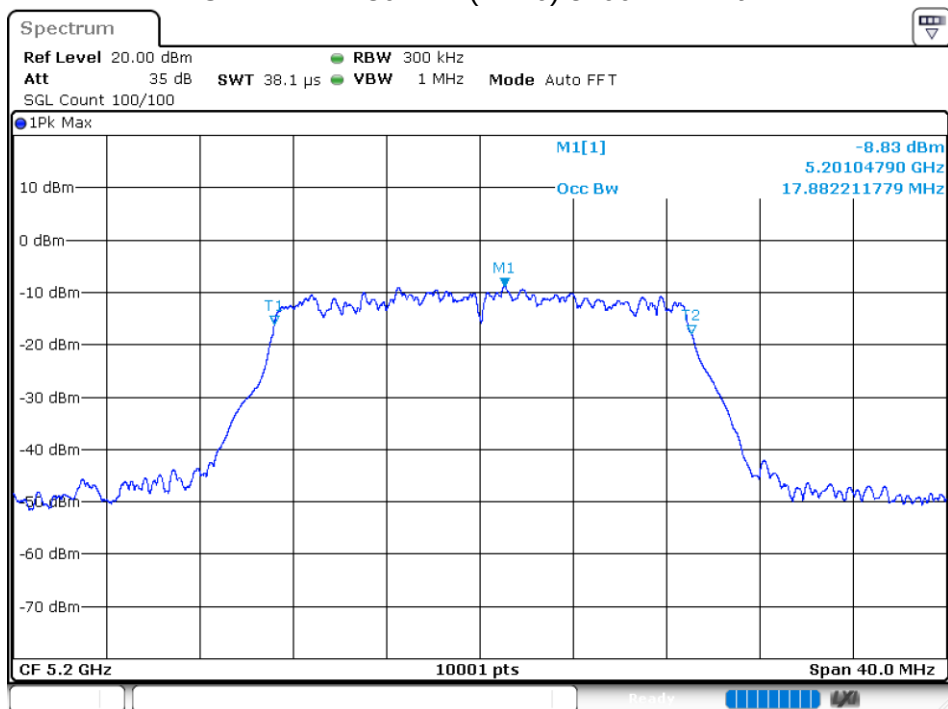


-26 dB BW NVNT 802.11n(HT20) 5200MHz Ant1

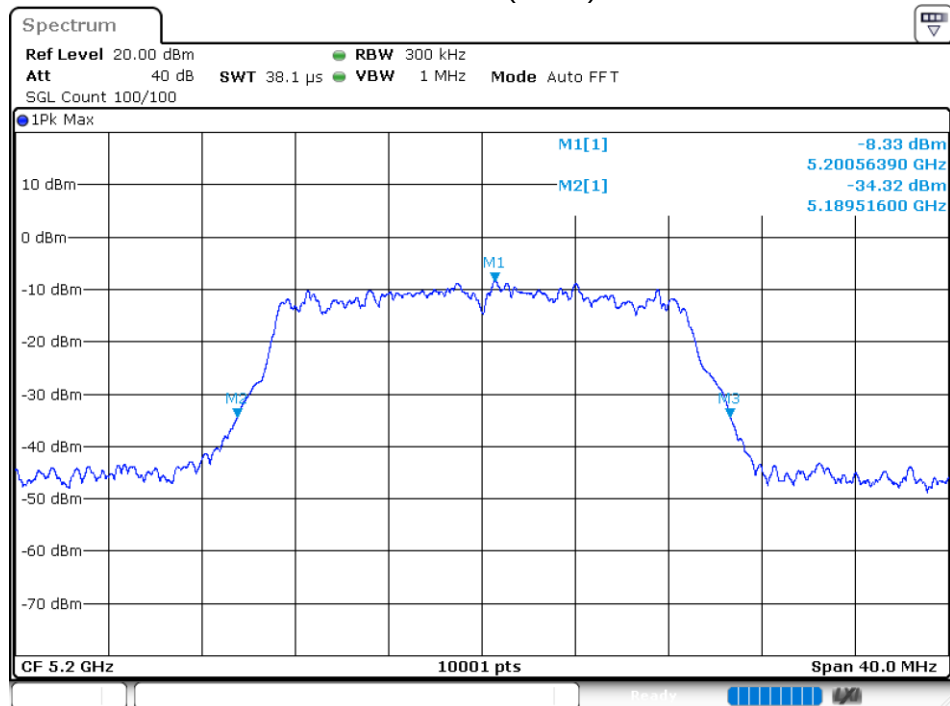


OBW NVNT 802.11n(HT20) 5240MHz Ant1

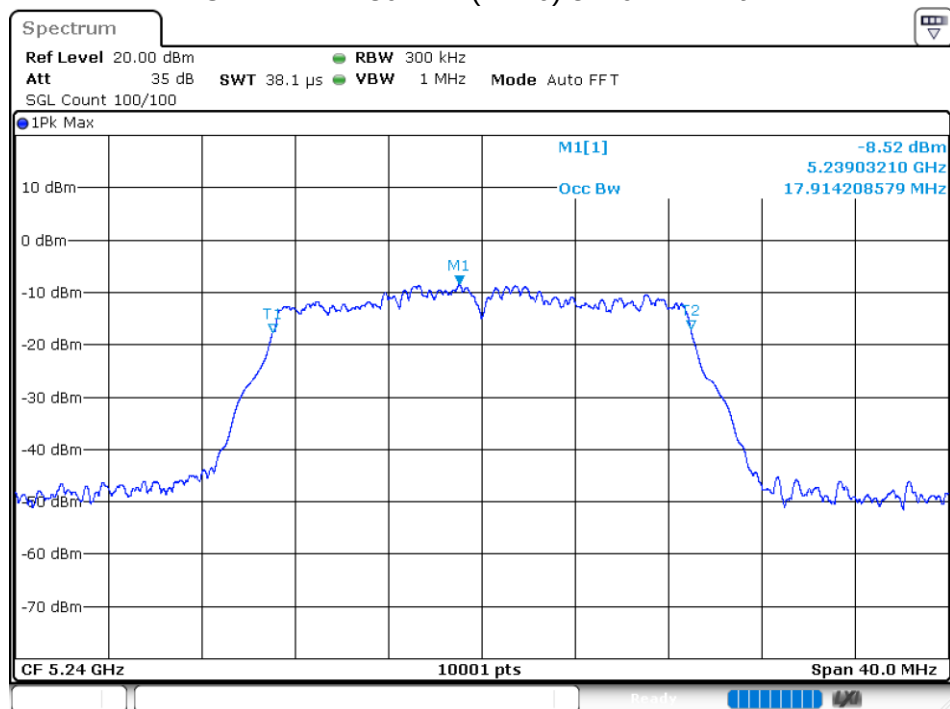


-26 dB BW NVNT 802.11n(HT20) 5240MHz Ant1

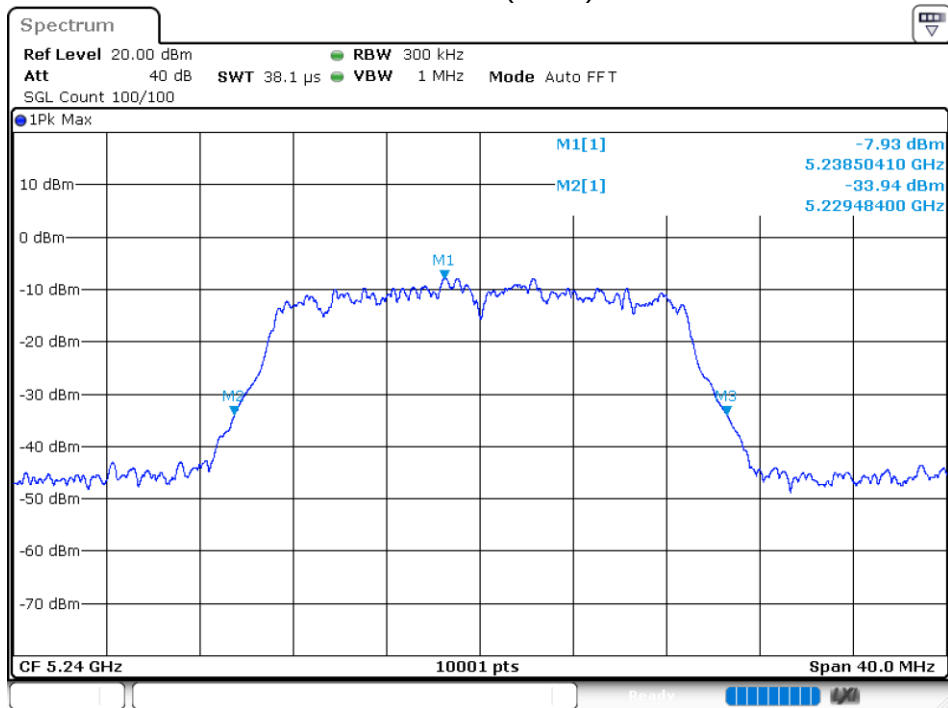


OBW NVNT 802.11n(HT40) 5190MHz Ant1

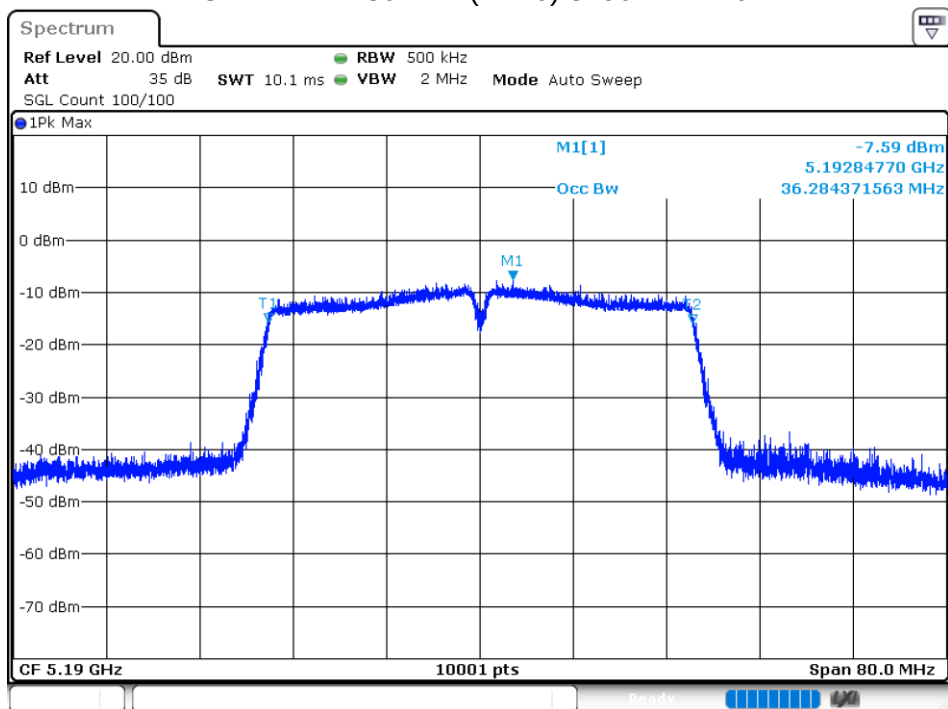


-26 dB BW NVNT 802.11n(HT40) 5190MHz Ant1

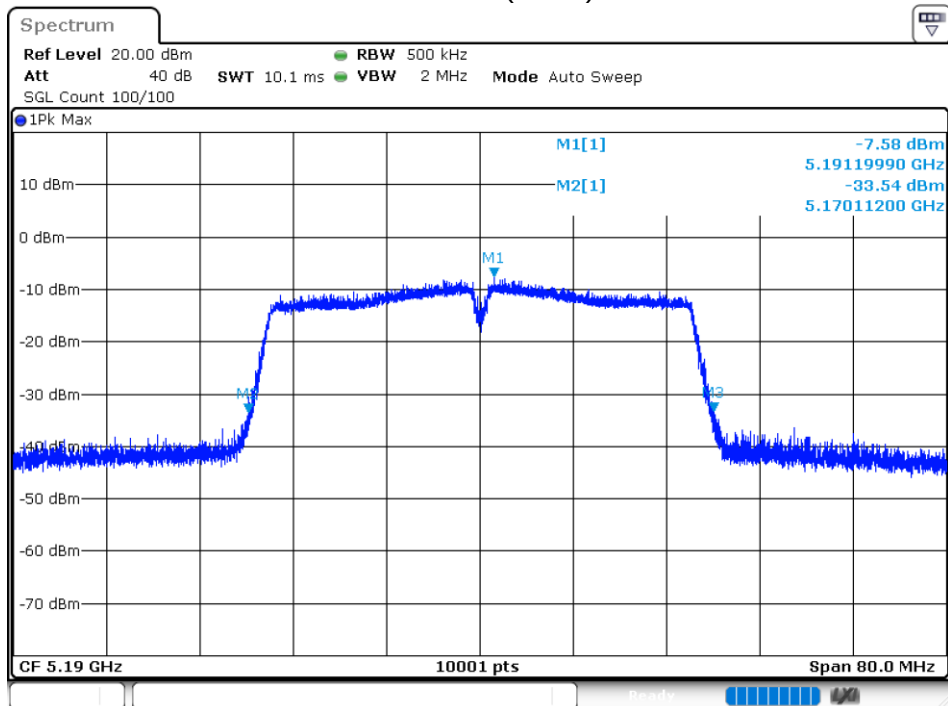

OBW NVNT 802.11n(HT40) 5230MHz Ant1

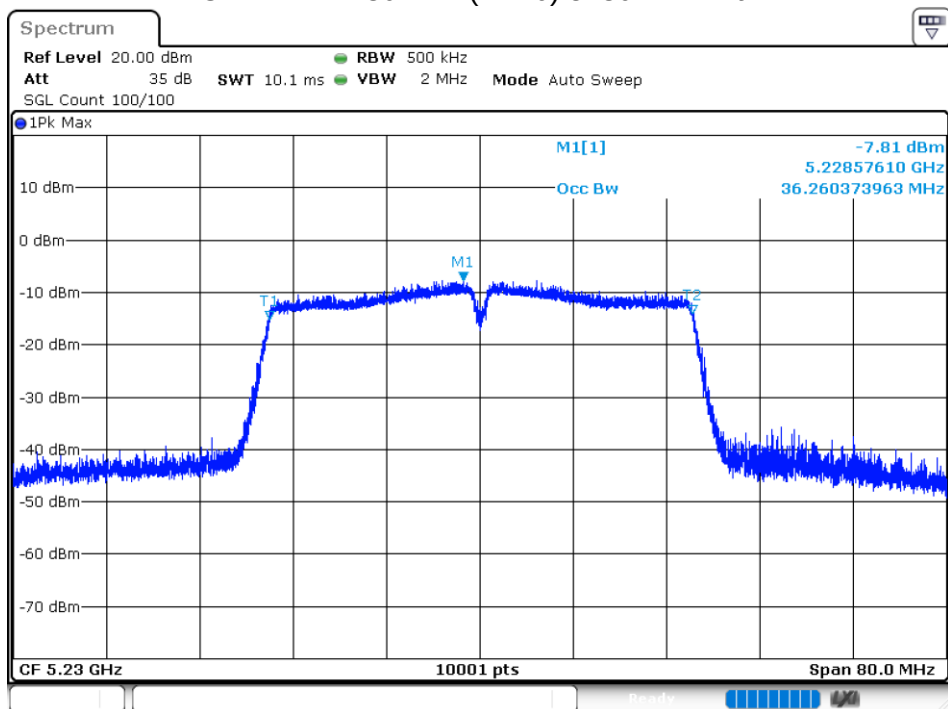


-26 dB BW NVNT 802.11n(HT40) 5230MHz Ant1

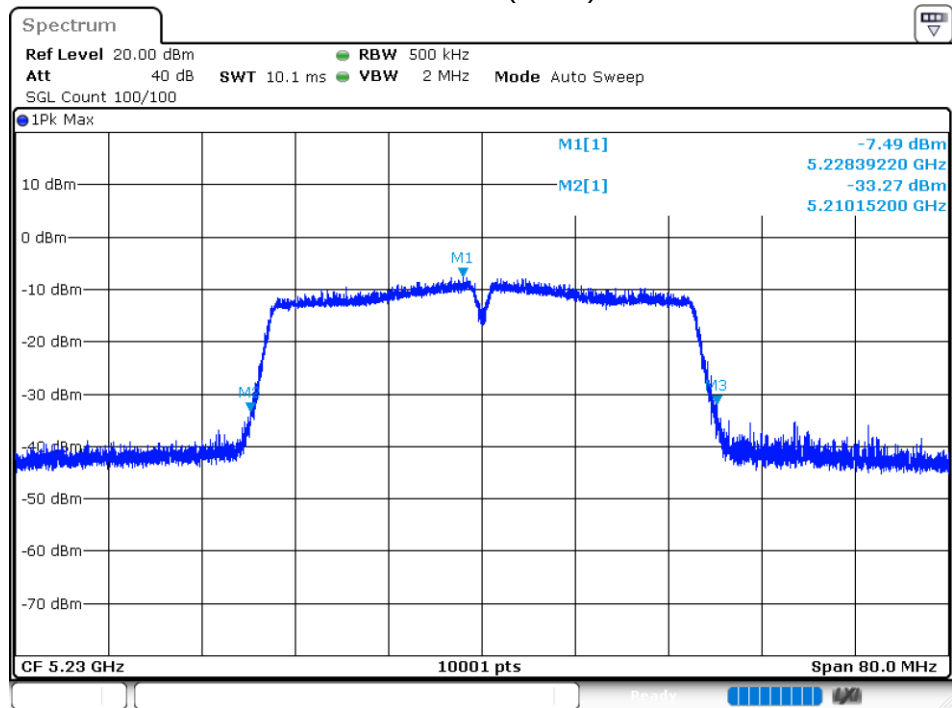


5.8G:

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	802.11a	5745	Ant 1	21.52	Pass
NVNT	802.11a	5785	Ant 1	21.52	Pass
NVNT	802.11a	5825	Ant 1	21.56	Pass
NVNT	802.11ac20	5745	Ant 1	21.88	Pass
NVNT	802.11ac20	5785	Ant 1	21.72	Pass
NVNT	802.11ac20	5825	Ant 1	21.84	Pass
NVNT	802.11ac40	5755	Ant 1	40.48	Pass
NVNT	802.11ac40	5795	Ant 1	40.4	Pass
NVNT	802.11ac80	5775	Ant 1	81.6	Pass
NVNT	802.11n(HT20)	5745	Ant 1	21.88	Pass
NVNT	802.11n(HT20)	5785	Ant 1	21.72	Pass
NVNT	802.11n(HT20)	5825	Ant 1	21.72	Pass
NVNT	802.11n(HT40)	5755	Ant 1	39.92	Pass
NVNT	802.11n(HT40)	5795	Ant 1	39.76	Pass

OBW NVNT 802.11a 5745MHz Ant1

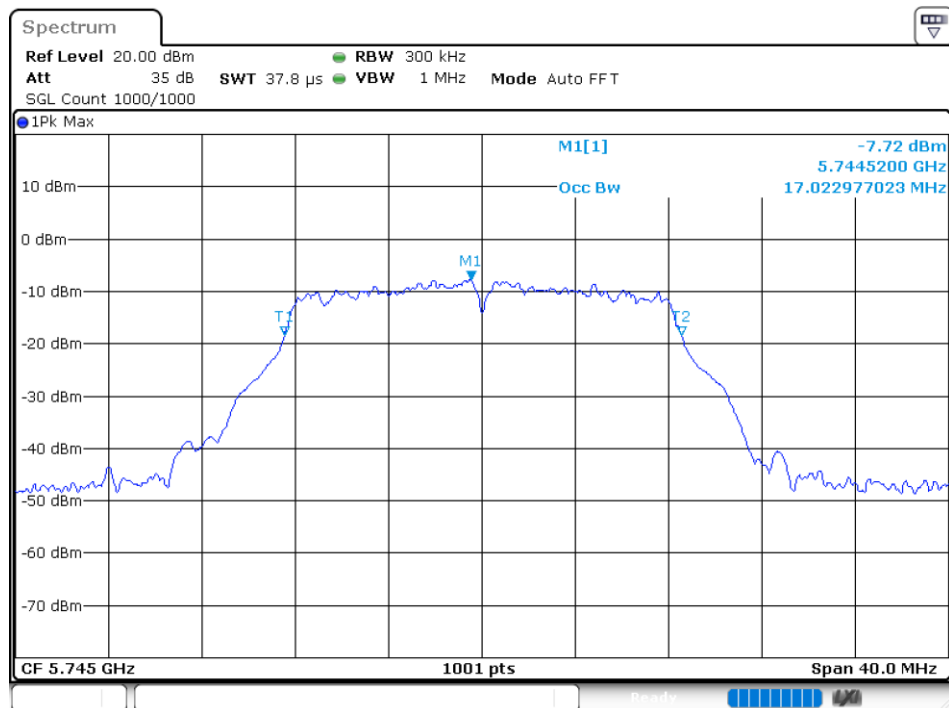

-26 dB BW NVNT 802.11a 5745MHz Ant1

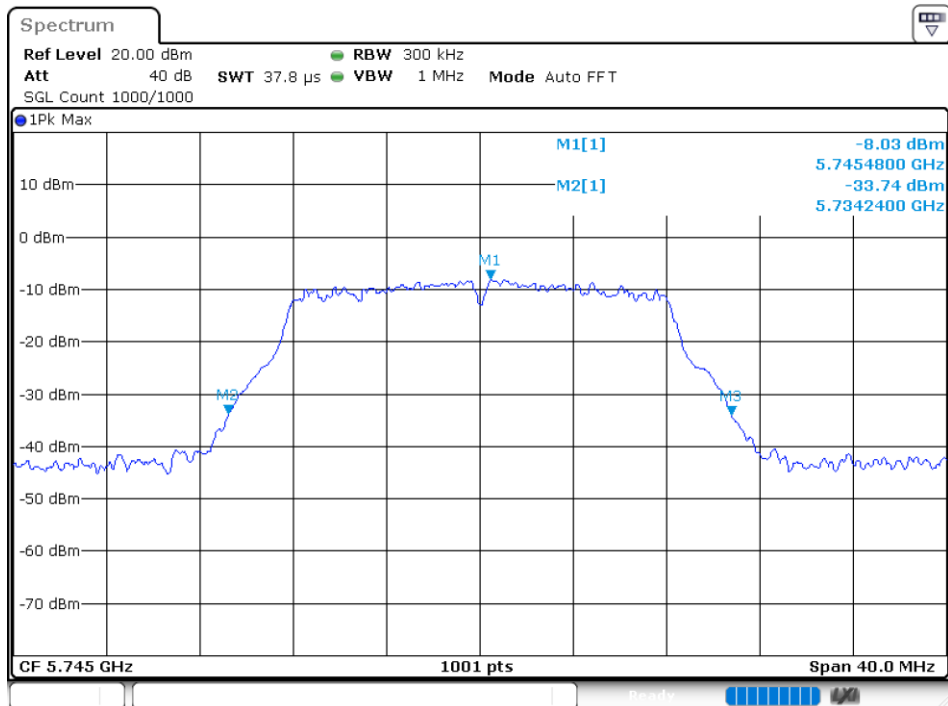

OBW NVNT 802.11a 5785MHz Ant1

